

FCC PART 15.239
MEASUREMENT AND TEST REPORT
FOR

Ablelink Electronics Limited

Room 506, Remington Centre, 23 Hung To Road, Kwun Tong, Kowloon, Hong Kong

Kong

FCC ID: YHEP2401

Report Concerns: Original Report	Equipment Type: Bluetrip
Model:	<u>P2401</u>
Report No.:	<u>STR10088161I-2</u>
Test Date:	<u>2010-08-25 to 2010-10-22</u>
Issue Date:	<u>2010-11-05</u>
Tested By:	<u>Susan Su / Engineer</u> <i>Susan Su</i>
Reviewed By:	<u>Lahm Peng / EMC Manager</u> <i>Lahm peng</i>
Approved & Authorized By:	<u>Jandy so / PSQ Manager</u> <i>Jandy so</i>
Prepared By:	SEM.Test Compliance Service Co., Ltd 3/F, Jinbao Commerce Building, Xin'an Fanshen Road, Bao'an District, Shenzhen, P.R.C. (518101) Tel.: +86-755-33663308 Fax.: +86-755-33663309 Website: www.semtest.com.cn

Note: This test report is limited to the above client company and the product model only. It may not be duplicated without prior permission by SEM.Test Compliance Service Co., Ltd.

TABLE OF CONTENTS

1. GENERAL INFORMATION	3
1.1 PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
1.2 TEST STANDARDS.....	3
1.3 RELATED SUBMITTAL(S)/GRANT(S)	3
1.4 TEST METHODOLOGY	4
1.5 TEST FACILITY	4
1.6 EUT EXERCISE SOFTWARE	4
1.7 ACCESSORIES EQUIPMENT LIST AND DETAILS	4
1.8 EUT CABLE LIST AND DETAILS	4
2. SUMMARY OF TEST RESULTS	5
3. §15.203 - ANTENNA REQUIREMENT	6
3.1 STANDARD APPLICABLE.....	6
3.2 TEST RESULT.....	6
4. §15.209, §15.239 (B)(C)- RADIATED EMISSION	7
4.1 MEASUREMENT UNCERTAINTY	7
4.2 STANDARD APPLICABLE.....	7
4.3 TEST EQUIPMENT LIST AND DETAILS	7
4.4 TEST PROCEDURE.....	7
4.5 CORRECTED AMPLITUDE & MARGIN CALCULATION.....	8
4.6 ENVIRONMENTAL CONDITIONS	8
4.7 SUMMARY OF TEST RESULTS/PLOTS	8
5. §15.239(A) EMISSION BANDWIDTH TESTING.....	15
5.1 STANDARD APPLICABLE.....	15
5.2 TEST EQUIPMENT LIST AND DETAILS	15
5.3 TEST PROCEDURE.....	15
5.4 ENVIRONMENTAL CONDITIONS	15
5.5 SUMMARY OF TEST RESULTS/PLOTS	15
6. §15.249(B) OUT OF BAND EMISSIONS	18
6.1 STANDARD APPLICABLE.....	18
6.2 TEST EQUIPMENT LIST AND DETAILS	18
6.3 TEST PROCEDURE.....	18
6.4 ENVIRONMENTAL CONDITIONS	18
6.5 SUMMARY OF TEST RESULTS/PLOTS	18

1. GENERAL INFORMATION

1.1 Product Description for Equipment Under Test (EUT)

Applicant: Ablelink Electronics Limited
Address of applicant: Room 506, Remington Centre, 23 Hung To Road, Kwun Tong, Kowloon, Hong Kong

Manufacturer: Ablelink Electronics Limited
Address of manufacturer: Block 46, Arising Sun Industrial City, Lin Cun, Tang Xia, Dong Guan, China

General Description of E.U.T

Items	Description
EUT Description:	Bluetrip
Trade Name:	GRiffin
Model No.:	P2401
Rated Voltage:	DC 12V
Output Power:	< 0 dBm for Bluetooth; <-43 dBm for FM Tx
Frequency Range:	2402-2480MHz for Bluetooth 88.1-107.9MHz for FM Tx
Number of channels:	79 for Bluetooth; 100 for FM Tx
Channel Separation:	1MHz for Bluetooth; 200kHz for FM Tx
Antenna Type:	Integral Antenna
Size:	28.9x6.7x4.3cm
Comment:	Manual Operation Device

For more information refer to the circuit diagram form and the user's manual.

The test data gathered are from a production sample, provided by the manufacturer.

1.2 Test Standards

The following report of is prepared on behalf of the Ablelink Electronics Limited in accordance with FCC Part 15, Subpart C, and section 15.239, 15.203 and 15.209 of the Federal Communication Commissions rules.

The objective is to determine compliance with FCC Part 15, Subpart C, and section 15.239, 15.203 and 15.209 of the Federal Communication Commissions rules.

Maintenance of compliance is the responsibility of the manufacturer. Any modification of the product, which result in lowering the emission/immunity, should be checked to ensure compliance has been maintained.

1.3 Related Submittal(s)/Grant(s)

No Related Submittal(s).

1.4 Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2003, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

The equipment under test (EUT) was configured to measure its highest possible emission level. The test modes were adapted accordingly in reference to the Operating Instructions. The EUT was tested in all three orthogonal planes and the worse case was showed.

1.5 Test Facility

- **FCC – Registration No.: 994117**

SEM.Test Compliance Services Co., Ltd. EMC Laboratory has been registered and fully described in a report filed with the (FCC) Federal Communications Commission. The acceptance letter from the FCC is maintained in our files and the Registration is 994117.

- **Industry Canada (IC) Registration No.: 7673A**

The 3m Semi-anechoic chamber of SEM.Test Compliance Services Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 7673A.

1.6 EUT Exercise Software

The EUT exercise program used during the testing was designed to exercise the system components. The test software is started while the EUT system is on.

1.7 Accessories Equipment List and Details

Description	Manufacturer	Model	Serial Number
/	/	/	/

1.8 EUT Cable List and Details

Cable Description	Length (M)	Shielded/Unshielded	With Core/Without Core
/	/	/	/

2. SUMMARY OF TEST RESULTS

Description of Test	Result
§15.203 Antenna Requirement	Compliant
§15.209 General Requirement	Compliant
§15.239 (c) Out of band emission Testing	Compliant
§15.239 (a) Emission Bandwidth Testing	Compliant
§15.239 (b) Radiated Emission	Compliant

3. §15.203 - ANTENNA REQUIREMENT

3.1 Standard Applicable

According to FCC 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section.

3.2 Test Result

This product has a permanent antenna, fulfill the requirement of this section.

4. §15.209, §15.239 (b)(c)- RADIATED EMISSION

4.1 Measurement Uncertainty

Based on NIS 81, The Treatment of Uncertainty in EMC Measurements, the best estimate of the uncertainty of a radiation emissions measurement is ± 5.10 dB.

4.2 Standard Applicable

According to §15.239(b), The field strength of any emissions within the permitted 200 kHz band shall not exceed 250 microvolts/meter at 3 meters. The emission limit in this paragraph is based on measurement instrumentation employing an average detector. The provisions in §15.35 for limiting peak emissions apply.

According to §15.239(c), The field strength of any emissions radiated on any frequency outside of the specified 200 kHz band shall not exceed the general radiated emission limits in §15.209.


4.3 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	R&S	FSP	836079/035	2010-04-16	2011-04-15
EMI Test Receiver	R&S	ESVB	825471/005	2010-08-12	2011-08-11
Positioning Controller	C&C	CC-C-1F	N/A	2010-08-12	2011-08-11
RF Switch	EM	EMSW18	SW060023	2010-08-12	2011-08-11
Pre-amplifier	Agilent	8447F	3113A06717	2010-08-12	2011-08-11
Pre-amplifier	Compliance Direction	PAP-0118	24002	2010-08-12	2011-08-11
Trilog Broadband Antenna	SCHWARZBECK	VULB9163	9163-333	2010-07-21	2011-07-20
Horn Antenna	ETS	3117	00086197	2010-07-21	2011-07-20

Statement of Traceability: All calibrations have been performed per the NVLAP requirements traceable to the NIST.

4.4 Test Procedure

The setup of EUT is according with per ANSI C63.4-2003 measurement procedure. The specification used was with the FCC Part 15.239(b) and FCC Part 15.209 Limit.

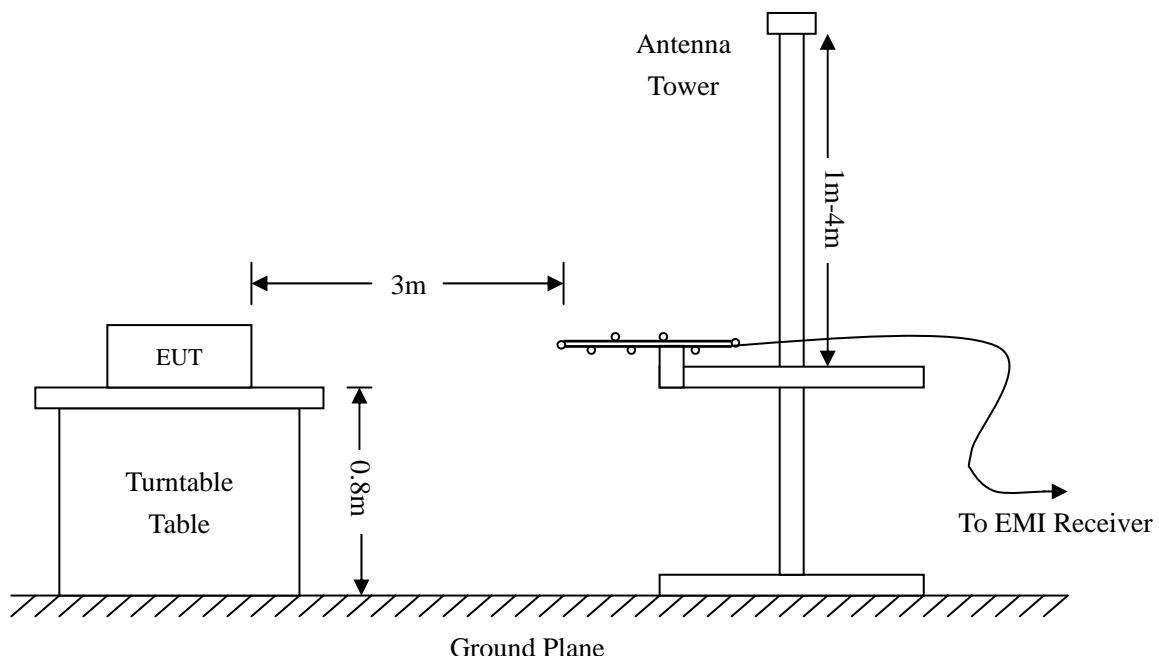

4.5 Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and the Cable Factor, and subtracting the Amplifier Gain from the Amplitude reading. The basic equation is as follows:

$$\text{Corr. Ampl.} = \text{Indicated Reading} + \text{Ant.Loss} + \text{Cab. Loss} - \text{Ampl.Gain}$$

The “Margin” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of -6dB μ V means the emission is 6dB μ V below the maximum limit for Class B. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Corr. Ampl.} - \text{FCC Part 15.239 Limit}$$

4.6 Environmental Conditions

Temperature:	21°C
Relative Humidity:	50%
ATM Pressure:	1011 mbar

4.7 Summary of Test Results/Plots

According to the data below, the FCC Part 15.209 and 15.239 standards, and had the worst margin of:

-3.38 dB μ V at 88.1 MHz in the Horizontal polarization, Low Channel, 30 MHz to 1 GHz, 3Meters

-9.00 dB μ V at 234.1684 MHz in the Horizontal polarization, Mid Channel, 30 MHz to 1 GHz, 3Meters


-5.84 dB μ V at 232.5318 MHz in the Horizontal polarization, High Channel, 30 MHz to 1 GHz, 3Meters

Note: this EUT was tested in 3 orthogonal positions and the worst case position data was reported.

Plot of Radiation Emissions Test


Low Channel (88.1MHz)

Horizontal

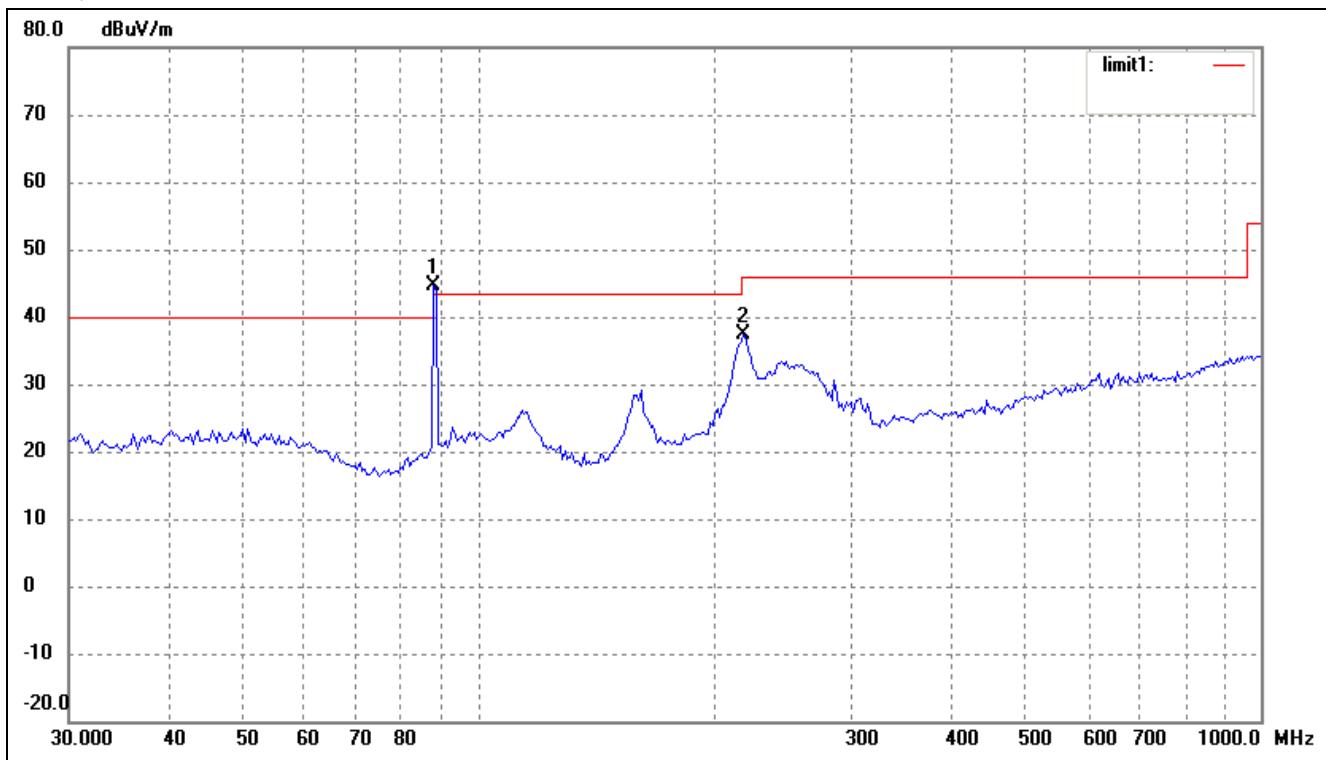

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	88.1000	38.81	5.81	44.62	48.00	-3.38	114	200	Ave
	88.1000	38.94	5.81	44.75	68.00	-22.25	114	200	peak
2	218.3085	31.22	6.28	37.50	46.00	-8.50	25	200	peak


Vertical

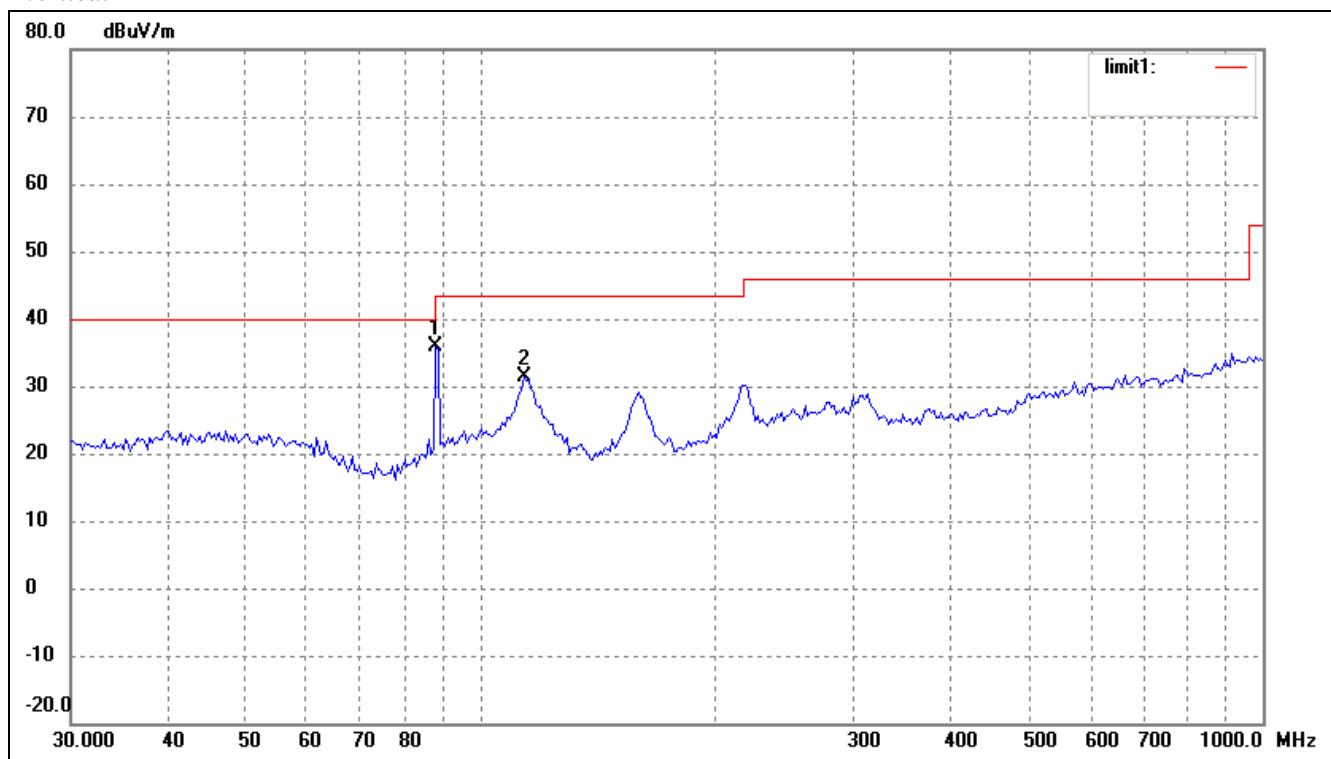

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	88.1000	30.17	5.81	35.98	48.00	-12.02	330	200	Ave
	88.1000	30.20	5.81	36.01	68.00	-31.99	330	200	peak
2	113.7143	25.00	6.32	31.32	43.50	-12.18	51	100	peak


Mid Channel (98.1MHz)

Horizontal

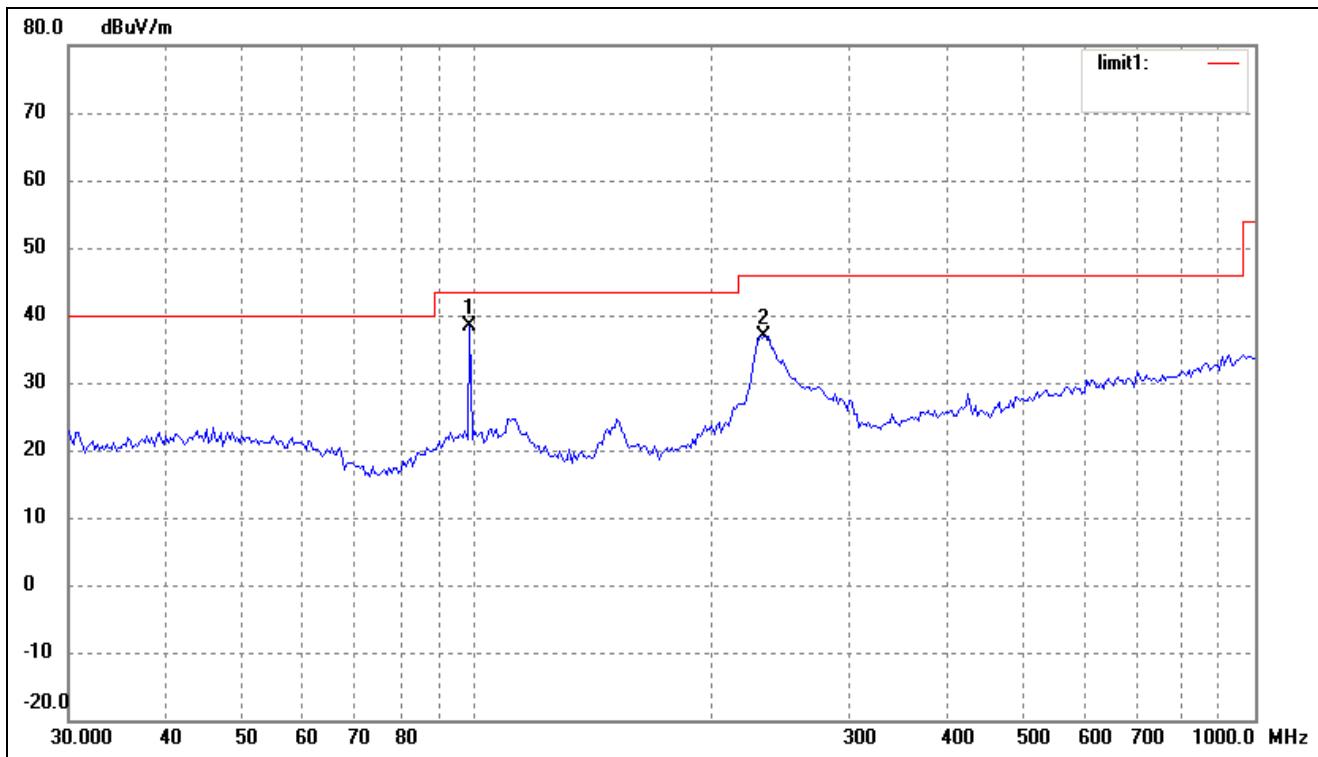

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	98.1000	30.62	7.69	38.31	48.00	-9.69	362	200	Ave
	98.1000	30.80	7.69	38.49	68.00	-29.51	362	200	peak
2	234.1682	29.88	7.12	37.00	46.00	-9.00	28	200	peak


Vertical

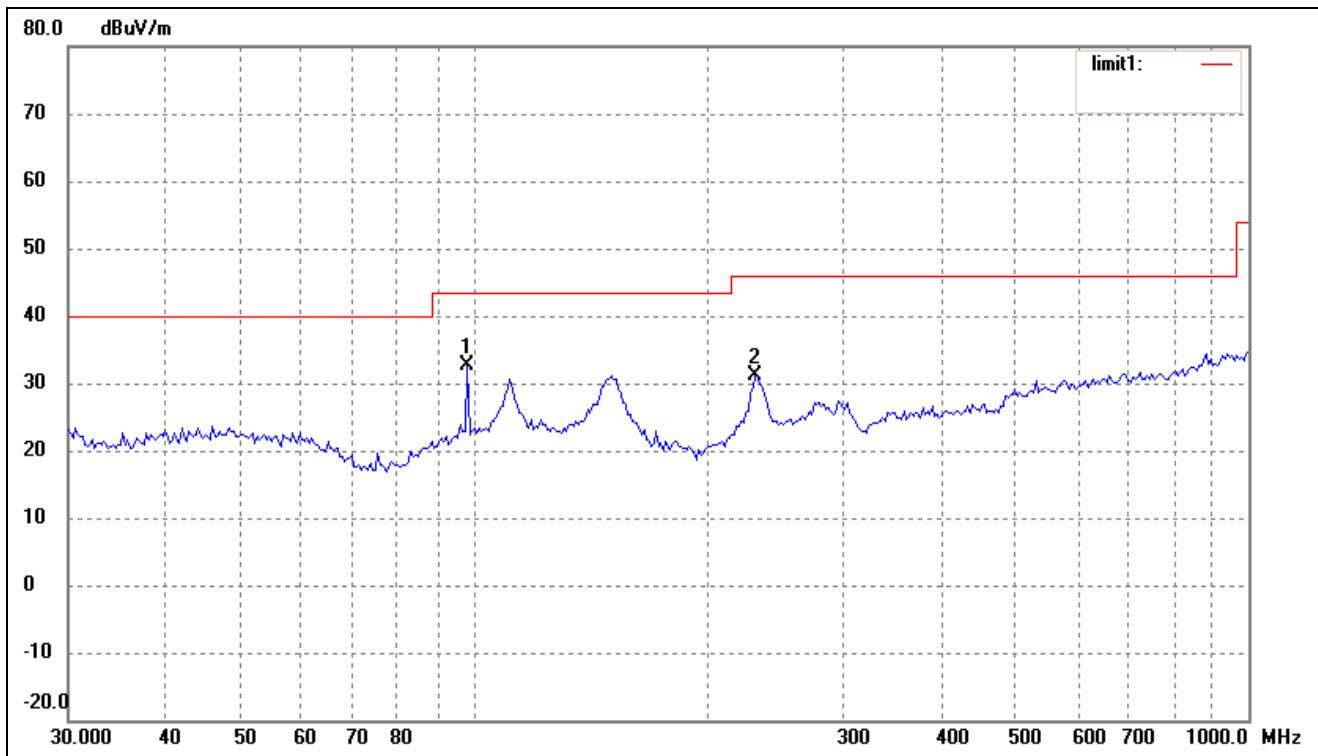

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	98.1000	24.90	7.69	32.59	48.00	-15.41	201	200	Ave
	98.1000	24.99	7.69	32.68	68.00	-35.32	201	200	peak
2	230.9068	24.26	6.94	31.20	46.00	-14.80	26	100	peak


High Channel (107.9MHz)

Horizontal

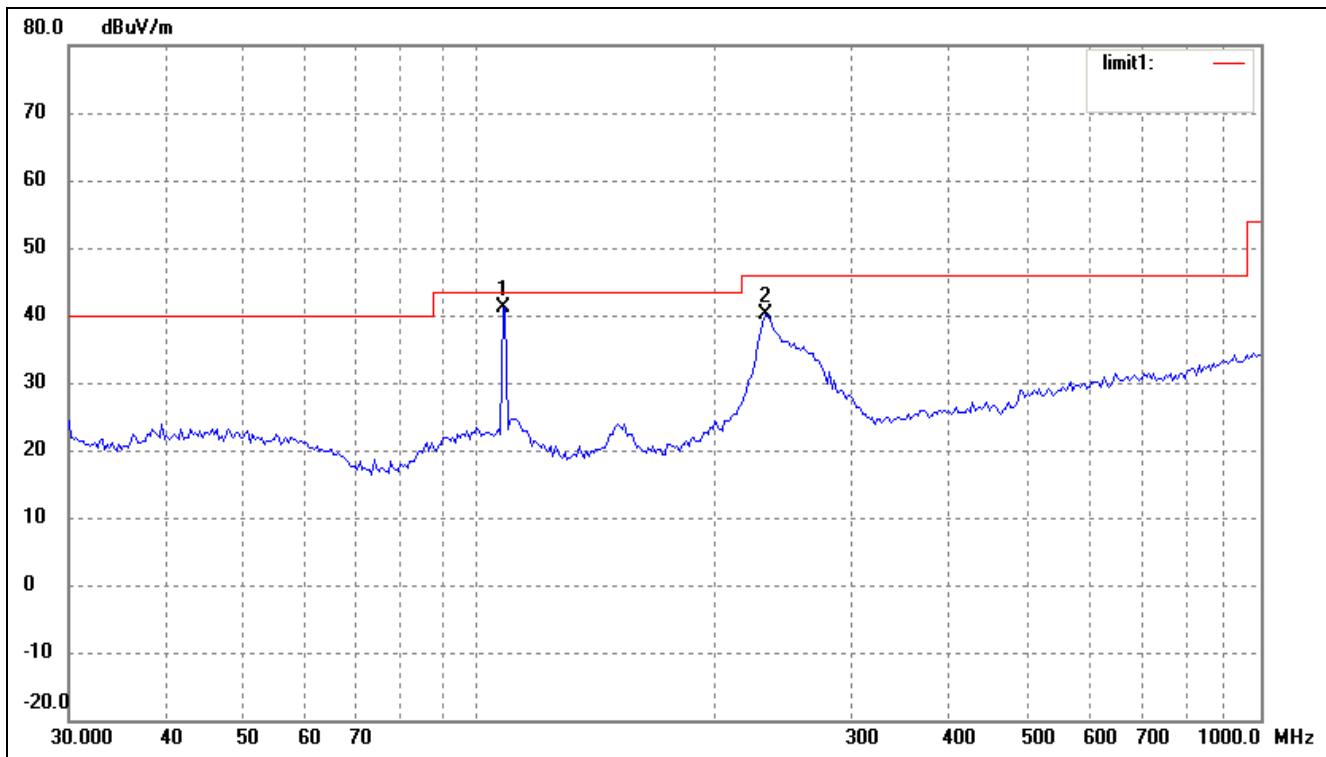

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	107.9000	33.95	7.16	41.11	48.00	-6.89	306	200	Ave
	107.9000	33.99	7.16	41.15	68.00	-26.85	306	200	peak
2	232.5318	33.13	7.03	40.16	46.00	-5.84	24	200	peak

Vertical

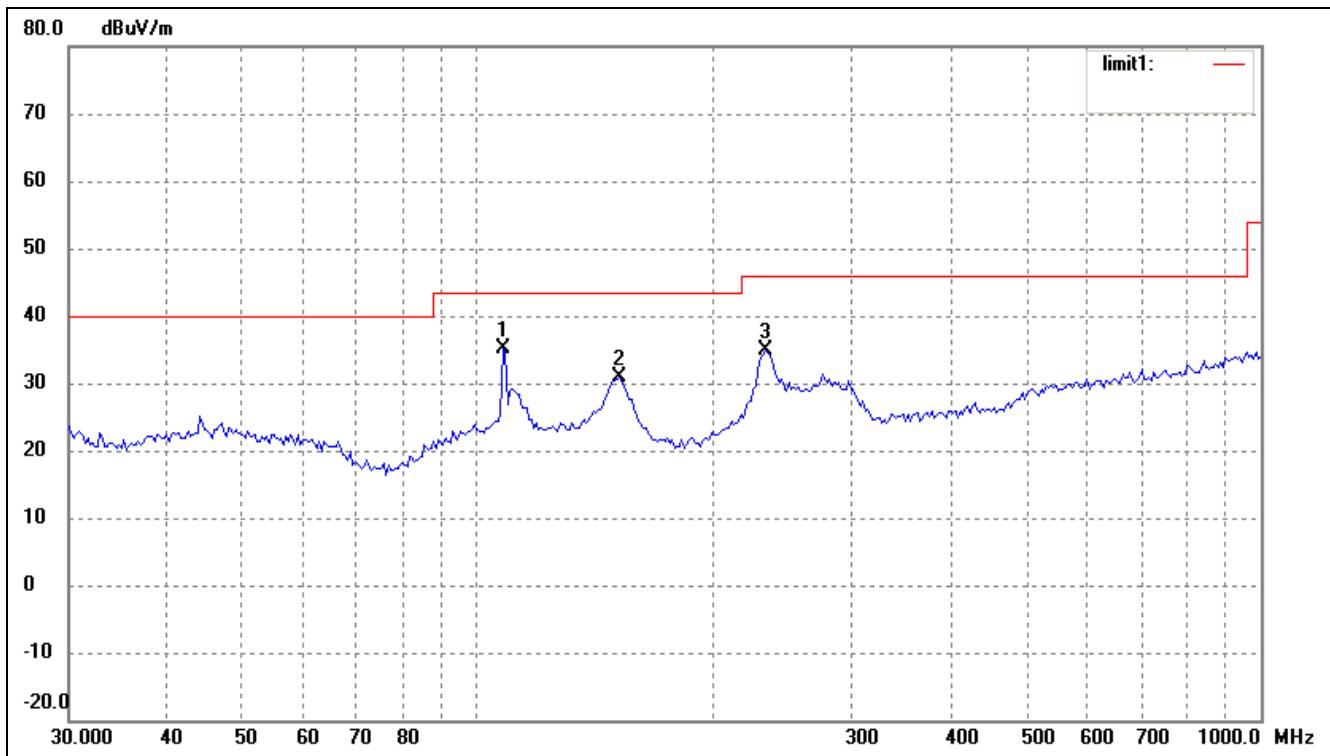

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	107.9000	27.87	7.16	35.03	48.00	-12.97	33	200	Ave
	107.9000	27.94	7.16	35.10	68.00	-32.90	33	200	peak
2	151.5971	27.50	3.38	30.88	43.50	-12.62	147	200	peak
3	232.5318	27.95	7.03	34.98	46.00	-11.02	102	100	peak

5. §15.239(a) EMISSION BANDWIDTH TESTING

5.1 Standard Applicable

According to FCC 15.239(a), Emissions from the intentional radiator shall be confined within a band 200 kHz wide centered on the operating frequency. The 200 kHz band shall lie wholly within the frequency range of 88–108 MHz.

5.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	Agilent	E4402B	US41192821	2010-08-12	2011-08-11
Attenuator	ATTEN	DC-4GHz	ATS100-4-20	2010-08-12	2011-08-11

Statement of Traceability: All calibrations have been performed per the NVLAP requirements traceable to the NIST.

5.3 Test Procedure

With the EUT's antenna attached, the EUT's 26dB Bandwidth power was received by the test antenna, which was connected to the spectrum analyzer with the START, and STOP frequencies set to the EUT's operation band.

5.4 Environmental Conditions

Temperature:	24 °C
Relative Humidity:	52%
ATM Pressure:	1011 mbar


5.5 Summary of Test Results/Plots

Frequency MHz	Emission Bandwidth KHz	Limit KHz
88.1	82.29	200
98.1	71.82	200
107.9	78.80	200


Test Result Pass

Refer to the attached plots.


Low Channel

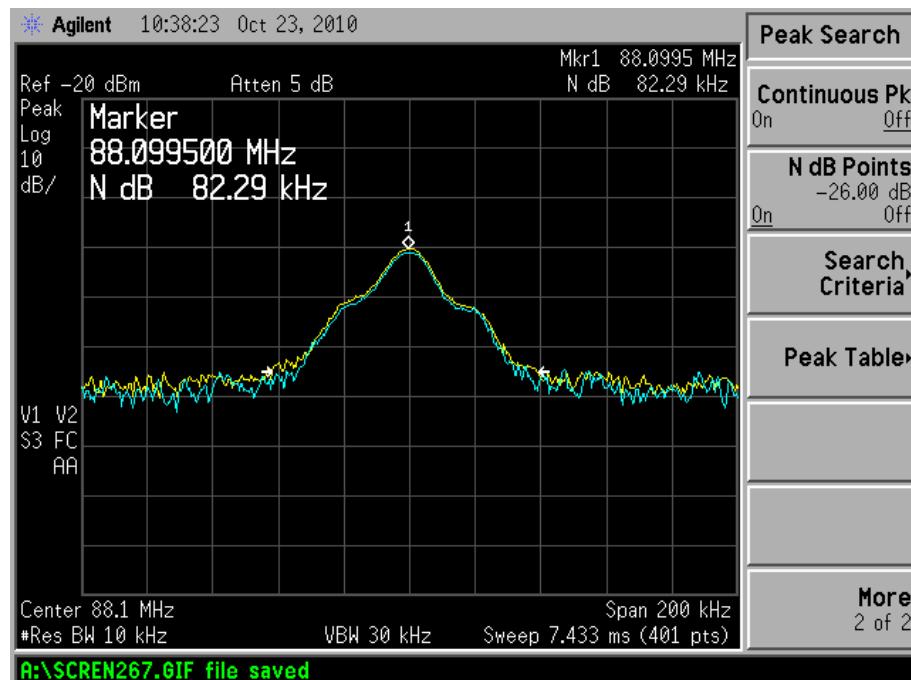

Middle Channel

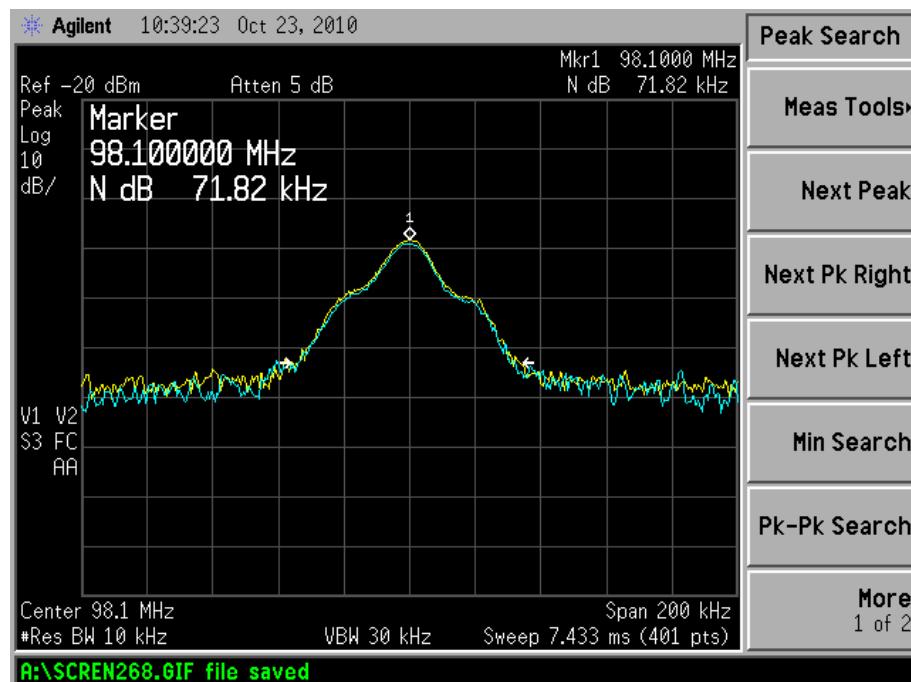

High Channel

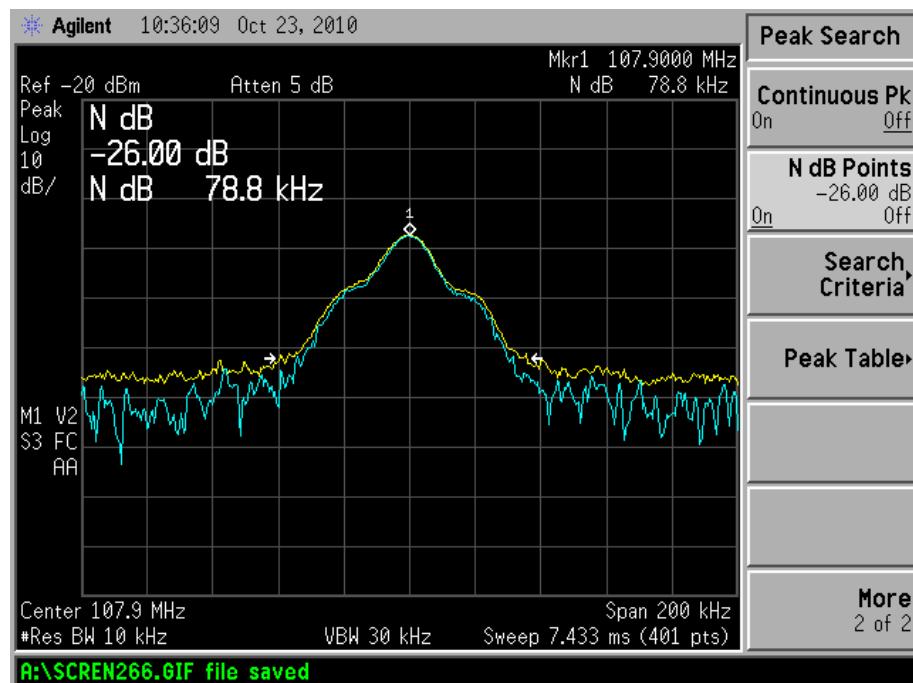

6. §15.249(b) OUT OF BAND EMISSIONS

6.1 Standard Applicable

According to §15.239(c), The field strength of any emissions radiated on any frequency outside of the specified 200 kHz band shall not exceed the general radiated emission limits in §15.209.

6.2 Test Equipment List and Details

Description	Manufacturer	Model	Serial Number	Cal. Date	Due. Date
Spectrum Analyzer	R&S	FSP	836079/035	2010-04-16	2011-04-15
EMI Test Receiver	R&S	ESVB	825471/005	2010-08-12	2011-08-11
Positioning Controller	C&C	CC-C-1F	N/A	2010-08-12	2011-08-11
RF Switch	EM	EMSW18	SW060023	2010-08-12	2011-08-11
Pre-amplifier	Agilent	8447F	3113A06717	2010-08-12	2011-08-11
Pre-amplifier	Compliance Direction	PAP-0118	24002	2010-08-12	2011-08-11
Trilog Broadband Antenna	SCHWARZBECK	VULB9163	9163-333	2010-07-21	2011-07-20
Horn Antenna	ETS	3117	00086197	2010-07-21	2011-07-20

Statement of Traceability: All calibrations have been performed per the NVLAP requirements traceable to the NIST.

6.3 Test Procedure

As the radiation test, set the Lowest and Highest Transmitting Channel, observed the outside band of 88MHz to 108MHz, than mark the higher-level emission for comparing with the FCC rules.

6.4 Environmental Conditions

Temperature:	24 °C
Relative Humidity:	54%
ATM Pressure:	1012 mbar


6.5 Summary of Test Results/Plots

Frequency MHz	Emission dB μ V/m	Limit dB μ V/m
88	39.13	40
108	39.71	43.5

Test Result Pass


Refer to the attached plots.

Lower Bandedge

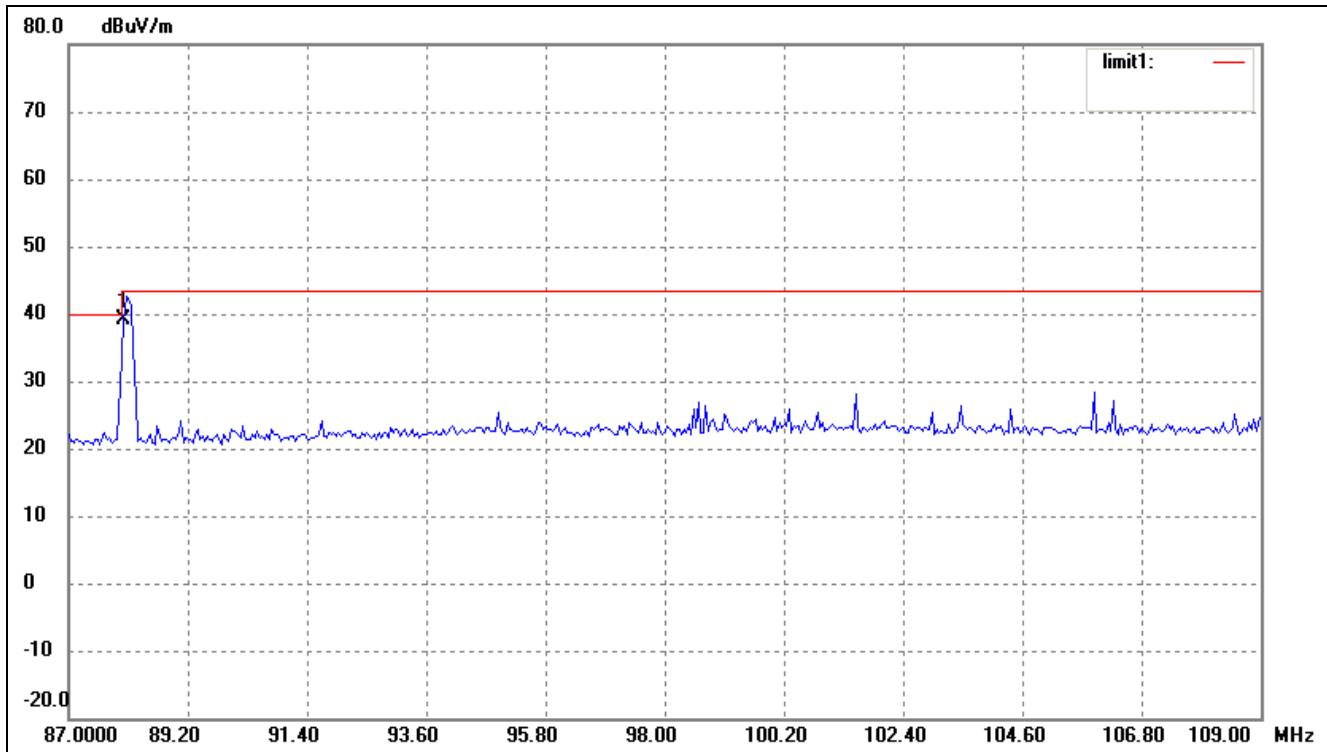

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	88.0000	33.24	5.89	39.13	40.00	-0.87	147	200	peak

Upper Bandedge

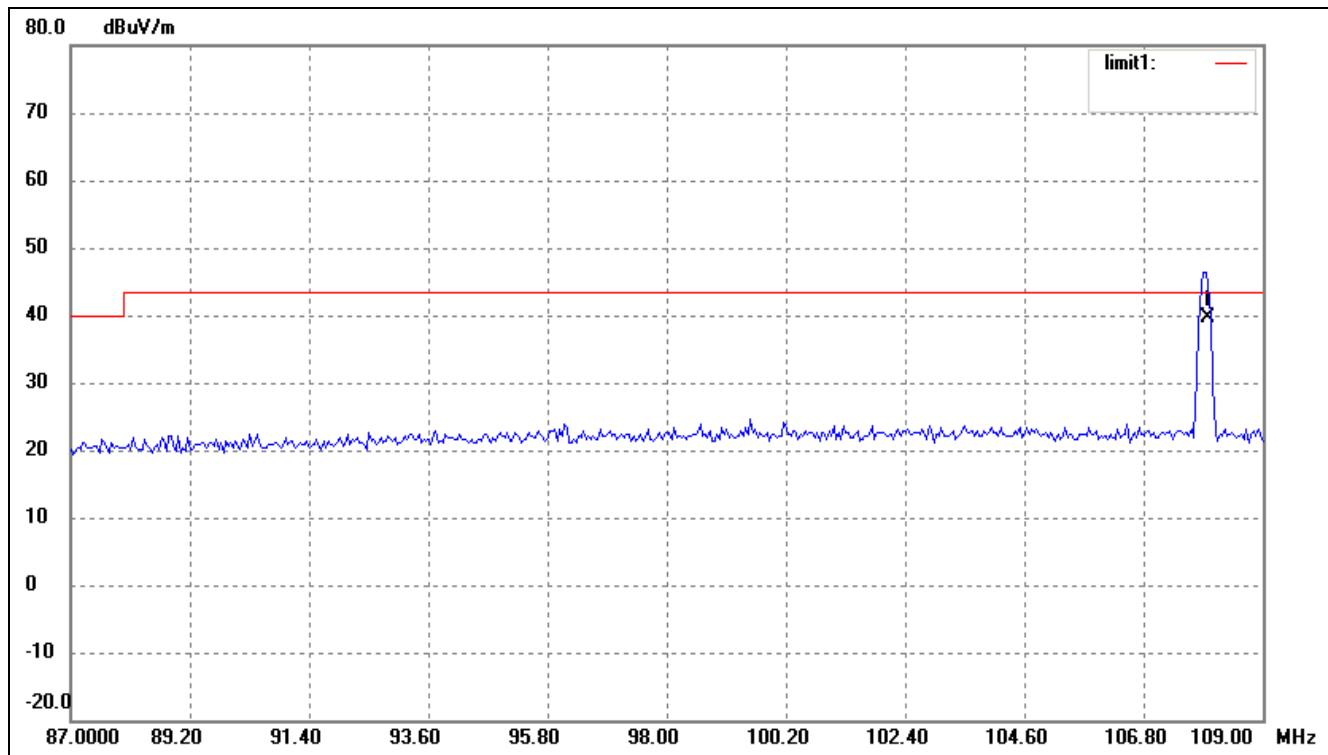

No.	Frequency (MHz)	Reading (dBuV/m)	Correct dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Degree (°)	Height (cm)	Remark
1	108.0000	32.60	7.11	39.71	43.50	-3.79	255	200	peak

***** END OF REPORT *****