



Test Report No:
24B0671R-RFUSV01S-A

Test Result for Inspection (Class II Permissive Change)

Product Name	Communication Module
Brand Name	NEXCOM
Model No.	LBEE5CJ1XK
FCC ID	YHILB1XK
Applicant's Name / Address	NEXCOM international Co.,LTD 9F, No. 920, Chung-Cheng Rd., Zhonghe Dist.,New Taipei City 235,Taiwan
Manufacturer's Name	Murata Manufacturing Co., Ltd.
Test Method Requested, Standard	FCC CFR Title 47 Part 15 Subpart C Section 15.247 ANSI C63.10-2013
Verdict Summary	IN COMPLIANCE
Documented By Jinn Chen	
Tested By Jason Tuan	
Approved By Steven Tsai	
Date of Receipt	2024/11/19
Date of Issue	2025/06/20
Report Version	V1.0

INDEX

	page
Competences and Guarantees.....	3
General Conditions	3
Revision History	4
Permissive Change.....	5
Summary of Test Result.....	6
1. General Information.....	7
1.1. EUT Description	7
1.2. EUT Information	7
1.3. Testing Location Information	8
1.4. Measurement Uncertainty	9
1.5. List of Test Equipment.....	10
2. Test Configuration of EUT	11
2.1. Test Condition.....	11
2.2. Test Frequency Mode.....	11
2.3. Duty Cycle	12
2.4. Measurement Configuration.....	13
2.5. Tested System Details.....	14
2.6. Configuration of Tested System	14
2.7. EUT Operating Procedures	14
3. Maximum Conducted Output Power	15
3.1. Test Setup	15
3.2. Test Limit	15
3.3. Test Procedures	15
3.4. Test Result of Maximum Conducted Output Power	15
4. Radiated Emission.....	16
4.1. Test Setup	16
4.2. Test Limit	17
4.3. Test Procedure	17
4.4. Test Result of Radiated Emission	17
Appendix A. Test Result of Maximum Conducted Output Power	
Appendix B. Test Result of Radiated Emission	
Appendix C. Test Setup Photograph	

Competences and Guarantees

DEKRA is a testing laboratory competent to carry out the tests described in this report.

In order to assure the traceability to other national and international laboratories, DEKRA has a calibration and maintenance program for its measurement equipment.

DEKRA guarantees the reliability of the data presented in this report, which is the result of the measurements and the tests performed to the item under test on the date and under the conditions stated in the report and it is based on the knowledge and technical facilities available at DEKRA at the time of performance of the test.

DEKRA is liable to the client for the maintenance of the confidentiality of all information related to the item under test and the results of the test.

The results presented in this Test Report apply only to the particular item under test established in this document.

IMPORTANT: No parts of this report may be reproduced or quoted out of context, in any form or by any means, except in full, without the previous written permission of DEKRA.

General Conditions

1. The test results relate only to the samples tested.
2. The test results shown in the test report are traceable to the national/international standard through the calibration report of the equipment and evaluated measurement uncertainty herein.
3. This report must not be used to claim product endorsement by TAF or any agency of the government.
4. The test report shall not be reproduced without the written approval of DEKRA Testing and Certification Co., Ltd.
5. Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.

Revision History

Version	Description	Issued Date
V1.0	Initial issue of report	2025/06/20

Permissive Change

Report No.	Version	Description	Issued Date
24B0671R-RFUSV01S-A	V1.0	<p>The major change filed under this application is:</p> <p>Change #1: Addition host platform, Product name: KABE RV8007, Brand:  AKKODIS, Model number: KABE RV8007.</p> <p>Change #2: Adding new 2.4 GHz different type antenna for platform use and higher gain compared to the original grant.</p>	2025/06/20

Summary of Test Result

Report Clause	Test Items	Result (PASS/FAIL)	Remark
3	Maximum Conducted Output Power	PASS	-
4	Radiated Emission	PASS	-

Comments and Explanations

The declared of product specification for EUT presented in the report are provided by the manufacturer, and the manufacturer takes all the responsibilities for the accuracy of product specification.

1. General Information

1.1. EUT Description

Frequency Range	2400 ~ 2483.5 MHz
Operating Frequency / Channel Number	2402 ~ 2480 MHz / 79 Channels
Mode	Bluetooth BR / EDR
Type of Modulation	Bluetooth BR uses a GFSK (1 Mbps)
	Bluetooth EDR uses a combination of $\pi/4$ DQPSK (2 Mbps) and 8DPSK (3 Mbps)

Host Information			
Brand name	Product name	Model No.	Power Type
 AKKODIS	KABE RV8007	KABE RV8007	DC 6-18 V

Antenna Information				
Item.	Brand Name	Model No.	Type	Antenna Gain (dBi)
1	M.gear	C1779-510031-A	PCB	5.4

Note: The antenna of EUT conforms to FCC 15.203.

1.2. EUT Information

EUT Power Type	From DC 3.3V (Power by Host)
----------------	------------------------------

1.3. Testing Location Information

USA	FCC Designation Number: TW0033
Canada	CAB Identifier Number: TW3023 / Company Number: 26930

Site Description	Accredited by TAF
	Accredited Number: 3023

Test Laboratory	DEKRA Testing and Certification Co., Ltd. Linkou Laboratory
Address	No. 85, Wenlin St., Linkou Dist., New Taipei City 244017, Taiwan, R.O.C.
Performed Location	No. 26, Huaya 1st Rd., Guishan Dist., Taoyuan City 333411, Taiwan, R.O.C.
Phone Number	+886-3-275-7255
Fax Number	+886-3-327-8031

Ambient conditions in the laboratory:

Performed Item	Items	Required	Actual	Test Date
Radiated Emission	Temperature (°C)	10~40 °C	24.4 °C	2024/12/03~2024/12/04
	Humidity (%RH)	10~90 %	58.0 %	
RF Conducted Emission	Temperature (°C)	10~40 °C	22.9 °C	2024/12/01
	Humidity (%RH)	10~90 %	59.4 %	

1.4. Measurement Uncertainty

Uncertainties have been calculated according to the DEKRA internal document.

The reported expanded uncertainties are based on a standard uncertainty multiplied by a coverage factor of $k=2$, providing a level of confidence of approximately 95%.

Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.

Test item	Uncertainty
Maximum Conducted Output Power	Spectrum Analyzer: ± 2.13 dB Power Meter: ± 1.07 dB
Radiated Emission	9 kHz~30 MHz: ± 3.30 dB 30 MHz~1 GHz: ± 4.79 dB 1 GHz~18 GHz: ± 4.17 dB 18 GHz~40 GHz: ± 3.32 dB
Duty Cycle	± 0.51 %

1.5. List of Test Equipment

For Conducted Measurements / HY-SR02

	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
V	Spectrum Analyzer	R&S	FSV30	103466	2024/01/05	2025/01/04
V	Peak Power Analyzer	KEYSIGHT	8990B	MY51000539	2024/05/07	2025/05/06
V	Wideband Power Sensor	KEYSIGHT	N1923A	MY59240002	2024/05/08	2025/05/07
V	Wideband Power Sensor	KEYSIGHT	N1923A	MY59240003	2024/05/08	2025/05/07

Note:

1. All equipment is calibrated every year.
2. The test instruments marked with "V" are used to measure the final test results.
3. Test Software Version: DTC_RF_Tool_Release V100.

For Radiated measurements / HY-CB03

	Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Due Date
V	Loop Antenna	TESEQ	HLA6121	49611	2024/02/23	2025/02/22
V	Bi-Log Antenna	SCHWARZBECK	VULB9168	9168-0675	2023/08/09	2025/08/08
V	Horn Antenna	Com-Power	AH-840	101101	2023/12/04	2025/12/03
V	Horn Antenna	RF SPIN	DRH18-E	210507A18ES	2024/05/15	2025/05/14
V	Pre-Amplifier	SGH	SGH0301-9	20211007-11	2024/01/10	2025/01/09
V	Pre-Amplifier	SGH	PRAMP118	20200701	2024/01/10	2025/01/09
V	Pre-Amplifier	EMCI	EMC05820SE	980310	2024/01/10	2025/01/09
V	Pre-Amplifier	EMCI	EMC184045SE	980369	2024/01/10	2025/01/09
V	Coaxial Cable	EMCI	EMC102-KM-KM-600	1160314	2024/01/10	2025/01/09
V	Coaxial Cable	EMCI	EMC102-KM-KM-7000	170242	2024/01/10	2025/01/09
V	Filter	MICRO TRONICS	BRM50702	G269	2024/01/05	2025/01/04
	Filter	MICRO TRONICS	BRM50716	G196	2024/01/05	2025/01/04
V	EMI Test Receiver	R&S	ESR3	102792	2024/01/05	2025/01/04
V	Spectrum Analyzer	R&S	FSV3044	101114	2024/02/21	2025/02/20
V	Coaxial Cable	SGH	SGH18	2021005-1	2024/01/10	2025/01/09
V	Coaxial Cable	SGH	SGH18	202108-4	2024/01/10	2025/01/09
V	Coaxial Cable	SGH	HA800	GD20110223-1	2024/01/10	2025/01/09
V	Coaxial Cable	SGH	HA800	GD20110222-3	2024/01/10	2025/01/09

Note:

1. Bi-Log Antenna and Horn Antenna (AH-840) are calibrated every two years, the other equipment is calibrated every year.
2. The test instruments marked with "V" are used to measure the final test results.
3. Test Software Version: e3 230303 dekra V9.

2. Test Configuration of EUT

2.1. Test Condition

EUT Operational Condition	
Testing Voltage	DC 12V

2.2. Test Frequency Mode


Test Software Version	KiTTY / Version 0.76.1.3
-----------------------	--------------------------

Modulation	Frequency (MHz)	Power Setting
GFSK	2402	0x07
	2441	0x07
	2480	0x07
8DPSK	2402	0x07
	2441	0x07
	2480	0x08

2.3. Duty Cycle

Modulation	Time on of 100 ms (ms)	Duty Cycle (Ton/100 ms)	Duty Cycle Correction factor (dB)
GFSK	2.900	0.029	-30.752
8DPSK	2.900	0.029	-30.752

Note: Duty Cycle correction factor = 20 LOG(Duty Cycle).

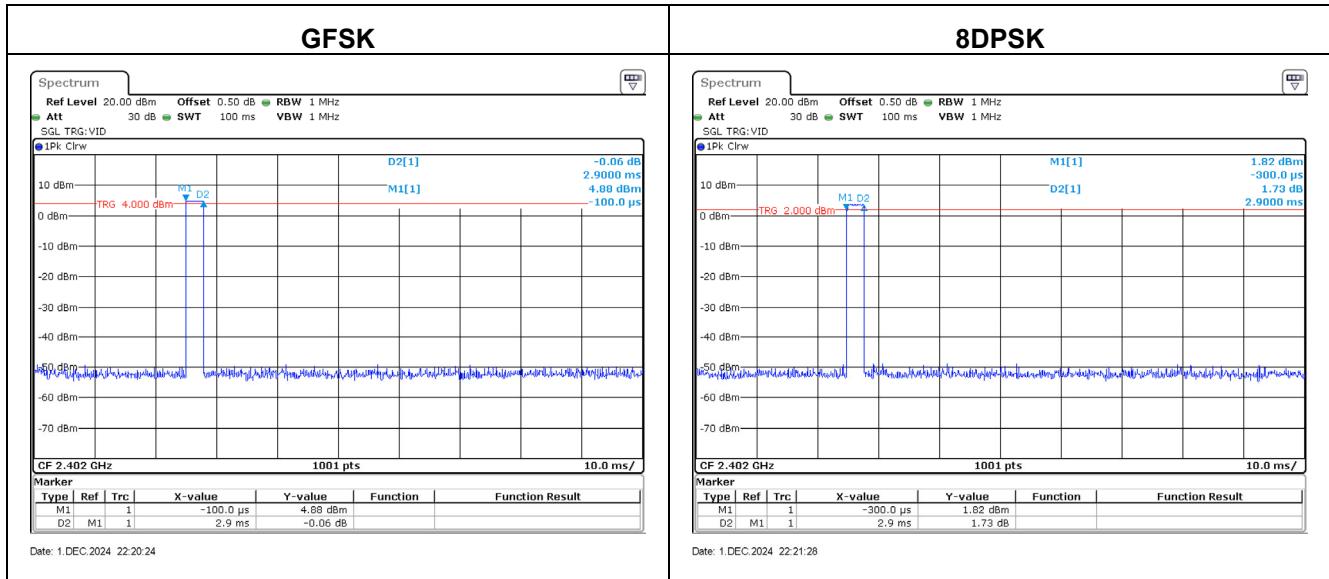

2.4. Measurement Configuration

Test Mode	Mode 1	Transmit-GFSK
		Transmit-8DPSK

Note:

1. Determining compliance shall be based on the results of the compliance measurement, not taking into account measurement instrumentation uncertainty.
2. For radiated emission below 1 GHz have performed all modes of operation were investigated and the worst-case emissions are reported.
3. The radiation measurements are performed in X, Y, Z axis positioning. Only the worst case is shown in the report.
4. The test mode is based on the Bluetooth technology, while testing 1Mbps, 2Mbps and 3Mbps, the worst case is 1Mbps and 3Mbps, and only worse case data is recorded in this report.

2.5. Tested System Details

No.	Equipment	Brand Name	Model No.	Serial No.	Power Cord
1	Battery	BOSCH	60044	N/A	N/A
2	Notebook PC	DELL	Latitude 5501	4H94P13	N/A

2.6. Configuration of Tested System


Connection Diagram	
Signal Cable Type	Signal cable Description
A Power cable	Non-Shielded, 3m
B LAN cable	Non-Shielded, 3m

2.7. EUT Operating Procedures

1	Setup the EUT as shown in Section 2.6.
2	Execute software “KiTTY / Version 0.76.1.3” on the Notebook PC.
3	Configure the test mode, the test channel, and the data rate.
4	Press “OK” to start the continuous Transmit.
5	Verify that the EUT works properly.

3. Maximum Conducted Output Power

3.1. Test Setup

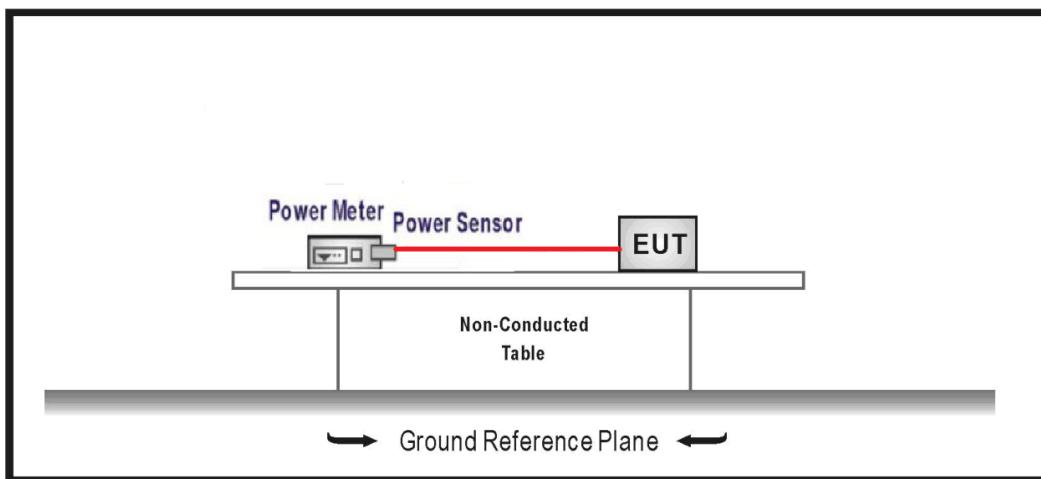

3.2. Test Limit

For frequency hopping systems operating in the 902 ~ 928 MHz band:

1. Number of Hopping Frequencies ≥ 50 : 1 watt (30dBm)
2. $50 >$ Number of Hopping Frequencies ≥ 25 : 0.25 watt (23.98dBm)

For frequency hopping systems operating in the 2400 ~ 2483.5 MHz band:

1. Number of Hopping Frequencies ≥ 75 : 1 watt (30dBm)
2. $75 >$ Number of Hopping Frequencies ≥ 15 : 0.125 watts (20.97dBm)

For frequency hopping systems operating in the 5725 ~ 5850 MHz band:

Number of Hopping Frequencies ≥ 75 : 1 watt (30dBm)

3.3. Test Procedures

The EUT was setup according to ANSI C63.10: 2013 and tested according to FHSS test procedure of KDB 558074.


3.4. Test Result of Maximum Conducted Output Power

Refer as Appendix A


4. Radiated Emission

4.1. Test Setup


9 kHz ~ 30 MHz

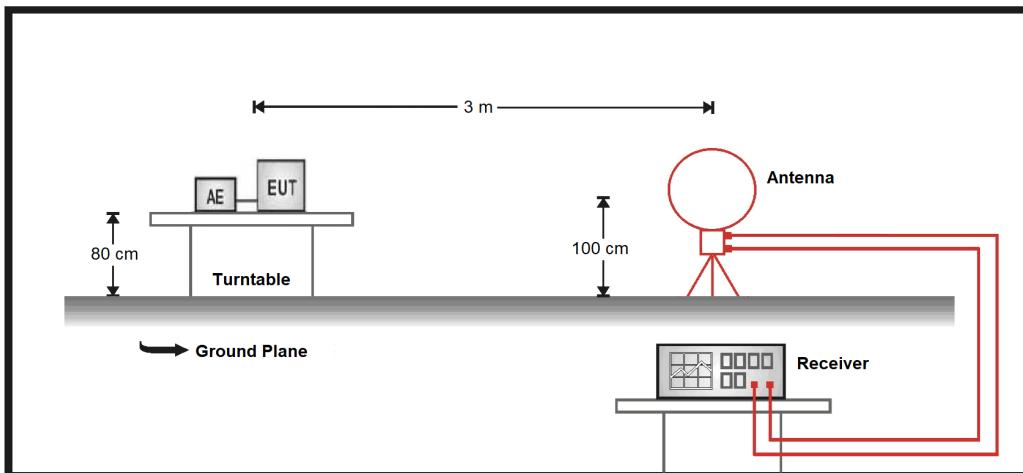

30 MHz ~ 1 GHz

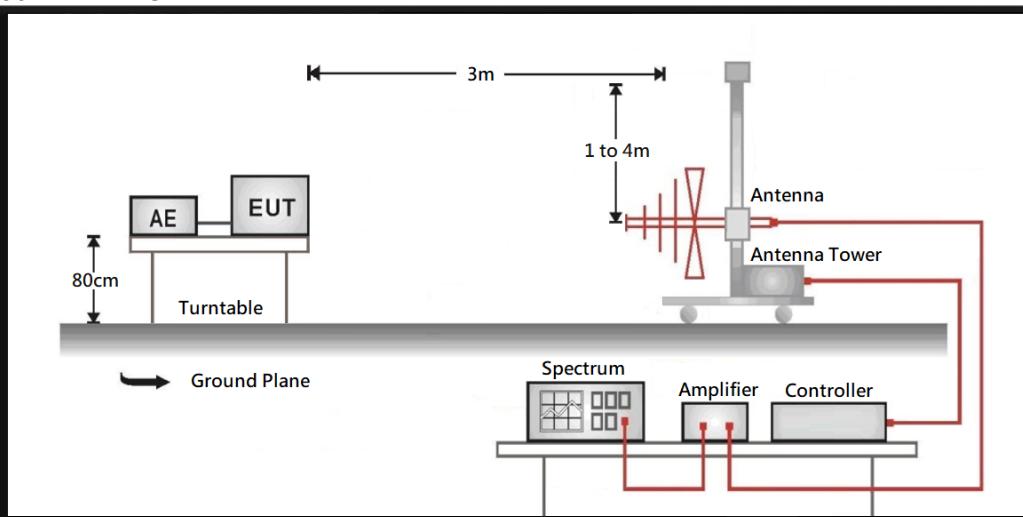

Above 1 GHz

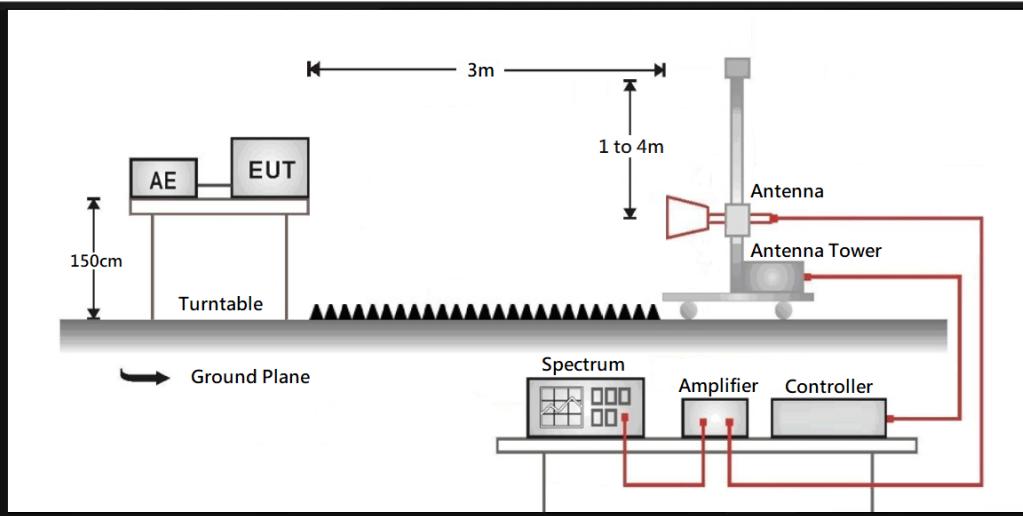

4.2. Test Limit

Frequency (MHz)	Field strength (μ V/m)	Field strength ($\text{dB}\mu\text{V}/\text{m}$)	Measurement distance (m)
0.009 – 0.490	2400/F(kHz)	20 log (2400/F(kHz))	300
0.490 – 1.705	24000/F(kHz)	20 log (24000/F(kHz))	30
1.705 - 30	30	29.5	30
30 - 88	100	40	3
88 - 216	150	43.5	3
216 - 960	200	46	3
Above 960	500	54	3

Remarks:

1. Field strength ($\text{dB}\mu\text{V}/\text{m}$) = 20 log Field strength ($\mu\text{V}/\text{m}$)
2. In the Above Table, the tighter limit applies at the band edges.
3. Distance refers to the distance in meters between the measuring instrument antenna and the closed point of any part of the device or system.

4.3. Test Procedure

The EUT was setup according to ANSI C63.10: 2013 and tested according to FHSS test procedure of KDB 558074.

The EUT and its simulators are placed on a turn table which is 0.8 or 1.5 meter above ground. The turn table can rotate 360 degrees to determine the position of the maximum emission level.

The antenna can move up and down between 1 meter and 4 meters to find out the maximum emission level.

Both horizontal and vertical polarization of the antenna are set on measurement. In order to find the maximum emission, all of the interface cables must be manipulated according to ANSI C63.10: 2013 on radiated measurement.

On any frequency or frequencies from 9 kHz (including the lowest oscillator frequency generated within the device up to the 10th harmonic) to 1000 MHz, the limit shown are based on measuring equipment employing a quasi-peak detector function and on any frequency or frequencies above 1000 MHz the radiated limit shown are based upon the use of measurement instrumentation employing an average detector function. When average radiated emission measurement are included emission measurement below 1000 MHz, there also is a limit on the radio frequency emissions, as measured using instrumentation with a peak detector function, corresponding to 20 dB above the maximum permitted average limit.

The bandwidth below 1 GHz setting on the field strength meter is 120 kHz and above 1 GHz is 1 MHz.

4.4. Test Result of Radiated Emission

Refer as Appendix B