


**Appendix A. Test Result of Maximum Conducted Output Power**

| Modulation | Frequency<br>(MHz) | Maximum Conducted Peak<br>Output Power (dBm) | Limit<br>(dBm) | Result |
|------------|--------------------|----------------------------------------------|----------------|--------|
| GFSK       | 2402               | 5.75                                         | 21.00          | Pass   |
|            | 2441               | 5.47                                         | 21.00          | Pass   |
|            | 2480               | 5.59                                         | 21.00          | Pass   |
| 8DPSK      | 2402               | 5.14                                         | 21.00          | Pass   |
|            | 2441               | 4.90                                         | 21.00          | Pass   |
|            | 2480               | 5.39                                         | 21.00          | Pass   |

Appendix B. Test Result of Radiated Emission

Site :HY-CB03  
Condition :3m Horizontal  
Mode :TX\_bt1M\_2402MHz  
Test BY :Ashton

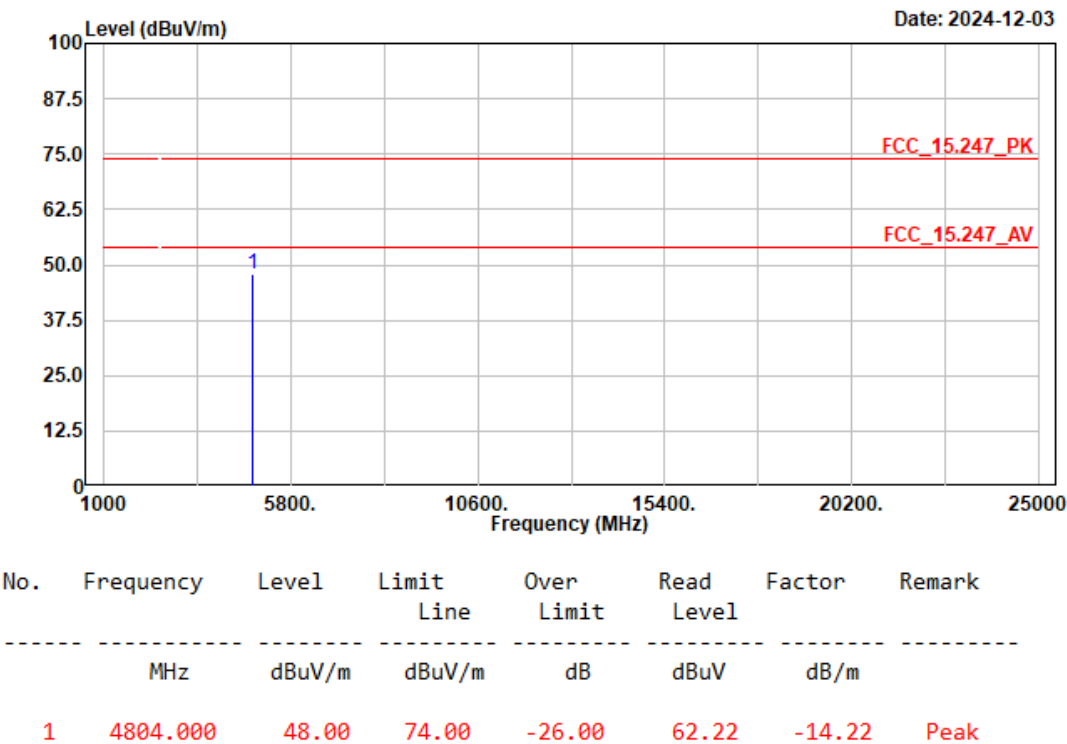


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Horizontal-Average Detector:

| Frequency (MHz) | Peak Measurement (dBuV/m) | Duty Cycle Factor (dB) | Measurement Level (dBuV/m) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------------------|------------------------|----------------------------|-------------|----------------|
| --              | --                        | --                     | --                         | --          | --             |

Site :HY-CB03  
Condition :3m Vertical  
Mode :TX\_bt1M\_2402MHz  
Test BY :Ashton

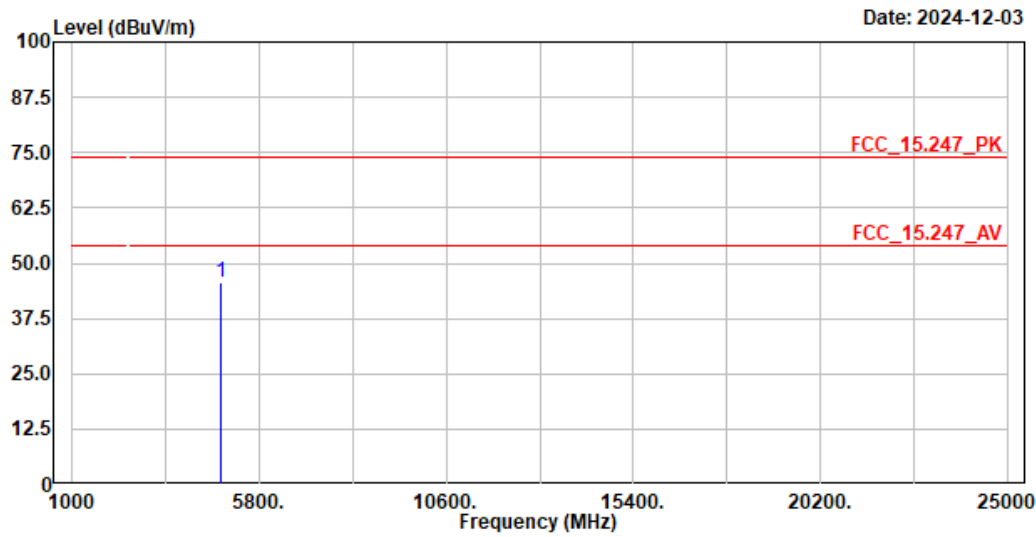


| No.   | Frequency | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | Factor | Remark |
|-------|-----------|--------|---------------|---------------|---------------|--------|--------|
| <hr/> |           |        |               |               |               |        |        |
|       | MHz       | dBuV/m | dBuV/m        | dB            | dBuV          | dB/m   |        |
| 1     | 4804.000  | 45.52  | 74.00         | -28.48        | 59.74         | -14.22 | Peak   |

- Note:
- 1. Level = Read Level + Factor
  - 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
  - 3. Over Limit = Level - Limit Line
  - 4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical-Average Detector:

| Frequency (MHz) | Peak Measurement (dBμV/m) | Duty Cycle Factor (dB) | Measurement Level (dBμV/m) | Margin (dB) | Limit (dBμV/m) |
|-----------------|---------------------------|------------------------|----------------------------|-------------|----------------|
| --              | --                        | --                     | --                         | --          | --             |

Site :HY-CB03  
Condition :3m Horizontal  
Mode :TX\_bt1M\_2441MHz  
Test BY :Ashton

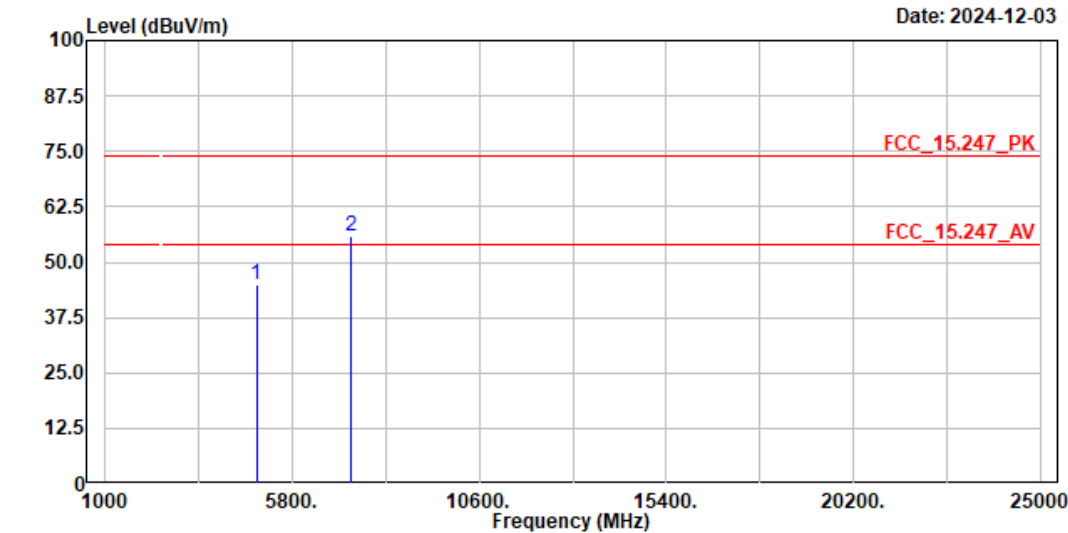

| No. | Frequency | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | Factor | Remark |
|-----|-----------|--------|---------------|---------------|---------------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m        | dB            | dBuV          | dB/m   |        |
| 1   | 4882.000  | 45.02  | 74.00         | -28.98        | 58.77         | -13.75 | Peak   |
| 2   | 7323.000  | 55.72  | 74.00         | -18.28        | 62.09         | -6.37  | Peak   |


Note:

- 1. Level = Read Level + Factor
- 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
- 3. Over Limit = Level - Limit Line
- 4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Horizontal-Average Detector:

| Frequency<br>(MHz) | Peak Measurement<br>(dBuV/m) | Duty Cycle Factor<br>(dB) | Measurement Level<br>(dBuV/m) | Margin<br>(dB) | Limit<br>(dBuV/m) |
|--------------------|------------------------------|---------------------------|-------------------------------|----------------|-------------------|
| 7323               | 55.72                        | -30.752                   | 24.968                        | -29.032        | 54.000            |

Site :HY-CB03  
 Condition :3m Vertical  
 Mode :TX\_bt1M\_2441MHz  
 Test BY :Ashton

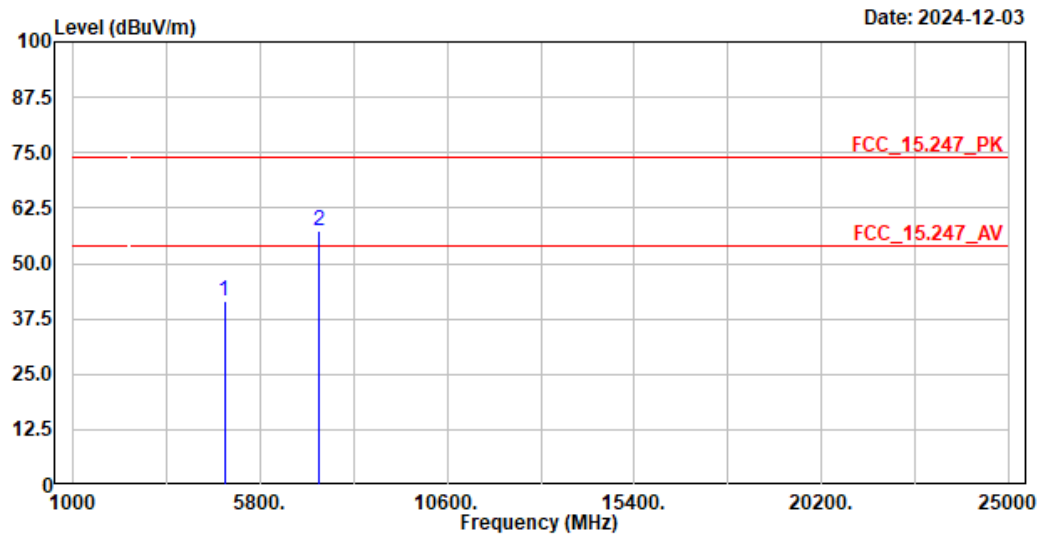

| No. | Frequency | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | Factor | Remark |
|-----|-----------|--------|---------------|---------------|---------------|--------|--------|
|     | MHz       | dBUV/m | dBUV/m        | dB            | dBuV          | dB/m   |        |
| 1   | 4882.000  | 41.39  | 74.00         | -32.61        | 55.14         | -13.75 | Peak   |
| 2   | 7323.000  | 57.37  | 74.00         | -16.63        | 63.74         | -6.37  | Peak   |


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical-Average Detector:

| Frequency<br>(MHz) | Peak Measurement<br>(dBUV/m) | Duty Cycle Factor<br>(dB) | Measurement Level<br>(dBUV/m) | Margin<br>(dB) | Limit<br>(dBUV/m) |
|--------------------|------------------------------|---------------------------|-------------------------------|----------------|-------------------|
| 7323               | 57.37                        | -30.752                   | 26.618                        | -27.382        | 54.000            |

Site :HY-CB03  
 Condition :3m Horizontal  
 Mode :TX\_bt1M\_2480MHz  
 Test BY :Ashton

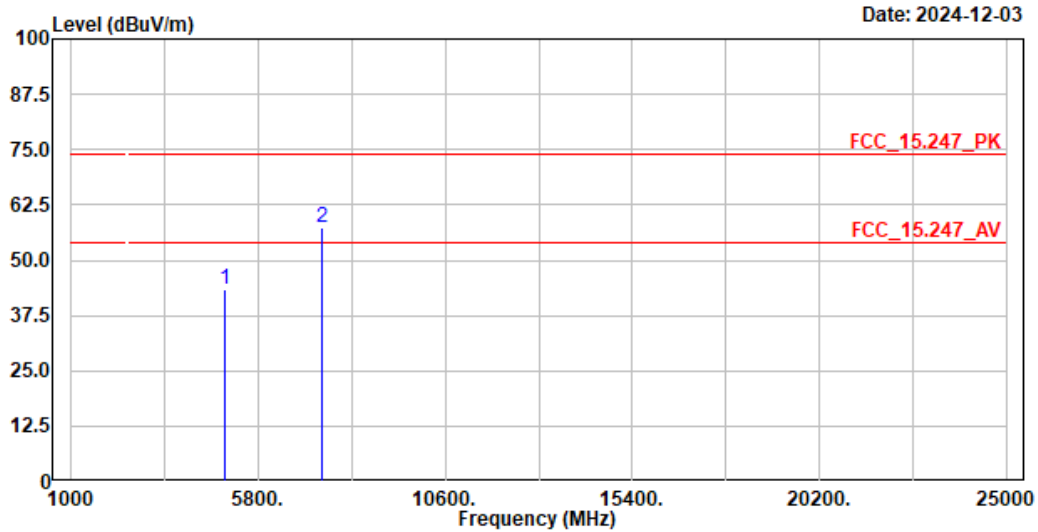

| No. | Frequency | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | Factor | Remark |
|-----|-----------|--------|---------------|---------------|---------------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m        | dB            | dBuV          | dB/m   |        |
| 1   | 4960.000  | 43.21  | 74.00         | -30.79        | 56.38         | -13.17 | Peak   |
| 2   | 7440.000  | 57.39  | 74.00         | -16.61        | 63.70         | -6.31  | Peak   |


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Horizontal-Average Detector:

| Frequency<br>(MHz) | Peak Measurement<br>(dBuV/m) | Duty Cycle Factor<br>(dB) | Measurement Level<br>(dBuV/m) | Margin<br>(dB) | Limit<br>(dBuV/m) |
|--------------------|------------------------------|---------------------------|-------------------------------|----------------|-------------------|
| 7440               | 57.39                        | -30.752                   | 26.638                        | -27.362        | 54.000            |

Site :HY-CB03  
 Condition :3m Vertical  
 Mode :TX\_bt1M\_2480MHz  
 Test BY :Ashton

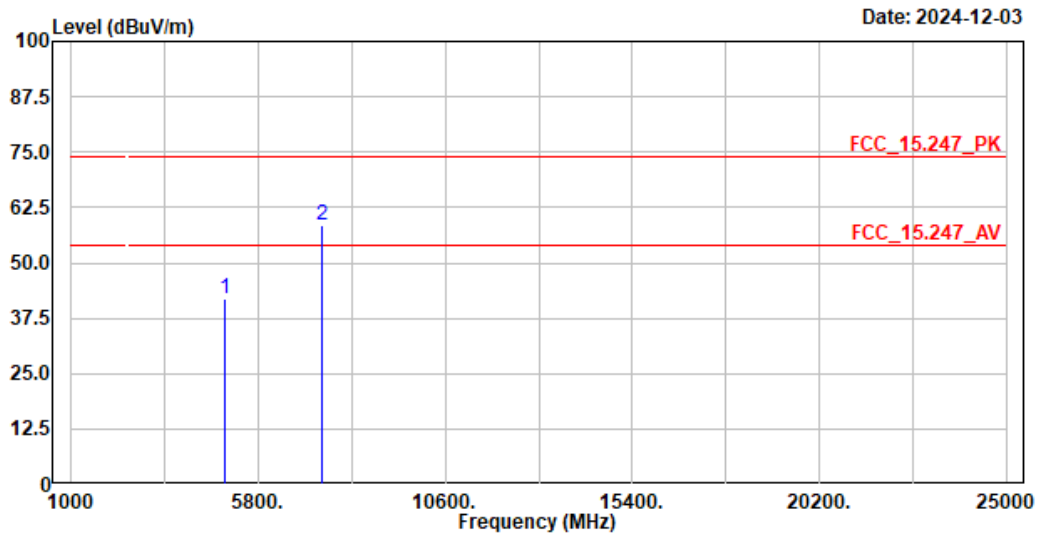

| No. | Frequency | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | Factor | Remark |
|-----|-----------|--------|---------------|---------------|---------------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m        | dB            | dBuV          | dB/m   |        |
| 1   | 4960.000  | 41.73  | 74.00         | -32.27        | 54.90         | -13.17 | Peak   |
| 2   | 7440.000  | 58.57  | 74.00         | -15.43        | 64.88         | -6.31  | Peak   |


**Note:**

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

**Vertical-Average Detector:**

| Frequency<br>(MHz) | Peak Measurement<br>(dBμV/m) | Duty Cycle Factor<br>(dB) | Measurement Level<br>(dBμV/m) | Margin<br>(dB) | Limit<br>(dBμV/m) |
|--------------------|------------------------------|---------------------------|-------------------------------|----------------|-------------------|
| 7440               | 58.57                        | -30.752                   | 27.818                        | -26.182        | 54.000            |

Site :HY-CB03  
 Condition :3m Horizontal  
 Mode :TX\_bt3M\_2402MHz  
 Test BY :Ashton

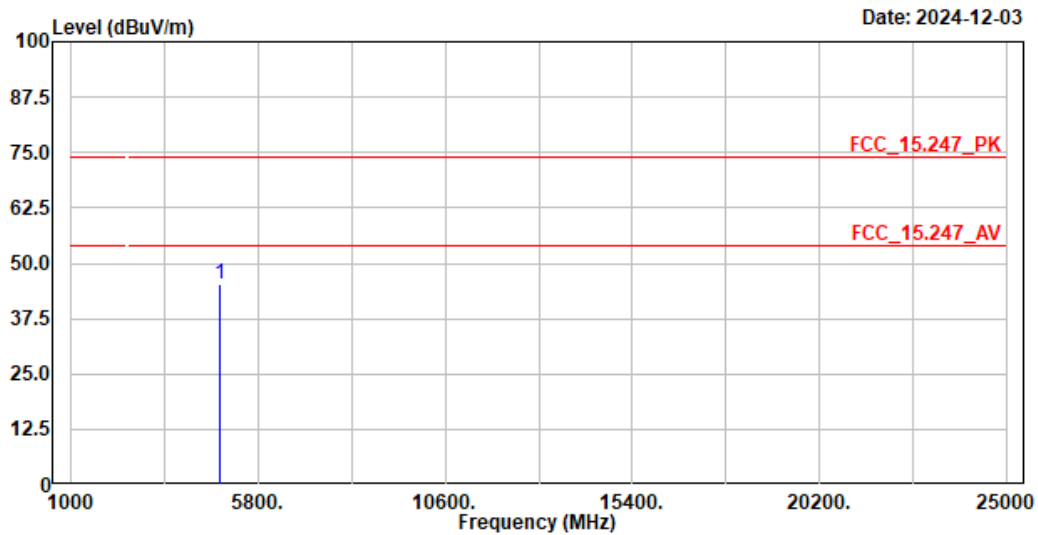

| No. | Frequency | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | Factor | Remark |
|-----|-----------|--------|---------------|---------------|---------------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m        | dB            | dBuV          | dB/m   |        |
| 1   | 4804.000  | 45.27  | 74.00         | -28.73        | 59.49         | -14.22 | Peak   |


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Horizontal-Average Detector:

| Frequency<br>(MHz) | Peak Measurement<br>(dBuV/m) | Duty Cycle Factor<br>(dB) | Measurement Level<br>(dBuV/m) | Margin<br>(dB) | Limit<br>(dBuV/m) |
|--------------------|------------------------------|---------------------------|-------------------------------|----------------|-------------------|
| --                 | --                           | --                        | --                            | --             | --                |

Site :HY-CB03  
Condition :3m Vertical  
Mode :TX\_bt3M\_2402MHz  
Test BY :Ashton

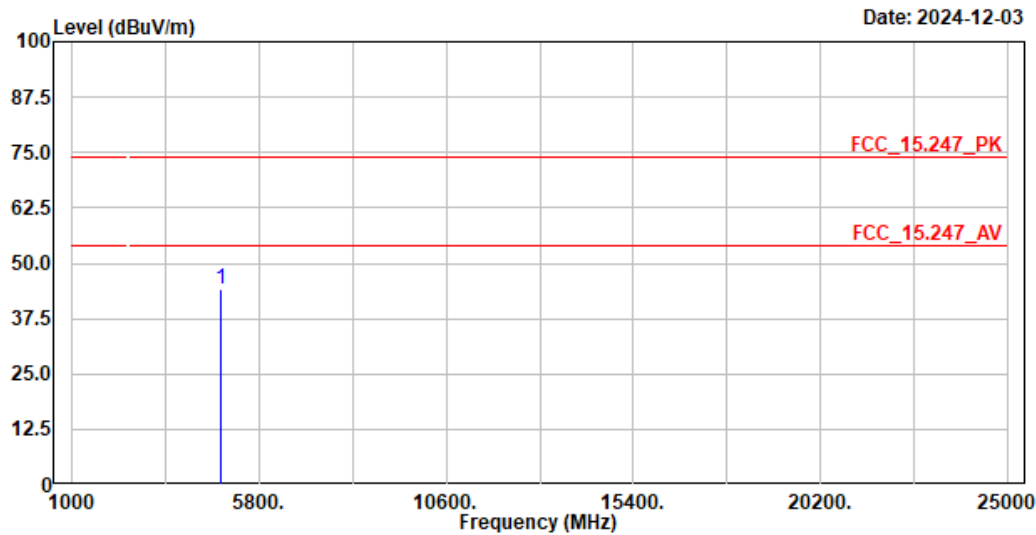

| No.   | Frequency | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | Factor | Remark |
|-------|-----------|--------|---------------|---------------|---------------|--------|--------|
| <hr/> |           |        |               |               |               |        |        |
|       | MHz       | dBuV/m | dBuV/m        | dB            | dBuV          | dB/m   |        |
| 1     | 4804.000  | 44.13  | 74.00         | -29.87        | 58.35         | -14.22 | Peak   |


Note:

- 1. Level = Read Level + Factor
- 2. Factor = Antenna Factor + Cable Loss - Preamp Factor
- 3. Over Limit = Level - Limit Line
- 4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical-Average Detector:

| Frequency (MHz) | Peak Measurement (dBuV/m) | Duty Cycle Factor (dB) | Measurement Level (dBuV/m) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------------------|------------------------|----------------------------|-------------|----------------|
| --              | --                        | --                     | --                         | --          | --             |

Site :HY-CB03  
 Condition :3m Horizontal  
 Mode :TX\_bt3M\_2441MHz  
 Test BY :Ashton

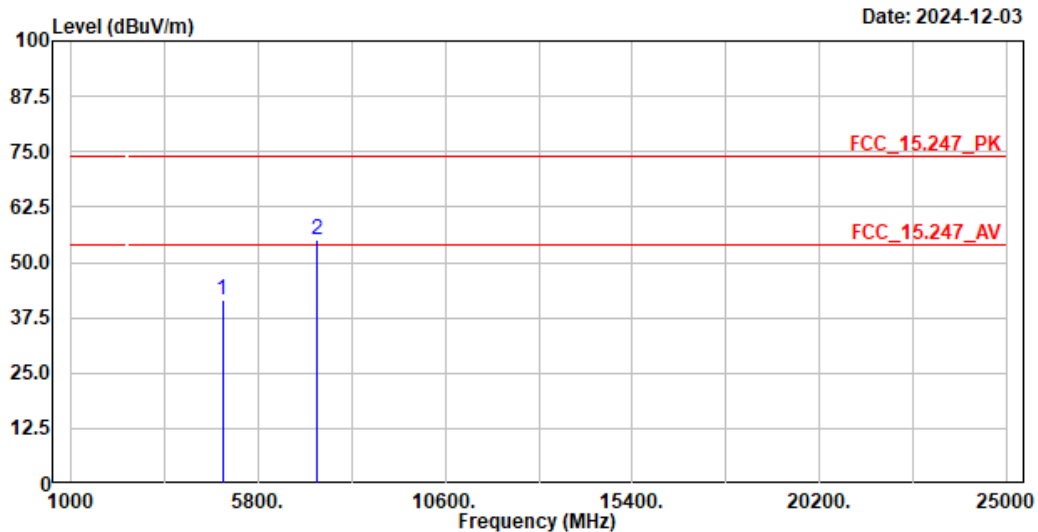

| No. | Frequency | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | Factor | Remark |
|-----|-----------|--------|---------------|---------------|---------------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m        | dB            | dBuV          | dB/m   |        |
| 1   | 4882.000  | 41.64  | 74.00         | -32.36        | 55.39         | -13.75 | Peak   |
| 2   | 7323.000  | 55.08  | 74.00         | -18.92        | 61.45         | -6.37  | Peak   |


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Horizontal-Average Detector:

| Frequency<br>(MHz) | Peak Measurement<br>(dBμV/m) | Duty Cycle Factor<br>(dB) | Measurement Level<br>(dBμV/m) | Margin<br>(dB) | Limit<br>(dBμV/m) |
|--------------------|------------------------------|---------------------------|-------------------------------|----------------|-------------------|
| 7323               | 55.08                        | -30.752                   | 24.328                        | -29.672        | 54.000            |

Site :HY-CB03  
 Condition :3m Vertical  
 Mode :TX\_bt3M\_2441MHz  
 Test BY :Ashton

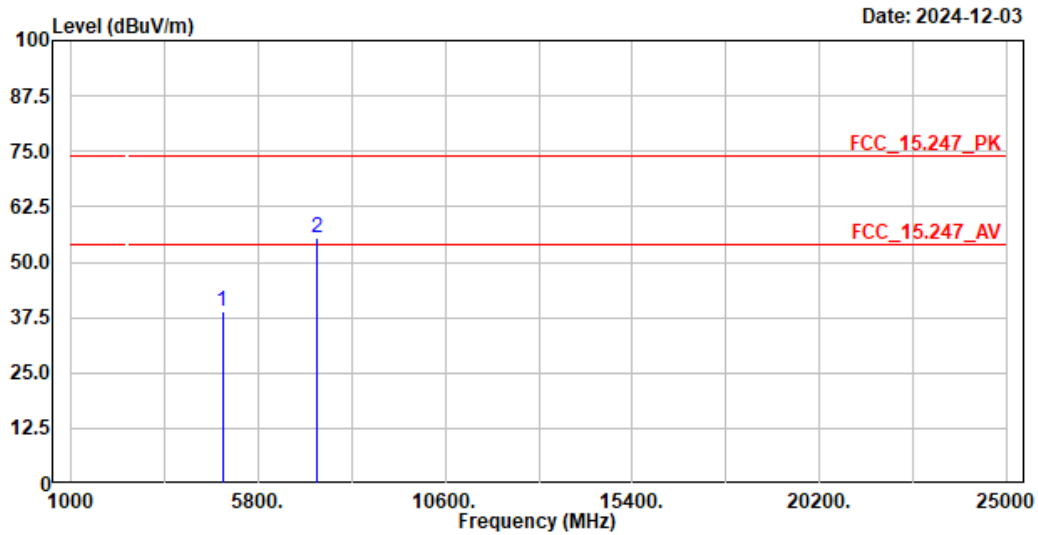

| No. | Frequency | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | Factor | Remark |
|-----|-----------|--------|---------------|---------------|---------------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m        | dB            | dBuV          | dB/m   |        |
| 1   | 4882.000  | 38.85  | 74.00         | -35.15        | 52.60         | -13.75 | Peak   |
| 2   | 7323.000  | 55.34  | 74.00         | -18.66        | 61.71         | -6.37  | Peak   |


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical-Average Detector:

| Frequency<br>(MHz) | Peak Measurement<br>(dBμV/m) | Duty Cycle Factor<br>(dB) | Measurement Level<br>(dBμV/m) | Margin<br>(dB) | Limit<br>(dBμV/m) |
|--------------------|------------------------------|---------------------------|-------------------------------|----------------|-------------------|
| 7323               | 55.34                        | -30.752                   | 24.588                        | -29.412        | 54.000            |

Site :HY-CB03  
 Condition :3m Horizontal  
 Mode :TX\_bt3M\_2480MHz  
 Test BY :Ashton

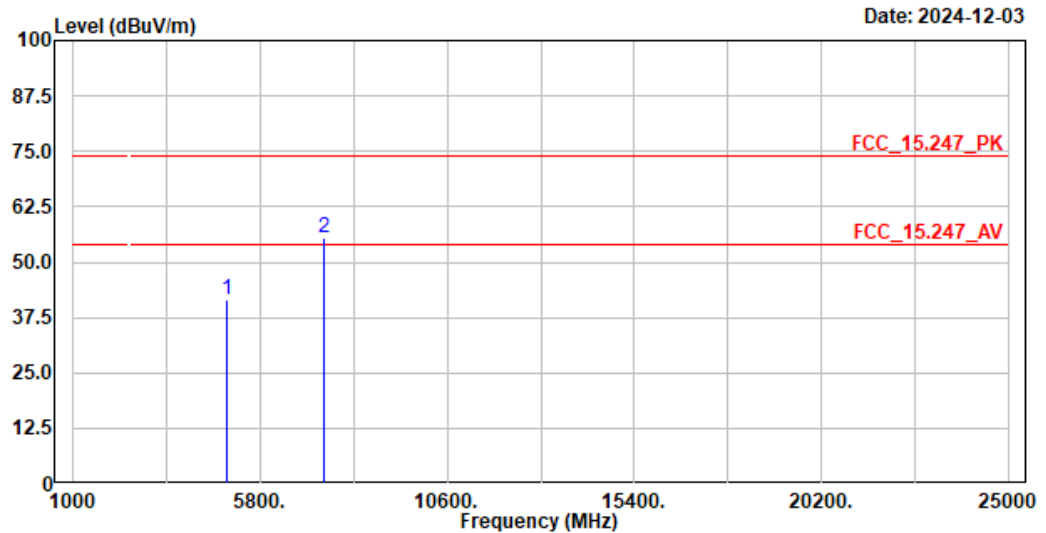

| No. | Frequency | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | Factor | Remark |
|-----|-----------|--------|---------------|---------------|---------------|--------|--------|
|     | MHz       | dBUV/m | dBUV/m        | dB            | dBuV          | dB/m   |        |
| 1   | 4960.000  | 41.61  | 74.00         | -32.39        | 54.78         | -13.17 | Peak   |
| 2   | 7440.000  | 55.60  | 74.00         | -18.40        | 61.91         | -6.31  | Peak   |


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Horizontal-Average Detector:

| Frequency<br>(MHz) | Peak Measurement<br>(dBUV/m) | Duty Cycle Factor<br>(dB) | Measurement Level<br>(dBUV/m) | Margin<br>(dB) | Limit<br>(dBUV/m) |
|--------------------|------------------------------|---------------------------|-------------------------------|----------------|-------------------|
| 7440               | 55.6                         | -30.752                   | 24.848                        | -29.152        | 54.000            |

Site :HY-CB03  
 Condition :3m Vertical  
 Mode :TX\_bt3M\_2480MHz  
 Test BY :Ashton

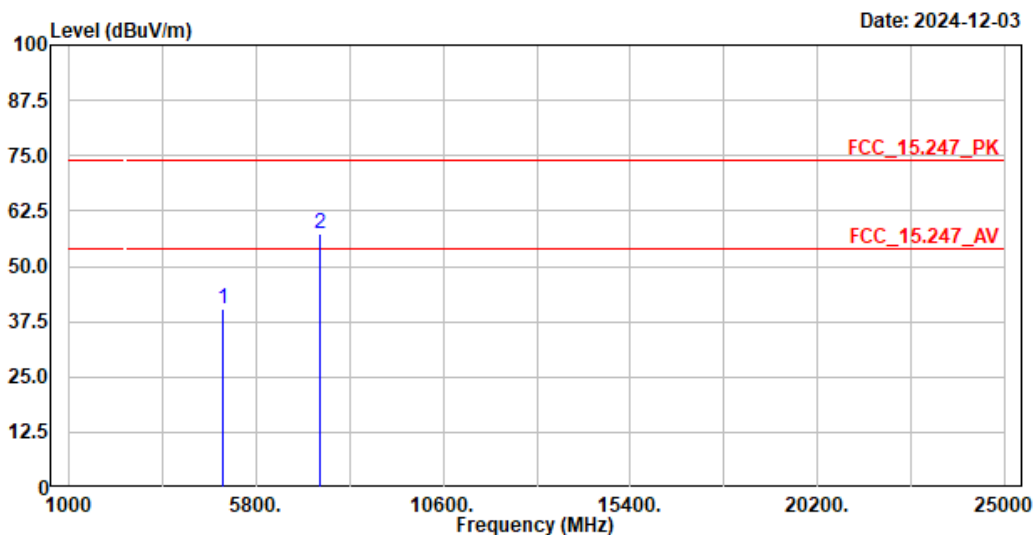

| No. | Frequency | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | Factor | Remark |
|-----|-----------|--------|---------------|---------------|---------------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m        | dB            | dBuV          | dB/m   |        |
| 1   | 4960.000  | 40.21  | 74.00         | -33.79        | 53.38         | -13.17 | Peak   |
| 2   | 7440.000  | 57.45  | 74.00         | -16.55        | 63.76         | -6.31  | Peak   |


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical-Average Detector:

| Frequency<br>(MHz) | Peak Measurement<br>(dBμV/m) | Duty Cycle Factor<br>(dB) | Measurement Level<br>(dBμV/m) | Margin<br>(dB) | Limit<br>(dBμV/m) |
|--------------------|------------------------------|---------------------------|-------------------------------|----------------|-------------------|
| 7440               | 57.45                        | -30.752                   | 26.698                        | -27.302        | 54.000            |

Site :HY-CB03  
 Condition :3m ,Horizontal  
 Mode :TX\_bt3M\_2441MHz  
 Test BY :Ashton

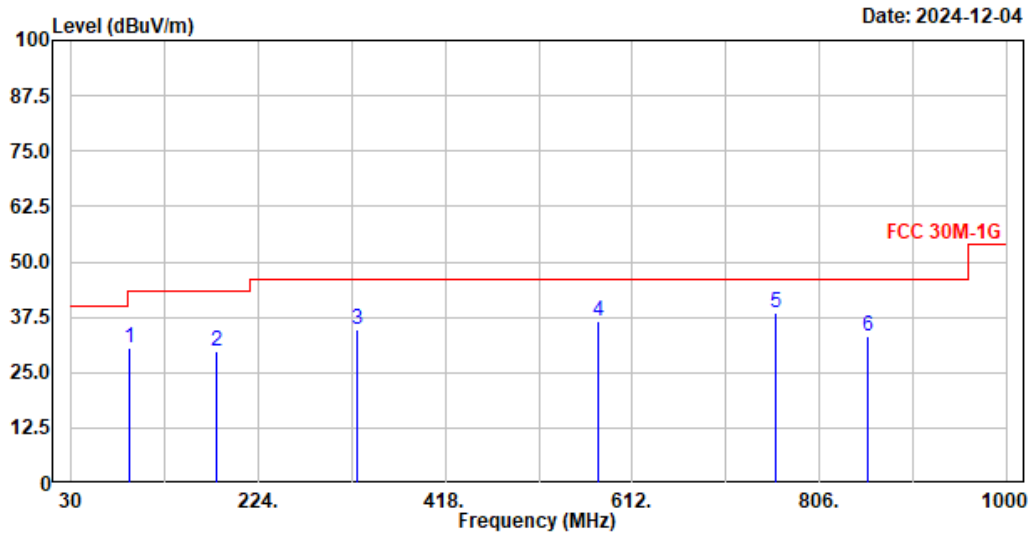


| No. | Frequency | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | Factor | Remark |
|-----|-----------|--------|---------------|---------------|---------------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m        | dB            | dBuV          | dB/m   |        |
| 1   | 90.140    | 30.39  | 43.50         | -13.11        | 59.89         | -29.50 | QP     |
| 2   | 180.350   | 29.88  | 43.50         | -13.62        | 55.26         | -25.38 | QP     |
| 3   | 326.820   | 34.83  | 46.00         | -11.17        | 56.82         | -21.99 | QP     |
| 4   | 576.110   | 36.73  | 46.00         | -9.27         | 52.85         | -16.12 | QP     |
| 5   | 761.380   | 38.54  | 46.00         | -7.46         | 51.38         | -12.84 | QP     |
| 6   | 856.440   | 33.20  | 46.00         | -12.80        | 45.00         | -11.80 | QP     |

**Note:**

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB03  
 Condition :3m ,Vertical  
 Mode :TX\_bt3M\_2441MHz  
 Test BY :Ashton

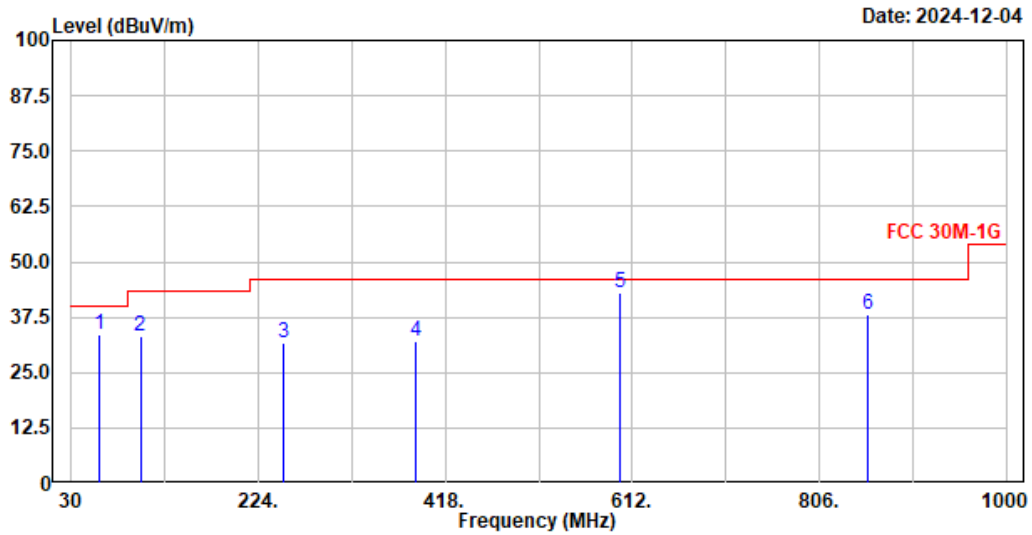


| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | Line   | Limit  | Level |        |        |
|     | MHz       | dBuV/m | dBuV/m | dB     | dBuV  | dB/m   |        |
| 1   | 60.070    | 33.75  | 40.00  | -6.25  | 58.01 | -24.26 | QP     |
| 2   | 101.780   | 33.33  | 43.50  | -10.17 | 61.18 | -27.85 | QP     |
| 3   | 250.190   | 31.71  | 46.00  | -14.29 | 56.45 | -24.74 | QP     |
| 4   | 387.930   | 32.03  | 46.00  | -13.97 | 52.44 | -20.41 | QP     |
| 5   | 598.420   | 42.88  | 46.00  | -3.12  | 58.17 | -15.29 | QP     |
| 6   | 855.470   | 38.27  | 46.00  | -7.73  | 50.05 | -11.78 | QP     |

**Note:**

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission under 30MHz was not included since the emission levels are very low against the limit.

Site :HY-CB03  
 Condition :3m Horizontal  
 Mode :TX\_bt1M\_2402MHz  
 Test BY :Ashton

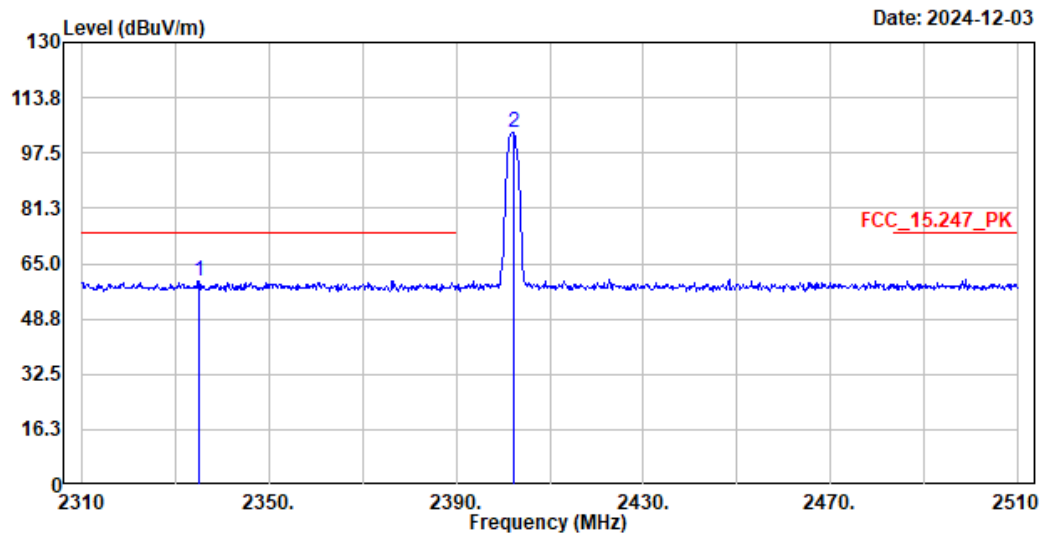

| No. | Frequency | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | Factor | Remark |
|-----|-----------|--------|---------------|---------------|---------------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m        | dB            | dBuV          | dB/m   |        |
| 1   | 2335.000  | 59.86  | 74.00         | -14.14        | 29.33         | 30.53  | Peak   |
| 2   | 2402.200  | 103.35 | -----         | -----         | 72.82         | 30.53  | Peak   |


**Note:**

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

**Horizontal-Average Detector:**

| Frequency (MHz) | Peak Measurement (dBuV/m) | Duty Cycle Factor (dB) | Measurement Level (dBuV/m) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------------------|------------------------|----------------------------|-------------|----------------|
| 2335            | 59.86                     | -30.752                | 29.108                     | -24.892     | 54.000         |
| 2402.2          | 103.35                    | -30.752                | 72.598                     | --          | --             |

Site :HY-CB03  
 Condition :3m Vertical  
 Mode :TX\_bt1M\_2402MHz  
 Test BY :Ashton

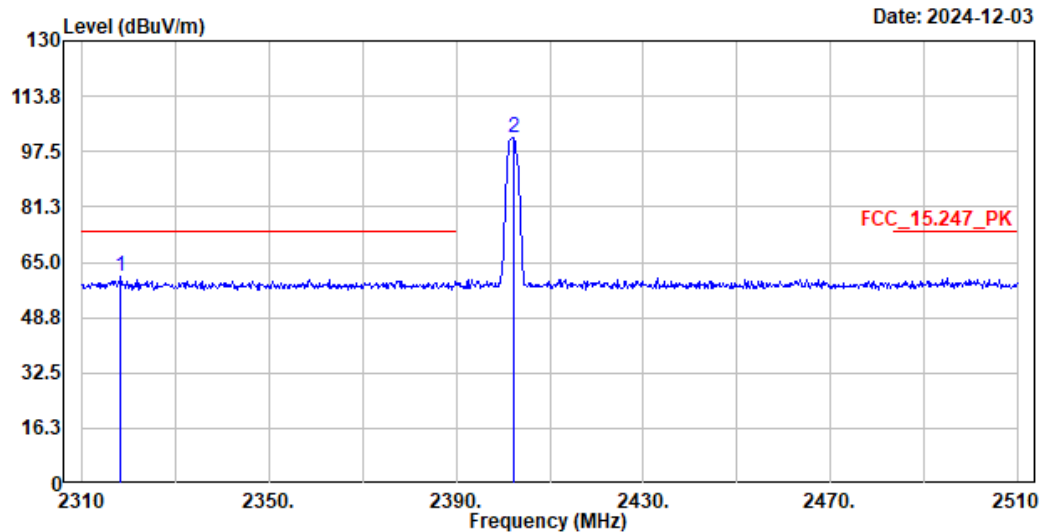

| No. | Frequency | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | Factor | Remark |
|-----|-----------|--------|---------------|---------------|---------------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m        | dB            | dBuV          | dB/m   |        |
| 1   | 2318.200  | 60.78  | 74.00         | -13.22        | 30.11         | 30.67  | Peak   |
| 2   | 2402.200  | 101.57 | -----         | -----         | 71.04         | 30.53  | Peak   |


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical-Average Detector:

| Frequency (MHz) | Peak Measurement (dBuV/m) | Duty Cycle Factor (dB) | Measurement Level (dBuV/m) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------------------|------------------------|----------------------------|-------------|----------------|
| 2318.2          | 60.78                     | -30.752                | 30.028                     | -23.972     | 54.000         |
| 2402.2          | 101.57                    | -30.752                | 70.818                     | --          | --             |

Site :HY-CB03  
 Condition :3m Horizontal  
 Mode :TX\_bt1M\_2480MHz  
 Test BY :Ashton

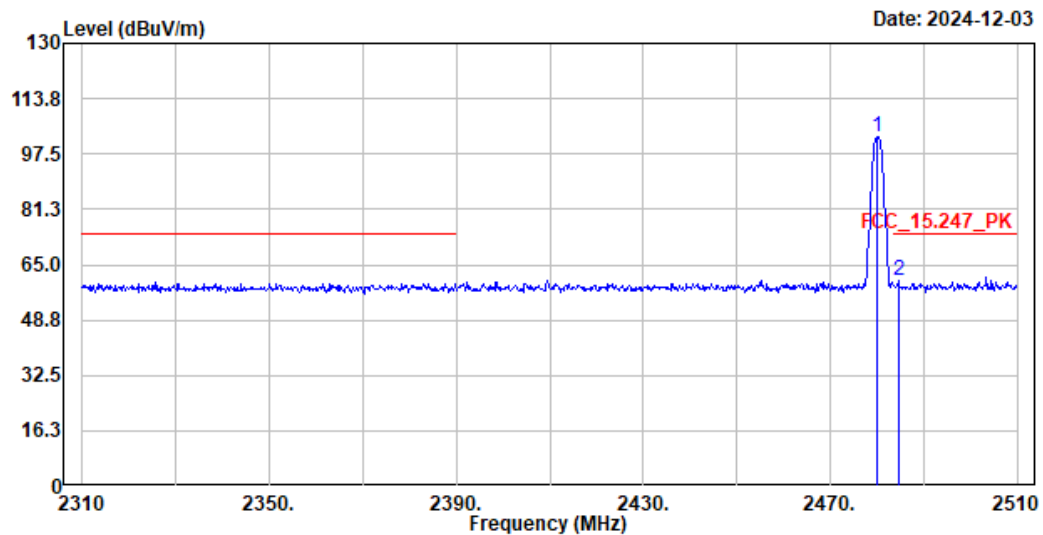

| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | Line   | Limit  | Level |        |        |
|     | MHz       | dBuV/m | dBuV/m | dB     | dBuV  | dB/m   |        |
| 1   | 2480.000  | 102.31 | -----  | -----  | 71.85 | 30.46  | Peak   |
| 2   | 2484.600  | 60.15  | 74.00  | -13.85 | 29.63 | 30.52  | Peak   |


**Note:**

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

**Horizontal-Average Detector:**

| Frequency (MHz) | Peak Measurement (dBuV/m) | Duty Cycle Factor (dB) | Measurement Level (dBuV/m) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------------------|------------------------|----------------------------|-------------|----------------|
| 2480            | 102.31                    | -30.752                | 71.558                     | --          | --             |
| 2484.6          | 60.15                     | -30.752                | 29.398                     | -24.602     | 54.000         |

Site :HY-CB03  
 Condition :3m Vertical  
 Mode :TX\_bt1M\_2480MHz  
 Test BY :Ashton

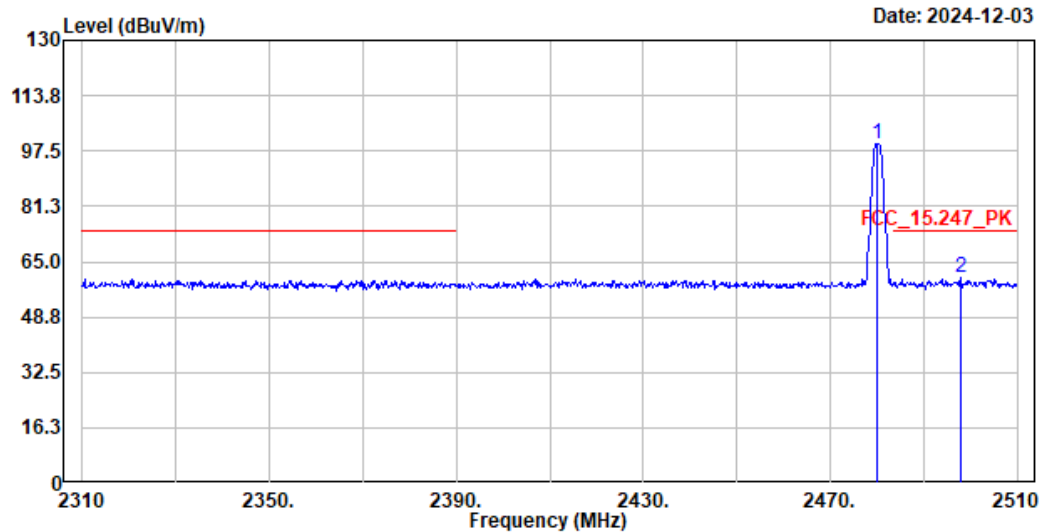

| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | Line   | Limit  | Level |        |        |
|     |           |        | dBuV/m | dB     | dBuV  | dB/m   |        |
| 1   | 2480.000  | 99.73  | -----  | -----  | 69.27 | 30.46  | Peak   |
| 2   | 2497.800  | 60.55  | 74.00  | -13.45 | 29.97 | 30.58  | Peak   |


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Vertical-Average Detector:

| Frequency (MHz) | Peak Measurement (dBμV/m) | Duty Cycle Factor (dB) | Measurement Level (dBμV/m) | Margin (dB) | Limit (dBμV/m) |
|-----------------|---------------------------|------------------------|----------------------------|-------------|----------------|
| 2480            | 99.73                     | -30.752                | 68.978                     | --          | --             |
| 2497.8          | 60.55                     | -30.752                | 29.798                     | -24.202     | 54.000         |

Site :HY-CB03  
Condition :3m Horizontal  
Mode :TX\_bt3M\_2402MHz  
Test BY :Ashton

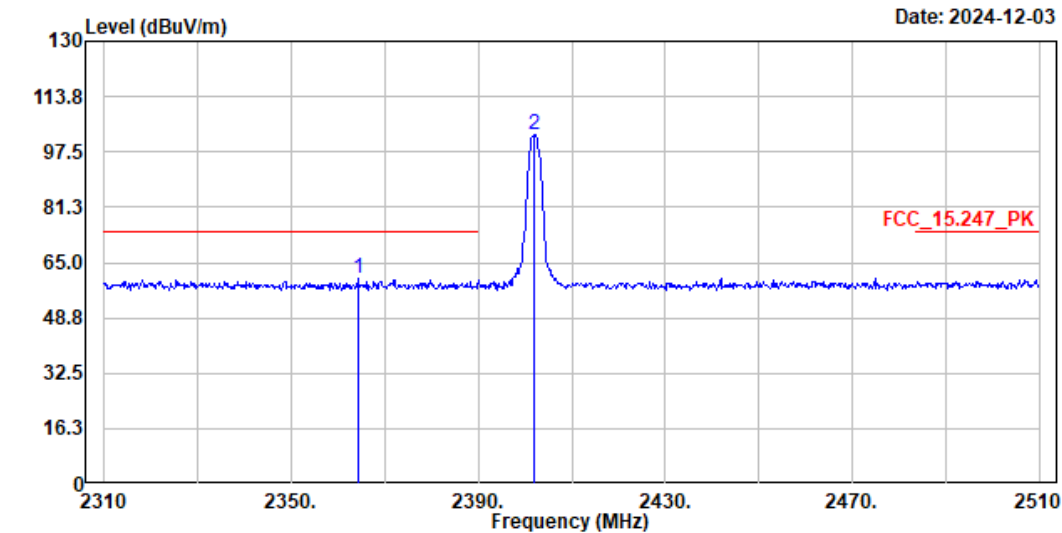

| No. | Frequency | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | Factor | Remark |
|-----|-----------|--------|---------------|---------------|---------------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m        | dB            | dBuV          | dB/m   |        |
| 1   | 2364.200  | 60.48  | 74.00         | -13.52        | 29.99         | 30.49  | Peak   |
| 2   | 2402.000  | 102.67 | -----         | -----         | 72.14         | 30.53  | Peak   |


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Horizontal-Average Detector:

| Frequency (MHz) | Peak Measurement (dBuV/m) | Duty Cycle Factor (dB) | Measurement Level (dBuV/m) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------------------|------------------------|----------------------------|-------------|----------------|
| 2364.2          | 60.48                     | -30.752                | 29.728                     | -24.272     | 54.000         |
| 2402            | 102.67                    | -30.752                | 71.918                     | --          | --             |

Site :HY-CB03  
 Condition :3m Vertical  
 Mode :TX\_bt3M\_2402MHz  
 Test BY :Ashton

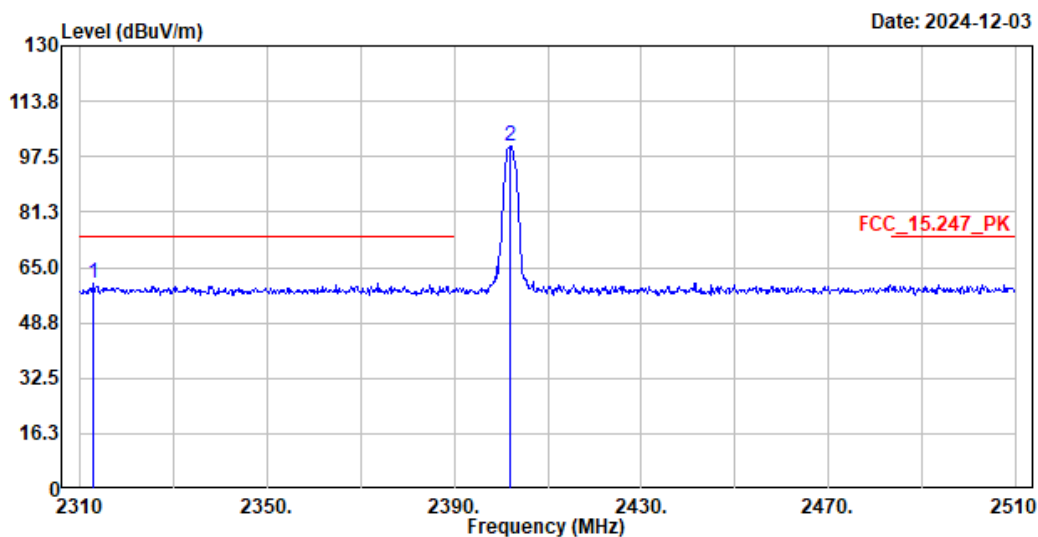

| No. | Frequency | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | Factor | Remark |
|-----|-----------|--------|---------------|---------------|---------------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m        | dB            | dBuV          | dB/m   |        |
| 1   | 2312.800  | 60.20  | 74.00         | -13.80        | 29.54         | 30.66  | Peak   |
| 2   | 2402.000  | 100.67 | -----         | -----         | 70.14         | 30.53  | Peak   |


**Note:**

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

**Vertical-Average Detector:**

| Frequency (MHz) | Peak Measurement (dBuV/m) | Duty Cycle Factor (dB) | Measurement Level (dBuV/m) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------------------|------------------------|----------------------------|-------------|----------------|
| 2312.8          | 60.2                      | -30.752                | 29.448                     | -24.552     | 54.000         |
| 2402            | 100.67                    | -30.752                | 69.918                     | --          | --             |

Site :HY-CB03  
 Condition :3m Horizontal  
 Mode :TX\_bt3M\_2480MHz  
 Test BY :Ashton

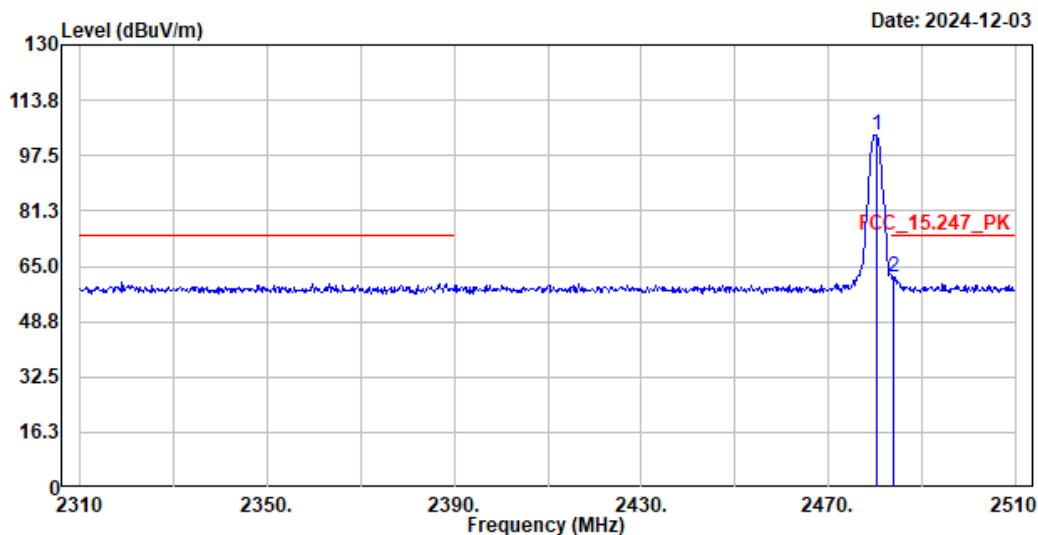

| No. | Frequency | Level  | Limit  | Over   | Read  | Factor | Remark |
|-----|-----------|--------|--------|--------|-------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m | Limit  | Level | dB/m   |        |
| 1   | 2480.200  | 103.58 | -----  | -----  | 73.12 | 30.46  | Peak   |
| 2   | 2483.800  | 61.64  | 74.00  | -12.36 | 31.13 | 30.51  | Peak   |


Note:

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

Horizontal-Average Detector:

| Frequency (MHz) | Peak Measurement (dBuV/m) | Duty Cycle Factor (dB) | Measurement Level (dBuV/m) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------------------|------------------------|----------------------------|-------------|----------------|
| 2480.2          | 103.58                    | -30.752                | 72.828                     | --          | --             |
| 2483.8          | 61.64                     | -30.752                | 30.888                     | -23.112     | 54.000         |

Site :HY-CB03  
 Condition :3m Vertical  
 Mode :TX\_bt3M\_2480MHz  
 Test BY :Ashton

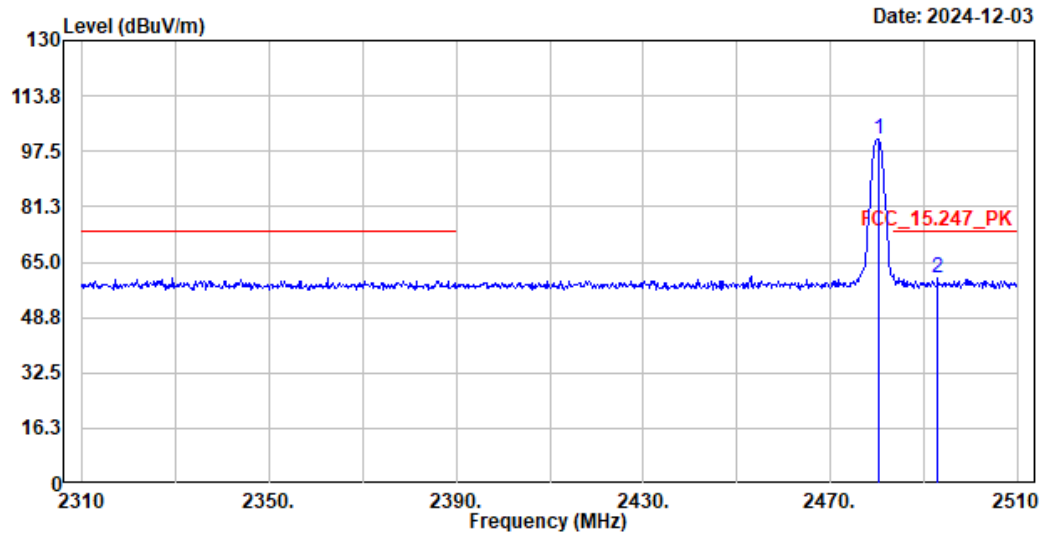

| No. | Frequency | Level  | Limit<br>Line | Over<br>Limit | Read<br>Level | Factor | Remark |
|-----|-----------|--------|---------------|---------------|---------------|--------|--------|
|     | MHz       | dBuV/m | dBuV/m        | dB            | dBuV          | dB/m   |        |
| 1   | 2480.200  | 100.99 | -----         | -----         | 70.53         | 30.46  | Peak   |
| 2   | 2493.000  | 60.51  | 74.00         | -13.49        | 29.94         | 30.57  | Peak   |

**Note:**

1. Level = Read Level + Factor
2. Factor = Antenna Factor + Cable Loss - Preamp Factor
3. Over Limit = Level - Limit Line
4. The emission levels of other frequencies are very lower than the limit and not show in test report.

**Vertical-Average Detector:**

| Frequency (MHz) | Peak Measurement (dBuV/m) | Duty Cycle Factor (dB) | Measurement Level (dBuV/m) | Margin (dB) | Limit (dBuV/m) |
|-----------------|---------------------------|------------------------|----------------------------|-------------|----------------|
| 2480.2          | 100.99                    | -30.752                | 70.238                     | --          | --             |
| 2493            | 60.51                     | -30.752                | 29.758                     | -24.242     | 54.000         |