

GSM850 GPRS10 CH128 Left Cheek

DUT: WS708

Communication System: UID 0, GPRS/EGPRS Mode(2up) Communication System (0); Frequency: 824.2 MHz; Duty Cycle: 1:4.15

Medium: H835 Medium parameters used : $f = 824.2$ MHz; $\sigma = 0.914$ S/m; $\epsilon_r = 42.556$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(9.12, 9.72, 9.05) @ 824.2 MHz; Calibrated: 2024/11/12
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2024/10/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.269 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.330 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 0.283 W/kg

SAR(1 g) = 0.235 W/kg; SAR(10 g) = 0.182 W/kg

Smallest distance from peaks to all points 3 dB below = 25.9 mm

Ratio of SAR at M2 to SAR at M1 = 83.2%

Maximum value of SAR (measured) = 0.268 W/kg

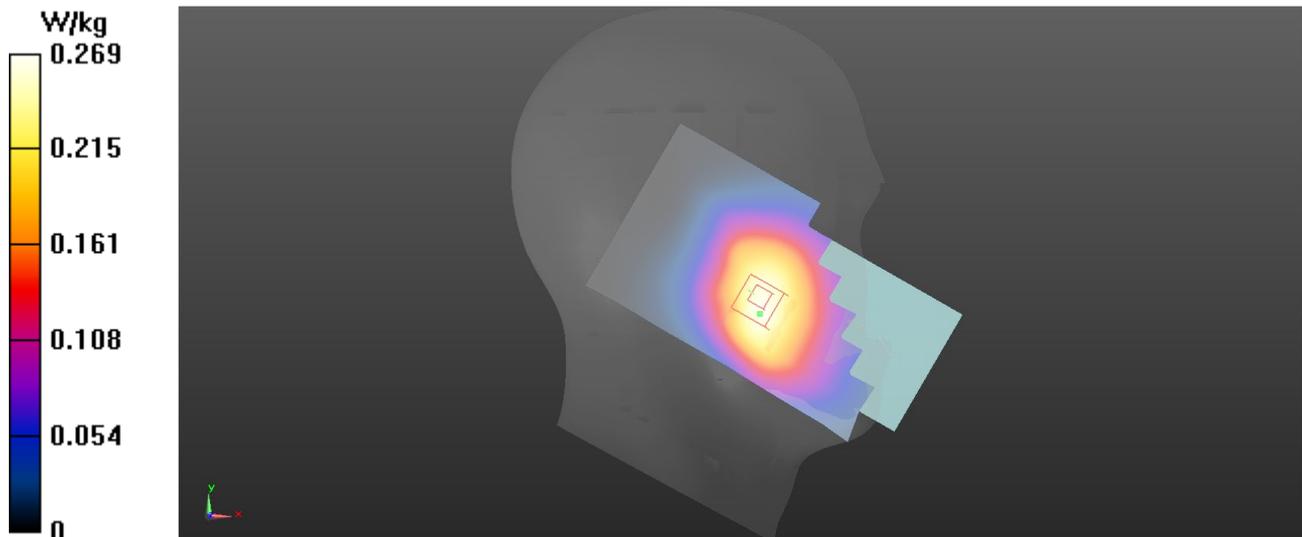

GSM1900 GPRS11 CH512 Right Cheek

DUT: WS708

Communication System: UID 0, GPRS/EGPRS Mode(3up) Communication System (0); Frequency: 1850.2 MHz; Duty Cycle: 1:2.77

Medium: H1900 Medium parameters used : $f = 1850.2$ MHz; $\sigma = 1.373$ S/m; $\epsilon_r = 40.715$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(7.37, 7.85, 7.31) @ 1850.2 MHz; Calibrated: 2024/11/12
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2024/10/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.86 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.73 V/m; Power Drift = 0.14 dB



Peak SAR (extrapolated) = 2.11 W/kg

SAR(1 g) = 1.26 W/kg; SAR(10 g) = 0.715 W/kg

Smallest distance from peaks to all points 3 dB below = 14.3 mm

Ratio of SAR at M2 to SAR at M1 = 57.1%

Maximum value of SAR (measured) = 1.76 W/kg

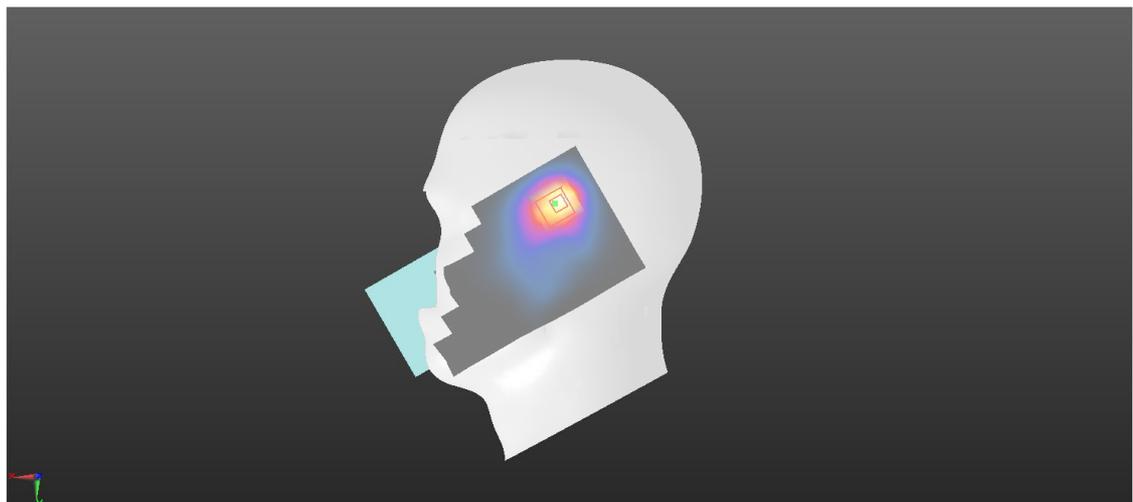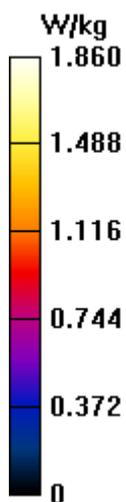

WCDMA II RMC12.2K CH9538 Right Cheek

DUT: WS708

Communication System: UID 0, WCDMA (0); Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: H1900 Medium parameters used: $f = 1908$ MHz; $\sigma = 1.372$ S/m; $\epsilon_r = 40.707$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(7.37, 7.85, 7.31) @ 1907.6 MHz; Calibrated: 2024/11/12
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2024/10/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.91 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.01 V/m; Power Drift = 0.12 dB



Peak SAR (extrapolated) = 2.07 W/kg

SAR(1 g) = 1.22 W/kg; SAR(10 g) = 0.695 W/kg

Smallest distance from peaks to all points 3 dB below = 13.2 mm

Ratio of SAR at M2 to SAR at M1 = 64.3%

Maximum value of SAR (measured) = 1.68 W/kg

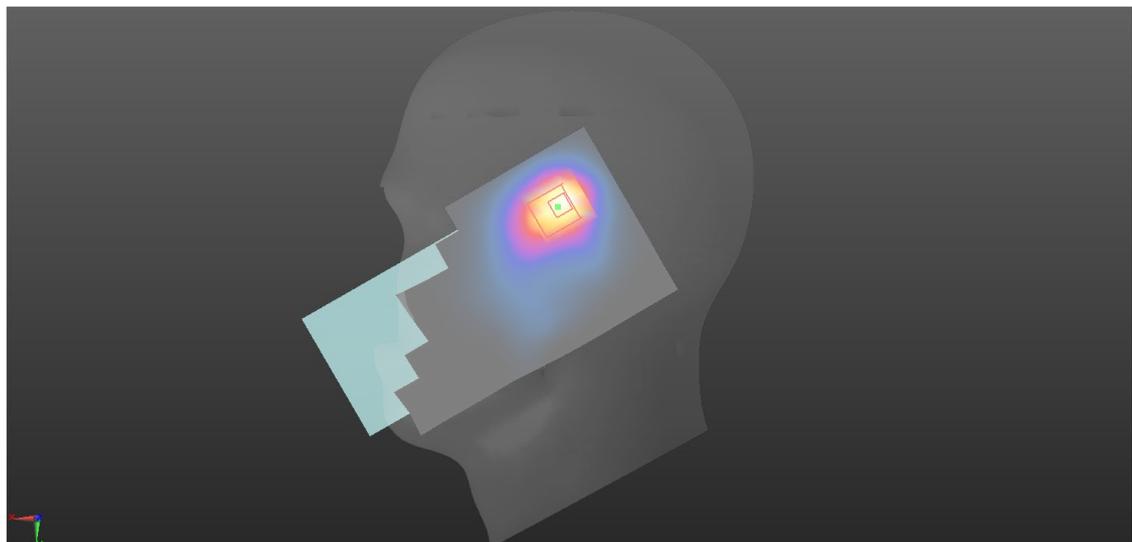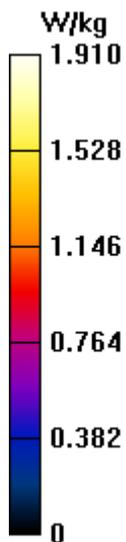

WCDMA V RMC12.2K CH4182 Left Cheek

DUT: WS708

Communication System: UID 0, WCDMA (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: H835 Medium parameters used : $f = 836.4$ MHz; $\sigma = 0.915$ S/m; $\epsilon_r = 42.226$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(9.12, 9.72, 9.05) @ 836.4 MHz; Calibrated: 2024/11/12
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2024/10/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.177 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.450 V/m; Power Drift = 0.09 dB



Peak SAR (extrapolated) = 0.190 W/kg

SAR(1 g) = 0.157 W/kg; SAR(10 g) = 0.121 W/kg

Smallest distance from peaks to all points 3 dB below = 26.5 mm

Ratio of SAR at M2 to SAR at M1 = 82.9%

Maximum value of SAR (measured) = 0.178 W/kg

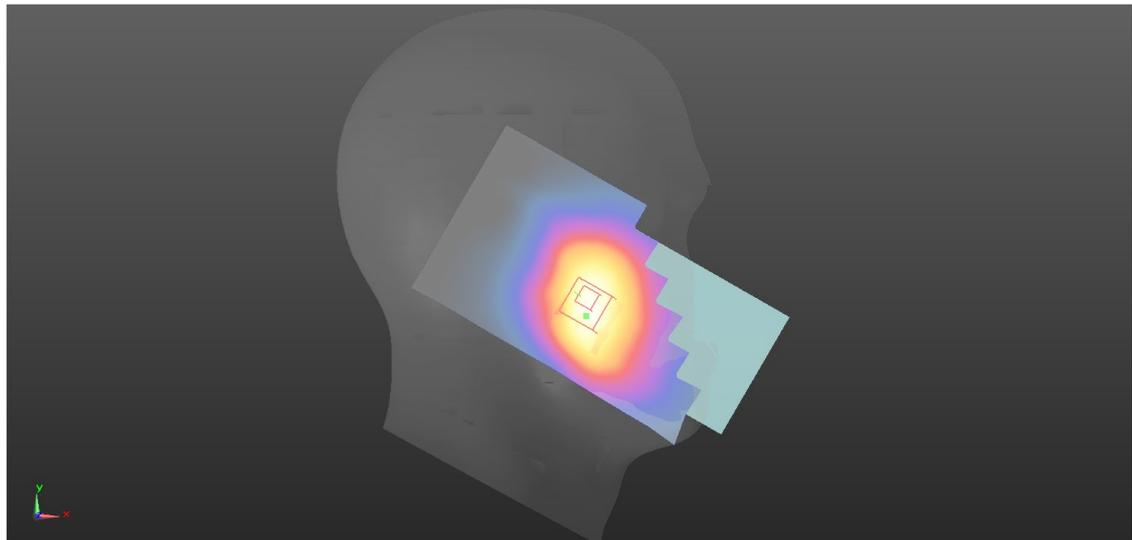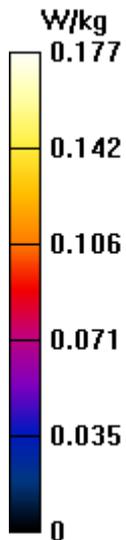

LTE Band 2 20M QPSK 1RB99 CH19100 Right Cheek

DUT: WS708

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1900 MHz; Duty Cycle: 1:1
Medium: H1900 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.372$ S/m; $\epsilon_r = 40.708$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(7.37, 7.85, 7.31) @ 1900 MHz; Calibrated: 2024/11/12
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2024/10/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.61 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.51 V/m; Power Drift = 0.00 dB



Peak SAR (extrapolated) = 1.64 W/kg

SAR(1 g) = 1.02 W/kg; SAR(10 g) = 0.576 W/kg

Smallest distance from peaks to all points 3 dB below = 13.7 mm

Ratio of SAR at M2 to SAR at M1 = 64.1%

Maximum value of SAR (measured) = 1.42 W/kg

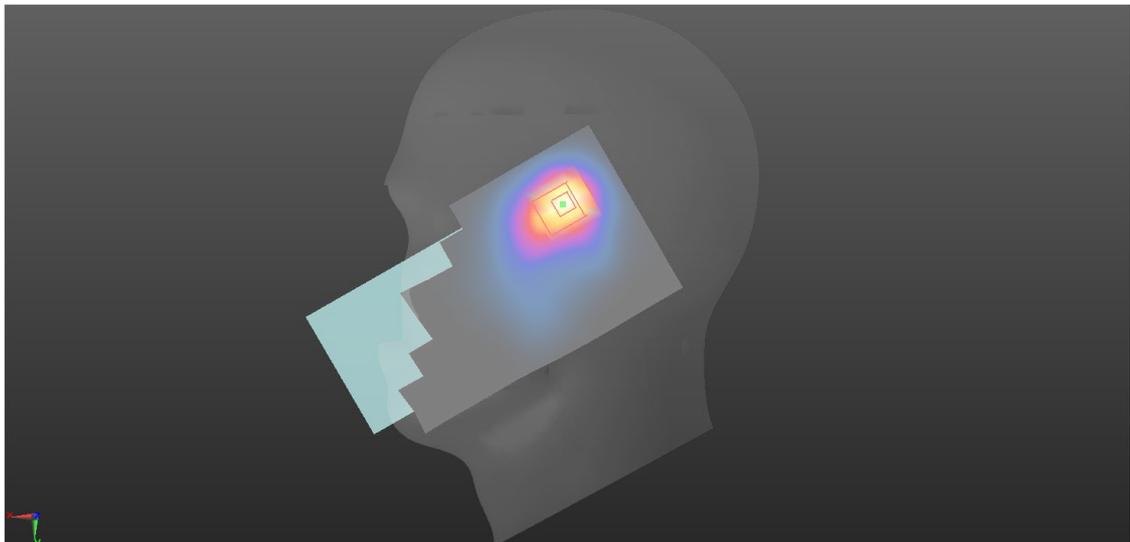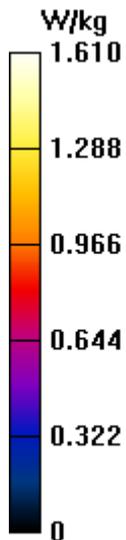

LTE Band 4 20M QPSK 1RB99 CH20300 Right Cheek

DUT: WS708


Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium: H1750 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.384$ S/m; $\epsilon_r = 41.645$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(7.7, 8.21, 7.64) @ 1745 MHz; Calibrated: 2024/11/12
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2024/10/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x131x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm
Maximum value of SAR (interpolated) = 1.18 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm
Reference Value = 14.17 V/m; Power Drift = 0.05 dB
Peak SAR (extrapolated) = 1.29 W/kg
SAR(1 g) = 0.774 W/kg; SAR(10 g) = 0.449 W/kg
Smallest distance from peaks to all points 3 dB below = 13.6 mm
Ratio of SAR at M2 to SAR at M1 = 59.2%
Maximum value of SAR (measured) = 1.06 W/kg

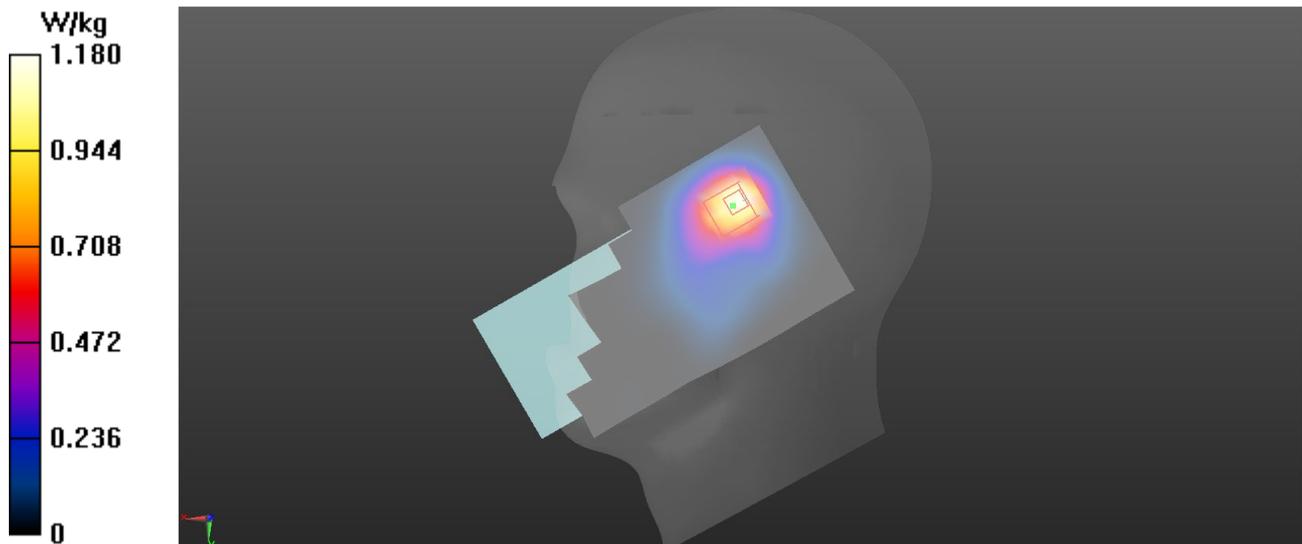

LTE Band 5 10M QPSK 1RB0 CH20600 Left Cheek

DUT: WS708

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 844 MHz; Duty Cycle: 1:1
Medium: H835 Medium parameters used: $f = 844$ MHz; $\sigma = 0.918$ S/m; $\epsilon_r = 42.177$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(9.12, 9.72, 9.05) @ 844 MHz; Calibrated: 2024/11/12
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2024/10/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x131x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 0.283 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 4.036 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 0.310 W/kg

SAR(1 g) = 0.257 W/kg; SAR(10 g) = 0.198 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 16 mm)

Ratio of SAR at M2 to SAR at M1 = 83.4%

Maximum value of SAR (measured) = 0.295 W/kg

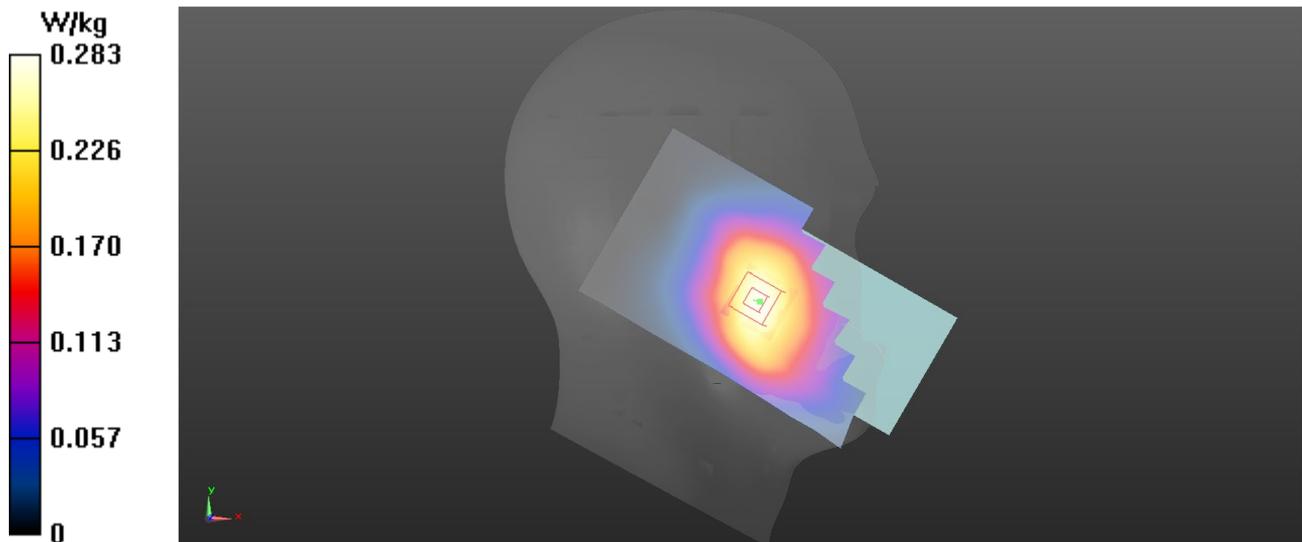

LTE Band 7 20M QPSK 1RB99 CH21350 Right Cheek

DUT: WS708

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 2560 MHz; Duty Cycle: 1:1
Medium: H2600 Medium parameters used: $f = 2560$ MHz; $\sigma = 1.912$ S/m; $\epsilon_r = 40.189$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(6.7, 7.14, 6.64) @ 2560 MHz; Calibrated: 2024/11/12
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2024/10/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (91x171x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 1.10 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.608 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 1.27 W/kg

SAR(1 g) = 0.673 W/kg; SAR(10 g) = 0.350 W/kg

Smallest distance from peaks to all points 3 dB below = 10 mm

Ratio of SAR at M2 to SAR at M1 = 55%

Maximum value of SAR (measured) = 1.01 W/kg

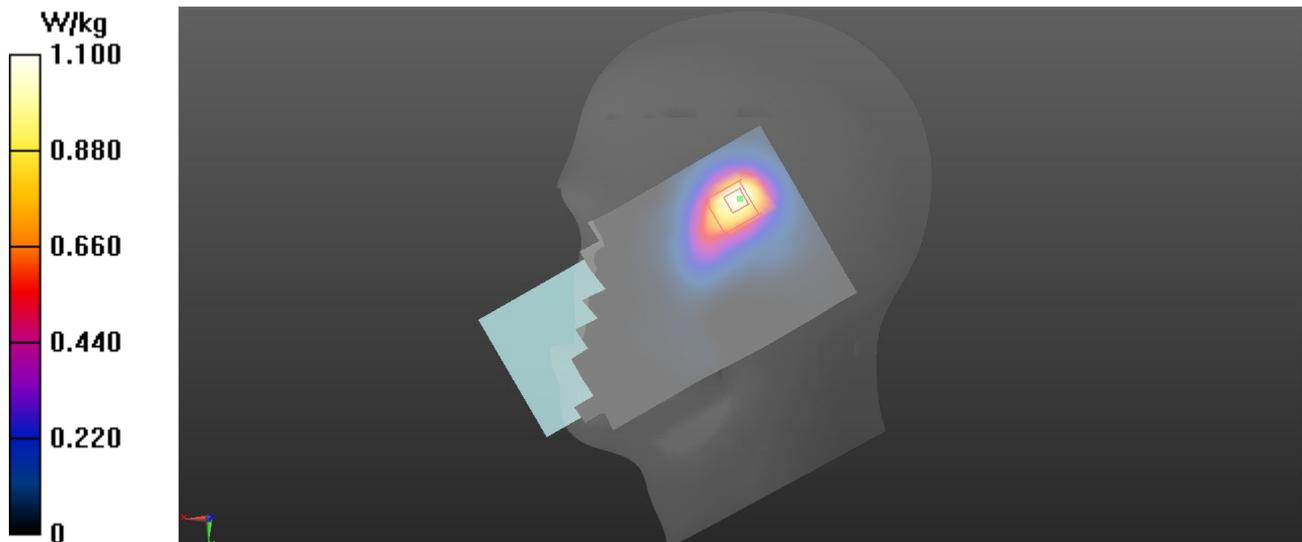

LTE Band 38 20M QPSK 1RB0 CH38000 Right Cheek

DUT: WS708

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 2595 MHz; Duty Cycle: 1:1.59
Medium: H2600 Medium parameters used: $f = 2595$ MHz; $\sigma = 1.949$ S/m; $\epsilon_r = 40.089$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(6.7, 7.14, 6.64) @ 2595 MHz; Calibrated: 2024/11/12
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2024/10/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (91x171x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.674 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.795 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 0.750 W/kg

SAR(1 g) = 0.405 W/kg; SAR(10 g) = 0.208 W/kg

Smallest distance from peaks to all points 3 dB below = 12 mm

Ratio of SAR at M2 to SAR at M1 = 54.2%

Maximum value of SAR (measured) = 0.617 W/kg

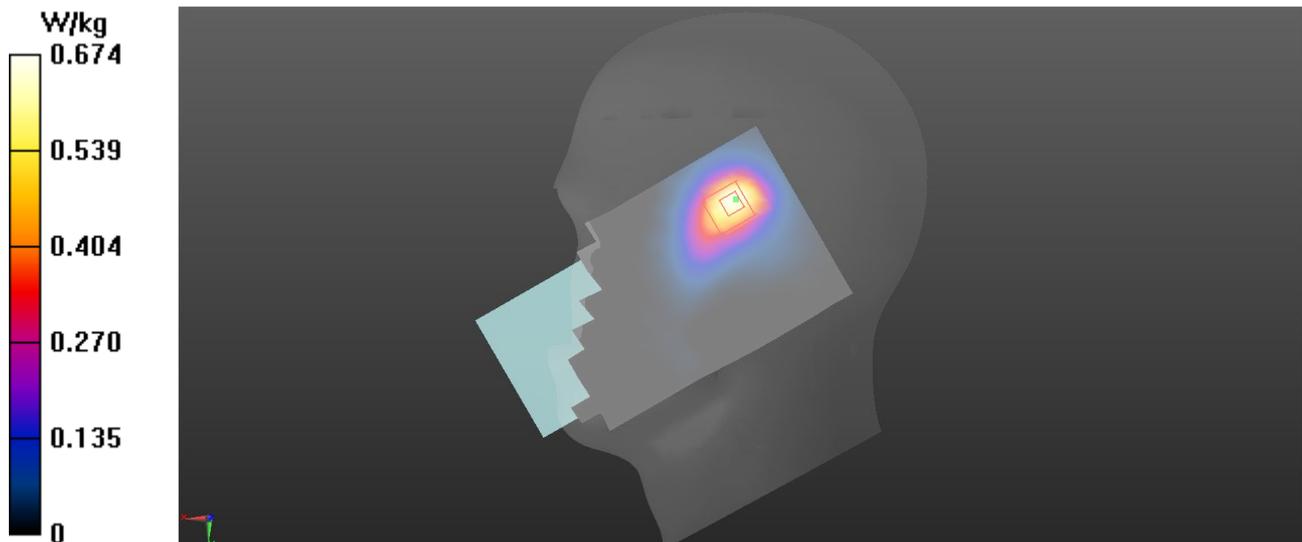

WLAN2.4G 802.11b CH1 Left Tilted

DUT: WS708



Communication System: UID 0, WI-FI(2.4GHz) (0); Frequency: 2412 MHz; Duty Cycle: 1:1.005
Medium: H2450 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.75$ S/m; $\epsilon_r = 40.51$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(6.78, 7.22, 6.73) @ 2412 MHz; Calibrated: 2024/11/12
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2024/10/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (91x171x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
Maximum value of SAR (interpolated) = 0.321 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 6.664 V/m; Power Drift = 0.00 dB
Peak SAR (extrapolated) = 0.381 W/kg
SAR(1 g) = 0.189 W/kg; SAR(10 g) = 0.092 W/kg
Smallest distance from peaks to all points 3 dB below = 10.4 mm
Ratio of SAR at M2 to SAR at M1 = 50.2%
Maximum value of SAR (measured) = 0.311 W/kg

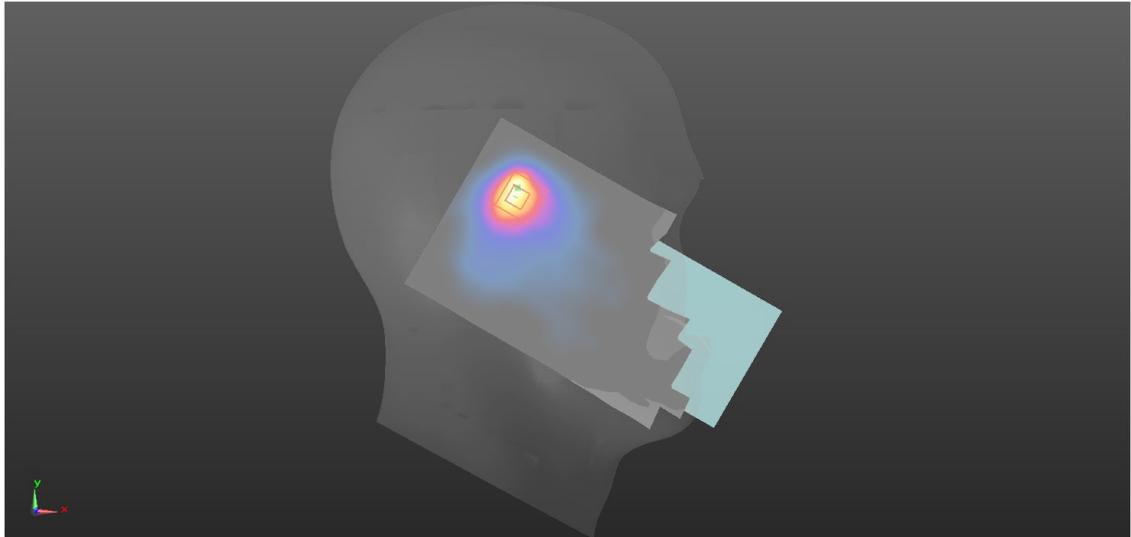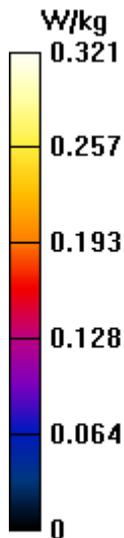

GSM850 GPRS10 CH128 Rear Face 10mm

DUT: WS708

Communication System: UID 0, GPRS/EGPRS Mode(2up) Communication System (0); Frequency: 824.2 MHz; Duty Cycle: 1:4.15

Medium: H835 Medium parameters used : $f = 824.2$ MHz; $\sigma = 0.914$ S/m; $\epsilon_r = 42.556$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(9.12, 9.72, 9.05) @ 824.2 MHz; Calibrated: 2024/11/12
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2024/10/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.317 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.92 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 0.441 W/kg

SAR(1 g) = 0.296 W/kg; SAR(10 g) = 0.203 W/kg

Smallest distance from peaks to all points 3 dB below = 31.4 mm

Ratio of SAR at M2 to SAR at M1 = 69.7%

Maximum value of SAR (measured) = 0.389 W/kg

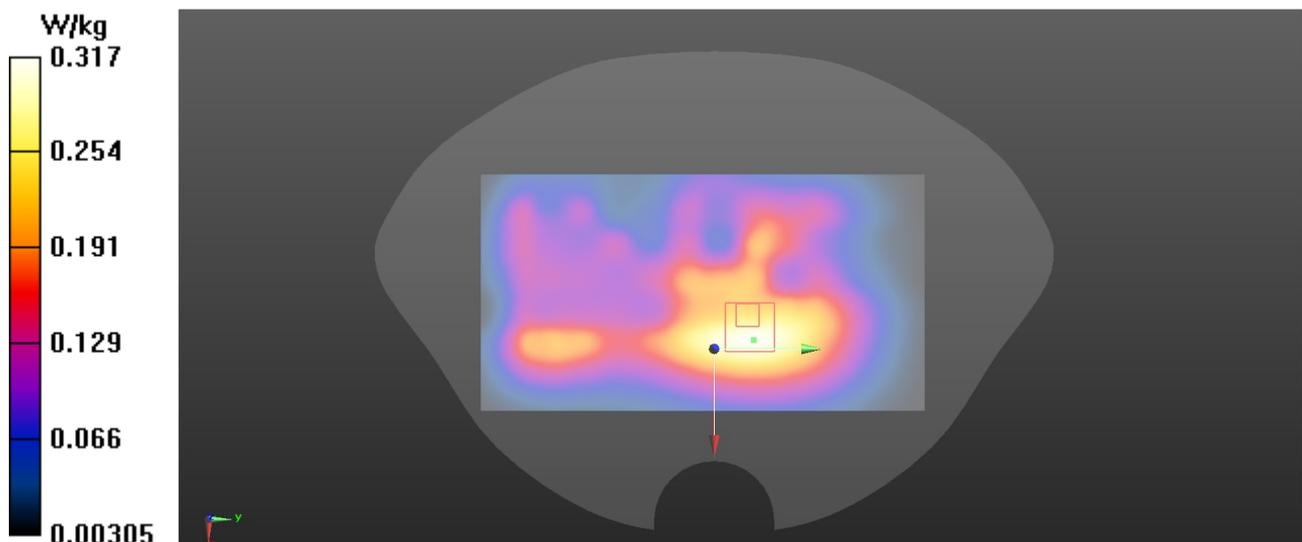

GSM1900 GPRS11 CH512 Rear Face 10mm

DUT: WS708

Communication System: UID 0, GPRS/EGPRS Mode(3up) Communication System (0); Frequency: 1850.2 MHz; Duty Cycle: 1:2.77

Medium: HSL1900 Medium parameters used : $f = 1850.2$ MHz; $\sigma = 1.373$ S/m; $\epsilon_r = 40.715$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(7.37, 7.85, 7.31) @ 1850.2 MHz; Calibrated: 2024/11/12
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2024/10/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.777 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.74 V/m; Power Drift = -0.09 dB


Peak SAR (extrapolated) = 0.887 W/kg

SAR(1 g) = 0.506 W/kg; SAR(10 g) = 0.300 W/kg

Smallest distance from peaks to all points 3 dB below = 15.8 mm

Ratio of SAR at M2 to SAR at M1 = 56.4%

Maximum value of SAR (measured) = 0.736 W/kg

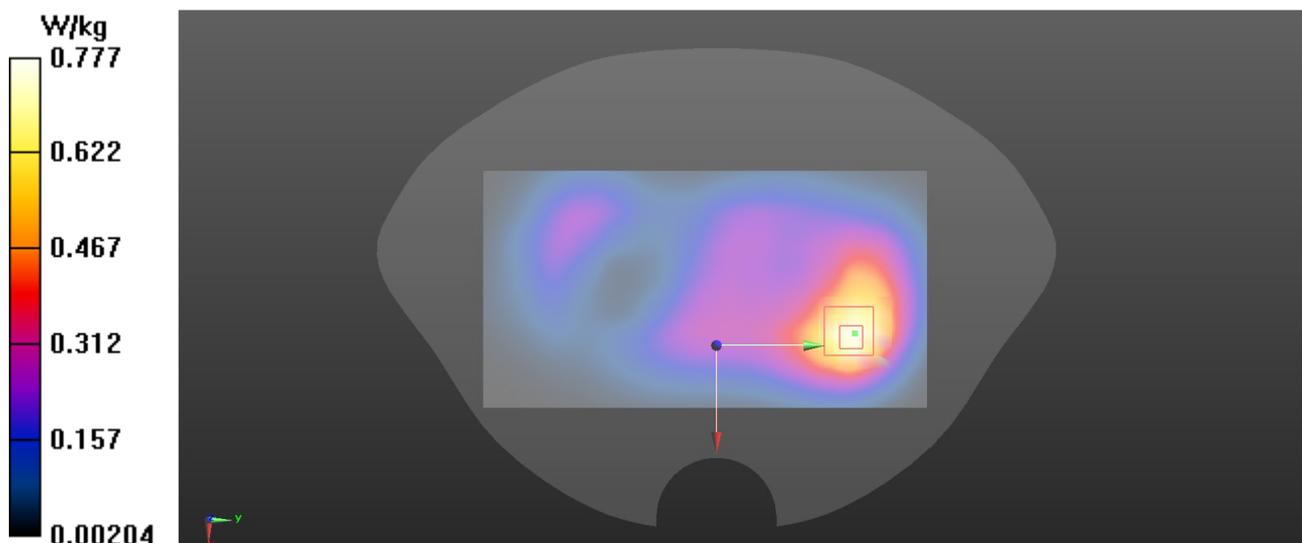

WCDMA II RMC12.2K CH9400 Rear Face 10mm**DUT: WS708**

Communication System: UID 0, WCDMA (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: H1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.372$ S/m; $\epsilon_r = 40.711$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(7.37, 7.85, 7.31) @ 1880 MHz; Calibrated: 2024/11/12
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2024/10/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.15 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.22 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 1.33 W/kg

SAR(1 g) = 0.761 W/kg; SAR(10 g) = 0.451 W/kg

Smallest distance from peaks to all points 3 dB below = 16.5 mm

Ratio of SAR at M2 to SAR at M1 = 57%

Maximum value of SAR (measured) = 1.11 W/kg

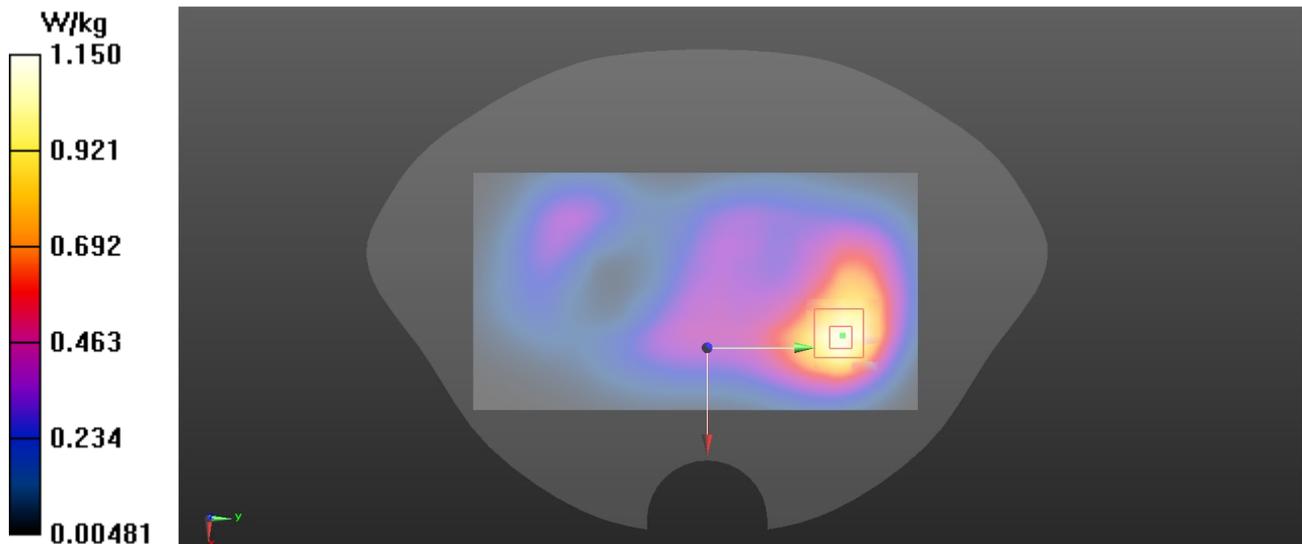

WCDMA V RMC12.2K CH4182 Rear Face 10mm

DUT: WS708

Communication System: UID 0, WCDMA (0); Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: H835 Medium parameters used : $f = 836.4$ MHz; $\sigma = 0.915$ S/m; $\epsilon_r = 42.226$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(9.12, 9.72, 9.05) @ 836.4 MHz; Calibrated: 2024/11/12
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2024/10/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.336 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.57 V/m; Power Drift = 0.06 dB


Peak SAR (extrapolated) = 0.448 W/kg

SAR(1 g) = 0.235 W/kg; SAR(10 g) = 0.135 W/kg

Smallest distance from peaks to all points 3 dB below = 14.8 mm

Ratio of SAR at M2 to SAR at M1 = 52.4%

Maximum value of SAR (measured) = 0.357 W/kg

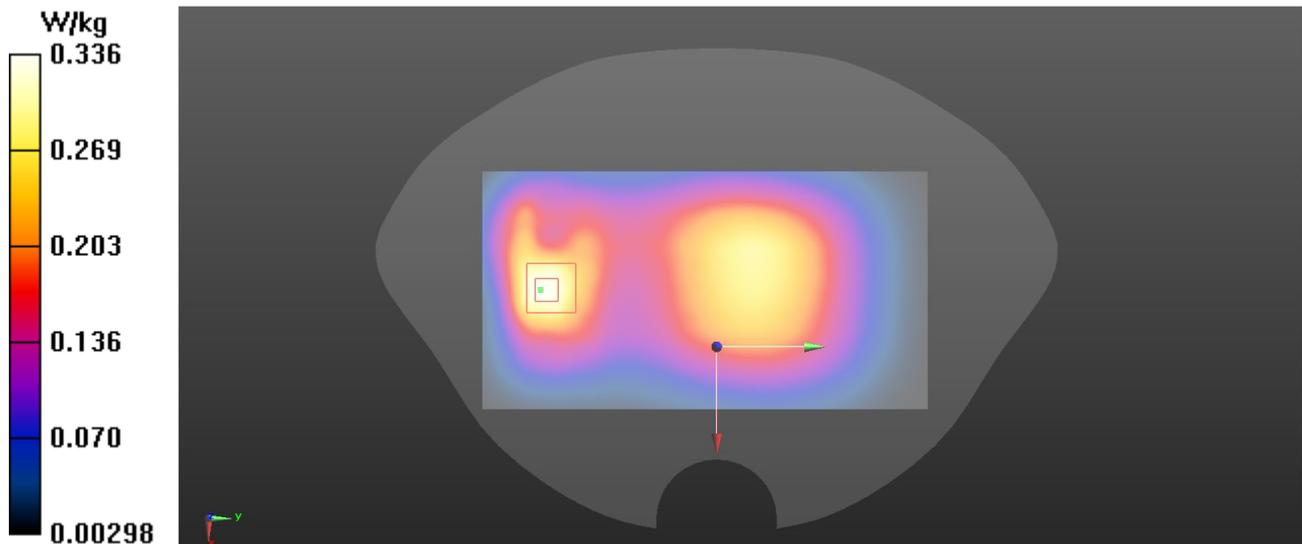

LTE Band 2 20M QPSK 1RB49 CH18900 Rear Face 10mm**DUT: WS708**

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1880 MHz; Duty Cycle: 1:1
Medium: H1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.372$ S/m; $\epsilon_r = 40.711$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(7.37, 7.85, 7.31) @ 1880 MHz; Calibrated: 2024/11/12
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2024/10/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.62 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.09 V/m; Power Drift = -0.06 dB


Peak SAR (extrapolated) = 1.76 W/kg

SAR(1 g) = 1.07 W/kg; SAR(10 g) = 0.639 W/kg

Smallest distance from peaks to all points 3 dB below = 17 mm

Ratio of SAR at M2 to SAR at M1 = 60.1%

Maximum value of SAR (measured) = 1.52 W/kg

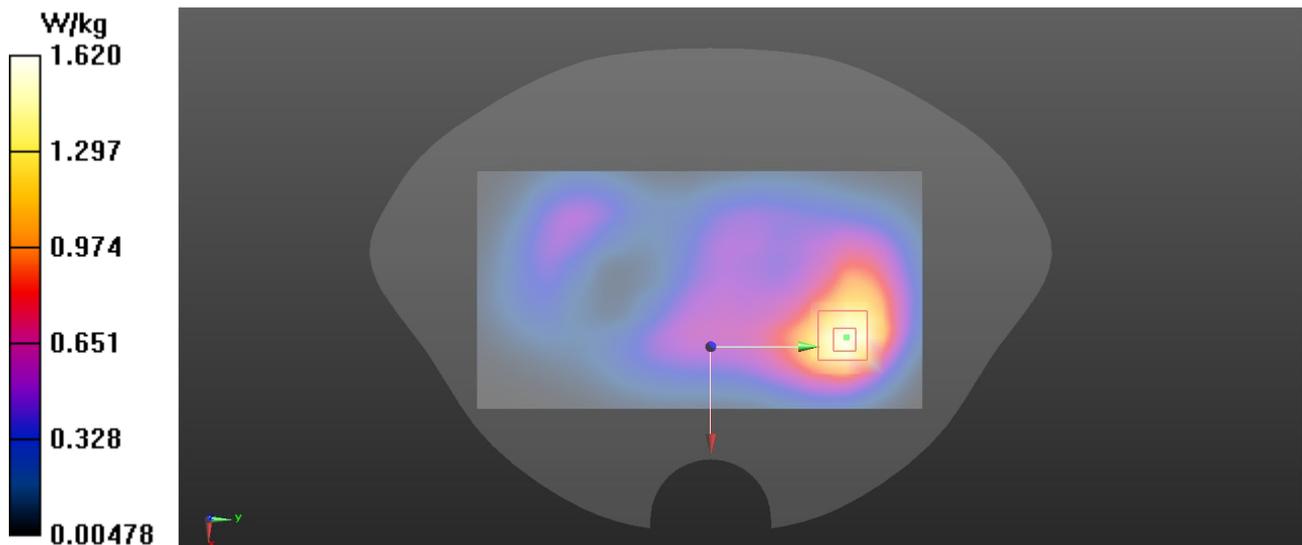

LTE Band 4 20M QPSK 1RB49 CH20300 Rear Face 10mm**DUT: WS708**

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 1745 MHz; Duty Cycle: 1:1
Medium: H1750 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.384$ S/m; $\epsilon_r = 41.645$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(7.7, 8.21, 7.64) @ 1745 MHz; Calibrated: 2024/11/12
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2024/10/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x131x1): Interpolated grid: $dx=1.500$ mm, $dy=1.500$ mm

Maximum value of SAR (interpolated) = 1.06 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 13.76 V/m; Power Drift = 0.17 dB


Peak SAR (extrapolated) = 1.19 W/kg

SAR(1 g) = 0.681 W/kg; SAR(10 g) = 0.403 W/kg

Smallest distance from peaks to all points 3 dB below = 17 mm

Ratio of SAR at M2 to SAR at M1 = 57.1%

Maximum value of SAR (measured) = 0.996 W/kg

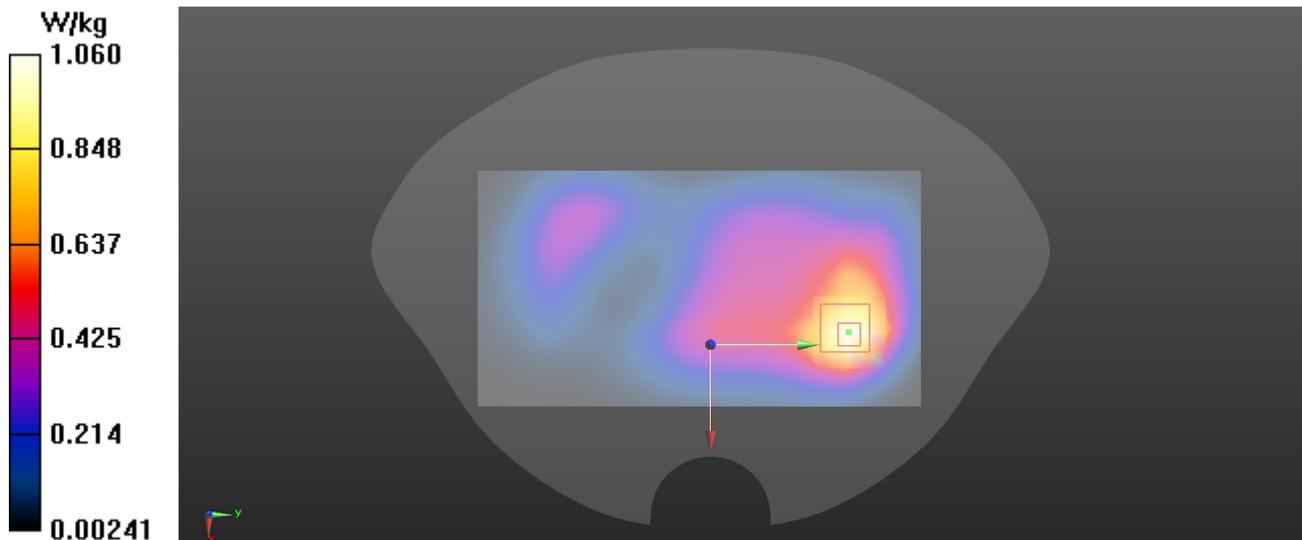

LTE Band 5 10M QPSK 1RB0 CH20600 Back side 10mm**DUT: WS708**

Communication System: UID 0, LTE-FDD BW 10MHZ (0); Frequency: 844 MHz; Duty Cycle: 1:1
Medium: H835 Medium parameters used: $f = 844$ MHz; $\sigma = 0.918$ S/m; $\epsilon_r = 42.177$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(9.12, 9.72, 9.05) @ 844 MHz; Calibrated: 2024/11/12
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2024/10/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x131x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.455 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 16.92 V/m; Power Drift = -0.15 dB


Peak SAR (extrapolated) = 0.603 W/kg

SAR(1 g) = 0.329 W/kg; SAR(10 g) = 0.190 W/kg

Smallest distance from peaks to all points 3 dB below = 16.7 mm

Ratio of SAR at M2 to SAR at M1 = 55.8%

Maximum value of SAR (measured) = 0.476 W/kg

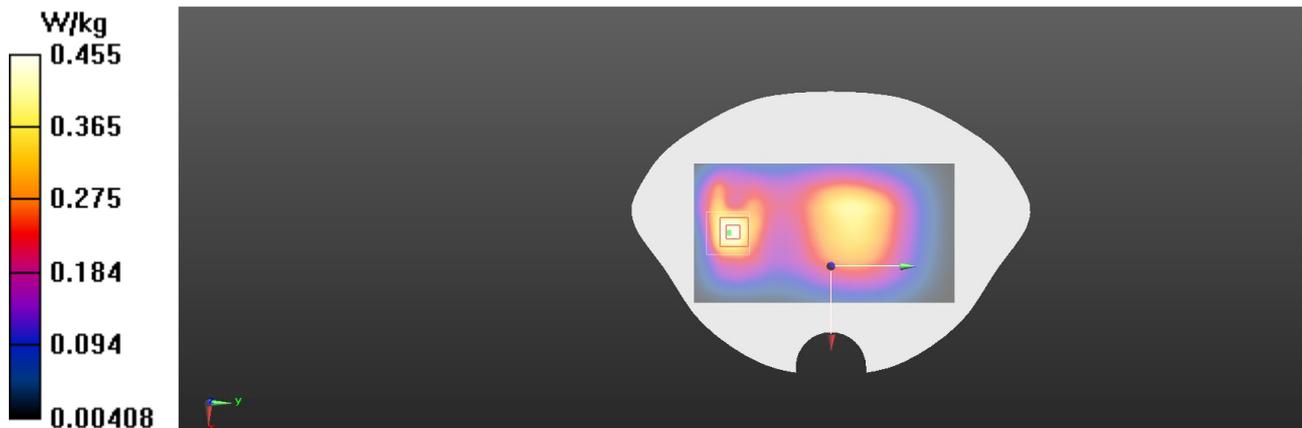

LTE Band 7 20M QPSK 1RB49 CH21350 Rear Face 10mm**DUT: WS708**

Communication System: UID 0, LTE-FDD BW 20MHz (0); Frequency: 2560 MHz; Duty Cycle: 1:1
Medium: H2600 Medium parameters used: $f = 2560$ MHz; $\sigma = 1.912$ S/m; $\epsilon_r = 40.189$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(6.7, 7.14, 6.64) @ 2560 MHz; Calibrated: 2024/11/12
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2024/10/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (91x171x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.995 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 8.322 V/m; Power Drift = -0.11 dB


Peak SAR (extrapolated) = 1.31 W/kg

SAR(1 g) = 0.625 W/kg; SAR(10 g) = 0.303 W/kg

Smallest distance from peaks to all points 3 dB below = 8.1 mm

Ratio of SAR at M2 to SAR at M1 = 48.2%

Maximum value of SAR (measured) = 1.05 W/kg

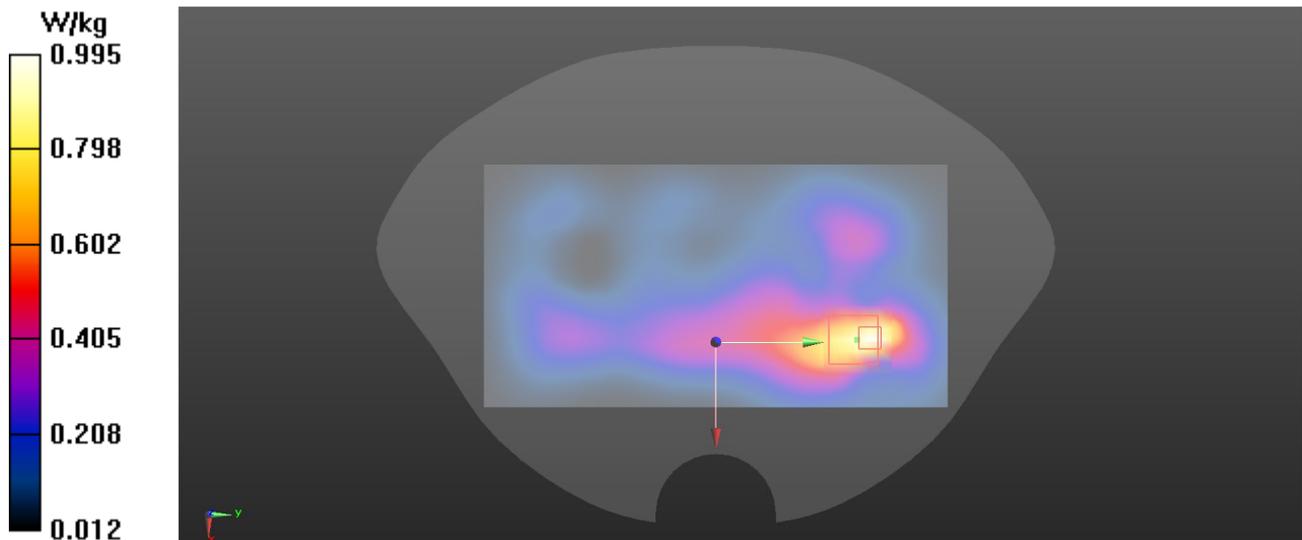

LTE Band 38 20M QPSK 1RB49 CH38000 Rear Face 10mm**DUT: WS708**

Communication System: UID 0, LTE-TDD BW 20MHz (0); Frequency: 2595 MHz; Duty Cycle: 1:1.59
Medium: H2600 Medium parameters used: $f = 2595$ MHz; $\sigma = 1.949$ S/m; $\epsilon_r = 40.089$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(6.7, 7.14, 6.64) @ 2595 MHz; Calibrated: 2024/11/12
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2024/10/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (91x171x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.614 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.604 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 0.781 W/kg

SAR(1 g) = 0.371 W/kg; SAR(10 g) = 0.179 W/kg

Smallest distance from peaks to all points 3 dB below = 8.9 mm

Ratio of SAR at M2 to SAR at M1 = 48.3%

Maximum value of SAR (measured) = 0.627 W/kg

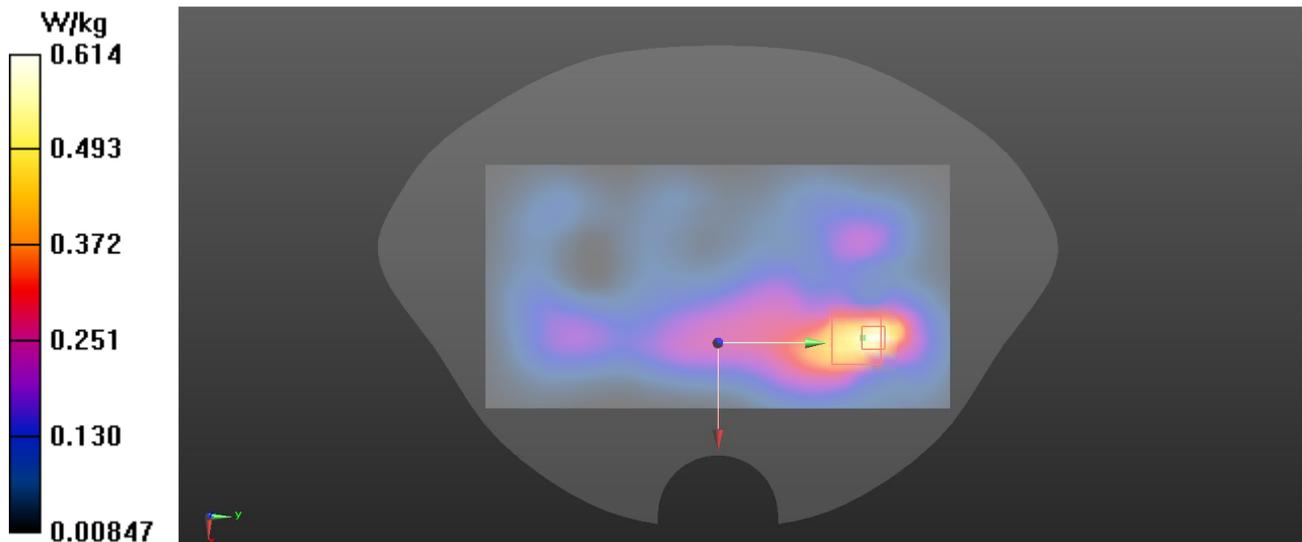

WLAN2.4G 802.11b CH1 Rear Face 10mm

DUT: WS708

Communication System: UID 0, WI-FI(2.4GHz) (0); Frequency: 2412 MHz;Duty Cycle: 1:1.005
Medium: H2450 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.75$ S/m; $\epsilon_r = 40.51$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(6.78, 7.22, 6.73) @ 2412 MHz; Calibrated: 2024/11/12
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2024/10/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (91x171x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm

Maximum value of SAR (interpolated) = 0.124 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.451 V/m; Power Drift = 0.14 dB

Peak SAR (extrapolated) = 0.0940 W/kg

SAR(1 g) = 0.047 W/kg; SAR(10 g) = 0.024 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid (> 15 mm)

Ratio of SAR at M2 to SAR at M1 = 51.1%

Maximum value of SAR (measured) = 0.0756 W/kg

