



REPORT No.: SZ24100314S01

# TEST REPORT

**APPLICANT** : BLU Products, Inc.

**PRODUCT NAME** : Smart Phone

**MODEL NAME** : K20

**BRAND NAME** : BOLD

**FCC ID** : YHLBLU20KSP

**STANDARD(S)** : FCC 47 CFR Part 2 (2.1093)  
IEEE 1528-2013

**RECEIPT DATE** : 2024-11-13

**TEST DATE** : 2024-11-15 to 2024-12-05

**ISSUE DATE** : 2024-12-23



Edited by:

Pang Siyu  
Pang Siyu (Rapporteur)

Approved by:

Gan Yueming  
Gan Yueming (Supervisor)

**NOTE:** This document is issued by Shenzhen Morlab Communications Technology Co., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.





## DIRECTORY

|                                                   |    |
|---------------------------------------------------|----|
| 1. SAR Results Summary.....                       | 5  |
| 2. Technical Information.....                     | 6  |
| 2.1. Applicant and Manufacturer Information.....  | 6  |
| 2.2. Equipment under Test (EUT) Description ..... | 6  |
| 2.3. Environment of Test Site/Conditions .....    | 8  |
| 3. Specific Absorption Rate (SAR).....            | 9  |
| 3.1. Introduction.....                            | 9  |
| 3.2. SAR Definition .....                         | 9  |
| 4. RF Exposure Limits .....                       | 10 |
| 4.1. Uncontrolled Environment.....                | 10 |
| 4.2. Controlled Environment.....                  | 10 |
| 5. Applied Reference Documents .....              | 11 |
| 6. SAR Measurement System .....                   | 12 |
| 6.1. E-Field Probe .....                          | 13 |
| 6.2. Data Acquisition Electronics (DAE).....      | 14 |
| 6.3. Robot .....                                  | 14 |
| 6.4. Measurement Server.....                      | 15 |
| 6.5. Light Beam Unit.....                         | 15 |
| 6.6. Phantom .....                                | 15 |
| 6.7. Device Holder .....                          | 16 |
| 6.8. Data Storage and Evaluation.....             | 17 |
| 6.9. Test Equipment List .....                    | 19 |
| 7. Tissue Simulating Liquids .....                | 21 |
| 8. SAR System Verification .....                  | 23 |
| 8.1. Purpose of System Performance Check.....     | 23 |
| 8.2. System Setup.....                            | 23 |



|                                                                     |    |
|---------------------------------------------------------------------|----|
| 8.3. Validation Results .....                                       | 24 |
| 9. EUT Testing Position .....                                       | 27 |
| 9.1. Handset Reference Points .....                                 | 27 |
| 9.2. Positioning for Cheek / Touch .....                            | 28 |
| 9.3. Positioning for Ear / 15° Tilt .....                           | 28 |
| 9.4. SAR Evaluation near the Mouth/Jaw Regions of the Phantom ..... | 29 |
| 9.5. Body-worn Configurations .....                                 | 29 |
| 9.6. Hotspot Mode Exposure Position Conditions .....                | 30 |
| 10. Measurement Procedures .....                                    | 31 |
| 10.1. Spatial Peak SAR Evaluation .....                             | 31 |
| 10.2. Power Reference Measurement .....                             | 32 |
| 10.3. Area Scan Procedures .....                                    | 32 |
| 10.4. Zoom Scan Procedures .....                                    | 32 |
| 10.5. SAR Averaged Methods .....                                    | 33 |
| 10.6. Power Drift Monitoring .....                                  | 33 |
| 11. SAR Test Procedure .....                                        | 34 |
| 11.1. General Scan Requirements .....                               | 34 |
| 11.2. Test Procedure .....                                          | 35 |
| 11.3. Description of Interpolation/Extrapolation Scheme .....       | 35 |
| 11.4. Wireless Router .....                                         | 35 |
| 12. SAR Test Configuration .....                                    | 37 |
| 13. Conducted Power List .....                                      | 47 |
| 14. Hotspot Mode Evaluation Procedure .....                         | 47 |
| 15. Block Diagram of the Tests to be Performed .....                | 48 |
| 15.1. Head .....                                                    | 48 |
| 15.2. Body .....                                                    | 49 |
| 16. Test Results List .....                                         | 50 |
| 16.1. Test Guidance .....                                           | 50 |



|                                                            |           |
|------------------------------------------------------------|-----------|
| <b>16.2. Head SAR Data .....</b>                           | <b>52</b> |
| <b>16.3. Hotspot SAR Data .....</b>                        | <b>57</b> |
| <b>16.4. Body-worn SAR Data .....</b>                      | <b>61</b> |
| <b>16.5. Repeated SAR Assessment .....</b>                 | <b>64</b> |
| <b>16.6. Extremity SAR Assessment .....</b>                | <b>65</b> |
| <b>17. Simultaneous Transmission Evaluation .....</b>      | <b>66</b> |
| <b>17.1. Simultaneous Transmission Consideration .....</b> | <b>66</b> |
| <b>17.2. Simultaneous Transmission Analysis .....</b>      | <b>67</b> |
| <b>18. Uncertainty Assessment .....</b>                    | <b>75</b> |
| <b>Annex A General Information .....</b>                   | <b>76</b> |
| <b>Annex B Test Setup Photos</b>                           |           |
| <b>Annex C Plots of System Performance Check</b>           |           |
| <b>Annex D Plots of Maximum SAR Test Results</b>           |           |
| <b>Annex E Conducted Power</b>                             |           |
| <b>Annex F DASY Calibration Certificate</b>                |           |

| Changed History |            |                   |
|-----------------|------------|-------------------|
| Version         | Date       | Reason for Change |
| 1.0             | 2024-12-23 | First edition     |
|                 |            |                   |



# 1. SAR Results Summary

The maximum results of Specific Absorption Rate (SAR) found during test as bellows:

<Highest Reported SAR Summary>

| Frequency Band |                | Highest SAR Summary |                         |                       |                        |
|----------------|----------------|---------------------|-------------------------|-----------------------|------------------------|
|                |                | Head<br>(Gap 0mm)   | Body-worn<br>(Gap 15mm) | Hotspot<br>(Gap 10mm) | Extremity<br>(Gap 0mm) |
|                |                | 1g SAR (W/kg)       |                         |                       | 10g SAR<br>(W/kg)      |
| GSM            | GSM850         | 0.247               | 0.296                   | 0.35                  | N/A                    |
|                | GSM1900        | 0.429               | 0.429                   | 0.448                 | N/A                    |
| WCDMA          | WCDMA II       | 0.601               | 0.322                   | 0.397                 | N/A                    |
|                | WCDMA IV       | 0.589               | 0.202                   | 0.312                 | N/A                    |
|                | WCDMA V        | 0.237               | 0.244                   | 0.285                 | N/A                    |
| LTE            | LTE Band 2     | 0.737               | 0.438                   | 0.563                 | N/A                    |
|                | LTE Band 5     | 0.267               | 0.204                   | 0.328                 | N/A                    |
|                | LTE Band 7     | 0.596               | 1.007                   | 0.874                 | 3.763                  |
|                | LTE Band 12/17 | 0.262               | 0.419                   | 0.49                  | N/A                    |
|                | LTE Band 13    | 0.269               | 0.31                    | 0.344                 | N/A                    |
|                | LTE Band 38    | 0.792               | 0.602                   | 0.696                 | N/A                    |
|                | LTE Band 40    | 0.573               | 0.553                   | 0.75                  | N/A                    |
|                | LTE Band 66/4  | 0.537               | 0.483                   | 0.753                 | N/A                    |
| WLAN           | 2.4GHz WLAN    | 0.656               | 0.085                   | 0.189                 | N/A                    |
|                | 5GHz WLAN      | 0.852               | 0.347                   | 0.66                  | 0.733                  |
| 2.4GHz Band    | Bluetooth      | N/A                 | 0.047                   | 0.106                 | N/A                    |

|                                                                |       |                   |
|----------------------------------------------------------------|-------|-------------------|
| Highest Simultaneous Transmission<br>SAR <sub>1g</sub> (W/Kg): | 1.515 | Limit (W/kg): 1.6 |
|----------------------------------------------------------------|-------|-------------------|

## Note:

1. This device is in compliance with Specific Absorption Rate (SAR) for general population or uncontrolled exposure limits (1.6W/kg as averaged over any 1 gram of tissue; specified in FCC 47 CFR part 1 (1.1310) and ANSI/IEEE C95.1-1992), and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.
2. For FDD-LTE Band 4/17 is full covered by FDD-LTE Band 66/12, therefore only FDD-LTE Band 66/12 was tested.
3. When the test result is a critical value, we will use the measurement uncertainty give the judgment result based on the 95% confidence intervals.



## 2. Technical Information

**Note:** Provide by applicant.

### 2.1. Applicant and Manufacturer Information

|                              |                                                      |
|------------------------------|------------------------------------------------------|
| <b>Applicant:</b>            | BLU Products, Inc.                                   |
| <b>Applicant Address:</b>    | 8600 NW 36th Street, Suite #300 Miami, FL 33166, USA |
| <b>Manufacturer:</b>         | BLU Products, Inc.                                   |
| <b>Manufacturer Address:</b> | 8600 NW 36th Street, Suite #300 Miami, FL 33166, USA |

### 2.2. Equipment under Test (EUT) Description

|                          |                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
|--------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <b>Product Name:</b>     | Smart Phone                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                        |
| <b>EUT No.:</b>          | 2#, 3#                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             |
| <b>Hardware Version:</b> | SPR_S60680_V1.0                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                    |
| <b>Software Version:</b> | BOLD_K0170_V14.0.01.01_GENERIC_20241107                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                            |
| <b>Frequency Bands:</b>  | GSM 850: 824 MHz ~ 849 MHz<br>GSM 1900: 1850 MHz ~ 1910 MHz<br>WCDMA II: 1850 MHz ~ 1910 MHz<br>WCDMA IV: 1710 MHz ~ 1755 MHz<br>WCDMA V: 824 MHz ~ 849 MHz<br>LTE Band 2: 1850 MHz ~ 1910 MHz<br>LTE Band 4: 1710 MHz ~ 1755 MHz<br>LTE Band 5: 824 MHz ~ 849 MHz<br>LTE Band 7: 2500 MHz ~ 2570 MHz<br>LTE Band 12: 699 MHz ~ 716 MHz<br>LTE Band 13: 777 MHz ~ 787 MHz<br>LTE Band 17: 704 MHz ~ 716 MHz<br>LTE Band 38: 2570 MHz ~ 2620 MHz<br>LTE Band 40: 2305 MHz ~ 2315 MHz, 2350 MHz ~ 2360 MHz<br>LTE Band 66: 1710 MHz ~ 1780 MHz<br>WLAN 2.4GHz: 2412 MHz ~ 2462 MHz<br>WLAN 5.2GHz: 5180 MHz ~ 5240 MHz<br>WLAN 5.3GHz: 5260 MHz ~ 5320 MHz<br>WLAN 5.5GHz: 5500 MHz ~ 5700 MHz<br>WLAN 5.8GHz: 5745 MHz ~ 5825 MHz<br>Bluetooth: 2402 MHz ~ 2480 MHz |
| <b>Modulation Mode:</b>  | GSM/GPRS: GMSK<br>EDGE: 8PSK                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                       |



|                               |                                                                                                                                                                                                                         |               |
|-------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|
|                               | WCDMA: QPSK, 16QAM<br>LTE: QPSK, 16QAM, 64QAM<br>802.11b: DSSS<br>802.11g/n-HT20/40: OFDM<br>802.11a/ac-VHT20/40/80: OFDM<br>BR+EDR: GFSK (1Mbps), $\pi/4$ -DQPSK (2Mbps), 8-DPSK (3Mbps)<br>Bluetooth LE: GFSK (1Mbps) |               |
| <b>Multi-slot Class:</b>      | GPRS: Multi-slot Class 12<br>EDGE: Multi-slot Class 12                                                                                                                                                                  |               |
| <b>Operation Class:</b>       | Class B                                                                                                                                                                                                                 |               |
| <b>VoLTE Mode:</b>            | Support                                                                                                                                                                                                                 |               |
| <b>VoWIFI Mode:</b>           | Support                                                                                                                                                                                                                 |               |
| <b>Hotspot Mode:</b>          | Support (WLN 5G for B1 & B4)                                                                                                                                                                                            |               |
| <b>Antenna Type:</b>          | WWAN: PIFA Antenna<br>WLAN: PIFA Antenna<br>Bluetooth: PIFA Antenna                                                                                                                                                     |               |
| <b>SIM Cards Description:</b> | SIM 1                                                                                                                                                                                                                   | GSM+WCDMA+LTE |
|                               | SIM 2                                                                                                                                                                                                                   | GSM+WCDMA+LTE |

**Note:** For more detailed description, please refer to specification or user manual supplied by the applicant and/or manufacturer.



## 2.3. Environment of Test Site/Conditions

|                          |          |
|--------------------------|----------|
| Normal Temperature (NT): | 20-25 °C |
| Relative Humidity:       | 30-75 %  |

During SAR test, EUT is in Traffic Mode (Channel Allocated) at Normal Voltage Condition. A communication link is set up with a System Simulator (SS) by air link, and a call is established.

The EUT shall use its internal transmitter. The antenna(s), battery and accessories shall be those specified by the Factory. The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power output. If a wireless link is used, the antenna connected to the output of the base station simulator shall be placed at least 50 cm away from the handset.

The signal transmitted by the simulator to the antenna feeding point shall be lower than the output power level of the handset by at least 35 dB.

## 3. Specific Absorption Rate (SAR)

### 3.1. Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational or controlled and general population or uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational or controlled exposure limits are Middle than the limits for general population or uncontrolled.

### 3.2. SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by(dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density. (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg).

SAR measurement can be either related to the temperature elevation in tissue by,

$$SAR = C \left( \frac{\delta T}{\delta t} \right)$$

Where C is the specific head capacity, δT is the temperature rise and δt the exposure duration, or related to the electrical field in the tissue by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where σ is the conductivity of the tissue, ρ is the mass density of the tissue and |E| is the rmselectrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.



## 4. RF Exposure Limits

### 4.1. Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

### 4.2. Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

**Limits for General Population/Uncontrolled Exposure (W/kg)**

| Type Exposure                                        | Uncontrolled Environment Limit |
|------------------------------------------------------|--------------------------------|
| Spatial Peak SAR (1g cube tissue for head and trunk) | 1.6 W/kg                       |
| Spatial Peak SAR (10g cube tissue for limbs)         | 4.0 W/kg                       |
| Spatial Peak SAR (1g cube tissue for whole body)     | 0.08 W/kg                      |

**Note:**

1. Occupational/Uncontrolled Environments are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure (i.e. as a result of employment or occupation).
2. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.




## 5. Applied Reference Documents

Leading reference documents for testing:

| Identity                                                                                                                                                                                                                              | Document Title                                                                                                                                                                   | Method Determination /Remark |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------|
| FCC 47 CFR Part 2 (2.1093)                                                                                                                                                                                                            | Radio Frequency Radiation Exposure Evaluation: Portable Devices                                                                                                                  | No deviation                 |
| IEEE 1528-2013                                                                                                                                                                                                                        | IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques | No deviation                 |
| KDB 447498 D01v06                                                                                                                                                                                                                     | General RF Exposure Guidance                                                                                                                                                     | No deviation                 |
| KDB 248227 D01v02r02                                                                                                                                                                                                                  | SAR Measurement Procedures for 802.11 Transmitters                                                                                                                               | No deviation                 |
| KDB 865664 D01v01r04                                                                                                                                                                                                                  | SAR Measurement 100 MHz to 6 GHz                                                                                                                                                 | No deviation                 |
| KDB 865664 D02v01r02                                                                                                                                                                                                                  | RF Exposure Reporting                                                                                                                                                            | No deviation                 |
| KDB 648474 D04v01r03                                                                                                                                                                                                                  | Handset SAR                                                                                                                                                                      | No deviation                 |
| KDB 941225 D01v03r01                                                                                                                                                                                                                  | 3G SAR MEAUREMENT PROCEDURES                                                                                                                                                     | No deviation                 |
| KDB 941225 D05v02r05                                                                                                                                                                                                                  | SAR Evaluation Consideration for LTE Devices                                                                                                                                     | No deviation                 |
| KDB 941225 D06v02r01                                                                                                                                                                                                                  | SAR Evaluation Procedures For Portable Devices With Wireless Router Capabilities                                                                                                 | No deviation                 |
| <b>Note 1:</b> Additions to, deviation, or exclusions from the method shall be judged in the "method determination" column of add, deviate or exclude from the specific method shall be explained in the "Remark" of the above table. |                                                                                                                                                                                  |                              |

## 6. SAR Measurement System

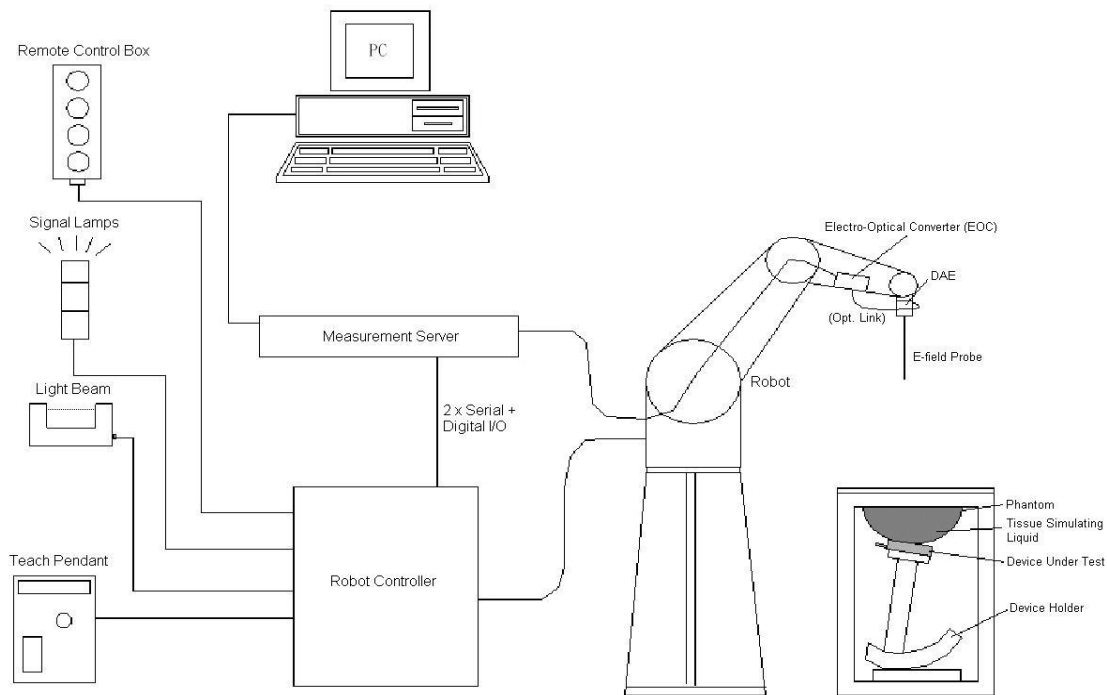

**Fig 6.1 SPEAG DASY System Configurations**

The DASY system for performance compliance tests is illustrated above graphically. This system consists of the following items:

- A standard high precision 6-axis robot with controller, a teach pendant and software.
- A data acquisition electronic (DAE) attached to the robot arm extension.
- A dosimetric probe equipped with an optical surface detector system.
- The electro-optical converter (ECO) performs the conversion between optical and electrical signals
- A measurement server performs the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the accuracy of the probe positioning.
- A computer operating Windows XP.
- DASY software.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom.
- A device holder.
- Tissue simulating liquid.
- Dipole for evaluating the proper functioning of the system.
- Some of the components are described in details in the following sub-sections.

## 6.1. E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

### ➤ E-Field Probe Specification

#### <ES3DV3 Probe>

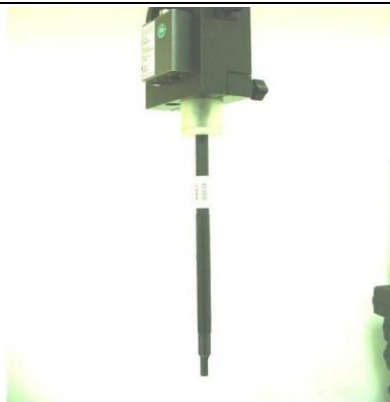
|                      |                                                                                                                                                                                                                   |                                                                                      |
|----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
| <b>Construction</b>  | Symmetrical design with triangular core<br>Built-in optical fiber for surface detection system.<br>Built-in shielding against static charges. PEEK enclosure material (resistant to organic solvents, e.g., DGBE) |  |
| <b>Frequency</b>     | 10 MHz to 3 GHz; Linearity: $\pm 0.2$ dB                                                                                                                                                                          |                                                                                      |
| <b>Directivity</b>   | $\pm 0.2$ dB in HSL (rotation around probe axis)<br>$\pm 0.4$ dB in HSL (rotation normal to probe axis)                                                                                                           |                                                                                      |
| <b>Dynamic Range</b> | 5 $\mu$ W/g to 100 mW/g; Linearity: $\pm 0.2$ dB                                                                                                                                                                  |                                                                                      |
| <b>Dimensions</b>    | Overall length: 330 mm (Tip: 16 mm)<br>Tip diameter: 6.8 mm (Body: 12 mm)<br>Distance from probe tip to dipole centers: 2.7 mm                                                                                    |                                                                                      |

Fig 6.2 Photo of ES3DV3

#### <EX3DV4 Probe>

|                      |                                                                                                                                                             |                                                                                       |
|----------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------|
| <b>Construction</b>  | Symmetrical design with triangular core<br>Built-in shielding against static charges<br>PEEK enclosure material (resistant to organic solvents, e.g., DGBE) |  |
| <b>Frequency</b>     | 10 MHz to 6 GHz; Linearity: $\pm 0.2$ dB                                                                                                                    |                                                                                       |
| <b>Directivity</b>   | $\pm 0.3$ dB in HSL (rotation around probe axis)<br>$\pm 0.5$ dB in tissue material (rotation normal to probe axis)                                         |                                                                                       |
| <b>Dynamic Range</b> | 10 $\mu$ W/g to 100 mW/g; Linearity: $\pm 0.2$ dB                                                                                                           |                                                                                       |
| <b>Dimensions</b>    | Overall length: 330 mm (Tip: 20 mm)<br>Tip diameter: 2.5 mm (Body: 12 mm)<br>Typical distance from probe tip to dipole centers: 1 mm                        |                                                                                       |

Fig 6.3 Photo of EX3DV4

### ➤ E-Field Probe Calibration

Each probe needs to be calibrated according to a dosimetric assessment procedure with accuracy better than  $\pm 10\%$ . The spherical isotropy shall be evaluated and within  $\pm 0.25$  dB. The sensitivity parameters (NormX, NormY, and NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested. The calibration data can be referred to appendix C of this report.

## 6.2. Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock. The input impedance of the DAE is 200M $\Omega$ ; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Fig 6.4 Photo of DAE

## 6.3. Robot

The SPEAG DASY system uses the high precision robots (DASY4: RX90BL; DASY5: TX90XL) type from Stäubli SA (France). For the 6-axis controller system, the robot controller version (DASY4: CS7MB; DASY5: CS8c) from Stäubli is used. The Stäubli robot series have many features that are important for our application:

High precision (repeatability  $\pm 0.035$  mm)

High reliability (industrial design)

Jerk-free straight movements

Low ELF interference (the closed metallic construction shields against motor control fields)



Fig 6.5 Photo of DASY5

## 6.4. Measurement Server

The measurement server is based on a PC/104 CPU board with CPU (DASY4: 166 MHz, Intel Pentium; DASY5: 400 MHz, Intel Celeron), chip disk (DASY4: 32 MB; DASY5: 128 MB), RAM (DASY4: 64 MB, DASY5: 128 MB). The necessary circuits for communication with the DAE electronic box, as well as the 16 bits AD converter system for optical detection and digital I/O interface are contained on the DASY I/O board, which is directly connected to the PC/104 bus of the CPU board. The measurement server performs all the real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operations.



Fig 6.6 Photo of Server for DASY5

## 6.5. Light Beam Unit

The light beam switch allows automatic "tooling" of the probe. During the process, the actual position of the probe tip with respect to the robot arm is measured, as well as the probe length and the horizontal probe offset. The software then corrects all movements, such that the robot coordinates are valid for the probe tip.

The repeatability of this process is better than 0.1 mm. If a position has been taught with an aligned probe, the same position will be reached with another aligned probe within 0.1 mm, even if the other probe has different dimensions. During probe rotations, the probe tip will keep its actual position.



Fig. 6.7 Photo of Light Beam

## 6.6. Phantom

### <SAM Twin Phantom>

|                   |                                                            |
|-------------------|------------------------------------------------------------|
| Shell Thickness   | 2 ± 0.2 mm (sagging: <1%)<br>Center ear point: 6 ± 0.2 mm  |
| Filling Volume    | Approx. 25 liters                                          |
| Dimensions        | Length: 1000 mm; Width: 500 mm;<br>Height: adjustable feet |
| Measurement Areas | Left Head, Right Head, Flat Phantom                        |



Fig. 6.8 Photo of SAM Phantom

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

## 6.7. Device Holder

### <Device Holder for SAM Twin Phantom>

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5 mm distance, a positioning uncertainty of  $\pm 0.5$  mm would produce a SAR uncertainty of  $\pm 20$  %. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.

The DASY device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation center for both scales is the ear reference point (EPR). Thus the device needs no repositioning when changing the angles.

The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity  $\epsilon = 3$  and loss tangent  $\delta = 0.02$ . The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.

### <Laptop Extension Kit>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Fig 6.9 Device Holder

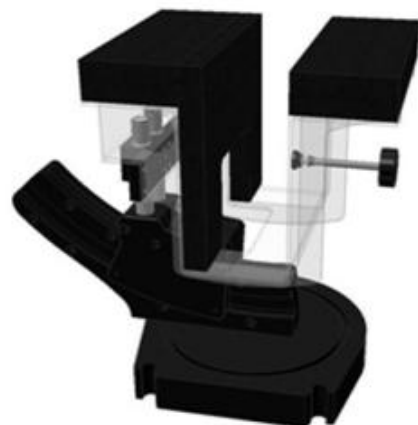


Fig 6.10 Laptop Extension Kit

## 6.8. Data Storage and Evaluation

### ➤ Data Storage

The DASY software stores the assessed data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all the necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files. The post-processing software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of erroneous parameter settings. For example, if a measurement has been performed with an incorrect crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be reevaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type (e.g., [V/m], [A/m], [Mw/g]). Some of these units are not available in certain situations or give meaningless results, e.g., a SAR-output in a non-lose media, will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

### ➤ Data Evaluation

The DASY post-processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software.

|                           |                           |                                         |
|---------------------------|---------------------------|-----------------------------------------|
| <b>Probe parameters:</b>  | - Sensitivity             | $\text{Norm}_i, a_{i0}, a_{i1}, a_{i2}$ |
|                           | - Conversion factor       | $\text{ConvF}_i$                        |
|                           | - Diode compression point | dcpi                                    |
| <b>Device parameters:</b> | - Frequency               | f                                       |
|                           | - Crest factor            | cf                                      |
| <b>Media parameters:</b>  | - Conductivity            | $\sigma$                                |
|                           | - Density                 | $\rho$                                  |

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multi-meter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the



exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power.

The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \times \frac{cf}{dcp_i}$$

With  $V_i$  = compensated signal of channel I, (I = x, y, z)  
 $U_i$  = input signal of channel I, (I = x, y, z)  
 $cf$  = crest factor of exciting field (DASY parameter)  
 $dcp_i$  = diode compression point (DASY parameter)

From the compensated input signals, the primary field data for each channel can be evaluated:

$$\text{E-field Probes: } E_i = \sqrt{\frac{V_i}{\text{Norm}_i \times \text{ConvF}}}$$

$$\text{H-field Probes: } H_i = \sqrt{V_i} \times \frac{a_{i0} + a_{i1} + a_{i2} f^2}{f}$$

With  $V_i$  = compensated signal of channel I, (I = x, y, z)  
 $\text{Norm}_i$  = sensor sensitivity of channel I, (I = x, y, z),  $\text{Mv}/(\text{V/m})^2$  for E-field  
 $\text{Probes ConvF}$  = sensitivity enhancement in solution  
 $a_{ij}$  = sensor sensitivity factors for H-field probes  
 $f$  = carrier frequency [GHz]  
 $E_i$  = electric field strength of channel I in V/m  
 $H_i$  = magnetic field strength of channel I in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{\text{tot}} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$\text{SAR} = E_{\text{tot}}^2 \times \frac{\sigma}{\rho \times 1000}$$

with SAR = local specific absorption rate in mW/g

$E_{\text{tot}}$  = total field strength in V/m

$\sigma$  = conductivity in [mho/m] or [Siemens/m]

$\rho$  = equivalent tissue density in  $\text{g}/\text{cm}^3$

Note that the density is set to 1, to account for actual head tissue density rather than the density of the tissue simulating liquid.



## 6.9. Test Equipment List

| Manufacturer  | Name of Equipment                        | Type/Model      | Serial No./<br>SW Version | Calibration |            |
|---------------|------------------------------------------|-----------------|---------------------------|-------------|------------|
|               |                                          |                 |                           | Last Cal.   | Due Date   |
| SPEAG         | 750MHz System Validation Kit             | D750V3          | 1223                      | 2022.08.22  | 2025.08.21 |
| SPEAG         | 900MHz System Validation Kit             | D900V2          | 1d064                     | 2024.10.21  | 2027.10.20 |
| SPEAG         | 1800MHz System Validation Kit            | D1800V2         | 2d158                     | 2024.10.21  | 2027.10.20 |
| SPEAG         | 2300MHz System Validation Kit            | D2300V2         | 1107                      | 2024.10.21  | 2027.10.20 |
| SPEAG         | 2450MHz System Validation Kit            | D2450V2         | 805                       | 2024.10.22  | 2027.10.21 |
| SPEAG         | 2600MHz System Validation Kit            | D2600V2         | 1198                      | 2024.10.23  | 2027.10.22 |
| SPEAG         | 5000MHz System Validation Kit            | D5GHzV2         | 1176                      | 2024.10.22  | 2027.10.21 |
| SPEAG         | DOSIMETRIC ASSESSMENT<br>SYSTEM Software | DASY52          | 52.10.4.1527              | NCR         | NCR        |
| SPEAG         | Dosimetric E-Field Probe                 | EX3DV4          | 7608                      | 2024.03.21  | 2025.03.20 |
| SPEAG         | Data Acquisition Electronics             | DAE4            | 1643                      | 2024.03.27  | 2025.03.26 |
| SPEAG         | SAM 1                                    | QD000P40CD      | 1811                      | NCR         | NCR        |
| SPEAG         | Phone Positioner                         | N/A             | N/A                       | NCR         | NCR        |
| R&S           | Network Emulator                         | CMW500          | 165755                    | 2024.01.25  | 2025.01.24 |
| Anritsu       | Network Emulator                         | MT8820C         | 6201274521                | 2024.01.25  | 2025.01.24 |
| Agilent       | Network Analyzer                         | E5071B          | MY42404762                | 2024.01.25  | 2025.01.24 |
| SPEAG         | Dielectric Assessment KIT                | DAK-3.5         | 1279                      | 2024.03.18  | 2025.03.17 |
| mini-circuits | Amplifier                                | ZHL-42W+        | 608501717                 | NCR         | NCR        |
| mini-circuits | Amplifier                                | ZVE-8G+         | 754401735                 | NCR         | NCR        |
| Agilent       | Signal Generator                         | N5182B          | MY53050509                | 2024.09.11  | 2025.09.10 |
| R&S           | Power Sensor                             | NRP8S           | 103215                    | 2024.01.25  | 2025.01.24 |
| Agilent       | Power Meter                              | E4416A          | MY45102093                | 2024.09.11  | 2025.09.10 |
| R&S           | Power Sensor                             | NRP8S           | 103240                    | 2024.01.25  | 2025.01.24 |
| Anritsu       | Power Meter                              | E4418B          | GB43318055                | 2024.05.30  | 2025.05.29 |
| Agilent       | Dual Directional Coupler                 | 778D            | 50422                     | NA          | NA         |
| MCL           | Attenuation                              | 351-218-010     | N/A                       | NA          | NA         |
| R&S           | Spectrum Analyzer                        | N9030A          | MY54170556                | 2024.09.18  | 2025.09.17 |
| KTJ           | Thermo meter                             | TA298           | N/A                       | 2024.11.20  | 2025.11.19 |
| SPEAG         | Tissue Simulating Liquids                | HBBL600-10000V6 | 24H                       |             |            |

**Note:**

1. The calibration certificate of DASY can be referred to appendix F of this report.
2. The Insertion Loss calibration of Dual Directional Coupler and Attenuator were characterized via



the network analyzer and compensated during system check.

3. The dielectric probe kit was calibrated via the network analyzer, with the specified procedure (calibrated in pure water) and calibration kit (standard) short circuit, before the dielectric measurement. The specific procedure and calibration kit are provided by Speag.
4. In system check we need to monitor the level on the power meter, and adjust the power amplifier level to have precise power level to the dipole; the measured SAR will be normalized to 1W input power according to the ratio of 1W to the input power to the dipole. For system check, the calibration of the power amplifier is deemed not critically required for correct measurement; the power meter is critical and we do have calibration for it.
5. Attenuator insertion loss is calibrated by the network Analyzer, which the calibration is valid, before system check.
6. N.C.R means No Calibration Requirement.

## 7. Tissue Simulating Liquids

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15cm. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15cm, which is shown in Fig. 7.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 7.2. The nominal dielectric values of the tissue simulating liquids in the phantom and the tolerance of 5% are listed in below table.

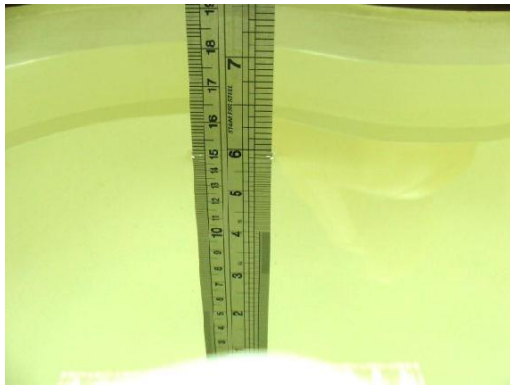


Fig 7.1 Photo of Liquid Height for Head SAR



Fig 7.2 Photo of Liquid Height for Body SAR

The following table gives the recipes for tissue simulating liquids

| Frequency (MHz) | Water (%) | Sugar (%) | Cellulose (%) | Salt (%) | Preventol (%) | DGBE (%) | Conductivity ( $\sigma$ ) | Permittivity ( $\epsilon_r$ ) |
|-----------------|-----------|-----------|---------------|----------|---------------|----------|---------------------------|-------------------------------|
| Head            |           |           |               |          |               |          |                           |                               |
| 750             | 41.1      | 57.0      | 0.2           | 1.4      | 0.2           | 0        | 0.89                      | 41.9                          |
| 835             | 40.3      | 57.9      | 0.2           | 1.4      | 0.2           | 0        | 0.90                      | 41.5                          |
| 1800,1900,2000  | 55.2      | 0         | 0             | 0.3      | 0             | 44.5     | 1.40                      | 40.0                          |
| 2450            | 55.0      | 0         | 0             | 0        | 0             | 45.0     | 1.80                      | 39.2                          |
| 2600            | 54.8      | 0         | 0             | 0.1      | 0             | 45.1     | 1.96                      | 39.0                          |
| Body            |           |           |               |          |               |          |                           |                               |
| 750             | 51.7      | 47.2      | 0             | 0.9      | 0.1           | 0        | 0.96                      | 55.5                          |
| 835             | 50.8      | 48.2      | 0             | 0.9      | 0.1           | 0        | 0.97                      | 55.2                          |
| 1800,1900,2000  | 70.2      | 0         | 0             | 0.4      | 0             | 29.4     | 1.52                      | 53.3                          |
| 2450            | 68.6      | 0         | 0             | 0        | 0             | 31.4     | 1.95                      | 52.7                          |
| 2600            | 68.1      | 0         | 0             | 0.1      | 0             | 31.8     | 2.16                      | 52.5                          |

Simulating Liquid for 5GHz, Manufactured by SPEAG.

| Ingredients        | (% by weight) |
|--------------------|---------------|
| Water              | 64~78%        |
| Mineral oil        | 11~18%        |
| Emulsifiers        | 9~15%         |
| Additives and Salt | 2~3%          |



**Note:** Please refer to the validation results for dielectric parameters of each frequency band. The dielectric properties of the tissue simulating liquids were verified prior to the SAR evaluation using a SPEAG Dielectric Assessment KIT and an Agilent Network Analyzer.

**Table 1: Dielectric Performance of Tissue Simulating Liquid**

| Frequency (MHz) | Tissue Type | Liquid Temp. (°C) | Conductivity ( $\sigma$ )     | Conductivity Target ( $\sigma$ )     | Delta ( $\sigma$ ) (%)     | Limit (%) | Date       |
|-----------------|-------------|-------------------|-------------------------------|--------------------------------------|----------------------------|-----------|------------|
| 750             | HSL         | 22.2              | 0.919                         | 0.89                                 | 3.26                       | ±5        | 2024/11/15 |
| 750             | HSL         | 22.3              | 0.905                         | 0.89                                 | 1.69                       | ±5        | 2024/11/16 |
| 900             | HSL         | 22.3              | 1.002                         | 0.97                                 | 3.30                       | ±5        | 2024/11/18 |
| 1800            | HSL         | 22.1              | 1.449                         | 1.40                                 | 3.50                       | ±5        | 2024/11/19 |
| 1800            | HSL         | 22.1              | 1.441                         | 1.40                                 | 2.93                       | ±5        | 2024/11/20 |
| 2300            | HSL         | 22.1              | 1.732                         | 1.67                                 | 3.71                       | ±5        | 2024/11/23 |
| 2450            | HSL         | 22.3              | 1.877                         | 1.80                                 | 4.28                       | ±5        | 2024/11/24 |
| 2600            | HSL         | 22.1              | 1.987                         | 1.96                                 | 1.38                       | ±5        | 2024/11/25 |
| 2600            | HSL         | 22.3              | 1.969                         | 1.96                                 | 0.46                       | ±5        | 2024/12/5  |
| 5250            | HSL         | 22.1              | 4.881                         | 4.71                                 | 3.63                       | ±5        | 2024/11/27 |
| 5600            | HSL         | 22.2              | 5.217                         | 5.07                                 | 2.90                       | ±5        | 2024/11/28 |
| 5750            | HSL         | 22.1              | 5.336                         | 5.22                                 | 2.22                       | ±5        | 2024/11/29 |
|                 |             |                   |                               |                                      |                            |           |            |
| Frequency (MHz) | Tissue Type | Liquid Temp. (°C) | Permittivity ( $\epsilon_r$ ) | Permittivity Target ( $\epsilon_r$ ) | Delta ( $\epsilon_r$ ) (%) | Limit (%) | Date       |
| 750             | HSL         | 22.2              | 42.916                        | 41.90                                | 2.42                       | ±5        | 2024/11/15 |
| 750             | HSL         | 22.3              | 42.937                        | 41.90                                | 2.47                       | ±5        | 2024/11/16 |
| 900             | HSL         | 22.3              | 42.706                        | 41.50                                | 2.91                       | ±5        | 2024/11/18 |
| 1800            | HSL         | 22.1              | 41.257                        | 40.00                                | 3.14                       | ±5        | 2024/11/19 |
| 1800            | HSL         | 22.1              | 40.953                        | 40.00                                | 2.38                       | ±5        | 2024/11/20 |
| 2300            | HSL         | 22.1              | 40.224                        | 39.50                                | 1.83                       | ±5        | 2024/11/23 |
| 2450            | HSL         | 22.3              | 39.315                        | 39.20                                | 0.29                       | ±5        | 2024/11/24 |
| 2600            | HSL         | 22.1              | 38.294                        | 39.00                                | -1.81                      | ±5        | 2024/11/25 |
| 2600            | HSL         | 22.3              | 38.735                        | 39.00                                | -0.68                      | ±5        | 2024/12/5  |
| 5250            | HSL         | 22.1              | 36.958                        | 35.95                                | 2.80                       | ±5        | 2024/11/27 |
| 5600            | HSL         | 22.2              | 35.115                        | 35.50                                | -1.08                      | ±5        | 2024/11/28 |
| 5750            | HSL         | 22.1              | 34.885                        | 35.35                                | -1.32                      | ±5        | 2024/11/29 |

## 8. SAR System Verification

Each DASY system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the DASY software, enable the user to conduct the system performance check and system validation. System validation kit includes a dipole, tripod holder to fix it underneath the flat phantom and a corresponding distance holder.

### 8.1. Purpose of System Performance Check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

### 8.2. System Setup

The output power on dipole port must be calibrated to 24 dBm (250 mW) before dipole is connected. In the simplified setup for system evaluation, the DUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave which comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The system check verifies that the system operates within its specifications. It is performed daily or before every SAR measurement. The system check uses normal SAR measurements in the flat section of the phantom with a matched dipole at a specified distance. The system verification setup is shown as below.



Fig 8.1 Photo of Dipole Setup

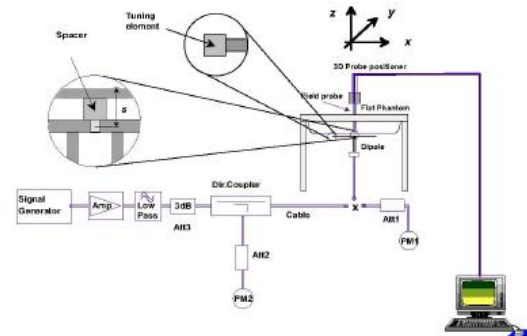


Fig 8.2 System Setup for System Evaluation



### 8.3. Validation Results

After system check testing, the SAR result will be normalized to 1W forward input power and compared with the reference SAR value derived from validation dipole certificate report. The deviation of system check should be within 10%.

#### <Validation Setup>

| Frequency (MHz) | Tissue Type | Input Power (mW) | Dipole S/N        | Probe S/N | DAE S/N |
|-----------------|-------------|------------------|-------------------|-----------|---------|
| 750             | HSL         | 250              | D750V3-1223       | 7608      | 1643    |
| 900             | HSL         | 250              | D900V2-1d064      | 7608      | 1643    |
| 900             | HSL         | 250              | D900V2-1d064      | 7608      | 1643    |
| 1800            | HSL         | 250              | D1800V2-2d158     | 7608      | 1643    |
| 2300            | HSL         | 250              | D2300V2-1107      | 7608      | 1643    |
| 2450            | HSL         | 250              | D2450V2-805       | 7608      | 1643    |
| 2600            | HSL         | 250              | D2600V2-1198      | 7608      | 1643    |
| 5250            | HSL         | 100              | D5GHzV2-1176-5250 | 7608      | 1643    |
| 5600            | HSL         | 100              | D5GHzV2-1176-5600 | 7608      | 1643    |
| 5750            | HSL         | 100              | D5GHzV2-1176-5750 | 7608      | 1643    |

#### <System Validation>

| Frequency (MHz) | Tissue Type | Conductivity ( $\sigma$ ) | Permittivity ( $\epsilon_r$ ) | CW Signal Validation |                 |                |
|-----------------|-------------|---------------------------|-------------------------------|----------------------|-----------------|----------------|
|                 |             |                           |                               | Sensitivity          | Probe Linearity | Probe Isotropy |
| 750             | HSL         | 0.851                     | 42.43                         | PASS                 | PASS            | PASS           |
| 835             | HSL         | 0.898                     | 41.88                         | PASS                 | PASS            | PASS           |
| 1750            | HSL         | 1.386                     | 39.91                         | PASS                 | PASS            | PASS           |
| 1800            | HSL         | 1.449                     | 41.26                         | PASS                 | PASS            | PASS           |
| 1900            | HSL         | 1.435                     | 39.65                         | PASS                 | PASS            | PASS           |
| 2000            | HSL         | 1.451                     | 39.42                         | PASS                 | PASS            | PASS           |
| 2300            | HSL         | 1.764                     | 38.99                         | PASS                 | PASS            | PASS           |
| 2450            | HSL         | 1.863                     | 38.85                         | PASS                 | PASS            | PASS           |
| 2600            | HSL         | 1.973                     | 38.58                         | PASS                 | PASS            | PASS           |
| 3400            | HSL         | 2.88                      | 38.10                         | PASS                 | PASS            | PASS           |
| 3500            | HSL         | 2.91                      | 37.90                         | PASS                 | PASS            | PASS           |
| 3700            | HSL         | 3.05                      | 37.70                         | PASS                 | PASS            | PASS           |
| 3900            | HSL         | 3.15                      | 37.50                         | PASS                 | PASS            | PASS           |
| 4100            | HSL         | 3.25                      | 37.20                         | PASS                 | PASS            | PASS           |
| 4200            | HSL         | 3.34                      | 37.00                         | PASS                 | PASS            | PASS           |



|      |     |       |       |      |      |      |
|------|-----|-------|-------|------|------|------|
| 4400 | HSL | 3.58  | 36.70 | PASS | PASS | PASS |
| 4600 | HSL | 3.70  | 36.60 | PASS | PASS | PASS |
| 4800 | HSL | 3.82  | 36.40 | PASS | PASS | PASS |
| 4900 | HSL | 3.96  | 36.20 | PASS | PASS | PASS |
| 5250 | HSL | 4.528 | 35.32 | PASS | PASS | PASS |
| 5600 | HSL | 4.905 | 34.89 | PASS | PASS | PASS |
| 5750 | HSL | 5.077 | 34.28 | PASS | PASS | PASS |

| Frequency<br>(MHz) | Tissue<br>Type | Conductivity<br>( $\sigma$ ) | Permittivity<br>( $\epsilon_r$ ) | Modulation Signal Validation |                |      |
|--------------------|----------------|------------------------------|----------------------------------|------------------------------|----------------|------|
|                    |                |                              |                                  | Mod. Type                    | Duty<br>Factor | PAR  |
| 750                | HSL            | 0.851                        | 42.43                            | N/A                          | N/A            | N/A  |
| 835                | HSL            | 0.898                        | 41.88                            | GMSK                         | PASS           | N/A  |
| 1750               | HSL            | 1.386                        | 39.91                            | N/A                          | N/A            | N/A  |
| 1800               | HSL            | 1.449                        | 41.26                            | N/A                          | N/A            | N/A  |
| 1900               | HSL            | 1.435                        | 39.65                            | GMSK                         | PASS           | N/A  |
| 2000               | HSL            | 1.451                        | 39.42                            | GMSK                         | PASS           | N/A  |
| 2300               | HSL            | 1.764                        | 38.99                            | OFDM                         | PASS           | PASS |
| 2450               | HSL            | 1.863                        | 38.85                            | OFDM                         | PASS           | PASS |
| 2600               | HSL            | 1.973                        | 38.58                            | TDD                          | PASS           | N/A  |
| 3400               | HSL            | 2.88                         | 38.10                            | OFDM                         | PASS           | PASS |
| 3500               | HSL            | 2.91                         | 37.90                            | OFDM                         | PASS           | PASS |
| 3700               | HSL            | 3.05                         | 37.70                            | OFDM                         | PASS           | PASS |
| 3900               | HSL            | 3.15                         | 37.50                            | OFDM                         | PASS           | PASS |
| 4100               | HSL            | 3.25                         | 37.20                            | OFDM                         | PASS           | PASS |
| 4200               | HSL            | 3.34                         | 37.00                            | OFDM                         | PASS           | PASS |
| 4400               | HSL            | 3.58                         | 36.70                            | OFDM                         | PASS           | PASS |
| 4600               | HSL            | 3.70                         | 36.60                            | OFDM                         | PASS           | PASS |
| 4800               | HSL            | 3.82                         | 36.40                            | OFDM                         | PASS           | PASS |
| 4900               | HSL            | 3.96                         | 36.20                            | OFDM                         | PASS           | PASS |
| 5250               | HSL            | 4.528                        | 35.32                            | OFDM                         | N/A            | PASS |
| 5600               | HSL            | 4.905                        | 34.89                            | OFDM                         | N/A            | PASS |
| 5750               | HSL            | 5.077                        | 34.28                            | OFDM                         | N/A            | PASS |



## &lt;Validation Results&gt;

| Date       | Frequency (MHz) | Tissue Type | Measured 1g SAR (W/kg) | Targeted 1g SAR (W/kg) | Normalized 1g SAR (W/kg) | Deviation (%) |
|------------|-----------------|-------------|------------------------|------------------------|--------------------------|---------------|
| 2024/11/15 | 750             | HSL         | 2.28                   | 8.54                   | 9.12                     | 6.79          |
| 2024/11/16 | 750             | HSL         | 2.13                   | 8.54                   | 8.52                     | -0.23         |
| 2024/11/18 | 900             | HSL         | 2.91                   | 10.90                  | 11.64                    | 6.79          |
| 2024/11/19 | 1800            | HSL         | 10.00                  | 39.20                  | 40                       | 2.04          |
| 2024/11/20 | 1800            | HSL         | 10.13                  | 39.20                  | 40.52                    | 3.37          |
| 2024/11/23 | 2300            | HSL         | 12.22                  | 48.80                  | 48.88                    | 0.16          |
| 2024/11/24 | 2450            | HSL         | 13.35                  | 52.80                  | 53.4                     | 1.14          |
| 2024/11/25 | 2600            | HSL         | 14.72                  | 55.90                  | 58.88                    | 5.33          |
| 2024/12/5  | 2600            | HSL         | 14.31                  | 55.90                  | 57.24                    | 2.40          |
| 2024/11/27 | 5250            | HSL         | 7.80                   | 77.30                  | 78                       | 0.91          |
| 2024/11/28 | 5600            | HSL         | 8.17                   | 82.40                  | 81.7                     | -0.85         |
| 2024/11/29 | 5750            | HSL         | 8.12                   | 77.20                  | 81.2                     | 5.18          |

| Date       | Frequency (MHz) | Tissue Type | Measured 10g SAR (W/kg) | Targeted 10g SAR (W/kg) | Normalized 10g SAR (W/kg) | Deviation (%) |
|------------|-----------------|-------------|-------------------------|-------------------------|---------------------------|---------------|
| 2024/11/15 | 750             | HSL         | 1.48                    | 5.57                    | 5.92                      | 6.28          |
| 2024/11/16 | 750             | HSL         | 1.40                    | 5.57                    | 5.6                       | 0.54          |
| 2024/11/18 | 900             | HSL         | 1.90                    | 7.00                    | 7.6                       | 8.57          |
| 2024/11/19 | 1800            | HSL         | 5.27                    | 20.70                   | 21.08                     | 1.84          |
| 2024/11/20 | 1800            | HSL         | 5.11                    | 20.70                   | 20.44                     | -1.26         |
| 2024/11/23 | 2300            | HSL         | 6.12                    | 23.20                   | 24.48                     | 5.52          |
| 2024/11/24 | 2450            | HSL         | 6.44                    | 24.50                   | 25.76                     | 5.14          |
| 2024/11/25 | 2600            | HSL         | 6.63                    | 24.90                   | 26.52                     | 6.51          |
| 2024/12/5  | 2600            | HSL         | 6.74                    | 24.90                   | 26.96                     | 8.27          |
| 2024/11/27 | 5250            | HSL         | 2.18                    | 21.50                   | 21.8                      | 1.40          |
| 2024/11/28 | 5600            | HSL         | 2.41                    | 22.80                   | 24.1                      | 5.70          |
| 2024/11/29 | 5750            | HSL         | 2.33                    | 21.20                   | 23.3                      | 9.91          |

**Note:** System checks the specific test data please see Annex C.

## 9. EUT Testing Position

This EUT was tested in ten different positions. They are right cheek/right tilted/left cheek/left tilted for head, Front/Back/Left/Right/Top/Bottom of the EUT with phantom 10 mm gap, as illustrated below, please refer to Appendix B for the test setup photos.

### 9.1. Handset Reference Points

The vertical centre line passes through two points on the front side of the handset – the midpoint of the width  $w_t$  of the handset at the level of the acoustic output, and the midpoint of the width  $w_b$  of the bottom of the handset.

The horizontal line is perpendicular to the vertical centre line and passes the center of the acoustic output. The horizontal line is also tangential to the handset at point A.

The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centre line is not necessarily parallel to the front face of the handset, especially for clamshell handsets, handsets with flip covers, and other irregularly shaped handsets.



Fig. 9.1 Illustration for Cheek Position

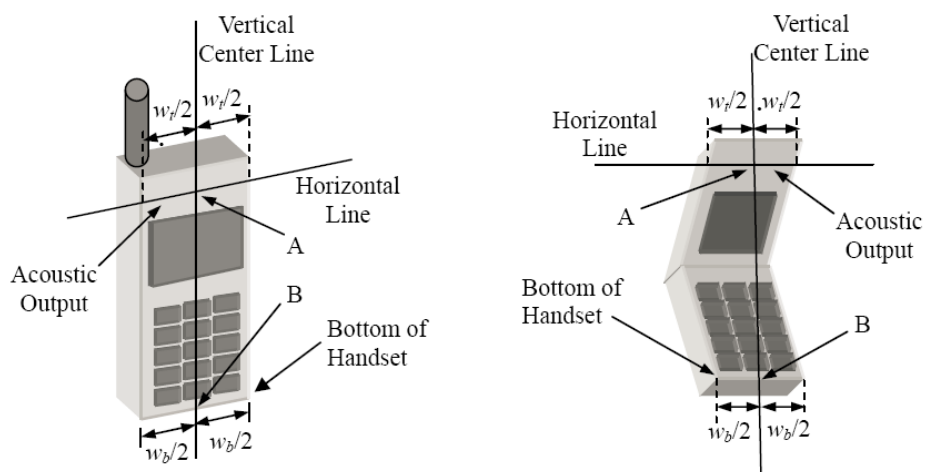


Fig. 9.2 Illustration for Handset Vertical and Horizontal Reference Lines

## 9.2. Positioning for Cheek / Touch

To position the device with the vertical center line of the body of the device and the horizontal line crossing the center piece in a plane parallel to the sagittal plane of the phantom. While maintaining the device in this plane, align the vertical center line with the reference plane containing the three ear and mouth reference point (M: Mouth, RE: Right Ear and LE: Left Ear) and align the center of the ear piece with the line RE-LE.

To move the device towards the phantom with the ear piece aligned with the line LE-RE until the phone touched the ear. While maintaining the device in the reference plane and maintaining the phone contact with the ear, move the bottom of the phone until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost (see below figure)

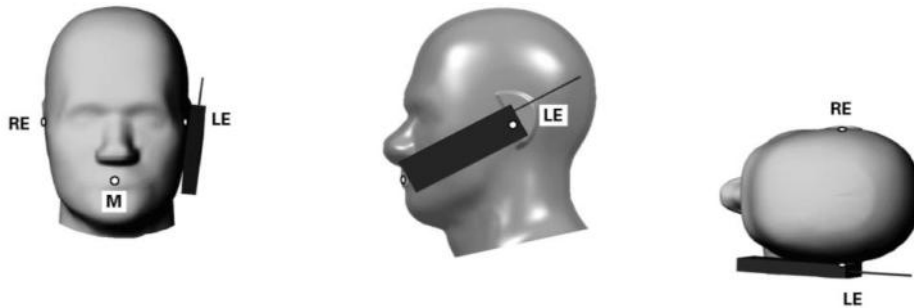


Fig 9.3 Illustration for Cheek Position

## 9.3. Positioning for Ear / 15° Tilt

To position the device in the “cheek” position described above.

While maintaining the device the reference plane described above and pivoting against the ear, moves it outward away from the mouth by an angle of 15 degrees or until contact with the ear is lost (see figure below).

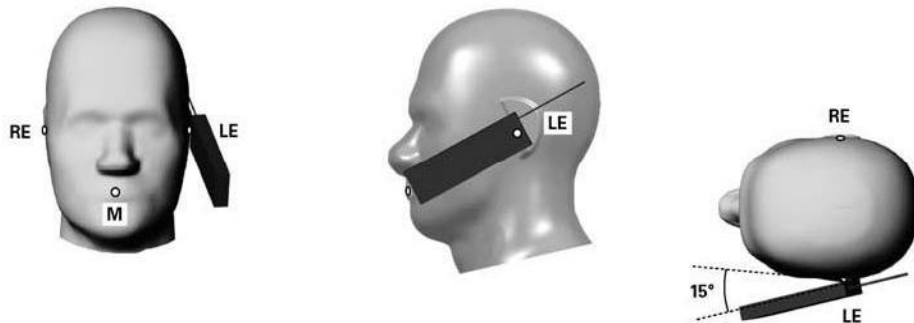


Fig 9.4 Illustration for Tilted Position

## 9.4. SAR Evaluation near the Mouth/Jaw Regions of the Phantom

Antennas located near the bottom of a phone may require SAR measurements around the mouth and jaw regions of the SAM head phantom. This typically applies to clam-shell style phones that are generally longer in the unfolded normal use positions or to certain older style long rectangular phones.

Under these circumstances, the following procedures apply, adopted from the FCC guidance on SAR handsets document FCC KDB Publication 648474 D04v01r03. The SAR required in these regions of SAM should be measured using a flat phantom. The phone should be positioned with a separation distance of 4 mm between the ear reference point (ERP) and the outer surface of the flat phantom shell. While maintaining this distance at the ERP location, the low (bottom) edge of the phone should be lowered from the phantom to establish the same separation distance between the peak SAR locations identified by the truncated partial SAR distribution measured with the SAM phantom. The distance from the peak SAR location to the phone is determined by the straight line passing perpendicularly through the phantom surface. When it is not feasible to maintain 4 mm separation at the ERP while also establishing the required separation at the peak SAR location, the top edge of the phone will be allowed to touch the phantom with a separation < 4 mm at the ERP. The phone should not be tilted to the left or right while placed in this inclined position to the flat phantom.

## 9.5. Body-worn Configurations

The body-worn configurations shall be tested with the supplied accessories (belt-clips, holsters, etc.) attached to the device in normal use configuration.

For body-worn and other configurations a flat phantom shall be used which is comprised of material with electrical properties similar to the corresponding tissues.


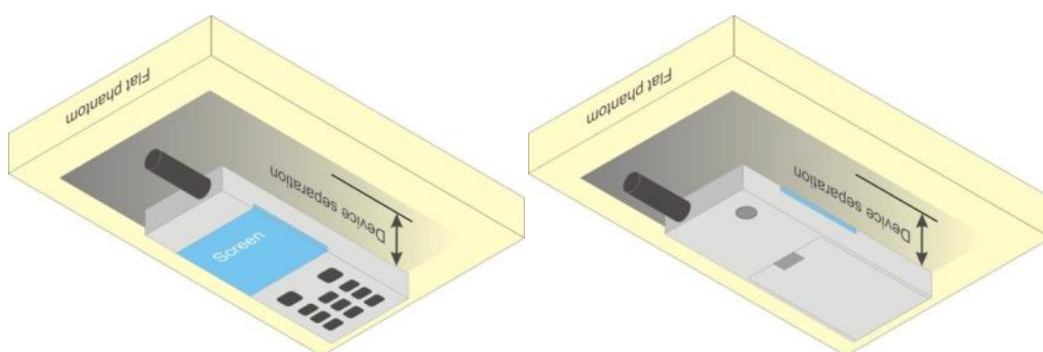


Fig 9.5 Illustration for Body Worn Position

## 9.6. Hotspot Mode Exposure Position Conditions

For handsets that support hotspot mode operations, with wireless router capabilities and various web browsing functions, the relevant hand and body exposure conditions are tested according to the hotspot SAR procedures in KDB 941225. A test separation distance of 10 mm is required between the phantom and all surfaces and edges with a transmitting antenna located within 25 mm from that surface or edge. When the form factor of a handset is smaller than 9 cm x 5 cm, a test separation distance of 5 mm (instead of 10 mm) is required for testing hotspot mode. When the separation distance required for body-worn accessory testing is larger than or equal to that tested for hotspot mode, in the same wireless mode and for the same surface of the phone, the hotspot mode SAR data may be used to support body-worn accessory SAR compliance for that particular configuration (surface).

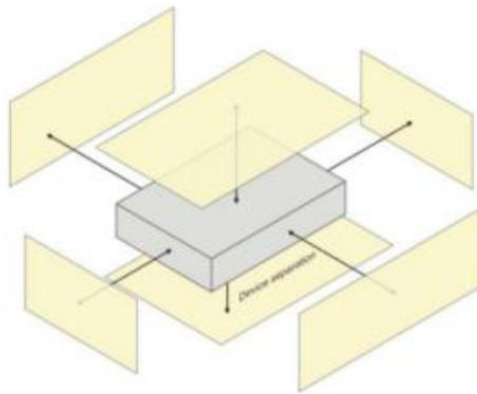

**Fig 9.6 Illustration for Hotspot Position**

## 10. Measurement Procedures

The measurement procedures are as follows:

### <Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band.
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power.

### <SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band.
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg.

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement.
- (b) Area scan.
- (c) Zoom scan.
- (d) Power drift measurement.

### 10.1. Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.



The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan.
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters).
- (c) Generation of a high-resolution mesh within the measured volume.
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid.
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface.
- (f) Calculation of the averaged SAR within masses of 1g and 10g.

## 10.2. Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

## 10.3. Area Scan Procedures

Area scans are defined prior to the measurement process being executed with a user defined variable spacing between each measurement point (integral) allowing low uncertainty measurements to be conducted. Scans defined for FCC applications utilize a 10mm<sup>2</sup> step integral, with 1mm interpolation used to locate the peak SAR area used for zoom scan assessments.

When an Area Scan has measured all reachable points, it computes the field maxima founding the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE1528-2003.

## 10.4. Zoom Scan Procedures

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. A density of 1000 kg/m<sup>3</sup> is used to represent the head and body tissue density and not the phantom liquid density, in order to be consistent with the definition of the liquid dielectric properties, i.e. the side length of the 1g cube is 10mm, with the side



length of the 10 g cube 21,5mm. The zoom scan integer steps can be user defined so as to reduce uncertainty, but normal practice for typical test applications utilize a physical step of 5x5x7 (8mmx8mmx5mm) providing a volume of 32mm in the X & Y axis, and 30mm in the Z axis.

## 10.5. SAR Averaged Methods

In DASY, the interpolation and extrapolation are both based on the modified Quadratic Sheppard's method. The interpolation scheme combines a least-square fitted function method and a weighted average method which are the two basic types of computational interpolation and approximation.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5 mm.

## 10.6. Power Drift Monitoring

All SAR testing is under the DUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of DUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drift more than 5%, the SAR will be retested.

# 11. SAR Test Procedure

## 11.1. General Scan Requirements

Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1-g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEEE Std. 1528-2013.

|                                                                                                                                                                                                                                                                                                                         |                                    |                                                                                      | $\leq 3$ GHz                                                                                                                                                                                                                                                           | $> 3$ GHz                                                                     |
|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------|--------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------|
| Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface                                                                                                                                                                                                                  |                                    |                                                                                      | 5 mm $\pm$ 1 mm                                                                                                                                                                                                                                                        | $\frac{1}{2} \cdot \delta \cdot \ln(2)$ mm $\pm$ 0.5 mm                       |
| Maximum probe angle from probe axis to phantom surface normal at the measurement location                                                                                                                                                                                                                               |                                    |                                                                                      | $30^{\circ} \pm 1^{\circ}$                                                                                                                                                                                                                                             | $20^{\circ} \pm 1^{\circ}$                                                    |
| Maximum area scan spatial resolution: $\Delta x_{Area}$ , $\Delta y_{Area}$                                                                                                                                                                                                                                             |                                    |                                                                                      | $\leq 2$ GHz: $\leq 15$ mm<br>2 – 3 GHz: $\leq 12$ mm                                                                                                                                                                                                                  | 3 – 4 GHz: $\leq 12$ mm<br>4 – 6 GHz: $\leq 10$ mm                            |
|                                                                                                                                                                                                                                                                                                                         |                                    |                                                                                      | When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device. |                                                                               |
| Maximum zoom scan spatial resolution: $\Delta x_{Zoom}$ , $\Delta y_{Zoom}$                                                                                                                                                                                                                                             |                                    |                                                                                      | $\leq 2$ GHz: $\leq 8$ mm<br>2 – 3 GHz: $\leq 5$ mm*                                                                                                                                                                                                                   | 3 – 4 GHz: $\leq 5$ mm*<br>4 – 6 GHz: $\leq 4$ mm*                            |
| Maximum zoom scan spatial resolution, normal to phantom surface                                                                                                                                                                                                                                                         | uniform grid: $\Delta z_{Zoom}(n)$ |                                                                                      | $\leq 5$ mm                                                                                                                                                                                                                                                            | 3 – 4 GHz: $\leq 4$ mm<br>4 – 5 GHz: $\leq 3$ mm<br>5 – 6 GHz: $\leq 2$ mm    |
|                                                                                                                                                                                                                                                                                                                         | graded grid                        | $\Delta z_{Zoom}(1)$ : between 1 <sup>st</sup> two points closest to phantom surface | $\leq 4$ mm                                                                                                                                                                                                                                                            | 3 – 4 GHz: $\leq 3$ mm<br>4 – 5 GHz: $\leq 2.5$ mm<br>5 – 6 GHz: $\leq 2$ mm  |
|                                                                                                                                                                                                                                                                                                                         |                                    | $\Delta z_{Zoom}(n>1)$ : between subsequent points                                   | $\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$ mm                                                                                                                                                                                                                               |                                                                               |
| Minimum zoom scan volume                                                                                                                                                                                                                                                                                                | x, y, z                            |                                                                                      | $\geq 30$ mm                                                                                                                                                                                                                                                           | 3 – 4 GHz: $\geq 28$ mm<br>4 – 5 GHz: $\geq 25$ mm<br>5 – 6 GHz: $\geq 22$ mm |
| Note: $\delta$ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see IEEE Std 1528-2013 for details.                                                                                                                                                                                   |                                    |                                                                                      |                                                                                                                                                                                                                                                                        |                                                                               |
| * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB Publication 447498 is $\leq 1.4$ W/kg, $\leq 8$ mm, $\leq 7$ mm and $\leq 5$ mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz. |                                    |                                                                                      |                                                                                                                                                                                                                                                                        |                                                                               |

## 11.2. Test Procedure

The Following steps are used for each test position

1. Establish a call with the maximum output power with a base station simulator. The connection between the mobile and the base station simulator is established via air interface.
2. Measurement of the local E-field value at a fixed location. This value serves as a reference value for calculating a possible power drift.
3. Measurement of the SAR distribution with a grid of 8 to 16mm \* 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors cannot directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme.
4. Around this point, a cube of 30 \* 30 \* 30 mm or 32 \* 32 \* 32 mm is assessed by measuring 5 or 8 \* 5 or 8\*4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

## 11.3. Description of Interpolation/Extrapolation Scheme

The local SAR inside the phantom is measured using small dipole sensing elements inside a probe body. The probe tip must not be in contact with the phantom surface in order to minimize measurements errors, but the highest local SAR will occur at the surface of the phantom.

An extrapolation is using to determinate this highest local SAR values. The extrapolation is based on a fourth-order least-square polynomial fit of measured data. The local SAR value is then extrapolated from the liquid surface with a 1mm step.

The measurements have to be performed over a limited time (due to the duration of the battery) so the step of measurement is high. It could vary between 5 and 8 mm. To obtain an accurate assessment of the maximum SAR averaged over 10 grams and 1 gram requires a very fine resolution in the three dimensionals scanned data array.

## 11.4. Wireless Router

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v02r01 where SAR test considerations for handsets ( $L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$ ) are based on a composite test separation distance of 10 from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges,



determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

## 12. SAR Test Configuration

### <GSM Mode>

A summary of these settings is illustrated below:

For GSM850 frequency band, the power control is set to 5 for GSM/GPRS mode (GSMK-CS1) and set to 8 for EDGE mode (MCS5); For GSM1900 frequency band, the power control is set to 0 for GSM/GPRS mode (GSMK-CS1) and set to 2 for EDGE mode (MCS5).

1. Per KDB 447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
2. Per KDB 941225 D01v03r01, SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS (4Tx slots) for GSM850/GSM1900 is considered as the primary mode.
3. Other configurations of GSM / GPRS / EDGE are considered as secondary modes.

### Timeslot consignations:

#### Remark:

1. The frame-averaged power is linearly reported the maximum burst averaged power over 8 time slots. The calculated methods are shown as below:

The duty cycle "x" of different time slots as below:

1 TX slot is 1/8, 2 TX slots is 2/8, 3 TX slots is 3/8 and 4 TX slots is 4/8

Based on the calculation formula:

Frame-averaged power = Burst averaged power + 10 log (x)

So,

Frame-averaged power (1 TX slot) = Burst averaged power (1 TX slot)– 9.03

Frame-averaged power (2 TX slots) = Burst averaged power (2 TX slots)– 6.02

Frame-averaged power (3 TX slots) = Burst averaged power (3 TX slots)– 4.26

Frame-averaged power (4 TX slots) = Burst averaged power (4 TX slots) – 3.01

2. CS1 coding scheme was used in GPRS conducted power measurements and SAR testing, MCS5 coding scheme was used in EGPRS conducted power measurements and SAR testing (if necessary).

| No. of Slots:      | Slot 1    | Slot 2    | Slot 3    | Slot 4    |
|--------------------|-----------|-----------|-----------|-----------|
| Slot Consignation: | 1Up 4Down | 2Up 3Down | 3Up 2Down | 4Up 1Down |
| Duty Cycle:        | 1:8.3     | 1:4.15    | 1:2.77    | 1:2.08    |
| Correct Factor:    | -9.03dB   | -6.02dB   | -4.26dB   | -3.01dB   |

## <WCDMA Mode>

Summary of UMTS conducted power measurement:

1. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is  $\leq \frac{1}{4}$  dB higher than the primary mode, SAR measurement is not required for the secondary mode.
2. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
3. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.
4. For HSPA+ devices supporting 16 QAM in the uplink, power measurements procedure is according to the configurations in Table C.11.1.4 of 3GPP TS 34.121-1.
5. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA / HSPA+ is  $\leq \frac{1}{4}$  dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA / HSPA+ to RMC12.2Kbps and the adjusted SAR is  $\leq 1.2$  W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA / HSPA+, and according to the following RF output power, the output power results of the secondary modes (HSDPA / HSUPA / DC-HSDPA / HSPA+) are less than  $\frac{1}{4}$  dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA / HSPA+.
6. A fixed level power reduction is applied for WCDMA Band II when handset open Hotspot mode, the power reduction triggered.

## HSDPA Setup Configuration

| Sub-test                                                                                                                                                                                                                                                                                                                                                                                                                                                                                      | $\beta_c$            | $\beta_d$            | $\beta_d$<br>(SF) | $\beta_c/\beta_d$    | $\beta_{hs}^{(1)}$ | CM (dB) <sup>(2)</sup> |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------------------|----------------------|-------------------|----------------------|--------------------|------------------------|
| 1                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 2/15                 | 15/15                | 64                | 2/15                 | 4/15               | 0.0                    |
| 2                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 12/15 <sup>(3)</sup> | 15/15 <sup>(3)</sup> | 64                | 12/15 <sup>(3)</sup> | 24/15              | 1.0                    |
| 3                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 15/15                | 8/15                 | 64                | 15/8                 | 30/15              | 1.5                    |
| 4                                                                                                                                                                                                                                                                                                                                                                                                                                                                                             | 15/15                | 4/15                 | 64                | 15/4                 | 30/15              | 1.5                    |
| Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$<br>Note 2: CM = 1 for $\beta_c/\beta_d = 12/15, \beta_{hs}/\beta_c = 24/15$ .<br>Note 3: For subtest 2 the $\beta_c/\beta_d$ ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$ . |                      |                      |                   |                      |                    |                        |

## HSUPA Setup Configuration

| Sub-test | $\beta_c$            | $\beta_d$            | $\beta_d$ (SF) | $\beta_c/\beta_d$    | $\beta_{hs}^{(1)}$ | $\beta_{ec}$ | $\beta_{ed}$                                   | $\beta_{ed}$ (SF) | $\beta_{ed}$ (codes) | CM <sup>(2)</sup> (dB) | MPR (dB) | AG <sup>(4)</sup> Index | E-TFCI |
|----------|----------------------|----------------------|----------------|----------------------|--------------------|--------------|------------------------------------------------|-------------------|----------------------|------------------------|----------|-------------------------|--------|
| 1        | 11/15 <sup>(3)</sup> | 15/15 <sup>(3)</sup> | 64             | 11/15 <sup>(3)</sup> | 22/15              | 209/225      | 1039/225                                       | 4                 | 1                    | 1.0                    | 0.0      | 20                      | 75     |
| 2        | 6/15                 | 15/15                | 64             | 6/15                 | 12/15              | 12/15        | 94/75                                          | 4                 | 1                    | 3.0                    | 2.0      | 12                      | 67     |
| 3        | 15/15                | 9/15                 | 64             | 15/9                 | 30/15              | 30/15        | $\beta_{ed1}$ : 47/15<br>$\beta_{ed2}$ : 47/15 | 4                 | 2                    | 2.0                    | 1.0      | 15                      | 92     |
| 4        | 2/15                 | 15/15                | 64             | 2/15                 | 4/15               | 2/15         | 56/75                                          | 4                 | 1                    | 3.0                    | 2.0      | 17                      | 71     |
| 5        | 15/15 <sup>(4)</sup> | 15/15 <sup>(4)</sup> | 64             | 15/15 <sup>(4)</sup> | 30/15              | 24/15        | 134/15                                         | 4                 | 1                    | 1.0                    | 0.0      | 21                      | 81     |

Note 1:  $\Delta_{ACK}$ ,  $\Delta_{NACK}$  and  $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$ .

Note 2: CM = 1 for  $\beta_c/\beta_d = 12/15$ ,  $\beta_{hs}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the  $\beta_c/\beta_d$  ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 10/15$  and  $\beta_d = 15/15$ .

Note 4: For subtest 5 the  $\beta_c/\beta_d$  ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to  $\beta_c = 14/15$  and  $\beta_d = 15/15$ .

Note 5: Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g.

Note 6:  $\beta_{ed}$  cannot be set directly; it is set by Absolute Grant Value.

## HSPA+ 3GPP release 7 (uplink category 7) 16QAM, Setup Configuration:

**Table C.11.1.4:  $\beta$  values for transmitter characteristics tests with HS-DPCCH and E-DCH with 16QAM**

| Sub-test | $\beta_c$ (Note 3) | $\beta_d$ | $\beta_{hs}$ (Note 1) | $\beta_{ec}$ | $\beta_{ed}$ (2xSF2) (Note 4)                  | $\beta_{ed}$ (2xSF4) (Note 4)                  | CM (dB) (Note 2) | MPR (dB) (Note 2) | AG Index (Note 4) | E-TFCI (Note 5) | E-TFCI (boost) |
|----------|--------------------|-----------|-----------------------|--------------|------------------------------------------------|------------------------------------------------|------------------|-------------------|-------------------|-----------------|----------------|
| 1        | 1                  | 0         | 30/15                 | 30/15        | $\beta_{ed1}$ : 30/15<br>$\beta_{ed2}$ : 30/15 | $\beta_{ed3}$ : 24/15<br>$\beta_{ed4}$ : 24/15 | 3.5              | 2.5               | 14                | 105             | 105            |

Note 1:  $\Delta_{ACK}$ ,  $\Delta_{NACK}$  and  $\Delta_{CQI} = 30/15$  with  $\beta_{hs} = 30/15 * \beta_c$ .

Note 2: CM = 3.5 and the MPR is based on the relative CM difference, MPR = MAX(CM-1,0).

Note 3: DPDCH is not configured, therefore the  $\beta_c$  is set to 1 and  $\beta_d = 0$  by default.

Note 4:  $\beta_{ed}$  can not be set directly; it is set by Absolute Grant Value.

Note 5: All the sub-tests require the UE to transmit 2SF2+2SF4 16QAM EDCH and they apply for UE using E-DPDCH category 7. E-DCH TTI is set to 2ms TTI and E-DCH table index = 2. To support these E-DCH configurations DPDCH is not allocated. The UE is signaled to use the extrapolation algorithm.

**DC-HSDPA Setup Configuration**

The following tests were completed according to procedures in section 7.3.13 of 3GPP TS34.108 v9.5.0. A summary of these settings are illustrated below:

Downlink Physical Channels are set as per 3GPP TS34.121-1 v9.0.0 E.5.

**Table E.5.0: Levels for HSDPA connection setup**


| Parameter<br>During Connection setup | Unit | Value |
|--------------------------------------|------|-------|
| P-CPICH_Ec/Ior                       | dB   | -10   |
| P-CCPCH and SCH_Ec/Ior               | dB   | -12   |
| PICH_Ec/Ior                          | dB   | -15   |
| HS-PDSCH                             | dB   | off   |
| HS-SCCH_1                            | dB   | off   |
| DPCH_Ec/Ior                          | dB   | -5    |
| OCNS_Ec/Ior                          | dB   | -3.1  |

Call is set up as per 3GPP TS34.108 v9.5.0 sub clause 7.3.13

The configurations of the fixed reference channels for HSDPA RF tests are described in 3GPP TS 34.121, annex C for FDD and 3GPP TS 34.122.

**Table C.8.1.12: Fixed Reference Channel H-Set 12**

| Parameter                                                                                                                                                                                                                                                                                                     | Unit      | Value |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------|-------|
| Nominal Avg. Inf. Bit Rate                                                                                                                                                                                                                                                                                    | kbps      | 60    |
| Inter-TTI Distance                                                                                                                                                                                                                                                                                            | TTI's     | 1     |
| Number of HARQ Processes                                                                                                                                                                                                                                                                                      | Processes | 6     |
| Information Bit Payload ( $N_{INF}$ )                                                                                                                                                                                                                                                                         | Bits      | 120   |
| Number Code Blocks                                                                                                                                                                                                                                                                                            | Blocks    | 1     |
| Binary Channel Bits Per TTI                                                                                                                                                                                                                                                                                   | Bits      | 960   |
| Total Available SML's in UE                                                                                                                                                                                                                                                                                   | SML's     | 19200 |
| Number of SML's per HARQ Proc.                                                                                                                                                                                                                                                                                | SML's     | 3200  |
| Coding Rate                                                                                                                                                                                                                                                                                                   |           | 0.15  |
| Number of Physical Channel Codes                                                                                                                                                                                                                                                                              | Codes     | 1     |
| Modulation                                                                                                                                                                                                                                                                                                    |           | QPSK  |
| <p>Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table.</p> <p>Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.</p> |           |       |

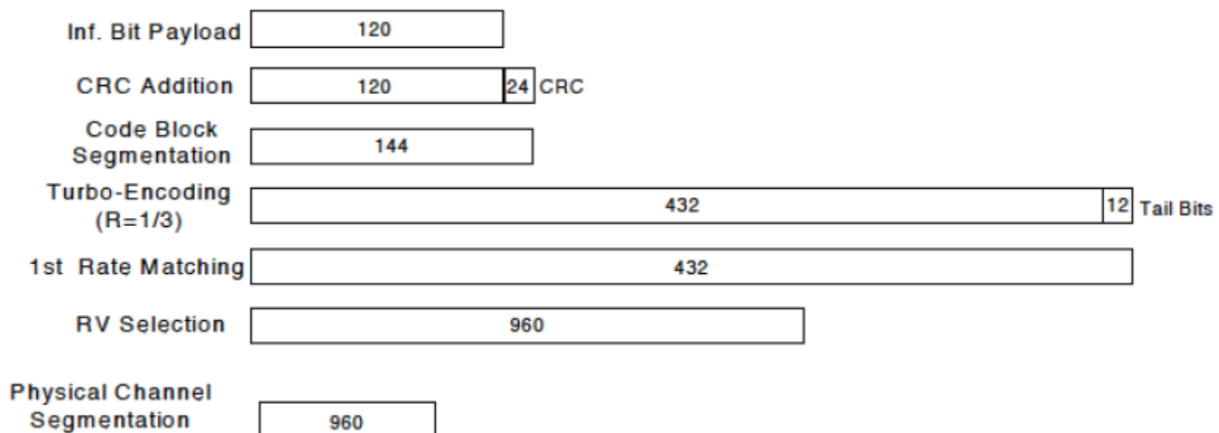
**Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)**



## &lt;CDMA Mode&gt;

**1xEV-DO Rev. B**

Call box setup procedure

1xEV-DO Release B

1&gt; CMW 500 Signal Generator &gt; 1xEV-DO Taskbar Enable

2&gt; CMW 500 1xEV-DO Signaling Configuration Window &gt;

3&gt; 1xEV-DO Signaling On Window:

Under Access Network Control:

Band Class: BC0: US Cellular

RF Channel: 31

1xEV-DO Power: -70 dBm

4&gt; 1xEV-DO Signaling Configuration Window

Under RF Frequency Band / Channel: Enter Ch. Frequency

- Under Carrier Configuration: RF Frequency  
For Two Carriers: Low Channel (1013)

|             | <u>RF Channel</u> | <u>RF Channel Offset</u> |
|-------------|-------------------|--------------------------|
| Carrier [0] | 31                | 0                        |
| Carrier [1] | 1013              | 982                      |

- Under Carrier Configuration: RF Pilot
- |           | <u>Carrier Sector</u> | <u>Active on AN</u> | <u>Assigned to AT</u> |
|-----------|-----------------------|---------------------|-----------------------|
| Pilot [0] | C0/S0                 | ✓                   | ✓                     |
|           | CA/S1                 | ✓                   | ✓                     |

For Three Carriers: Low Channel (1013)

|             | <u>RF Channel</u> | <u>RF Channel Offset</u> |
|-------------|-------------------|--------------------------|
| Carrier [0] | 72                | 0                        |
| Carrier [1] | 31                | -41                      |
| Carrier [2] | 1013              | 941                      |

- Under Carrier Configuration: RF Pilot
- |           | <u>Carrier Sector</u> | <u>Active on AN</u> | <u>Assigned to AT</u> |
|-----------|-----------------------|---------------------|-----------------------|
| Pilot [0] | C0/S0                 | ✓                   | ✓                     |
| Pilot [1] | C1/S1                 | ✓                   | ✓                     |
| Pilot [2] | C2/S2                 | ✓                   | ✓                     |



## &lt;LTE Mode&gt;

**LTE Target MPR level**

The device implements maximum power reduction per 3GPP 36.101 requirements where the MPR target is as below table. The MPR settings are implemented configured into firmware and cannot be disabled by the end user or LTE carrier network.

| Modulation | Channel bandwidth / Transmission bandwidth configuration [RB] |     |     |      |      |      | MPR    | 3GPP |
|------------|---------------------------------------------------------------|-----|-----|------|------|------|--------|------|
|            | 1.4                                                           | 3.0 | 5   | 10   | 15   | 20   | Target | MPR  |
|            | MHz                                                           | MHz | MHz | MHz  | MHz  | MHz  | (dB)   | (dB) |
| QPSK       | > 5                                                           | > 4 | > 8 | > 12 | > 16 | > 18 | 1      | ≤ 1  |
| 16 QAM     | ≤ 5                                                           | ≤ 4 | ≤ 8 | ≤ 12 | ≤ 16 | ≤ 18 | 1      | ≤ 1  |

**Note:** The measurement result showed some difference from the target MPR level, due to expected 0.5 dB measurement tolerance

**LTE Bands**

| LTE Bands | Channel bandwidth / Transmission bandwidth configuration [RB] |     |     |     |     |     |
|-----------|---------------------------------------------------------------|-----|-----|-----|-----|-----|
|           | 1.4                                                           | 3.0 | 5   | 10  | 15  | 20  |
|           | MHz                                                           | MHz | MHz | MHz | MHz | MHz |
| 2         | √                                                             | √   | √   | √   | √   | √   |
| 4         | √                                                             | √   | √   | √   | √   | √   |
| 5         | √                                                             | √   | √   | √   | N/A | N/A |
| 7         | N/A                                                           | N/A | √   | √   | √   | √   |
| 12        | √                                                             | √   | √   | √   | N/A | N/A |
| 13        | N/A                                                           | N/A | √   | √   | N/A | N/A |
| 17        | N/A                                                           | N/A | √   | √   | N/A | N/A |
| 38        | N/A                                                           | N/A | √   | √   | √   | √   |
| 40        | N/A                                                           | N/A | √   | √   | N/A | N/A |
| 66        | √                                                             | √   | √   | √   | √   | √   |

**Note:**

1. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
2. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
3. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
4. Per KDB 941225 D05v02r05, for QPSK with 100% RB allocation, SAR is not required when the highest maximum output power for 100 % RB allocation is less than the highest maximum output



power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are  $\leq 0.8$  W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is  $> 1.45$  W/kg, the remaining required test channels must also be tested.

5. Per KDB 941225 D05v02r05, 16QAM/64QAM output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is  $\leq 1.45$  W/kg; Per KDB941225 D05v02r05, 16QAM/64QAM SAR testing is not required.
6. Per KDB 941225 D05v02r05, smaller bandwidth output power for each RB allocation configuration is  $>$  not  $\frac{1}{2}$  Db higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported band width is  $\leq 1.45$  W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
7. For LTE B4 / B5 / B7 / B17 the maximum bandwidth does not support three non-overlapping channels, per KDB941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
8. LTE band 2 / 12 SAR test was covered by Band 25 / 17; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
  - a. The maximum output power, including tolerance, for the smaller band is  $\leq$  the larger band to qualify for the SAR test exclusion.
  - b. The channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band.
9. According to 2017 TCB workshop, for 64 QAM and 16 QAM should be verified by checking the signal constellation with a call box to avoid incorrect maximum power levels due to MPR and other requirements associated with signal modulation, and the following figure is taken from the "Fundamental Measurement >> Modulation Analysis >> constellation" mode of the device connect to the CMW500 base station, therefore, the device 64QAM and 16QAM signal modulation are correct. Identify if Maximum Power Reduction (MPR) is optional or mandatory, i.e. built-in by design: only mandatory MPR may be considered during SAR testing, when the maximum output power is permanently limited by the MPR implemented within the UE; and only for the applicable RB (resource block) configurations specified in LTE standards: b) A-MPR (additional MPR) must be disabled.
10. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
  - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
  - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/ (duty cycle)"
  - c. For WWAN: Reported SAR (W/kg) = Measured SAR(W/kg) \* Tune-up Scaling Factor
  - d. For WLAN/Bluetooth: Reported SAR (W/kg) = Measured SAR(W/kg) \* Duty Cycle scaling

factor \* Tune-up scaling factor

- e. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix  $63.3\%/62.9\% = 1.006$  is applied to scale-up the measured SAR result. The Reported TDD LTE SAR = measured SAR (W/kg) \* Tune-up Scaling Factor\* scaling factor for extended cyclic prefix.
11. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is:  $\leq 0.8$  W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\leq 100$  MHz  $\leq 0.6$  W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz  $\leq 0.4$  W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\geq 200$  MHz
12. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is  $\geq 0.8$  W/kg.
13. Per KDB 648474 D04v01r03, when the reported SAR for a body-worn accessory measured without a headset connected to the handset is  $\leq 1.2$  W/kg, SAR testing with a headset connected to the handset is not required.

#### <WLAN 2.4GHz>

1. SAR is measured for 2.4 GHz 802.11b DSSS using either the fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:
  - a. When the reported SAR of the highest measured maximum output power channel for the exposure configuration is  $\leq 0.8$  W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
  - b. When the reported SAR is  $> 0.8$  W/kg, SAR is required for that position using the next highest measured output power channel. When any reported SAR is  $> 1.2$  W/kg, SAR is required for the third channel; i.e., all channels require testing.
2. 2.4 GHz 802.11 g/n OFDM are additionally evaluated for SAR if the highest reported SAR for 802.11b, adjusted by the ratio of the OFDM to DSSS specified maximum output power, is  $> 1.2$  W/kg. When SAR is required for OFDM modes in 2.4 GHz band, the Initial Test configuration Procedures should be followed.
3. For held-to-ear and hotspot operations, the initial test position procedures were applied. The test position with the highest extrapolated peak SAR will be used as the initial test position. When reported SAR for the initial test position is  $\leq 0.4$  W/kg, no additional testing for the remaining test positions was required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is  $\leq 0.8$  W/kg or all test positions are measured.
4. Justification for test configurations for WLAN per KDB Publication 248227 D02DR02-41929 for



2.4 GHz WI-FI single transmission chain operations, the highest measured maximum output power channel for DSSS was selected for SAR measurement. SAR for OFDM modes (2.4 GHz 802.11g/n) was not required due to the maximum allowed powers and the highest reported DSSS SAR.

5. A fixed level power reduction is applied for WiFi when handset operates "held to the body" condition or "held to the ear" condition, the power reduction triggered by audio receiver detection and call establish status.
6. Per KDB 248227 D01v02r02, In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. SAR is not required for the following 2.4 GHz OFDM conditions:
  - a. When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration.
  - b. When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2$  W/kg.

## 13. Conducted Power List

Remark: The output power of GSM/WCDMA/LTE/WLAN/Bluetooth was recorded in annex E of this report.

## 14. Hotspot Mode Evaluation Procedure

### ➤ EUT Antenna Location

|                                                                                                                                                                                             |
|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| The location of antenna was recorded in annex B                                                                                                                                             |
| WWAN Main ANT:<br>TX/RX: GSM850, WCDMA V, LTE Band 5/12/13/17<br><br>DIV ANT:<br>TX/RX: GSM1900, WCDMA II/IV, LTE Band 2/4/7/38/40/66<br><br>G/W/B ANT:<br>WLAN 2.4GHz/5GHz, Bluetooth, GPS |

### ➤ EUT Antenna Distance

| Antenna         | Antenna distance to surface or edges (mm) |      |      |       |     |        |
|-----------------|-------------------------------------------|------|------|-------|-----|--------|
|                 | Front                                     | Back | Left | Right | Top | Bottom |
| Bottom Main ANT | <5                                        | <5   | <5   | <5    | >25 | <5     |
| Top DIV ANT     | <5                                        | <5   | <5   | >25   | <5  | >25    |
| GPS/WLAN/BT ANT | <5                                        | <5   | >25  | <5    | <5  | >25    |

### ➤ Hotspot Evaluation

| Assessment      | Hotspot Side for SAR Test Distance: 10mm |      |      |       |     |        |
|-----------------|------------------------------------------|------|------|-------|-----|--------|
| Antenna         | Front                                    | Back | Left | Right | Top | Bottom |
| Bottom Main ANT | Yes                                      | Yes  | Yes  | Yes   | No  | Yes    |
| Top DIV ANT     | Yes                                      | Yes  | Yes  | No    | Yes | No     |
| GPS/WLAN/BT ANT | Yes                                      | Yes  | No   | Yes   | Yes | No     |


#### Note :

- The SAR evaluation procedures for Portable Devices with Wireless Router function is according to KDB 941225 D06 Hotspot SAR v02r01.
- Head/Body-worn/Hotspot mode SAR assessments are required.
- Referring to KDB 941225 D06, when the overall device length and width are  $\geq 9\text{cm} * 5\text{cm}$ , the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting

antenna located within 25 mm from that surface or edge.

## 15. Block Diagram of the Tests to be Performed

### 15.1. Head

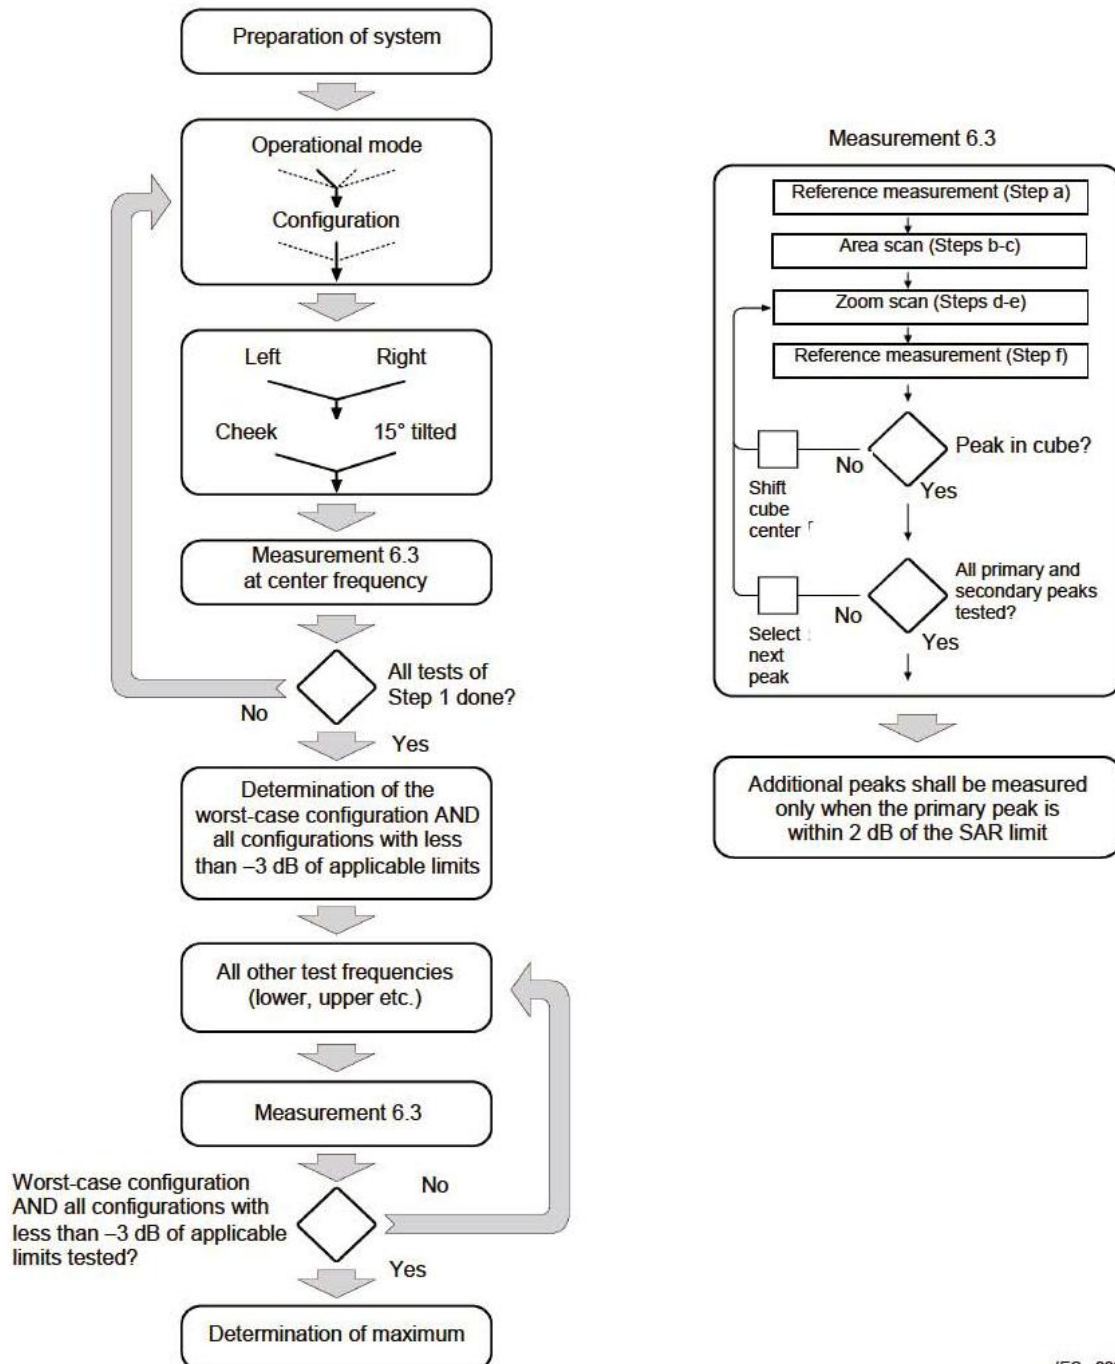

IEC 228/05

## 15.2. Body

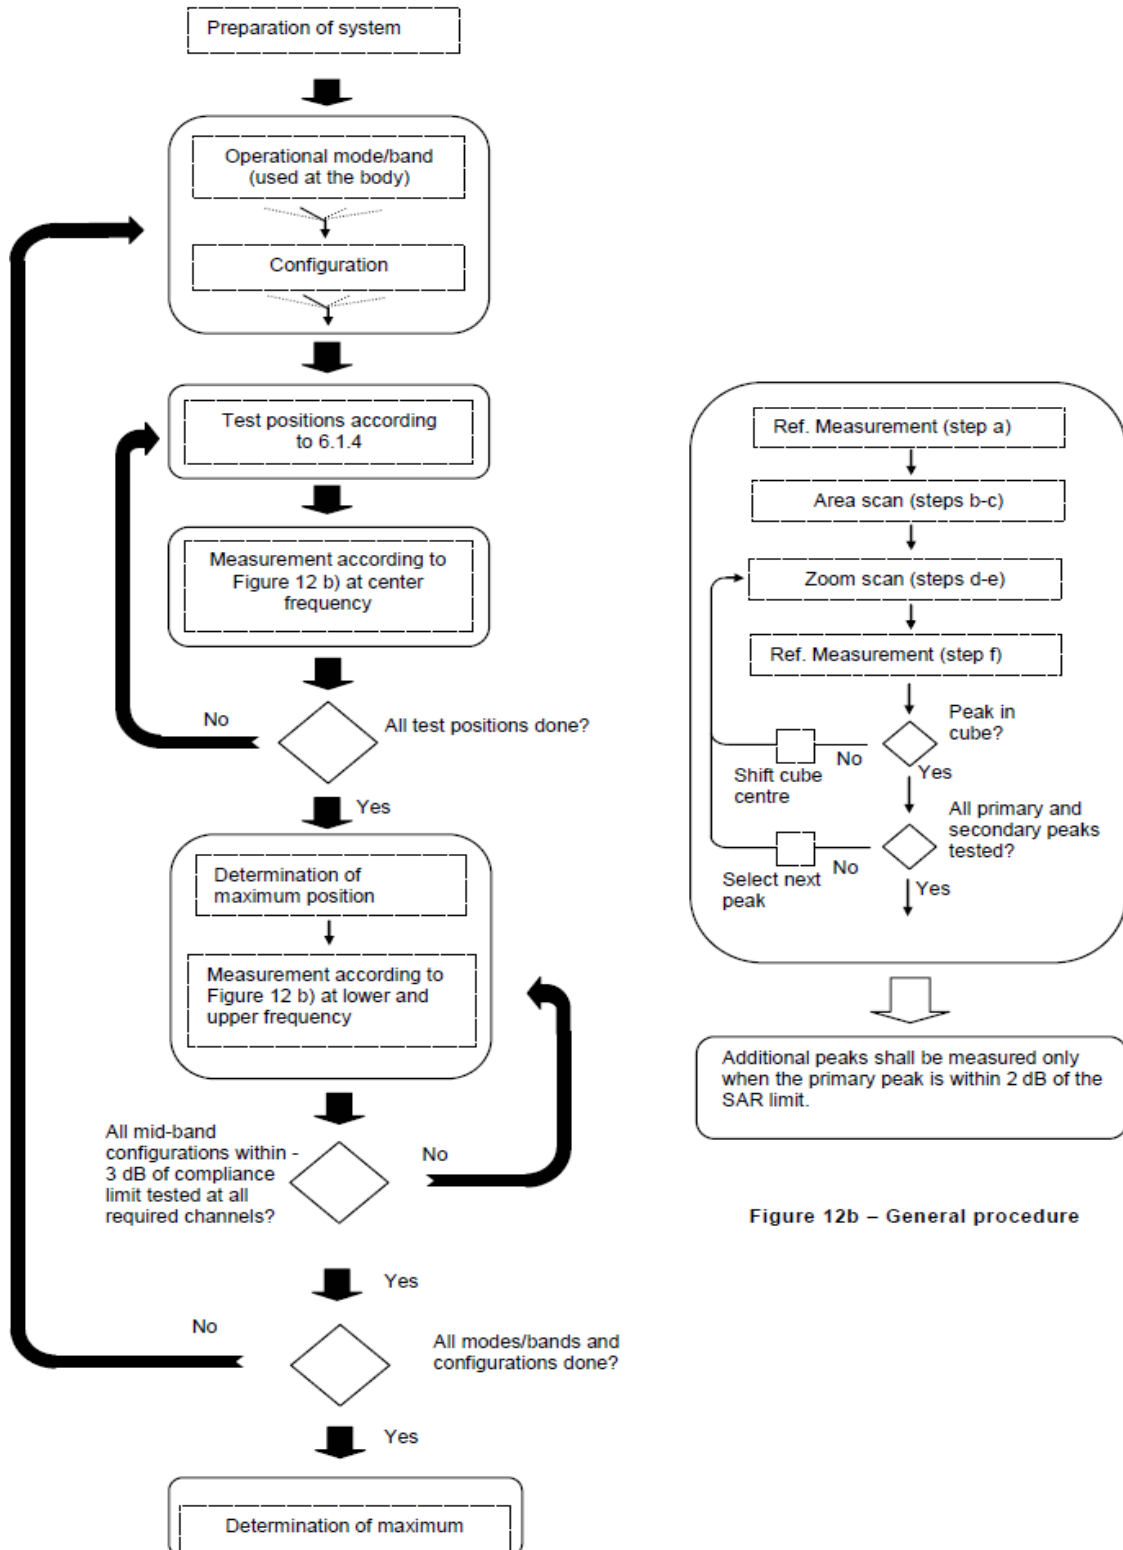


Figure 12b – General procedure

## 16. Test Results List

### 16.1. Test Guidance

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
  - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
  - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1 / (duty cycle)".
  - c. For WWAN: Reported SAR (W/kg) = Measured SAR (W/kg) \* Tune-up Scaling Factor.
  - d. For WLAN/Bluetooth: Reported SAR (W/kg) = Measured SAR (W/kg) \* Duty Cycle scaling factor \* Tune-up scaling factor.
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
  - a.  $\leq 0.8$  W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\leq 100$  MHz
  - b.  $\leq 0.6$  W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
  - c.  $\leq 0.4$  W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is  $\geq 200$  MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is  $\geq 0.8$  W/kg.
4. Per KDB 648474 D04v01r03, when the reported SAR for a body-worn accessory measured without a headset connected to the handset is  $\leq 1.2$  W/kg, SAR testing with a headset connected to the handset is not required.
5. Per KDB 648474 D04v01r03, for smart phones with a display diagonal dimension  $> 15.0$  cm or an overall diagonal dimension  $> 16.0$  cm, when hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR  $> 1.2$  W/kg, however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for tablet modes to compare with the 1.2 W/kg SAR test reduction threshold.
6. Per KDB 248227 D01v02r02, a Wi-Fi device must be configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools for SAR measurement. The test frequencies established using test mode must correspond to the actual channel frequencies required for operations in the U.S. When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92 - 96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. In addition, a periodic



transmission duty factor is required for current generation SAR systems to measure SAR correctly. Unless it is permitted by specific KDB procedures or continuous transmission is specifically restricted by the device, the reported SAR must be scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit. When a device is not capable of sustaining continuous transmission or the output can become nonlinear, and it is limited by hardware design and unable to transmit at higher than 85% duty factor, a periodic duty factor within 15% of the maximum duty factor the device is capable of transmitting should be used. The reported SAR must be scaled to the maximum transmission duty factor to determine compliance. Descriptions of the procedures applied to establish the specific duty factor used for SAR testing are required in SAR reports to support the test results.

7. This device supports power reduction machine according to different using condition, and the power level applied follows below.

| Power Level           | Senor Configuration | Test Position          |
|-----------------------|---------------------|------------------------|
| Full Power            | N/A                 | Head/Hotspot/Body-worn |
| Reduced Power Level 1 | Receiver on         | Head                   |
| Reduced Power Level 2 | Hotspot on          | Hotspot                |



## 16.2. Head SAR Data

### ➤ GSM Head SAR

| Plot No.              | Band/Mode              | Test Position | CH. | Ave. Power (dBm) | Tune-up Limit (dBm) | Tune-up Scaling Factor | Meas. SAR <sub>1g</sub> (W/kg) | Reported SAR <sub>1g</sub> (W/kg) |
|-----------------------|------------------------|---------------|-----|------------------|---------------------|------------------------|--------------------------------|-----------------------------------|
| Full Power            |                        |               |     |                  |                     |                        |                                |                                   |
|                       | GPRS 850 (4TX slots)   | Right Cheek   | 189 | 28.47            | 29.00               | 1.130                  | 0.201                          | 0.227                             |
|                       | GPRS 850 (4TX slots)   | Right Tilt    | 189 | 28.47            | 29.00               | 1.130                  | 0.101                          | 0.114                             |
| 1#                    | GPRS 850 (4TX slots)   | Left Cheek    | 189 | 28.47            | 29.00               | 1.130                  | 0.219                          | 0.247                             |
|                       | GPRS 850 (4TX slots)   | Left Tilt     | 189 | 28.47            | 29.00               | 1.130                  | 0.134                          | 0.151                             |
| Reduced Power Level 1 |                        |               |     |                  |                     |                        |                                |                                   |
| 2#                    | GPRS 1900 (4 TX slots) | Right Cheek   | 661 | 18.83            | 19.50               | 1.167                  | 0.368                          | 0.429                             |
|                       | GPRS 1900 (4 TX slots) | Right Tilt    | 661 | 18.83            | 19.50               | 1.167                  | 0.301                          | 0.351                             |
|                       | GPRS 1900 (4 TX slots) | Left Cheek    | 661 | 18.83            | 19.50               | 1.167                  | 0.256                          | 0.299                             |
|                       | GPRS 1900 (4 TX slots) | Left Tilt     | 661 | 18.83            | 19.50               | 1.167                  | 0.211                          | 0.246                             |

### ➤ WCDMA Head SAR

| Plot No.              | Band/Mode            | Test Position | CH.  | Ave. Power (dBm) | Tune-up Limit (dBm) | Tune-up Scaling Factor | Meas. SAR <sub>1g</sub> (W/kg) | Reported SAR <sub>1g</sub> (W/kg) |
|-----------------------|----------------------|---------------|------|------------------|---------------------|------------------------|--------------------------------|-----------------------------------|
| Reduced Power Level 1 |                      |               |      |                  |                     |                        |                                |                                   |
| 3#                    | Band II/RMC 12.2Kbps | Right Cheek   | 9400 | 15.47            | 16.50               | 1.268                  | 0.474                          | 0.601                             |
|                       | Band II/RMC 12.2Kbps | Right Tilt    | 9400 | 15.47            | 16.50               | 1.268                  | 0.389                          | 0.493                             |
|                       | Band II/RMC 12.2Kbps | Left Cheek    | 9400 | 15.47            | 16.50               | 1.268                  | 0.249                          | 0.316                             |
|                       | Band II/RMC 12.2Kbps | Left Tilt     | 9400 | 15.47            | 16.50               | 1.268                  | 0.335                          | 0.425                             |
| Reduced Power Level 1 |                      |               |      |                  |                     |                        |                                |                                   |
| 4#                    | Band IV/RMC 12.2Kbps | Right Cheek   | 1413 | 17.21            | 18.00               | 1.199                  | 0.491                          | 0.589                             |
|                       | Band IV/RMC 12.2Kbps | Right Tilt    | 1413 | 17.21            | 18.00               | 1.199                  | 0.348                          | 0.417                             |
|                       | Band IV/RMC 12.2Kbps | Left Cheek    | 1413 | 17.21            | 18.00               | 1.199                  | 0.229                          | 0.275                             |
|                       | Band IV/RMC 12.2Kbps | Left Tilt     | 1413 | 17.21            | 18.00               | 1.199                  | 0.214                          | 0.257                             |
| Full Power            |                      |               |      |                  |                     |                        |                                |                                   |
|                       | Band V/RMC 12.2Kbps  | Right Cheek   | 4182 | 22.68            | 23.50               | 1.208                  | 0.164                          | 0.198                             |
|                       | Band V/RMC 12.2Kbps  | Right Tilt    | 4182 | 22.68            | 23.50               | 1.208                  | 0.091                          | 0.110                             |
| 5#                    | Band V/RMC 12.2Kbps  | Left Cheek    | 4182 | 22.68            | 23.50               | 1.208                  | 0.196                          | 0.237                             |
|                       | Band V/RMC 12.2Kbps  | Left Tilt     | 4182 | 22.68            | 23.50               | 1.208                  | 0.114                          | 0.138                             |



➤ **LTE QPSK Head SAR**

| Plot No.              | Band/Mode              | Test Position | CH.   | Ave. Power (dBm) | Tune-up Limit (dBm) | Tune-up Scaling Factor | Meas. SAR <sub>1g</sub> (W/kg) | Reported SAR <sub>1g</sub> (W/kg) |
|-----------------------|------------------------|---------------|-------|------------------|---------------------|------------------------|--------------------------------|-----------------------------------|
| Reduced Power Level 1 |                        |               |       |                  |                     |                        |                                |                                   |
| 6#                    | LTE Band 2/1RB#0 20M   | Right Cheek   | 18900 | 18.67            | 19.50               | 1.211                  | 0.609                          | 0.737                             |
|                       | LTE Band 2/1RB#0 20M   | Right Tilt    | 18900 | 18.67            | 19.50               | 1.211                  | 0.375                          | 0.454                             |
|                       | LTE Band 2/1RB#0 20M   | Left Cheek    | 18900 | 18.67            | 19.50               | 1.211                  | 0.326                          | 0.395                             |
|                       | LTE Band 2/1RB#0 20M   | Left Tilt     | 18900 | 18.67            | 19.50               | 1.211                  | 0.396                          | 0.479                             |
|                       | LTE Band 2/50RB#0 20M  | Right Cheek   | 18900 | 17.55            | 18.50               | 1.245                  | 0.509                          | 0.633                             |
|                       | LTE Band 2/50RB#0 20M  | Right Tilt    | 18900 | 17.55            | 18.50               | 1.245                  | 0.314                          | 0.391                             |
|                       | LTE Band 2/50RB#0 20M  | Left Cheek    | 18900 | 17.55            | 18.50               | 1.245                  | 0.217                          | 0.270                             |
|                       | LTE Band 2/50RB#0 20M  | Left Tilt     | 18900 | 17.55            | 18.50               | 1.245                  | 0.281                          | 0.350                             |
| Full Power            |                        |               |       |                  |                     |                        |                                |                                   |
|                       | LTE Band 5/1RB#0 10M   | Right Cheek   | 20525 | 23.14            | 24.00               | 1.219                  | 0.085                          | 0.104                             |
|                       | LTE Band 5/1RB#0 10M   | Right Tilt    | 20525 | 23.14            | 24.00               | 1.219                  | 0.102                          | 0.124                             |
| 7#                    | LTE Band 5/1RB#0 10M   | Left Cheek    | 20525 | 23.14            | 24.00               | 1.219                  | 0.219                          | 0.267                             |
|                       | LTE Band 5/1RB#0 10M   | Left Tilt     | 20525 | 23.14            | 24.00               | 1.219                  | 0.156                          | 0.190                             |
|                       | LTE Band 5/25RB#0 10M  | Right Cheek   | 20525 | 22.14            | 23.00               | 1.219                  | 0.051                          | 0.062                             |
|                       | LTE Band 5/25RB#0 10M  | Right Tilt    | 20525 | 22.14            | 23.00               | 1.219                  | 0.080                          | 0.098                             |
|                       | LTE Band 5/25RB#0 10M  | Left Cheek    | 20525 | 22.14            | 23.00               | 1.219                  | 0.199                          | 0.243                             |
|                       | LTE Band 5/25RB#0 10M  | Left Tilt     | 20525 | 22.14            | 23.00               | 1.219                  | 0.131                          | 0.160                             |
| Reduced Power Level 1 |                        |               |       |                  |                     |                        |                                |                                   |
|                       | LTE Band 7/1RB#0 20M   | Right Cheek   | 21100 | 12.89            | 14.30               | 1.384                  | 0.212                          | 0.293                             |
| 8#                    | LTE Band 7/1RB#0 20M   | Right Tilt    | 21100 | 12.89            | 14.30               | 1.384                  | 0.431                          | 0.596                             |
|                       | LTE Band 7/1RB#0 20M   | Left Cheek    | 21100 | 12.89            | 14.30               | 1.384                  | 0.151                          | 0.209                             |
|                       | LTE Band 7/1RB#0 20M   | Left Tilt     | 21100 | 12.89            | 14.30               | 1.384                  | 0.104                          | 0.144                             |
|                       | LTE Band 7/50RB#0 20M  | Right Cheek   | 21100 | 11.95            | 13.30               | 1.365                  | 0.182                          | 0.249                             |
|                       | LTE Band 7/50RB#0 20M  | Right Tilt    | 21100 | 11.95            | 13.30               | 1.365                  | 0.386                          | 0.527                             |
|                       | LTE Band 7/50RB#0 20M  | Left Cheek    | 21100 | 11.95            | 13.30               | 1.365                  | 0.126                          | 0.172                             |
|                       | LTE Band 7/50RB#0 20M  | Left Tilt     | 21100 | 11.95            | 13.30               | 1.365                  | 0.080                          | 0.109                             |
| Full Power            |                        |               |       |                  |                     |                        |                                |                                   |
|                       | LTE Band 12/1RB#0 10M  | Right Cheek   | 23095 | 23.71            | 25.00               | 1.346                  | 0.184                          | 0.248                             |
|                       | LTE Band 12/1RB#0 10M  | Right Tilt    | 23095 | 23.71            | 25.00               | 1.346                  | 0.122                          | 0.164                             |
| 9#                    | LTE Band 12/1RB#0 10M  | Left Cheek    | 23095 | 23.71            | 25.00               | 1.346                  | 0.195                          | 0.262                             |
|                       | LTE Band 12/1RB#0 10M  | Left Tilt     | 23095 | 23.71            | 25.00               | 1.346                  | 0.154                          | 0.207                             |
|                       | LTE Band 12/25RB#0 10M | Right Cheek   | 23095 | 22.63            | 24.00               | 1.371                  | 0.184                          | 0.252                             |
|                       | LTE Band 12/25RB#0 10M | Right Tilt    | 23095 | 22.63            | 24.00               | 1.371                  | 0.101                          | 0.138                             |
|                       | LTE Band 12/25RB#0 10M | Left Cheek    | 23095 | 22.63            | 24.00               | 1.371                  | 0.159                          | 0.218                             |



REPORT No.: SZ24100314S01

|                       |                        |             |       |       |       |       |       |       |
|-----------------------|------------------------|-------------|-------|-------|-------|-------|-------|-------|
|                       | LTE Band 12/25RB#0 10M | Left Tilt   | 23095 | 22.63 | 24.00 | 1.371 | 0.123 | 0.169 |
| Full Power            |                        |             |       |       |       |       |       |       |
|                       | LTE Band 13/1RB#0 10M  | Right Cheek | 23230 | 23.06 | 24.00 | 1.242 | 0.052 | 0.065 |
|                       | LTE Band 13/1RB#0 10M  | Right Tilt  | 23230 | 23.06 | 24.00 | 1.242 | 0.091 | 0.113 |
| 10#                   | LTE Band 13/1RB#0 10M  | Left Cheek  | 23230 | 23.06 | 24.00 | 1.242 | 0.217 | 0.269 |
|                       | LTE Band 13/1RB#0 10M  | Left Tilt   | 23230 | 23.06 | 24.00 | 1.242 | 0.093 | 0.115 |
|                       | LTE Band 13/25RB#0 10M | Right Cheek | 23230 | 22.10 | 23.00 | 1.230 | 0.042 | 0.052 |
|                       | LTE Band 13/25RB#0 10M | Right Tilt  | 23230 | 22.10 | 23.00 | 1.230 | 0.072 | 0.088 |
|                       | LTE Band 13/25RB#0 10M | Left Cheek  | 23230 | 22.10 | 23.00 | 1.230 | 0.173 | 0.213 |
|                       | LTE Band 13/25RB#0 10M | Left Tilt   | 23230 | 22.10 | 23.00 | 1.230 | 0.073 | 0.090 |
| Full Power            |                        |             |       |       |       |       |       |       |
|                       | LTE Band 38/1RB#0 20M  | Right Cheek | 38000 | 18.68 | 19.80 | 1.294 | 0.452 | 0.588 |
| 11#                   | LTE Band 38/1RB#0 20M  | Right Tilt  | 38000 | 18.68 | 19.80 | 1.294 | 0.608 | 0.792 |
|                       | LTE Band 38/1RB#0 20M  | Left Cheek  | 38000 | 18.68 | 19.80 | 1.294 | 0.248 | 0.323 |
|                       | LTE Band 38/1RB#0 20M  | Left Tilt   | 38000 | 18.68 | 19.80 | 1.294 | 0.279 | 0.363 |
|                       | LTE Band 38/50RB#0 20M | Right Cheek | 38150 | 17.79 | 18.80 | 1.262 | 0.429 | 0.545 |
|                       | LTE Band 38/50RB#0 20M | Right Tilt  | 38150 | 17.79 | 18.80 | 1.262 | 0.497 | 0.631 |
|                       | LTE Band 38/50RB#0 20M | Left Cheek  | 38150 | 17.79 | 18.80 | 1.262 | 0.195 | 0.248 |
|                       | LTE Band 38/50RB#0 20M | Left Tilt   | 38150 | 17.79 | 18.80 | 1.262 | 0.203 | 0.257 |
| Reduced Power Level 1 |                        |             |       |       |       |       |       |       |
|                       | LTE Band 40/1RB#0 10M  | Right Cheek | 38750 | 17.22 | 18.00 | 1.197 | 0.248 | 0.298 |
|                       | LTE Band 40/1RB#0 10M  | Right Tilt  | 38750 | 17.22 | 18.00 | 1.197 | 0.395 | 0.476 |
|                       | LTE Band 40/1RB#0 10M  | Left Cheek  | 38750 | 17.22 | 18.00 | 1.197 | 0.139 | 0.167 |
|                       | LTE Band 40/1RB#0 10M  | Left Tilt   | 38750 | 17.22 | 18.00 | 1.197 | 0.157 | 0.189 |
|                       | LTE Band 40/25RB#0 10M | Right Cheek | 38750 | 15.70 | 16.50 | 1.202 | 0.207 | 0.250 |
|                       | LTE Band 40/25RB#0 10M | Right Tilt  | 38750 | 15.70 | 16.50 | 1.202 | 0.364 | 0.440 |
|                       | LTE Band 40/25RB#0 10M | Left Cheek  | 38750 | 15.70 | 16.50 | 1.202 | 0.175 | 0.212 |
|                       | LTE Band 40/25RB#0 10M | Left Tilt   | 38750 | 15.70 | 16.50 | 1.202 | 0.252 | 0.304 |
| Reduced Power Level 1 |                        |             |       |       |       |       |       |       |
|                       | LTE Band 40/1RB#0 10M  | Right Cheek | 39200 | 17.25 | 18.00 | 1.189 | 0.363 | 0.434 |
| 12#                   | LTE Band 40/1RB#0 10M  | Right Tilt  | 39200 | 17.25 | 18.00 | 1.189 | 0.479 | 0.573 |
|                       | LTE Band 40/1RB#0 10M  | Left Cheek  | 39200 | 17.25 | 18.00 | 1.189 | 0.215 | 0.257 |
|                       | LTE Band 40/1RB#0 10M  | Left Tilt   | 39200 | 17.25 | 18.00 | 1.189 | 0.277 | 0.331 |
|                       | LTE Band 40/25RB#0 10M | Right Cheek | 39200 | 16.16 | 16.50 | 1.081 | 0.326 | 0.355 |
|                       | LTE Band 40/25RB#0 10M | Right Tilt  | 39200 | 16.16 | 16.50 | 1.081 | 0.429 | 0.467 |
|                       | LTE Band 40/25RB#0 10M | Left Cheek  | 39200 | 16.16 | 16.50 | 1.081 | 0.267 | 0.290 |
|                       | LTE Band 40/25RB#0 10M | Left Tilt   | 39200 | 16.16 | 16.50 | 1.081 | 0.363 | 0.394 |
| Reduced Power Level 1 |                        |             |       |       |       |       |       |       |



REPORT No.: SZ24100314S01

|     |                        |             |        |       |       |       |       |       |
|-----|------------------------|-------------|--------|-------|-------|-------|-------|-------|
| 13# | LTE Band 66/1RB#0 20M  | Right Cheek | 132322 | 15.72 | 16.50 | 1.197 | 0.449 | 0.537 |
|     | LTE Band 66/1RB#0 20M  | Right Tilt  | 132322 | 15.72 | 16.50 | 1.197 | 0.301 | 0.360 |
|     | LTE Band 66/1RB#0 20M  | Left Cheek  | 132322 | 15.72 | 16.50 | 1.197 | 0.361 | 0.432 |
|     | LTE Band 66/1RB#0 20M  | Left Tilt   | 132322 | 15.72 | 16.50 | 1.197 | 0.346 | 0.414 |
|     | LTE Band 66/50RB#0 20M | Right Cheek | 132322 | 14.63 | 15.50 | 1.222 | 0.366 | 0.447 |
|     | LTE Band 66/50RB#0 20M | Right Tilt  | 132322 | 14.63 | 15.50 | 1.222 | 0.215 | 0.263 |
|     | LTE Band 66/50RB#0 20M | Left Cheek  | 132322 | 14.63 | 15.50 | 1.222 | 0.280 | 0.342 |
|     | LTE Band 66/50RB#0 20M | Left Tilt   | 132322 | 14.63 | 15.50 | 1.222 | 0.248 | 0.303 |

➤ **WLAN Head SAR**

| Plot No.              | Band/Mode          | Test Position | CH. | Ave. Power (dBm) | Tune-up Limit (dBm) | Tune-up Scaling Factor | Meas. SAR <sub>1g</sub> (W/kg) | Reported SAR <sub>1g</sub> (W/kg) |
|-----------------------|--------------------|---------------|-----|------------------|---------------------|------------------------|--------------------------------|-----------------------------------|
| Full Power            |                    |               |     |                  |                     |                        |                                |                                   |
|                       | WLAN2.4GHz/802.11b | Right Cheek   | 6   | 17.91            | 18.50               | 1.146                  | 0.205                          | 0.240                             |
|                       | WLAN2.4GHz/802.11b | Right Tilt    | 6   | 17.91            | 18.50               | 1.146                  | 0.235                          | 0.275                             |
| 14#                   | WLAN2.4GHz/802.11b | Left Cheek    | 6   | 17.91            | 18.50               | 1.146                  | 0.561                          | 0.656                             |
|                       | WLAN2.4GHz/802.11b | Left Tilt     | 6   | 17.91            | 18.50               | 1.146                  | 0.490                          | 0.573                             |
| Full Power            |                    |               |     |                  |                     |                        |                                |                                   |
|                       | WLAN5.2GHz/802.11a | Right Cheek   | 36  | 14.99            | 15.50               | 1.125                  | 0.294                          | 0.371                             |
|                       | WLAN5.2GHz/802.11a | Right Tilt    | 36  | 14.99            | 15.50               | 1.125                  | 0.355                          | 0.448                             |
|                       | WLAN5.2GHz/802.11a | Left Cheek    | 36  | 14.99            | 15.50               | 1.125                  | 0.317                          | 0.400                             |
| 15#                   | WLAN5.2GHz/802.11a | Left Tilt     | 36  | 14.99            | 15.50               | 1.125                  | 0.403                          | 0.509                             |
| Full Power            |                    |               |     |                  |                     |                        |                                |                                   |
|                       | WLAN5.3GHz/802.11a | Right Cheek   | 52  | 15.11            | 16.00               | 1.227                  | 0.394                          | 0.543                             |
|                       | WLAN5.3GHz/802.11a | Right Tilt    | 52  | 15.11            | 16.00               | 1.227                  | 0.505                          | 0.695                             |
|                       | WLAN5.3GHz/802.11a | Left Cheek    | 52  | 15.11            | 16.00               | 1.227                  | 0.455                          | 0.627                             |
| 16#                   | WLAN5.3GHz/802.11a | Left Tilt     | 52  | 15.11            | 16.00               | 1.227                  | 0.619                          | 0.852                             |
|                       | WLAN5.3GHz/802.11a | Left Tilt     | 60  | 14.67            | 15.50               | 1.211                  | 0.551                          | 0.748                             |
|                       | WLAN5.3GHz/802.11a | Left Tilt     | 64  | 14.10            | 15.00               | 1.230                  | 0.537                          | 0.741                             |
| Reduced Power Level 1 |                    |               |     |                  |                     |                        |                                |                                   |
|                       | WLAN5.5GHz/802.11a | Right Cheek   | 100 | 10.75            | 11.50               | 1.189                  | 0.424                          | 0.565                             |
|                       | WLAN5.5GHz/802.11a | Right Tilt    | 100 | 10.75            | 11.50               | 1.189                  | 0.499                          | 0.665                             |
|                       | WLAN5.5GHz/802.11a | Left Cheek    | 100 | 10.75            | 11.50               | 1.189                  | 0.464                          | 0.619                             |
| 17#                   | WLAN5.5GHz/802.11a | Left Tilt     | 100 | 10.75            | 11.50               | 1.189                  | 0.621                          | 0.828                             |
|                       | WLAN5.5GHz/802.11a | Left Tilt     | 118 | 10.62            | 11.50               | 1.225                  | 0.511                          | 0.702                             |
|                       | WLAN5.5GHz/802.11a | Left Tilt     | 140 | 9.02             | 10.00               | 1.253                  | 0.532                          | 0.748                             |
| Reduced Power Level 1 |                    |               |     |                  |                     |                        |                                |                                   |
|                       | WLAN5.8GHz/802.11a | Right Cheek   | 165 | 10.87            | 11.50               | 1.156                  | 0.326                          | 0.423                             |



|     |                    |            |     |       |       |       |       |       |
|-----|--------------------|------------|-----|-------|-------|-------|-------|-------|
|     | WLAN5.8GHz/802.11a | Right Tilt | 165 | 10.87 | 11.50 | 1.156 | 0.557 | 0.723 |
|     | WLAN5.8GHz/802.11a | Left Cheek | 165 | 10.87 | 11.50 | 1.156 | 0.461 | 0.598 |
| 18# | WLAN5.8GHz/802.11a | Left Tilt  | 165 | 10.87 | 11.50 | 1.156 | 0.630 | 0.817 |
|     | WLAN5.8GHz/802.11a | Left Tilt  | 149 | 10.21 | 11.00 | 1.199 | 0.582 | 0.783 |
|     | WLAN5.8GHz/802.11a | Left Tilt  | 157 | 9.68  | 10.50 | 1.208 | 0.531 | 0.720 |

**Note:**

1. Per KDB 447498 D01v06, for each exposure position, if the highest output power channel Reported SAR  $\leq 0.8\text{W/kg}$ , other channels SAR testing is not necessary.
2. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required when the measured SAR is  $\geq 0.8\text{W/kg}$ .
3. Per KDB 941225 D05v02r05, 100% RB allocation SAR measurement is not required when the highest reported SAR for 1 RB and 50% RB allocation are  $\leq 0.8\text{ W/kg}$ .
4. Per KDB 248227 D01v02r02, for 802.11b DSSS , when the reported SAR of the highest measured maximum output power channel for the exposure configuration is  $\leq 0.8\text{ W/kg}$ , no further SAR testing is required in that exposure configuration.
5. Per KDB 248227 D01v02r02, OFDM SAR is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is  $\leq 1.2\text{ W/kg}$ .
6. According to KDB 865664 D02v01r02, SAR plot is required for the highest measured SAR in each exposure configuration, wireless mode and frequency band combination.
7. The 2.4G WLAN reported 1g SAR (W/kg) should be scaled with the duty cycle scaling factor 1.021, and 1.122 for WLAN 5GHz 802.11a.



### 16.3. Hotspot SAR Data

#### ➤ GSM Hotspot SAR

| Plot No.              | Band/Mode             | Test Position | CH. | Ave. Power (dBm) | Tune-up Limit (dBm) | Tune-up Scaling Factor | Meas. SAR <sub>1g</sub> (W/kg) | Reported SAR <sub>1g</sub> (W/kg) |
|-----------------------|-----------------------|---------------|-----|------------------|---------------------|------------------------|--------------------------------|-----------------------------------|
| Full Power            |                       |               |     |                  |                     |                        |                                |                                   |
|                       | GPRS 850(4 TX slots)  | Front Side    | 189 | 28.47            | 29.00               | 1.130                  | 0.211                          | 0.238                             |
| 19#                   | GPRS 850(4 TX slots)  | Back Side     | 189 | 28.47            | 29.00               | 1.130                  | 0.310                          | 0.350                             |
|                       | GPRS 850(4 TX slots)  | Left Side     | 189 | 28.47            | 29.00               | 1.130                  | 0.184                          | 0.208                             |
|                       | GPRS 850(4 TX slots)  | Right Side    | 189 | 28.47            | 29.00               | 1.130                  | 0.193                          | 0.218                             |
|                       | GPRS 850(4 TX slots)  | Bottom Side   | 189 | 28.47            | 29.00               | 1.130                  | 0.068                          | 0.077                             |
| Reduced Power Level 2 |                       |               |     |                  |                     |                        |                                |                                   |
|                       | GPRS 1900(4 TX slots) | Front Side    | 661 | 22.33            | 23.00               | 1.167                  | 0.219                          | 0.256                             |
| 20#                   | GPRS 1900(4 TX slots) | Back Side     | 661 | 22.33            | 23.00               | 1.167                  | 0.384                          | 0.448                             |
|                       | GPRS 1900(4 TX slots) | Left Side     | 661 | 22.33            | 23.00               | 1.167                  | 0.222                          | 0.259                             |
|                       | GPRS 1900(4 TX slots) | Top Side      | 661 | 22.33            | 23.00               | 1.167                  | 0.245                          | 0.286                             |

#### ➤ WCDMA Hotspot SAR

| Plot No.              | Band/Mode            | Test Position | CH.  | Ave. Power (dBm) | Tune-up Limit (dBm) | Tune-up Scaling Factor | Meas. SAR <sub>1g</sub> (W/kg) | Reported SAR <sub>1g</sub> (W/kg) |
|-----------------------|----------------------|---------------|------|------------------|---------------------|------------------------|--------------------------------|-----------------------------------|
| Reduced Power Level 2 |                      |               |      |                  |                     |                        |                                |                                   |
|                       | Band II/RMC 12.2Kbps | Front Side    | 9400 | 19.97            | 21.00               | 1.268                  | 0.187                          | 0.237                             |
| 21#                   | Band II/RMC 12.2Kbps | Back Side     | 9400 | 19.97            | 21.00               | 1.268                  | 0.313                          | 0.397                             |
|                       | Band II/RMC 12.2Kbps | Left Side     | 9400 | 19.97            | 21.00               | 1.268                  | 0.151                          | 0.191                             |
|                       | Band II/RMC 12.2Kbps | Top Side      | 9400 | 19.97            | 21.00               | 1.268                  | 0.225                          | 0.285                             |
| Reduced Power Level 2 |                      |               |      |                  |                     |                        |                                |                                   |
|                       | Band IV/RMC 12.2Kbps | Front Side    | 1413 | 20.21            | 21.00               | 1.199                  | 0.172                          | 0.206                             |
| 22#                   | Band IV/RMC 12.2Kbps | Back Side     | 1413 | 20.21            | 21.00               | 1.199                  | 0.260                          | 0.312                             |
|                       | Band IV/RMC 12.2Kbps | Left Side     | 1413 | 20.21            | 21.00               | 1.199                  | 0.165                          | 0.198                             |
|                       | Band IV/RMC 12.2Kbps | Top Side      | 1413 | 20.21            | 21.00               | 1.199                  | 0.124                          | 0.149                             |
| Full Power            |                      |               |      |                  |                     |                        |                                |                                   |
|                       | Band V/RMC 12.2Kbps  | Front Side    | 4182 | 22.68            | 23.50               | 1.208                  | 0.149                          | 0.180                             |
| 23#                   | Band V/RMC 12.2Kbps  | Back Side     | 4182 | 22.68            | 23.50               | 1.208                  | 0.236                          | 0.285                             |
|                       | Band V/RMC 12.2Kbps  | Left Side     | 4182 | 22.68            | 23.50               | 1.208                  | 0.143                          | 0.173                             |
|                       | Band V/RMC 12.2Kbps  | Right Side    | 4182 | 22.68            | 23.50               | 1.208                  | 0.136                          | 0.164                             |
|                       | Band V/RMC 12.2Kbps  | Bottom Side   | 4182 | 22.68            | 23.50               | 1.208                  | 0.047                          | 0.057                             |



## ➤ LTE QPSK Hotspot SAR

| Plot No.              | Band/Mode              | Test Position | CH.   | Ave. Power (dBm) | Tune-up Limit (dBm) | Tune-up Scaling Factor | Meas. SAR <sub>1g</sub> (W/kg) | Reported SAR <sub>1g</sub> (W/kg) |
|-----------------------|------------------------|---------------|-------|------------------|---------------------|------------------------|--------------------------------|-----------------------------------|
| Full Power            |                        |               |       |                  |                     |                        |                                |                                   |
|                       | LTE Band 2/1RB#0 20M   | Front Side    | 18900 | 21.67            | 22.50               | 1.211                  | 0.288                          | 0.349                             |
|                       | LTE Band 2/1RB#0 20M   | Back Side     | 18900 | 21.67            | 22.50               | 1.211                  | 0.357                          | 0.432                             |
|                       | LTE Band 2/1RB#0 20M   | Left Side     | 18900 | 21.67            | 22.50               | 1.211                  | 0.282                          | 0.341                             |
|                       | LTE Band 2/1RB#0 20M   | Top Side      | 18900 | 21.67            | 22.50               | 1.211                  | 0.316                          | 0.383                             |
|                       | LTE Band 2/50RB#0 20M  | Front Side    | 18900 | 20.55            | 21.50               | 1.245                  | 0.325                          | 0.404                             |
| 24#                   | LTE Band 2/50RB#0 20M  | Back Side     | 18900 | 20.55            | 21.50               | 1.245                  | 0.452                          | 0.563                             |
|                       | LTE Band 2/50RB#0 20M  | Left Side     | 18900 | 20.55            | 21.50               | 1.245                  | 0.353                          | 0.439                             |
|                       | LTE Band 2/50RB#0 20M  | Top Side      | 18900 | 20.55            | 21.50               | 1.245                  | 0.418                          | 0.520                             |
| Full Power            |                        |               |       |                  |                     |                        |                                |                                   |
|                       | LTE Band 5/1RB#0 10M   | Front Side    | 20525 | 23.14            | 24.00               | 1.219                  | 0.171                          | 0.208                             |
| 25#                   | LTE Band 5/1RB#0 10M   | Back Side     | 20525 | 23.14            | 24.00               | 1.219                  | 0.269                          | 0.328                             |
|                       | LTE Band 5/1RB#0 10M   | Left Side     | 20525 | 23.14            | 24.00               | 1.219                  | 0.170                          | 0.207                             |
|                       | LTE Band 5/1RB#0 10M   | Right Side    | 20525 | 23.14            | 24.00               | 1.219                  | 0.152                          | 0.185                             |
|                       | LTE Band 5/1RB#0 10M   | Bottom Side   | 20525 | 23.14            | 24.00               | 1.219                  | 0.052                          | 0.063                             |
|                       | LTE Band 5/25RB#0 10M  | Front Side    | 20525 | 22.14            | 23.00               | 1.219                  | 0.134                          | 0.163                             |
|                       | LTE Band 5/25RB#0 10M  | Back Side     | 20525 | 22.14            | 23.00               | 1.219                  | 0.194                          | 0.236                             |
|                       | LTE Band 5/25RB#0 10M  | Left Side     | 20525 | 22.14            | 23.00               | 1.219                  | 0.136                          | 0.166                             |
|                       | LTE Band 5/25RB#0 10M  | Right Side    | 20525 | 22.14            | 23.00               | 1.219                  | 0.123                          | 0.150                             |
|                       | LTE Band 5/25RB#0 10M  | Bottom Side   | 20525 | 22.14            | 23.00               | 1.219                  | 0.042                          | 0.051                             |
| Reduced Power Level 2 |                        |               |       |                  |                     |                        |                                |                                   |
|                       | LTE Band 7/1RB#0 20M   | Front Side    | 21100 | 16.89            | 18.30               | 1.384                  | 0.271                          | 0.375                             |
| 26#                   | LTE Band 7/1RB#0 20M   | Back Side     | 21100 | 16.89            | 18.30               | 1.384                  | 0.632                          | 0.874                             |
|                       | LTE Band 7/1RB#0 20M   | Left Side     | 21100 | 16.89            | 18.30               | 1.384                  | 0.133                          | 0.184                             |
|                       | LTE Band 7/1RB#0 20M   | Top Side      | 21100 | 16.89            | 18.30               | 1.384                  | 0.567                          | 0.784                             |
|                       | LTE Band 7/1RB#0 20M   | Back Side     | 20850 | 16.78            | 18.30               | 1.419                  | 0.608                          | 0.863                             |
|                       | LTE Band 7/1RB#0 20M   | Back Side     | 21350 | 16.84            | 18.30               | 1.400                  | 0.611                          | 0.855                             |
|                       | LTE Band 7/50RB#0 20M  | Front Side    | 21100 | 15.95            | 17.30               | 1.365                  | 0.233                          | 0.317                             |
|                       | LTE Band 7/50RB#0 20M  | Back Side     | 21100 | 15.95            | 17.30               | 1.365                  | 0.574                          | 0.783                             |
|                       | LTE Band 7/50RB#0 20M  | Left Side     | 21100 | 15.95            | 17.30               | 1.365                  | 0.110                          | 0.150                             |
|                       | LTE Band 7/50RB#0 20M  | Top Side      | 21100 | 15.95            | 17.30               | 1.365                  | 0.566                          | 0.772                             |
|                       | LTE Band 7/100RB#0 20M | Back Side     | 21100 | 14.64            | 16.30               | 1.466                  | 0.532                          | 0.780                             |
| Full Power            |                        |               |       |                  |                     |                        |                                |                                   |
|                       | LTE Band 12/1RB#0 10M  | Front Side    | 23095 | 23.71            | 25.00               | 1.346                  | 0.203                          | 0.273                             |
| 27#                   | LTE Band 12/1RB#0 10M  | Back Side     | 23095 | 23.71            | 25.00               | 1.346                  | 0.364                          | 0.490                             |



|                       |                        |             |       |       |       |       |       |       |
|-----------------------|------------------------|-------------|-------|-------|-------|-------|-------|-------|
|                       | LTE Band 12/1RB#0 10M  | Left Side   | 23095 | 23.71 | 25.00 | 1.346 | 0.214 | 0.288 |
|                       | LTE Band 12/1RB#0 10M  | Right Side  | 23095 | 23.71 | 25.00 | 1.346 | 0.251 | 0.338 |
|                       | LTE Band 12/1RB#0 10M  | Bottom Side | 23095 | 23.71 | 25.00 | 1.346 | 0.050 | 0.067 |
|                       | LTE Band 12/25RB#0 10M | Front Side  | 23095 | 22.63 | 24.00 | 1.371 | 0.165 | 0.226 |
|                       | LTE Band 12/25RB#0 10M | Back Side   | 23095 | 22.63 | 24.00 | 1.371 | 0.312 | 0.428 |
|                       | LTE Band 12/25RB#0 10M | Left Side   | 23095 | 22.63 | 24.00 | 1.371 | 0.175 | 0.240 |
|                       | LTE Band 12/25RB#0 10M | Right Side  | 23095 | 22.63 | 24.00 | 1.371 | 0.199 | 0.273 |
|                       | LTE Band 12/25RB#0 10M | Bottom Side | 23095 | 22.63 | 24.00 | 1.371 | 0.042 | 0.058 |
| Full Power            |                        |             |       |       |       |       |       |       |
|                       | LTE Band 13/1RB#0 10M  | Front Side  | 23230 | 23.06 | 24.00 | 1.242 | 0.154 | 0.191 |
| 28#                   | LTE Band 13/1RB#0 10M  | Back Side   | 23230 | 23.06 | 24.00 | 1.242 | 0.277 | 0.344 |
|                       | LTE Band 13/1RB#0 10M  | Left Side   | 23230 | 23.06 | 24.00 | 1.242 | 0.180 | 0.223 |
|                       | LTE Band 13/1RB#0 10M  | Right Side  | 23230 | 23.06 | 24.00 | 1.242 | 0.150 | 0.186 |
|                       | LTE Band 13/1RB#0 10M  | Bottom Side | 23230 | 23.06 | 24.00 | 1.242 | 0.046 | 0.057 |
|                       | LTE Band 13/25RB#0 10M | Front Side  | 23230 | 22.10 | 23.00 | 1.230 | 0.121 | 0.149 |
|                       | LTE Band 13/25RB#0 10M | Back Side   | 23230 | 22.10 | 23.00 | 1.230 | 0.231 | 0.284 |
|                       | LTE Band 13/25RB#0 10M | Left Side   | 23230 | 22.10 | 23.00 | 1.230 | 0.139 | 0.171 |
|                       | LTE Band 13/25RB#0 10M | Right Side  | 23230 | 22.10 | 23.00 | 1.230 | 0.119 | 0.146 |
|                       | LTE Band 13/25RB#0 10M | Bottom Side | 23230 | 22.10 | 23.00 | 1.230 | 0.044 | 0.054 |
| Reduced Power Level 2 |                        |             |       |       |       |       |       |       |
|                       | LTE Band 38/1RB#0 20M  | Front Side  | 38000 | 20.78 | 21.80 | 1.265 | 0.170 | 0.216 |
| 29#                   | LTE Band 38/1RB#0 20M  | Back Side   | 38000 | 20.78 | 21.80 | 1.265 | 0.547 | 0.696 |
|                       | LTE Band 38/1RB#0 20M  | Left Side   | 38000 | 20.78 | 21.80 | 1.265 | 0.109 | 0.139 |
|                       | LTE Band 38/1RB#0 20M  | Top Side    | 38000 | 20.78 | 21.80 | 1.265 | 0.368 | 0.468 |
|                       | LTE Band 38/50RB#0 20M | Front Side  | 38150 | 19.79 | 20.80 | 1.262 | 0.203 | 0.258 |
|                       | LTE Band 38/50RB#0 20M | Back Side   | 38150 | 19.79 | 20.80 | 1.262 | 0.383 | 0.486 |
|                       | LTE Band 38/50RB#0 20M | Left Side   | 38150 | 19.79 | 20.80 | 1.262 | 0.132 | 0.168 |
|                       | LTE Band 38/50RB#0 20M | Top Side    | 38150 | 19.79 | 20.80 | 1.262 | 0.445 | 0.565 |
| Reduced Power Level 2 |                        |             |       |       |       |       |       |       |
|                       | LTE Band 40/1RB#0 10M  | Front Side  | 38750 | 20.72 | 22.00 | 1.343 | 0.143 | 0.193 |
|                       | LTE Band 40/1RB#0 10M  | Back Side   | 38750 | 20.72 | 22.00 | 1.343 | 0.474 | 0.640 |
|                       | LTE Band 40/1RB#0 10M  | Left Side   | 38750 | 20.72 | 22.00 | 1.343 | 0.058 | 0.078 |
|                       | LTE Band 40/1RB#0 10M  | Top Side    | 38750 | 20.72 | 22.00 | 1.343 | 0.489 | 0.661 |
|                       | LTE Band 40/25RB#0 10M | Front Side  | 38750 | 19.70 | 20.50 | 1.202 | 0.185 | 0.224 |
|                       | LTE Band 40/25RB#0 10M | Back Side   | 38750 | 19.70 | 20.50 | 1.202 | 0.575 | 0.695 |
|                       | LTE Band 40/25RB#0 10M | Left Side   | 38750 | 19.70 | 20.50 | 1.202 | 0.075 | 0.091 |
|                       | LTE Band 40/25RB#0 10M | Top Side    | 38750 | 19.70 | 20.50 | 1.202 | 0.527 | 0.637 |
| Reduced Power Level 2 |                        |             |       |       |       |       |       |       |



|                       |                        |            |        |       |       |       |       |       |
|-----------------------|------------------------|------------|--------|-------|-------|-------|-------|-------|
|                       | LTE Band 40/1RB#0 10M  | Front Side | 39200  | 20.75 | 21.50 | 1.189 | 0.174 | 0.208 |
|                       | LTE Band 40/1RB#0 10M  | Back Side  | 39200  | 20.75 | 21.50 | 1.189 | 0.597 | 0.714 |
|                       | LTE Band 40/1RB#0 10M  | Left Side  | 39200  | 20.75 | 21.50 | 1.189 | 0.060 | 0.072 |
|                       | LTE Band 40/1RB#0 10M  | Top Side   | 39200  | 20.75 | 21.50 | 1.189 | 0.566 | 0.677 |
|                       | LTE Band 40/25RB#0 10M | Front Side | 39200  | 19.66 | 20.50 | 1.213 | 0.215 | 0.262 |
| 30#                   | LTE Band 40/25RB#0 10M | Back Side  | 39200  | 19.66 | 20.50 | 1.213 | 0.688 | 0.840 |
|                       | LTE Band 40/25RB#0 10M | Left Side  | 39200  | 19.66 | 20.50 | 1.213 | 0.077 | 0.094 |
|                       | LTE Band 40/25RB#0 10M | Top Side   | 39200  | 19.66 | 20.50 | 1.213 | 0.660 | 0.806 |
| Reduced Power Level 2 |                        |            |        |       |       |       |       |       |
|                       | LTE Band 66/1RB#0 20M  | Front Side | 132322 | 21.72 | 23.00 | 1.343 | 0.282 | 0.379 |
|                       | LTE Band 66/1RB#0 20M  | Back Side  | 132322 | 21.72 | 23.00 | 1.343 | 0.540 | 0.725 |
|                       | LTE Band 66/1RB#0 20M  | Left Side  | 132322 | 21.72 | 23.00 | 1.343 | 0.228 | 0.306 |
|                       | LTE Band 66/1RB#0 20M  | Top Side   | 132322 | 21.72 | 23.00 | 1.343 | 0.269 | 0.361 |
|                       | LTE Band 66/50RB#0 20M | Front Side | 132322 | 20.63 | 21.50 | 1.222 | 0.373 | 0.456 |
| 31#                   | LTE Band 66/50RB#0 20M | Back Side  | 132322 | 20.63 | 21.50 | 1.222 | 0.616 | 0.753 |
|                       | LTE Band 66/50RB#0 20M | Left Side  | 132322 | 20.63 | 21.50 | 1.222 | 0.290 | 0.354 |
|                       | LTE Band 66/50RB#0 20M | Top Side   | 132322 | 20.63 | 21.50 | 1.222 | 0.355 | 0.434 |

### ➤ WLAN/BT Hotspot SAR

| Plot No.   | Band/Mode          | Test Position | CH. | Ave. Power (dBm) | Tune-up Limit (dBm) | Tune-up Scaling Factor | Meas. SAR <sub>1g</sub> (W/kg) | Reported SAR <sub>1g</sub> (W/kg) |
|------------|--------------------|---------------|-----|------------------|---------------------|------------------------|--------------------------------|-----------------------------------|
| Full Power |                    |               |     |                  |                     |                        |                                |                                   |
|            | WLAN2.4GHz/802.11b | Front Side    | 6   | 17.91            | 18.50               | 1.146                  | 0.079                          | 0.092                             |
| 32#        | WLAN2.4GHz/802.11b | Back Side     | 6   | 17.91            | 18.50               | 1.146                  | 0.162                          | 0.189                             |
|            | WLAN2.4GHz/802.11b | Right Side    | 6   | 17.91            | 18.50               | 1.146                  | 0.087                          | 0.102                             |
|            | WLAN2.4GHz/802.11b | Top Side      | 6   | 17.91            | 18.50               | 1.146                  | 0.114                          | 0.133                             |
| Full Power |                    |               |     |                  |                     |                        |                                |                                   |
|            | WLAN5.2GHz/802.11a | Front Side    | 36  | 14.99            | 15.50               | 1.125                  | 0.087                          | 0.110                             |
|            | WLAN5.2GHz/802.11a | Back Side     | 36  | 14.99            | 15.50               | 1.125                  | 0.123                          | 0.155                             |
|            | WLAN5.2GHz/802.11a | Right Side    | 36  | 14.99            | 15.50               | 1.125                  | 0.105                          | 0.132                             |
| 33#        | WLAN5.2GHz/802.11a | Top Side      | 36  | 14.99            | 15.50               | 1.125                  | 0.198                          | 0.250                             |
| Full Power |                    |               |     |                  |                     |                        |                                |                                   |
|            | WLAN5.8GHz/802.11a | Front Side    | 165 | 14.87            | 15.50               | 1.156                  | 0.119                          | 0.154                             |
|            | WLAN5.8GHz/802.11a | Back Side     | 165 | 14.87            | 15.50               | 1.156                  | 0.191                          | 0.248                             |
|            | WLAN5.8GHz/802.11a | Right Side    | 165 | 14.87            | 15.50               | 1.156                  | 0.163                          | 0.211                             |
| 34#        | WLAN5.8GHz/802.11a | Top Side      | 165 | 14.87            | 15.50               | 1.156                  | 0.509                          | 0.660                             |
| Full Power |                    |               |     |                  |                     |                        |                                |                                   |
|            | Bluetooth/DH5      | Front Side    | 78  | 8.62             | 9.50                | 1.225                  | 0.038                          | 0.049                             |



|     |               |            |    |      |      |       |       |       |
|-----|---------------|------------|----|------|------|-------|-------|-------|
| 35# | Bluetooth/DH5 | Back Side  | 78 | 8.62 | 9.50 | 1.225 | 0.081 | 0.106 |
|     | Bluetooth/DH5 | Right Side | 78 | 8.62 | 9.50 | 1.225 | 0.053 | 0.069 |
|     | Bluetooth/DH5 | Top Side   | 78 | 8.62 | 9.50 | 1.225 | 0.053 | 0.069 |

**Note:**

1. The 2.4G WLAN reported 1g SAR (W/kg) should be scaled with the duty cycle scaling factor 1.004 and 1.122 for WLAN 5GHz 802.11a.
2. According to 2016 Oct. TCB workshop for Bluetooth SAR consideration and the theoretical duty cycle is 83.3%, therefore the actual duty cycle will be scaled up to the theoretical value of Bluetooth reported SAR calculation. The duty cycle of Bluetooth is 78.29 %, Therefore the duty cycle scaling factor 1.064 should be used to calculating the reported SAR.

## 16.4. Body-worn SAR Data

### ➤ GSM Body-worn SAR

| Plot No.   | Band/Mode             | Test Position | CH. | Ave. Power (dBm) | Tune-up Limit (dBm) | Tune-up Scaling Factor | Meas. SAR <sub>1g</sub> (W/kg) | Reported SAR <sub>1g</sub> (W/kg) |
|------------|-----------------------|---------------|-----|------------------|---------------------|------------------------|--------------------------------|-----------------------------------|
| Full Power |                       |               |     |                  |                     |                        |                                |                                   |
|            | GPRS 850(4 TX slots)  | Front Side    | 189 | 28.47            | 29.00               | 1.130                  | 0.181                          | 0.204                             |
| 37#        | GPRS 850(4 TX slots)  | Back Side     | 189 | 28.47            | 29.00               | 1.130                  | 0.262                          | 0.296                             |
| Full Power |                       |               |     |                  |                     |                        |                                |                                   |
|            | GPRS 1900(4 TX slots) | Front Side    | 661 | 24.33            | 25.00               | 1.167                  | 0.239                          | 0.279                             |
| 38#        | GPRS 1900(4 TX slots) | Back Side     | 661 | 24.33            | 25.00               | 1.167                  | 0.368                          | 0.429                             |

### ➤ WCDMA Body-worn SAR

| Plot No.   | Band/Mode            | Test Position | CH.  | Ave. Power (dBm) | Tune-up Limit (dBm) | Tune-up Scaling Factor | Meas. SAR <sub>1g</sub> (W/kg) | Reported SAR <sub>1g</sub> (W/kg) |
|------------|----------------------|---------------|------|------------------|---------------------|------------------------|--------------------------------|-----------------------------------|
| Full Power |                      |               |      |                  |                     |                        |                                |                                   |
|            | Band II/RMC 12.2Kbps | Front Side    | 9400 | 21.97            | 23.00               | 1.268                  | 0.173                          | 0.219                             |
| 39#        | Band II/RMC 12.2Kbps | Back Side     | 9400 | 21.97            | 23.00               | 1.268                  | 0.254                          | 0.322                             |
| Full Power |                      |               |      |                  |                     |                        |                                |                                   |
|            | Band IV/RMC 12.2Kbps | Front Side    | 1413 | 22.21            | 23.00               | 1.199                  | 0.138                          | 0.166                             |
| 40#        | Band IV/RMC 12.2Kbps | Back Side     | 1413 | 22.21            | 23.00               | 1.199                  | 0.168                          | 0.202                             |
| Full Power |                      |               |      |                  |                     |                        |                                |                                   |
|            | Band V/RMC 12.2Kbps  | Front Side    | 4182 | 22.68            | 23.50               | 1.208                  | 0.141                          | 0.170                             |
| 41#        | Band V/RMC 12.2Kbps  | Back Side     | 4182 | 22.68            | 23.50               | 1.208                  | 0.202                          | 0.244                             |



## ➤ LTE QPSK Body-worn SAR

| Plot No.   | Band/Mode              | Test Position | CH.   | Ave. Power (dBm) | Tune-up Limit (dBm) | Tune-up Scaling Factor | Meas. SAR <sub>1g</sub> (W/kg) | Reported SAR <sub>1g</sub> (W/kg) |
|------------|------------------------|---------------|-------|------------------|---------------------|------------------------|--------------------------------|-----------------------------------|
| Full Power |                        |               |       |                  |                     |                        |                                |                                   |
|            | LTE Band 2/1RB#0 20M   | Front Side    | 18900 | 23.67            | 24.50               | 1.211                  | 0.235                          | 0.284                             |
| 42#        | LTE Band 2/1RB#0 20M   | Back Side     | 18900 | 23.67            | 24.50               | 1.211                  | 0.362                          | 0.438                             |
|            | LTE Band 2/50RB#0 20M  | Front Side    | 18900 | 22.55            | 23.50               | 1.245                  | 0.179                          | 0.223                             |
|            | LTE Band 2/50RB#0 20M  | Back Side     | 18900 | 22.55            | 23.50               | 1.245                  | 0.285                          | 0.355                             |
| Full Power |                        |               |       |                  |                     |                        |                                |                                   |
|            | LTE Band 5/1RB#0 10M   | Front Side    | 20525 | 23.14            | 24.00               | 1.219                  | 0.128                          | 0.156                             |
| 43#        | LTE Band 5/1RB#0 10M   | Back Side     | 20525 | 23.14            | 24.00               | 1.219                  | 0.167                          | 0.204                             |
|            | LTE Band 5/25RB#0 10M  | Front Side    | 20525 | 22.14            | 23.00               | 1.219                  | 0.092                          | 0.112                             |
|            | LTE Band 5/25RB#0 10M  | Back Side     | 20525 | 22.14            | 23.00               | 1.219                  | 0.071                          | 0.087                             |
| Full Power |                        |               |       |                  |                     |                        |                                |                                   |
|            | LTE Band 7/1RB#0 20M   | Front Side    | 21100 | 18.39            | 19.80               | 1.384                  | 0.573                          | 0.793                             |
| 44#        | LTE Band 7/1RB#0 20M   | Back Side     | 21100 | 18.39            | 19.80               | 1.384                  | 0.728                          | 1.007                             |
|            | LTE Band 7/1RB#0 20M   | Front Side    | 20850 | 18.28            | 19.80               | 1.419                  | 0.650                          | 0.922                             |
|            | LTE Band 7/1RB#0 20M   | Back Side     | 21350 | 18.34            | 19.80               | 1.400                  | 0.389                          | 0.544                             |
|            | LTE Band 7/50RB#0 20M  | Front Side    | 21100 | 17.45            | 18.80               | 1.365                  | 0.312                          | 0.426                             |
|            | LTE Band 7/50RB#0 20M  | Back Side     | 21100 | 17.45            | 18.80               | 1.365                  | 0.582                          | 0.794                             |
| Full Power |                        |               |       |                  |                     |                        |                                |                                   |
|            | LTE Band 12/1RB#0 10M  | Front Side    | 23095 | 23.71            | 25.00               | 1.346                  | 0.144                          | 0.194                             |
| 45#        | LTE Band 12/1RB#0 10M  | Back Side     | 23095 | 23.71            | 25.00               | 1.346                  | 0.311                          | 0.419                             |
|            | LTE Band 12/25RB#0 10M | Front Side    | 23095 | 22.63            | 24.00               | 1.371                  | 0.137                          | 0.188                             |
|            | LTE Band 12/25RB#0 10M | Back Side     | 23095 | 22.63            | 24.00               | 1.371                  | 0.253                          | 0.347                             |
| Full Power |                        |               |       |                  |                     |                        |                                |                                   |
|            | LTE Band 13/1RB#0 10M  | Front Side    | 23230 | 23.06            | 24.00               | 1.242                  | 0.192                          | 0.238                             |
| 46#        | LTE Band 13/1RB#0 10M  | Back Side     | 23230 | 23.06            | 24.00               | 1.242                  | 0.250                          | 0.310                             |
|            | LTE Band 13/25RB#0 10M | Front Side    | 23230 | 22.10            | 23.00               | 1.230                  | 0.137                          | 0.169                             |
|            | LTE Band 13/25RB#0 10M | Back Side     | 23230 | 22.10            | 23.00               | 1.230                  | 0.185                          | 0.228                             |
| Full Power |                        |               |       |                  |                     |                        |                                |                                   |
|            | LTE Band 38/1RB#0 20M  | Front Side    | 38000 | 22.78            | 23.80               | 1.265                  | 0.207                          | 0.263                             |
| 47#        | LTE Band 38/1RB#0 20M  | Back Side     | 38000 | 22.78            | 23.80               | 1.265                  | 0.473                          | 0.602                             |
|            | LTE Band 38/50RB#0 20M | Front Side    | 38150 | 21.79            | 22.80               | 1.262                  | 0.148                          | 0.188                             |
|            | LTE Band 38/50RB#0 20M | Back Side     | 38150 | 21.79            | 22.80               | 1.262                  | 0.428                          | 0.543                             |
| Full Power |                        |               |       |                  |                     |                        |                                |                                   |
|            | LTE Band 40/1RB#0 10M  | Front Side    | 38750 | 22.72            | 24.00               | 1.343                  | 0.170                          | 0.230                             |
|            | LTE Band 40/1RB#0 10M  | Back Side     | 38750 | 22.72            | 24.00               | 1.343                  | 0.359                          | 0.485                             |



|            |                        |            |        |       |       |       |       |       |
|------------|------------------------|------------|--------|-------|-------|-------|-------|-------|
|            | LTE Band 40/25RB#0 10M | Front Side | 38750  | 21.70 | 23.00 | 1.349 | 0.143 | 0.194 |
|            | LTE Band 40/25RB#0 10M | Back Side  | 38750  | 21.70 | 23.00 | 1.349 | 0.347 | 0.471 |
| Full Power |                        |            |        |       |       |       |       |       |
|            | LTE Band 40/1RB#0 10M  | Front Side | 39200  | 22.75 | 24.00 | 1.334 | 0.198 | 0.266 |
| 48#        | LTE Band 40/1RB#0 10M  | Back Side  | 39200  | 22.75 | 24.00 | 1.334 | 0.412 | 0.553 |
|            | LTE Band 40/25RB#0 10M | Front Side | 39200  | 21.66 | 23.00 | 1.361 | 0.162 | 0.222 |
|            | LTE Band 40/25RB#0 10M | Back Side  | 39200  | 21.66 | 23.00 | 1.361 | 0.391 | 0.536 |
| Full Power |                        |            |        |       |       |       |       |       |
|            | LTE Band 66/1RB#0 20M  | Front Side | 132322 | 23.72 | 25.00 | 1.343 | 0.305 | 0.410 |
| 49#        | LTE Band 66/1RB#0 20M  | Back Side  | 132322 | 23.72 | 25.00 | 1.343 | 0.360 | 0.483 |
|            | LTE Band 66/50RB#0 20M | Front Side | 132322 | 22.63 | 24.00 | 1.371 | 0.266 | 0.365 |
|            | LTE Band 66/50RB#0 20M | Back Side  | 132322 | 22.63 | 24.00 | 1.371 | 0.322 | 0.441 |

➤ **WLAN/BT Body-worn SAR**

| Plot No.   | Band/Mode          | Test Position | CH. | Ave. Power (dBm) | Tune-up Limit (dBm) | Tune-up Scaling Factor | Meas. SAR <sub>1g</sub> (W/kg) | Reported SAR <sub>1g</sub> (W/kg) |
|------------|--------------------|---------------|-----|------------------|---------------------|------------------------|--------------------------------|-----------------------------------|
| Full Power |                    |               |     |                  |                     |                        |                                |                                   |
|            | WLAN2.4GHz/802.11b | Front Side    | 6   | 17.91            | 18.50               | 1.146                  | 0.050                          | 0.058                             |
| 50#        | WLAN2.4GHz/802.11b | Back Side     | 6   | 17.91            | 18.50               | 1.146                  | 0.073                          | 0.085                             |
| Full Power |                    |               |     |                  |                     |                        |                                |                                   |
|            | WLAN5.2GHz/802.11a | Front Side    | 36  | 14.99            | 15.50               | 1.125                  | 0.033                          | 0.042                             |
| 51#        | WLAN5.2GHz/802.11a | Back Side     | 36  | 14.99            | 15.50               | 1.125                  | 0.082                          | 0.103                             |
| Full Power |                    |               |     |                  |                     |                        |                                |                                   |
|            | WLAN5.3GHz/802.11a | Front Side    | 52  | 15.11            | 16.00               | 1.227                  | 0.046                          | 0.063                             |
| 52#        | WLAN5.3GHz/802.11a | Back Side     | 52  | 15.11            | 16.00               | 1.227                  | 0.136                          | 0.187                             |
| Full Power |                    |               |     |                  |                     |                        |                                |                                   |
|            | WLAN5.5GHz/802.11a | Front Side    | 100 | 14.75            | 15.50               | 1.189                  | 0.144                          | 0.192                             |
| 53#        | WLAN5.5GHz/802.11a | Back Side     | 100 | 14.75            | 15.50               | 1.189                  | 0.260                          | 0.347                             |
| Full Power |                    |               |     |                  |                     |                        |                                |                                   |
|            | WLAN5.8GHz/802.11a | Front Side    | 165 | 14.87            | 15.50               | 1.156                  | 0.043                          | 0.056                             |
| 54#        | WLAN5.8GHz/802.11a | Back Side     | 165 | 14.87            | 15.50               | 1.156                  | 0.123                          | 0.160                             |
| Full Power |                    |               |     |                  |                     |                        |                                |                                   |
|            | Bluetooth/DH5      | Front Side    | 78  | 8.62             | 9.50                | 1.225                  | 0.019                          | 0.025                             |
| 55#        | Bluetooth/DH5      | Back Side     | 78  | 8.62             | 9.50                | 1.225                  | 0.036                          | 0.047                             |

**Note:**

1. The 2.4G WLAN reported 1g SAR (W/kg) should be scaled with the duty cycle scaling factor 1.004 and 1.122 for WLAN 5GHz 802.11a.
2. According to 2016 Oct. TCB workshop for Bluetooth SAR consideration and the theoretical duty



cycle is 83.3%, therefore the actual duty cycle will be scaled up to the theoretical value of Bluetooth reported SAR calculation. The duty cycle of Bluetooth is 78.29 %, Therefore the duty cycle scaling factor 1.064 should be used to calculating the reported SAR.

## 16.5. Repeated SAR Assessment

### ➤ General Note

In accordance with published RF Exposure KDB procedure 865664 D01 SAR measurement 100 MHz to 6 GHz. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

1. Repeated measurement is not required when the original highest measured SAR is  $< 0.80$  W/kg;
2. When the original highest measured SAR is  $\geq 0.80$  W/kg, repeat that measurement once.
3. Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is  $> 1.20$  or when the original or repeated measurement is  $\geq 1.45$  W/kg ( $\sim 10\%$  from the 1-g SAR limit).
4. Perform a third repeated measurement only if the original, first or second repeated measurement is  $\geq 1.5$  W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is  $> 1.20$ .



## 16.6. Extremity SAR Assessment

### ➤ General Guidance

1. According to KDB 648474 D04v01r03 The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at  $\leq 25$  mm from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB Publication 865664 D01 to address interactive hand use exposure conditions.
2. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR  $> 1.2$  W/kg; however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold per KDB 648474 D04v01r03.
3. According to the user manual, the EUT diagonal size is greater than 16cm, therefore the 0mm extremity SAR of WLAN 5GHz is required.

### ➤ Extremity SAR

| Plot No.   | Band/Mode             | Test Position | CH.   | Ave. Power (dBm) | Tune-up Limit (dBm) | Tune-up Scaling Factor | Meas. SAR <sub>10g</sub> (W/kg) | Reported SAR <sub>10g</sub> (W/kg) |
|------------|-----------------------|---------------|-------|------------------|---------------------|------------------------|---------------------------------|------------------------------------|
| Full Power |                       |               |       |                  |                     |                        |                                 |                                    |
|            | LTE Band 7/1RB#0 20M  | Front Side    | 21100 | 18.39            | 18.50               | 1.384                  | 1.410                           | 1.951                              |
|            | LTE Band 7/1RB#0 20M  | Back Side     | 21100 | 18.39            | 18.50               | 1.384                  | 2.170                           | 3.002                              |
|            | LTE Band 7/1RB#0 20M  | Left Side     | 21100 | 18.39            | 15.50               | 1.384                  | 0.887                           | 1.227                              |
| 56#        | LTE Band 7/1RB#0 20M  | Top Side      | 21100 | 18.39            | 15.50               | 1.384                  | 2.720                           | 3.763                              |
|            | LTE Band 7/50RB#0 20M | Back Side     | 20850 | 18.28            | 16.00               | 1.419                  | 1.770                           | 2.512                              |
|            | LTE Band 7/50RB#0 20M | Back Side     | 21350 | 18.34            | 16.00               | 1.400                  | 1.330                           | 1.861                              |
|            | LTE Band 7/50RB#0 20M | Top Side      | 20850 | 18.28            | 19.80               | 1.419                  | 1.590                           | 2.256                              |
|            | LTE Band 7/50RB#0 20M | Top Side      | 21350 | 18.34            | 19.80               | 1.400                  | 1.660                           | 2.323                              |
|            | LTE Band 7/50RB#0 20M | Front Side    | 21100 | 17.45            | 18.80               | 1.365                  | 1.032                           | 1.408                              |
|            | LTE Band 7/50RB#0 20M | Back Side     | 21100 | 17.45            | 18.80               | 1.365                  | 1.660                           | 2.265                              |
|            | LTE Band 7/50RB#0 20M | Left Side     | 21100 | 17.45            | 18.80               | 1.365                  | 0.692                           | 0.944                              |
|            | LTE Band 7/50RB#0 20M | Top Side      | 21100 | 17.45            | 18.80               | 1.365                  | 1.672                           | 2.282                              |
|            | LTE Band 7/50RB#0 20M | Back Side     | 20850 | 17.42            | 18.80               | 1.374                  | 1.370                           | 1.882                              |
|            | LTE Band 7/50RB#0 20M | Back Side     | 21350 | 17.39            | 18.80               | 1.384                  | 1.110                           | 1.536                              |
|            | LTE Band 7/50RB#0 20M | Top Side      | 20850 | 17.42            | 18.80               | 1.374                  | 1.065                           | 1.463                              |
|            | LTE Band 7/50RB#0 20M | Top Side      | 21350 | 17.39            | 18.80               | 1.384                  | 1.496                           | 2.070                              |
| Full Power |                       |               |       |                  |                     |                        |                                 |                                    |
|            | WLAN5.3GHz/802.11a    | Front Side    | 52    | 15.11            | 16.00               | 1.227                  | 0.229                           | 0.315                              |



|            |                    |            |     |       |       |       |       |       |
|------------|--------------------|------------|-----|-------|-------|-------|-------|-------|
| 57#        | WLAN5.3GHz/802.11a | Back Side  | 52  | 15.11 | 16.00 | 1.227 | 0.306 | 0.421 |
| Full Power |                    |            |     |       |       |       |       |       |
|            | WLAN5.5GHz/802.11a | Front Side | 100 | 14.75 | 15.50 | 1.189 | 0.526 | 0.701 |
| 58#        | WLAN5.5GHz/802.11a | Back Side  | 100 | 14.75 | 15.50 | 1.189 | 0.550 | 0.733 |

**Note:**

The 2.4G WLAN reported 1g SAR (W/kg) should be scaled with the duty cycle scaling factor 1.004 and 1.122 for WLAN 5GHz 802.11a.

## 17. Simultaneous Transmission Evaluation

### 17.1. Simultaneous Transmission Consideration

| No. | Simultaneous Transmission Consideration | Head | Body-Worn | Hotspot |
|-----|-----------------------------------------|------|-----------|---------|
| 1   | WWAN+WLAN 2.4GHz/5GHz                   | Yes  | Yes       | Yes     |
| 2   | WWAN+Bluetooth                          | No   | Yes       | Yes     |

**Note:**

- When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of the WWAN and WLAN transmitters. The "Portable Hotspot" feature on the handset was NOT activated, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal.
- The hotspot SAR result may overlap with the body-worn accessory SAR requirements, per KDB 941225 D06, the more conservative configurations can be considered, thus excluding some unnecessary body-worn accessory SAR tests.
- Simultaneous Transmission SAR evaluation is not required for BT and WLAN 2.4GHz, because the software mechanism have been incorporated to guarantee that the WLAN 2.4GHz and Bluetooth transmitters would not simultaneously operate.
- Per KDB 447498D01v06, simultaneous transmission SAR evaluation procedures is as followed:  
 Step 1: If sum of 1 g SAR < 1.6 W/kg, Simultaneous SAR measurement is not required.  
 Step 2: If sum of 1 g SAR > 1.6 W/kg, ratio of SAR to peak separation distance for pair of transmitters calculated.  
 Step 3: If the ratio of SAR to peak separation distance is  $\leq 0.04$ , Simultaneous SAR measurement is not required.  
 Step 4: If the ratio of SAR to peak separation distance is  $> 0.04$ , Simultaneous SAR measurement is required and simultaneous transmission SAR value is calculated.  
 (The ratio is determined by:  $(SAR_1 + SAR_2) ^{1.5} / R_i \leq 0.04$ ,  
 $R_i$  is the separation distance between the peak SAR locations for the antenna pair in mm.



## 17.2. Simultaneous Transmission Analysis

### ➤ Head Simultaneous Transmission for WWAN + WLAN 2.4GHz/5GHz

| WWAN Band  | Exposure Position | 1                | 2                | 3                | 1+2<br>Summed<br>1g SAR (W/kg) | 1+3<br>Summed<br>1g SAR (W/kg) |
|------------|-------------------|------------------|------------------|------------------|--------------------------------|--------------------------------|
|            |                   | WWAN             | 2.4GHz WLAN      | 5GHz WLAN        |                                |                                |
|            |                   | 1g SAR<br>(W/kg) | 1g SAR<br>(W/kg) | 1g SAR<br>(W/kg) |                                |                                |
| GSM 850    | Right Cheek       | 0.227            | 0.240            | 0.565            | 0.467                          | 0.792                          |
|            | Right Tilt        | 0.114            | 0.275            | 0.723            | 0.389                          | 0.837                          |
|            | Left Cheek        | 0.247            | 0.656            | 0.627            | 0.903                          | 0.874                          |
|            | Left Tilt         | 0.151            | 0.573            | 0.852            | 0.724                          | 1.003                          |
| GSM 1900   | Right Cheek       | 0.429            | 0.240            | 0.565            | 0.669                          | 0.994                          |
|            | Right Tilt        | 0.351            | 0.275            | 0.723            | 0.626                          | 1.074                          |
|            | Left Cheek        | 0.299            | 0.656            | 0.627            | 0.955                          | 0.926                          |
|            | Left Tilt         | 0.246            | 0.573            | 0.852            | 0.819                          | 1.098                          |
| WCDMA II   | Right Cheek       | 0.601            | 0.240            | 0.565            | 0.841                          | 1.166                          |
|            | Right Tilt        | 0.493            | 0.275            | 0.723            | 0.768                          | 1.216                          |
|            | Left Cheek        | 0.316            | 0.656            | 0.627            | 0.972                          | 0.943                          |
|            | Left Tilt         | 0.425            | 0.573            | 0.852            | 0.998                          | 1.277                          |
| WCDMA IV   | Right Cheek       | 0.589            | 0.240            | 0.565            | 0.829                          | 1.154                          |
|            | Right Tilt        | 0.417            | 0.275            | 0.723            | 0.692                          | 1.140                          |
|            | Left Cheek        | 0.275            | 0.656            | 0.627            | 0.931                          | 0.902                          |
|            | Left Tilt         | 0.257            | 0.573            | 0.852            | 0.830                          | 1.109                          |
| WCDMA V    | Right Cheek       | 0.198            | 0.240            | 0.565            | 0.438                          | 0.763                          |
|            | Right Tilt        | 0.110            | 0.275            | 0.723            | 0.385                          | 0.833                          |
|            | Left Cheek        | 0.237            | 0.656            | 0.627            | 0.893                          | 0.864                          |
|            | Left Tilt         | 0.138            | 0.573            | 0.852            | 0.711                          | 0.990                          |
| LTE Band 2 | Right Cheek       | 0.737            | 0.240            | 0.565            | 0.977                          | 1.302                          |
|            | Right Tilt        | 0.454            | 0.275            | 0.723            | 0.729                          | 1.177                          |
|            | Left Cheek        | 0.395            | 0.656            | 0.627            | 1.051                          | 1.022                          |
|            | Left Tilt         | 0.479            | 0.573            | 0.852            | 1.052                          | 1.331                          |
| LTE Band 5 | Right Cheek       | 0.104            | 0.240            | 0.565            | 0.344                          | 0.669                          |
|            | Right Tilt        | 0.124            | 0.275            | 0.723            | 0.399                          | 0.847                          |
|            | Left Cheek        | 0.267            | 0.656            | 0.627            | 0.923                          | 0.894                          |
|            | Left Tilt         | 0.190            | 0.573            | 0.852            | 0.763                          | 1.042                          |
| LTE Band 7 | Right Cheek       | 0.293            | 0.240            | 0.565            | 0.533                          | 0.858                          |
|            | Right Tilt        | 0.596            | 0.275            | 0.723            | 0.871                          | 1.319                          |
|            | Left Cheek        | 0.209            | 0.656            | 0.627            | 0.865                          | 0.836                          |



|                |             |       |       |       |       |       |
|----------------|-------------|-------|-------|-------|-------|-------|
|                | Left Tilt   | 0.144 | 0.573 | 0.852 | 0.717 | 0.996 |
| LTE Band 12/17 | Right Cheek | 0.252 | 0.240 | 0.565 | 0.492 | 0.817 |
|                | Right Tilt  | 0.164 | 0.275 | 0.723 | 0.439 | 0.887 |
|                | Left Cheek  | 0.262 | 0.656 | 0.627 | 0.918 | 0.889 |
|                | Left Tilt   | 0.207 | 0.573 | 0.852 | 0.780 | 1.059 |
| LTE Band 13    | Right Cheek | 0.065 | 0.240 | 0.565 | 0.305 | 0.630 |
|                | Right Tilt  | 0.113 | 0.275 | 0.723 | 0.388 | 0.836 |
|                | Left Cheek  | 0.269 | 0.656 | 0.627 | 0.925 | 0.896 |
|                | Left Tilt   | 0.115 | 0.573 | 0.852 | 0.688 | 0.967 |
| LTE Band 38    | Right Cheek | 0.588 | 0.240 | 0.565 | 0.828 | 1.153 |
|                | Right Tilt  | 0.792 | 0.275 | 0.723 | 1.067 | 1.515 |
|                | Left Cheek  | 0.323 | 0.656 | 0.627 | 0.979 | 0.950 |
|                | Left Tilt   | 0.363 | 0.573 | 0.852 | 0.936 | 1.215 |
| LTE Band 40    | Right Cheek | 0.434 | 0.240 | 0.565 | 0.674 | 0.999 |
|                | Right Tilt  | 0.573 | 0.275 | 0.723 | 0.848 | 1.296 |
|                | Left Cheek  | 0.290 | 0.656 | 0.627 | 0.946 | 0.917 |
|                | Left Tilt   | 0.394 | 0.573 | 0.852 | 0.967 | 1.246 |
| LTE Band 66/4  | Right Cheek | 0.537 | 0.240 | 0.565 | 0.777 | 1.102 |
|                | Right Tilt  | 0.360 | 0.275 | 0.723 | 0.635 | 1.083 |
|                | Left Cheek  | 0.432 | 0.656 | 0.627 | 1.088 | 1.059 |
|                | Left Tilt   | 0.414 | 0.573 | 0.852 | 0.987 | 1.266 |

➤ Hotspot Simultaneous Transmission for WWAN + WLAN 2.4GHz/5GHz

| WWAN Band | Exposure Position | 1                | 2                | 3                | 1+2<br>Summed<br>1g SAR (W/kg) | 1+3<br>Summed<br>1g SAR (W/kg) |
|-----------|-------------------|------------------|------------------|------------------|--------------------------------|--------------------------------|
|           |                   | WWAN             | 2.4GHz WLAN      | 5GHz WLAN        |                                |                                |
|           |                   | 1g SAR<br>(W/kg) | 1g SAR<br>(W/kg) | 1g SAR<br>(W/kg) |                                |                                |
| GSM 850   | Front Side        | 0.238            | 0.092            | 0.408            | 0.330                          | 0.646                          |
|           | Back Side         | 0.350            | 0.189            | 0.516            | 0.539                          | 0.866                          |
|           | Left Side         | 0.208            | 0.043            | 0.099            | 0.251                          | 0.307                          |
|           | Right Side        | 0.218            | 0.102            | 0.211            | 0.320                          | 0.429                          |
|           | Top Side          | 0.000            | 0.133            | 0.660            | 0.133                          | 0.660                          |
|           | Bottom Side       | 0.077            | 0.000            | 0.000            | 0.077                          | 0.077                          |
| GSM 1900  | Front Side        | 0.256            | 0.092            | 0.408            | 0.348                          | 0.664                          |
|           | Back Side         | 0.448            | 0.189            | 0.516            | 0.637                          | 0.964                          |
|           | Left Side         | 0.259            | 0.043            | 0.099            | 0.302                          | 0.358                          |
|           | Right Side        | 0.000            | 0.102            | 0.211            | 0.102                          | 0.211                          |
|           | Top Side          | 0.286            | 0.133            | 0.660            | 0.419                          | 0.946                          |



|                |             |       |       |       |       |       |
|----------------|-------------|-------|-------|-------|-------|-------|
|                | Bottom Side | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 |
| WCDMA II       | Front Side  | 0.237 | 0.092 | 0.408 | 0.329 | 0.645 |
|                | Back Side   | 0.397 | 0.189 | 0.516 | 0.586 | 0.913 |
|                | Left Side   | 0.191 | 0.043 | 0.099 | 0.234 | 0.290 |
|                | Right Side  | 0.000 | 0.102 | 0.211 | 0.102 | 0.211 |
|                | Top Side    | 0.285 | 0.133 | 0.660 | 0.418 | 0.945 |
|                | Bottom Side | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 |
| WCDMA IV       | Front Side  | 0.206 | 0.092 | 0.408 | 0.298 | 0.614 |
|                | Back Side   | 0.312 | 0.189 | 0.516 | 0.501 | 0.828 |
|                | Left Side   | 0.198 | 0.043 | 0.099 | 0.241 | 0.297 |
|                | Right Side  | 0.000 | 0.102 | 0.211 | 0.102 | 0.211 |
|                | Top Side    | 0.149 | 0.133 | 0.660 | 0.282 | 0.809 |
|                | Bottom Side | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 |
| WCDMA V        | Front Side  | 0.180 | 0.092 | 0.408 | 0.272 | 0.588 |
|                | Back Side   | 0.285 | 0.189 | 0.516 | 0.474 | 0.801 |
|                | Left Side   | 0.173 | 0.043 | 0.099 | 0.216 | 0.272 |
|                | Right Side  | 0.164 | 0.102 | 0.211 | 0.266 | 0.375 |
|                | Top Side    | 0.000 | 0.133 | 0.660 | 0.133 | 0.660 |
|                | Bottom Side | 0.057 | 0.000 | 0.000 | 0.057 | 0.057 |
| LTE Band 2     | Front Side  | 0.404 | 0.092 | 0.408 | 0.496 | 0.812 |
|                | Back Side   | 0.563 | 0.189 | 0.516 | 0.752 | 1.079 |
|                | Left Side   | 0.439 | 0.043 | 0.099 | 0.482 | 0.538 |
|                | Right Side  | 0.000 | 0.102 | 0.211 | 0.102 | 0.211 |
|                | Top Side    | 0.520 | 0.133 | 0.660 | 0.653 | 1.180 |
|                | Bottom Side | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 |
| LTE Band 5     | Front Side  | 0.208 | 0.092 | 0.408 | 0.300 | 0.616 |
|                | Back Side   | 0.328 | 0.189 | 0.516 | 0.517 | 0.844 |
|                | Left Side   | 0.207 | 0.043 | 0.099 | 0.250 | 0.306 |
|                | Right Side  | 0.185 | 0.102 | 0.211 | 0.287 | 0.396 |
|                | Top Side    | 0.000 | 0.133 | 0.660 | 0.133 | 0.660 |
|                | Bottom Side | 0.063 | 0.000 | 0.000 | 0.063 | 0.063 |
| LTE Band 7     | Front Side  | 0.375 | 0.092 | 0.408 | 0.467 | 0.783 |
|                | Back Side   | 0.874 | 0.189 | 0.516 | 1.063 | 1.390 |
|                | Left Side   | 0.184 | 0.043 | 0.099 | 0.227 | 0.283 |
|                | Right Side  | 0.000 | 0.102 | 0.211 | 0.102 | 0.211 |
|                | Top Side    | 0.784 | 0.133 | 0.660 | 0.917 | 1.444 |
|                | Bottom Side | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 |
| LTE Band 12/17 | Front Side  | 0.273 | 0.092 | 0.408 | 0.365 | 0.681 |



|               |             |       |       |       |       |       |
|---------------|-------------|-------|-------|-------|-------|-------|
|               | Back Side   | 0.490 | 0.189 | 0.516 | 0.679 | 1.006 |
|               | Left Side   | 0.288 | 0.043 | 0.099 | 0.331 | 0.387 |
|               | Right Side  | 0.338 | 0.102 | 0.211 | 0.440 | 0.549 |
|               | Top Side    | 0.000 | 0.133 | 0.660 | 0.133 | 0.660 |
|               | Bottom Side | 0.067 | 0.000 | 0.000 | 0.067 | 0.067 |
| LTE Band 13   | Front Side  | 0.191 | 0.092 | 0.408 | 0.283 | 0.599 |
|               | Back Side   | 0.344 | 0.189 | 0.516 | 0.533 | 0.860 |
|               | Left Side   | 0.223 | 0.043 | 0.099 | 0.266 | 0.322 |
|               | Right Side  | 0.186 | 0.102 | 0.211 | 0.288 | 0.397 |
|               | Top Side    | 0.000 | 0.133 | 0.660 | 0.133 | 0.660 |
|               | Bottom Side | 0.057 | 0.000 | 0.000 | 0.057 | 0.057 |
| LTE Band 38   | Front Side  | 0.258 | 0.092 | 0.408 | 0.350 | 0.666 |
|               | Back Side   | 0.696 | 0.189 | 0.516 | 0.885 | 1.212 |
|               | Left Side   | 0.168 | 0.043 | 0.099 | 0.211 | 0.267 |
|               | Right Side  | 0.000 | 0.102 | 0.211 | 0.102 | 0.211 |
|               | Top Side    | 0.565 | 0.133 | 0.660 | 0.698 | 1.225 |
|               | Bottom Side | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 |
| LTE Band 40   | Front Side  | 0.262 | 0.092 | 0.408 | 0.354 | 0.670 |
|               | Back Side   | 0.840 | 0.189 | 0.516 | 1.029 | 1.356 |
|               | Left Side   | 0.094 | 0.043 | 0.099 | 0.137 | 0.193 |
|               | Right Side  | 0.000 | 0.102 | 0.211 | 0.102 | 0.211 |
|               | Top Side    | 0.806 | 0.133 | 0.660 | 0.939 | 1.466 |
|               | Bottom Side | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 |
| LTE Band 66/4 | Front Side  | 0.456 | 0.092 | 0.408 | 0.548 | 0.864 |
|               | Back Side   | 0.753 | 0.189 | 0.516 | 0.942 | 1.269 |
|               | Left Side   | 0.354 | 0.043 | 0.099 | 0.397 | 0.453 |
|               | Right Side  | 0.000 | 0.102 | 0.211 | 0.102 | 0.211 |
|               | Top Side    | 0.434 | 0.133 | 0.660 | 0.567 | 1.094 |
|               | Bottom Side | 0.000 | 0.000 | 0.000 | 0.000 | 0.000 |

**➤ Hotspot Simultaneous Transmission for WWAN + Bluetooth**

| WWAN Band  | Exposure Position | 1             | 2             | 1+2 Summed<br>1g SAR (W/kg) |
|------------|-------------------|---------------|---------------|-----------------------------|
|            |                   | WWAN          | Bluetooth     |                             |
|            |                   | 1g SAR (W/kg) | 1g SAR (W/kg) |                             |
| GSM 850    | Front Side        | 0.238         | 0.049         | 0.287                       |
|            | Back Side         | 0.350         | 0.106         | 0.456                       |
|            | Left Side         | 0.208         | 0.042         | 0.250                       |
|            | Right Side        | 0.218         | 0.069         | 0.287                       |
|            | Top Side          | 0.000         | 0.069         | 0.069                       |
|            | Bottom Side       | 0.077         | 0.000         | 0.077                       |
| GSM 1900   | Front Side        | 0.256         | 0.049         | 0.305                       |
|            | Back Side         | 0.448         | 0.106         | 0.554                       |
|            | Left Side         | 0.259         | 0.042         | 0.301                       |
|            | Right Side        | 0.000         | 0.069         | 0.069                       |
|            | Top Side          | 0.286         | 0.069         | 0.355                       |
|            | Bottom Side       | 0.000         | 0.000         | 0.000                       |
| WCDMA II   | Front Side        | 0.237         | 0.049         | 0.286                       |
|            | Back Side         | 0.397         | 0.106         | 0.503                       |
|            | Left Side         | 0.191         | 0.042         | 0.233                       |
|            | Right Side        | 0.000         | 0.069         | 0.069                       |
|            | Top Side          | 0.285         | 0.069         | 0.354                       |
|            | Bottom Side       | 0.000         | 0.000         | 0.000                       |
| WCDMA IV   | Front Side        | 0.206         | 0.049         | 0.255                       |
|            | Back Side         | 0.312         | 0.106         | 0.418                       |
|            | Left Side         | 0.198         | 0.042         | 0.240                       |
|            | Right Side        | 0.000         | 0.069         | 0.069                       |
|            | Top Side          | 0.149         | 0.069         | 0.218                       |
|            | Bottom Side       | 0.000         | 0.000         | 0.000                       |
| WCDMA V    | Front Side        | 0.180         | 0.049         | 0.229                       |
|            | Back Side         | 0.285         | 0.106         | 0.391                       |
|            | Left Side         | 0.173         | 0.042         | 0.215                       |
|            | Right Side        | 0.000         | 0.069         | 0.233                       |
|            | Top Side          | 0.000         | 0.069         | 0.069                       |
|            | Bottom Side       | 0.057         | 0.000         | 0.057                       |
| LTE Band 2 | Front Side        | 0.404         | 0.049         | 0.453                       |
|            | Back Side         | 0.563         | 0.106         | 0.669                       |
|            | Left Side         | 0.439         | 0.042         | 0.481                       |



REPORT No.: SZ24100314S01

|                |             |       |       |       |
|----------------|-------------|-------|-------|-------|
|                | Right Side  | 0.000 | 0.069 | 0.069 |
|                | Top Side    | 0.520 | 0.069 | 0.589 |
|                | Bottom Side | 0.000 | 0.000 | 0.000 |
| LTE Band 5     | Front Side  | 0.208 | 0.049 | 0.257 |
|                | Back Side   | 0.328 | 0.106 | 0.434 |
|                | Left Side   | 0.207 | 0.042 | 0.249 |
|                | Right Side  | 0.185 | 0.069 | 0.254 |
|                | Top Side    | 0.000 | 0.069 | 0.069 |
|                | Bottom Side | 0.063 | 0.000 | 0.063 |
| LTE Band 7     | Front Side  | 0.375 | 0.049 | 0.424 |
|                | Back Side   | 0.874 | 0.106 | 0.980 |
|                | Left Side   | 0.184 | 0.042 | 0.226 |
|                | Right Side  | 0.000 | 0.069 | 0.069 |
|                | Top Side    | 0.784 | 0.069 | 0.853 |
|                | Bottom Side | 0.000 | 0.000 | 0.000 |
| LTE Band 12/17 | Front Side  | 0.273 | 0.049 | 0.322 |
|                | Back Side   | 0.490 | 0.106 | 0.596 |
|                | Left Side   | 0.288 | 0.042 | 0.330 |
|                | Right Side  | 0.338 | 0.069 | 0.407 |
|                | Top Side    | 0.000 | 0.069 | 0.069 |
|                | Bottom Side | 0.067 | 0.000 | 0.067 |
| LTE Band 13    | Front Side  | 0.191 | 0.049 | 0.240 |
|                | Back Side   | 0.344 | 0.106 | 0.450 |
|                | Left Side   | 0.223 | 0.042 | 0.265 |
|                | Right Side  | 0.186 | 0.069 | 0.255 |
|                | Top Side    | 0.000 | 0.069 | 0.069 |
|                | Bottom Side | 0.057 | 0.000 | 0.057 |
| LTE Band 38    | Front Side  | 0.258 | 0.049 | 0.307 |
|                | Back Side   | 0.696 | 0.106 | 0.802 |
|                | Left Side   | 0.168 | 0.042 | 0.210 |
|                | Right Side  | 0.000 | 0.069 | 0.069 |
|                | Top Side    | 0.565 | 0.069 | 0.634 |
|                | Bottom Side | 0.000 | 0.000 | 0.000 |
| LTE Band 40    | Front Side  | 0.262 | 0.049 | 0.311 |
|                | Back Side   | 0.840 | 0.106 | 0.946 |
|                | Left Side   | 0.094 | 0.042 | 0.136 |
|                | Right Side  | 0.000 | 0.069 | 0.112 |
|                | Top Side    | 0.806 | 0.069 | 0.875 |



|               |             |       |       |       |
|---------------|-------------|-------|-------|-------|
|               | Bottom Side | 0.000 | 0.000 | 0.000 |
| LTE Band 66/4 | Front Side  | 0.456 | 0.049 | 0.505 |
|               | Back Side   | 0.753 | 0.106 | 0.859 |
|               | Left Side   | 0.354 | 0.042 | 0.396 |
|               | Right Side  | 0.000 | 0.069 | 0.069 |
|               | Top Side    | 0.434 | 0.069 | 0.503 |
|               | Bottom Side | 0.000 | 0.000 | 0.000 |

➤ **Body-worn Simultaneous Transmission for WWAN + WLAN 2.4GHz/5GHz**

| WWAN Band      | Exposure Position | 1                | 2                | 3                | 1+2<br>Summed<br>1g SAR (W/kg) | 1+3<br>Summed<br>1g SAR (W/kg) |
|----------------|-------------------|------------------|------------------|------------------|--------------------------------|--------------------------------|
|                |                   | WWAN             | 2.4GHz WLAN      | 5GHz WLAN        |                                |                                |
|                |                   | 1g SAR<br>(W/kg) | 1g SAR<br>(W/kg) | 1g SAR<br>(W/kg) |                                |                                |
| GSM 850        | Front Side        | 0.204            | 0.058            | 0.192            | 0.262                          | 0.396                          |
|                | Back Side         | 0.296            | 0.085            | 0.347            | 0.381                          | 0.643                          |
| GSM 1900       | Front Side        | 0.279            | 0.058            | 0.192            | 0.337                          | 0.471                          |
|                | Back Side         | 0.429            | 0.085            | 0.347            | 0.514                          | 0.776                          |
| WCDMA II       | Front Side        | 0.219            | 0.058            | 0.192            | 0.277                          | 0.411                          |
|                | Back Side         | 0.322            | 0.085            | 0.347            | 0.407                          | 0.669                          |
| WCDMA IV       | Front Side        | 0.166            | 0.058            | 0.192            | 0.224                          | 0.358                          |
|                | Back Side         | 0.202            | 0.085            | 0.347            | 0.287                          | 0.549                          |
| WCDMA V        | Front Side        | 0.170            | 0.058            | 0.192            | 0.228                          | 0.362                          |
|                | Back Side         | 0.244            | 0.085            | 0.347            | 0.329                          | 0.591                          |
| LTE Band 2     | Front Side        | 0.284            | 0.058            | 0.192            | 0.342                          | 0.476                          |
|                | Back Side         | 0.438            | 0.085            | 0.347            | 0.523                          | 0.785                          |
| LTE Band 5     | Front Side        | 0.156            | 0.058            | 0.192            | 0.214                          | 0.348                          |
|                | Back Side         | 0.204            | 0.085            | 0.347            | 0.289                          | 0.551                          |
| LTE Band 7     | Front Side        | 0.793            | 0.058            | 0.192            | 0.851                          | 0.985                          |
|                | Back Side         | 1.007            | 0.085            | 0.347            | 1.092                          | 1.354                          |
| LTE Band 12/17 | Front Side        | 0.194            | 0.058            | 0.192            | 0.252                          | 0.386                          |
|                | Back Side         | 0.419            | 0.085            | 0.347            | 0.504                          | 0.766                          |
| LTE Band 13    | Front Side        | 0.238            | 0.058            | 0.192            | 0.296                          | 0.430                          |
|                | Back Side         | 0.310            | 0.085            | 0.347            | 0.395                          | 0.657                          |
| LTE Band 38    | Front Side        | 0.263            | 0.058            | 0.192            | 0.321                          | 0.455                          |
|                | Back Side         | 0.602            | 0.085            | 0.347            | 0.687                          | 0.949                          |
| LTE Band 40    | Front Side        | 0.266            | 0.058            | 0.192            | 0.324                          | 0.458                          |
|                | Back Side         | 0.553            | 0.085            | 0.347            | 0.638                          | 0.900                          |



|               |            |       |       |       |       |       |
|---------------|------------|-------|-------|-------|-------|-------|
| LTE Band 66/4 | Front Side | 0.410 | 0.058 | 0.192 | 0.468 | 0.602 |
|               | Back Side  | 0.483 | 0.085 | 0.347 | 0.568 | 0.830 |

➤ **Body-worn Simultaneous Transmission for WWAN + Bluetooth**

| WWAN Band      | Exposure Position | 1             | 2             | 1+2 Summed<br>1g SAR (W/kg) |
|----------------|-------------------|---------------|---------------|-----------------------------|
|                |                   | WWAN          | Bluetooth     |                             |
|                |                   | 1g SAR (W/kg) | 1g SAR (W/kg) |                             |
| GSM 850        | Front Side        | 0.204         | 0.025         | 0.229                       |
|                | Back Side         | 0.296         | 0.047         | 0.343                       |
| GSM 1900       | Front Side        | 0.279         | 0.025         | 0.304                       |
|                | Back Side         | 0.429         | 0.047         | 0.476                       |
| WCDMA II       | Front Side        | 0.219         | 0.025         | 0.244                       |
|                | Back Side         | 0.322         | 0.047         | 0.369                       |
| WCDMA IV       | Front Side        | 0.166         | 0.025         | 0.191                       |
|                | Back Side         | 0.202         | 0.047         | 0.249                       |
| WCDMA V        | Front Side        | 0.170         | 0.025         | 0.195                       |
|                | Back Side         | 0.244         | 0.047         | 0.291                       |
| LTE Band 2     | Front Side        | 0.284         | 0.025         | 0.309                       |
|                | Back Side         | 0.438         | 0.047         | 0.485                       |
| LTE Band 5     | Front Side        | 0.156         | 0.025         | 0.181                       |
|                | Back Side         | 0.204         | 0.047         | 0.251                       |
| LTE Band 7     | Front Side        | 0.793         | 0.025         | 0.818                       |
|                | Back Side         | 1.007         | 0.047         | 1.054                       |
| LTE Band 12/17 | Front Side        | 0.194         | 0.025         | 0.219                       |
|                | Back Side         | 0.419         | 0.047         | 0.466                       |
| LTE Band 13    | Front Side        | 0.238         | 0.025         | 0.263                       |
|                | Back Side         | 0.310         | 0.047         | 0.357                       |
| LTE Band 38    | Front Side        | 0.263         | 0.025         | 0.288                       |
|                | Back Side         | 0.602         | 0.047         | 0.649                       |
| LTE Band 40    | Front Side        | 0.266         | 0.025         | 0.291                       |
|                | Back Side         | 0.553         | 0.047         | 0.600                       |
| LTE Band 66/4  | Front Side        | 0.410         | 0.025         | 0.435                       |
|                | Back Side         | 0.483         | 0.047         | 0.530                       |



## 18. Uncertainty Assessment

According to KDB 865664 D01 SAR measurement 100 MHz to 6GHz, when the highest measured 1-g SAR is less than 1.5 W/kg and 10-g extremity SAR less than 3.75 W/kg, the expanded SAR measurement uncertainty must be less than 30% with a confidence interval of  $k=2$ . When these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE 1528-2013 is not required in the SAR report and submitted for equipment approval. For this device, both the 1-g SAR is less than 1.5 W/kg. Therefore the measurement uncertainty table is not required in this report.



## Annex A General Information

### 1. Identification of the Responsible Testing Laboratory

|                     |                                                                                                                                  |
|---------------------|----------------------------------------------------------------------------------------------------------------------------------|
| Laboratory Name:    | Shenzhen Morlab Communications Technology Co., Ltd.                                                                              |
| Laboratory Address: | FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, Guangdong Province, P. R. China |
| Telephone:          | +86 755 36698555                                                                                                                 |
| Facsimile:          | +86 755 36698525                                                                                                                 |

### 2. Identification of the Responsible Testing Location

|          |                                                                                                                                  |
|----------|----------------------------------------------------------------------------------------------------------------------------------|
| Name:    | Shenzhen Morlab Communications Technology Co., Ltd.                                                                              |
| Address: | FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, Guangdong Province, P. R. China |

### 3. Facilities and Accreditations

The FCC designation number is CN1192, the test firm registration number is 226174.

#### Note:

The main report is end here and the other Annex (B,C,D,E,F) will be submitted separately.

\*\*\*\*\* END OF MAIN REPORT \*\*\*\*\*