





41C / 20+5MHz / Mid CH / QPSK




41C / 20+5MHz / Mid CH / 16QAM

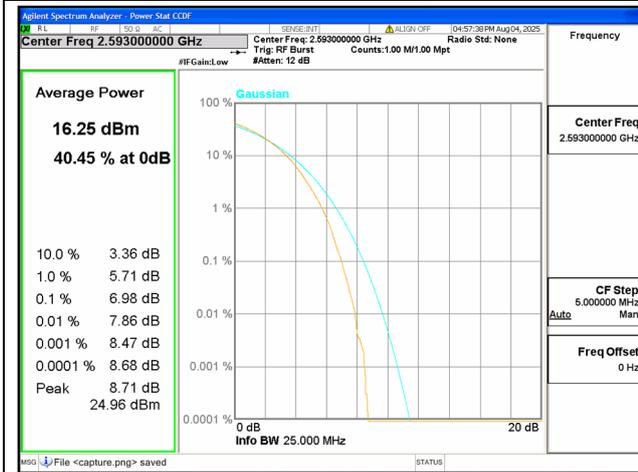


41C / 20+5MHz / Mid CH / 64QAM

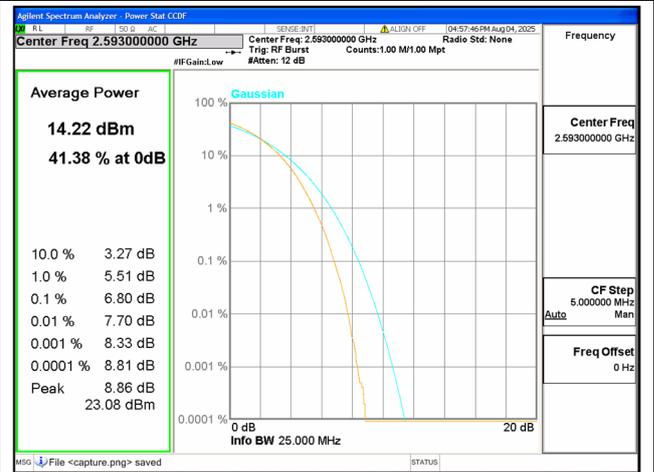


41C / 20+5MHz / Mid CH / 256QAM

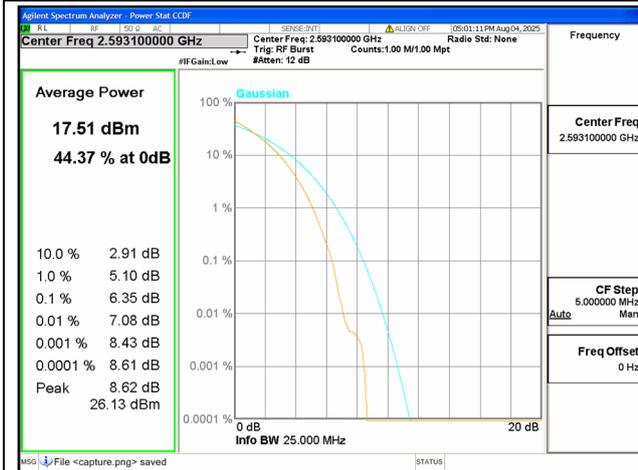

41C / 20+10MHz / Mid CH / QPSK

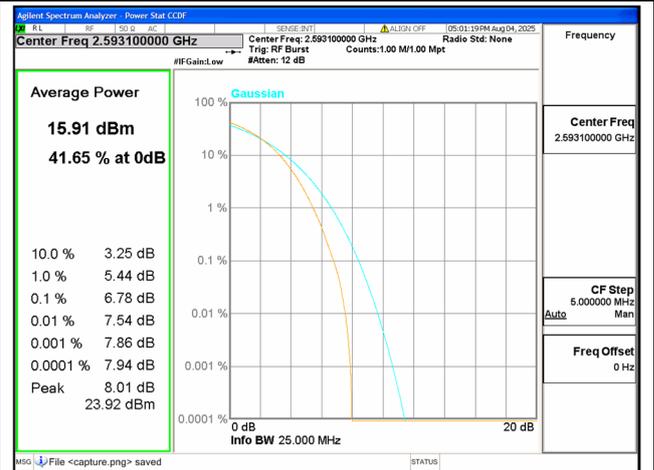


41C / 20+10MHz / Mid CH / 16QAM

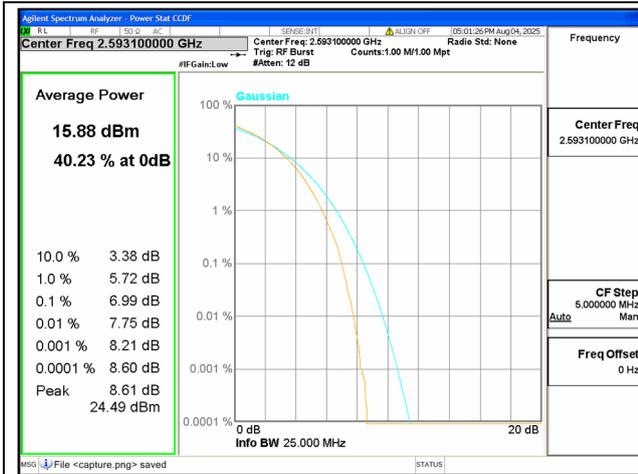


41C / 20+10MHz / Mid CH / 64QAM




41C / 20+10MHz / Mid CH / 256QAM

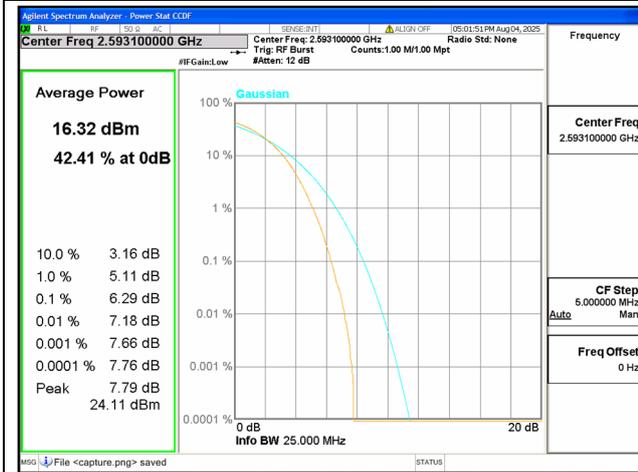


41C / 20+15MHz / Mid CH / QPSK

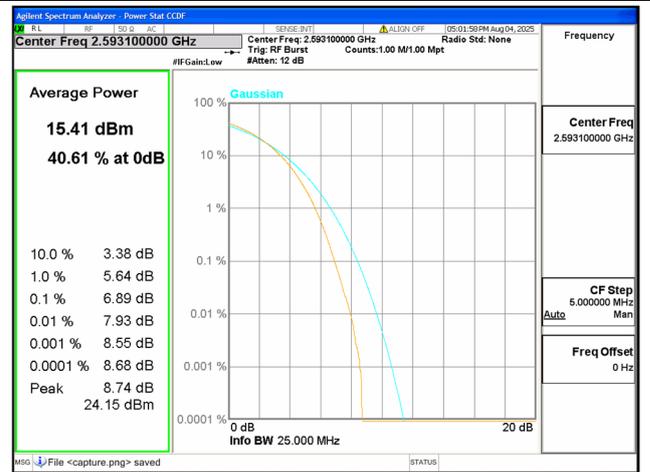


41C / 20+15MHz / Mid CH / 16QAM

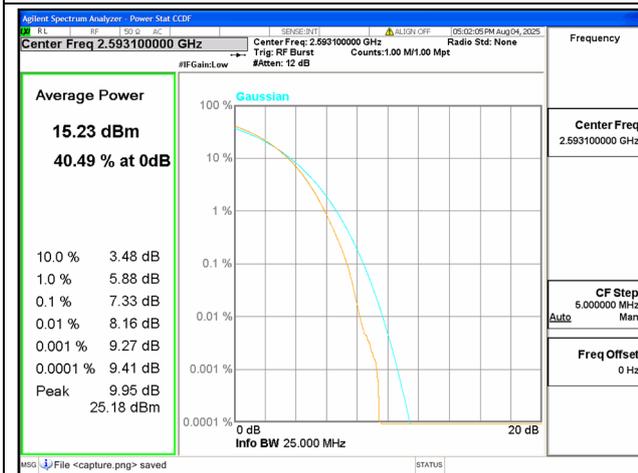

41C / 20+15MHz / Mid CH / 64QAM

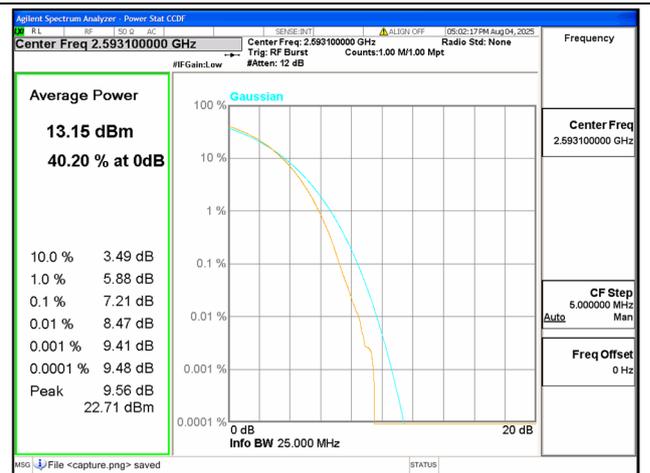


41C / 20+15MHz / Mid CH / 256QAM

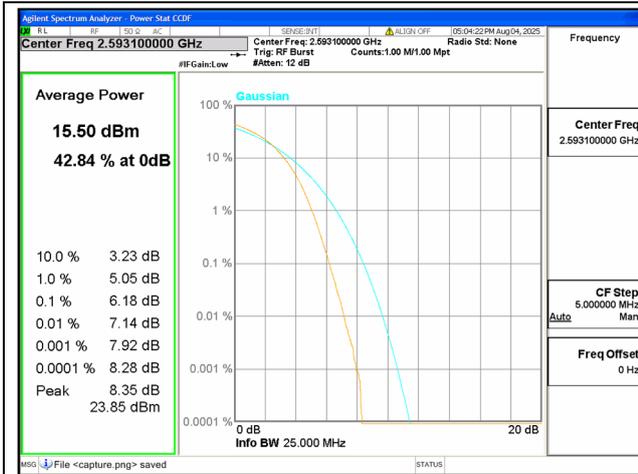

41C / 20+20MHz / Mid CH / QPSK




41C / 20+20MHz / Mid CH / 16QAM

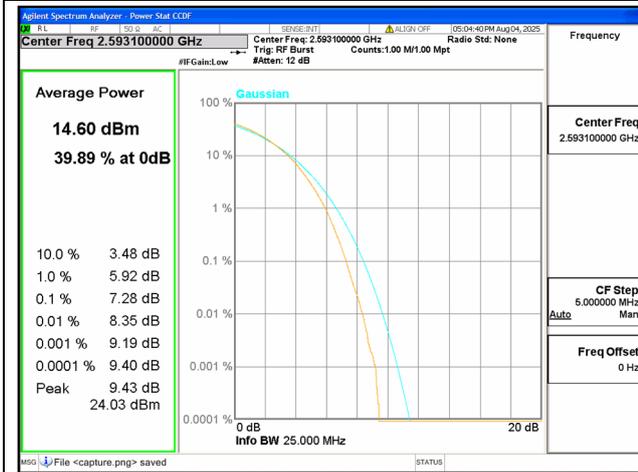


41C / 20+20MHz / Mid CH / 64QAM



41C / 20+20MHz / Mid CH / 256QAM

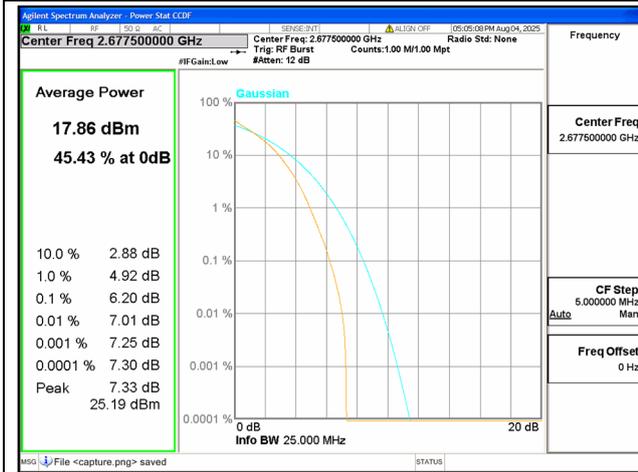


41C / 20+5MHz / High CH / QPSK

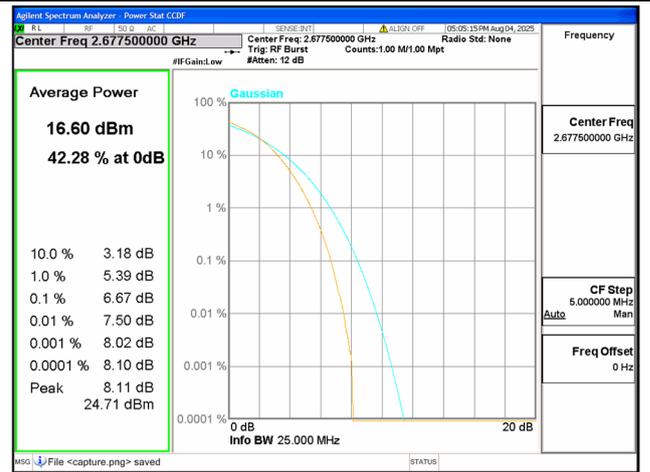


41C / 20+5MHz / High CH / 16QAM



41C / 20+5MHz / High CH / 64QAM

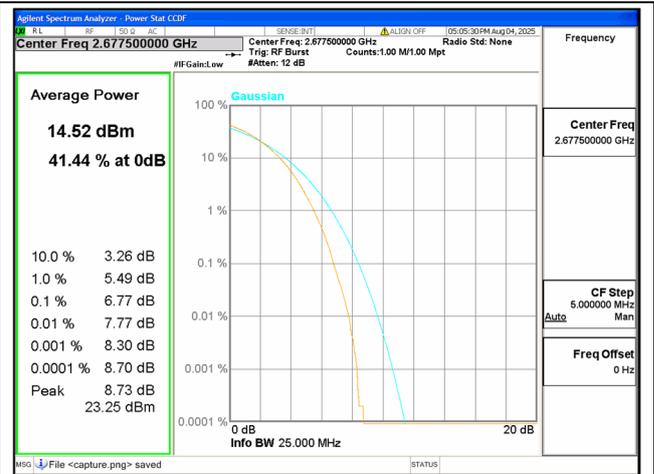


41C / 20+5MHz / High CH / 256QAM

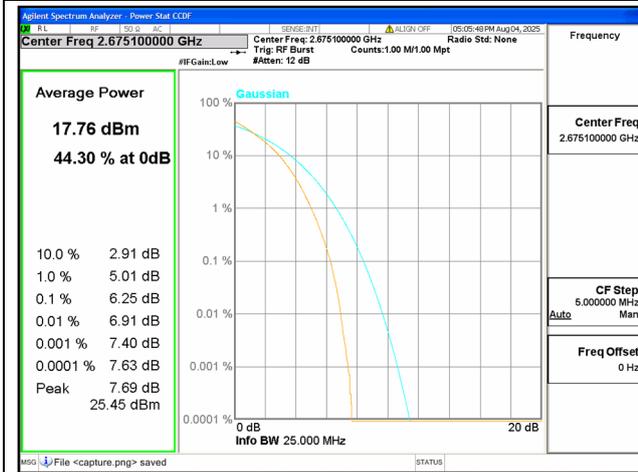


41C / 20+10MHz / High CH / QPSK



41C / 20+10MHz / High CH / 16QAM

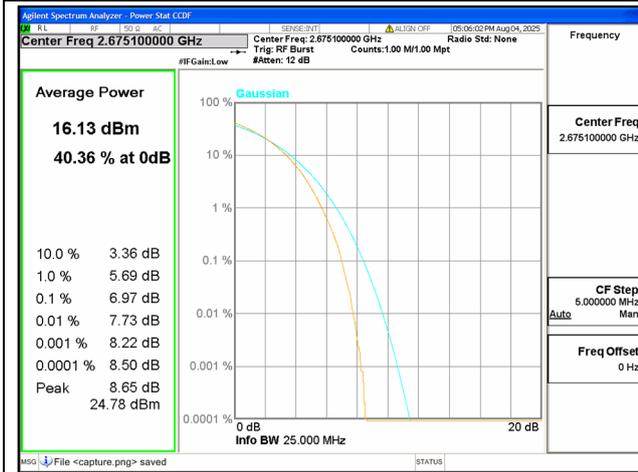


41C / 20+10MHz / High CH / 64QAM

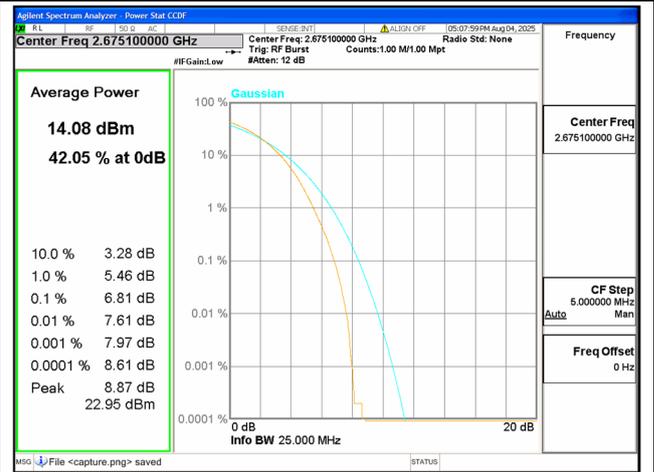

41C / 20+10MHz / High CH / 256QAM



41C / 20+15MHz / High CH / QPSK

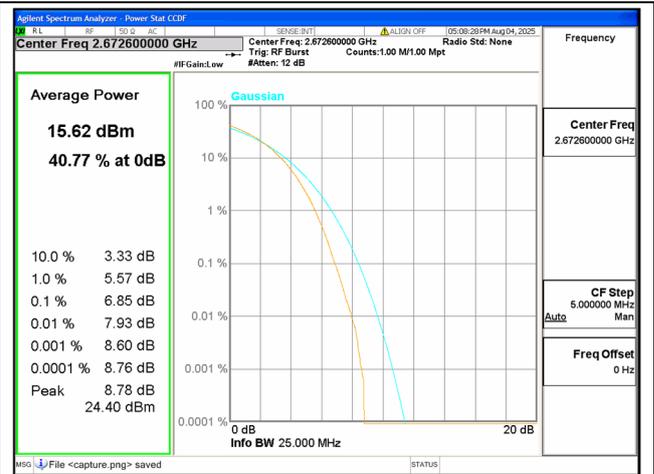


41C / 20+15MHz / High CH / 16QAM




41C / 20+15MHz / High CH / 64QAM





41C / 20+15MHz / High CH / 256QAM

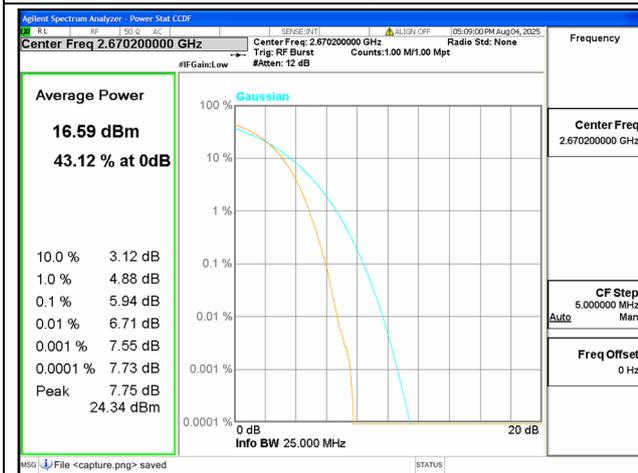

41C / 20+20MHz / High CH / QPSK

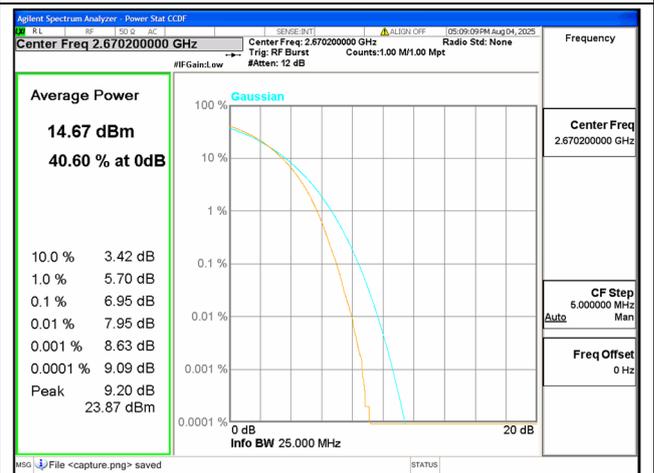

41C / 20+20MHz / High CH / 16QAM

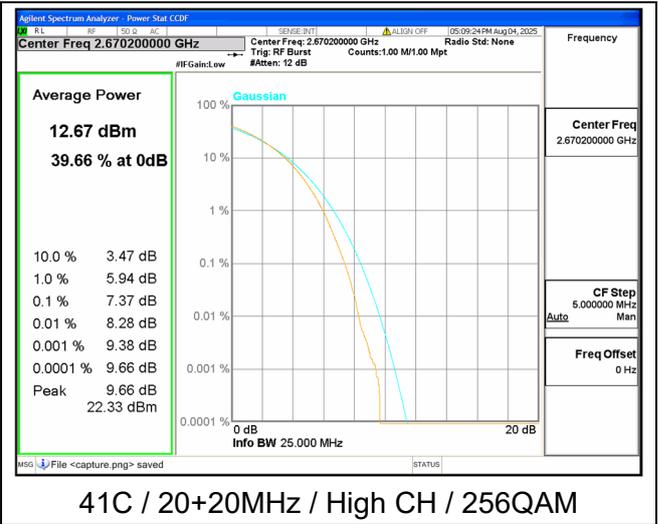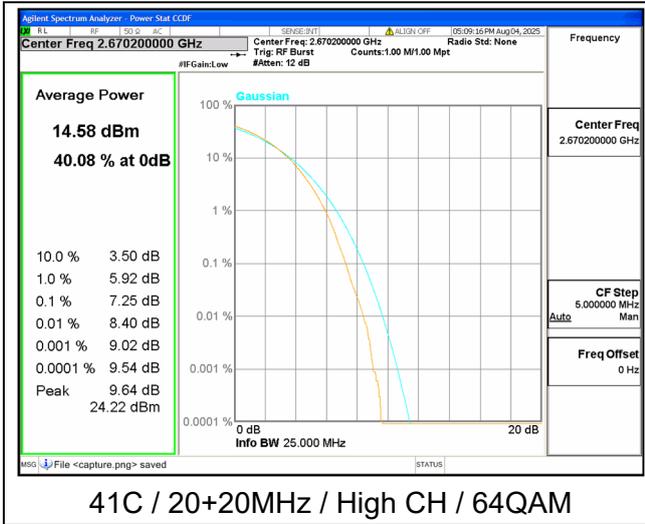



## 2.5. Band Edge

### 2.5.1. Requirement

#### Band 2

According to FCC section 24.238(a), for operations in the 1850–1910MHz bands, the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB in a 1MHz bandwidth. However, in the 1 MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

#### Band 5

According to FCC section 22.917(a), for operations in the 824–849MHz bands, the power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dBm a 100kHz bandwidth. However, in the 1 MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.

#### Band 4, 66

According to FCC section 27.53(h), for operations in the 1710–1755MHz bands, the power of any emission outside a licensee's frequency block shall be attenuated below the transmitter power (P) by at least  $43 + 10 \log_{10}(P)$  dBm 1MHz bandwidth. However, in the 1 MHz bands immediately outside and adjacent to the licensee's frequency block, a resolution bandwidth of at least one percent of the emission bandwidth of the fundamental emission of the transmitter may be employed.


#### Band 12

According to FCC section 27.53(g), for operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least  $43 + 10 \log (P)$  dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

## Band 41

According to FCC section 27.53(m) (4), for mobile digital stations, the attenuation factor shall be not less than  $40 + 10 \log (P)$  dB on all frequencies between the channel edge and 5 megahertz from the channel edge,  $43 + 10 \log (P)$  dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and  $55 + 10 \log (P)$  dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less that  $43 + 10 \log (P)$  dB on all frequencies between 2490.5 MHz and 2496 MHz and  $55 + 10 \log (P)$  dB at or below 2490.5 MHz Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

### 2.5.2. Test Description

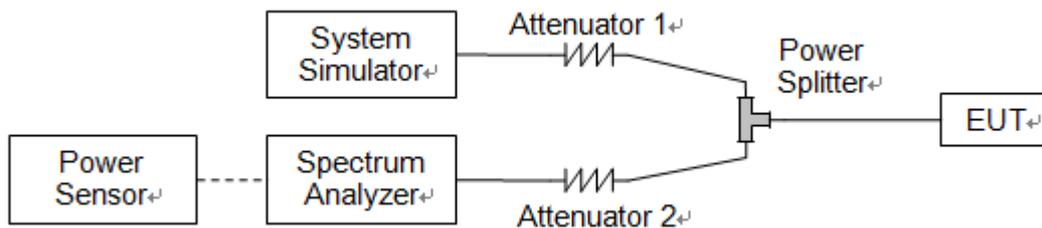

The EUT is coupled to the Spectrum Analyzer (SA) and the System Simulator (SS) with Attenuators through the Power Splitter; the RF load attached to the EUT antenna terminal is 50Ohm; the path loss as the factor is calibrated to correct the reading. The EUT is commanded by the SS to operate at the maximum output power. A call is established between the EUT and the SS.

### 2.5.3. Test Procedure

KDB 971168 D01v03 Section 6.0 and ANSI/TIA-603-E-2016.