



Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
47.3639	-42.91	-62.33	-19.4	-25.0	37.3	Vertical	PK	PASS
78.8419	-38.76	-61.62	-22.9	-25.0	36.6	Vertical	PK	PASS
2703.1406	-54.95	-41.70	13.3	-25.0	16.7	Vertical	PK	PASS
3651.5216	-57.14	-55.50	1.6	-25.0	30.5	Vertical	PK	PASS
8001.6801	-63.11	-50.13	13.0	-25.0	25.1	Vertical	PK	PASS
16897.395	-70.84	-44.44	26.4	-25.0	19.4	Vertical	PK	PASS

5G SA_n66

Plot for Low Channel

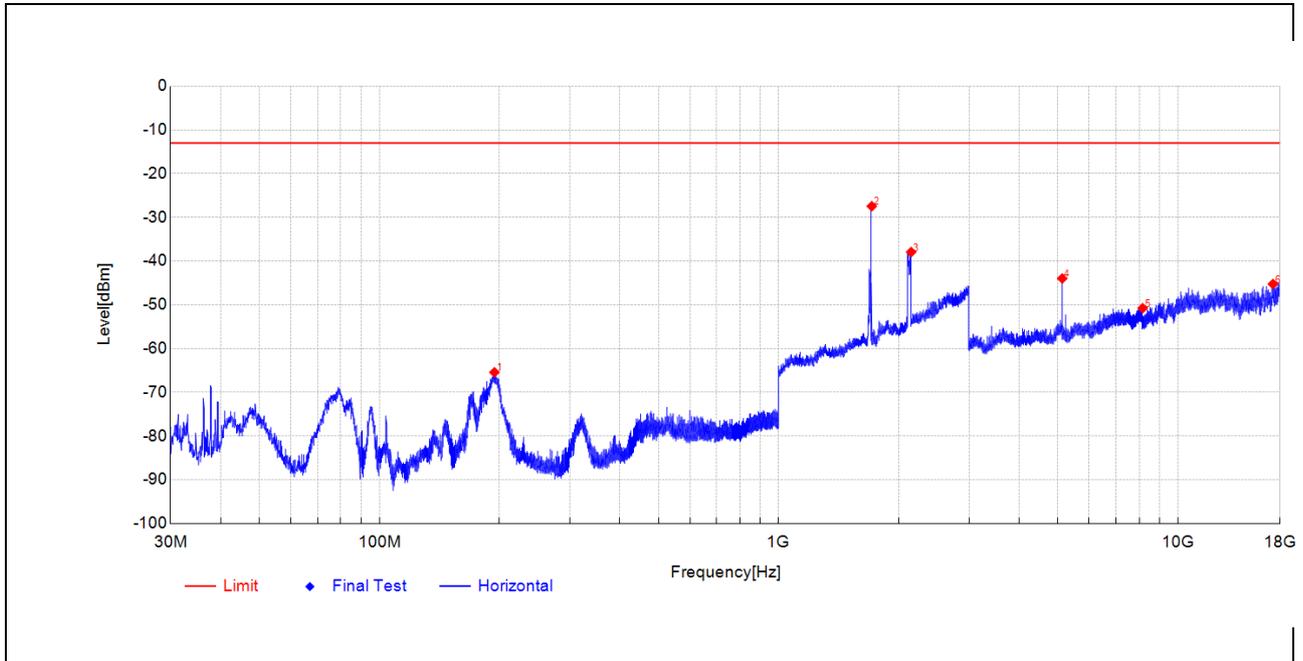

Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
194.1322	-46.61	-65.42	-18.8	-13.0	52.4	Horizontal	PK	PASS
1710.9422	-30.77	-27.44	3.3	-	-	Horizontal	PK	NA
2147.4295	-43.94	-37.92	6.0	-	-	Horizontal	PK	NA
5132.4475	-49.71	-43.96	5.8	-13.0	31.0	Horizontal	PK	PASS
8158.6463	-64.16	-50.76	13.4	-13.0	37.8	Horizontal	PK	PASS
17299.652	-69.24	-45.23	24.0	-13.0	32.2	Horizontal	PK	PASS

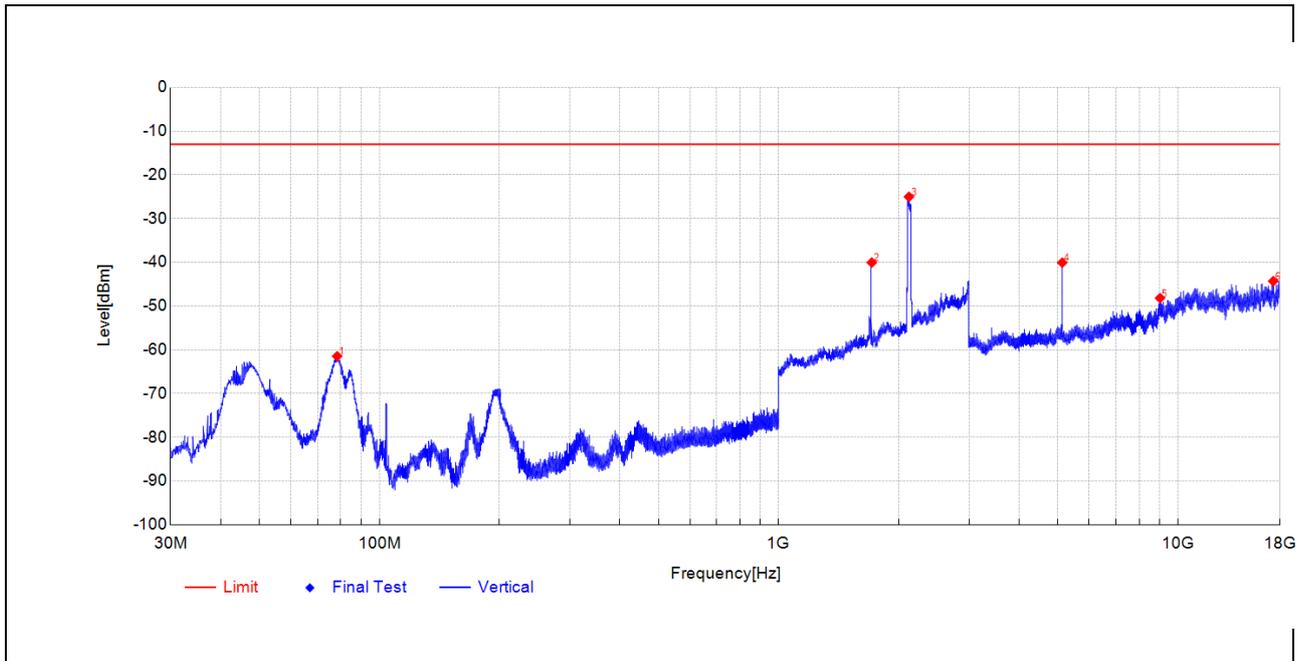


Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
78.3569	-38.67	-61.47	-22.8	-13.0	48.5	Vertical	PK	PASS
1710.9422	-43.52	-40.04	3.5	-	-	Vertical	PK	NA
2120.224	-30.80	-25.01	5.8	-	-	Vertical	PK	NA
5132.4475	-45.34	-40.06	5.3	-13.0	27.1	Vertical	PK	PASS
9019.8008	-63.98	-48.17	15.8	-13.0	35.2	Vertical	PK	PASS
17326.533	-68.94	-44.29	24.7	-13.0	31.3	Vertical	PK	PASS




5G SA_n66

Plot for Mid Channel

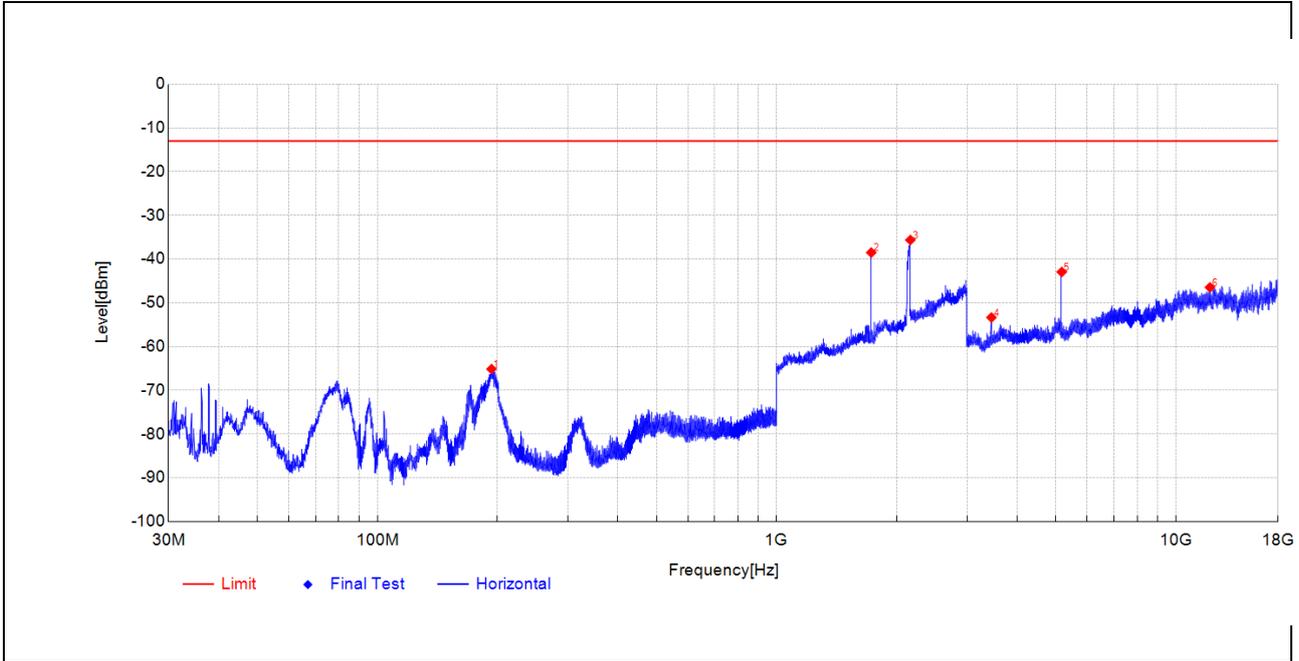

Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
193.1137	-46.14	-65.13	-19.0	-13.0	52.1	Horizontal	PK	PASS
1725.7451	-41.62	-38.50	3.1	-	-	Horizontal	PK	NA
2162.2324	-41.97	-35.62	6.4	-	-	Horizontal	PK	NA
3451.3502	-53.98	-53.34	0.6	-13.0	40.3	Horizontal	PK	PASS
5177.0253	-48.28	-42.94	5.3	-13.0	29.9	Horizontal	PK	PASS
12170.166	-68.24	-46.46	21.8	-13.0	33.5	Horizontal	PK	PASS

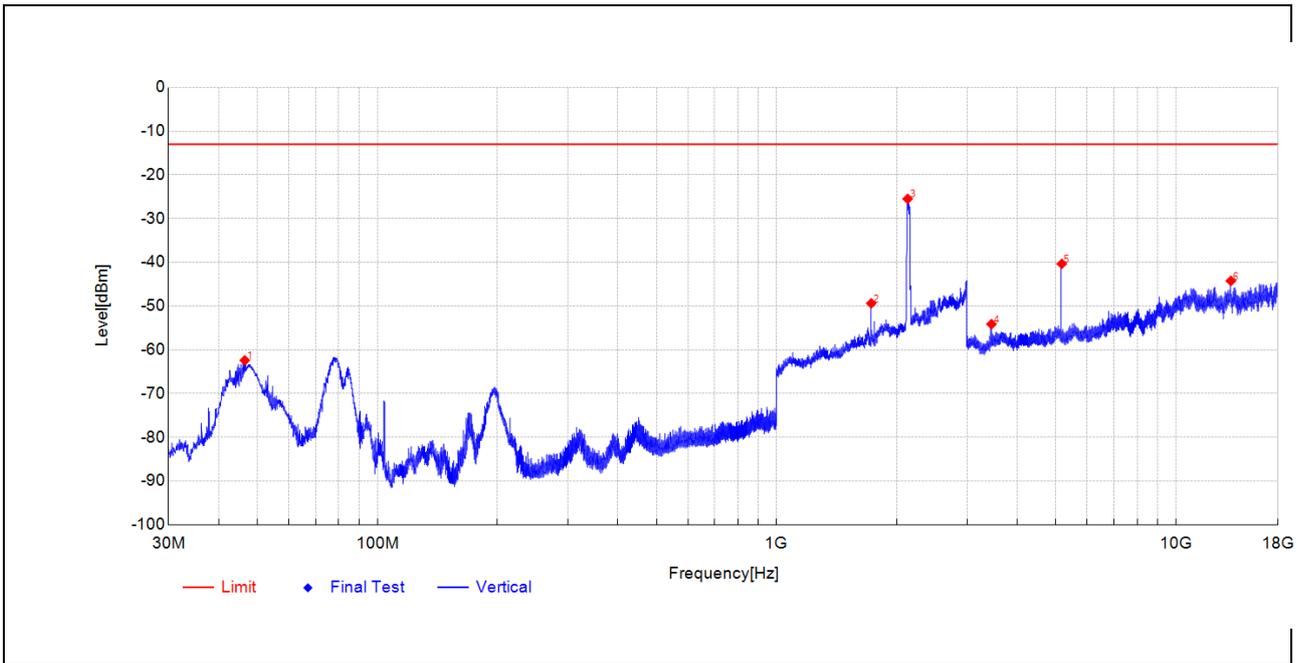


Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
46.5393	-42.71	-62.40	-19.7	-13.0	49.4	Vertical	PK	PASS
1725.7451	-52.79	-49.37	3.4	-	-	Vertical	PK	NA
2129.0258	-31.49	-25.48	6.0	-	-	Vertical	PK	NA
3451.7788	-54.96	-54.12	0.8	-13.0	41.1	Vertical	PK	PASS
5177.8826	-45.36	-40.33	5.0	-13.0	27.3	Vertical	PK	PASS
13728.789	-68.78	-44.24	24.5	-13.0	31.2	Vertical	PK	PASS




5G SA_n66

Plot for High Channel

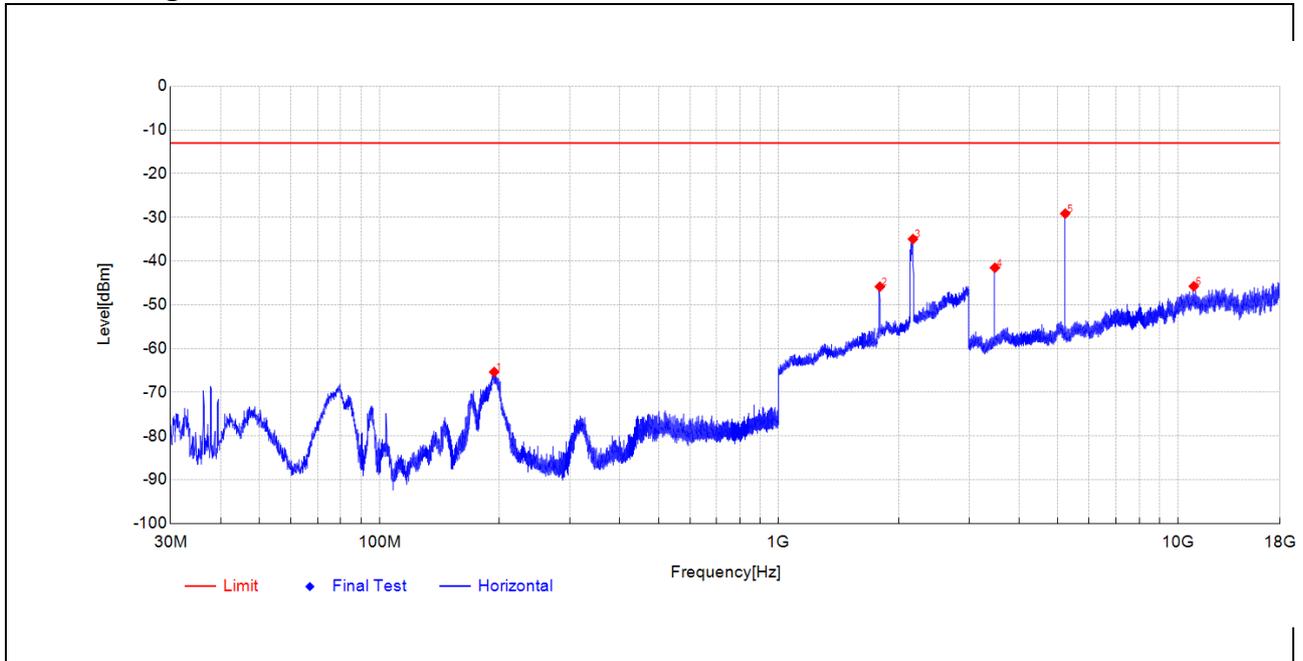

Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
193.8897	-46.49	-65.34	-18.9	-13.0	52.3	Horizontal	PK	PASS
1792.9586	-49.96	-45.84	4.1	-	-	Horizontal	PK	NA
2170.6341	-41.69	-34.95	6.7	-	-	Horizontal	PK	NA
3481.3545	-42.41	-41.51	0.9	-13.0	28.5	Horizontal	PK	PASS
5222.4604	-34.31	-29.12	5.2	-13.0	16.1	Horizontal	PK	PASS
10960.038	-66.56	-45.75	20.8	-13.0	32.8	Horizontal	PK	PASS

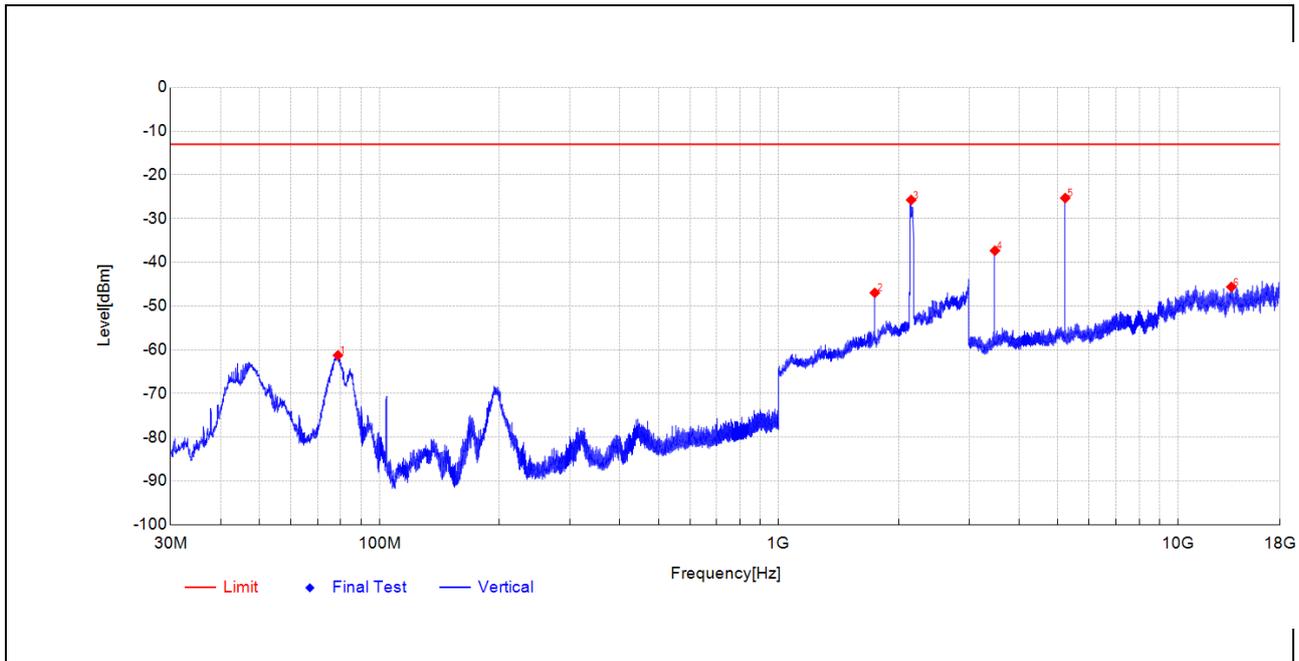


Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
78.7449	-38.36	-61.25	-22.9	-13.0	48.3	Vertical	PK	PASS
1740.9482	-50.40	-46.97	3.4	-	-	Vertical	PK	NA
2148.2296	-31.49	-25.73	5.8	-	-	Vertical	PK	NA
3481.3545	-38.44	-37.32	1.1	-13.0	24.3	Vertical	PK	PASS
5222.889	-30.26	-25.29	5.0	-13.0	12.3	Vertical	PK	PASS
13608.784	-68.98	-45.62	23.4	-13.0	32.6	Vertical	PK	PASS




5G SA_n71

Plot for Low Channel

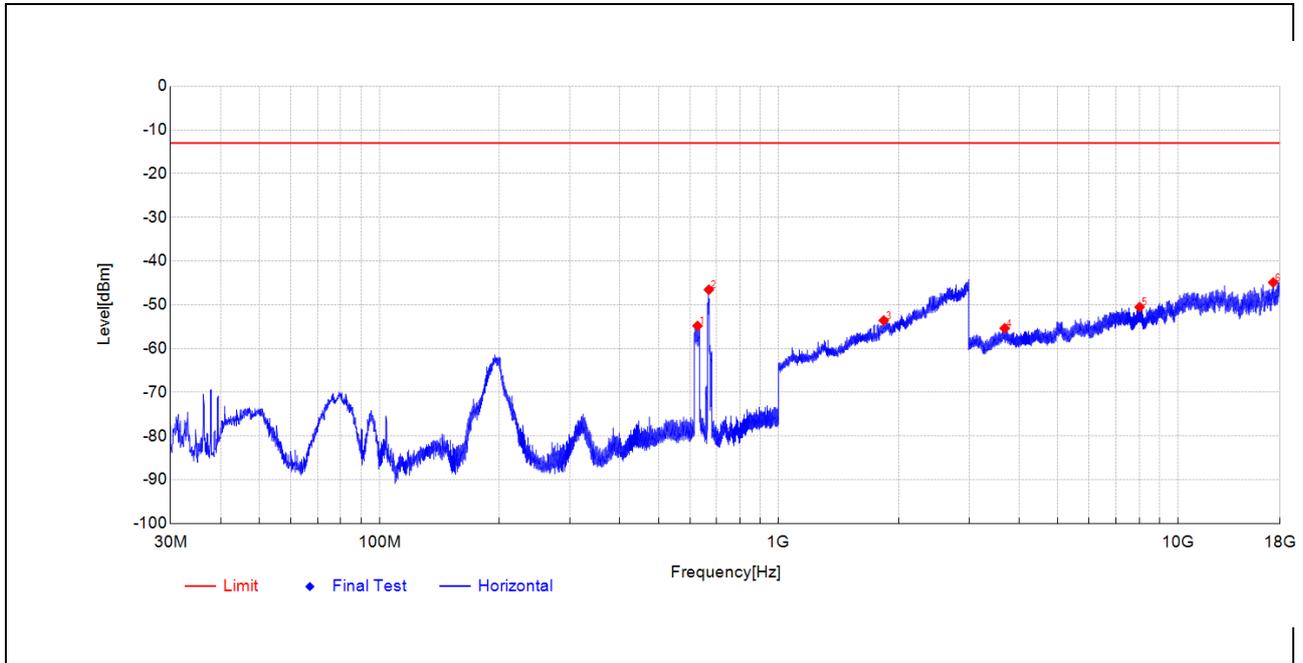

Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
626.3858	-46.04	-54.81	-8.8	-	-	Horizontal	PK	NA
668.7769	-38.44	-46.53	-8.1	-	-	Horizontal	PK	NA
1832.9666	-58.49	-53.57	4.9	-13.0	40.6	Horizontal	PK	PASS
3682.8118	-57.12	-55.36	1.8	-13.0	42.4	Horizontal	PK	PASS
8017.0407	-63.88	-50.50	13.4	-13.0	37.5	Horizontal	PK	PASS
17323.652	-69.08	-44.88	24.2	-13.0	31.9	Horizontal	PK	PASS

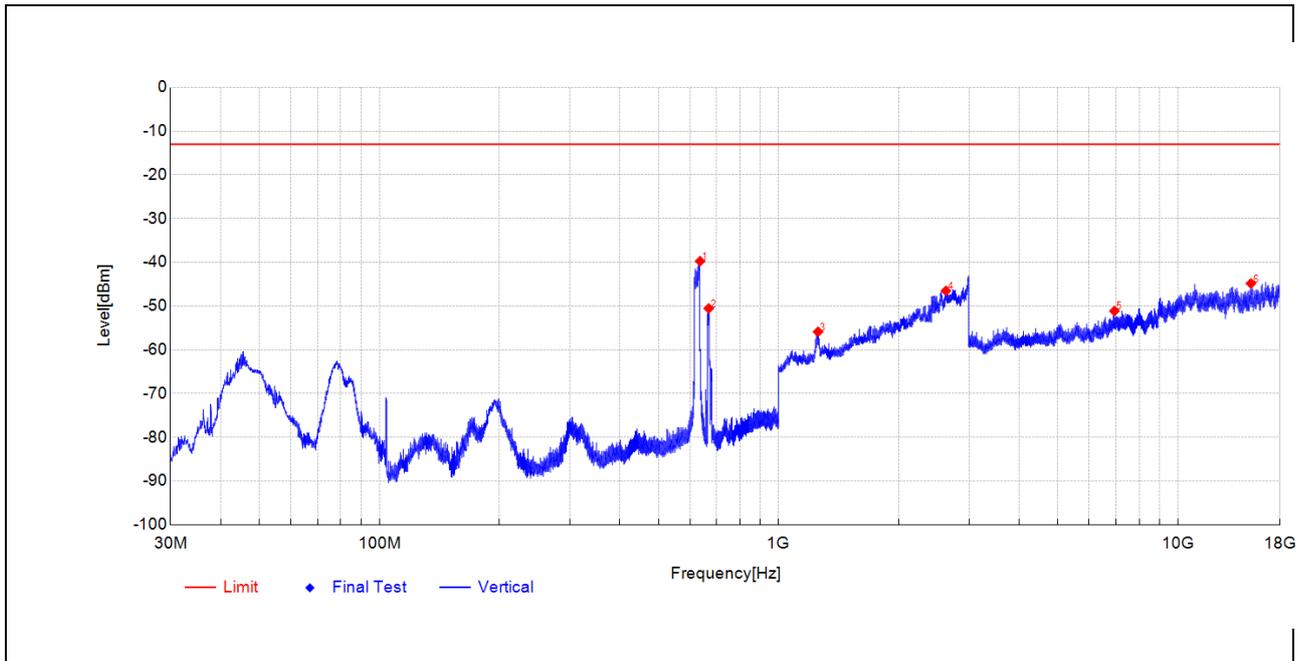


Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
635.6498	-31.21	-39.72	-8.5	-	-	Vertical	PK	NA
668.1949	-42.12	-50.53	-8.4	-	-	Vertical	PK	NA
1254.851	-54.95	-55.87	-0.9	-13.0	42.9	Vertical	PK	PASS
2623.9248	-58.70	-46.50	12.2	-13.0	33.5	Vertical	PK	PASS
6935.5574	-62.04	-51.11	10.9	-13.0	38.1	Vertical	PK	PASS
15241.329	-69.45	-44.82	24.6	-13.0	31.8	Vertical	PK	PASS




5G SA_n71

Plot for Mid Channel

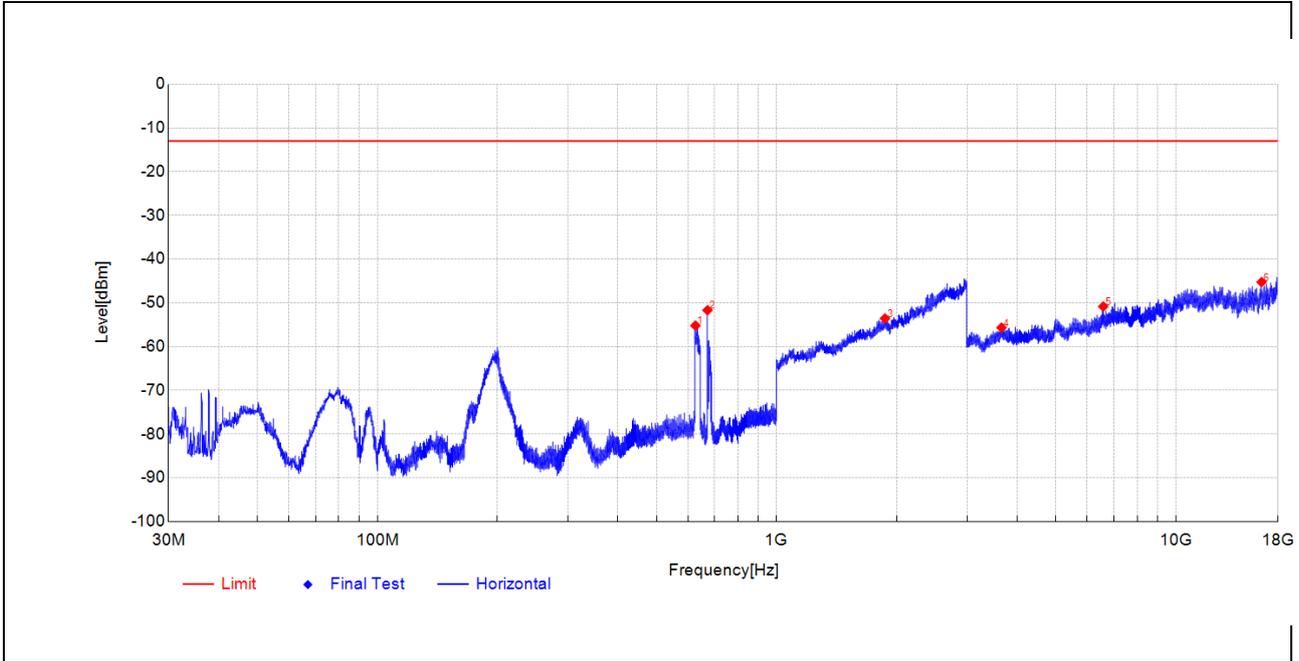

Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
626.0948	-46.43	-55.20	-8.8	-	-	Horizontal	PK	NA
671.008	-43.63	-51.68	-8.1	-	-	Horizontal	PK	NA
1868.1736	-58.98	-53.56	5.4	-13.0	40.6	Horizontal	PK	PASS
3657.5225	-57.38	-55.66	1.7	-13.0	42.7	Horizontal	PK	PASS
6577.9431	-61.95	-50.83	11.1	-13.0	37.8	Horizontal	PK	PASS
16395.775	-70.94	-45.24	25.7	-13.0	32.2	Horizontal	PK	PASS

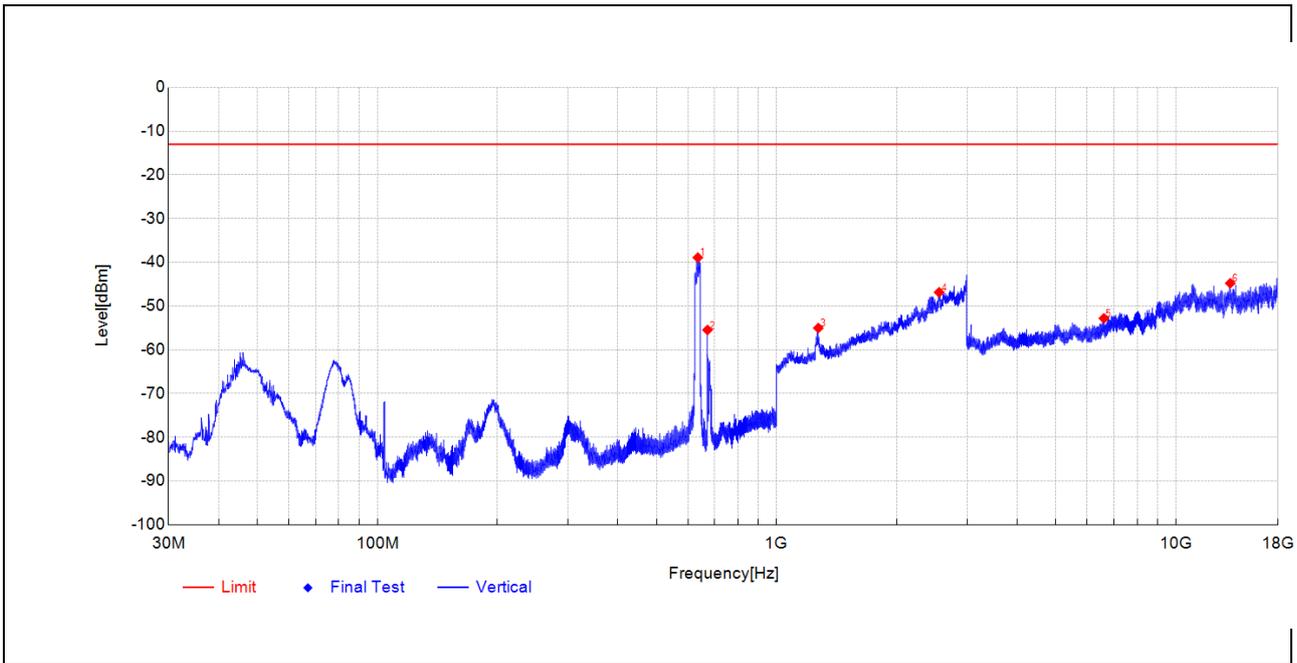


Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
634.9222	-30.38	-38.90	-8.5	-	-	Vertical	PK	NA
671.0566	-47.02	-55.45	-8.4	-	-	Vertical	PK	NA
1271.2543	-54.39	-55.01	-0.6	-13.0	42.0	Vertical	PK	PASS
2552.3105	-59.10	-46.84	12.3	-13.0	33.8	Vertical	PK	PASS
6601.9441	-63.00	-52.80	10.2	-13.0	39.8	Vertical	PK	PASS
13683.187	-69.39	-44.77	24.6	-13.0	31.8	Vertical	PK	PASS




5G SA_n71

Plot for High Channel

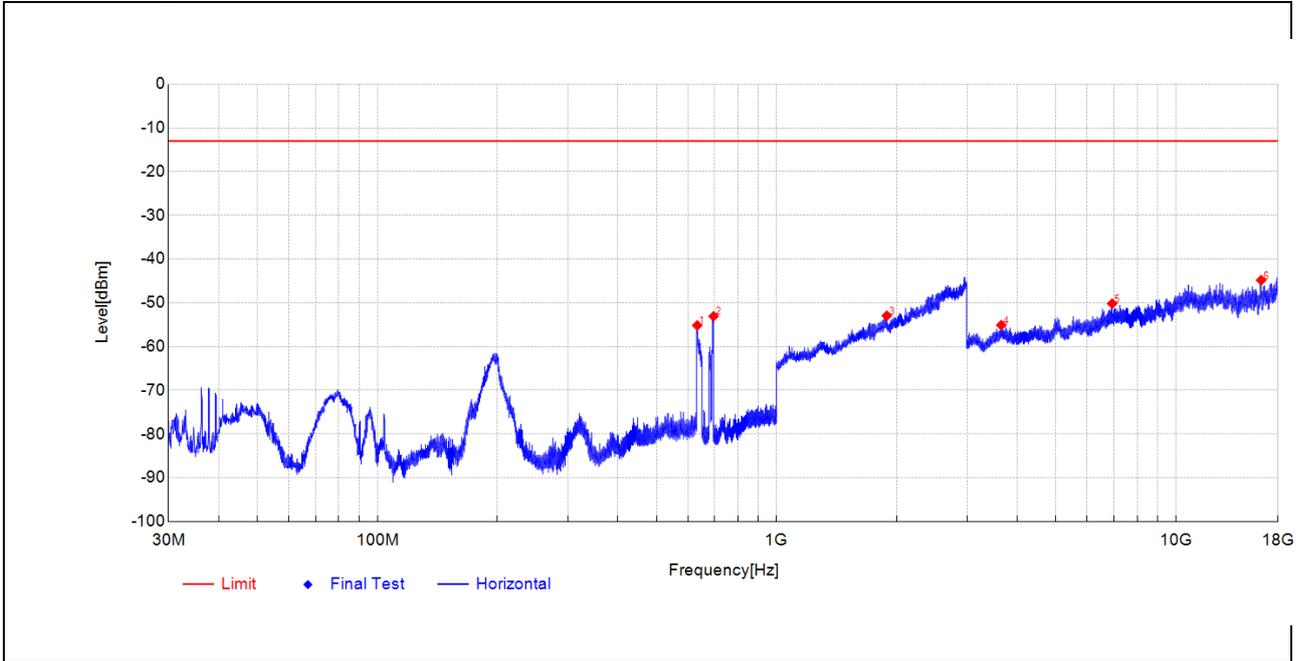

Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
632.5456	-46.49	-55.16	-8.7	-	-	Horizontal	PK	NA
694.9682	-45.14	-53.07	-7.9	-	-	Horizontal	PK	NA
1887.7776	-58.43	-52.93	5.5	-13.0	39.9	Horizontal	PK	PASS
3652.8075	-56.81	-55.09	1.7	-13.0	42.1	Horizontal	PK	PASS
6923.5569	-61.72	-50.17	11.6	-13.0	37.2	Horizontal	PK	PASS
16354.014	-69.89	-44.82	25.1	-13.0	31.8	Horizontal	PK	PASS

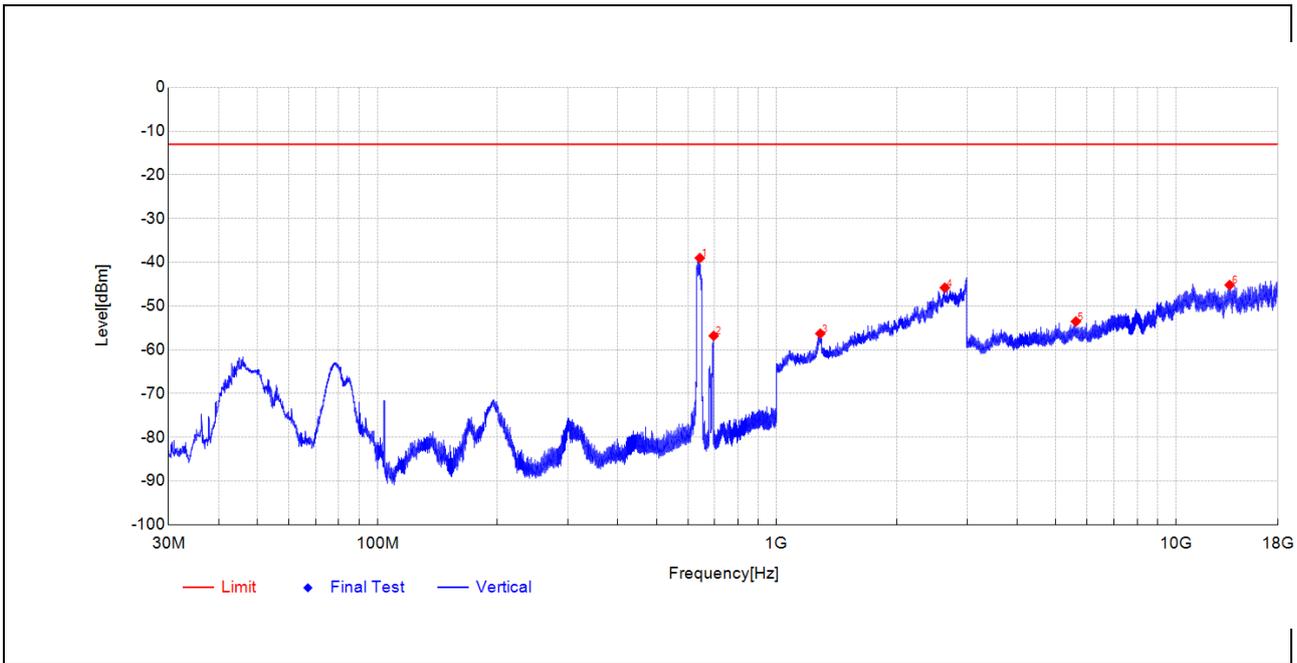


Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
642.3431	-30.57	-39.01	-8.4	-	-	Vertical	PK	NA
695.5988	-48.56	-56.80	-8.2	-	-	Vertical	PK	NA
1286.4573	-55.90	-56.29	-0.4	-13.0	43.3	Vertical	PK	PASS
2637.9276	-58.29	-45.80	12.5	-13.0	32.8	Vertical	PK	PASS
5619.3742	-60.26	-53.52	6.7	-13.0	40.5	Vertical	PK	PASS
13635.665	-69.00	-45.18	23.8	-13.0	32.2	Vertical	PK	PASS




5G SA_n77(3450-3550MHz)

Plot for Mid Channel

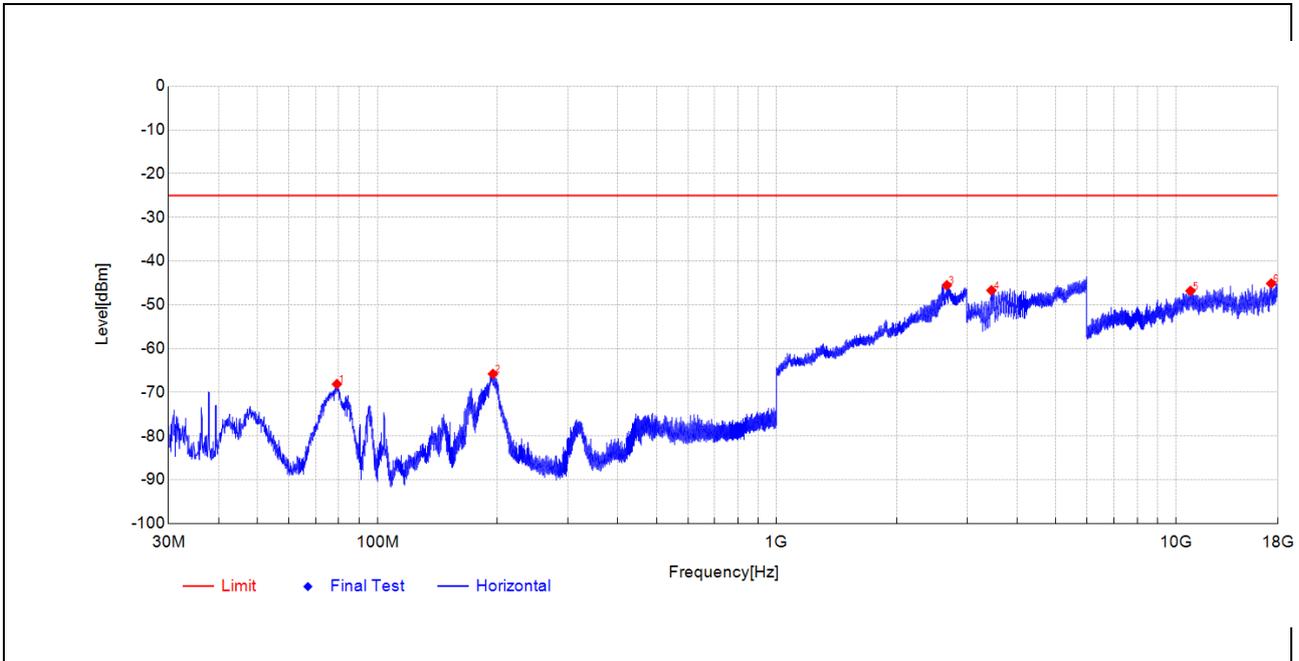

Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
79.1815	-44.61	-68.12	-23.5	-25.0	43.1	Horizontal	PK	PASS
194.7142	-47.11	-65.79	-18.7	-25.0	40.8	Horizontal	PK	PASS
2667.5335	-59.11	-45.52	13.6	-25.0	20.5	Horizontal	PK	PASS
3452.2075	-67.41	-46.69	20.7	-25.0	21.7	Horizontal	PK	PASS
10879.875	-67.66	-46.81	20.9	-25.0	21.8	Horizontal	PK	PASS
17327.973	-69.36	-45.13	24.2	-25.0	20.1	Horizontal	PK	PASS

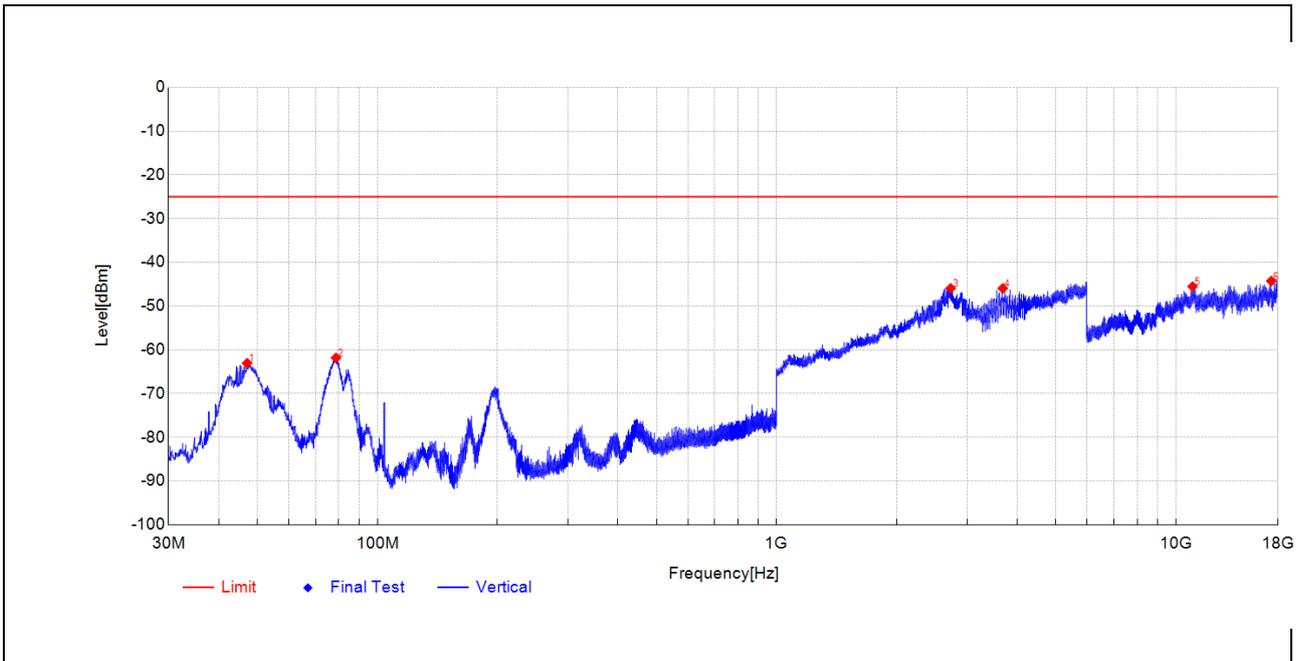


Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
47.1699	-43.56	-63.04	-19.5	-25.0	38.0	Vertical	PK	PASS
78.7449	-39.00	-61.83	-22.8	-25.0	36.8	Vertical	PK	PASS
2728.3457	-58.81	-45.92	12.9	-25.0	20.9	Vertical	PK	PASS
3684.0977	-67.55	-45.94	21.6	-25.0	20.9	Vertical	PK	PASS
11008.040	-67.20	-45.52	21.7	-25.0	20.5	Vertical	PK	PASS
17327.973	-68.92	-44.27	24.7	-25.0	19.3	Vertical	PK	PASS




5G SA_n77(3700-3980MHz)

Plot for Low Channel

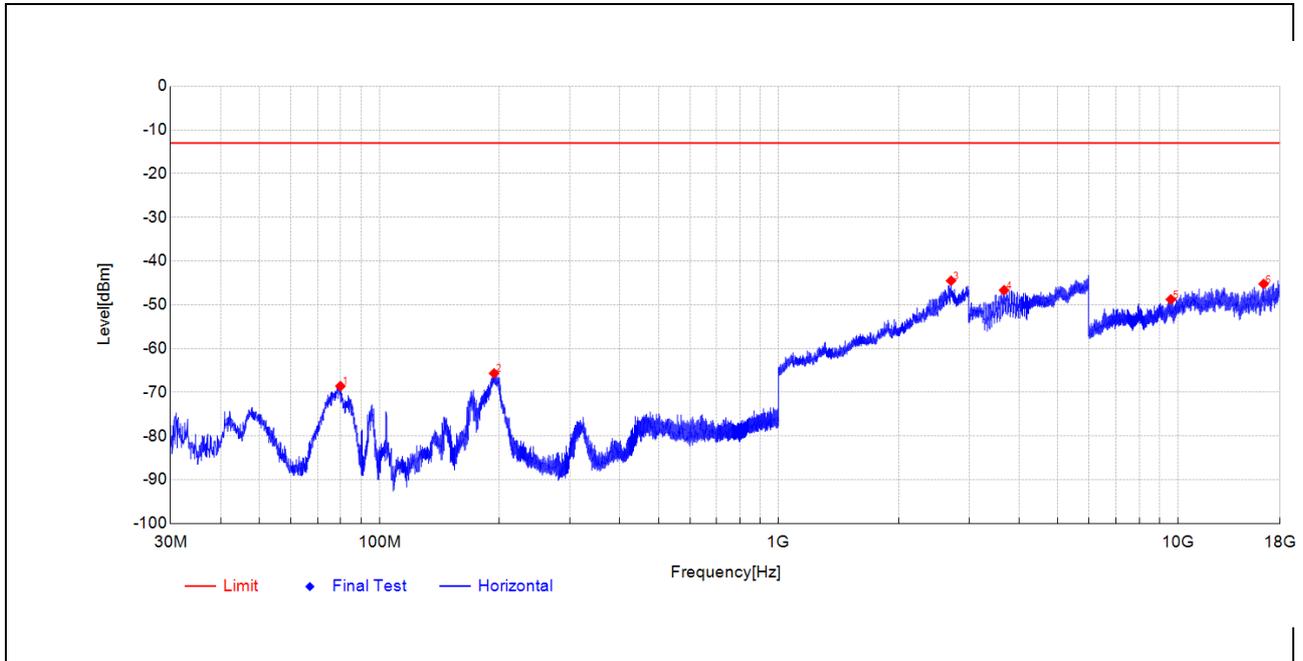

Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
79.8605	-44.85	-68.59	-23.7	-13.0	55.6	Horizontal	PK	PASS
193.7442	-46.82	-65.67	-18.9	-13.0	52.7	Horizontal	PK	PASS
2703.1406	-58.00	-44.48	13.5	-13.0	31.5	Horizontal	PK	PASS
3669.5242	-68.26	-46.65	21.6	-13.0	33.7	Horizontal	PK	PASS
9603.9842	-65.81	-48.76	17.1	-13.0	35.8	Horizontal	PK	PASS
16399.136	-70.98	-45.22	25.8	-13.0	32.2	Horizontal	PK	PASS

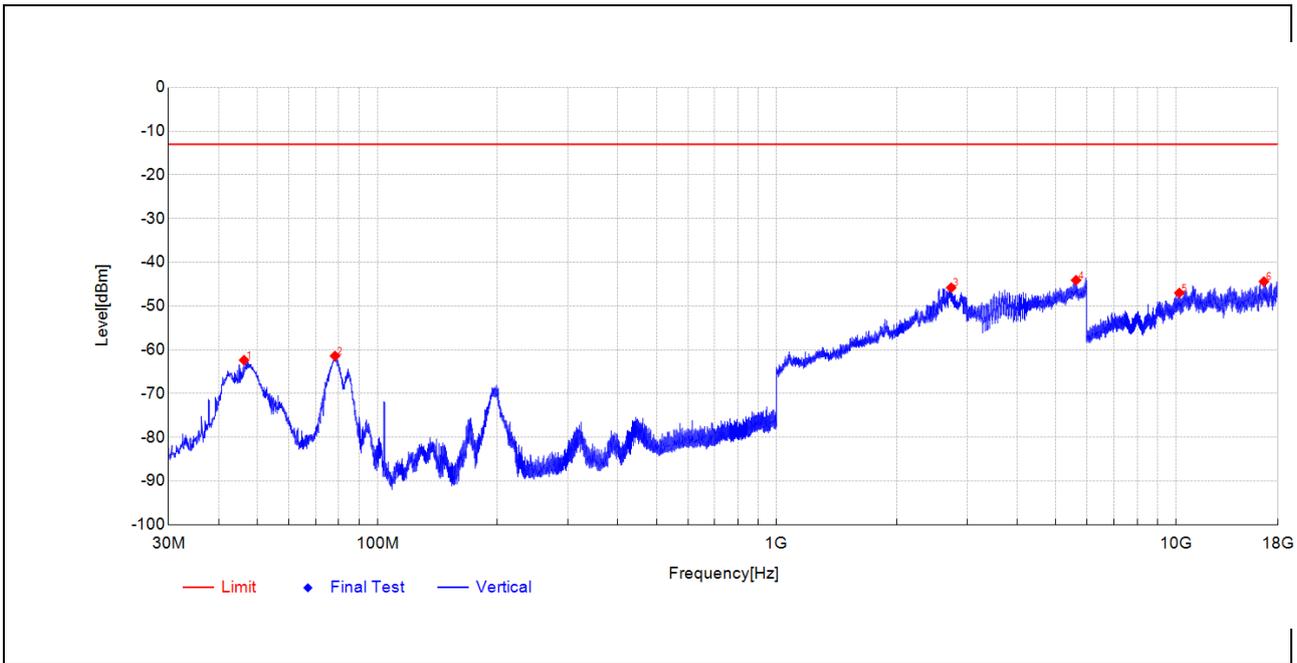


Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
46.3453	-42.62	-62.36	-19.7	-13.0	49.4	Vertical	PK	PASS
78.3084	-38.67	-61.40	-22.7	-13.0	48.4	Vertical	PK	PASS
2736.7473	-58.51	-45.79	12.7	-13.0	32.8	Vertical	PK	PASS
5624.9464	-70.44	-44.08	26.4	-13.0	31.1	Vertical	PK	PASS
10198.727	-66.72	-46.98	19.7	-13.0	34.0	Vertical	PK	PASS
16616.584	-70.25	-44.38	25.9	-13.0	31.4	Vertical	PK	PASS




5G SA_n77(3700-3980MHz)

Plot for Mid Channel

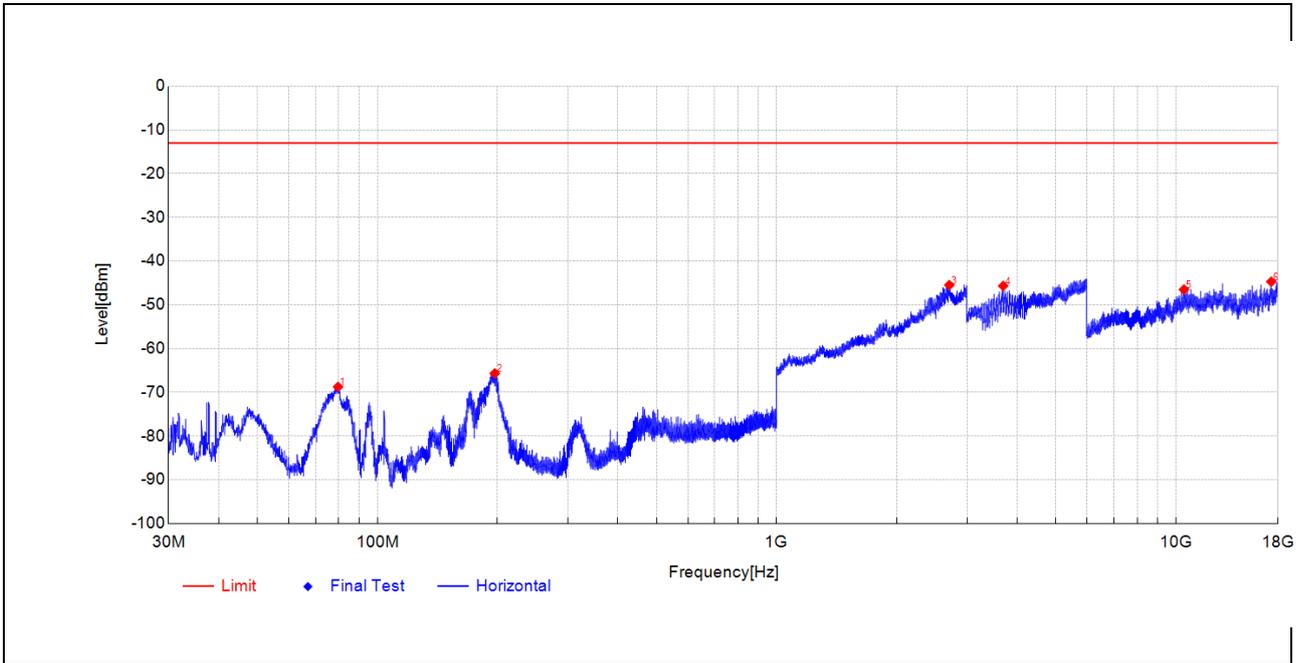

Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
79.6665	-45.07	-68.75	-23.7	-13.0	55.8	Horizontal	PK	PASS
196.7028	-47.34	-65.67	-18.3	-13.0	52.7	Horizontal	PK	PASS
2706.7413	-58.90	-45.48	13.4	-13.0	32.5	Horizontal	PK	PASS
3692.6704	-67.33	-45.66	21.7	-13.0	32.7	Horizontal	PK	PASS
10475.219	-65.79	-46.49	19.3	-13.0	33.5	Horizontal	PK	PASS
17331.813	-68.96	-44.70	24.3	-13.0	31.7	Horizontal	PK	PASS

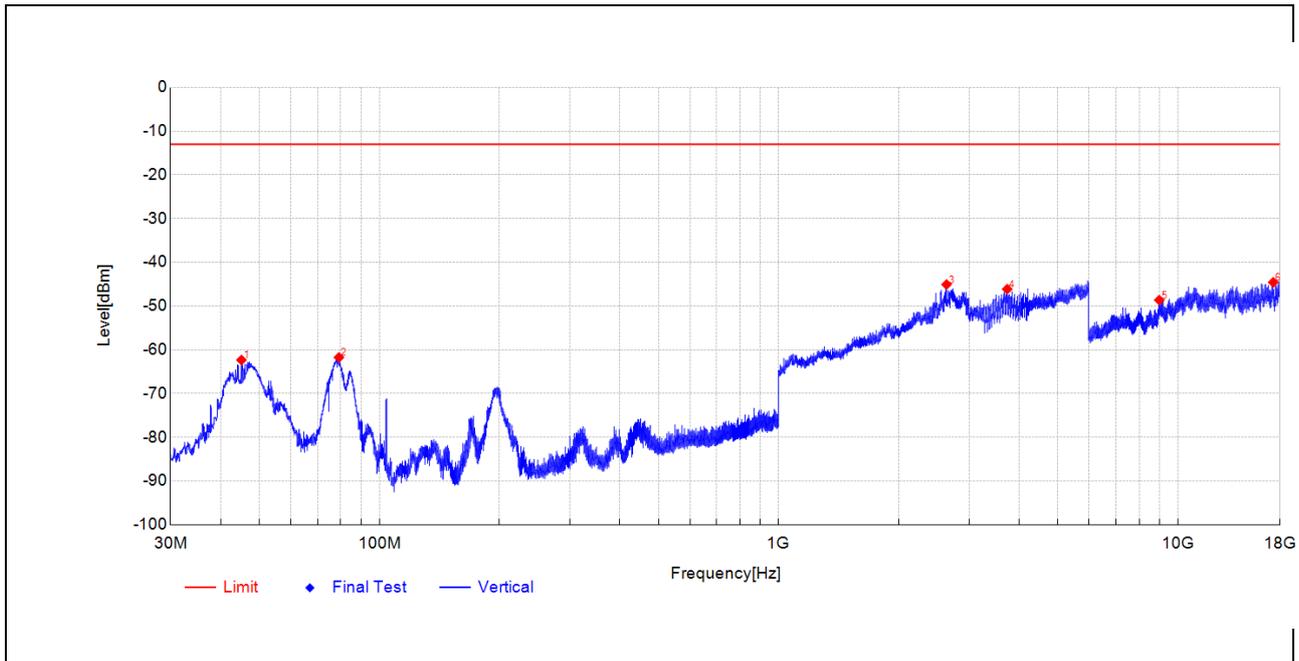


Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
45.1328	-42.17	-62.32	-20.2	-13.0	49.3	Vertical	PK	PASS
79.1815	-38.80	-61.74	-22.9	-13.0	48.7	Vertical	PK	PASS
2633.5267	-58.32	-45.06	13.3	-13.0	32.1	Vertical	PK	PASS
3736.3909	-67.57	-46.13	21.4	-13.0	33.1	Vertical	PK	PASS
8980.4392	-63.91	-48.63	15.3	-13.0	35.6	Vertical	PK	PASS
17331.333	-69.22	-44.56	24.7	-13.0	31.6	Vertical	PK	PASS




5G SA_n77(3700-3980MHz)

Plot for High Channel

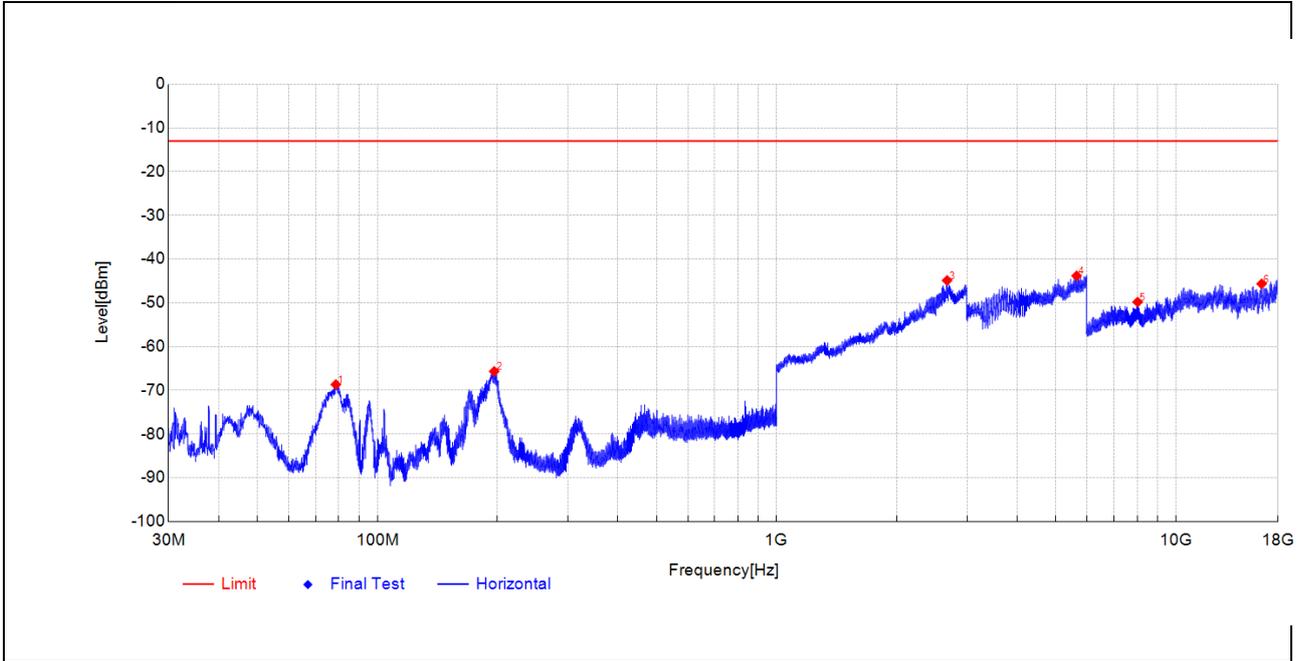

Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
78.6964	-45.32	-68.67	-23.4	-13.0	55.7	Horizontal	PK	PASS
196.1208	-47.24	-65.67	-18.4	-13.0	52.7	Horizontal	PK	PASS
2672.3345	-58.46	-44.87	13.6	-13.0	31.9	Horizontal	PK	PASS
5640.3772	-70.47	-43.81	26.7	-13.0	30.8	Horizontal	PK	PASS
8018.9608	-63.20	-49.81	13.4	-13.0	36.8	Horizontal	PK	PASS
16397.215	-71.37	-45.65	25.7	-13.0	32.7	Horizontal	PK	PASS

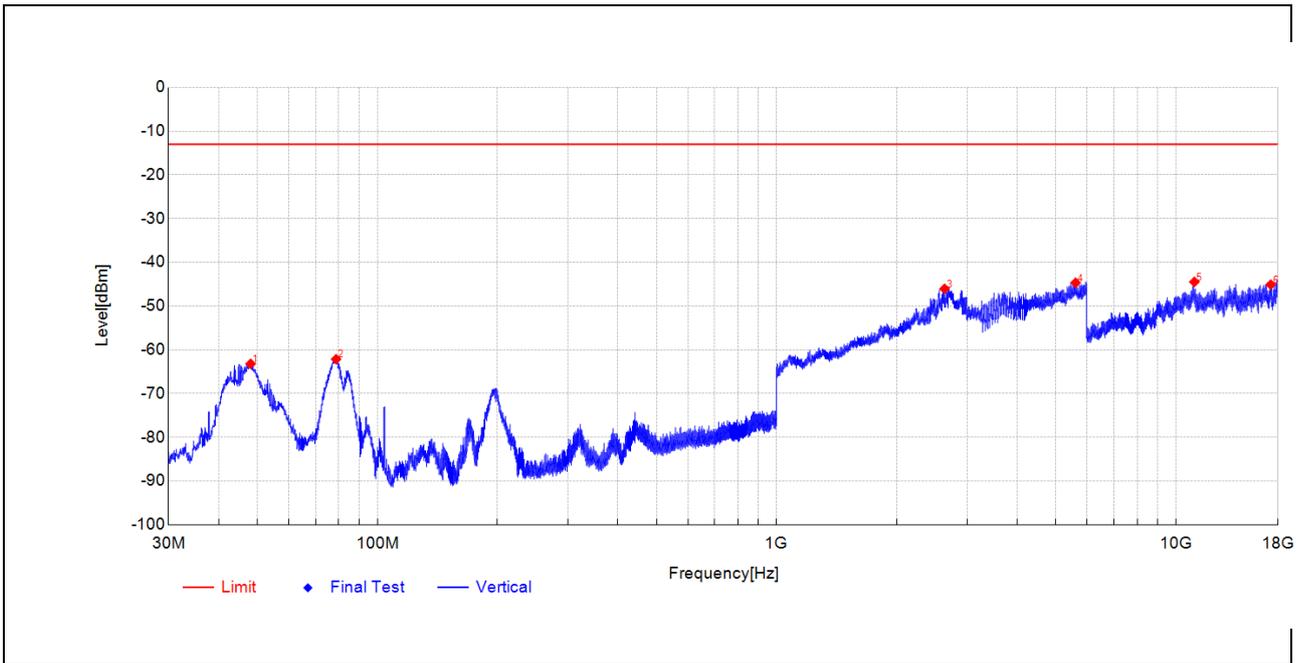


Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
48.1399	-44.04	-63.19	-19.2	-13.0	50.2	Vertical	PK	PASS
78.7934	-39.29	-62.14	-22.9	-13.0	49.1	Vertical	PK	PASS
2633.5267	-59.30	-46.04	13.3	-13.0	33.0	Vertical	PK	PASS
5607.8011	-71.13	-44.66	26.5	-13.0	31.7	Vertical	PK	PASS
11121.804	-66.29	-44.46	21.8	-13.0	31.5	Vertical	PK	PASS
17281.891	-69.58	-45.08	24.5	-13.0	32.1	Vertical	PK	PASS




5G SA_n78(3450-3550MHz)

Plot for Mid Channel

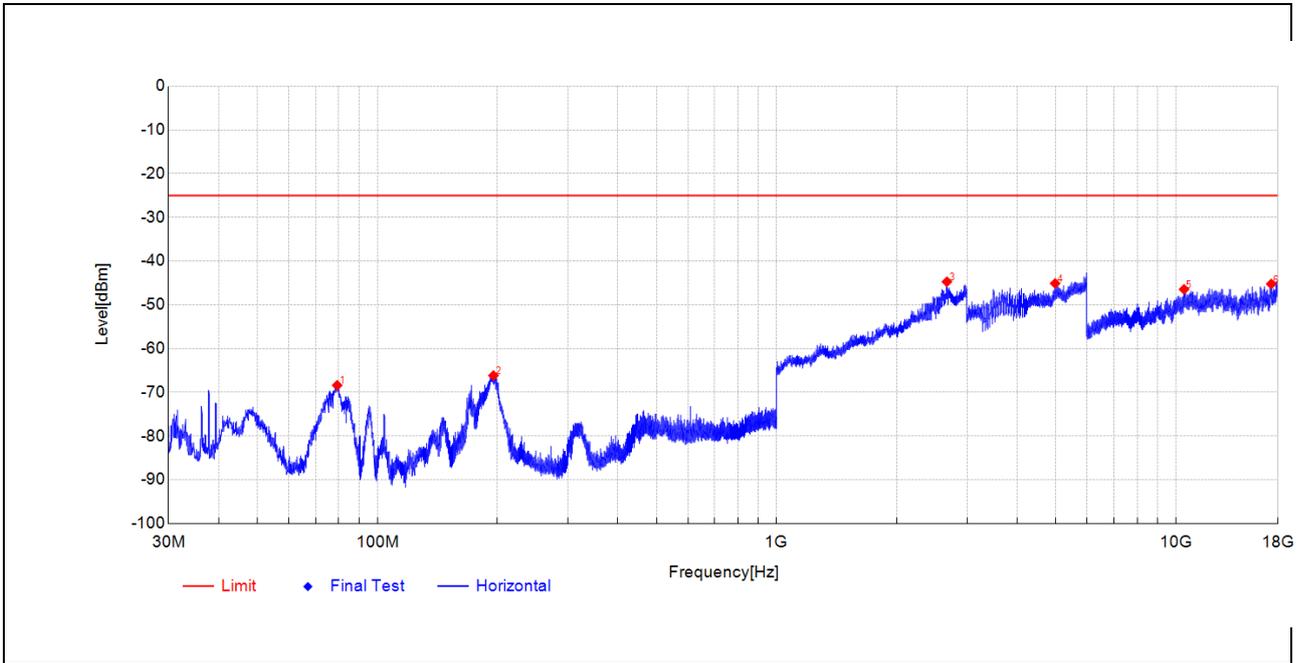

Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
79.2785	-44.86	-68.40	-23.5	-25.0	43.4	Horizontal	PK	PASS
195.2478	-47.57	-66.16	-18.6	-25.0	41.2	Horizontal	PK	PASS
2670.3341	-58.30	-44.71	13.6	-25.0	19.7	Horizontal	PK	PASS
4984.5692	-70.15	-45.09	25.1	-25.0	20.1	Horizontal	PK	PASS
10480.499	-65.75	-46.44	19.3	-25.0	21.4	Horizontal	PK	PASS
17329.893	-69.47	-45.22	24.3	-25.0	20.2	Horizontal	PK	PASS

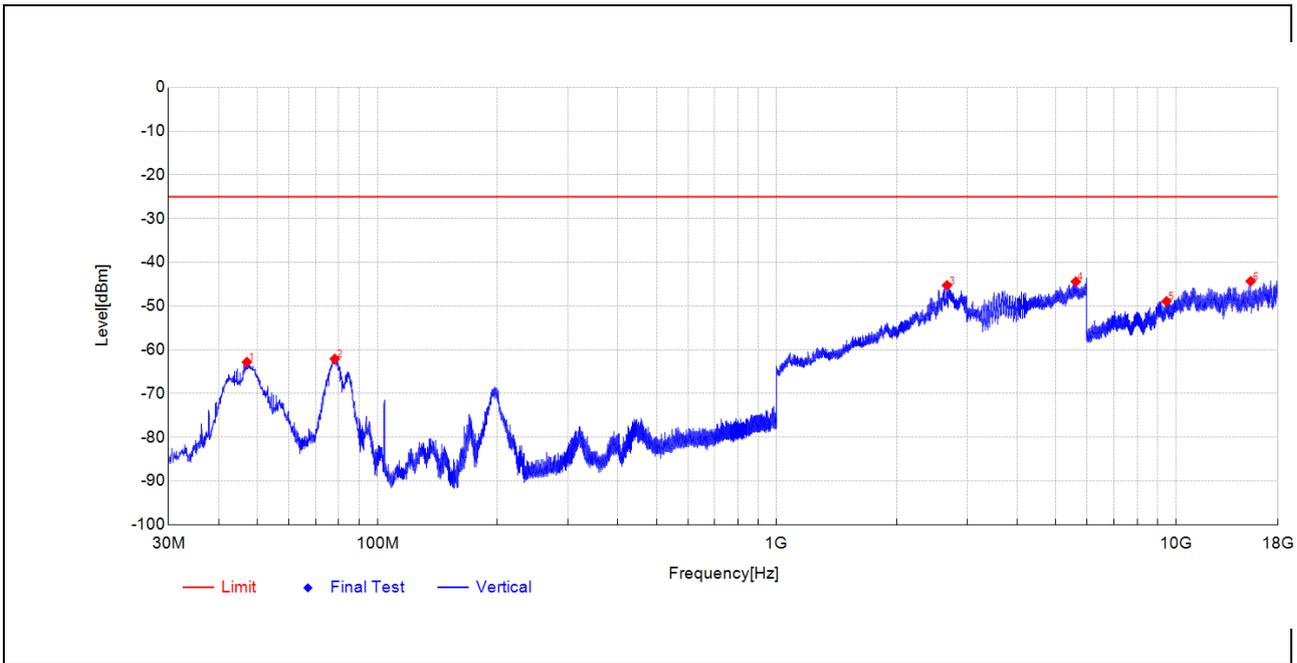


Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
47.1214	-43.31	-62.80	-19.5	-25.0	37.8	Vertical	PK	PASS
78.2114	-39.37	-62.07	-22.7	-25.0	37.1	Vertical	PK	PASS
2670.3341	-57.86	-45.26	12.6	-25.0	20.3	Vertical	PK	PASS
5615.5165	-70.83	-44.41	26.4	-25.0	19.4	Vertical	PK	PASS
9470.0588	-65.78	-48.90	16.9	-25.0	23.9	Vertical	PK	PASS
15397.335	-69.93	-44.31	25.6	-25.0	19.3	Vertical	PK	PASS




5G SA_n78(3700-3800MHz)

Plot for Mid Channel

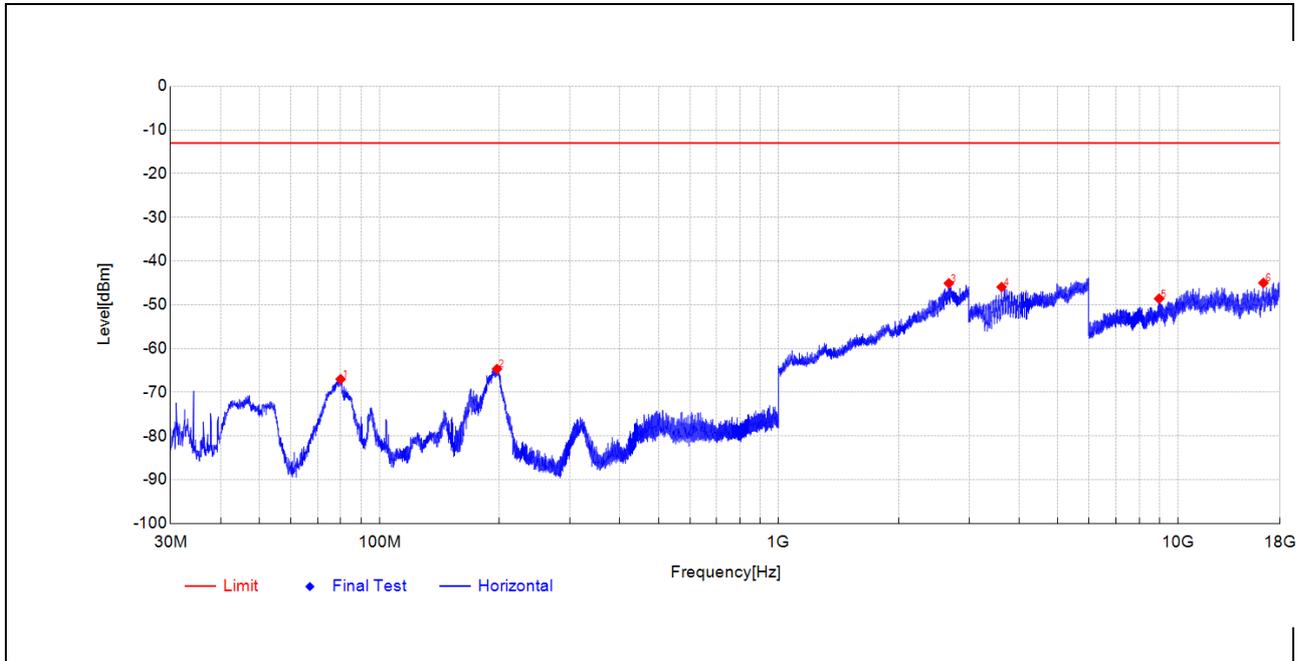

Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
79.9575	-43.22	-66.99	-23.8	-13.0	54.0	Horizontal	PK	PASS
196.9938	-46.39	-64.67	-18.3	-13.0	51.7	Horizontal	PK	PASS
2668.7337	-58.66	-45.07	13.6	-13.0	32.1	Horizontal	PK	PASS
3617.6597	-67.38	-45.93	21.5	-13.0	32.9	Horizontal	PK	PASS
8973.2389	-63.78	-48.58	15.2	-13.0	35.6	Horizontal	PK	PASS
16373.214	-70.34	-44.98	25.4	-13.0	32.0	Horizontal	PK	PASS

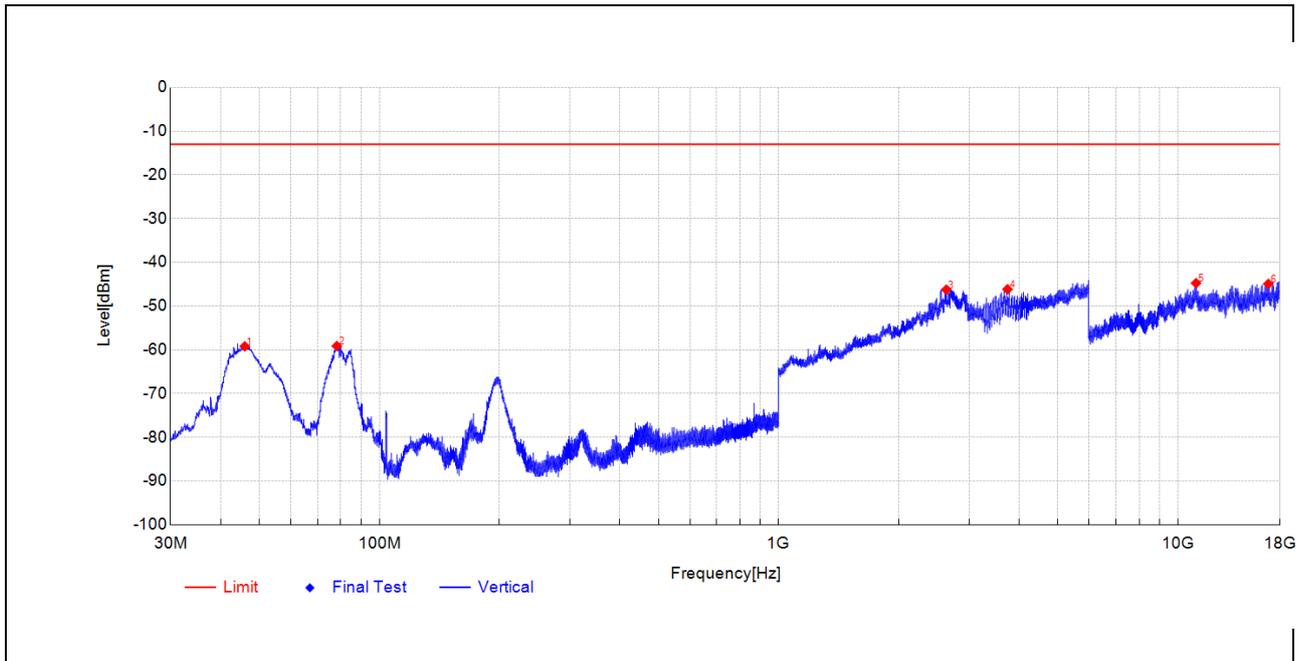


Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
46.0058	-39.33	-59.19	-19.9	-13.0	46.2	Vertical	PK	PASS
78.2114	-36.43	-59.13	-22.7	-13.0	46.1	Vertical	PK	PASS
2629.926	-59.53	-46.22	13.3	-13.0	33.2	Vertical	PK	PASS
3743.249	-67.54	-46.15	21.4	-13.0	33.2	Vertical	PK	PASS
11104.044	-66.67	-44.75	21.9	-13.0	31.8	Vertical	PK	PASS
16848.914	-71.00	-44.93	26.1	-13.0	31.9	Vertical	PK	PASS




5G NSA_B66_n41

Plot for Low Channel

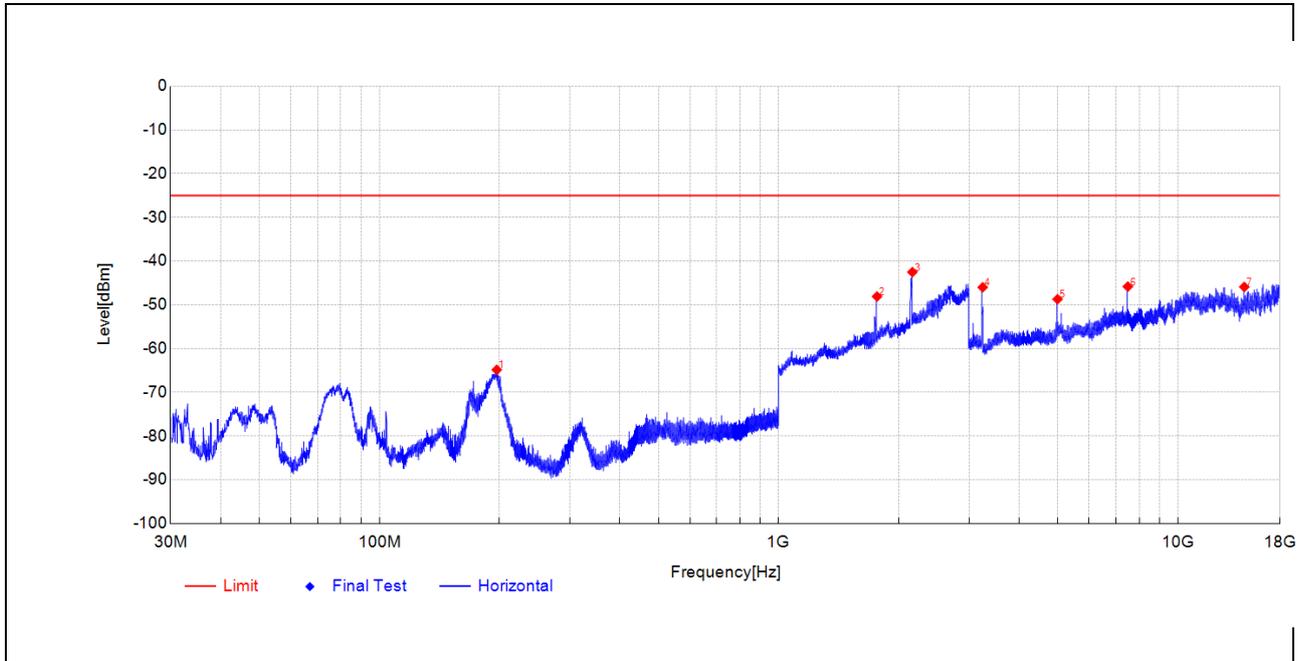


Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
196.7513	-46.53	-64.85	-18.3	-25.0	39.9	Horizontal	PK	PASS
1763.7528	-50.67	-48.09	2.6	-	-	Horizontal	PK	NA
2162.6325	-48.77	-42.50	6.3	-	-	Horizontal	PK	NA
3243.892	-45.35	-45.98	-0.6	-25.0	21.0	Horizontal	PK	PASS
4994.8564	-54.71	-48.71	6.0	-25.0	23.7	Horizontal	PK	PASS
7492.3797	-58.15	-45.82	12.3	-25.0	20.8	Horizontal	PK	PASS
14668.666	-69.53	-45.90	23.6	-25.0	20.9	Horizontal	PK	PASS
196.7513	-46.53	-64.85	-18.3	-25.0	39.9	Horizontal	PK	PASS

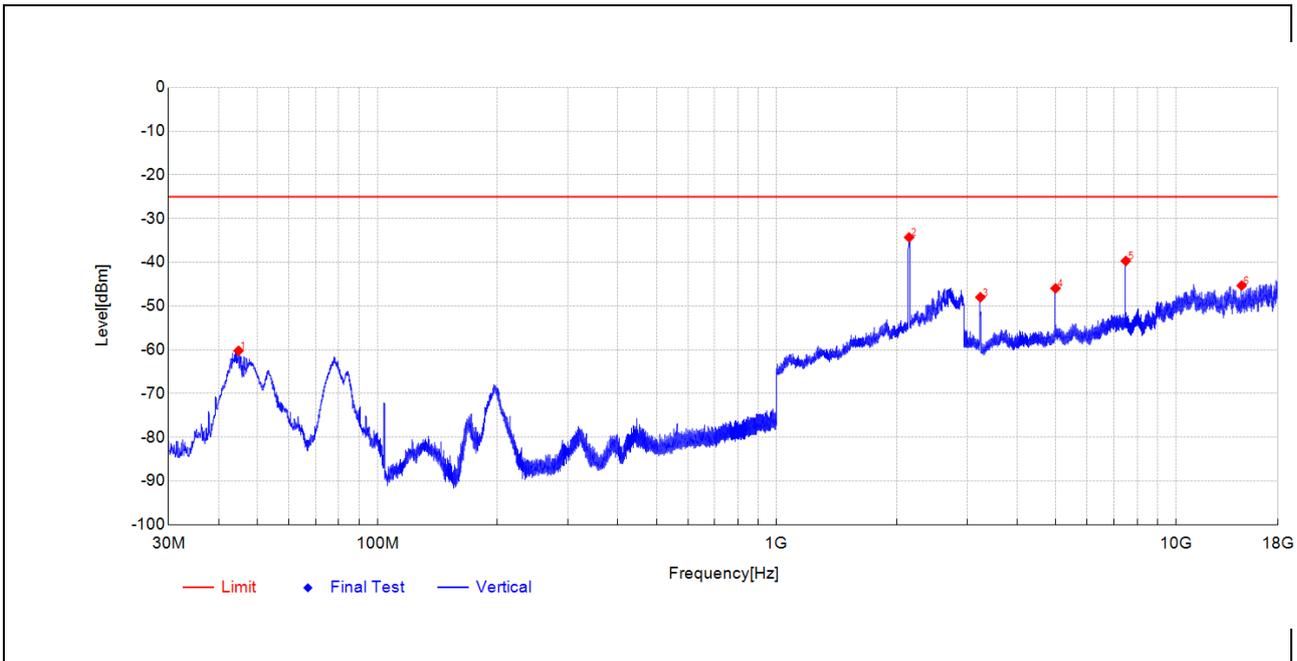


Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
44.8902	-39.98	-60.21	-20.2	-25.0	35.2	Vertical	PK	PASS
2146.6293	-39.95	-34.29	5.7	-	-	Vertical	PK	NA
3237.8911	-47.28	-47.97	-0.7	-25.0	23.0	Vertical	PK	PASS
4994.4278	-51.38	-45.94	5.4	-25.0	20.9	Vertical	PK	PASS
7491.8997	-51.60	-39.68	11.9	-25.0	14.7	Vertical	PK	PASS
14612.024	-69.29	-45.31	24.0	-25.0	20.3	Vertical	PK	PASS
44.8902	-39.98	-60.21	-20.2	-25.0	35.2	Vertical	PK	PASS

5G NSA_B66_n41

Plot for Mid Channel

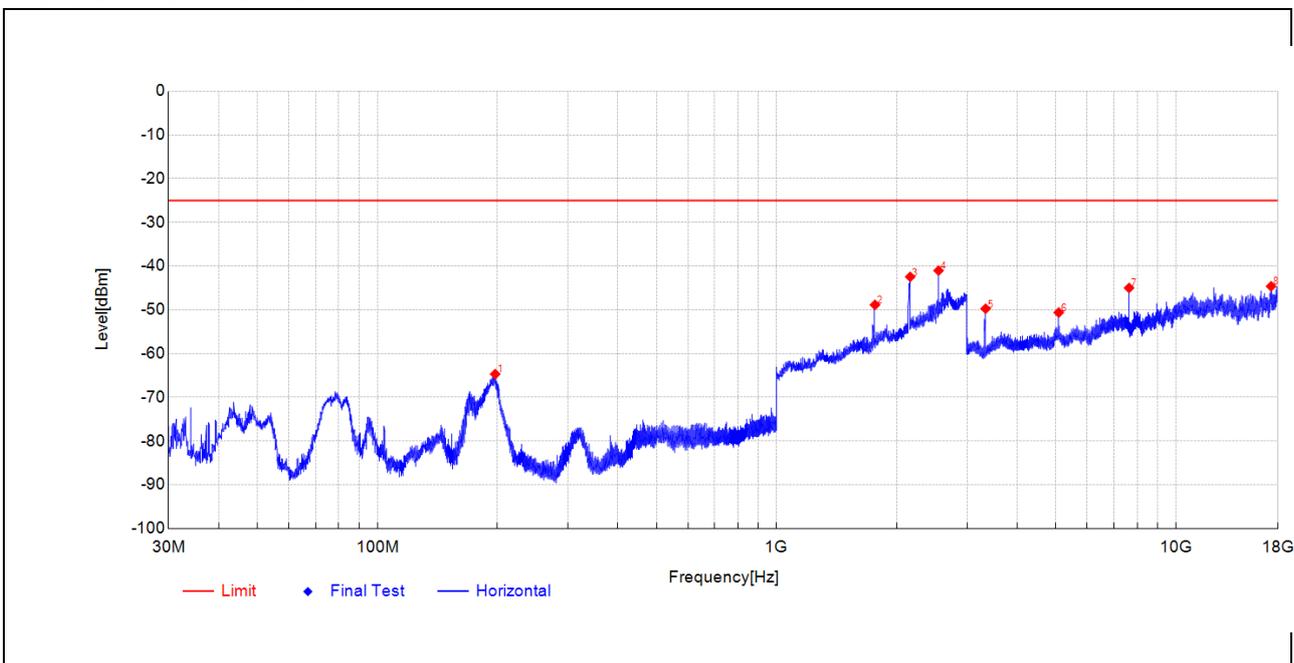


Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
197.2364	-46.45	-64.69	-18.2	-13.0	51.7	Horizontal	PK	PASS
1763.3527	-51.42	-48.86	2.6	-	-	Horizontal	PK	NA
2160.6321	-48.63	-42.45	6.2	-	-	Horizontal	PK	NA
2544.3089	-52.32	-41.02	11.3	-13.0	28.0	Horizontal	PK	PASS
3336.9053	-48.98	-49.74	-0.8	-13.0	36.7	Horizontal	PK	PASS
5088.727	-56.67	-50.61	6.1	-13.0	37.6	Horizontal	PK	PASS
7633.0253	-56.91	-44.99	11.9	-13.0	32.0	Horizontal	PK	PASS
17317.412	-68.74	-44.60	24.1	-13.0	31.6	Horizontal	PK	PASS

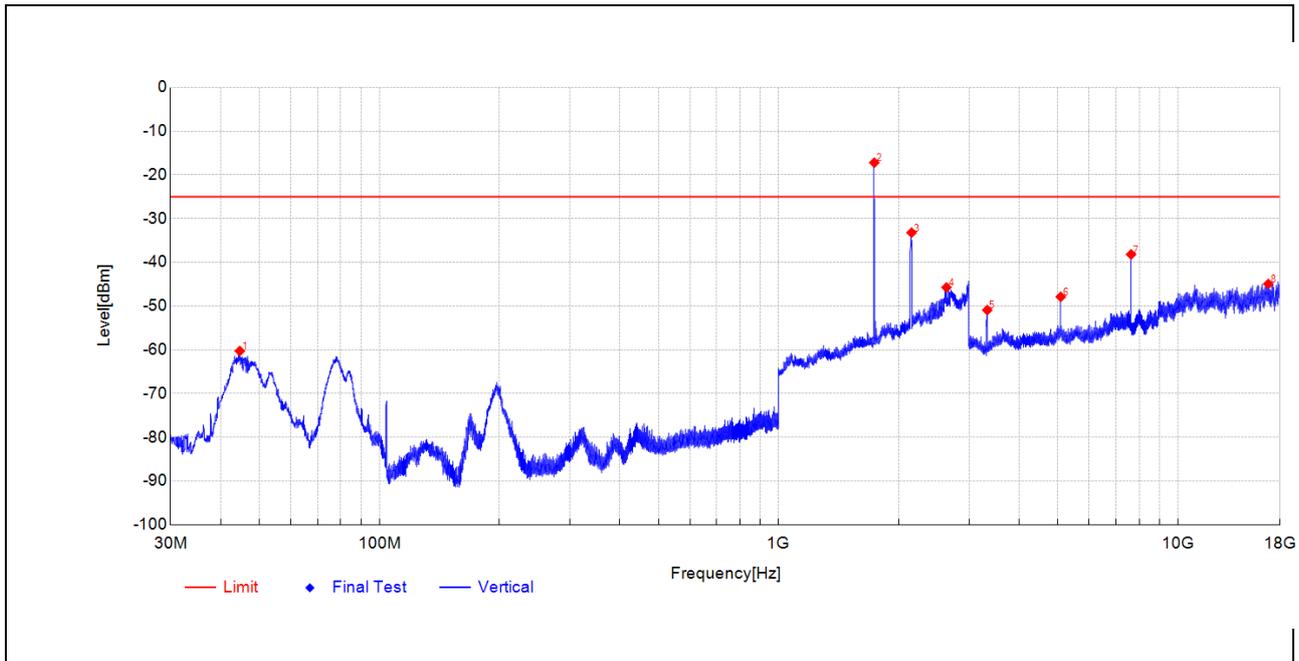


Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
44.6962	-39.97	-60.26	-20.3	-13.0	47.3	Vertical	PK	PASS
1736.1472	-19.85	-17.20	2.7	-	-	Vertical	PK	NA
2152.6305	-38.77	-33.20	5.6	-	-	Vertical	PK	NA
2632.3265	-59.00	-45.72	13.3	-	-	Vertical	PK	NA
3330.4758	-50.16	-50.90	-0.7	-13.0	37.9	Vertical	PK	PASS
5088.727	-53.33	-47.87	5.5	-13.0	34.9	Vertical	PK	PASS
7633.5053	-49.43	-38.17	11.3	-13.0	25.2	Vertical	PK	PASS
16844.593	-70.98	-44.94	26.0	-13.0	31.9	Vertical	PK	PASS



5G NSA_B66_n41
Plot for High Channel

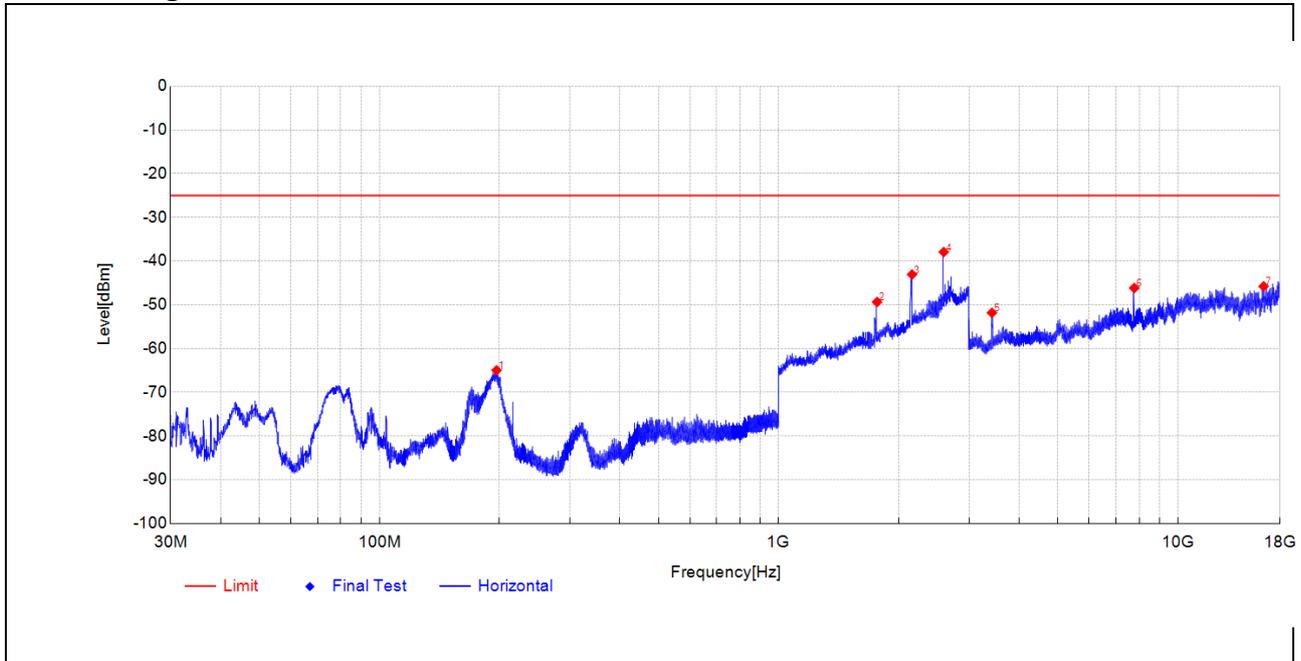

Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
196.5573	-46.60	-64.96	-18.4	-25.0	40.0	Horizontal	PK	PASS
1764.1528	-51.93	-49.34	2.6	-	-	Horizontal	PK	NA
2158.6317	-49.13	-43.05	6.1	-	-	Horizontal	PK	NA
2591.1182	-50.18	-37.92	12.3	-	-	Horizontal	PK	NA
3421.3459	-52.21	-51.82	0.4	-25.0	26.8	Horizontal	PK	PASS
7774.631	-58.63	-46.15	12.5	-25.0	21.2	Horizontal	PK	PASS
16395.295	-71.46	-45.76	25.7	-25.0	20.8	Horizontal	PK	PASS

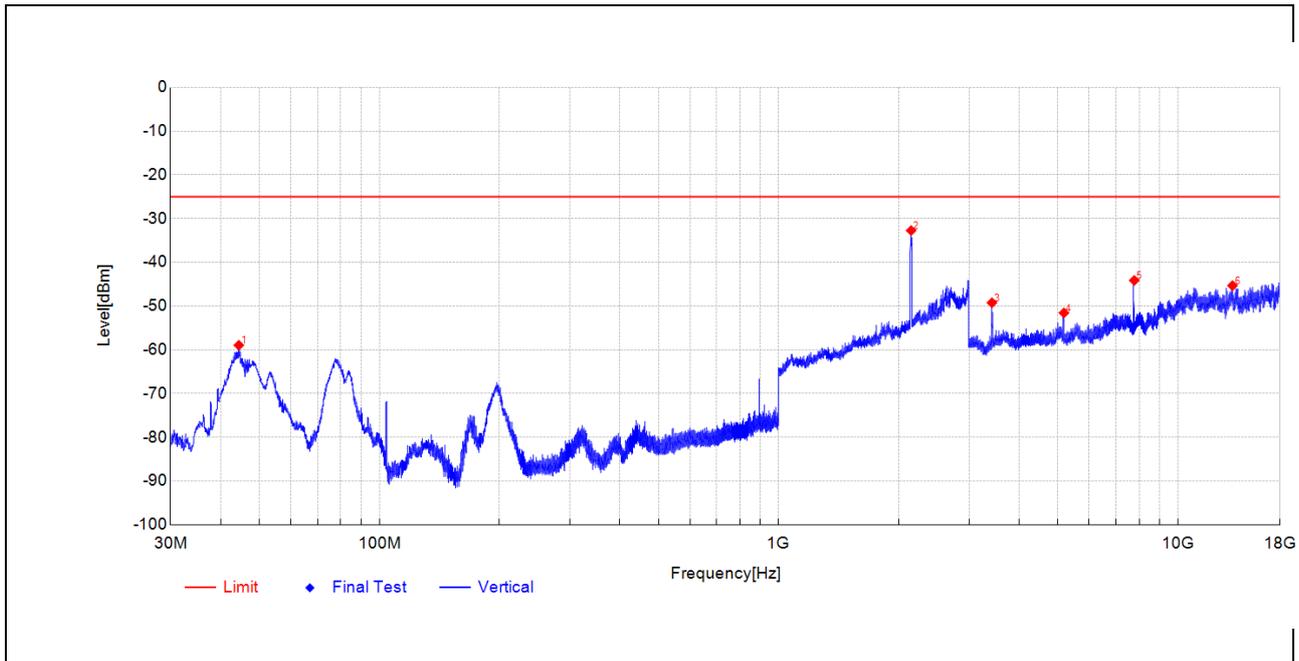


Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
44.4537	-38.56	-58.94	-20.4	-25.0	33.9	Vertical	PK	PASS
2147.0294	-38.38	-32.72	5.7	-	-	Vertical	PK	NA
3421.3459	-49.76	-49.22	0.5	-25.0	24.2	Vertical	PK	PASS
5183.0261	-56.56	-51.56	5.0	-25.0	26.6	Vertical	PK	PASS
7774.151	-55.50	-44.13	11.4	-25.0	19.1	Vertical	PK	PASS
13700.468	-70.21	-45.31	24.9	-25.0	20.3	Vertical	PK	PASS
44.4537	-38.56	-58.94	-20.4	-25.0	33.9	Vertical	PK	PASS




5G NSA_B66_n71

Plot for Low Channel

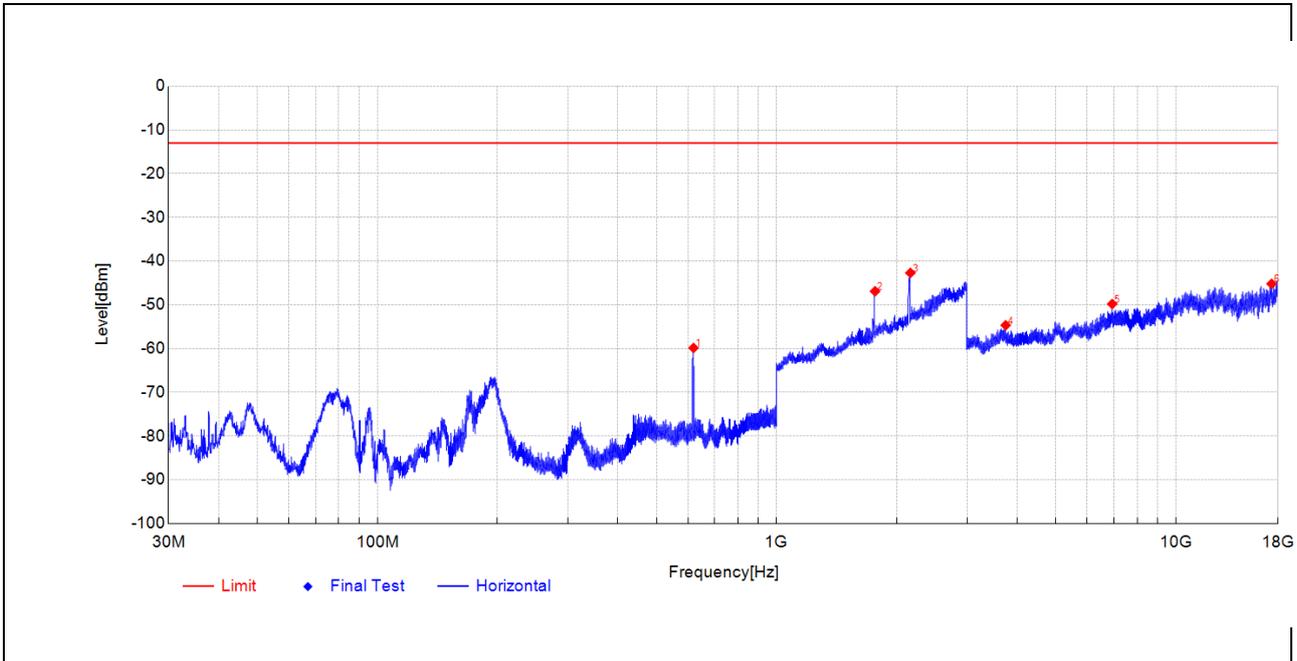

Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
619.256	-50.76	-59.85	-9.1	-	-	Horizontal	PK	NA
1763.7528	-50.39	-46.90	3.5	-	-	Horizontal	PK	NA
2162.6325	-49.70	-42.69	7.0	-	-	Horizontal	PK	NA
3746.6781	-55.97	-54.66	1.3	-13.0	41.7	Horizontal	PK	PASS
6925.477	-61.36	-49.81	11.6	-13.0	36.8	Horizontal	PK	PASS
17367.814	-69.74	-45.19	24.6	-13.0	32.2	Horizontal	PK	PASS

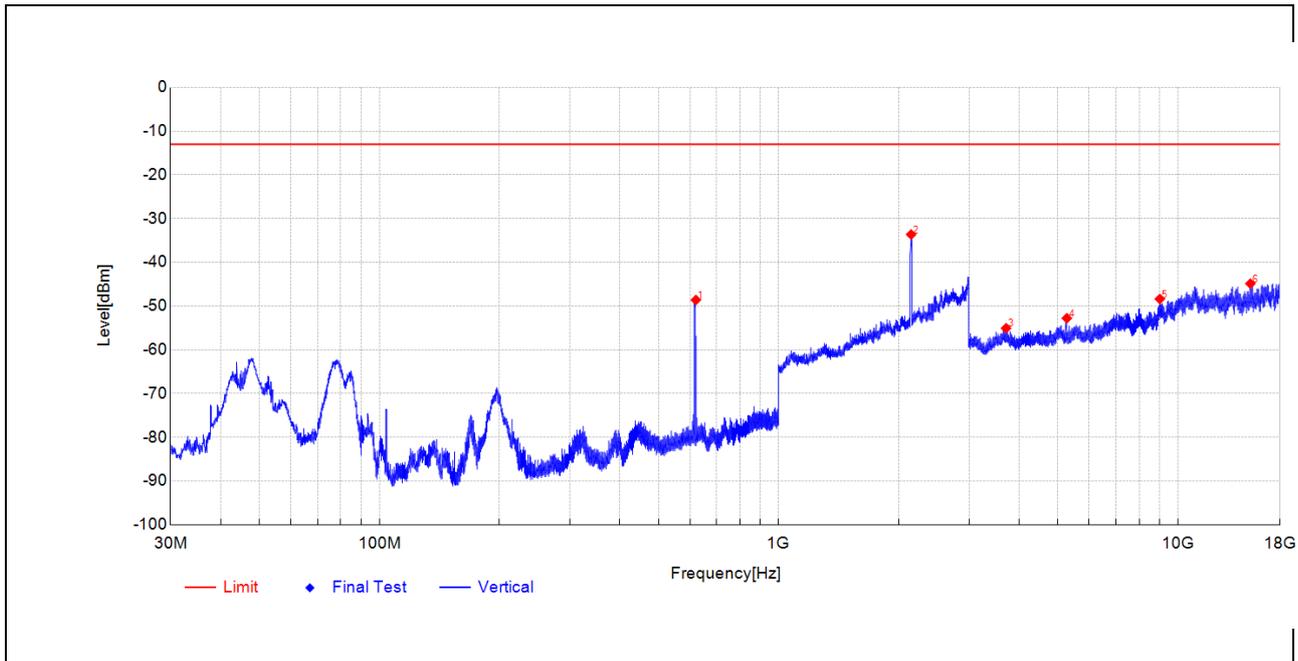


Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
620.4685	-39.87	-48.59	-8.7	-	-	Vertical	PK	NA
2146.6293	-40.02	-33.63	6.4	-	-	Vertical	PK	NA
3712.8161	-56.68	-55.05	1.6	-13.0	42.1	Vertical	PK	PASS
5269.6099	-57.90	-52.77	5.1	-13.0	39.8	Vertical	PK	PASS
9009.2404	-64.10	-48.37	15.7	-13.0	35.4	Vertical	PK	PASS
15191.407	-69.98	-44.86	25.1	-13.0	31.9	Vertical	PK	PASS




5G NSA_B66_n71

Plot for Mid Channel

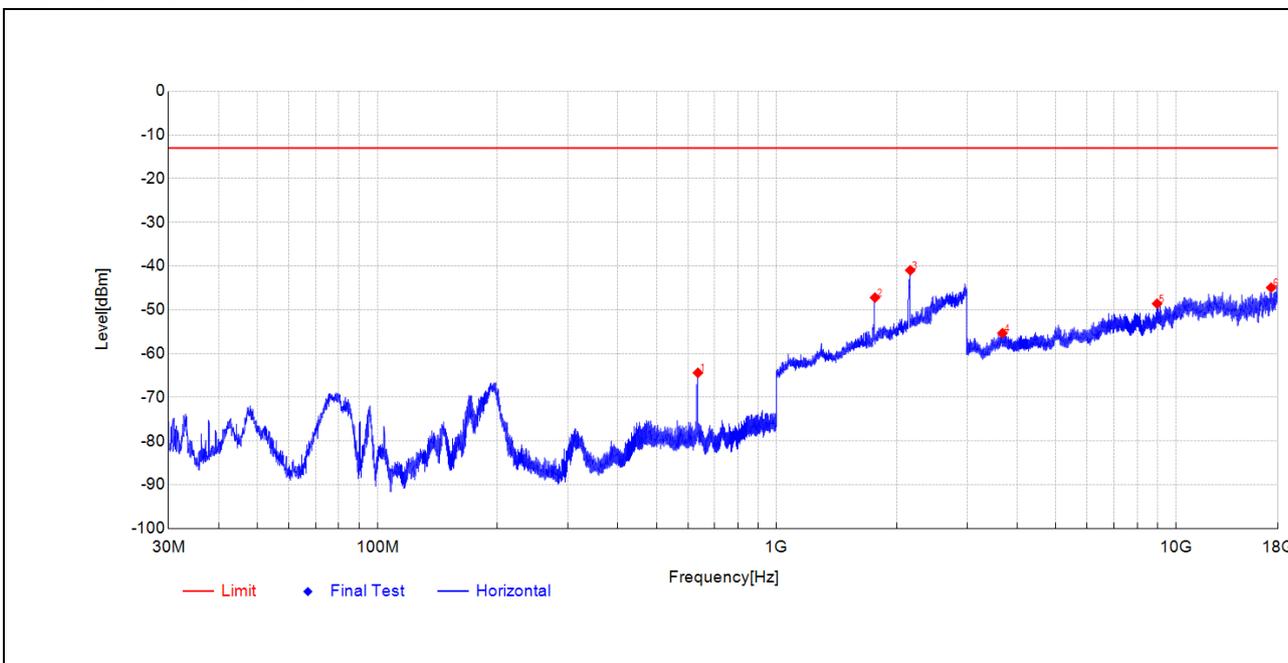

Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
635.0678	-55.77	-64.40	-8.6	-	-	Horizontal	PK	NA
1763.3527	-50.67	-47.20	3.5	-	-	Horizontal	PK	NA
2161.0322	-47.88	-40.95	6.9	-	-	Horizontal	PK	NA
3678.0969	-57.08	-55.32	1.8	-13.0	42.3	Horizontal	PK	PASS
8971.7989	-63.77	-48.59	15.2	-13.0	35.6	Horizontal	PK	PASS
17321.252	-69.10	-44.92	24.2	-13.0	31.9	Horizontal	PK	PASS

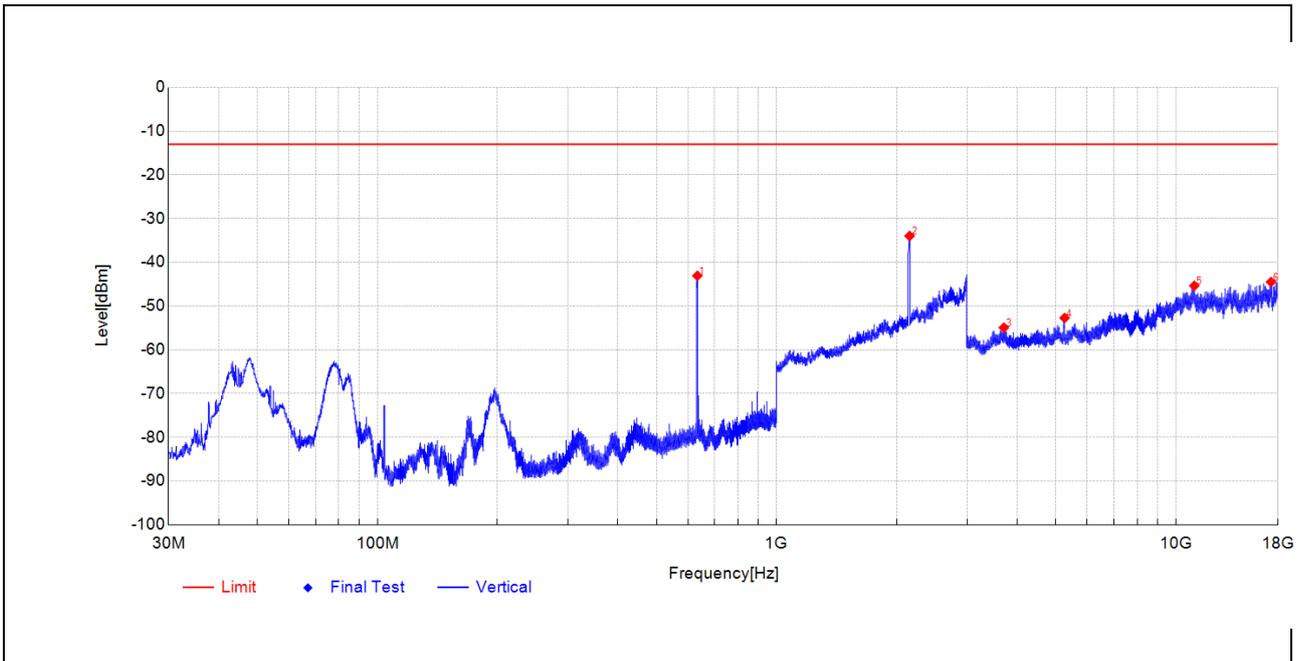


Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
633.0792	-34.51	-43.05	-8.5	-	-	Vertical	PK	NA
2152.2304	-40.28	-33.96	6.3	-	-	Vertical	PK	NA
3707.2439	-56.61	-54.92	1.7	-13.0	41.9	Vertical	PK	PASS
5264.4664	-57.81	-52.71	5.1	-13.0	39.7	Vertical	PK	PASS
11120.364	-67.19	-45.35	21.8	-13.0	32.4	Vertical	PK	PASS
17310.692	-69.09	-44.48	24.6	-13.0	31.5	Vertical	PK	PASS




5G NSA_B66_n71

Plot for High Channel

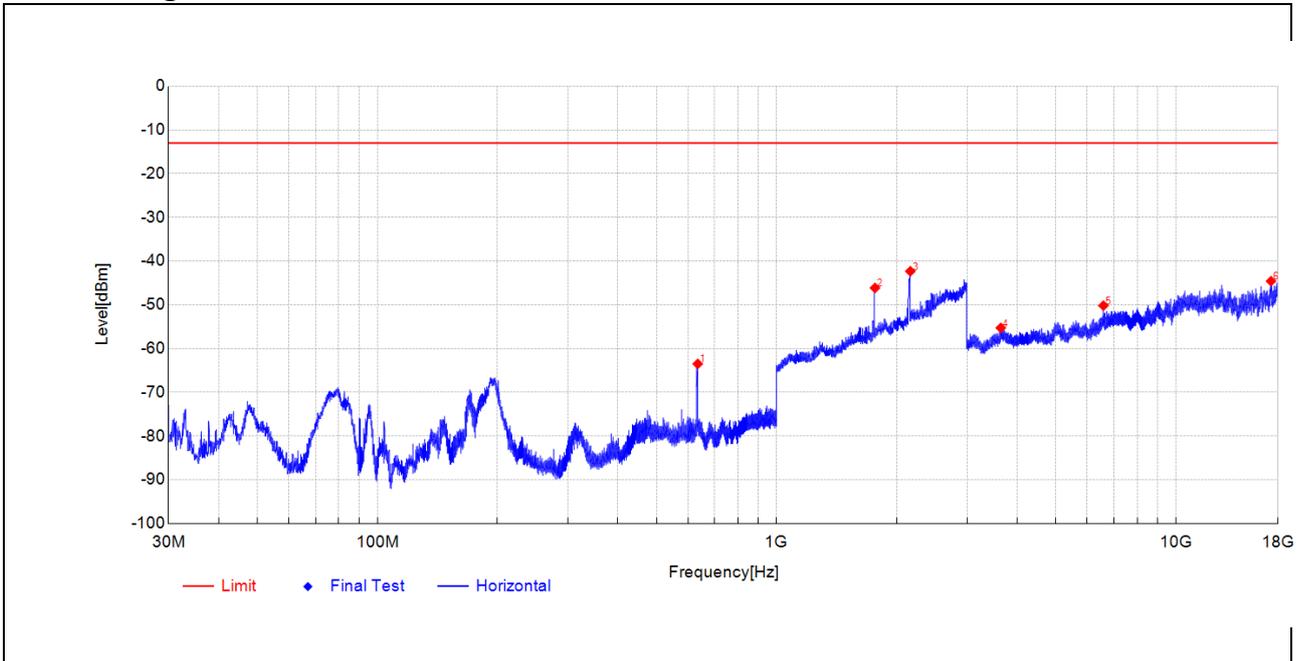

Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
634.2917	-54.85	-63.49	-8.6	-	-	Horizontal	PK	NA
1763.3527	-49.60	-46.13	3.5	-	-	Horizontal	PK	NA
2161.8324	-49.28	-42.31	7.0	-	-	Horizontal	PK	NA
3642.0917	-56.97	-55.26	1.7	-13.0	42.3	Horizontal	PK	PASS
6582.7433	-61.35	-50.17	11.2	-13.0	37.2	Horizontal	PK	PASS
17308.292	-68.65	-44.57	24.1	-13.0	31.6	Horizontal	PK	PASS

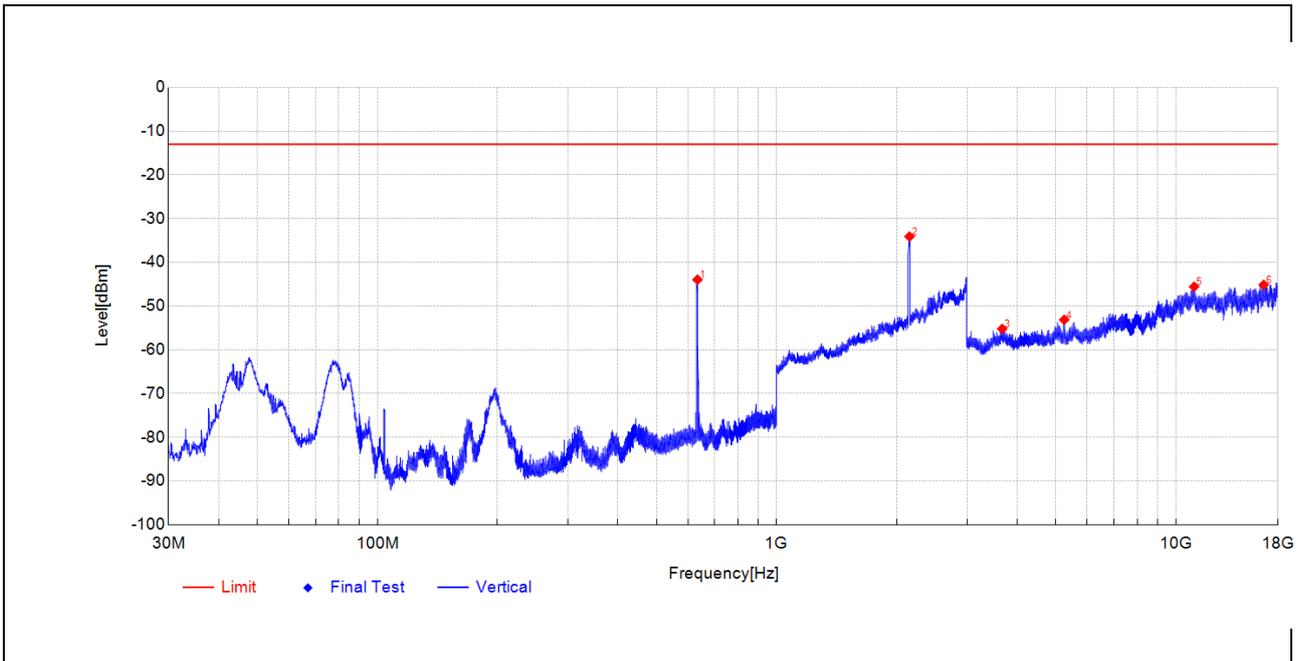

Frequency [MHz]	Reading [dBm]	Level [dBm]	Factor [dB]	Limit [dBm]	Margin [dB]	Polarity	Detector	Verdict
633.4187	-35.43	-43.96	-8.5	-	-	Vertical	PK	NA
2152.2304	-40.42	-34.10	6.3	-	-	Vertical	PK	NA
3672.5246	-56.90	-55.21	1.7	-13.0	42.2	Vertical	PK	PASS
5252.036	-58.18	-53.12	5.1	-13.0	40.1	Vertical	PK	PASS
11106.444	-67.48	-45.57	21.9	-13.0	32.6	Vertical	PK	PASS
16590.663	-70.94	-45.15	25.8	-13.0	32.2	Vertical	PK	PASS



Annex A Test Uncertainty

Where relevant, the following measurement uncertainty levels have been estimated for test performed on the EUT as specified in CISPR 16-1-2:

Test items	Uncertainty
Output Power	± 2.22 dB
Bandwidth	$\pm 5\%$
Conducted Spurious Emission	± 2.77 dB
Band Edge	± 2.77 dB
Equivalent Isotropic Radiated Power	± 2.22 dB
Radiated Spurious Emissions	± 6 dB

This uncertainty represent an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of $k=2$



Annex B Testing Laboratory Information

1. Identification of the Responsible Testing Laboratory

Company Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

2. Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

3. Facilities and Accreditations

All measurement facilities used to collect the measurement data are located at FL.3, Building A, FeiYang Science Park, Block 67, BaoAn District, Shenzhen, 518101 P.R. China. Morlab facility is a registered (7183A) test laboratory with the site description on file with ISED, Conformity Assessment Body Identifier (CABID):CN0062.



4. Test Equipment Utilized

4.1 Conducted Test Equipment

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Cal. Due
Power Splitter	NW521	1506A	Weinschel	N/A	N/A
Directional Coupler (10-67GHz)	N/A	110067016	KRYTAR	N/A	N/A
Attenuator	N/A	20dB	Resnet	N/A	N/A
Attenuator (DC-40GHz)	N/A	10dB	RFTOP	N/A	N/A
EXA Signal Analyzer	MY54170556	N9030A	Keysight	2024.09.18	2025.09.17
System Simulator	6262012906	MT8000A	Anritsu	2025.05.16	2026.05.15
System Simulator	6261830572	MT8821C	Anritsu	2025.01.06	2026.01.05
System Simulator	MY58300665	E7515B	Anritsu	2024.09.18	2025.09.17
RF cable (30MHz-26GHz)	CB01	RF01	Morlab	N/A	N/A
RF cable (DC-40GHz)	N/A	NYK360	Qualwave	N/A	N/A
Coaxial cable	CB02	RF02	Morlab	N/A	N/A
SMA connector	CN01	RF03	HUBER-SUHNER	N/A	N/A
Temperature Chamber	S02217710100089001	KMT-36LF1A0	KOMEG	2024.09.18	2025.09.17
Computer	T430i	Think Pad	Lenovo	N/A	N/A
Test system	N/A	WCS FCC V22.02.041801	CeSheng	N/A	N/A

**4.2 Radiated Test Equipment**

Equipment Name	Serial No.	Type	Manufacturer	Cal. Date	Due Date
Bi-Log Antenna	9163-274	VULB 9163	SCHWARZBE CK	2025/6/28	2026/6/27
Bi-Log Antenna	9163-519	VULB 9163	SCHWARZBE CK	2025/6/20	2026/6/19
Horn Antenna	9120D-963	BBHA 9120D	SCHWARZBE CK	2025/5/16	2026/5/15
Horn Antenna	01774	BBHA 9120D	SCHWARZBE CK	2025/6/20	2026/6/19
Horn Antenna	BBHA9170#7 73	BBHA9170	SCHWARZBE CK	2025/6/20	2026/6/19
Receiver	MY54130016	N9038A	Agilent	2025/1/10	2026/1/9
Receiver	MY56400093	N9038A	KEYSIGHT	2025/1/6	2026/1/5
Signal Analyzer	MY56060145	N9020A	Agilent	2025/5/13	2026/5/12
Preamplifier (2GHz-18GHz)	61171/61172	S020180L32 03	LUCIX CORP.	2025/5/13	2026/5/12
Preamplifier (10MHz-6GHz)	46732	S10M100L38 02	LUCIX CORP.	2025/5/13	2026/5/12
Preamplifier (18GHz- 40GHz)	DS77209	DCLNA0118- 40C-S	Decentest	2025/5/13	2026/5/12
System Simulator	152038	CMW500	R&S	2024/9/11	2025/9/10
System Simulator	MY48364176	8960- E5515C	Agilent	2025/1/15	2026/1/14
System Simulator	6262148249	MT8000A	anritsu	2025/5/16	2026/5/15
System Simulator	6261830572	MT8821C	anritsu	2025/1/6	2026/1/5
RF Coaxial Cable (DC-18GHz)	MRE001	PE330	Pasternack	2025/5/13	2026/5/12
RF Coaxial Cable (DC-18GHz)	MRE002	CLU18	Pasternack	2025/5/13	2026/5/12
RF Coaxial Cable (DC-18GHz)	MRE003	CLU18	Pasternack	2025/5/13	2026/5/12
RF Coaxial Cable (DC-40GHz)	22290045	QA360-40- KK-0.5	Qualwave	2024/9/11	2025/9/10



RF Coaxial Cable (DC-40GHz)	22290046	QA360-40- KKF-2	Qualwave	2024/9/11	2025/9/10
RF Coaxial Cable (DC-18GHz)	22120181	QA500-18- NN-5	Qualwave	2024/9/11	2025/9/10

————— END OF REPORT —————