



TEST REPORT

APPLICANT : BLU Products, Inc.
PRODUCT NAME : Smart Phone
MODEL NAME : G75
BRAND NAME : BLU
FCC ID : YHLBLU75GC
STANDARD(S) : FCC 47 CFR Part 2 (2.1093)
IEEE 1528-2013
RECEIPT DATE : 2025-07-08
TEST DATE : 2025-07-08 to 2025-08-18
ISSUE DATE : 2025-08-20

Edited by: Pang Siyu
Pang Siyu (Rapporteur)

Approved by: Gan Yueming
Gan Yueming (Supervisor)

NOTE: This document is issued by Shenzhen Morlab Communications Technology Co., the test report shall not be reproduced except in full without prior written permission of the company. The test results apply only to the particular sample(s) tested and to the specific tests carried out which is available on request for validation and information confirmed at our website.





DIRECTORY

- 1. Statement of Compliance..... 5
- 2. Technical Information..... 6
 - 2.1. Applicant and Manufacturer Information..... 6
 - 2.2. Equipment under Test (EUT) Description 6
 - 2.3. Environment of Test Site/Conditions 8
- 3. Specific Absorption Rate (SAR)..... 9
 - 3.1. Introduction..... 9
 - 3.2. SAR Definition 9
- 4. RF Exposure Limits 10
 - 4.1. Uncontrolled Environment..... 10
 - 4.2. Controlled Environment 10
- 5. Applied Reference Documents 11
- 6. SAR Measurement System 12
 - 6.1. E-Field Probe 13
 - 6.2. Data Acquisition Electronics (DAE)..... 14
 - 6.3. Robot 14
 - 6.4. Measurement Server..... 15
 - 6.5. Light Beam Unit..... 15
 - 6.6. Phantom 15
 - 6.7. Device Holder 16
 - 6.8. Data Storage and Evaluation 17
 - 6.9. Test Equipment List 19
- 7. Tissue Simulating Liquids 21
- 8. SAR System Verification 23
 - 8.1. Purpose of System Performance Check..... 23
 - 8.2. System Setup..... 23



8.3. Validation Results 24

9. EUT Testing Position 27

9.1. Handset Reference Points 27

9.2. Positioning for Cheek / Touch 28

9.3. Positioning for Ear / 15° Tilt 28

9.4. SAR Evaluation near the Mouth/Jaw Regions of the Phantom 29

9.5. Body-worn Configurations 29

9.6. Hotspot Mode Exposure Position Conditions 30

10. Measurement Procedures 31

10.1. Spatial Peak SAR Evaluation 31

10.2. Power Reference Measurement 32

10.3. Area Scan Procedures 32

10.4. Zoom Scan Procedures 32

10.5. SAR Averaged Methods 33

10.6. Power Drift Monitoring 33

11. SAR Test Procedure 34

11.1. General Scan Requirements 34

11.2. Test Procedure 35

11.3. Description of Interpolation/Extrapolation Scheme 35

11.4. Wireless Router 35

12. SAR Test Configuration 37

13. Conducted Power List 47

14. Hotspot Mode Evaluation Procedure 47

15. Proximity Sensor Considerations 48

15.1. Proximity Sensor Triggering Distances 48

15.2. Proximity Sensor Coverage 49

16. Block Diagram of the Tests to be Performed 50

16.1. Head 50



16.2. Body..... 51

17. Test Results List..... 52

17.1. Test Guidance..... 52

17.2. Head SAR Data 54

17.3. Hotspot SAR Data 59

17.4. Body-worn SAR Data 63

17.5. Extremity SAR Assessment..... 66

17.6. Repeated SAR Assessment..... 68

18. Simultaneous Transmission Evaluation 69

18.1. Simultaneous Transmission Consideration 69

18.2. Simultaneous Transmission Analysis..... 70

19. Uncertainty Assessment..... 80

Annex A General Information 81

Annex B Test Setup Photos

Annex C Plots of System Performance Check

Annex D Plots of Maximum SAR Test Results

Annex E Conducted Power

Annex F DASYS Calibration Certificate

Changed History		
Version	Date	Reason for Change
1.0	2025-08-20	First edition



1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during test as bellows:

<Highest Reported SAR Summary>

Frequency Band		Highest SAR Summary			
		Head (Gap 0 mm)	Body-worn (Gap 15 mm)	Hotspot (Gap 10 mm)	Extremity (Gap 0 mm)
		1g SAR (W/kg)			10g SAR (W/kg)
GSM	GSM850	0.271	0.452	0.709	N/A
	GSM1900	0.635	0.299	0.977	0.869
WCDMA	WCDMA II	0.585	0.359	0.638	2.498
	WCDMA IV	0.342	0.200	0.370	0.671
	WCDMA V	0.212	0.205	0.432	N/A
LTE	LTE Band 2	0.790	0.453	0.803	1.401
	LTE Band 5	0.299	0.277	0.450	N/A
	LTE Band 7	0.871	0.674	0.273	1.492
	LTE Band 12/17	0.132	0.223	0.236	N/A
	LTE Band 13	0.249	0.248	0.350	N/A
	LTE Band 66/4	0.747	0.634	1.145	1.225
WLAN	2.4GHz WLAN	0.440	0.087	0.166	N/A
	5GHz WLAN	0.777	0.315	0.412	0.497
2.4GHz Band	Bluetooth	0.130	0.031	0.036	N/A

Highest Simultaneous Transmission SAR _{1g} (W/Kg):	1.524	Limit (W/kg): 1.6
Highest Simultaneous Transmission SAR _{10g} (W/Kg):	2.498	Limit (W/kg): 4.0

Note:

1. This device is in compliance with Specific Absorption Rate (SAR) for general population or uncontrolled exposure limits (1.6 W/kg as averaged over any 1 gram of tissue; specified in FCC 47 CFR part 1 (1.1310) and ANSI/IEEE C95.1-1992), and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.
2. For FDD-LTE Band 4/17 is full covered by FDD-LTE Band 66/12, therefore only FDD-LTE Band 66/12 was tested.
3. The declarations of EUT presented in the report are provided by applicant and/or manufacturer, and the test laboratory is not responsible for the accuracy of the information.



2. Technical Information

Note: Provide by applicant.

2.1. Applicant and Manufacturer Information

Applicant:	BLU Products, Inc.
Applicant Address:	8600 NW 36th Street, Suite #300 Miami, FL 33166 USA
Manufacturer:	BLU Products, Inc.
Manufacturer Address:	8600 NW 36th Street, Suite #300 Miami, FL 33166 USA

2.2. Equipment under Test (EUT) Description

Product Name:	Smart Phone
EUT No.:	14#
Hardware Version:	KE34NM_01
Software Version:	BLU_G1170_V15.0.03.01_GENERIC_20250730_2255
Frequency Bands:	GSM 850: 824 MHz ~ 849 MHz GSM 1900: 1850 MHz ~ 1910 MHz WCDMA II: 1850 MHz ~ 1910 MHz WCDMA IV: 1710 MHz ~ 1755 MHz WCDMA V: 824 MHz ~ 849 MHz LTE Band 2: 1850 MHz ~ 1910 MHz LTE Band 4: 1710 MHz ~ 1755 MHz LTE Band 5: 824 MHz ~ 849 MHz LTE Band 7: 2500 MHz ~ 2570 MHz LTE Band 12: 699 MHz ~ 716 MHz LTE Band 13: 777 MHz ~ 787 MHz LTE Band 17: 704 MHz ~ 716 MHz LTE Band 66: 1710 MHz ~ 1780 MHz LTE Band 71: 633 MHz ~ 698 MHz WLAN 2.4GHz: 2412 MHz ~ 2472 MHz WLAN 5.2GHz: 5180 MHz ~ 5240 MHz WLAN 5.3GHz: 5260 MHz ~ 5320 MHz WLAN 5.5GHz: 5500 MHz ~ 5700 MHz WLAN 5.8GHz: 5745 MHz ~ 5825 MHz Bluetooth: 2402 MHz ~ 2480 MHz
Modulation Mode:	GSM/GPRS: GMSK EDGE: 8PSK WCDMA: QPSK, 16QAM



	LTE: QPSK, 16QAM, 64QAM 802.11b: DSSS 802.11a/g: OFDM 802.11n-HT20/40: OFDM 802.11ac-VHT20/40/80: OFDM BR+EDR: GFSK (1Mbps), $\pi/4$ -DQPSK (2Mbps), 8-DPSK (3Mbps) Bluetooth LE: GFSK (1Mbps, 2Mbps)	
Multi-slot Class:	GPRS: Multi-slot Class 12 EDGE: Multi-slot Class 12	
Operation Class:	Class B	
VoLTE Mode:	Support	
VoWIFI Mode:	Support	
Hotspot Mode:	Support (WLAN 5G for B1 & B4)	
Antenna Type:	WWAN: PIFA Antenna WLAN: PIFA Antenna Bluetooth: PIFA Antenna	
SIM Cards Description:	SIM 1	GSM+WCDMA+LTE
	SIM 2	GSM+WCDMA+LTE

Note: For more detailed description, please refer to specification or user manual supplied by the applicant and/or manufacturer.



2.3. Environment of Test Site/Conditions

Normal Temperature (NT):	20-25 °C
Relative Humidity:	30-75 %

During SAR test, EUT is in Traffic Mode (Channel Allocated) at Normal Voltage Condition. A communication link is set up with a System Simulator (SS) by air link, and a call is established.

The EUT shall use its internal transmitter. The antenna(s), battery and accessories shall be those specified by the Factory. The EUT battery must be fully charged and checked periodically during the test to ascertain uniform power output. If a wireless link is used, the antenna connected to the output of the base station simulator shall be placed at least 50 cm away from the handset.

The signal transmitted by the simulator to the antenna feeding point shall be lower than the output power level of the handset by at least 35 dB.

3. Specific Absorption Rate (SAR)

3.1. Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational or controlled and general population or uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational or controlled exposure limits are Middle than the limits for general population or uncontrolled.

3.2. SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by(dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density. (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg).

SAR measurement can be either related to the temperature elevation in tissue by,

$$\text{SAR} = C \left(\frac{\delta T}{\delta t} \right)$$

Where C is the specific head capacity, δT is the temperature rise and δt the exposure duration, or related to the electrical field in the tissue by

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where σ is the conductivity of the tissue, ρ is the mass density of the tissue and $|E|$ is the rmselectrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.



4. RF Exposure Limits

4.1. Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

Limits for General Population/Uncontrolled Exposure (W/kg)

Type Exposure	Uncontrolled Environment Limit
Spatial Peak SAR (1g cube tissue for head and trunk)	1.6 W/kg
Spatial Peak SAR (10g cube tissue for limbs)	4.0 W/kg
Spatial Peak SAR (1g cube tissue for whole body)	0.08 W/kg

Note:

1. Occupational/Uncontrolled Environments are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure (i.e. as a result of employment or occupation).
2. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

4.2. Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.



5. Applied Reference Documents

Leading reference documents for testing:

Identity	Document Title	Remark
FCC 47 CFR Part 2 (2.1093)	Radio Frequency Radiation Exposure Evaluation: Portable Devices	/
IEEE 1528-2013	IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques	/
KDB 447498 D01v06	General RF Exposure Guidance	/
KDB 248227 D01v02r02	SAR Measurement Procedures for 802.11 Transmitters	/
KDB 865664 D01v01r04	SAR Measurement 100 MHz to 6 GHz	/
KDB 865664 D02v01r02	RF Exposure Reporting	/
KDB 648474 D04v01r03	Handset SAR	/
KDB 941225 D01v03r01	3G SAR MEAUREMENT PROCEDURES	/
KDB 941225 D05v02r05	SAR Evaluation Consideration for LTE Devices	/
KDB 941225 D06v02r01	SAR Evaluation Procedures For Portable Devices With Wireless Router Capabilities	/
Note: Any additions, deviation, or exclusions from the method shall be noted in the "Remark".		

6. SAR Measurement System

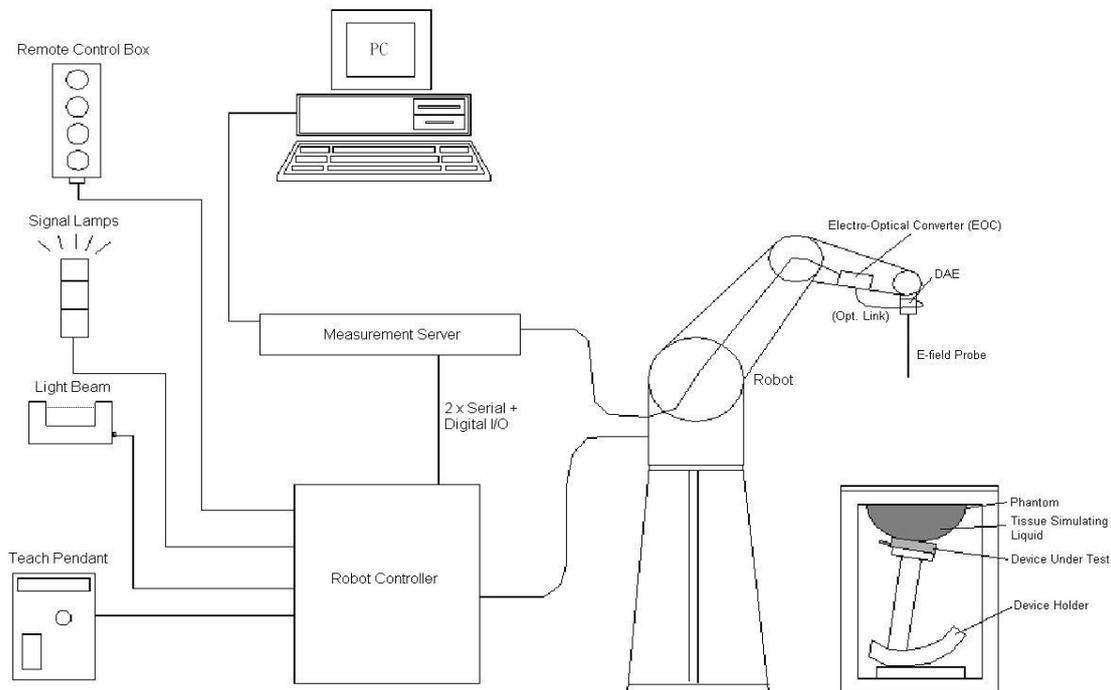


Fig 6.1 SPEAG DASY System Configurations

The DASY system for performance compliance tests is illustrated above graphically. This system consists of the following items:

- A standard high precision 6-axis robot with controller, a teach pendant and software.
- A data acquisition electronic (DAE) attached to the robot arm extension.
- A dosimetric probe equipped with an optical surface detector system.
- The electro-optical converter (ECO) performs the conversion between optical and electrical signals
- A measurement server performs the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the accuracy of the probe positioning.
- A computer operating Windows XP.
- DASY software.
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom.
- A device holder.
- Tissue simulating liquid.
- Dipole for evaluating the proper functioning of the system.
- Some of the components are described in details in the following sub-sections.

6.1. E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

➤ E-Field Probe Specification

<ES3DV3 Probe>

Construction	Symmetrical design with triangular core Built-in optical fiber for surface detection system. Built-in shielding against static charges. PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	 <p>Fig 6.2 Photo of ES3DV3</p>
Frequency	10 MHz to 3 GHz; Linearity: ± 0.2 dB	
Directivity	± 0.2 dB in HSL (rotation around probe axis) ± 0.4 dB in HSL (rotation normal to probe axis)	
Dynamic Range	5 μ W/g to 100 mW/g; Linearity: ± 0.2 dB	
Dimensions	Overall length: 330 mm (Tip: 16 mm) Tip diameter: 6.8 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.7 mm	

<EX3DV4 Probe>

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	 <p>Fig 6.3 Photo of EX3DV4</p>
Frequency	10 MHz to 6 GHz; Linearity: ± 0.2 dB	
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)	
Dynamic Range	10 μ W/g to 100 mW/g; Linearity: ± 0.2 dB	
Dimensions	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

➤ E-Field Probe Calibration

Each probe needs to be calibrated according to a dosimetric assessment procedure with accuracy better than $\pm 10\%$. The spherical isotropy shall be evaluated and within ± 0.25 dB. The sensitivity parameters (NormX, NormY, and NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested. The calibration data can be referred to annex C of this report.

6.2. Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock. The input impedance of the DAE is 200M Ω ; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Fig 6.4 Photo of DAE

6.3. Robot

The SPEAG DASY system uses the high precision robots (DASY4: RX90BL; DASY5: TX90XL) type from Stäubli SA (France). For the 6-axis controller system, the robot controller version (DASY4: CS7MB; DASY5: CS8c) from Stäubli is used. The Stäubli robot series have many features that are important for our application:

High precision (repeatability ± 0.035 mm)

High reliability (industrial design)

Jerk-free straight movements

Low ELF interference (the closed metallic construction shields against motor control fields)



Fig 6.5 Photo of DASY5

6.4. Measurement Server

The measurement server is based on a PC/104 CPU board with CPU (DASY4: 166 MHz, Intel Pentium; DASY5: 400 MHz, Intel Celeron), chip disk (DASY4: 32 MB; DASY5: 128 MB), RAM (DASY4: 64 MB, DASY5: 128 MB). The necessary circuits for communication with the DAE electronic box, as well as the 16 bits AD converter system for optical detection and digital I/O interface are contained on the DASY I/O board, which is directly connected to the PC/104 bus of the CPU board. The measurement server performs all the real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operations.



Fig 6.6 Photo of Server for DASY5

6.5. Light Beam Unit

The light beam switch allows automatic "tooling" of the probe. During the process, the actual position of the probe tip with respect to the robot arm is measured, as well as the probe length and the horizontal probe offset. The software then corrects all movements, such that the robot coordinates are valid for the probe tip.

The repeatability of this process is better than 0.1 mm. If a position has been taught with an aligned probe, the same position will be reached with another aligned probe within 0.1 mm, even if the other probe has different dimensions. During probe rotations, the probe tip will keep its actual position.



Fig. 6.7 Photo of Light Beam

6.6. Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm (sagging: <1%) Center ear point: 6 ± 0.2 mm
Filling Volume	Approx. 25 liters
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet
Measurement Areas	Left Head, Right Head, Flat Phantom



Fig. 6.8 Photo of SAM Phantom

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

6.7. Device Holder

<Device Holder for SAM Twin Phantom>

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5 mm distance, a positioning uncertainty of ± 0.5 mm would produce a SAR uncertainty of ± 20 %. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.

The DASY device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation center for both scales is the ear reference point (EPR). Thus the device needs no repositioning when changing the angles.

The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.

<Laptop Extension Kit>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Fig 6.9 Device Holder

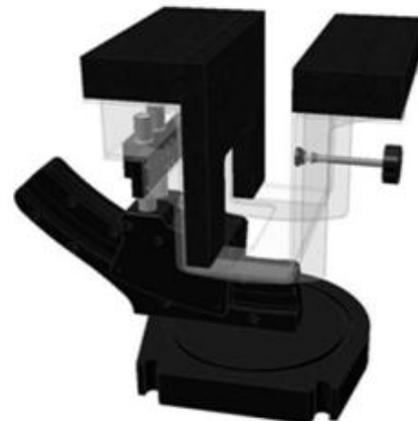


Fig 6.10 Laptop Extension Kit



6.8. Data Storage and Evaluation

➤ Data Storage

The DASY software stores the assessed data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all the necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files. The post-processing software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of erroneous parameter settings. For example, if a measurement has been performed with an incorrect crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be reevaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type (e.g., [V/m], [A/m], [Mw/g]). Some of these units are not available in certain situations or give meaningless results, e.g., a SAR-output in a non-lose media, will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

➤ Data Evaluation

The DASY post-processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software.

Probe parameters:	- Sensitivity	Norm _i , a _{i0} , a _{i1} , a _{i2}
	- Conversion factor	ConvF _i
	- Diode compression point	dcpi
Device parameters:	- Frequency	f
	- Crest factor	cf
Media parameters:	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multi-meter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the



exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power.

The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \times \frac{cf}{dcp_i}$$

With V_i = compensated signal of channel I, (I = x, y, z)
 U_i = input signal of channel I, (I = x, y, z)
 cf = crest factor of exciting field (DASY parameter)
 dcp_i = diode compression point (DASY parameter)

From the compensated input signals, the primary field data for each channel can be evaluated:

$$\text{E-field Probes: } E_i = \sqrt{\frac{V_i}{\text{Norm}_i \times \text{ConvF}}}$$

$$\text{H-field Probes: } H_i = \sqrt{V_i} \times \frac{a_{i0} + a_{i1} + a_{i2} f^2}{f}$$

With V_i = compensated signal of channel I, (I = x, y, z)
 Norm_i = sensor sensitivity of channel I, (I = x, y, z), Mv/(V/m)² for E-field
 Probes ConvF = sensitivity enhancement in solution
 a_{ij} = sensor sensitivity factors for H-field probes
 f = carrier frequency [GHz]
 E_i = electric field strength of channel I in V/m
 H_i = magnetic field strength of channel I in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{\text{tot}} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$\text{SAR} = E_{\text{tot}}^2 \times \frac{\sigma}{\rho \times 1000}$$

with SAR = local specific absorption rate in mW/g

E_{tot} = total field strength in V/m

σ = conductivity in [mho/m] or [Siemens/m]

ρ = equivalent tissue density in g/cm³

Note that the density is set to 1, to account for actual head tissue density rather than the density of the tissue simulating liquid.



6.9. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial No./ SW Version	Calibration	
				Last Cal.	Due Date
SPEAG	750MHz System Validation Kit	D750V3	1223	2022.08.22	2025.08.21
SPEAG	900MHz System Validation Kit	D900V2	1d064	2024.10.21	2027.10.20
SPEAG	1800MHz System Validation Kit	D1800V2	2d158	2024.10.21	2027.10.20
SPEAG	2000MHz System Validation Kit	D2000V2	1050	2024.10.22	2027.10.21
SPEAG	2450MHz System Validation Kit	D2450V2	805	2024.10.22	2027.10.21
SPEAG	2600MHz System Validation Kit	D2600V2	1198	2024.10.23	2027.10.22
SPEAG	5000MHz System Validation Kit	D5GHzV2	1176	2024.10.22	2027.10.21
SPEAG	DOSIMETRIC ASSESSMENT SYSTEM Software	DASY52	52.10.4.1527	NCR	NCR
SPEAG	Dosimetric E-Field Probe	EX3DV4	7608	2025.03.20	2026.03.19
SPEAG	Data Acquisition Electronics	DAE4	1643	2025.03.21	2026.03.20
SPEAG	Twin-SAM	QD 000 P41 Ax	2020	NCR	NCR
SPEAG	Phone Positioner	N/A	N/A	NCR	NCR
R&S	Network Emulator	CMW500	165755	2025.01.06	2026.01.05
Anritsu	Network Emulator	MT8820C	6201274521	2025.01.06	2026.01.05
Agilent	Network Analyzer	E5071B	MY42404762	2025.01.06	2026.01.05
SPEAG	Dielectric Assessment KIT	DAK-3.5	1279	2025.03.18	2026.03.17
mini-circuits	Amplifier	ZHL-42W+	608501717	NCR	NCR
mini-circuits	Amplifier	ZVE-8G+	754401735	NCR	NCR
Agilent	Signal Generator	N5182B	MY53050509	2024.09.11	2025.09.10
R&S	Power Sensor	NRP8S	103215	2025.01.06	2026.01.05
Agilent	Power Meter	E4416A	MY45102093	2024.09.11	2025.09.10
R&S	Power Sensor	NRP8S	103240	2025.01.06	2026.01.05
Anritsu	Power Meter	E4418B	GB43318055	2025.05.15	2026.05.14
Agilent	Dual Directional Coupler	778D	50422	NA	NA
MCL	Attenuation	351-218-010	N/A	NA	NA
R&S	Spectrum Analyzer	N9030A	MY54170556	2024.09.18	2025.09.17
KTJ	Thermo meter	TA298	N/A	2024.11.20	2025.11.19
SPEAG	Tissue Simulating Liquids	HBBL600-10000V6		24H	

Note:

1. The calibration certificate of DASY can be referred to annex F of this report.
2. The Insertion Loss calibration of Dual Directional Coupler and Attenuator were characterized via



the network analyzer and compensated during system check.

3. The dielectric probe kit was calibrated via the network analyzer, with the specified procedure (calibrated in pure water) and calibration kit (standard) short circuit, before the dielectric measurement. The specific procedure and calibration kit are provided by SPEAG.
4. In system check we need to monitor the level on the power meter, and adjust the power amplifier level to have precise power level to the dipole; the measured SAR will be normalized to 1 W input power according to the ratio of 1 W to the input power to the dipole. For system check, the calibration of the power amplifier is deemed not critically required for correct measurement; the power meter is critical and we do have calibration for it.
5. Attenuator insertion loss is calibrated by the network Analyzer, which the calibration is valid, before system check.
6. N.C.R means No Calibration Requirement.

7. Tissue Simulating Liquids

For SAR measurement of the field distribution inside the phantom, the phantom must be filled with homogeneous tissue simulating liquid to a depth of at least 15 cm. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 7.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 7.2. The nominal dielectric values of the tissue simulating liquids in the phantom and the tolerance of 5% are listed in below table.



Fig 7.1 Photo of Liquid Height for Head SAR



Fig 7.2 Photo of Liquid Height for Body SAR

The following table gives the recipes for tissue simulating liquids

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
Head								
750	41.1	57.0	0.2	1.4	0.2	0	0.89	41.9
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
1800,1900,2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
2600	54.8	0	0	0.1	0	45.1	1.96	39.0
Body								
750	51.7	47.2	0	0.9	0.1	0	0.96	55.5
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
1800,1900,2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7
2600	68.1	0	0	0.1	0	31.8	2.16	52.5

Simulating Liquid for 5GHz, Manufactured by SPEAG.

Ingredients	(% by weight)
Water	64~78%
Mineral oil	11~18%
Emulsifiers	9~15%
Additives and Salt	2~3%



Note: Please refer to the validation results for dielectric parameters of each frequency band. The dielectric properties of the tissue simulating liquids were verified prior to the SAR evaluation using a SPEAG Dielectric Assessment KIT and an Agilent Network Analyzer.

Table 1: Dielectric Performance of Tissue Simulating Liquid

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity (σ)	Conductivity Target (σ)	Delta (σ) (%)	Limit (%)	Date
750	HSL	22.1	0.912	0.89	2.47	±5	2025/7/8
750	HSL	22.2	0.914	0.89	2.70	±5	2025/7/9
900	HSL	22.1	0.977	0.97	0.72	±5	2025/7/10
1800	HSL	22.1	1.385	1.40	-1.07	±5	2025/7/11
1800	HSL	22.3	1.357	1.40	-3.07	±5	2025/7/12
1800	HSL	22.2	1.387	1.40	-0.93	±5	2025/7/13
2000	HSL	22.2	1.425	1.40	1.79	±5	2025/7/13
2450	HSL	22.2	1.851	1.80	2.83	±5	2025/7/9
2600	HSL	22.1	1.995	1.96	1.79	±5	2025/8/18
5250	HSL	22.1	4.780	4.71	1.49	±5	2025/7/14
5600	HSL	22.1	5.041	5.07	-0.57	±5	2025/7/14
5750	HSL	22.2	5.088	5.22	-2.53	±5	2025/7/13

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Permittivity (ϵ_r)	Permittivity Target (ϵ_r)	Delta (ϵ_r) (%)	Limit (%)	Date
750	HSL	22.1	41.220	41.90	-1.62	±5	2025/7/8
750	HSL	22.2	41.270	41.90	-1.50	±5	2025/7/9
900	HSL	22.1	40.673	41.50	-1.99	±5	2025/7/10
1800	HSL	22.1	40.365	40.00	0.91	±5	2025/7/11
1800	HSL	22.3	40.328	40.00	0.82	±5	2025/7/12
1800	HSL	22.2	40.385	40.00	0.96	±5	2025/7/13
2000	HSL	22.2	39.761	40.00	-0.60	±5	2025/7/13
2450	HSL	22.2	39.422	39.20	0.57	±5	2025/7/9
2600	HSL	22.1	38.434	39.00	-1.45	±5	2025/8/18
5250	HSL	22.1	35.511	35.95	-1.22	±5	2025/7/14
5600	HSL	22.1	34.500	35.50	-2.82	±5	2025/7/14
5750	HSL	22.2	34.300	35.35	-2.97	±5	2025/7/13

8. SAR System Verification

Each DASY system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the DASY software, enable the user to conduct the system performance check and system validation. System validation kit includes a dipole, tripod holder to fix it underneath the flat phantom and a corresponding distance holder.

8.1. Purpose of System Performance Check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

8.2. System Setup

The output power on dipole port must be calibrated to 250 mW or 100 mW before dipole is connected. In the simplified setup for system evaluation, the DUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave which comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The system check verifies that the system operates within its specifications. It is performed daily or before every SAR measurement. The system check uses normal SAR measurements in the flat section of the phantom with a matched dipole at a specified distance. The system verification setup is shown as below.



Fig 8.1 Photo of Dipole Setup

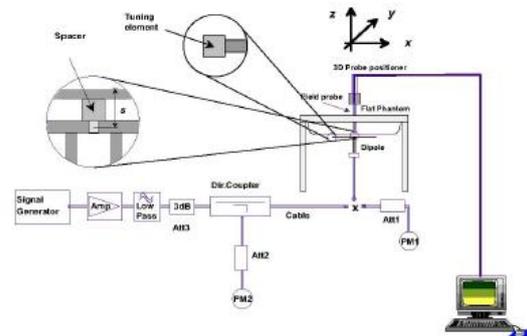


Fig 8.2 System Setup for System Evaluation



8.3. Validation Results

After system check testing, the SAR result will be normalized to 1W forward input power and compared with the reference SAR value derived from validation dipole certificate report. The deviation of system check should be within 10%.

<Validation Setup>

Frequency (MHz)	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N
750	250	D750V3-1223	7608	1643
900	250	D900V2-1d064	7608	1643
1800	250	D1800V2-2d158	7608	1643
2000	100	D2000V2-1050	7608	1643
2450	100	D2450V2-805	7608	1643
2600	100	D2600V2-1198	7608	1643
5250	100	D5GHzV2-1176-5250	7608	1643
5600	100	D5GHzV2-1176-5600	7608	1643
5750	100	D5GHzV2-1176-5750	7608	1643

<System Validation>

Frequency (MHz)	Tissue Type	Conductivity (σ)	Permittivity (ϵ_r)	CW Signal Validation		
				Sensitivity	Probe Linearity	Probe Isotropy
750	HSL	0.851	42.43	PASS	PASS	PASS
835	HSL	0.898	41.88	PASS	PASS	PASS
1750	HSL	1.386	39.91	PASS	PASS	PASS
1800	HSL	1.449	41.26	PASS	PASS	PASS
1900	HSL	1.435	39.65	PASS	PASS	PASS
2000	HSL	1.451	39.42	PASS	PASS	PASS
2300	HSL	1.764	38.99	PASS	PASS	PASS
2450	HSL	1.863	38.85	PASS	PASS	PASS
2600	HSL	1.973	38.58	PASS	PASS	PASS
3400	HSL	2.88	38.10	PASS	PASS	PASS
3500	HSL	2.91	37.90	PASS	PASS	PASS
3700	HSL	3.05	37.70	PASS	PASS	PASS
3900	HSL	3.15	37.50	PASS	PASS	PASS
4100	HSL	3.25	37.20	PASS	PASS	PASS
4200	HSL	3.34	37.00	PASS	PASS	PASS
4400	HSL	3.58	36.70	PASS	PASS	PASS



4600	HSL	3.70	36.60	PASS	PASS	PASS
4800	HSL	3.82	36.40	PASS	PASS	PASS
4900	HSL	3.96	36.20	PASS	PASS	PASS
5250	HSL	4.528	35.32	PASS	PASS	PASS
5600	HSL	4.905	34.89	PASS	PASS	PASS
5750	HSL	5.077	34.28	PASS	PASS	PASS

Frequency (MHz)	Tissue Type	Conductivity (σ)	Permittivity (ϵ_r)	Modulation Signal Validation		
				Mod. Type	Duty Factor	PAR
750	HSL	0.851	42.43	N/A	N/A	N/A
835	HSL	0.898	41.88	GMSK	PASS	N/A
1750	HSL	1.386	39.91	N/A	N/A	N/A
1800	HSL	1.449	41.26	N/A	N/A	N/A
1900	HSL	1.435	39.65	GMSK	PASS	N/A
2000	HSL	1.451	39.42	GMSK	PASS	N/A
2300	HSL	1.764	38.99	OFDM	PASS	PASS
2450	HSL	1.863	38.85	OFDM	PASS	PASS
2600	HSL	1.973	38.58	TDD	PASS	N/A
3400	HSL	2.88	38.10	OFDM	PASS	PASS
3500	HSL	2.91	37.90	OFDM	PASS	PASS
3700	HSL	3.05	37.70	OFDM	PASS	PASS
3900	HSL	3.15	37.50	OFDM	PASS	PASS
4100	HSL	3.25	37.20	OFDM	PASS	PASS
4200	HSL	3.34	37.00	OFDM	PASS	PASS
4400	HSL	3.58	36.70	OFDM	PASS	PASS
4600	HSL	3.70	36.60	OFDM	PASS	PASS
4800	HSL	3.82	36.40	OFDM	PASS	PASS
4900	HSL	3.96	36.20	OFDM	PASS	PASS
5250	HSL	4.528	35.32	OFDM	N/A	PASS
5600	HSL	4.905	34.89	OFDM	N/A	PASS
5750	HSL	5.077	34.28	OFDM	N/A	PASS



<Validation Results>

Date	Frequency (MHz)	Tissue Type	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
2025/7/8	750	HSL	2.19	8.54	8.76	2.58
2025/7/9	750	HSL	2.14	8.54	8.56	0.23
2025/7/10	900	HSL	2.81	10.90	11.24	3.12
2025/7/11	1800	HSL	9.44	39.20	37.76	-3.67
2025/7/12	1800	HSL	9.42	39.20	37.68	-3.88
2025/7/13	1800	HSL	9.38	39.20	37.52	-4.29
2025/7/13	2000	HSL	4.16	41.40	41.6	0.48
2025/7/9	2450	HSL	5.27	52.80	52.7	-0.19
2025/8/18	2600	HSL	5.63	55.90	56.3	0.72
2025/7/14	5250	HSL	8.21	77.30	82.1	6.21
2025/7/14	5600	HSL	8.13	82.40	81.3	-1.33
2025/7/13	5750	HSL	8.08	77.20	80.8	4.66

Date	Frequency (MHz)	Tissue Type	Measured 10g SAR (W/kg)	Targeted 10g SAR (W/kg)	Normalized 10g SAR (W/kg)	Deviation (%)
2025/7/8	750	HSL	1.49	5.57	5.96	7.00
2025/7/9	750	HSL	1.51	5.57	6.04	8.44
2025/7/10	900	HSL	1.89	7.00	7.56	8.00
2025/7/11	1800	HSL	5.31	20.70	21.24	2.61
2025/7/12	1800	HSL	5.26	20.70	21.04	1.64
2025/7/13	1800	HSL	5.36	20.70	21.44	3.57
2025/7/13	2000	HSL	2.12	21.00	21.2	0.95
2025/7/9	2450	HSL	2.35	24.50	23.5	-4.08
2025/8/18	2600	HSL	2.46	24.90	24.6	-1.20
2025/7/14	5250	HSL	2.29	21.50	22.9	6.51
2025/7/14	5600	HSL	2.32	22.80	23.2	1.75
2025/7/13	5750	HSL	2.07	21.20	20.7	-2.36

Note: System checks the specific test data please see annex C.

9. EUT Testing Position

This EUT was tested in ten different positions. They are right cheek/right tilted/left cheek/left tilted for head, front/back/left/right/top/bottom of the EUT with phantom 10 mm gap, as illustrated below, please refer to annex B for the test setup photos.

9.1. Handset Reference Points

The vertical centre line passes through two points on the front side of the handset – the midpoint of the width w_t of the handset at the level of the acoustic output, and the midpoint of the width w_b of the bottom of the handset.

The horizontal line is perpendicular to the vertical centre line and passes the center of the acoustic output. The horizontal line is also tangential to the handset at point A.

The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centre line is not necessarily parallel to the front face of the handset, especially for clamshell handsets, handsets with flip covers, and other irregularly shaped handsets.



Fig. 9.1 Illustration for Cheek Position

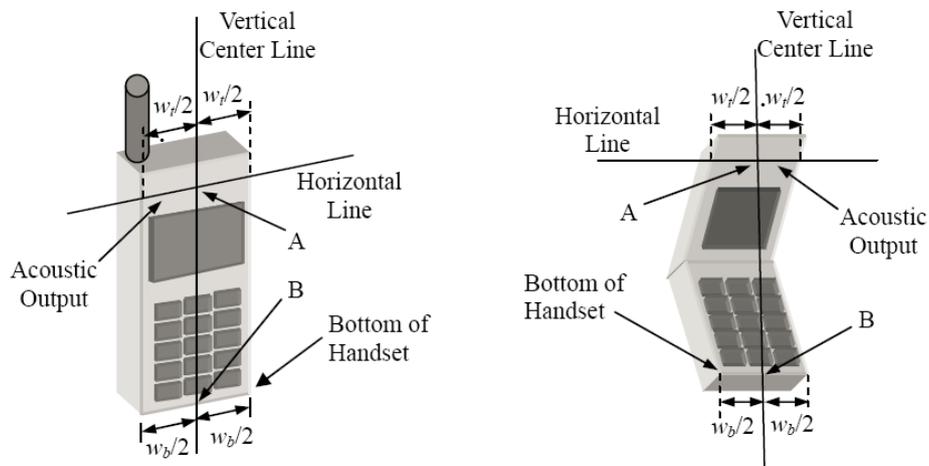


Fig. 9.2 Illustration for Handset Vertical and Horizontal Reference Lines

9.2. Positioning for Cheek / Touch

To position the device with the vertical center line of the body of the device and the horizontal line crossing the center piece in a plane parallel to the sagittal plane of the phantom. While maintaining the device in this plane, align the vertical center line with the reference plane containing the three ear and mouth reference point (M: Mouth, RE: Right Ear and LE: Left Ear) and align the center of the ear piece with the line RE-LE.

To move the device towards the phantom with the ear piece aligned with the line LE-RE until the phone touched the ear. While maintaining the device in the reference plane and maintaining the phone contact with the ear, move the bottom of the phone until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost (see below figure)

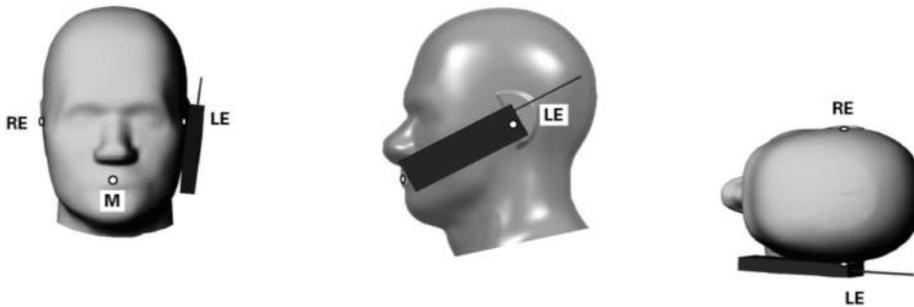


Fig 9.3 Illustration for Cheek Position

9.3. Positioning for Ear / 15° Tilt

To position the device in the “cheek” position described above.

While maintaining the device the reference plane described above and pivoting against the ear, moves it outward away from the mouth by an angle of 15 degrees or until contact with the ear is lost (see figure below).

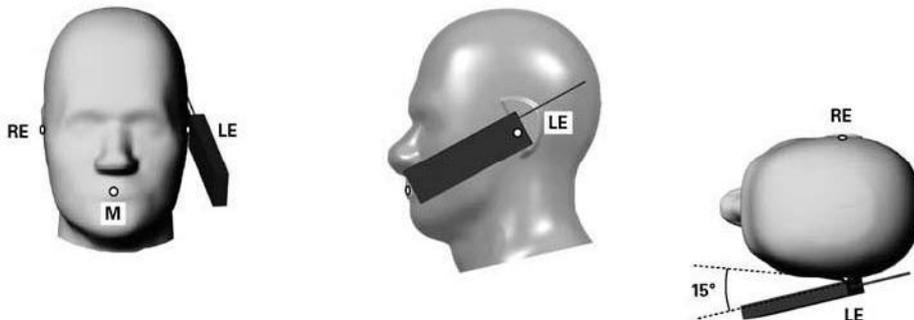


Fig 9.4 Illustration for Tilted Position

9.4. SAR Evaluation near the Mouth/Jaw Regions of the Phantom

Antennas located near the bottom of a phone may require SAR measurements around the mouth and jaw regions of the SAM head phantom. This typically applies to clam-shell style phones that are generally longer in the unfolded normal use positions or to certain older style long rectangular phones.

Under these circumstances, the following procedures apply, adopted from the FCC guidance on SAR handsets document FCC KDB Publication 648474 D04v01r03. The SAR required in these regions of SAM should be measured using a flat phantom. The phone should be positioned with a separation distance of 4 mm between the ear reference point (ERP) and the outer surface of the flat phantom shell. While maintaining this distance at the ERP location, the low (bottom) edge of the phone should be lowered from the phantom to establish the same separation distance between the peak SAR locations identified by the truncated partial SAR distribution measured with the SAM phantom. The distance from the peak SAR location to the phone is determined by the straight line passing perpendicularly through the phantom surface. When it is not feasible to maintain 4 mm separation at the ERP while also establishing the required separation at the peak SAR location, the top edge of the phone will be allowed to touch the phantom with a separation < 4 mm at the ERP. The phone should not be tilted to the left or right while placed in this inclined position to the flat phantom.

9.5. Body-worn Configurations

The body-worn configurations shall be tested with the supplied accessories (belt-clips, holsters, etc.) attached to the device in normal use configuration.

For body-worn and other configurations a flat phantom shall be used which is comprised of material with electrical properties similar to the corresponding tissues.

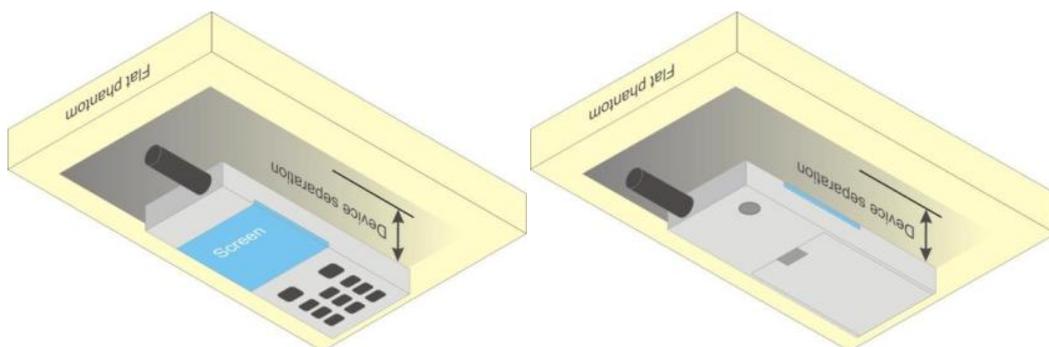


Fig 9.5 Illustration for Body Worn Position

9.6. Hotspot Mode Exposure Position Conditions

For handsets that support hotspot mode operations, with wireless router capabilities and various web browsing functions, the relevant hand and body exposure conditions are tested according to the hotspot SAR procedures in KDB 941225. A test separation distance of 10 mm is required between the phantom and all surfaces and edges with a transmitting antenna located within 25 mm from that surface or edge. When the form factor of a handset is smaller than 9 cm x 5 cm, a test separation distance of 5 mm (instead of 10 mm) is required for testing hotspot mode. When the separation distance required for body-worn accessory testing is larger than or equal to that tested for hotspot mode, in the same wireless mode and for the same surface of the phone, the hotspot mode SAR data may be used to support body-worn accessory SAR compliance for that particular configuration (surface).

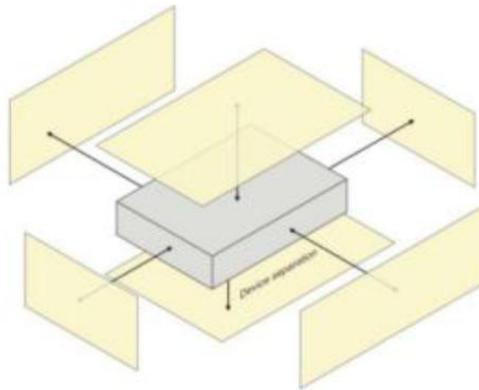


Fig 9.6 Illustration for Hotspot Position

10. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band.
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power.

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as annex B demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band.
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg.

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement.
- (b) Area scan.
- (c) Zoom scan.
- (d) Power drift measurement.

10.1. Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1 g and 10 g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1 g and 10 g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.



The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1 g and 10 g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan.
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters).
- (c) Generation of a high-resolution mesh within the measured volume.
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid.
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface.
- (f) Calculation of the averaged SAR within masses of 1 g and 10 g.

10.2. Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

10.3. Area Scan Procedures

Area scans are defined prior to the measurement process being executed with a user defined variable spacing between each measurement point (integral) allowing low uncertainty measurements to be conducted. Scans defined for FCC applications utilize a 10 mm² step integral, with 1 mm interpolation used to locate the peak SAR area used for zoom scan assessments.

When an Area Scan has measured all reachable points, it computes the field maxima founding the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE 1528-2003.

10.4. Zoom Scan Procedures

Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. A density of 1000 kg/m³ is used to represent the head and body tissue density and not the phantom liquid density, in order to be consistent with the definition of the liquid dielectric properties, i.e. the side length of the 1 g cube is 10 mm, with the side



length of the 10 g cube 21.5 mm. The zoom scan integer steps can be user defined so as to reduce uncertainty, but normal practice for typical test applications utilize a physical step of 5 x 5 x 7 (8 mm x 8 mm x 5 mm) providing a volume of 32 mm in the X & Y axis, and 30 mm in the Z axis.

10.5. SAR Averaged Methods

In DASYS, the interpolation and extrapolation are both based on the modified Quadratic Sheppard's method. The interpolation scheme combines a least-square fitted function method and a weighted average method which are the two basic types of computational interpolation and approximation.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5 mm.

10.6. Power Drift Monitoring

All SAR testing is under the DUT install full charged battery and transmit maximum output power. In DASYS measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of DUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drift more than 5%, the SAR will be retested.

11. SAR Test Procedure

11.1. General Scan Requirements

Probe boundary effect error compensation is required for measurements with the probe tip closer than half a probe tip diameter to the phantom surface. Both the probe tip diameter and sensor offset distance must satisfy measurement protocols; to ensure probe boundary effect errors are minimized and the higher fields closest to the phantom surface can be correctly measured and extrapolated to the phantom surface for computing 1-g SAR. Tolerances of the post-processing algorithms must be verified by the test laboratory for the scan resolutions used in the SAR measurements, according to the reference distribution functions specified in IEEE Std. 1528-2013.

		≤ 3 GHz	> 3 GHz	
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface		5 mm \pm 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2)$ mm \pm 0.5 mm	
Maximum probe angle from probe axis to phantom surface normal at the measurement location		$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$	
Maximum area scan spatial resolution: ΔX_{Area} , ΔY_{Area}		≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm	
		When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be \leq the corresponding x or y dimension of the test device with at least one measurement point on the test device.		
Maximum zoom scan spatial resolution: ΔX_{Zoom} , ΔY_{Zoom}		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*	
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta Z_{Zoom}(n)$	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm	
	graded grid	$\Delta Z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta Z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta Z_{Zoom}(n-1)$ mm	
Minimum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm	
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see IEEE Std 1528-2013 for details. * When zoom scan is required and the <i>reported</i> SAR from the <i>area scan based 1-g SAR estimation</i> procedures of KDB Publication 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				



11.2. Test Procedure

The Following steps are used for each test position

1. Establish a call with the maximum output power with a base station simulator. The connection between the mobile and the base station simulator is established via air interface.
2. Measurement of the local E-field value at a fixed location. This value serves as a reference value for calculating a possible power drift.
3. Measurement of the SAR distribution with a grid of 8 to 16 mm * 8 to 16 mm and a constant distance to the inner surface of the phantom. Since the sensors cannot directly measure at the inner phantom surface, the values between the sensors and the inner phantom surface are extrapolated. With these values the area of the maximum SAR is calculated by an interpolation scheme.
4. Around this point, a cube of 30 * 30 * 30 mm or 32 * 32 * 32 mm is assessed by measuring 5 or 8 * 5 or 8*4 or 5 mm. With these data, the peak spatial-average SAR value can be calculated.

11.3. Description of Interpolation/Extrapolation Scheme

The local SAR inside the phantom is measured using small dipole sensing elements inside a probe body. The probe tip must not be in contact with the phantom surface in order to minimize measurements errors, but the highest local SAR will occur at the surface of the phantom.

An extrapolation is using to determinate this highest local SAR values. The extrapolation is based on a fourth-order least-square polynomial fit of measured data. The local SAR value is then extrapolated from the liquid surface with a 1 mm step.

The measurements have to be performed over a limited time (due to the duration of the battery) so the step of measurement is high. It could vary between 5 and 8 mm. To obtain an accurate assessment of the maximum SAR averaged over 10 grams and 1 gram requires a very fine resolution in the three dimensionals scanned data array.

11.4. Wireless Router

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v02r01 where SAR test considerations for handsets ($L \times W \geq 9 \text{ cm} \times 5 \text{ cm}$) are based on a composite test separation distance of 10 from the front, back and edges of the device containing transmitting antennas within 2.5 cm of their edges,



determined from general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.



12. SAR Test Configuration

<GSM Mode>

A summary of these settings is illustrated below:

For GSM850 frequency band, the power control is set to 5 for GSM/GPRS mode (GSMK-CS1) and set to 8 for EDGE mode (MCS5); For GSM1900 frequency band, the power control is set to 0 for GSM/GPRS mode (GSMK-CS1) and set to 2 for EDGE mode (MCS5).

1. Per KDB 447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.
2. Per KDB 941225 D01v03r01, SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS (4Tx slots) for GSM850/GSM1900 is considered as the primary mode.
3. Other configurations of GSM / GPRS / EDGE are considered as secondary modes.

Timeslot consignations:

Remark:				
1. The frame-averaged power is linearly reported the maximum burst averaged power over 8 time slots. The calculated methods are shown as below: The duty cycle "x" of different time slots as below: 1 TX slot is 1/8, 2 TX slots is 2/8, 3 TX slots is 3/8 and 4 TX slots is 4/8 Based on the calculation formula: Frame-averaged power = Burst averaged power + 10 log (x) So, Frame-averaged power (1 TX slot) = Burst averaged power (1 TX slot) – 9.03 Frame-averaged power (2 TX slots) = Burst averaged power (2 TX slots) – 6.02 Frame-averaged power (3 TX slots) = Burst averaged power (3 TX slots) – 4.26 Frame-averaged power (4 TX slots) = Burst averaged power (4 TX slots) – 3.01				
2. CS1 coding scheme was used in GPRS conducted power measurements and SAR testing, MCS5 coding scheme was used in EGPRS conducted power measurements and SAR testing (if necessary).				
No. of Slots:	Slot 1	Slot 2	Slot 3	Slot 4
Slot Consignation:	1Up 4Down	2Up 3Down	3Up 2Down	4Up 1Down
Duty Cycle:	1:8.3	1:4.15	1:2.77	1:2.08
Correct Factor:	-9.03dB	-6.02dB	-4.26dB	-3.01dB



<WCDMA Mode>

Summary of UMTS conducted power measurement:

1. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq \frac{1}{4}$ dB higher than the primary mode, SAR measurement is not required for the secondary mode.
2. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
3. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.
4. For HSPA+ devices supporting 16 QAM in the uplink, power measurements procedure is according to the configurations in Table C.11.1.4 of 3GPP TS 34.121-1.
5. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. The maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA / DC-HSDPA / HSPA+ is $\leq \frac{1}{4}$ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA / DC-HSDPA / HSPA+ to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA / HSPA+, and according to the following RF output power, the output power results of the secondary modes (HSDPA / HSUPA / DC-HSDPA / HSPA+) are less than $\frac{1}{4}$ dB higher than the primary modes; therefore, SAR measurement is not required for HSDPA / HSUPA / DC-HSDPA / HSPA+.
6. A fixed level power reduction is applied for WCDMA Band II when handset open Hotspot mode, the power reduction triggered.

HSDPA Setup Configuration

Sub-test	β_c	β_a	β_a (SF)	β_c/β_a	$\beta_{hs}^{(1)}$	CM (dB) ⁽²⁾
1	2/15	15/15	64	2/15	4/15	0.0
2	12/15 ⁽³⁾	15/15 ⁽³⁾	64	12/15 ⁽³⁾	24/15	1.0
3	15/15	8/15	64	15/8	30/15	1.5
4	15/15	4/15	64	15/4	30/15	1.5

Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$
 Note 2: CM = 1 for $\beta_c/\beta_a = 12/15, \beta_{hs}/\beta_c = 24/15$.
 Note 3: For subtest 2 the β_c/β_a ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_a = 15/15$.

HSUPA Setup Configuration

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	$\beta_{hs}^{(1)}$	β_{ec}	β_{ed}	β_{ed} (SF)	β_{ed} (codes)	CM ⁽²⁾ (dB)	MPR (dB)	AG ⁽⁴⁾ Index	E-TFCI
1	11/15 ⁽³⁾	15/15 ⁽³⁾	64	11/15 ⁽³⁾	22/15	209/225	1039/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 ⁽⁴⁾	15/15 ⁽⁴⁾	64	15/15 ⁽⁴⁾	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs}/\beta_c = 30/15 \Leftrightarrow \beta_{hs} = 30/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF0) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF0) to $\beta_c = 14/15$ and $\beta_d = 15/15$.

Note 5: Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g.

Note 6: β_{ed} cannot be set directly; it is set by Absolute Grant Value.

HSPA+ 3GPP release 7 (uplink category 7) 16QAM, Setup Configuration:
Table C.11.1.4: β values for transmitter characteristics tests with HS-DPCCH and E-DCH with 16QAM

Sub-test	β_c (Note 3)	β_d	β_{hs} (Note 1)	β_{ec}	β_{ed} (2xSF2) (Note 4)	β_{ed} (2xSF4) (Note 4)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 4)	E-TFCI (Note 5)	E-TFCI (boost)
1	1	0	30/15	30/15	$\beta_{ed1}: 30/15$ $\beta_{ed2}: 30/15$	$\beta_{ed3}: 24/15$ $\beta_{ed4}: 24/15$	3.5	2.5	14	105	105

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.

Note 2: CM = 3.5 and the MPR is based on the relative CM difference, MPR = MAX(CM-1,0).

Note 3: DPDCH is not configured, therefore the β_c is set to 1 and $\beta_d = 0$ by default.

Note 4: β_{ed} can not be set directly; it is set by Absolute Grant Value.

Note 5: All the sub-tests require the UE to transmit 2SF2+2SF4 16QAM EDCH and they apply for UE using E-DPDCH category 7. E-DCH TTI is set to 2ms TTI and E-DCH table index = 2. To support these E-DCH configurations DPDCH is not allocated. The UE is signaled to use the extrapolation algorithm.

**DC-HSDPA Setup Configuration**

The following tests were completed according to procedures in section 7.3.13 of 3GPP TS34.108 v9.5.0. A summary of these settings are illustrated below:

Downlink Physical Channels are set as per 3GPP TS34.121-1 v9.0.0 E.5.

Table E.5.0: Levels for HSDPA connection setup


Parameter During Connection setup	Unit	Value
P-CPICH_Ec/Ior	dB	-10
P-CCPCH and SCH_Ec/Ior	dB	-12
PICH_Ec/Ior	dB	-15
HS-PDSCH	dB	off
HS-SCCH_1	dB	off
DPCH_Ec/Ior	dB	-5
OCNS_Ec/Ior	dB	-3.1

Call is set up as per 3GPP TS34.108 v9.5.0 sub clause 7.3.13

The configurations of the fixed reference channels for HSDPA RF tests are described in 3GPP TS 34.121, annex C for FDD and 3GPP TS 34.122.

Table C.8.1.12: Fixed Reference Channel H-Set 12

Parameter	Unit	Value
Nominal Avg. Inf. Bit Rate	kbps	60
inter-TTI Distance	TTI's	1
Number of HARQ Processes	Processes	6
Information Bit Payload (N_{INF})	Bits	120
Number Code Blocks	Blocks	1
Binary Channel Bits Per TTI	Bits	960
Total Available SML's in UE	SML's	19200
Number of SML's per HARQ Proc.	SML's	3200
Coding Rate		0.15
Number of Physical Channel Codes	Codes	1
Modulation		QPSK
Note 1: The RMC is intended to be used for DC-HSDPA mode and both cells shall transmit with identical parameters as listed in the table. Note 2: Maximum number of transmission is limited to 1, i.e., retransmission is not allowed. The redundancy and constellation version 0 shall be used.		

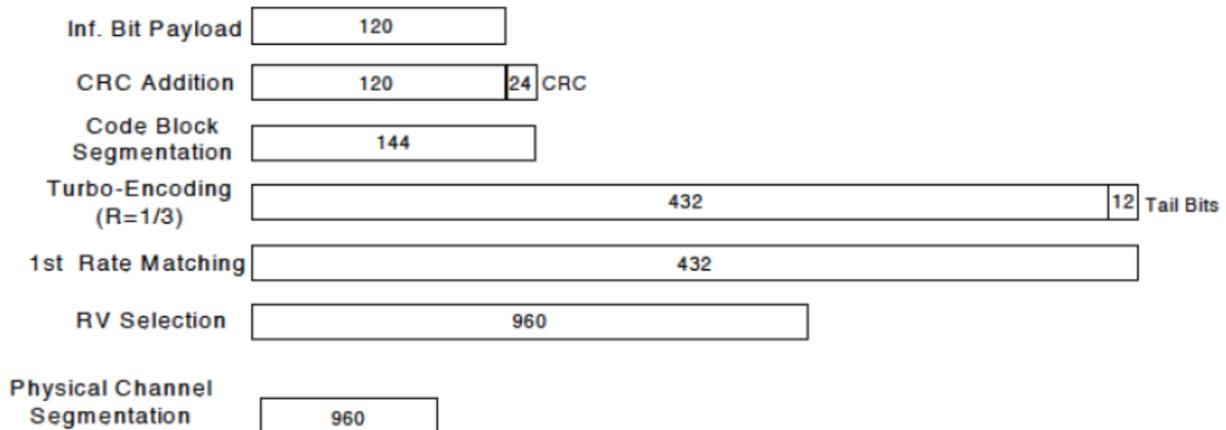
Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)



<CDMA Mode>

1xEV-DO Rev. B

Call box setup procedure

1xEV-DO Release B

1> CMW 500 Signal Generator > 1xEV-DO Taskbar Enable

2> CMW 500 1xEV-DO Signaling Configuration Window >

3> 1xEV-DO Signaling On Window:

Under Access Network Control:

Band Class: BC0: US Cellular

RF Channel: 31

1xEV-DO Power: -70 dBm

4> 1xEV-DO Signaling Configuration Window

Under RF Frequency Band / Channel: Enter Ch. Frequency

- Under Carrier Configuration: RF Frequency
For Two Carriers: Low Channel (1013)

	<u>RF Channel</u>	<u>RF Channel Offset</u>
Carrier [0]	31	0
Carrier [1]	1013	982

- Under Carrier Configuration: RF Pilot
- | | <u>Carrier Sector</u> | <u>Active on AN</u> | <u>Assigned to AT</u> |
|-----------|-----------------------|---------------------|-----------------------|
| Pilot [0] | C0/S0 | ✓ | ✓ |
| | CA/S1 | ✓ | ✓ |

For Three Carriers: Low Channel (1013)

	<u>RF Channel</u>	<u>RF Channel Offset</u>
Carrier [0]	72	0
Carrier [1]	31	-41
Carrier [2]	1013	941

- Under Carrier Configuration: RF Pilot
- | | <u>Carrier Sector</u> | <u>Active on AN</u> | <u>Assigned to AT</u> |
|-----------|-----------------------|---------------------|-----------------------|
| Pilot [0] | C0/S0 | ✓ | ✓ |
| Pilot [1] | C1/S1 | ✓ | ✓ |
| Pilot [2] | C2/S2 | ✓ | ✓ |



<LTE Mode>

LTE Target MPR level

The device implements maximum power reduction per 3GPP 36.101 requirements where the MPR target is as below table. The MPR settings are implemented configured into firmware and cannot be disabled by the end user or LTE carrier network.

Modulation	Channel bandwidth / Transmission bandwidth configuration [RB]						MPR	3GPP
	1.4	3.0	5	10	15	20	Target	MPR
	MHz	MHz	MHz	MHz	MHz	MHz	(dB)	(dB)
QPSK	> 5	> 4	> 8	> 12	> 16	> 18	1	≤ 1
16 QAM	≤ 5	≤ 4	≤ 8	≤ 12	≤ 16	≤ 18	1	≤ 1
64 QAM	> 5	> 4	> 8	> 12	> 16	> 18	2	≤ 2

Note: The measurement result showed some difference from the target MPR level, due to expected 0.5 dB measurement tolerance

LTE Bands

LTE Bands	Channel bandwidth / Transmission bandwidth configuration [RB]					
	1.4	3.0	5	10	15	20
	MHz	MHz	MHz	MHz	MHz	MHz
2	√	√	√	√	√	√
4	√	√	√	√	√	√
5	√	√	√	√	N/A	N/A
7	N/A	N/A	√	√	N/A	N/A
12	√	√	√	√	N/A	N/A
13	N/A	N/A	√	√	N/A	N/A
17	N/A	N/A	√	√	N/A	N/A
66	√	√	√	√	√	√
71	N/A	N/A	√	√	√	√

Note:

1. Per KDB 941225 D05v02r05, when a properly configured base station simulator is used for the SAR and power measurements, spectrum plots for each RB allocation and offset configuration is not required.
2. Per KDB 941225 D05v02r05, start with the largest channel bandwidth and measure SAR for QPSK with 1 RB allocation, using the RB offset and required test channel combination with the highest maximum output power for RB offsets at the upper edge, middle and lower edge of each required test channel.
3. Per KDB 941225 D05v02r05, 50% RB allocation for QPSK SAR testing follows 1RB QPSK allocation procedure.
4. Per KDB 941225 D05v02r05, for QPSK with 100% RB allocation, SAR is not required when the



highest maximum output power for 100 % RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

5. Per KDB 941225 D05v02r05, 16QAM/64QAM output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ dB higher than the same configuration in QPSK and the reported SAR for the QPSK configuration is ≤ 1.45 W/kg; Per KDB941225 D05v02r05, 16QAM/64QAM SAR testing is not required.
6. Per KDB 941225 D05v02r05, smaller bandwidth output power for each RB allocation configuration is $>$ not $\frac{1}{2}$ Db higher than the same configuration in the largest supported bandwidth, and the reported SAR for the largest supported band width is ≤ 1.45 W/kg; Per KDB 941225 D05v02r05, smaller bandwidth SAR testing is not required.
7. For LTE B4 / B5 / B7 / B17 the maximum bandwidth does not support three non-overlapping channels, per KDB941225 D05v02r05, when a device supports overlapping channel assignment in a channel bandwidth configuration, the middle channel of the group of overlapping channels should be selected for testing.
8. LTE band 4 / 12 SAR test was covered by Band 66 / 17; according to April 2015 TCB workshop, SAR test for overlapping LTE bands can be reduced if
 - a. The maximum output power, including tolerance, for the smaller band is \leq the larger band to qualify for the SAR test exclusion.
 - b. The channel bandwidth and other operating parameters for the smaller band are fully supported by the larger band.
9. According to 2017 TCB workshop, for 64 QAM and 16 QAM should be verified by checking the signal constellation with a call box to avoid incorrect maximum power levels due to MPR and other requirements associated with signal modulation, and the following figure is taken from the "Fundamental Measurement >> Modulation Analysis >>constellation" mode of the device connect to the CMW500 base station, therefore, the device 64QAM and 16QAMsignal modulation are correct. Identify if Maximum Power Reduction (MPR) is optional or mandatory, i.e. built-in by design: only mandatory MPR may be considered during SAR testing, when the maximum output power is permanently limited by the MPR implemented within the UE; and only for the applicable RB (resource block) configurations specified in LTE standards: b) A-MPR (additional MPR) must be disabled.
10. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/ (duty cycle)"
 - c. For WWAN: Reported SAR (W/kg) = Measured SAR(W/kg) * Tune-up Scaling Factor



- d. For WLAN/Bluetooth: Reported SAR (W/kg) = Measured SAR(W/kg) * Duty Cycle scaling factor * Tune-up scaling factor
 - e. For TDD LTE SAR measurement, the duty cycle 1:1.59 (62.9 %) was used perform testing and considering the theoretical duty cycle of 63.3% for extended cyclic prefix in the uplink, and the theoretical duty cycle of 62.9% for normal cyclic prefix in uplink, a scaling factor of extended cyclic prefix $63.3\%/62.9\% = 1.006$ is applied to scale-up the measured SAR result. The Reported TDD LTE SAR = measured SAR (W/kg) * Tune-up Scaling Factor* scaling factor for extended cyclic prefix.
11. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the reported 1-g or 10-g SAR for the mid-band or highest output power channel is: ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
 12. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.
 13. Per KDB 648474 D04v01r03, when the reported SAR for a body-worn accessory measured without a headset connected to the handset is ≤ 1.2 W/kg, SAR testing with a headset connected to the handset is not required.

<WLAN 2.4GHz>

1. SAR is measured for 2.4 GHz 802.11b DSSS using either the fixed test position or, when applicable, the initial test position procedure. SAR test reduction is determined according to the following:
 - a. When the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required for 802.11b DSSS in that exposure configuration.
 - b. When the reported SAR is > 0.8 W/kg, SAR is required for that position using the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel; i.e., all channels require testing.
2. 2.4 GHz 802.11 g/n OFDM are additionally evaluated for SAR if the highest reported SAR for 802.11b, adjusted by the ratio of the OFDM to DSSS specified maximum output power, is > 1.2 W/kg. When SAR is required for OFDM modes in 2.4 GHz band, the Initial Test configuration Procedures should be followed.
3. For held-to-ear and hotspot operations, the initial test position procedures were applied. The test position with the highest extrapolated peak SAR will be used as the initial test position. When reported SAR for the initial test position is ≤ 0.4 W/kg, no additional testing for the remaining test positions was required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is ≤ 0.8 W/kg or all test positions are measured.



4. Justification for test configurations for WLAN per KDB Publication 248227 D02DR02-41929 for 2.4 GHz WI-FI single transmission chain operations, the highest measured maximum output power channel for DSSS was selected for SAR measurement. SAR for OFDM modes (2.4 GHz 802.11g/n) was not required due to the maximum allowed powers and the highest reported DSSS SAR.
5. A fixed level power reduction is applied for WiFi when handset operates "held to the body" condition or "held to the ear" condition, the power reduction triggered by audio receiver detection and call establish status.
6. Per KDB 248227 D01v02r02, In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. SAR is not required for the following 2.4 GHz OFDM conditions:
 - a. When KDB Publication 447498 SAR test exclusion applies to the OFDM configuration.
 - b. When the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.



13. Conducted Power List

Remark: The output power of GSM/WCDMA/LTE/WLAN/Bluetooth was recorded in annex E of this report.

14. Hotspot Mode Evaluation Procedure

➤ **EUT Antenna Location**

The location of antenna was recorded in annex B
MHB MAIN Antenna: TX/RX: GSM1900, WCDMA II/IV, LTE Band 2/4/7/66
LB MAIN+MHB DIV Antenna: TX/RX: GSM850, WCDMA V, LTE Band 5/12/13/17/71
2.4GWiFi/BT Antenna: TX/RX: WLAN 2.4GHz, Bluetooth
5GWiFi Antenna: TX/RX: WLAN 5GHz

➤ **EUT Antenna Distance**

Antenna	Antenna distance to surface or edges (mm)					
	Front	Back	Left	Right	Top	Bottom
MHB MAIN Antenna	<5	<5	<5	>25	<5	>25
LB MAIN+MHB DIV Antenna	<5	<5	<5	<5	>25	<5
2.4GWiFi/BT Antenna	<5	<5	>25	<5	<5	>25
5GWiFi Antenna	<5	<5	>25	<25	<5	>25

➤ **Hotspot Evaluation**

Assessment	Hotspot Side for SAR Test Distance: 10 mm					
Antenna	Front	Back	Left	Right	Top	Bottom
MHB MAIN Antenna	Yes	Yes	Yes	No	Yes	No
LB MAIN+MHB DIV Antenna	Yes	Yes	Yes	Yes	No	Yes
2.4GWiFi/BT Antenna	Yes	Yes	No	Yes	Yes	No
5GWiFi Antenna	Yes	Yes	No	Yes	Yes	No

Note :

1. The SAR evaluation procedures for Portable Devices with Wireless Router function is according to KDB 941225 D06 Hotspot SAR v02r01.
2. Head/Body-worn/Hotspot mode SAR assessments are required.
3. Referring to KDB 941225 D06, when the overall device length and width are $\geq 9 \text{ cm} * 5 \text{ cm}$, the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25 mm from that surface or edge.

15. Proximity Sensor Considerations

15.1. Proximity Sensor Triggering Distances

➤ **P-Sensor Triggering Distance Testing**

The EUT should be moved further away from and toward the flat phantom that fill with the tissue simulating liquid to determine the proximity sensor triggering distances. Conducted power is monitored qualitatively to identify the general triggering characteristics and recorded quantitatively, versus spacing, as required by the procedures.

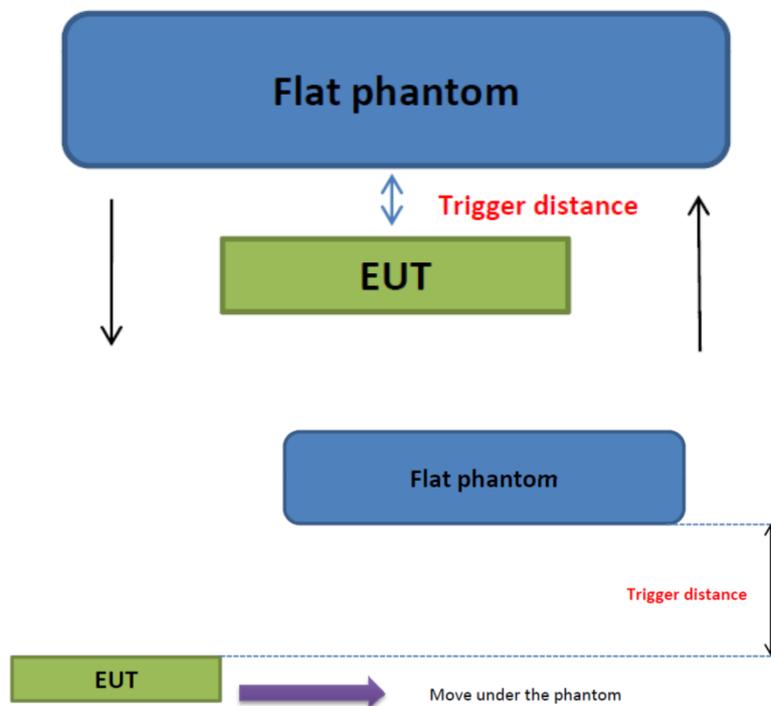


Fig.15.1 Illustration for proximity sensor trigger



➤ **P-Sensor Triggering Distance**


Proximity Sensor Trigger Distance (mm)				
Antenna	Front Side	Back Side	Left Side	Top Side
MHB MAIN Antenna	10	10	10	10

15.2. Proximity Sensor Coverage

Proximity sensors are not normally designed to cover the entire back surface or edges of a tablet. The sensing regions are usually limited to areas near the sensor element. If a sensor is spatially offset from the antenna(s), it is necessary to verify sensor triggering for conditions where the antenna is next to the user but the sensor is laterally further away to ensure sensor coverage is sufficient for reducing the power to maintain compliance. For P-sensor coverage testing, the device is moved and “along the direction of maximum antenna and sensor offset”. Illustrating in the internal photo exhibit, although the sensor spatially offset, there is no trigger condition where the antenna is next to the user, the sensor is laterally further away, therefore proximity sensor coverage testing is not required. This procedure is not required since the antenna, sensor and peak SAR location is overlapped with the sensor.

16. Block Diagram of the Tests to be Performed

16.1. Head

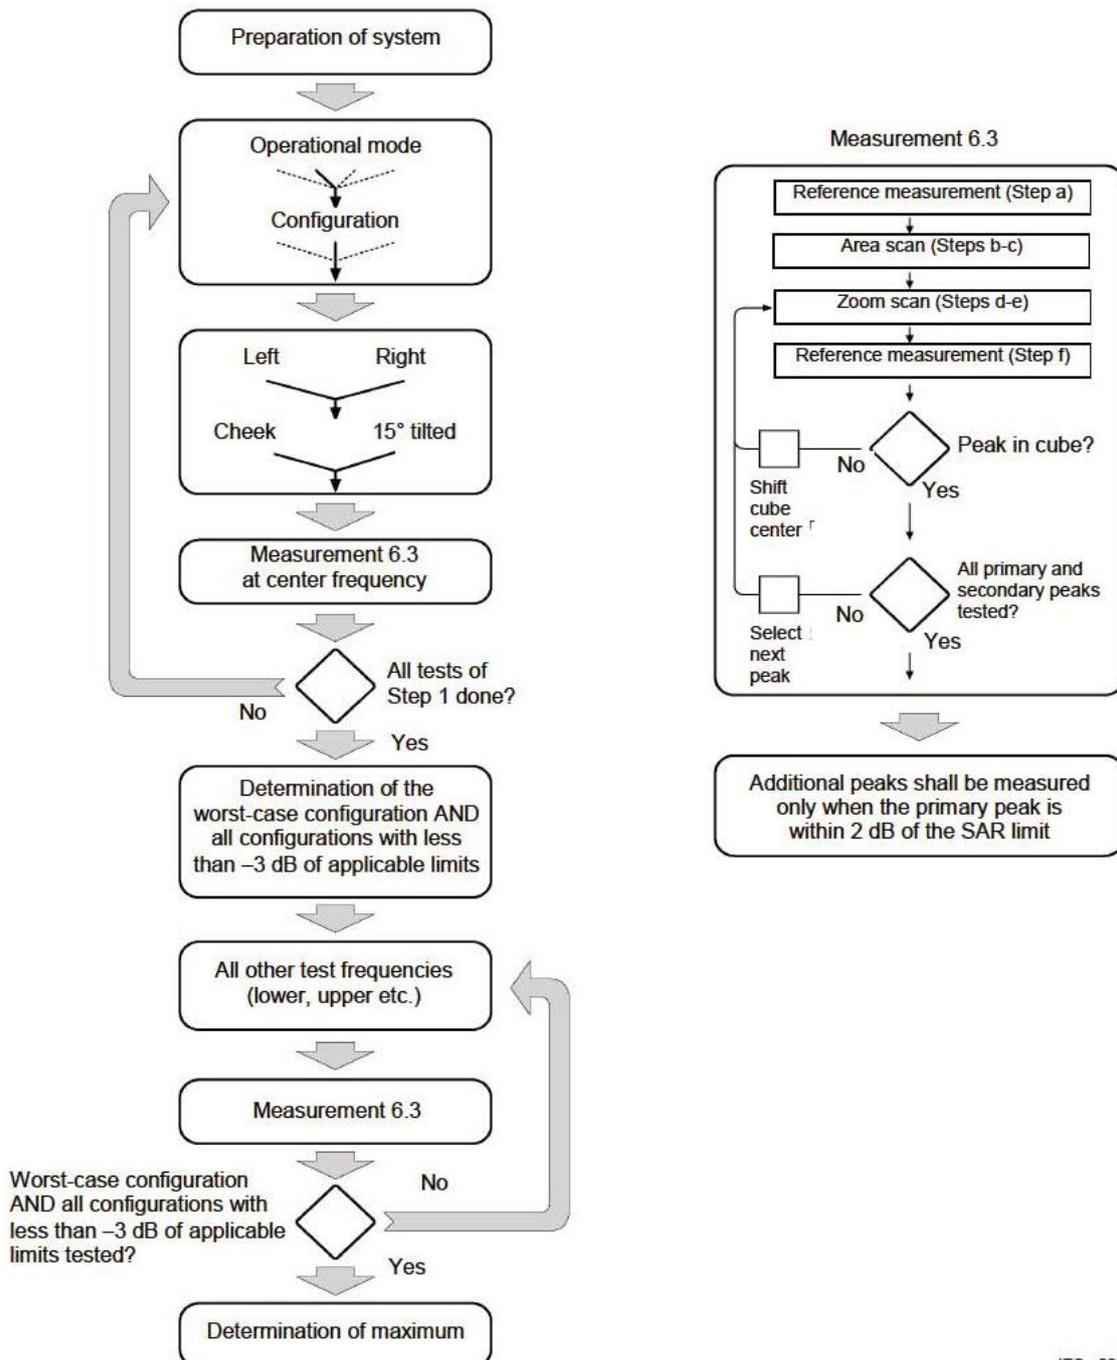

IEC 228/05

16.2. Body

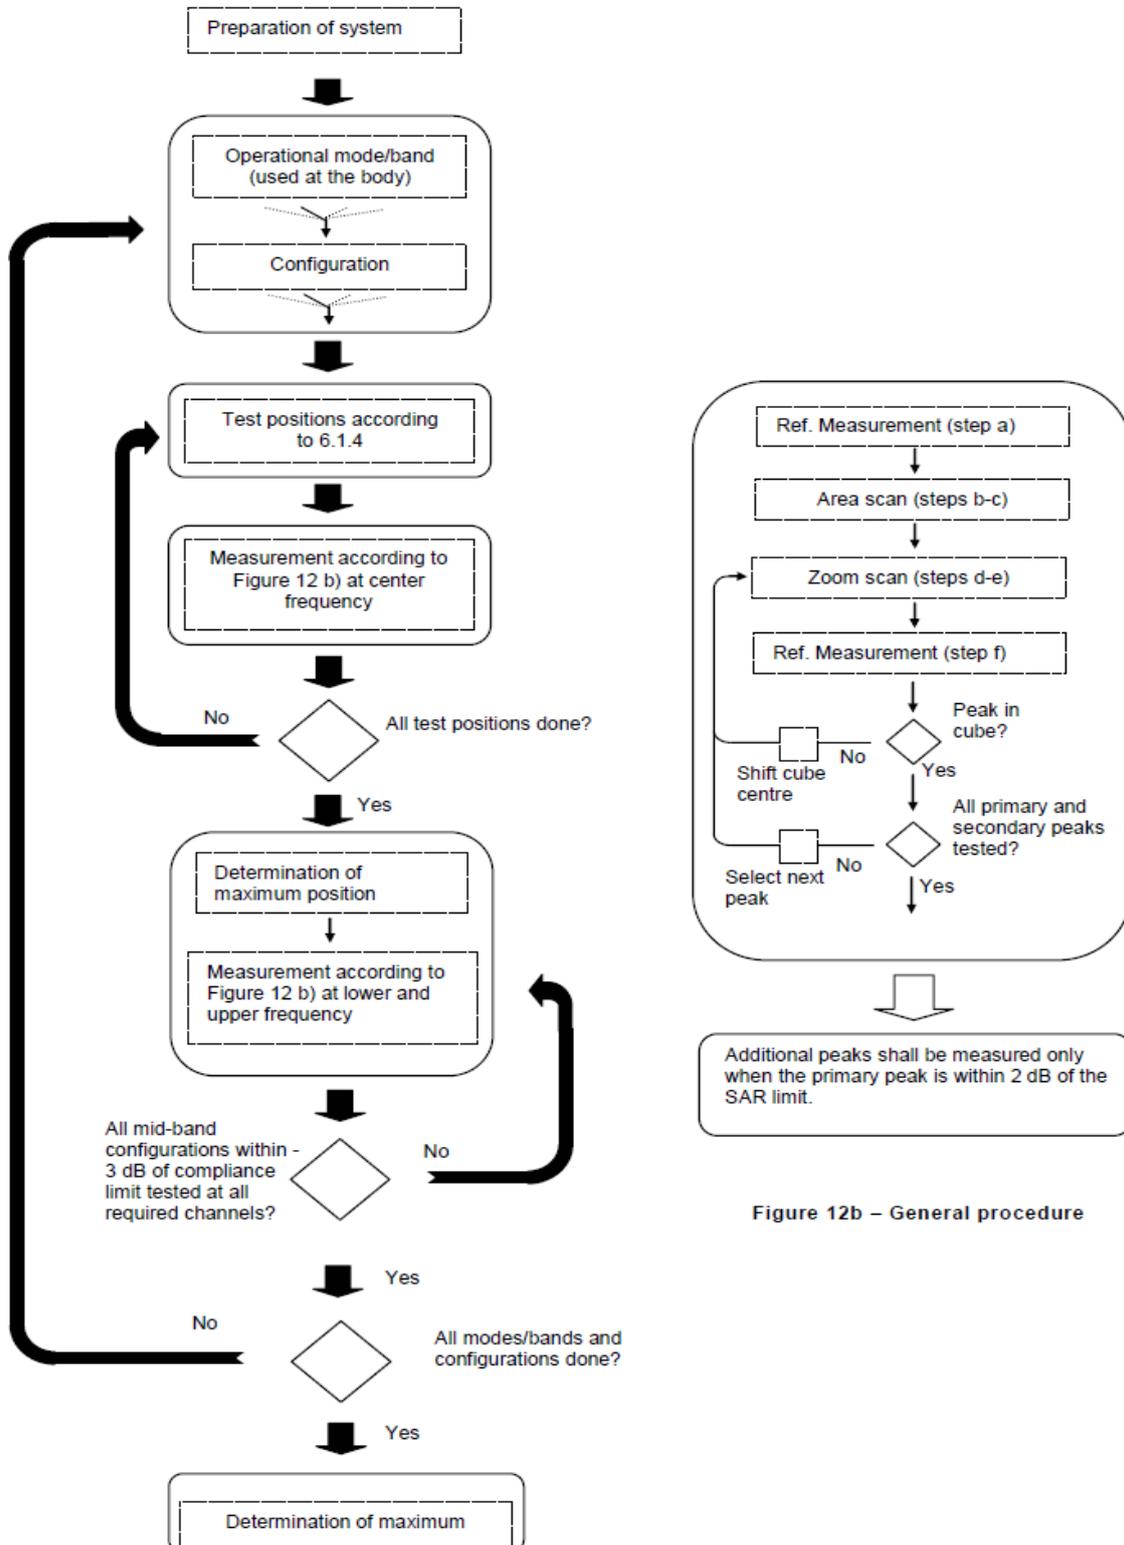


Figure 12b – General procedure

17. Test Results List

17.1. Test Guidance

1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1 / (duty cycle)".
 - c. For WWAN: Reported SAR (W/kg) = Measured SAR (W/kg) * Tune-up Scaling Factor.
 - d. For WLAN/Bluetooth: Reported SAR (W/kg) = Measured SAR (W/kg) * Duty Cycle scaling factor * Tune-up scaling factor.
2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - a. ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - b. ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - c. ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
3. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg.
4. Per KDB 648474 D04v01r03, when the reported SAR for a body-worn accessory measured without a headset connected to the handset is ≤ 1.2 W/kg, SAR testing with a headset connected to the handset is not required.
5. Per KDB648474 D04v01r03, for smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm, when hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg, however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for tablet modes to compare with the 1.2 W/kg SAR test reduction threshold.
6. Per KDB248227 D01v02r02, a Wi-Fi device must be configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools for SAR measurement. The test frequencies established using test mode must correspond to the actual channel frequencies required for operations in the U.S. When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92 - 96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. In addition, a periodic



transmission duty factor is required for current generation SAR systems to measure SAR correctly. Unless it is permitted by specific KDB procedures or continuous transmission is specifically restricted by the device, the reported SAR must be scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit. When a device is not capable of sustaining continuous transmission or the output can become nonlinear, and it is limited by hardware design and unable to transmit at higher than 85% duty factor, a periodic duty factor within 15% of the maximum duty factor the device is capable of transmitting should be used. The reported SAR must be scaled to the maximum transmission duty factor to determine compliance. Descriptions of the procedures applied to establish the specific duty factor used for SAR testing are required in SAR reports to support the test results.

- 7. This device supports power reduction machine according to different using condition, and the power level applied follows below.

Power Level	Senor Configuration	Test Position
Full Power	N/A	Head/Hotspot/Body-worn/Extremity
Reduced Power Level 1	Receiver on	Head
Reduced Power Level 2	Hotspot on	Hotspot
Reduced Power Level 3	Sensor on	Extremity



17.2. Head SAR Data

> GSM Head SAR

Plot No.	Band/Mode	Test Position	CH.	Ave. Power (dBm)	Tune-up Limit (dBm)	Tune-up Scaling Factor	Meas. SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
Full Power								
1#	GPRS 850 (4TX slots)	Right Cheek	189	28.56	29.50	1.242	0.218	0.271
	GPRS 850 (4TX slots)	Right Tilt	189	28.56	29.50	1.242	0.020	0.025
	GPRS 850 (4TX slots)	Left Cheek	189	28.56	29.50	1.242	0.083	0.103
	GPRS 850 (4TX slots)	Left Tilt	189	28.56	29.50	1.242	0.011	0.014
Reduced Power Level 1								
2#	GPRS 1900 (4 TX slots)	Right Cheek	512	17.55	18.30	1.189	0.534	0.635
	GPRS 1900 (4 TX slots)	Right Tilt	512	17.55	18.30	1.189	0.100	0.119
	GPRS 1900 (4 TX slots)	Left Cheek	512	17.55	18.30	1.189	0.194	0.231
	GPRS 1900 (4 TX slots)	Left Tilt	512	17.55	18.30	1.189	0.056	0.067

> WCDMA Head SAR

Plot No.	Band/Mode	Test Position	CH.	Ave. Power (dBm)	Tune-up Limit (dBm)	Tune-up Scaling Factor	Meas. SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
Reduced Power Level 1								
3#	Band II/RMC 12.2Kbps	Right Cheek	9400	14.77	15.70	1.239	0.472	0.585
	Band II/RMC 12.2Kbps	Right Tilt	9400	14.77	15.70	1.239	0.128	0.159
	Band II/RMC 12.2Kbps	Left Cheek	9400	14.77	15.70	1.239	0.232	0.287
	Band II/RMC 12.2Kbps	Left Tilt	9400	14.77	15.70	1.239	0.076	0.094
Reduced Power Level 1								
4#	Band IV/RMC 12.2Kbps	Right Cheek	1413	14.85	15.80	1.245	0.275	0.342
	Band IV/RMC 12.2Kbps	Right Tilt	1413	14.85	15.80	1.245	0.079	0.098
	Band IV/RMC 12.2Kbps	Left Cheek	1413	14.85	15.80	1.245	0.104	0.129
	Band IV/RMC 12.2Kbps	Left Tilt	1413	14.85	15.80	1.245	0.036	0.045
Full Power								
5#	Band V/RMC 12.2Kbps	Right Cheek	4182	22.21	23.00	1.199	0.177	0.212
	Band V/RMC 12.2Kbps	Right Tilt	4182	22.21	23.00	1.199	0.031	0.037
	Band V/RMC 12.2Kbps	Left Cheek	4182	22.21	23.00	1.199	0.059	0.071
	Band V/RMC 12.2Kbps	Left Tilt	4182	22.21	23.00	1.199	0.023	0.028



➤ LTE QPSK Head SAR

Plot No.	Band/Mode	Test Position	CH.	Ave. Power (dBm)	Tune-up Limit (dBm)	Tune-up Scaling Factor	Meas. SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
Reduced Power Level 1								
6#	LTE Band 2/1RB#0 20M	Right Cheek	18900	14.87	16.00	1.297	0.609	0.790
	LTE Band 2/1RB#0 20M	Right Tilt	18900	14.87	16.00	1.297	0.448	0.581
	LTE Band 2/1RB#0 20M	Left Cheek	18900	14.87	16.00	1.297	0.320	0.415
	LTE Band 2/1RB#0 20M	Left Tilt	18900	14.87	16.00	1.297	0.179	0.232
	LTE Band 2/50RB#0 20M	Right Cheek	18900	13.75	15.00	1.334	0.512	0.683
	LTE Band 2/50RB#0 20M	Right Tilt	18900	13.75	15.00	1.334	0.353	0.471
	LTE Band 2/50RB#0 20M	Left Cheek	18900	13.75	15.00	1.334	0.295	0.393
	LTE Band 2/50RB#0 20M	Left Tilt	18900	13.75	15.00	1.334	0.144	0.192
Full Power								
7#	LTE Band 5/1RB#0 10M	Right Cheek	20525	22.78	24.00	1.324	0.226	0.299
	LTE Band 5/1RB#0 10M	Right Tilt	20525	22.78	24.00	1.324	0.177	0.234
	LTE Band 5/1RB#0 10M	Left Cheek	20525	22.78	24.00	1.324	0.109	0.144
	LTE Band 5/1RB#0 10M	Left Tilt	20525	22.78	24.00	1.324	0.076	0.101
	LTE Band 5/25RB#0 10M	Right Cheek	20525	21.70	23.00	1.349	0.158	0.213
	LTE Band 5/25RB#0 10M	Right Tilt	20525	21.70	23.00	1.349	0.124	0.167
	LTE Band 5/25RB#0 10M	Left Cheek	20525	21.70	23.00	1.349	0.076	0.103
	LTE Band 5/25RB#0 10M	Left Tilt	20525	21.70	23.00	1.349	0.053	0.071
Reduced Power Level 1								
	LTE Band 7/1RB#0 20M	Right Cheek	21100	15.98	17.00	1.265	0.434	0.549
8#	LTE Band 7/1RB#0 20M	Right Tilt	21100	15.98	17.00	1.265	0.689	0.871
	LTE Band 7/1RB#0 20M	Right Tilt	21100	15.98	17.00	1.265	0.641	0.811
	LTE Band 7/1RB#0 20M	Left Cheek	21100	15.98	17.00	1.265	0.359	0.454
	LTE Band 7/1RB#0 20M	Left Tilt	21100	15.98	17.00	1.265	0.482	0.610
	LTE Band 7/1RB#0 20M	Right Tilt	20850	15.92	17.00	1.282	0.558	0.716
	LTE Band 7/1RB#0 20M	Right Tilt	21350	15.95	17.00	1.274	0.652	0.830
	LTE Band 7/50RB#0 10M	Right Cheek	21100	15.03	16.00	1.250	0.312	0.391
	LTE Band 7/50RB#0 10M	Right Tilt	21100	15.03	16.00	1.250	0.496	0.620
	LTE Band 7/50RB#0 10M	Left Cheek	21100	15.03	16.00	1.250	0.258	0.323
	LTE Band 7/50RB#0 10M	Left Tilt	21100	15.03	16.00	1.250	0.347	0.434
Full Power								
9#	LTE Band 12/1RB#0 10M	Right Cheek	23095	22.89	24.00	1.291	0.102	0.132
	LTE Band 12/1RB#0 10M	Right Tilt	23095	22.89	24.00	1.291	0.074	0.096
	LTE Band 12/1RB#0 10M	Left Cheek	23095	22.89	24.00	1.291	0.088	0.114
	LTE Band 12/1RB#0 10M	Left Tilt	23095	22.89	24.00	1.291	0.062	0.080



	LTE Band 12/25RB#0 10M	Right Cheek	23095	21.84	23.00	1.306	0.096	0.125
	LTE Band 12/25RB#0 10M	Right Tilt	23095	21.84	23.00	1.306	0.061	0.080
	LTE Band 12/25RB#0 10M	Left Cheek	23095	21.84	23.00	1.306	0.074	0.097
	LTE Band 12/25RB#0 10M	Left Tilt	23095	21.84	23.00	1.306	0.050	0.065
Full Power								
10#	LTE Band 13/1RB#0 10M	Right Cheek	23230	22.94	24.00	1.276	0.195	0.249
	LTE Band 13/1RB#0 10M	Right Tilt	23230	22.94	24.00	1.276	0.177	0.226
	LTE Band 13/1RB#0 10M	Left Cheek	23230	22.94	24.00	1.276	0.126	0.161
	LTE Band 13/1RB#0 10M	Left Tilt	23230	22.94	24.00	1.276	0.085	0.108
	LTE Band 13/25RB#0 10M	Right Cheek	23230	21.92	23.00	1.282	0.137	0.176
	LTE Band 13/25RB#0 10M	Right Tilt	23230	21.92	23.00	1.282	0.124	0.159
	LTE Band 13/25RB#0 10M	Left Cheek	23230	21.92	23.00	1.282	0.088	0.113
	LTE Band 13/25RB#0 10M	Left Tilt	23230	21.92	23.00	1.282	0.060	0.077
Reduced Power Level 1								
11#	LTE Band 66/1RB#0 20M	Right Cheek	132322	14.79	16.00	1.321	0.565	0.747
	LTE Band 66/1RB#0 20M	Right Tilt	132322	14.79	16.00	1.321	0.318	0.420
	LTE Band 66/1RB#0 20M	Left Cheek	132322	14.79	16.00	1.321	0.284	0.375
	LTE Band 66/1RB#0 20M	Left Tilt	132322	14.79	16.00	1.321	0.143	0.189
	LTE Band 66/50RB#0 20M	Right Cheek	132322	13.58	15.00	1.387	0.400	0.555
	LTE Band 66/50RB#0 20M	Right Tilt	132322	13.58	15.00	1.387	0.241	0.334
	LTE Band 66/50RB#0 20M	Left Cheek	132322	13.58	15.00	1.387	0.189	0.262
	LTE Band 66/50RB#0 20M	Left Tilt	132322	13.58	15.00	1.387	0.120	0.166
Full Power								
12#	LTE Band 71/1RB#0 20M	Right Cheek	133322	22.82	24.00	1.312	0.132	0.173
	LTE Band 71/1RB#0 20M	Right Tilt	133322	22.82	24.00	1.312	0.096	0.126
	LTE Band 71/1RB#0 20M	Left Cheek	133322	22.82	24.00	1.312	0.072	0.094
	LTE Band 71/1RB#0 20M	Left Tilt	133322	22.82	24.00	1.312	0.041	0.054
	LTE Band 71/50RB#0 20M	Right Cheek	133322	21.71	23.00	1.346	0.115	0.155
	LTE Band 71/50RB#0 20M	Right Tilt	133322	21.71	23.00	1.346	0.074	0.100
	LTE Band 71/50RB#0 20M	Left Cheek	133322	21.71	23.00	1.346	0.050	0.067
	LTE Band 71/50RB#0 20M	Left Tilt	133322	21.71	23.00	1.346	0.031	0.042



➤ **WLAN Head SAR**

Plot No.	Band/Mode	Test Position	CH.	Ave. Power (dBm)	Tune-up Limit (dBm)	Tune-up Scaling Factor	Meas. SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
Full Power								
	WLAN2.4GHz/802.11b	Right Cheek	1	17.47	18.00	1.130	0.200	0.227
	WLAN2.4GHz/802.11b	Right Tilt	1	17.47	18.00	1.130	0.222	0.252
13#	WLAN2.4GHz/802.11b	Left Cheek	1	17.47	18.00	1.130	0.388	0.440
	WLAN2.4GHz/802.11b	Left Tilt	1	17.47	18.00	1.130	0.240	0.272
Full Power								
	WLAN5.2GHz/802.11n40	Right Cheek	38	16.04	16.50	1.112	0.194	0.229
	WLAN5.2GHz/802.11n40	Right Tilt	38	16.04	16.50	1.112	0.198	0.234
14#	WLAN5.2GHz/802.11n40	Left Cheek	38	16.04	16.50	1.112	0.442	0.522
	WLAN5.2GHz/802.11n40	Left Tilt	38	16.04	16.50	1.112	0.295	0.348
Full Power								
	WLAN5.3GHz/802.11a	Right Cheek	52	16.08	16.50	1.102	0.207	0.235
	WLAN5.3GHz/802.11a	Right Tilt	52	16.08	16.50	1.102	0.205	0.232
15#	WLAN5.3GHz/802.11a	Left Cheek	52	16.08	16.50	1.102	0.297	0.337
	WLAN5.3GHz/802.11a	Left Tilt	52	16.08	16.50	1.102	0.293	0.332
Full Power								
	WLAN5.5GHz/802.11n20	Right Cheek	100	16.06	16.50	1.107	0.243	0.277
	WLAN5.5GHz/802.11n20	Right Tilt	100	16.06	16.50	1.107	0.226	0.258
16#	WLAN5.5GHz/802.11n20	Left Cheek	100	16.06	16.50	1.107	0.473	0.540
	WLAN5.5GHz/802.11n20	Left Tilt	100	16.06	16.50	1.107	0.348	0.397
Full Power								
	WLAN5.8GHz/802.11ac40	Right Cheek	151	15.74	16.50	1.191	0.240	0.303
	WLAN5.8GHz/802.11ac40	Right Tilt	151	15.74	16.50	1.191	0.313	0.396
17#	WLAN5.8GHz/802.11ac40	Left Cheek	151	15.74	16.50	1.191	0.615	0.777
	WLAN5.8GHz/802.11ac40	Left Tilt	151	15.74	16.50	1.191	0.412	0.521
Full Power								
	Bluetooth/DH5	Right Cheek	78	9.36	9.50	1.033	0.043	0.048
	Bluetooth/DH5	Right Tilt	78	9.36	9.50	1.033	0.050	0.056
18#	Bluetooth/DH5	Left Cheek	78	9.36	9.50	1.033	0.116	0.130
	Bluetooth/DH5	Left Tilt	78	9.36	9.50	1.033	0.102	0.114

Note:

1. Per KDB 447498 D01v06, for each exposure position, if the highest output power channel Reported SAR ≤ 0.8 W/kg, other channels SAR testing is not necessary.
2. Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required when the measured SAR is ≥ 0.8 W/kg.



3. Per KDB 941225 D05v02r05, 100% RB allocation SAR measurement is not required when the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg.
4. Per KDB 248227 D01v02r02, for 802.11b DSSS , when the reported SAR of the highest measured maximum output power channel for the exposure configuration is ≤ 0.8 W/kg, no further SAR testing is required in that exposure configuration.
5. Per KDB 248227 D01v02r02, OFDM SAR is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
6. According to KDB 865664 D02v01r02, SAR plot is required for the highest measured SAR in each exposure configuration, wireless mode and frequency band combination.
7. The 2.4G WLAN reported 1g SAR (W/kg) should be scaled with the duty cycle scaling factor 1.004, 1.062 for WLAN 5.2GHz 802.11n40, 1.029 for WLAN 5.3GHz 802.11a, 1.031 for WLAN 5.5GHz 802.11a, and 1.061 for WLAN 5.8GHz 802.11ac40.
8. According to 2016 Oct. TCB workshop for Bluetooth SAR consideration and the theoretical duty cycle is 83.3%, therefore the actual duty cycle will be scaled up to the theoretical value of Bluetooth reported SAR calculation. The duty cycle of Bluetooth is 76.91 %, Therefore the duty cycle scaling factor 1.083 should be used to calculating the reported SAR.



17.3. Hotspot SAR Data

➤ **GSM Hotspot SAR**

Plot No.	Band/Mode	Test Position	CH.	Ave. Power (dBm)	Tune-up Limit (dBm)	Tune-up Scaling Factor	Meas. SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
Full Power								
	GPRS 850(4 TX slots)	Front Side	189	28.56	29.50	1.242	0.366	0.454
19#	GPRS 850(4 TX slots)	Back Side	189	28.56	29.50	1.242	0.571	0.709
	GPRS 850(4 TX slots)	Left Side	189	28.56	29.50	1.242	0.075	0.093
	GPRS 850(4 TX slots)	Right Side	189	28.56	29.50	1.242	0.072	0.089
	GPRS 850(4 TX slots)	Bottom Side	189	28.56	29.50	1.242	0.372	0.462
Reduced Power Level 2								
	GPRS 1900(4 TX slots)	Front Side	512	19.49	20.30	1.205	0.340	0.410
	GPRS 1900(4 TX slots)	Back Side	512	19.49	20.30	1.205	0.752	0.906
	GPRS 1900(4 TX slots)	Left Side	512	19.49	20.30	1.205	0.188	0.227
	GPRS 1900(4 TX slots)	Top Side	512	19.49	20.30	1.205	0.313	0.377
20#	GPRS 1900(4 TX slots)	Back Side	661	19.55	20.30	1.189	0.822	0.977
	GPRS 1900(4 TX slots)	Back Side	810	19.36	20.30	1.242	0.774	0.961

➤ **WCDMA Hotspot SAR**

Plot No.	Band/Mode	Test Position	CH.	Ave. Power (dBm)	Tune-up Limit (dBm)	Tune-up Scaling Factor	Meas. SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
Reduced Power Level 2								
	Band II/RMC 12.2Kbps	Front Side	9400	17.77	18.70	1.239	0.484	0.600
21#	Band II/RMC 12.2Kbps	Back Side	9400	17.77	18.70	1.239	0.515	0.638
	Band II/RMC 12.2Kbps	Left Side	9400	17.77	18.70	1.239	0.351	0.435
	Band II/RMC 12.2Kbps	Top Side	9400	17.77	18.70	1.239	0.404	0.500
Reduced Power Level 2								
	Band IV/RMC 12.2Kbps	Front Side	1413	16.85	17.80	1.245	0.174	0.217
22#	Band IV/RMC 12.2Kbps	Back Side	1413	16.85	17.80	1.245	0.297	0.370
	Band IV/RMC 12.2Kbps	Left Side	1413	16.85	17.80	1.245	0.086	0.107
	Band IV/RMC 12.2Kbps	Top Side	1413	16.85	17.80	1.245	0.248	0.309
Full Power								
	Band V/RMC 12.2Kbps	Front Side	4182	22.21	23.00	1.199	0.207	0.248
23#	Band V/RMC 12.2Kbps	Back Side	4182	22.21	23.00	1.199	0.360	0.432
	Band V/RMC 12.2Kbps	Left Side	4182	22.21	23.00	1.199	0.017	0.020
	Band V/RMC 12.2Kbps	Right Side	4182	22.21	23.00	1.199	0.055	0.066
	Band V/RMC 12.2Kbps	Bottom Side	4182	22.21	23.00	1.199	0.231	0.277



➤ LTE QPSK Hotspot SAR

Plot No.	Band/Mode	Test Position	CH.	Ave. Power (dBm)	Tune-up Limit (dBm)	Tune-up Scaling Factor	Meas. SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
Full Power								
	LTE Band 2/1RB#0 20M	Front Side	18900	17.87	19.00	1.297	0.459	0.595
24#	LTE Band 2/1RB#0 20M	Back Side	18900	17.87	19.00	1.297	0.619	0.803
	LTE Band 2/1RB#0 20M	Left Side	18900	17.87	19.00	1.297	0.075	0.097
	LTE Band 2/1RB#0 20M	Top Side	18900	17.87	19.00	1.297	0.375	0.486
	LTE Band 2/1RB#0 20M	Back Side	18700	17.83	19.00	1.309	0.531	0.695
	LTE Band 2/1RB#0 20M	Back Side	19100	17.78	19.00	1.324	0.604	0.800
	LTE Band 2/50RB#0 20M	Front Side	18900	16.75	18.00	1.334	0.435	0.580
	LTE Band 2/50RB#0 20M	Back Side	18900	16.75	18.00	1.334	0.587	0.783
	LTE Band 2/50RB#0 20M	Left Side	18900	16.75	18.00	1.334	0.071	0.095
	LTE Band 2/50RB#0 20M	Top Side	18900	16.75	18.00	1.334	0.220	0.293
	LTE Band 2/100RB#0 20M	Back Side	18900	16.63	18.00	1.371	0.516	0.707
Full Power								
	LTE Band 5/1RB#0 10M	Front Side	20525	22.78	24.00	1.324	0.256	0.339
25#	LTE Band 5/1RB#0 10M	Back Side	20525	22.78	24.00	1.324	0.340	0.450
	LTE Band 5/1RB#0 10M	Left Side	20525	22.78	24.00	1.324	0.193	0.256
	LTE Band 5/1RB#0 10M	Right Side	20525	22.78	24.00	1.324	0.280	0.371
	LTE Band 5/1RB#0 10M	Bottom Side	20525	22.78	24.00	1.324	0.324	0.429
	LTE Band 5/25RB#0 10M	Front Side	20525	21.70	23.00	1.349	0.214	0.289
	LTE Band 5/25RB#0 10M	Back Side	20525	21.70	23.00	1.349	0.318	0.429
	LTE Band 5/25RB#0 10M	Left Side	20525	21.70	23.00	1.349	0.145	0.196
	LTE Band 5/25RB#0 10M	Right Side	20525	21.70	23.00	1.349	0.207	0.279
	LTE Band 5/25RB#0 10M	Bottom Side	20525	21.70	23.00	1.349	0.235	0.317
Reduced Power Level 2								
	LTE Band 7/1RB#0 20M	Front Side	21100	14.98	16.00	1.265	0.183	0.231
26#	LTE Band 7/1RB#0 20M	Back Side	21100	14.98	16.00	1.265	0.216	0.273
	LTE Band 7/1RB#0 20M	Left Side	21100	14.98	16.00	1.265	0.152	0.192
	LTE Band 7/1RB#0 20M	Top Side	21100	14.98	16.00	1.265	0.200	0.253
	LTE Band 7/50RB#0 20M	Front Side	21100	14.03	15.00	1.250	0.152	0.190
	LTE Band 7/50RB#0 20M	Back Side	21100	14.03	15.00	1.250	0.179	0.224
	LTE Band 7/50RB#0 20M	Left Side	21100	14.03	15.00	1.250	0.125	0.156
	LTE Band 7/50RB#0 20M	Top Side	21100	14.03	15.00	1.250	0.162	0.203
Full Power								
	LTE Band 12/1RB#0 10M	Front Side	23095	22.89	24.00	1.291	0.140	0.181
27#	LTE Band 12/1RB#0 10M	Back Side	23095	22.89	24.00	1.291	0.183	0.236



	LTE Band 12/1RB#0 10M	Left Side	23095	22.89	24.00	1.291	0.077	0.099
	LTE Band 12/1RB#0 10M	Right Side	23095	22.89	24.00	1.291	0.112	0.145
	LTE Band 12/1RB#0 10M	Bottom Side	23095	22.89	24.00	1.291	0.130	0.168
	LTE Band 12/25RB#0 10M	Front Side	23095	21.84	23.00	1.306	0.098	0.128
	LTE Band 12/25RB#0 10M	Back Side	23095	21.84	23.00	1.306	0.128	0.167
	LTE Band 12/25RB#0 10M	Left Side	23095	21.84	23.00	1.306	0.054	0.071
	LTE Band 12/25RB#0 10M	Right Side	23095	21.84	23.00	1.306	0.078	0.102
	LTE Band 12/25RB#0 10M	Bottom Side	23095	21.84	23.00	1.306	0.091	0.119
Full Power								
	LTE Band 13/1RB#0 10M	Front Side	23230	22.94	24.00	1.276	0.227	0.290
28#	LTE Band 13/1RB#0 10M	Back Side	23230	22.94	24.00	1.276	0.274	0.350
	LTE Band 13/1RB#0 10M	Left Side	23230	22.94	24.00	1.276	0.158	0.202
	LTE Band 13/1RB#0 10M	Right Side	23230	22.94	24.00	1.276	0.197	0.251
	LTE Band 13/1RB#0 10M	Bottom Side	23230	22.94	24.00	1.276	0.216	0.276
	LTE Band 13/25RB#0 10M	Front Side	23230	21.92	23.00	1.282	0.182	0.233
	LTE Band 13/25RB#0 10M	Back Side	23230	21.92	23.00	1.282	0.219	0.281
	LTE Band 13/25RB#0 10M	Left Side	23230	21.92	23.00	1.282	0.126	0.162
	LTE Band 13/25RB#0 10M	Right Side	23230	21.92	23.00	1.282	0.158	0.203
	LTE Band 13/25RB#0 10M	Bottom Side	23230	21.92	23.00	1.282	0.173	0.222
Reduced Power Level 2								
	LTE Band 66/1RB#0 20M	Front Side	132322	18.29	19.00	1.178	0.599	0.705
	LTE Band 66/1RB#0 20M	Back Side	132322	18.29	19.00	1.178	0.873	1.028
	LTE Band 66/1RB#0 20M	Left Side	132322	18.29	19.00	1.178	0.113	0.133
	LTE Band 66/1RB#0 20M	Top Side	132322	18.29	19.00	1.178	0.602	0.709
	LTE Band 66/1RB#0 20M	Back Side	132072	18.27	19.00	1.183	0.799	0.945
29#	LTE Band 66/1RB#0 20M	Back Side	132572	18.20	19.00	1.202	0.952	1.145
	LTE Band 66/50RB#0 20M	Front Side	132322	17.08	18.00	1.236	0.524	0.648
	LTE Band 66/50RB#0 20M	Back Side	132322	17.08	18.00	1.236	0.698	0.863
	LTE Band 66/50RB#0 20M	Left Side	132322	17.08	18.00	1.236	0.090	0.112
	LTE Band 66/50RB#0 20M	Top Side	132322	17.08	18.00	1.236	0.546	0.675
	LTE Band 66/50RB#0 20M	Back Side	132072	17.05	18.00	1.245	0.639	0.795
	LTE Band 66/50RB#0 20M	Back Side	132572	17.02	18.00	1.253	0.762	0.954
	LTE Band 66/100RB#0 20M	Back Side	132322	16.03	18.00	1.574	0.625	0.984
Full Power								
	LTE Band 71/1RB#0 20M	Front Side	133322	22.82	24.00	1.312	0.158	0.207
30#	LTE Band 71/1RB#0 20M	Back Side	133322	22.82	24.00	1.312	0.204	0.268
	LTE Band 71/1RB#0 20M	Left Side	133322	22.82	24.00	1.312	0.090	0.118



	LTE Band 71/1RB#0 20M	Right Side	133322	22.82	24.00	1.312	0.128	0.168
	LTE Band 71/1RB#0 20M	Bottom Side	133322	22.82	24.00	1.312	0.147	0.193
	LTE Band 71/50RB#0 20M	Front Side	133322	21.71	23.00	1.346	0.126	0.170
	LTE Band 71/50RB#0 20M	Back Side	133322	21.71	23.00	1.346	0.163	0.219
	LTE Band 71/50RB#0 20M	Left Side	133322	21.71	23.00	1.346	0.072	0.097
	LTE Band 71/50RB#0 20M	Right Side	133322	21.71	23.00	1.346	0.103	0.139
	LTE Band 71/50RB#0 20M	Bottom Side	133322	21.71	23.00	1.346	0.118	0.159

➤ **WLAN/BT Hotspot SAR**

Plot No.	Band/Mode	Test Position	CH.	Ave. Power (dBm)	Tune-up Limit (dBm)	Tune-up Scaling Factor	Meas. SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
Full Power								
	WLAN2.4GHz/802.11b	Front Side	1	17.47	18.00	1.130	0.113	0.128
31#	WLAN2.4GHz/802.11b	Back Side	1	17.47	18.00	1.130	0.146	0.166
	WLAN2.4GHz/802.11b	Right Side	1	17.47	18.00	1.130	0.074	0.084
	WLAN2.4GHz/802.11b	Top Side	1	17.47	18.00	1.130	0.105	0.119
Full Power								
	WLAN5.2GHz/802.11n40	Front Side	38	16.04	16.50	1.112	0.079	0.093
	WLAN5.2GHz/802.11n40	Back Side	38	16.04	16.50	1.112	0.109	0.129
	WLAN5.2GHz/802.11n40	Right Side	38	16.04	16.50	1.112	0.051	0.060
32#	WLAN5.2GHz/802.11n40	Top Side	38	16.04	16.50	1.112	0.196	0.231
Full Power								
	WLAN5.8GHz/802.11ac40	Front Side	151	15.74	16.50	1.191	0.180	0.228
	WLAN5.8GHz/802.11ac40	Back Side	151	15.74	16.50	1.191	0.300	0.379
	WLAN5.8GHz/802.11ac40	Right Side	151	15.74	16.50	1.191	0.078	0.099
33#	WLAN5.8GHz/802.11ac40	Top Side	151	15.74	16.50	1.191	0.326	0.412
Full Power								
	Bluetooth/DH5	Front Side	78	9.36	9.50	1.033	0.028	0.031
34#	Bluetooth/DH5	Back Side	78	9.36	9.50	1.033	0.032	0.036
	Bluetooth/DH5	Right Side	78	9.36	9.50	1.033	0.025	0.028
	Bluetooth/DH5	Top Side	78	9.36	9.50	1.033	0.019	0.021

Note:

1. The 2.4G WLAN reported 1g SAR (W/kg) should be scaled with the duty cycle scaling factor 1.004, 1.062 for WLAN 5.2GHz 802.11n40, 1.029 for WLAN 5.3GHz 802.11a, 1.031 for WLAN 5.5GHz 802.11a, and 1.061 for WLAN 5.8GHz 802.11ac40.
2. According to 2016 Oct. TCB workshop for Bluetooth SAR consideration and the theoretical duty cycle is 83.3%, therefore the actual duty cycle will be scaled up to the theoretical value of Bluetooth reported SAR calculation. The duty cycle of Bluetooth is 76.91 %, Therefore the duty



cycle scaling factor 1.083 should be used to calculating the reported SAR.

17.4. Body-worn SAR Data

> GSM Body-worn SAR

Plot No.	Band/Mode	Test Position	CH.	Ave. Power (dBm)	Tune-up Limit (dBm)	Tune-up Scaling Factor	Meas. SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
Full Power								
	GPRS 850(4 TX slots)	Front Side	189	28.56	29.50	1.242	0.191	0.237
35#	GPRS 850(4 TX slots)	Back Side	189	28.56	29.50	1.242	0.364	0.452
Full Power								
	GPRS 1900(4 TX slots)	Front Side	512	25.49	26.30	1.205	0.128	0.154
36#	GPRS 1900(4 TX slots)	Back Side	512	25.49	26.30	1.205	0.248	0.299

> WCDMA Body-worn SAR

Plot No.	Band/Mode	Test Position	CH.	Ave. Power (dBm)	Tune-up Limit (dBm)	Tune-up Scaling Factor	Meas. SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
Full Power								
	Band II/RMC 12.2Kbps	Front Side	9400	22.77	23.70	1.239	0.183	0.227
37#	Band II/RMC 12.2Kbps	Back Side	9400	22.77	23.70	1.239	0.290	0.359
Full Power								
	Band IV/RMC 12.2Kbps	Front Side	1413	22.85	23.80	1.245	0.103	0.128
38#	Band IV/RMC 12.2Kbps	Back Side	1413	22.85	23.80	1.245	0.161	0.200
Full Power								
	Band V/RMC 12.2Kbps	Front Side	4182	22.21	23.00	1.199	0.134	0.161
39#	Band V/RMC 12.2Kbps	Back Side	4182	22.21	23.00	1.199	0.171	0.205

> LTE QPSK Body-worn SAR

Plot No.	Band/Mode	Test Position	CH.	Ave. Power (dBm)	Tune-up Limit (dBm)	Tune-up Scaling Factor	Meas. SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
Full Power								
	LTE Band 2/1RB#0 20M	Front Side	18900	22.87	24.00	1.297	0.188	0.244
40#	LTE Band 2/1RB#0 20M	Back Side	18900	22.87	24.00	1.297	0.349	0.453
	LTE Band 2/50RB#0 20M	Front Side	18900	21.75	23.00	1.334	0.135	0.180
	LTE Band 2/50RB#0 20M	Back Side	18900	21.75	23.00	1.334	0.253	0.337
Full Power								
	LTE Band 5/1RB#0 10M	Front Side	20525	22.78	24.00	1.324	0.151	0.200



41#	LTE Band 5/1RB#0 10M	Back Side	20525	22.78	24.00	1.324	0.209	0.277
	LTE Band 5/25RB#0 10M	Front Side	20525	21.70	23.00	1.349	0.106	0.143
	LTE Band 5/25RB#0 10M	Back Side	20525	21.70	23.00	1.349	0.113	0.152
Full Power								
	LTE Band 7/1RB#0 20M	Front Side	21100	22.98	24.00	1.265	0.373	0.472
42#	LTE Band 7/1RB#0 20M	Back Side	21100	22.98	24.00	1.265	0.533	0.674
	LTE Band 7/50RB#0 20M	Front Side	21100	22.03	23.00	1.250	0.226	0.283
	LTE Band 7/50RB#0 20M	Back Side	21100	22.03	23.00	1.250	0.419	0.524
Full Power								
	LTE Band 12/1RB#0 10M	Front Side	23095	22.89	24.00	1.291	0.140	0.181
43#	LTE Band 12/1RB#0 10M	Back Side	23095	22.89	24.00	1.291	0.173	0.223
	LTE Band 12/25RB#0 10M	Front Side	23095	21.84	23.00	1.306	0.098	0.128
	LTE Band 12/25RB#0 10M	Back Side	23095	21.84	23.00	1.306	0.121	0.158
Full Power								
	LTE Band 13/1RB#0 10M	Front Side	23230	22.94	24.00	1.276	0.143	0.183
44#	LTE Band 13/1RB#0 10M	Back Side	23230	22.94	24.00	1.276	0.194	0.248
	LTE Band 13/25RB#0 10M	Front Side	23230	21.92	24.00	1.614	0.100	0.161
	LTE Band 13/25RB#0 10M	Back Side	23230	21.92	24.00	1.614	0.148	0.239
Full Power								
	LTE Band 66/1RB#0 20M	Front Side	132322	22.79	24.00	1.321	0.248	0.328
45#	LTE Band 66/1RB#0 20M	Back Side	132322	22.79	24.00	1.321	0.480	0.634
	LTE Band 66/50RB#0 20M	Front Side	132322	21.58	23.00	1.387	0.144	0.200
	LTE Band 66/50RB#0 20M	Back Side	132322	21.58	23.00	1.387	0.259	0.359
Full Power								
	LTE Band 71/1RB#0 20M	Front Side	133322	22.82	24.00	1.312	0.172	0.226
46#	LTE Band 71/1RB#0 20M	Back Side	133322	22.82	24.00	1.312	0.175	0.230
	LTE Band 71/50RB#0 20M	Front Side	133322	21.71	23.00	1.346	0.120	0.162
	LTE Band 71/50RB#0 20M	Back Side	133322	21.71	23.00	1.346	0.151	0.203

➤ **WLAN/BT Body-worn SAR**

Plot No.	Band/Mode	Test Position	CH.	Ave. Power (dBm)	Tune-up Limit (dBm)	Tune-up Scaling Factor	Meas. SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
Full Power								
	WLAN2.4GHz/802.11b	Front Side	1	17.47	18.00	1.130	0.056	0.064
47#	WLAN2.4GHz/802.11b	Back Side	1	17.47	18.00	1.130	0.077	0.087
Full Power								
	WLAN5.2GHz/802.11n40	Front Side	38	16.04	16.50	1.112	0.104	0.123
48#	WLAN5.2GHz/802.11n40	Back Side	38	16.04	16.50	1.112	0.113	0.133



Full Power								
	WLAN5.3GHz/802.11a	Front Side	52	16.08	16.50	1.102	0.110	0.125
49#	WLAN5.3GHz/802.11a	Back Side	52	16.08	16.50	1.102	0.140	0.159
Full Power								
	WLAN5.5GHz/802.11n20	Front Side	100	16.06	16.50	1.107	0.110	0.126
50#	WLAN5.5GHz/802.11n20	Back Side	100	16.06	16.50	1.107	0.148	0.169
Full Power								
	WLAN5.8GHz/802.11ac40	Front Side	151	15.74	16.50	1.191	0.137	0.173
51#	WLAN5.8GHz/802.11ac40	Back Side	151	15.74	16.50	1.191	0.249	0.315
Full Power								
	Bluetooth/DH5	Front Side	78	9.36	9.50	1.033	0.010	0.011
52#	Bluetooth/DH5	Back Side	78	9.36	9.50	1.033	0.028	0.031

Note:

1. The 2.4G WLAN reported 1g SAR (W/kg) should be scaled with the duty cycle scaling factor 1.004, 1.062 for WLAN 5.2GHz 802.11n40, 1.029 for WLAN 5.3GHz 802.11a, 1.031 for WLAN 5.5GHz 802.11a, and 1.061 for WLAN 5.8GHz 802.11ac40.
2. According to 2016 Oct. TCB workshop for Bluetooth SAR consideration and the theoretical duty cycle is 83.3%, therefore the actual duty cycle will be scaled up to the theoretical value of Bluetooth reported SAR calculation. The duty cycle of Bluetooth is 76.91 %, Therefore the duty cycle scaling factor 1.083 should be used to calculating the reported SAR.



17.5. Extremity SAR Assessment

➤ General Guidance

1. According to KDB 648474 D04v01r03 The UMPC mini-tablet procedures must also be applied to test the SAR of all surfaces and edges with an antenna located at ≤ 25 mm from that surface or edge, in direct contact with a flat phantom, for 10-g extremity SAR according to the body-equivalent tissue dielectric parameters in KDB Publication 865664 D01 to address interactive hand use exposure conditions.
2. When hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg; however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold per KDB 648474 D04v01r03.
3. According to the user manual, the EUT diagonal size is greater than 16cm, therefore the 0mm extremity SAR of WLAN 5GHz is required.

➤ Extremity SAR

Plot No.	Band/Mode	Test Position	CH.	Ave. Power (dBm)	Tune-up Limit (dBm)	Tune-up Scaling Factor	Meas. SAR _{10g} (W/kg)	Reported SAR _{10g} (W/kg)
Full Power								
	GPRS 1900(4 TX slots)	Front Side	512	25.49	26.30	1.205	0.463	0.558
53#	GPRS 1900(4 TX slots)	Back Side	512	25.49	26.30	1.205	0.721	0.869
	GPRS 1900(4 TX slots)	Left Side	512	25.49	26.30	1.205	0.311	0.375
	GPRS 1900(4 TX slots)	Top Side	512	25.49	26.30	1.205	0.713	0.859
Full Power								
	Band II/RMC 12.2Kbps	Front Side	9400	22.77	23.70	1.239	0.665	0.824
	Band II/RMC 12.2Kbps	Back Side	9400	22.77	23.70	1.239	0.971	1.203
	Band II/RMC 12.2Kbps	Left Side	9400	22.77	23.70	1.239	0.459	0.569
	Band II/RMC 12.2Kbps	Top Side	9400	22.77	23.70	1.239	1.880	2.329
	Band II/RMC 12.2Kbps	Top Side	9262	22.70	23.70	1.259	1.830	2.304
54#	Band II/RMC 12.2Kbps	Top Side	9538	22.58	23.70	1.294	1.930	2.498
Full Power								
	Band IV/RMC 12.2Kbps	Front Side	1413	22.85	23.70	1.216	0.525	0.638
55#	Band IV/RMC 12.2Kbps	Back Side	1413	22.85	23.70	1.216	0.552	0.671
	Band IV/RMC 12.2Kbps	Left Side	1413	22.85	23.70	1.216	0.261	0.317
	Band IV/RMC 12.2Kbps	Top Side	1413	22.85	23.70	1.216	0.519	0.631
	Band IV/RMC 12.2Kbps	Back Side	1312	22.82	23.70	1.225	0.543	0.665
	Band IV/RMC 12.2Kbps	Back Side	1513	22.74	23.70	1.247	0.428	0.534
Reduced Power Level 3								



	LTE Band 2/1RB#0 20M	Front Side	18900	22.87	24.00	1.297	0.811	1.052
56#	LTE Band 2/1RB#0 20M	Back Side	18900	22.87	24.00	1.297	1.080	1.401
	LTE Band 2/1RB#0 20M	Left Side	18900	22.87	24.00	1.297	0.541	0.702
	LTE Band 2/1RB#0 20M	Top Side	18900	22.87	24.00	1.297	1.050	1.362
	LTE Band 2/50RB#0 20M	Front Side	18900	21.75	23.00	1.334	0.568	0.757
	LTE Band 2/50RB#0 20M	Back Side	18900	21.75	23.00	1.334	0.756	1.008
	LTE Band 2/50RB#0 20M	Left Side	18900	21.75	23.00	1.334	0.379	0.505
	LTE Band 2/50RB#0 20M	Top Side	18900	21.75	23.00	1.334	0.875	1.167
Reduced Power Level 3								
	LTE Band 7/1RB#0 20M	Front Side	21100	15.98	17.00	1.265	0.710	0.898
	LTE Band 7/1RB#0 20M	Back Side	21100	15.98	17.00	1.265	0.950	1.201
	LTE Band 7/1RB#0 20M	Left Side	21100	15.98	17.00	1.265	0.619	0.783
57#	LTE Band 7/1RB#0 20M	Top Side	21100	15.98	17.00	1.265	1.180	1.492
	LTE Band 7/50RB#0 20M	Front Side	21100	15.03	16.00	1.250	0.540	0.675
	LTE Band 7/50RB#0 20M	Back Side	21100	15.03	16.00	1.250	0.722	0.903
	LTE Band 7/50RB#0 20M	Left Side	21100	15.03	16.00	1.250	0.512	0.640
	LTE Band 7/50RB#0 20M	Top Side	21100	15.03	16.00	1.250	0.897	1.121
Reduced Power Level 3								
	LTE Band 66/1RB#0 20M	Front Side	132322	22.79	24.00	1.321	0.740	0.978
	LTE Band 66/1RB#0 20M	Back Side	132322	22.79	24.00	1.321	0.850	1.123
	LTE Band 66/1RB#0 20M	Left Side	132322	22.79	24.00	1.321	0.421	0.556
	LTE Band 66/1RB#0 20M	Top Side	132322	22.79	24.00	1.321	0.659	0.871
	LTE Band 66/1RB#0 20M	Back Side	132072	22.77	24.00	1.327	0.855	1.135
58#	LTE Band 66/1RB#0 20M	Back Side	132572	22.65	24.00	1.365	0.898	1.225
	LTE Band 66/50RB#0 20M	Front Side	132322	21.58	23.00	1.387	0.518	0.718
	LTE Band 66/50RB#0 20M	Back Side	132322	21.58	23.00	1.387	0.595	0.825
	LTE Band 66/50RB#0 20M	Left Side	132322	21.58	23.00	1.387	0.295	0.409
	LTE Band 66/50RB#0 20M	Top Side	132322	21.58	23.00	1.387	0.403	0.559
	LTE Band 66/50RB#0 20M	Back Side	132072	21.55	23.00	1.396	0.599	0.836
	LTE Band 66/50RB#0 20M	Back Side	132572	21.52	23.00	1.406	0.631	0.887
Full Power								
59#	WLAN5.3GHz/802.11a	Front Side	52	16.08	16.50	1.102	0.382	0.433
	WLAN5.3GHz/802.11a	Back Side	52	16.08	16.50	1.102	0.118	0.134
Full Power								
60#	WLAN5.5GHz/802.11n20	Front Side	100	16.06	16.50	1.107	0.436	0.497
	WLAN5.5GHz/802.11n20	Back Side	100	16.06	16.50	1.107	0.202	0.230

Note: The 5.3GHz 802.11a reported 1g SAR (W/kg) should be scaled with the duty cycle scaling factor 1.029 and 1.031 for WLAN 5.5GHz 802.11a.



17.6. Repeated SAR Assessment

➤ General Note

In accordance with published RF Exposure KDB procedure 865664 D01 SAR measurement 100 MHz to 6 GHz. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

1. Repeated measurement is not required when the original highest measured SAR is < 0.80 W/kg;
2. When the original highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
3. Perform a second repeated measurement only if the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 or when the original or repeated measurement is ≥ 1.45 W/kg (~ 10% from the 1-g SAR limit).
4. Perform a third repeated measurement only if the original, first or second repeated measurement is ≥ 1.5 W/kg and the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 .

Plot No.	Band/Mode	Test Position	CH.	Ave. Power (dBm)	Tune-up Limit (dBm)	Tune-up Scaling Factor	Meas. SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
Reduced Power Level 1								
OR.	LTE Band 7/1RB#0 20M	Right Tilt	21100	15.98	17.00	1.265	0.689	0.871
1st	LTE Band 7/1RB#0 20M	Right Tilt	21100	15.98	17.00	1.265	0.641	0.811
Reduced Power Level 2								
OR.	GPRS 1900(4 TX slots)	Back Side	661	19.55	20.30	1.189	0.822	0.977
1st	GPRS 1900(4 TX slots)	Back Side	661	19.55	20.30	1.189	0.801	0.952
Reduced Power Level 2								
OR.	LTE Band 66/1RB#0 20M	Back Side	132572	18.20	19.00	1.202	0.952	1.145
1st	LTE Band 66/1RB#0 20M	Back Side	132572	18.20	19.00	1.202	0.922	1.108



18. Simultaneous Transmission Evaluation

18.1. Simultaneous Transmission Consideration

No.	Simultaneous Transmission Consideration	Head	Body-Worn	Hotspot	Extremity
1	WWAN+WLAN 2.4GHz/5GHz	Yes	Yes	Yes	Yes
2	WWAN+Bluetooth	Yes	Yes	Yes	No

Note:

1. When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of the WWAN and WLAN transmitters. The "Portable Hotspot" feature on the handset was NOT activated, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal.
2. Simultaneous Transmission SAR evaluation is not required for BT and WLAN 2.4GHz, because the software mechanism have been incorporated to guarantee that the WLAN 2.4GHz and Bluetooth transmitters would not simultaneously operate.
3. Per KDB 447498D01v06, simultaneous transmission SAR evaluation procedures is as followed:
Step 1: If sum of 1 g SAR < 1.6 W/kg, Simultaneous SAR measurement is not required.
Step 2: If sum of 1 g SAR > 1.6 W/kg, ratio of SAR to peak separation distance for pair of transmitters calculated.
Step 3: If the ratio of SAR to peak separation distance is ≤ 0.04 , Simultaneous SAR measurement is not required.
Step 4: If the ratio of SAR to peak separation distance is > 0.04 , Simultaneous SAR measurement is required and simultaneous transmission SAR value is calculated.
(The ratio is determined by: $(SAR_1 + SAR_2) ^ 1.5 / R_i \leq 0.04$,
 R_i is the separation distance between the peak SAR locations for the antenna pair in mm.



18.2. Simultaneous Transmission Analysis

➤ Head Simultaneous Transmission for WWAN + WLAN 2.4GHz/5GHz

WWAN Band	Exposure Position	1	2	3	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)
		WWAN	2.4GHz WLAN	5GHz WLAN		
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)		
GSM850	Right Cheek	0.271	0.227	0.303	0.498	0.574
	Right Tilt	0.025	0.252	0.396	0.277	0.421
	Left Cheek	0.103	0.440	0.777	0.543	0.880
	Left Tilt	0.014	0.272	0.521	0.286	0.535
GSM1900	Right Cheek	0.635	0.227	0.303	0.862	0.938
	Right Tilt	0.119	0.252	0.396	0.371	0.515
	Left Cheek	0.231	0.440	0.777	0.671	1.008
	Left Tilt	0.067	0.272	0.521	0.339	0.588
WCDMA II	Right Cheek	0.585	0.227	0.303	0.812	0.888
	Right Tilt	0.159	0.252	0.396	0.411	0.555
	Left Cheek	0.287	0.440	0.777	0.727	1.064
	Left Tilt	0.094	0.272	0.521	0.366	0.615
WCDMA IV	Right Cheek	0.342	0.227	0.303	0.569	0.645
	Right Tilt	0.098	0.252	0.396	0.350	0.494
	Left Cheek	0.129	0.440	0.777	0.569	0.906
	Left Tilt	0.045	0.272	0.521	0.317	0.566
WCDMA V	Right Cheek	0.212	0.227	0.303	0.439	0.515
	Right Tilt	0.037	0.252	0.396	0.289	0.433
	Left Cheek	0.071	0.440	0.777	0.511	0.848
	Left Tilt	0.028	0.272	0.521	0.300	0.549
LTE Band 2	Right Cheek	0.790	0.227	0.303	1.017	1.093
	Right Tilt	0.581	0.252	0.396	0.833	0.977
	Left Cheek	0.415	0.440	0.777	0.855	1.192
	Left Tilt	0.232	0.272	0.521	0.504	0.753
LTE Band 5	Right Cheek	0.299	0.227	0.303	0.526	0.602
	Right Tilt	0.234	0.252	0.396	0.486	0.630
	Left Cheek	0.144	0.440	0.777	0.584	0.921
	Left Tilt	0.101	0.272	0.521	0.373	0.622
LTE Band 7	Right Cheek	0.549	0.227	0.303	0.776	0.852
	Right Tilt	0.871	0.252	0.396	1.123	1.267
	Left Cheek	0.454	0.440	0.777	0.894	1.231



	Left Tilt	0.610	0.272	0.521	0.882	1.131
LTE Band 12/17	Right Cheek	0.132	0.227	0.303	0.359	0.435
	Right Tilt	0.096	0.252	0.396	0.348	0.492
	Left Cheek	0.114	0.440	0.777	0.554	0.891
	Left Tilt	0.080	0.272	0.521	0.352	0.601
LTE Band 13	Right Cheek	0.249	0.227	0.303	0.476	0.552
	Right Tilt	0.226	0.252	0.396	0.478	0.622
	Left Cheek	0.161	0.440	0.777	0.601	0.938
	Left Tilt	0.108	0.272	0.521	0.380	0.629
LTE Band 66/4	Right Cheek	0.747	0.227	0.303	0.974	1.050
	Right Tilt	0.420	0.252	0.396	0.672	0.816
	Left Cheek	0.375	0.440	0.777	0.815	1.152
	Left Tilt	0.189	0.272	0.521	0.461	0.710
LTE Band 71	Right Cheek	0.173	0.227	0.303	0.400	0.476
	Right Tilt	0.126	0.252	0.396	0.378	0.522
	Left Cheek	0.094	0.440	0.777	0.534	0.871
	Left Tilt	0.054	0.272	0.521	0.326	0.575

➤ **Head Simultaneous Transmission for WWAN + Bluetooth**

WWAN Band	Exposure Position	1	2	1+2 Summed 1g SAR (W/kg)
		WWAN	Bluetooth	
		1g SAR (W/kg)	1g SAR (W/kg)	
GSM850	Right Cheek	0.271	0.048	0.319
	Right Tilt	0.025	0.056	0.081
	Left Cheek	0.103	0.130	0.233
	Left Tilt	0.014	0.114	0.128
GSM1900	Right Cheek	0.635	0.048	0.683
	Right Tilt	0.119	0.056	0.175
	Left Cheek	0.231	0.130	0.361
	Left Tilt	0.067	0.114	0.181
WCDMA II	Right Cheek	0.585	0.048	0.633
	Right Tilt	0.159	0.056	0.215
	Left Cheek	0.287	0.130	0.417
	Left Tilt	0.094	0.114	0.208
WCDMA IV	Right Cheek	0.342	0.048	0.390
	Right Tilt	0.098	0.056	0.154
	Left Cheek	0.129	0.130	0.259



	Left Tilt	0.045	0.114	0.159
WCDMA V	Right Cheek	0.212	0.048	0.260
	Right Tilt	0.037	0.056	0.093
	Left Cheek	0.071	0.130	0.201
	Left Tilt	0.028	0.114	0.142
LTE Band 2	Right Cheek	0.790	0.048	0.838
	Right Tilt	0.581	0.056	0.637
	Left Cheek	0.415	0.130	0.545
	Left Tilt	0.232	0.114	0.346
LTE Band 5	Right Cheek	0.299	0.048	0.347
	Right Tilt	0.234	0.056	0.290
	Left Cheek	0.144	0.130	0.274
	Left Tilt	0.101	0.114	0.215
LTE Band 7	Right Cheek	0.549	0.048	0.597
	Right Tilt	0.871	0.056	0.927
	Left Cheek	0.454	0.130	0.584
	Left Tilt	0.610	0.114	0.724
LTE Band 12/17	Right Cheek	0.132	0.048	0.180
	Right Tilt	0.096	0.056	0.152
	Left Cheek	0.114	0.130	0.244
	Left Tilt	0.080	0.114	0.194
LTE Band 13	Right Cheek	0.249	0.048	0.297
	Right Tilt	0.226	0.056	0.282
	Left Cheek	0.161	0.130	0.291
	Left Tilt	0.108	0.114	0.222
LTE Band 66/4	Right Cheek	0.747	0.048	0.795
	Right Tilt	0.420	0.056	0.476
	Left Cheek	0.375	0.130	0.505
	Left Tilt	0.189	0.114	0.303
LTE Band 71	Right Cheek	0.173	0.048	0.221
	Right Tilt	0.126	0.056	0.182
	Left Cheek	0.094	0.130	0.224
	Left Tilt	0.054	0.114	0.168



➤ Hotspot Simultaneous Transmission for WWAN + WLAN 2.4GHz/5GHz

WWAN Band	Exposure Position	1	2	3	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)
		WWAN	2.4GHz WLAN	5GHz WLAN		
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)		
GSM850	Front Side	0.454	0.128	0.236	0.582	0.690
	Back Side	0.709	0.166	0.379	0.875	1.088
	Left Side	0.093	/	/	0.093	0.093
	Right Side	0.089	0.084	0.099	0.173	0.188
	Top Side	/	0.119	0.412	0.119	0.412
	Bottom Side	0.462	/	/	0.462	0.462
GSM1900	Front Side	0.404	0.128	0.236	0.538	0.646
	Back Side	0.977	0.166	0.379	1.143	1.356
	Left Side	0.223	/	/	0.227	0.227
	Right Side	/	0.084	0.099	0.084	0.099
	Top Side	0.372	0.119	0.412	0.496	0.789
	Bottom Side	/	/	/	0.000	0.000
WCDMA II	Front Side	0.600	0.128	0.236	0.728	0.836
	Back Side	0.638	0.166	0.379	0.804	1.017
	Left Side	0.435	/	/	0.435	0.435
	Right Side	/	0.084	0.099	0.084	0.099
	Top Side	0.500	0.119	0.412	0.619	0.912
	Bottom Side	/	/	/	0.000	0.000
WCDMA IV	Front Side	0.217	0.128	0.236	0.345	0.453
	Back Side	0.370	0.166	0.379	0.536	0.749
	Left Side	0.107	/	/	0.107	0.107
	Right Side	/	0.084	0.099	0.084	0.099
	Top Side	0.309	0.119	0.412	0.428	0.721
	Bottom Side	/	/	/	0.000	0.000
WCDMA V	Front Side	0.248	0.128	0.236	0.376	0.484
	Back Side	0.432	0.166	0.379	0.598	0.811
	Left Side	0.020	/	/	0.020	0.020
	Right Side	0.066	0.084	0.099	0.150	0.165
	Top Side	/	0.119	0.412	0.119	0.412
	Bottom Side	0.277	/	/	0.277	0.277
LTE Band 2	Front Side	0.595	0.128	0.236	0.723	0.831
	Back Side	0.803	0.166	0.379	0.969	1.182
	Left Side	0.097	/	/	0.097	0.097



	Right Side	/	0.084	0.099	0.084	0.099
	Top Side	0.486	0.119	0.412	0.605	0.898
	Bottom Side	/	/	/	0.000	0.000
LTE Band 5	Front Side	0.339	0.128	0.236	0.467	0.575
	Back Side	0.450	0.166	0.379	0.616	0.829
	Left Side	0.256	/	/	0.256	0.256
	Right Side	0.371	0.084	0.099	0.455	0.470
	Top Side	/	0.119	0.412	0.119	0.412
	Bottom Side	0.429	/	/	0.429	0.429
LTE Band 7	Front Side	0.231	0.128	0.236	0.359	0.467
	Back Side	0.273	0.166	0.379	0.439	0.652
	Left Side	0.192	/	/	0.192	0.192
	Right Side	/	0.084	0.099	0.084	0.099
	Top Side	0.253	0.119	0.412	0.372	0.665
	Bottom Side	/	/	/	0.000	0.000
LTE Band 12/17	Front Side	0.181	0.128	0.236	0.309	0.417
	Back Side	0.236	0.166	0.379	0.402	0.615
	Left Side	0.099	/	/	0.099	0.099
	Right Side	0.145	0.084	0.099	0.229	0.244
	Top Side	/	0.119	0.412	0.119	0.412
	Bottom Side	0.168	/	/	0.168	0.168
LTE Band 13	Front Side	0.290	0.128	0.236	0.418	0.526
	Back Side	0.350	0.166	0.379	0.516	0.729
	Left Side	0.202	/	/	0.202	0.202
	Right Side	0.251	0.084	0.099	0.335	0.350
	Top Side	/	0.119	0.412	0.119	0.412
	Bottom Side	0.276	/	/	0.276	0.276
LTE Band 66/4	Front Side	0.705	0.128	0.236	0.833	0.941
	Back Side	1.145	0.166	0.379	1.311	1.524
	Left Side	0.133	/	/	0.133	0.133
	Right Side	/	0.084	0.099	0.084	0.099
	Top Side	0.709	0.119	0.412	0.828	1.121
	Bottom Side	/	/	/	0.000	0.000
LTE Band 71	Front Side	0.207	0.128	0.236	0.335	0.443
	Back Side	0.268	0.166	0.379	0.434	0.647
	Left Side	0.118	/	/	0.118	0.118
	Right Side	0.168	0.084	0.099	0.252	0.267
	Top Side	/	0.119	0.412	0.119	0.412



	Bottom Side	0.193	/	/	0.193	0.193
--	-------------	-------	---	---	-------	-------

➤ **Hotspot Simultaneous Transmission for WWAN + Bluetooth**

WWAN Band	Exposure Position	1	2	1+2 Summed 1g SAR (W/kg)
		WWAN	Bluetooth	
		1g SAR (W/kg)	1g SAR (W/kg)	
GSM850	Front Side	0.454	0.031	0.485
	Back Side	0.709	0.036	0.745
	Left Side	0.093	/	0.093
	Right Side	0.089	0.028	0.117
	Top Side	/	0.021	0.021
	Bottom Side	0.462	/	0.462
GSM1900	Front Side	0.404	0.031	0.441
	Back Side	0.977	0.036	1.013
	Left Side	0.223	/	0.227
	Right Side	/	0.028	0.028
	Top Side	0.372	0.021	0.398
	Bottom Side	/	/	0.000
WCDMA II	Front Side	0.600	0.031	0.631
	Back Side	0.638	0.036	0.674
	Left Side	0.435	/	0.435
	Right Side	/	0.028	0.028
	Top Side	0.500	0.021	0.521
	Bottom Side	/	/	0.000
WCDMA IV	Front Side	0.217	0.031	0.248
	Back Side	0.370	0.036	0.406
	Left Side	0.107	/	0.107
	Right Side	/	0.028	0.028
	Top Side	0.309	0.021	0.330
	Bottom Side	/	/	0.000
WCDMA V	Front Side	0.248	0.031	0.279
	Back Side	0.432	0.036	0.468
	Left Side	0.020	/	0.020
	Right Side	0.066	0.028	0.094
	Top Side	/	0.021	0.021
	Bottom Side	0.277	/	0.277
LTE Band 2	Front Side	0.595	0.031	0.626



	Back Side	0.803	0.036	0.839
	Left Side	0.097	/	0.097
	Right Side	/	0.028	0.028
	Top Side	0.486	0.021	0.507
	Bottom Side	/	/	0.000
LTE Band 5	Front Side	0.339	0.031	0.370
	Back Side	0.450	0.036	0.486
	Left Side	0.256	/	0.256
	Right Side	0.371	0.028	0.399
	Top Side	/	0.021	0.021
	Bottom Side	0.429	/	0.429
LTE Band 7	Front Side	0.231	0.031	0.262
	Back Side	0.273	0.036	0.309
	Left Side	0.192	/	0.192
	Right Side	/	0.028	0.028
	Top Side	0.253	0.021	0.274
	Bottom Side	/	/	0.000
LTE Band 12/17	Front Side	0.181	0.031	0.212
	Back Side	0.236	0.036	0.272
	Left Side	0.099	/	0.099
	Right Side	0.145	0.028	0.173
	Top Side	/	0.021	0.021
	Bottom Side	0.168	/	0.168
LTE Band 13	Front Side	0.290	0.031	0.321
	Back Side	0.350	0.036	0.386
	Left Side	0.202	/	0.202
	Right Side	0.251	0.028	0.279
	Top Side	/	0.021	0.021
	Bottom Side	0.276	/	0.276
LTE Band 66/4	Front Side	0.705	0.031	0.736
	Back Side	1.145	0.036	1.181
	Left Side	0.133	/	0.133
	Right Side	/	0.028	0.028
	Top Side	0.709	0.021	0.730
	Bottom Side	/	/	0.000
LTE Band 71	Front Side	0.207	0.031	0.238
	Back Side	0.268	0.036	0.304
	Left Side	0.118	/	0.118



	Right Side	0.168	0.028	0.196
	Top Side	/	0.021	0.021
	Bottom Side	0.193	/	0.193

➤ **Body-worn Simultaneous Transmission for WWAN + WLAN 2.4GHz/5GHz**

WWAN Band	Exposure Position	1	2	3	1+2 Summed 1g SAR (W/kg)	1+3 Summed 1g SAR (W/kg)
		WWAN	2.4GHz WLAN	5GHz WLAN		
		1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)		
GSM850	Front Side	0.237	0.064	0.125	0.301	0.362
	Back Side	0.452	0.087	0.159	0.539	0.611
GSM1900	Front Side	0.154	0.064	0.125	0.218	0.279
	Back Side	0.299	0.087	0.159	0.386	0.458
WCDMA II	Front Side	0.227	0.064	0.125	0.291	0.352
	Back Side	0.359	0.087	0.159	0.446	0.518
WCDMA IV	Front Side	0.128	0.064	0.125	0.192	0.253
	Back Side	0.200	0.087	0.159	0.287	0.359
WCDMA V	Front Side	0.161	0.064	0.125	0.225	0.286
	Back Side	0.205	0.087	0.159	0.292	0.364
LTE Band 2	Front Side	0.244	0.064	0.125	0.308	0.369
	Back Side	0.453	0.087	0.159	0.540	0.612
LTE Band 5	Front Side	0.200	0.064	0.125	0.264	0.325
	Back Side	0.277	0.087	0.159	0.364	0.436
LTE Band 7	Front Side	0.472	0.064	0.173	0.536	0.645
	Back Side	0.674	0.087	0.315	0.761	0.989
LTE Band 12/17	Front Side	0.181	0.064	0.125	0.245	0.306
	Back Side	0.223	0.087	0.159	0.310	0.382
LTE Band 13	Front Side	0.183	0.064	0.125	0.247	0.308
	Back Side	0.248	0.087	0.159	0.335	0.407
LTE Band 66/4	Front Side	0.328	0.064	0.125	0.392	0.453
	Back Side	0.634	0.087	0.159	0.721	0.793
LTE Band 71	Front Side	0.226	0.064	0.125	0.290	0.351
	Back Side	0.230	0.087	0.159	0.317	0.389



➤ **Body-worn Simultaneous Transmission for WWAN + Bluetooth**

WWAN Band	Exposure Position	1	2	1+2 Summed 1g SAR (W/kg)
		WWAN	Bluetooth	
		1g SAR (W/kg)	1g SAR (W/kg)	
GSM850	Front Side	0.237	0.060	0.297
	Back Side	0.452	0.017	0.469
GSM1900	Front Side	0.154	0.060	0.214
	Back Side	0.299	0.017	0.316
WCDMA II	Front Side	0.227	0.060	0.287
	Back Side	0.359	0.017	0.376
WCDMA IV	Front Side	0.128	0.060	0.188
	Back Side	0.200	0.017	0.217
WCDMA V	Front Side	0.161	0.060	0.221
	Back Side	0.205	0.017	0.222
LTE Band 2	Front Side	0.244	0.060	0.304
	Back Side	0.453	0.017	0.470
LTE Band 5	Front Side	0.200	0.060	0.260
	Back Side	0.277	0.017	0.294
LTE Band 7	Front Side	0.472	0.060	0.532
	Back Side	0.674	0.017	0.691
LTE Band 12/17	Front Side	0.181	0.060	0.241
	Back Side	0.223	0.017	0.240
LTE Band 13	Front Side	0.183	0.060	0.243
	Back Side	0.248	0.017	0.265
LTE Band 66/4	Front Side	0.328	0.060	0.388
	Back Side	0.634	0.017	0.651
LTE Band 71	Front Side	0.226	0.060	0.286
	Back Side	0.230	0.017	0.247



➤ **Extremity Simultaneous Transmission for WWAN + WLAN 5GHz**

WWAN Band	Exposure Position	1	2	1+2 Summed 10g SAR (W/kg)
		WWAN	5GHz WLAN	
		10g SAR (W/kg)	10g SAR (W/kg)	
GSM1900	Front Side	0.558	0.497	1.055
	Back Side	0.869	0.230	1.099
	Left Side	0.375	/	0.375
	Right Side	/	/	0.000
	Top Side	0.859	/	0.859
WCDMA II	Front Side	0.824	0.497	1.321
	Back Side	1.203	0.230	1.433
	Left Side	0.569	/	0.569
	Right Side	/	/	0.000
	Top Side	2.498	/	2.498
WCDMA IV	Front Side	0.638	0.497	1.135
	Back Side	0.671	0.230	0.901
	Left Side	0.317	/	0.317
	Right Side	/	/	0.000
	Top Side	0.631	/	0.631
LTE Band 2	Front Side	1.052	0.497	1.549
	Back Side	1.401	0.230	1.631
	Left Side	0.702	/	0.702
	Right Side	/	/	0.000
	Top Side	1.362	/	1.362
LTE Band 7	Front Side	0.898	0.497	1.395
	Back Side	1.201	0.230	1.431
	Left Side	0.783	/	0.783
	Right Side	/	/	0.000
	Top Side	1.492	/	1.492
LTE Band 66/4	Front Side	0.978	0.497	1.475
	Back Side	1.225	0.230	1.455
	Left Side	0.556	/	0.556
	Right Side	/	/	0.000
	Top Side	0.871	/	0.871



19. Uncertainty Assessment

According to KDB 865664 D01 SAR measurement 100 MHz to 6GHz, when the highest measured 1-g SAR is less than 1.5 W/kg and 10-g extremity SAR less than 3.75 W/kg, the expanded SAR measurement uncertainty must be less than 30% with a confidence interval of $k=2$. When these conditions are met, extensive SAR measurement uncertainty analysis described in IEEE 1528-2013 is not required in the SAR report and submitted for equipment approval. For this device, both the 1-g SAR is less than 1.5 W/kg. Therefore the measurement uncertainty table is not required in this report.



Annex A General Information

1. Identification of the Responsible Testing Laboratory

Laboratory Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Laboratory Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China
Telephone:	+86 755 36698555
Facsimile:	+86 755 36698525

2. Identification of the Responsible Testing Location

Name:	Shenzhen Morlab Communications Technology Co., Ltd.
Address:	FL.3, Building A, FeiYang Science Park, No.8 LongChang Road, Block 67, BaoAn District, ShenZhen, GuangDong Province, P. R. China

3. Facilities and Accreditations

The FCC designation number is CN1192, the test firm registration number is 226174.

Note:

The main report is end here and the other annex (B,C,D,E,F) will be submitted separately.

***** END OF MAIN REPORT *****