

FCC SAR TEST REPORT

Product Name: Smart Phone
Trade Mark: BLU
Model No.: G95
Report Number: 25062318650SAR-1
Test Standards: FCC 47 CFR Part 2 §2.1093
ANSI/IEEE C95.1-1992
IEEE Std 1528-2013
FCC ID: YHLBLU95GC
Test Result: PASS
Date of Issue: August 5, 2025

Prepared for:

BLU Products, Inc.
8600 NW 36th Street, Suite #300 | Miami, FL 33166

Prepared by:

Shenzhen UnionTrust Quality and Technology Co., Ltd.
16/F, Block A, Building 6th, Baoneng Science and Technology Park,
Longhua Street, Longhua District, Shenzhen, China
TEL: +86-755-2823 0888
FAX: +86-755-2823 0886

Prepared by:



Curry Xue
Test Engineer

Reviewed by:



Kevin Liang
Assistant Manager

Approved by:



Billy Li
Technical Director

Date:

August 5, 2025

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-SAR-IEEE Std 1528-2013-V1.1

Version

Version No.	Date	Description
V1.0	August 5, 2025	Original Report



CONTENTS

1. GENERAL INFORMATION	5
1.1. STATEMENT OF COMPLIANCE	5
1.2. CLIENT INFORMATION	6
1.3. EUT INFORMATION	6
1.3.1. GENERAL DESCRIPTION OF EUT	6
1.3.2. DESCRIPTION OF ACCESSORIES	6
1.3.3. EUT TX FREQUENCY BANDS	7
1.3.4. WIRELESS TECHNOLOGIES	8
1.4. MAXIMUM CONDUCTED POWER	9
1.5. OTHER INFORMATION	11
1.6. TEST LOCATION	11
1.7. TEST FACILITY	11
1.8. GUIDANCE STANDARD	12
2. SPECIFIC ABSORPTION RATE (SAR)	13
2.1. INTRODUCTION	13
2.2. SAR DEFINITION	13
2.3. SAR LIMITS	13
3. SAR MEASUREMENT SYSTEM	13
3.1. SPEAG DASY SYSTEM	13
3.1.1. ROBOT	14
3.1.2. PROBE	15
3.1.3. DATA ACQUISITION ELECTRONICS (DAE)	15
3.1.4. PHANTOM	16
3.1.5. DEVICE HOLDER	17
3.1.6. SYSTEM VALIDATION DIPOLES	17
3.2. SAR SCAN PROCEDURE	18
3.2.1. SAR REFERENCE MEASUREMENT (DRIFT)	18
3.2.2. AREA SCAN	18
3.2.3. ZOOM SCAN	19
3.2.4. SAR DRIFT MEASUREMENT	19
3.3. EQUIPMENT LIST	20
3.4. MEASUREMENT UNCERTAINTY	21
3.5. TISSUE DIELECTRIC PARAMETER MEASUREMENT & SYSTEM VERIFICATION	23
3.5.1. TISSUE SIMULATING LIQUIDS	23
3.5.2. SYSTEM CHECK DESCRIPTION	25
3.5.3. TISSUE VERIFICATION	25
3.5.4. SYSTEM VERIFICATION	26
4. SAR MEASUREMENT EVALUATION	27
4.1. EUT CONFIGURATION AND SETTING	27
4.1.1. GSM CONFIGURATION AND TESTING	27
4.1.2. WCDMA CONFIGURATION AND TESTING	27
4.1.3. LTE CONFIGURATION AND TESTING	29
4.1.4. WLAN CONFIGURATION AND TESTING	31
4.2. EUT TESTING POSITION	32
4.2.1. HEAD EXPOSURE CONDITIONS	32
4.2.2. BODY-WORN ACCESSORY EXPOSURE CONDITIONS	34
4.2.3. HOTSPOT ACCESSORY EXPOSURE CONDITIONS	35
4.3. MEASURED CONDUCTED POWER RESULT	36
4.3.1. CONDUCTED POWER OF GSM BANDS	36
4.3.2. CONDUCTED POWER OF WCDMA BANDS	37
4.3.3. CONDUCTED POWER OF LTE BANDS	38
4.3.4. CONDUCTED POWER OF WLAN	73

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-SAR-IEEE Std 1528-2013-V1.1

- 4.3.5. CONDUCTED POWER OF BT75
- 4.4. NFC EXPOSURE REQUIREMENTS.....75
- 4.5. POWER REDUCTION SPECIFICATION.....76
 - 4.5.1. PROXIMITY SENSOR TRIGGERING DISTANCE76
 - 4.5.2. TRIGGERING DISTANCE FOR PERPENDICULAR DUT ORIENTATION76
 - 4.5.3. VOICE ROUTING (WHERE THE PRESENCE OF AUDIO IS EMPLOYED TO DETERMINE OPERATING STATE)76
 - 4.5.4. HOTSPOT MODE (WHERE THE PRESENCE OF HOTSPOT ON IS EMPLOYED TO DETERMINE OPERATING STATE)76
- 4.6. SAR TESTING RESULTS77
 - 4.6.1. SAR TEST REDUCTION CONSIDERATIONS.....77
 - 4.6.2. SAR RESULTS FOR HEAD EXPOSURE CONDITION80
 - 4.6.3. SAR RESULTS FOR BODY-WORN EXPOSURE CONDITION (SEPARATION DISTANCE IS 1.0 CM).....85
 - 4.6.4. SAR RESULTS FOR HOTSPOT EXPOSURE CONDITION (SEPARATION DISTANCE IS 1.0 CM)88
- 4.7. SAR MEASUREMENT VARIABILITY94
 - 4.7.1 REPEATED MEASUREMENT.....94
- 4.8. SIMULTANEOUS MULTI-BAND TRANSMISSION EVALUATION95
 - 4.8.1 SIMULTANEOUS TRANSMISSION SAR TEST EXCLUSION CONSIDERATIONS95
 - 4.8.2 SIMULTANEOUS TRANSMISSION POSSIBILITIES96
 - 4.8.3 MAX. STANDALONE SAR97
 - 4.8.4 SUM OF SAR.....97

- Appendix A. SAR Plots of System Verification
- Appendix B. SAR Plots of SAR Measurement
- Appendix C. Calibration Certificate for Probe and Dipole
- Appendix D. Photographs of EUT and Setup

1. GENERAL INFORMATION

1.1. STATEMENT OF COMPLIANCE

The maximum results of Specific Absorption Rate (SAR) found during testing for the EUT are as follows:

Equipment Class	Mode	Highest Reported Head SAR _{1g} (W/kg)	Highest Reported Body-worn SAR _{1g} (1.0 cm Gap) (W/kg)	Highest Reported Hotspot SAR _{1g} (1.0 cm Gap) (W/kg)
PCE	GSM 850	0.609	1.261	1.261
	PCS 1900	1.183	0.953	0.953
	WCDMA Band II	0.705	1.082	1.082
	WCDMA Band IV	0.723	0.963	0.963
	WCDMA Band V	0.374	0.753	0.753
	LTE Band 2	0.685	1.187	1.187
	LTE Band 5	0.294	0.706	0.706
	LTE Band 7	1.104	0.548	0.563
	LTE Band 12(17)	0.231	0.352	0.657
	LTE Band 13	0.174	0.443	0.483
	LTE Band 66(4)	1.193	1.049	1.237
DTS	2.4G WLAN	0.743	0.261	0.261
NII	5.2G WLAN	0.716	0.277	0.277
	5.3G WLAN	0.755	0.266	--
	5.6G WLAN	0.618	0.250	--
	5.8G WLAN	0.661	0.281	0.281
DSS	Bluetooth	0.614	0.229	0.229
Highest Simultaneous Transmission SAR		Head (W/kg)	Body-worn (W/kg)	Hotspot (W/kg)
PCE + DTS		1.550	1.522	1.522
PCE + NII		1.599	1.542	1.542
PCE + DSS		1.458	1.490	1.490

1.2. CLIENT INFORMATION

Applicant:	BLU Products, Inc.
Address of Applicant:	8600 NW 36th Street, Suite #300 Miami, FL 33166
Manufacturer:	BLU Products, Inc.
Address of Manufacturer:	8600 NW 36th Street, Suite #300 Miami, FL 33166

1.3. EUT INFORMATION

1.3.1. General Description of EUT

Product Name:	Smart Phone
Trade Mark:	BLU
Model No.:	G95
FCC ID:	YHLBLU95GC
DUT Stage:	Identical Prototype
IMEI Code:	Sample 1: 351177780002490, 351177780003092
Sample Received Date:	June 23, 2025
Sample Tested Date:	July 2, 2025 to July 31, 2025

1.3.2. Description of Accessories

Adapter	
Model No.:	US-BJ-1825Q
Input:	100-240 V~50/60 Hz 0.5 A
Output:	5.0V \equiv 3000 mA 15.0W OR 9.0 V \equiv 2000mA 18.0W

Cable	
Connector:	USB Cable
Cable Type:	Unshielded without ferrite
Length:	1.0 Meter

Battery	
Model No.:	C906548500P
Battery Type:	Lithium-ion Polymer Battery
Rated Voltage:	3.87 Vdc
Typical Capacity:	5000 mAh
Rated Capacity:	4900 mAh

1.3.3. EUT Tx Frequency Bands

RF Type	Band(s)	Tx Frequency Range (Unit: MHz)
GSM	GSM 850:	824.2 - 848.8
	PCS 1900:	1850.2 - 1909.8
WCDMA	WCDMA Band II:	1852.4 - 1907.6
	WCDMA Band IV:	1712.4 - 1752.6
	WCDMA Band V:	826.4 - 846.6
LTE	LTE Band 2:	1850.7 - 1909.3 (1.4M), 1851.5 - 1908.5 (3M), 1852.5 - 1907.5 (5M), 1855 - 1905 (10M), 1857.5 - 1902.5 (15M), 1860 - 1900 (20M)
	LTE Band 4:	1710.7 - 1754.3 (1.4M), 1711.5 - 1753.5 (3M), 1712.5 - 1752.5 (5M), 1715 - 1750 (10M), 1717.5 - 1747.5 (15M), 1720 - 1745 (20M)
	LTE Band 5:	824.7 - 848.3 (1.4M), 825.5 - 847.5 (3M), 826.5 - 846.5 (5M), 829 - 844 (10M)
	LTE Band 7:	2502.5 - 2567.5 (5M), 2505 - 2565 (10M), 2507.5 - 2562.5 (15M), 2510 - 2560 (20M)
	LTE Band 12:	699.7 - 715.3 (1.4M), 700.5 - 714.5 (3M), 701.5 - 713.5 (5M), 704 - 711 (10M)
	LTE Band 13:	779.5 - 784.5 (5M), 782 (10M)
	LTE Band 17:	706.5 - 713.5 (5M), 709 - 711 (10M)
	LTE Band 66:	1710.7 - 1779.3 (1.4M), 1711.5 - 1778.5 (3M), 1712.5 - 1777.5 (5M), 1715 - 1775 (10M), 1717.5 - 1772.5 (15M), 1720 - 1770 (20M)
	LTE Band 71:	665.5 - 695.5 (5M), 668 - 693 (10M), 670.5 - 690.5 (15M), 673 - 688 (20M)
WLAN	2.4 GHz:	2412 - 2462
	U-NII-1:	5180 - 5240
	U-NII-2A:	5260 - 5320
	U-NII-2C:	5500 - 5700
	U-NII-3:	5745 - 5825
Bluetooth	2.4 GHz:	2402 - 2480
NFC	13.553 - 13.567 MHz	13.56
Note: According to 201504 FCC TCB workshop RF exposure slides, for overlapping bands, only larger band was tested. <ol style="list-style-type: none"> The maximum output power, including tolerance, for the smaller band is = the larger band to qualify for the SAR test exclusion. The channel bandwidth and other operating parameters for the smaller band is fully supported by the larger band. <ul style="list-style-type: none"> ➢ Band 66 (1710 - 1780 MHz) SAR can support band 4 (1710 - 1755 MHz). ➢ Band 12 (699 - 716 MHz) SAR can support band 17 (704 - 716 MHz). 		

1.3.4. Wireless Technologies

GSM	Voice GPRS (Multi-Slot Class: 12-4UP) EDGE (Multi-Slot Class: 12-4UP)
WCDMA	RMC HSDPA HSUPA HSPA+
LTE	QPSK 16QAM 64QAM UL/DL CA VoLTE
2.4G WLAN	802.11b 802.11g 802.11n (HT20/HT40)
5G WLAN	802.11a 802.11n (HT20/HT40) 802.11ac (VHT20/VHT40/VHT80)
Bluetooth	BR+EDR LE
Others	NFC
Device Class (GSM)	B
Antenna Type	PIFA Antenna
Dynamic Antenna	Not Support
Power Reduction	Receiver on Hotspot P-Sensor
Wireless Router (Hotspot)	2.4G WLAN: Support 5.2G WLAN: Support 5.3G WLAN: Not Support 5.6G WLAN: Not Support 5.8G WLAN: Support
VOIP	Support Note: Since this device supports VOIP capability through 3rd party apps software, we have evaluated data mode for head and body-worn SAR.
Dual SIM	SIM 1: GSM + WCDMA + LTE SIM 2: GSM + WCDMA + LTE Note : This device support dual SIM but they share the same antenna. Since these two SIM are used for subscriber identification only and it is not related to RF identity, only SIM1 was used for SAR testing.

1.4. MAXIMUM CONDUCTED POWER

The maximum conducted average power including tune-up tolerance is shown as below.

➤ **GSM**

Mode	Maximum conducted average power (dBm)		
	GSM 850	PCS 1900	
		(Without Power Reduction)	(With Power Reduction) Receiver ON
GSM (GMSK, 1Tx-slot)	34.0	30.5	26.0
GPRS (GMSK, 1Tx-slot)	34.0	30.5	26.0
GPRS (GMSK, 2Tx-slot)	33.0	29.0	24.5
GPRS (GMSK, 3Tx-slot)	31.0	27.0	23.0
GPRS (GMSK, 4Tx-slot)	29.5	26.0	21.5
EDGE (8PSK, 1Tx-slot)	28.0	26.5	22.0
EDGE (8PSK, 2Tx-slot)	27.0	26.0	20.0
EDGE (8PSK, 3Tx-slot)	24.5	24.0	22.0
EDGE (8PSK, 4Tx-slot)	23.5	23.0	18.0

➤ **WCDMA**

Mode	Maximum conducted average power (dBm)		
	Without Power Reduction		
	Band II	Band IV	Band V
RMC 12.2K	23.5	24.0	23.0
HSDPA Subtest-1	22.5	22.5	23.0
HSDPA Subtest-2	22.0	22.0	22.5
HSDPA Subtest-3	22.0	22.0	22.5
HSDPA Subtest-4	22.0	22.0	22.5
HSUPA Subtest-1	21.0	21.0	21.0
HSUPA Subtest-2	20.5	20.5	21.0
HSUPA Subtest-3	21.5	21.5	22.0
HSUPA Subtest-4	20.0	20.0	20.5
HSUPA Subtest-5	21.5	21.5	22.0

Mode	Maximum conducted average power (dBm)	
	Band II With Power Reduction	Band IV With Power Reduction
	Receiver ON	Receiver ON
RMC 12.2K	17.5	17.5
HSDPA Subtest-1	16.5	16.5
HSDPA Subtest-2	16.0	16.0
HSDPA Subtest-3	16.0	16.0
HSDPA Subtest-4	16.0	16.0
HSUPA Subtest-1	15.0	14.5
HSUPA Subtest-2	14.5	14.5
HSUPA Subtest-3	15.5	15.5
HSUPA Subtest-4	14.0	14.0
HSUPA Subtest-5	15.5	15.5

➤ LTE

Band	Mode	Target Power (dBm)			
		Without Power Reduction	With Power Reduction		
			Receiver ON	Hotspot ON	Sensor ON
LTE Band 2	QPSK	24.0	17.0	N/A	N/A
	16QAM	23.0	17.0	N/A	N/A
	64QAM	22.0	16.0	N/A	N/A
LTE Band 4	QPSK	24.0	17.5	N/A	N/A
	16QAM	23.0	17.5	N/A	N/A
	64QAM	22.0	17.0	N/A	N/A
LTE Band 5	QPSK	24.5	N/A		
	16QAM	23.5	N/A		
	64QAM	22.5	N/A		
LTE Band 7	QPSK	24.0	16.0	20.5	19.0
	16QAM	23.0	16.0	20.5	19.0
	64QAM	22.0	15.0	20.5	18.0
LTE Band 12	QPSK	24.5	N/A		
	16QAM	23.5	N/A		
	64QAM	22.5	N/A		
LTE Band 13	QPSK	24.5	N/A		
	16QAM	23.5	N/A		
	64QAM	22.5	N/A		
LTE Band 17	QPSK	24.5	N/A		
	16QAM	23.5	N/A		
	64QAM	22.5	N/A		
LTE Band 66	QPSK	24.0	19.0	N/A	N/A
	16QAM	23.0	19.0	N/A	N/A
	64QAM	22.0	18.0	N/A	N/A
LTE Band 71	QPSK	25.0	N/A		
	16QAM	24.0	N/A		
	64QAM	23.0	N/A		
LTE CA_7C	QPSK	24.0	16.0	20.5	19.0
	16QAM	24.0	16.0	20.5	19.0
	64QAM	23.0	15.0	20.5	18.0

➤ 2.4GHz WLAN

Mode	Maximum Conducted Power (dBm)
802.11b	18.0
802.11g	15.5
802.11n-HT20	15.5
802.11n-HT40	14.5

➤ **5GHz WLAN**

Mode	Maximum Conducted Power (dBm)			
	U-NII-1	U-NII-2A	U-NII-2C	U-NII-3
802.11a	13.0	13.0	13.0	15.0
802.11n-HT20	13.0	13.0	13.0	15.5
802.11n-HT40	13.0	13.0	12.5	14.0
802.11ac-VHT20	13.0	12.5	12.5	13.5
802.11ac-VHT40	13.0	13.0	12.5	14.0
802.11ac-VHT80	12.5	12.5	12.5	14.0

➤ **Bluetooth**

Mode	Modulation	Maximum Conducted Power (dBm)
BR + EDR	GFSK	17.0
	$\pi/4$ -DQPSK	14.0
	8-DPSK	14.0
LE	GFSK	4.0

1.5. OTHER INFORMATION

None.

1.6. TEST LOCATION

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China
 Telephone: +86 (0) 755 2823 0888
 Fax: +86 (0) 755 2823 0886

1.7. TEST FACILITY

The test facility is recognized, certified, or accredited by the following organizations:

Shenzhen UnionTrust Quality and Technology Co., Ltd.

CNAS-Lab Code: L9069

The measuring equipment utilized to perform the tests documented in this report has been calibrated once a year or in accordance with the manufacturer's recommendations, and is traceable under the ISO/IEC 17025 to international or national standards. Equipment has been calibrated by accredited calibration laboratories.

A2LA-Lab Certificate No.: 4312.01

Shenzhen UnionTrust Quality and Technology Co., Ltd. has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

ISED Wireless Device Testing Laboratories

CAB identifier: CN0032

FCC Accredited Lab.

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Designation Number: CN1194
Test Firm Registration Number: 259480

1.8. GUIDANCE STANDARD

The tests documented in this report were performed in accordance with FCC 47 CFR Part 2 §2.1093, IEEE Std 1528-2013, ANSI/IEEE C95.1-1992, the following FCC Published RF exposure KDB procedures:

KDB 865664 D01 v01r04

KDB 865664 D02 v01r02

KDB 248227 D01 v02r02

KDB 447498 D01 v06

KDB 648474 D04 v01r03

KDB 941225 D01 v03r01

KDB 941225 D05 v02r05

KDB 941225 D05A v01r02

KDB 941225 D06 v02r01

2. SPECIFIC ABSORPTION RATE (SAR)

2.1. INTRODUCTION

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling, by appropriate techniques, to produce specific absorption rates (SARs) as averaged over the whole-body, any 1 g or any 10 g of tissue (defined as a tissue volume in the shape of a cube). All SAR values are to be averaged over any six-minute period. When portable device was used within 20 cm of the user's body, SAR evaluation of the device will be required. The SAR limit in chapter 2.3.

2.2. SAR DEFINITION

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be related to the electrical field in the tissue by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

2.3. SAR LIMITS

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

Note:

- 1) Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1 gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.
- 2) At frequencies above 6.0 GHz, SAR limits are not applicable and MPE limits for power density should be applied at 5 cm or more from the transmitting device.
- 3) The SAR limit is specified in FCC 47 CFR Part 2 §2.1093, ANSI/IEEE C95.1-1992.

3. SAR MEASUREMENT SYSTEM

3.1. SPEAG DASY SYSTEM

DASY system consists of high precision robot, probe alignment sensor, phantom, robot controller, controlled measurement server and near-field probe. The robot includes six axes that can move to the precision position of the DASY5 software defined. The DASY software can define the area that is detected by the probe. The robot is connected to controlled box. Controlled measurement server is connected to the controlled robot box. The DAE includes amplifier, signal multiplexing, AD converter, offset measurement and surface detection. It is connected to the Electro-optical coupler (ECO). The ECO performs the conversion from the optical into digital electric signal of the DAE and transfers data to the PC.

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China


Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-SAR-IEEE Std 1528-2013-V1.1

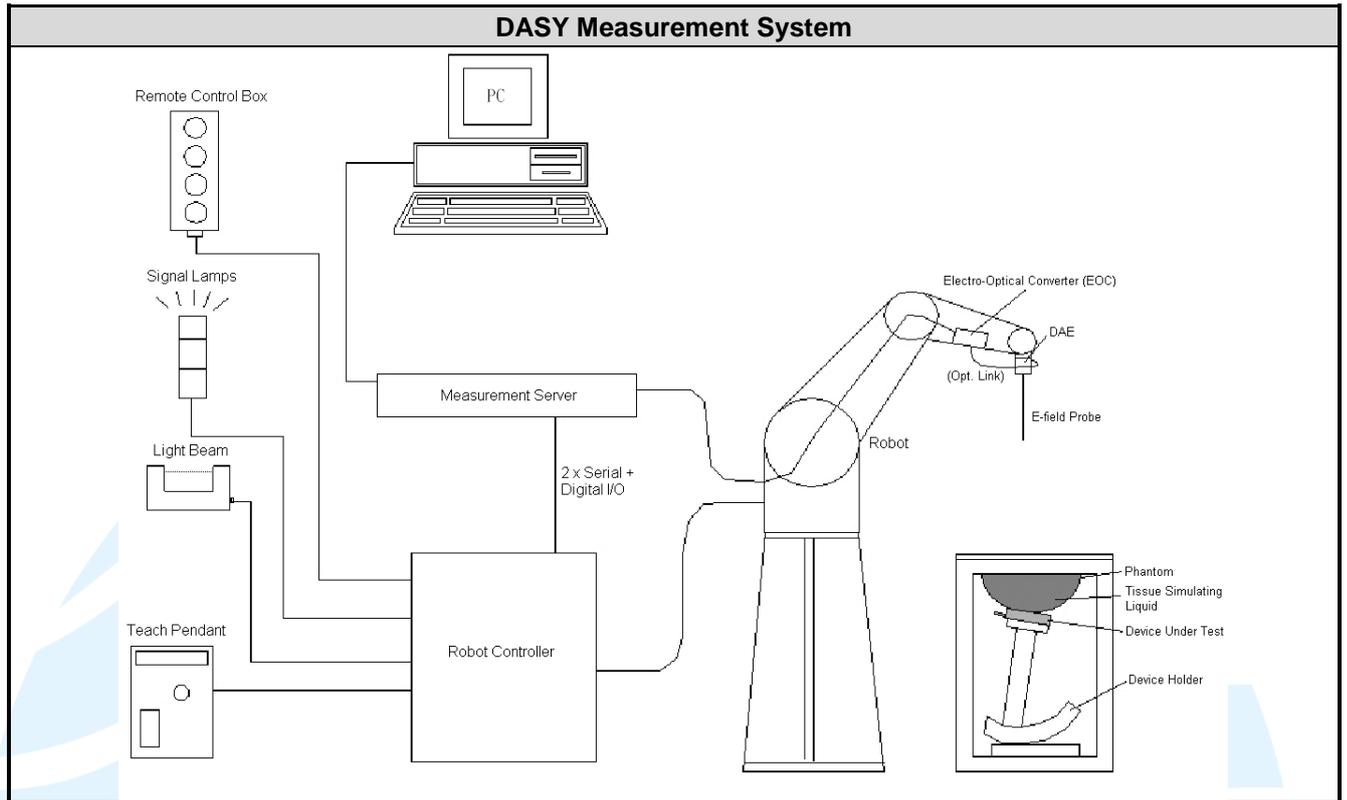

3.1.1. Robot

The DASY system uses the high precision robots from Stäubli SA (France). For the 6-axis controller system, the robot controller version (DASY4: CS7MB) from Stäubli is used. The Stäubli robot series have many features that are important for our application:

- High precision (repeatability ± 0.02 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)

3.1.2. Probe

The SAR measurement is conducted with the dosimetric probe. The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency.

Model	EX3DV4	
Construction	Symmetrical design with triangular core. Built-in shielding against static charges. PEEK enclosure material (resistant to organic solvents, e.g., DGBE).	
Frequency	10 MHz to 6 GHz Linearity: ± 0.2 dB	
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)	
Dynamic Range	10 μ W/g to 100 mW/g Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)	
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

Model	ES3DV3	
Construction	Symmetrical design with triangular core. Interleaved sensors. Built-in shielding against static charges. PEEK enclosure material (resistant to organic solvents, e.g., DGBE).	
Frequency	10 MHz to 4 GHz Linearity: ± 0.2 dB	
Directivity	± 0.2 dB in HSL (rotation around probe axis) ± 0.3 dB in tissue material (rotation normal to probe axis)	
Dynamic Range	5 μ W/g to 100 mW/g Linearity: ± 0.2 dB	
Dimensions	Overall length: 337 mm (Tip: 20 mm) Tip diameter: 3.9 mm (Body: 12 mm) Distance from probe tip to dipole centers: 2.0 mm	

3.1.3. Data Acquisition Electronics (DAE)

Model	DAE3, DAE4	
Construction	Signal amplifier, multiplexer, A/D converter and control logic. Serial optical link for communication with DASY embedded system (fully remote controlled). Two step probe touch detectors for mechanical surface detection and emergency robot stop.	
Measurement Range	-100 to +300 mV (16-bit resolution and two range settings: 4mV, 400mV)	
Input Voltage Offset	$< 5\mu$ V (with auto zero)	
Input Bias Current	< 50 fA	
Dimensions	60 x 60 x 68 mm	


3.1.4. Phantom

Model	Twin SAM	
Construction	The shell corresponds to the specifications of the Specific Anthropomorphic Mannequin (SAM) phantom defined in IEEE 1528 and IEC 62209-1. It enables the dosimetric evaluation of left and right hand phone usage as well as body mounted usage at the flat phantom region. A cover prevents evaporation of the liquid. Reference markings on the phantom allow the complete setup of all predefined phantom positions and measurement grids by teaching three points with the robot.	
Material	Vinylester, glass fiber reinforced (VE-GF)	
Shell Thickness	2 ± 0.2 mm (6 ± 0.2 mm at ear point)	
Dimensions	Length: 1000 mm Width: 500 mm Height: adjustable feet	
Filling Volume	approx. 25 liters	

Model	ELI	
Construction	Phantom for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI is fully compatible with the IEC 62209-2 standard and all known tissue simulating liquids. ELI has been optimized regarding its performance and can be integrated into our standard phantom tables. A cover prevents evaporation of the liquid. Reference markings on the phantom allow installation of the complete setup, including all predefined phantom positions and measurement grids, by teaching three points. The phantom is compatible with all SPEAG dosimetric probes and dipoles.	
Material	Vinylester, glass fiber reinforced (VE-GF)	
Shell Thickness	2.0 ± 0.2 mm (bottom plate)	
Dimensions	Major axis: 600 mm Minor axis: 400 mm	
Filling Volume	approx. 30 liters	

3.1.5. Device Holder

Model	Mounting Device	
Construction	In combination with the Twin SAM Phantom or ELI4, the Mounting Device enables the rotation of the mounted transmitter device in spherical coordinates. Rotation point is the ear opening point. Transmitter devices can be easily and accurately positioned according to IEC, IEEE, FCC or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat).	
Material	POM	

Model	Laptop Extensions Kit	
Construction	Simple but effective and easy-to-use extension for Mounting Device that facilitates the testing of larger devices according to IEC 62209-2 (e.g., laptops, cameras, etc.). It is lightweight and fits easily on the upper part of the Mounting Device in place of the phone positioner.	
Material	POM, Acrylic glass, Foam	

3.1.6. System Validation Dipoles

Model	D-Serial	
Construction	Symmetrical dipole with 1/4 balun. Enables measurement of feed point impedance with NWA. Matched for use near flat phantoms filled with tissue simulating solutions.	
Frequency	750 MHz to 5800 MHz	
Return Loss	> 20 dB	
Power Capability	> 100 W (f < 1GHz), > 40 W (f > 1GHz)	

3.2. SAR SCAN PROCEDURE

3.2.1. SAR Reference Measurement (drift)

Prior to the SAR test, local SAR shall be measured at a stationary reference point where the SAR exceeds the lower detection limit of the measurement system.

3.2.2. Area Scan

Measurement procedures for evaluating the SAR of wireless device start with a coarse measurement grid to determine the approximate location of the local peak SAR values. This is known as the area-scan procedure. All antennas and radiating structures that may contribute to the measured SAR or influence the SAR distribution must be included in the area scan. The area scan measurement resolution must enable the extrapolation algorithms of the SAR system to correctly identify the peak SAR location(s) for subsequent zoom scan measurements to correctly determine the 1-g SAR. Area scans are performed at a constant distance from the phantom surface, determined by the measurement frequencies. When a measured peak is closer than 1/2 the zoom scan volume dimension (x, y) from the edge of the area scan region, unless the entire peak and gram-averaging volume are both captured within the zoom scan volume, the area scan must be repeated by shifting and expanding the area scan region to ensure all peaks are away from the area scan boundary. The area scan resolutions specified in the table below must be applied to the SAR measurements.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 mm ± 1 mm	1/2 · δ · ln(2) mm ± 0.5 mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°
Maximum area scans spatial resolution: Δx _{Area} , Δy _{Area}	≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	

3.2.3. Zoom Scan

To evaluate the peak spatial-average SAR values with respect to 1 g or 10 g cubes, fine resolution volume scans, called zoom scans, are performed at the peak SAR locations identified during the area scan. If the cube volume within the zoom scan chosen to calculate the peak spatial-average SAR touches any boundary of the zoom-scan volume, the zoom scan shall be repeated with the center of the zoom-scan volume shifted to the new maximum SAR location. For any secondary peaks found in the area scan that are within 2 dB of the maximum peak and are not within this zoom scan, the zoom scan shall be performed for such peaks, unless the peak spatial-average SAR at the location of the maximum peak is more than 2 dB below the applicable SAR limit (i.e., 1 W/kg for a 1.6 W/kg 1 g limit, or 1.26 W/kg for a 2 W/kg 10 g limit). The zoom scan resolutions specified in the table below must be applied to the SAR measurements.

		≤ 3 GHz	> 3 GHz
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom Scan spatial resolution, normal to phantom surface	uniform grid: $\Delta Z_{Zoom}(n)$	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta Z_{Zoom}(1)$: between 1 ST two points closest to phantom surface	≤ 4 mm 3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta Z_{Zoom}(n>1)$: between subsequent points	≤ 1.5 · $\Delta Z_{Zoom}(n-1)$ mm
Minimum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see IEEE Std 1528-2013 for details. * When zoom scan is required and the reported SAR from the area scan based 1-g SAR estimation procedures of KDB Publication 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.			

3.2.4. SAR Drift Measurement

The local SAR (or conducted power) shall be measured at exactly the same location as in 3.2.1 section. The absolute value of the measurement drift (the difference between the SAR measured in 3.2.1 and 3.2.4 section) shall be recorded. The SAR drift shall be kept within ± 5%.

3.3. EQUIPMENT LIST

Equipment	Manufacturer	Model	S/N	Cal. Date	Cal. Interval
System Validation Dipole	SPEAG	D750V3	1066	Jan. 02, 2024	3 Year
System Validation Dipole	SPEAG	D835V2	4d005	Mar. 15, 2024	3 Year
System Validation Dipole	SPEAG	D1750V2	1086	Mar. 14, 2024	3 Year
System Validation Dipole	SPEAG	D1900V2	509	Mar. 14, 2024	3 Year
System Validation Dipole	SPEAG	D2450V2	883	Jan. 02, 2024	3 Year
System Validation Dipole	SPEAG	D2600V2	1082	Jan. 03, 2024	3 Year
System Validation Dipole	SPEAG	D5GHZV2	1115	Jan. 02, 2024	3 Year
Data Acquisition Electronics	SPEAG	DAE4	1557	Oct. 08, 2024	1 Year
Dosimetric E-Field Probe	SPEAG	EX3DV4	7506	Nov. 12, 2024	1 Year
Wideband Radio Communication Tester	R&S	CMW500	120932	Mar. 28,2025	1 Year
ENA Series Network Analyzer	Agilent	8753ES	US39170317	Oct. 25, 2024	1 Year
Twin Phantom	SPEAG	SAM	TP-1376	N/A	N/A
Twin Phantom	SPEAG	SAM	TP-1378	N/A	N/A
Robot controller	STAUBLI	CS7MB	F05/511KA1/A/01	N/A	N/A
Robot	STAUBLI	RX90BL	F05/511KA1/A/01	N/A	N/A
Dielectric Assessment Kit	SPEAG	DAK-3.5	1056	N/A	N/A
USB/GPIB Interface	Agilent	82357B	N10149	N/A	N/A
Signal Generator	R&S	SMB100A	103718	Mar. 28, 2025	1 Year
POWER METER	R&S	NRP	101293	Oct. 25, 2024	1 Year
Thermometer	Shanghai Gao Zhi Precision Instrument Co., Ltd.	HB6801	18022507	Oct. 29, 2024	1 Year
Dual Directional Coupler	Agilent	778D	MY52180234	Oct. 25, 2024	1 Year
Amplifier	Mini-Circuit	ZHL42	QA1252001	Mar. 28, 2025	1 Year
DC Source	Agilent	66319B	MY43000795	Oct. 25, 2024	1 Year

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-SAR-IEEE Std 1528-2013-V1.1

3.4. MEASUREMENT UNCERTAINTY

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval.

TABLE 1 EXPOSURE ASSESSMENT UNCERTAINTY FOR HANDSET SAR

Source of Uncertainty	Tolerance (± %)	Probability Distribution	Divisor	Ci (1g)	Ci (10g)	Standard Uncertainty (1g) (± %)	Standard Uncertainty (10g) (± %)	Vi Veff
Measurement System								
Probe Calibration (< 3 GHz)	7.5	N (k=2)	2	1	1	3.75	3.75	∞
Probe Calibration (> 3 GHz)	6.3	N (k=2)	2	1	1	3.15	3.15	∞
Axial Isotropy	1.2	N (k=2)	2	0.7	0.7	0.42	0.42	∞
Hemispherical Isotropy	3.2	N (k=2)	2	0.7	0.7	1.12	1.12	∞
Boundary Effects	2	Rectangular	√3	1	1	1.15	1.15	∞
Linearity	0.9	N (k=2)	2	1	1	0.45	0.45	∞
Detection Limits	0.25	Rectangular	√3	1	1	0.14	0.14	∞
Modulation Response	2.4	Rectangular	√3	1	1	1.39	1.39	∞
Readout Electronics	0.3	Normal	1	1	1	0.30	0.30	∞
Response Time	0	Rectangular	√3	1	1	0.00	0.00	∞
Integration Time	1.7	Rectangular	√3	1	1	0.98	0.98	∞
RF Ambient – Noise	3	Rectangular	√3	1	1	1.73	1.73	∞
RF Ambient – Reflections	3	Rectangular	√3	1	1	1.73	1.73	∞
Probe Positioner	0.4	Rectangular	√3	1	1	0.23	0.23	∞
Probe Positioning	6.7	Rectangular	√3	1	1	3.87	3.87	∞
Max. SAR Evaluation	4	Rectangular	√3	1	1	2.31	2.31	∞
Test Sample Related								
Device Positioning	2.3 / 2.4	Normal	1	1	1	2.30	2.40	30
Device Holder	2.8 / 2.8	Normal	1	1	1	2.80	2.80	30
Power Drift	5	Rectangular	√3	1	1	2.89	2.89	∞
Power Scaling	0	Rectangular	√3	1	1	0.00	0.00	∞
Phantom and Setup								
Phantom Uncertainty	7.9	Rectangular	√3	1	1	4.56	4.56	∞
SAR correction	1.2 / 0.97	Rectangular	√3	1	0.84	0.69	0.47	∞
Liquid Conductivity (Meas.)	2.5	Rectangular	√3	0.78	0.71	1.13	1.02	∞
Liquid Permittivity (Meas.)	2.5	Rectangular	√3	0.26	0.26	0.38	0.38	∞
Temp. unc. - Conductivity	3.4	Rectangular	√3	0.78	0.71	1.53	1.39	∞
Temp. unc. - Permittivity	0.4	Rectangular	√3	0.23	0.26	0.05	0.06	∞
Combined Standard Uncertainty (k = 1) (≤ 3 GHz)						9.64	9.62	
Combined Standard Uncertainty (k = 1) (> 3 GHz)						9.42	9.40	
Max. Expanded Uncertainty (k = 2)						19.27	19.23	

TABLE 2 SYSTEM VALIDATION Measurement uncertainty

Source of Uncertainty	Tolerance (± %)	Probability Distribution	Divisor	Ci (1g)	Ci (10g)	Standard Uncertainty (1g) (± %)	Standard Uncertainty (10g) (± %)	Vi Veff
Measurement System								
Probe Calibration (< 3 GHz)	7.5	N (k=2)	2	1	1	3.75	3.75	∞
Probe Calibration (> 3 GHz)	6.3	N (k=2)	2	1	1	3.15	3.15	∞
Axial Isotropy	1.2	N (k=2)	2	0.7	0.7	0.42	0.42	∞
Hemispherical Isotropy	3.2	N (k=2)	2	0.7	0.7	1.12	1.12	∞
Boundary Effects	2	Rectangular	√3	1	1	1.15	1.15	∞
Linearity	0.9	N (k=2)	2	1	1	0.45	0.45	∞
Detection Limits	0.25	Rectangular	√3	1	1	0.14	0.14	∞
Modulation Response	2.4	Rectangular	√3	1	1	1.39	1.39	∞
Readout Electronics	0.3	Normal	1	1	1	0.30	0.30	∞
Response Time	0	Rectangular	√3	1	1	0.00	0.00	∞
Integration Time	1.7	Rectangular	√3	1	1	0.98	0.98	∞
RF Ambient – Noise	3	Rectangular	√3	1	1	1.73	1.73	∞
RF Ambient – Reflections	3	Rectangular	√3	1	1	1.73	1.73	∞
Probe Positioner	0.4	Rectangular	√3	1	1	0.23	0.23	∞
Probe Positioning	6.7	Rectangular	√3	1	1	3.87	3.87	∞
Max. SAR Evaluation	4	Rectangular	√3	1	1	2.31	2.31	∞
Test Sample Related								
Device Positioning	2.3 / 2.4	Normal	1	1	1	2.30	2.40	30
Device Holder	2.8 / 2.8	Normal	1	1	1	2.80	2.80	30
Power Drift	5	Rectangular	√3	1	1	2.89	2.89	∞
Power Scaling	0	Rectangular	√3	1	1	0.00	0.00	∞
Phantom and Setup								
Phantom Uncertainty	7.9	Rectangular	√3	1	1	4.56	4.56	∞
SAR correction	1.2 / 0.97	Rectangular	√3	1	0.84	0.69	0.47	∞
Liquid Conductivity (Meas.)	2.5	Rectangular	√3	0.78	0.71	1.13	1.02	∞
Liquid Permittivity (Meas.)	2.5	Rectangular	√3	0.26	0.26	0.38	0.38	∞
Temp. unc. - Conductivity	3.4	Rectangular	√3	0.78	0.71	1.53	1.39	∞
Temp. unc. - Permittivity	0.4	Rectangular	√3	0.23	0.26	0.05	0.06	∞
Combined Standard Uncertainty (k = 1) (≤ 3 GHz)						9.64	9.62	
Combined Standard Uncertainty (k = 1) (> 3 GHz)						9.42	9.40	
Max. Expanded Uncertainty (k = 2)						19.27	19.23	


3.5. TISSUE DIELECTRIC PARAMETER MEASUREMENT & SYSTEM VERIFICATION

Per KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz, when the highest measured 1-g SAR within a frequency band is < 1.5 W/kg, the extensive SAR measurement uncertainty analysis described in IEEE Std 1528-2013 is not required in SAR reports submitted for equipment approval.

3.5.1. Tissue Simulating Liquids

The temperature of the tissue-equivalent medium used during measurement must also be within 18 °C to 25 °C and within ± 2 °C of the temperature when the tissue parameters are characterized. The dielectric parameters must be measured before the tissue-equivalent medium is used in a series of SAR measurements. The parameters should be re-measured after each 3 - 4 days of use; or earlier if the dielectric parameters can become out of tolerance.

The depth of tissue-equivalent liquid in a phantom must be ≥ 15.0 cm with ≤ ± 0.5 cm variation for SAR measurements ≤ 3 GHz and ≥ 10.0 cm with ≤ ± 0.5 cm variation for measurements > 3 GHz. The nominal dielectric values of the tissue simulating liquids in the phantom and the tolerance of 5% are listed in Table-3.1.

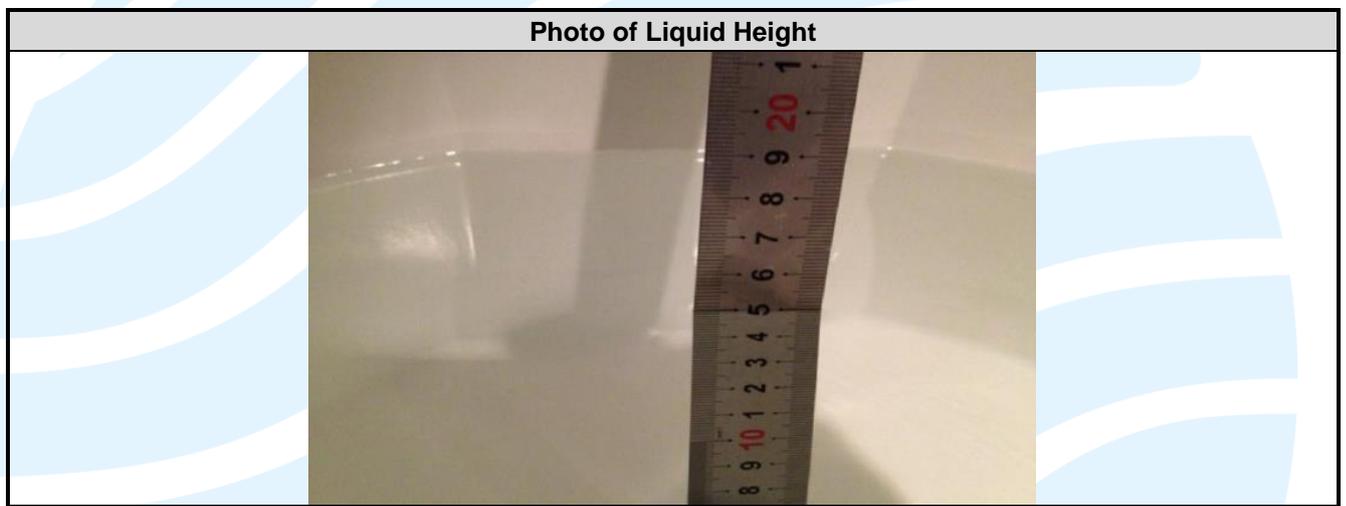

Tissue Dielectric Parameters for Head and Body				
Target Frequency (MHz)	Head		Body	
	ϵ_r	σ (S/m)	ϵ_r	σ (S/m)
750	41.9	0.89	55.5	0.96
835	41.5	0.90	55.2	0.97
900	41.5	0.97	55.0	1.05
1450	40.5	1.20	54.0	1.30
1640	40.3	1.29	53.8	1.40
1750	40.1	1.37	53.4	1.49
1800	40.0	1.40	53.3	1.52
1900	40.0	1.40	53.3	1.52
2000	40.0	1.40	53.3	1.52
2300	39.5	1.67	52.9	1.81
2450	39.2	1.80	52.7	1.95
2600	39.0	1.96	52.5	2.16
3500	37.9	2.91	51.3	3.31
5200	36.0	4.66	49.0	5.30
5300	35.9	4.76	48.9	5.42
5500	35.6	4.96	48.6	5.65
5600	35.5	5.07	48.5	5.77
5800	35.3	5.27	48.2	6.00

(ϵ_r = relative permittivity, σ = conductivity and $\rho = 1000 \text{ kg/m}^3$)

The following table gives the recipes for tissue simulating liquids.

Recipes of Tissue Simulating Liquid								
Tissue Type	Bactericide	DGBE	HEC	NaCl	Sucrose	Triton X-100	Water	Diethylene Glycol Mono-hexylether
H750	0.2	-	0.2	1.4	57.0	-	41.1	-
H835	0.1	-	1.0	1.4	57.0	-	40.5	-
H900	0.1	-	1.0	1.5	56.5	-	40.9	-
H1450	-	45.5	-	0.7	-	-	53.8	-
H1640	-	45.8	-	0.5	-	-	53.7	-
H1750	-	44.5	-	0.3	-	-	55.2	-
H1800	-	44.9	-	0.2	-	-	54.9	-
H1900	-	44.9	-	0.2	-	-	54.9	-
H2000	-	50	-	-	-	-	50	-
H2300	-	44.9	-	0.1	-	-	55.0	-
H2450	-	45.0	-	0.1	-	-	54.9	-
H2600	-	45.1	-	0.1	-	-	54.8	-
H3500	-	8.0	-	0.2	-	20.0	71.8	-
H5G	-	-	-	-	-	17.2	65.52	17.3
B750	0.2	-	0.2	0.8	48.8	-	50.0	-
B835	0.2	-	0.2	0.9	48.5	-	50.2	-
B900	0.2	-	0.2	0.9	48.2	-	50.5	-
B1450	-	34.0	-	0.3	-	-	65.7	-
B1640	-	32.5	-	0.3	-	-	67.2	-
B1750	-	29.4	-	0.4	-	-	70.2	-
B1800	-	29.5	-	0.4	-	-	70.1	-
B1900	-	29.5	-	0.3	-	-	70.2	-
B2000	-	30.0	-	0.2	-	-	69.8	-
B2300	-	31.0	-	0.1	-	-	68.9	-
B2450	-	31.4	-	0.1	-	-	68.5	-
B2600	-	31.8	-	0.1	-	-	68.1	-
B3500	-	28.8	-	0.1	-	-	71.1	-
B5G	-	-	-	-	-	10.7	78.6	10.7

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886


E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-SAR-IEEE Std 1528-2013-V1.1

3.5.2. System Check Description

The system check procedure provides a simple, fast, and reliable test method that can be performed daily or before every SAR measurement. The objective here is to ascertain that the measurement system has acceptable accuracy and repeatability. This test requires a flat phantom and a radiating source. The system verification setup is shown as below.

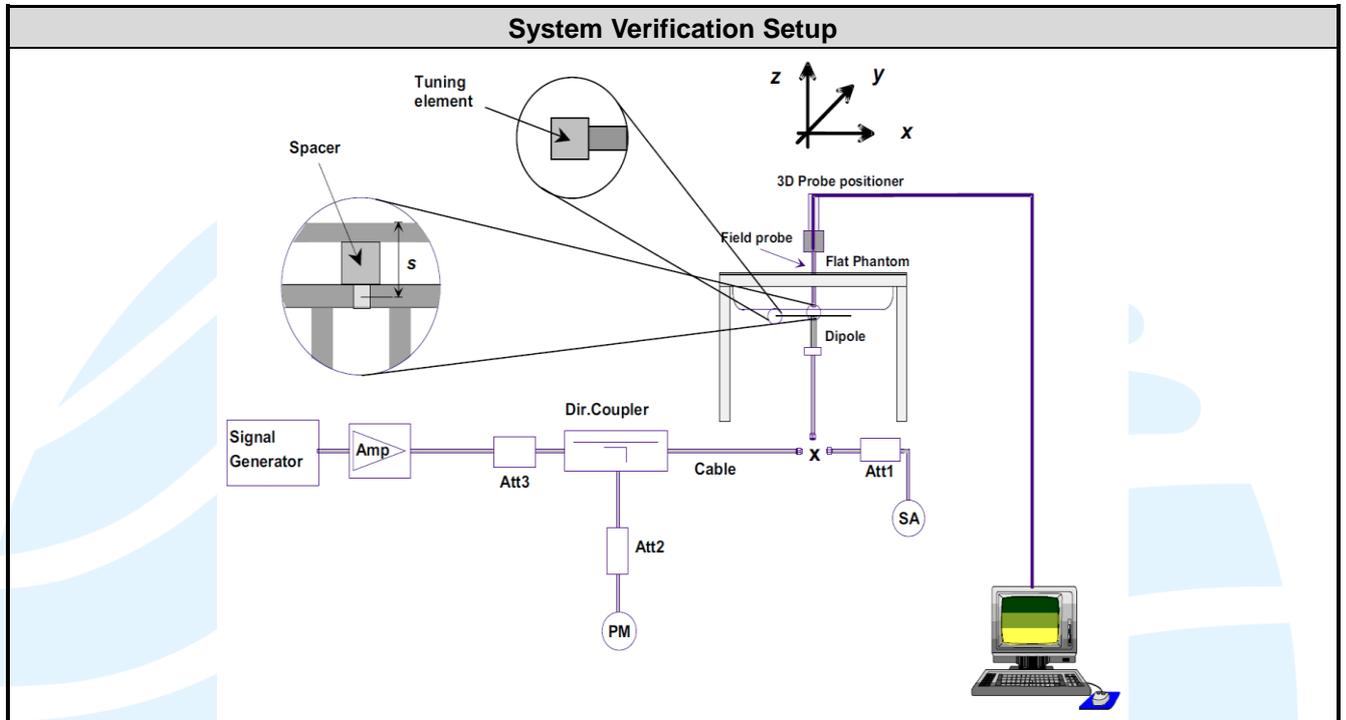

3.5.3. Tissue Verification

The measuring results for tissue simulating liquid are shown as below.

Test Date	Tissue Type	Frequency (MHz)	Liquid Temp. (°C)	Measured Conductivity (σ)	Measured Permittivity (ϵ_r)	Target Conductivity (σ)	Target Permittivity (ϵ_r)	Conductivity Deviation (%)	Permittivity Deviation (%)
Jul. 10, 2025	Head	750	21.1	0.896	40.59	0.90	42.00	-0.42	-3.36
Jul. 07, 2025	Head	835	20.9	0.919	40.55	0.90	41.50	2.13	-2.29
Jul. 16, 2025	Head	1750	21.5	1.364	40.37	1.37	40.10	-0.44	0.67
Jul. 15, 2025	Head	1900	21.8	1.391	40.58	1.40	40.00	-0.64	1.45
Jul. 02, 2025	Head	2450	21.0	1.743	38.17	1.80	39.20	-3.17	-2.63
Jul. 31, 2025	Head	2600	21.2	1.924	37.84	1.96	39.00	-1.84	-2.97
Jul. 05, 2025	Head	5250	21.6	4.627	37.15	4.71	35.90	-1.76	3.48
Jul. 05, 2025	Head	5600	21.6	5.016	36.48	5.07	35.50	-1.07	2.76
Jul. 04, 2025	Head	5800	21.7	5.237	36.13	5.27	35.30	-0.63	2.35

Note:

The dielectric properties of the tissue simulating liquid must be measured within 24 hours before the SAR testing and within $\pm 5\%$ of the target values. The variation of the liquid temperature must be within $\pm 2^\circ\text{C}$ during the test.

3.5.4. System Verification

The measuring result for system verification is tabulated as below.

Test Date	Tissue Type	Frequency (MHz)	1W Target SAR-1g (W/kg)	Measured SAR-1g (W/kg)	Normalized to 1W SAR-1g (W/kg)	Deviation (%)	Dipole S/N	Probe S/N	DAE S/N
Jul. 10, 2025	Head	750	8.60	2.140	8.56	-0.47	1066	7506	1557
Jul. 07, 2025	Head	835	9.61	2.390	9.56	-0.52	4d005	7506	1557
Jul. 16, 2025	Head	1750	36.80	8.890	35.56	-3.37	1086	7506	1557
Jul. 15, 2025	Head	1900	40.00	9.680	38.72	-3.20	509	7506	1557
Jul. 02, 2025	Head	2450	53.70	13.400	53.60	-0.19	883	7506	1557
Jul. 31, 2025	Head	2600	56.10	13.900	55.60	-0.89	1082	7506	1557
Jul. 05, 2025	Head	5250	78.60	8.250	82.50	4.96	1115	7506	1557
Jul. 05, 2025	Head	5600	81.90	8.710	87.10	6.35	1115	7506	1557
Jul. 04, 2025	Head	5800	78.60	8.320	83.20	5.85	1115	7506	1557

Note:

Comparing to the reference SAR value, the validation data should be within its specification of 10%. The result indicates the system check can meet the variation criterion and the plots can be referred to Appendix A of this report.

4. SAR MEASUREMENT EVALUATION

4.1. EUT CONFIGURATION AND SETTING

Connections between EUT and System Simulator

For WWAN SAR testing, the EUT was linked and controlled by base station emulator. Communication between the EUT and the emulator was established by air link. The distance between the EUT and the communicating antenna of the emulator is larger than 50 cm and the output power radiated from the emulator antenna is at least 30 dB smaller than the output power of EUT. The EUT was set from the emulator to radiate maximum output power during SAR testing.

4.1.1. GSM Configuration and Testing

GSM (GMSK: CS1) voice mode transmits with 1 time slot. GPRS (GMSK: CS1) and EDGE (GMSK: MCS1, 8PSK: MCS9) may transmit up to 4 time slots in the 8 time-slot frame according to the multislot class implemented in a device.

4.1.2. WCDMA Configuration and Testing

WCDMA Handsets Head SAR

SAR for next to the ear head exposure is measured using a 12.2 kbps RMC with TPC bits configured to all “1’s”. The 3G SAR test reduction procedure is applied to AMR configurations with 12.2 kbps RMC as the primary mode.

WCDMA Handsets Body-worn SAR

SAR for body-worn configurations is measured using a 12.2 kbps RMC with TPC bits configured to all “1’s”. The 3G SAR test reduction procedure is applied to other spreading codes and multiple DPDCHn configurations supported by the handset with 12.2 kbps RMC as the primary mode.

Handsets with Release 5 HSDPA

The 3G SAR test reduction procedure is applied to HSDPA body-worn configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for HSDPA using the HSDPA body SAR procedures in the “Release 5 HSDPA Data Devices”, for the highest reported SAR body-worn exposure configuration in 12.2 kbps RMC. Handsets with both HSDPA and HSUPA are tested according to Release 6 HSPA test procedures.

Handsets with Release 6 HSUPA

The 3G SAR test reduction procedure is applied to HSPA (HSUPA/HSDPA with RMC) body-worn configurations with 12.2 kbps RMC as the primary mode. Otherwise, SAR is measured for HSPA using the HSPA body SAR procedures in the “Release 6 HSPA Data Devices”, for the highest reported body-worn exposure SAR configuration in 12.2 kbps RMC. When VOIP is applicable for next to the ear head exposure in HSPA, the 3G SAR test reduction procedure is applied to HSPA with 12.2 kbps RMC as the primary mode; otherwise, the same HSPA configuration used for body-worn measurements is tested for next to the ear head exposure.

Release 5 HSDPA Data Devices

The 3G SAR test reduction procedure is applied to body SAR with 12.2 kbps RMC as the primary mode. Otherwise, body SAR for HSDPA is measured using an FRC with H-Set 1 in Sub-test 1 and a 12.2 kbps RMC configured in Test Loop Mode 1, for the highest reported SAR configuration in 12.2 kbps RMC without HSDPA. HSDPA is configured according to the applicable UE category of a test device. The number of HS-DSCH / HS-PDSCHs, HARQ processes, minimum inter-TTI interval, transport block sizes and RV coding sequence are defined by the H-set. To maintain a consistent test configuration and stable transmission conditions, QPSK is used in the H-set for SAR testing. HS-DPCCH should be configured with a CQI feedback cycle of 4 ms and a CQI repetition factor of 2 to maintain a constant rate of active CQI slots. DPCCH and DPDCH gain factors (β_c , β_d), and HS-DPCCH power offset parameters (Δ_{ACK} , Δ_{NACK} , Δ_{CQI}) are set according to values indicated in below. The CQI value is determined by the UE category, transport block size, number of HS-PDSCHs and modulation used in the H-set.

Sub-test	β_c	β_d	β_d (SF)	β_c / β_d	$\beta_{hs}^{(1)}$	CM (dB) ⁽²⁾	MPR
1	2 / 15	15 / 15	64	2 / 15	4 / 15	0.0	0

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-SAR-IEEE Std 1528-2013-V1.1

2	12 / 15 ⁽³⁾	15 / 15 ⁽³⁾	64	12 / 15 ⁽³⁾	24 / 15	1.0	0
3	15 / 15	8 / 15	64	15 / 8	30 / 15	1.5	0.5
4	15 / 15	4 / 15	64	15 / 4	30 / 15	1.5	0.5

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs} / \beta_c = 30 / 15 \Leftrightarrow \beta_{hs} = 30 / 15 * \beta_c$.
 Note 2: $CM = 1$ for $\beta_c / \beta_d = 12 / 15$, $\beta_{hs} / \beta_c = 24 / 15$.
 Note 3: For subtest 2 the β_c / β_d ratio of 12 / 15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11 / 15$ and $\beta_d = 15 / 15$.

Release 6 HSPA Data Devices

The 3G SAR test reduction procedure is applied to body SAR with 12.2 kbps RMC as the primary mode. Otherwise, body SAR for HSPA is measured with E-DCH Sub-test 5, using H-Set 1 and QPSK for FRC and a 12.2 kbps RMC configured in Test Loop Mode 1 and power control algorithm 2, according to the highest reported body SAR configuration in 12.2 kbps RMC without HSPA. When VOIP applies to head exposure, the 3G SAR test reduction procedure is applied with 12.2 kbps RMC as the primary mode. Otherwise, the same HSPA configuration used for body SAR measurements are applied to head exposure testing. Due to inner loop power control requirements in HSPA, a communication test set is required for output power and SAR tests. The 12.2 kbps RMC, FRC H-set 1 and E-DCH configurations for HSPA are configured according to the β values indicated in below.

Sub-test	β_c	β_d	β_d (SF)	β_c / β_d	β_{hs} ⁽¹⁾	β_{ec}	β_{ed}	β_{ed} (SF)	β_{ed} (codes)	CM ⁽²⁾ (dB)	MPR (dB)	AG ⁽⁴⁾ Index	E-TFCI
1	11 / 15 ⁽³⁾	15 / 15 ⁽³⁾	64	11 / 15 ⁽³⁾	22 / 15	209 / 225	1039 / 225	4	1	1.0	0.0	20	75
2	6 / 15	15 / 15	64	6 / 15	12 / 15	12 / 15	94 / 75	4	1	3.0	2.0	12	67
3	15 / 15	9 / 15	64	15 / 9	30 / 15	30 / 15	$\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$	4	2	2.0	1.0	15	92
4	2 / 15	15 / 15	64	2 / 15	4 / 15	2 / 15	56 / 75	4	1	3.0	2.0	17	71
5	15 / 15 ⁽⁴⁾	15 / 15 ⁽⁴⁾	64	15 / 15 ⁽⁴⁾	30 / 15	24 / 15	134 / 15	4	1	1.0	0.0	21	81

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 8 \Leftrightarrow A_{hs} = \beta_{hs} / \beta_c = 30 / 15 \Leftrightarrow \beta_{hs} = 30 / 15 * \beta_c$.
 Note 2: $CM = 1$ for $\beta_c / \beta_d = 12 / 15$, $\beta_{hs} / \beta_c = 24 / 15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.
 Note 3: For subtest 1 the β_c / β_d ratio of 11 / 15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10 / 15$ and $\beta_d = 15 / 15$.
 Note 4: For subtest 5 the β_c / β_d ratio of 15 / 15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signaled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14 / 15$ and $\beta_d = 15 / 15$.
 Note 5: Testing UE using E-DPDCH Physical Layer category 1 Sub-test 3 is not required according to TS 25.306 Table 5.1g.
 Note 6: β_{ed} cannot be set directly; it is set by Absolute Grant Value.

HSPA+ SAR Guidance

The 3G SAR test reduction procedure is applied to HSPA+ (uplink) with 12.2 kbps RMC as the primary mode. Otherwise, when SAR is required for Rel. 6 HSPA, SAR is required for Rel. 7 HSPA+. Power is measured for HSPA+ that supports uplink 16QAM according to configurations in Table C.11.1.4 of 3GPP TS 34.121-1 to determine SAR test reduction.

DC-HSDPA SAR Guidance

The 3G SAR test reduction procedure is applied to DC-HSDPA with 12.2 kbps RMC as the primary mode. Otherwise, when SAR is required for Rel. 5 HSDPA, SAR is required for Rel. 8 DC-HSDPA. Power is measured for DC-HSDPA according to the H-Set 12, FRC configuration in Table C.8.1.12 of 3GPP TS 34.121-1 to determine SAR test reduction. A primary and a secondary serving HS-DSCH Cell are required to perform the power measurement and for the results to be acceptable.

4.1.3. LTE Configuration and Testing


UE power class is category 3. The LTE maximum power reduction (MPR) in accordance with 3GPP TS 36.101 is active all times during LTE operation. The allowed MPR for the maximum output power please refer to the tune up procedure.

In addition, the device is compliant with additional maximum power reduction (A-MPR) requirements defined in 3GPP TS 36.101 section 6.2.4 that was disabled for all FCC compliance testing.

A properly configured base station simulator is used for the SAR and power measurements, so spectrum plots for each RB allocation and offset configuration are not included in the SAR report to demonstrate that the tested RB allocations have been correctly established at the maximum output power conditions.

TDD-LTE Setup Configurations

According to KDB 941225 D05, SAR testing for TDD-LTE device must be tested using a fixed periodic duty factor according to the highest transmission duty factor implemented for the device and supported by the defined 3GPP TDD-LTE configurations. The TDD-LTE of this device supports frame structure type 2 defined in 3GPP TS 36.211 section 4.2, and the frame structure configuration can be referred to below.

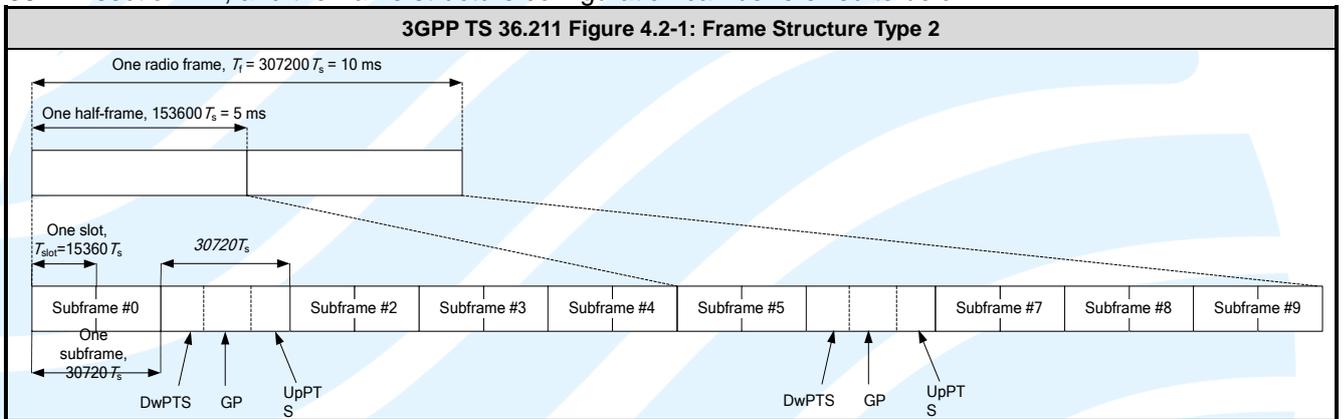

Special Subframe Configuration	Normal Cyclic Prefix in Downlink		Extended Cyclic Prefix in Downlink			
	DwPTS	UpPTS		DwPTS	UpPTS	
		Normal Cyclic Prefix in Uplink	Extended Cyclic Prefix in Uplink		Normal Cyclic Prefix in Uplink	Extended Cyclic Prefix in Uplink
0	6592·Ts	2192·Ts	2560·Ts	7680·Ts	2192·Ts	2560·Ts
1	19760·Ts			20480·Ts		
2	21952·Ts			23040·Ts		
3	24144·Ts			25600·Ts		
4	26336·Ts	4384·Ts	5120·Ts	7680·Ts	4384·Ts	5120·Ts
5	6592·Ts			20480·Ts		
6	19760·Ts			23040·Ts		
7	21952·Ts	-	-	12800·Ts	-	-
8	24144·Ts					
9	13168·Ts					

Uplink-Downlink Configurations and duty cycle												
Uplink-Downlink Configuration	Downlink-to-Uplink Switch-Point Periodicity	Subframe Number										Duty-Cycle
		0	1	2	3	4	5	6	7	8	9	
0	5 ms	D	S	U	U	U	D	S	U	U	U	63.33%
1	5 ms	D	S	U	U	D	D	S	U	U	D	43.33%
2	5 ms	D	S	U	D	D	D	S	U	D	D	23.33%
3	10 ms	D	S	U	U	U	D	D	D	D	D	31.67%
4	10 ms	D	S	U	U	D	D	D	D	D	D	21.67%
5	10 ms	D	S	U	D	D	D	D	D	D	D	11.67%
6	5 ms	D	S	U	U	U	D	S	U	U	D	53.33%

Considering the highest transmission duty cycle, TDD-LTE was tested using Uplink-Downlink Configuration 0 with 6 uplink subframe and 2 special subframe. The special subframe was set to special subframe configuration 7 using extended cyclic prefix uplink. Therefore, SAR testing for TDD-LTE was performed at the maximum output power with highest transmission duty cycle of 63.33%.

4.1.4. WLAN Configuration and Testing

In general, various vendor specific external test software and chipset based internal test modes are typically used for SAR measurement. These chipset-based test mode utilities are generally hardware and manufacturer dependent, and often include substantial flexibility to reconfigure or reprogram a device. A Wi-Fi device must be configured to transmit continuously at the required data rate, channel bandwidth and signal modulation, using the highest transmission duty factor supported by the test mode tools for SAR measurement. The test frequencies established using test mode must correspond to the actual channel frequencies. When 802.11 frame gaps are accounted for in the transmission, a maximum transmission duty factor of 92 - 96% is typically achievable in most test mode configurations. A minimum transmission duty factor of 85% is required to avoid certain hardware and device implementation issues related to wide range SAR scaling. In addition, a periodic transmission duty factor is required for current generation SAR systems to measure SAR correctly. The reported SAR must be scaled to 100% transmission duty factor to determine compliance at the maximum tune-up tolerance limit.

According to KDB 248227 D01, this device has installed WLAN engineering testing software which can provide continuous transmitting RF signal. During WLAN SAR testing, this device was operated to transmit continuously at the maximum transmission duty with specified transmission mode, operating frequency, lowest data rate, and maximum output power.

Initial Test Configuration

An initial test configuration is determined for OFDM transmission modes in 2.4 GHz and 5 GHz bands according to the channel bandwidth, modulation and data rate combination(s) with the highest maximum output power specified for production units in each standalone and aggregated frequency band. When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel in the initial test configuration, for each frequency band.

Subsequent Test Configuration

SAR measurement requirements for the remaining 802.11 transmission mode configurations that have not been tested in the initial test configuration are determined separately for each standalone and aggregated frequency band, in each exposure condition, according to the maximum output power specified for production units.

Additional power measurements may be required to determine if SAR measurements are required for subsequent highest output power channels in a subsequent test configuration. When the highest reported SAR for the initial test configuration according to the initial test position or fixed exposure position requirements, is adjusted by the ratio of the subsequent test configuration to initial test configuration specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg, SAR is not required for that subsequent test configuration.

SAR Test Configuration and Channel Selection

When multiple channel bandwidth configurations in a frequency band have the same specified maximum output power, the initial test configuration is using largest channel bandwidth, lowest order modulation, lowest data rate, and lowest order 802.11 mode (i.e., 802.11a is chosen over 802.11n then 802.11ac or 802.11g is chosen over 802.11n). After an initial test configuration is determined, if multiple test channels have the same measured maximum output power, the channel chosen for SAR measurement is determined according to the following.

- 1) The channel closest to mid-band frequency is selected for SAR measurement.
- 2) For channels with equal separation from mid-band frequency; for example, high and low channels or two mid-band channels, the higher frequency (number) channel is selected for SAR measurement.



4.2. EUT TESTING POSITION

4.2.1. Head Exposure Conditions

RF Exposure Conditions	Test Position	Separation Distance	SAR test exclusion
Head	Right Cheek	0 cm	N/A
	Right Tilted		
	Left Cheek		
	Left Tilted		


Note:

- 1) Head exposure for voice mode of handset is limited to next to the ear exposure conditions.
- 2) Devices that are designed to transmit next to the ear must be tested using the SAM phantom.
- 3) Other head exposure conditions, for example, in-front-of the face, should be tested using a flat phantom according to the required published RF exposure KDB procedures.
- 4) When data mode operates in next to the ear configurations, either data alone or in conjunction with voice transmissions, SAR evaluation is required for such use conditions.
- 5) When device supports VoIP, SAR evaluation for head Exposure Conditions using the most appropriate wireless data mode configurations is required.

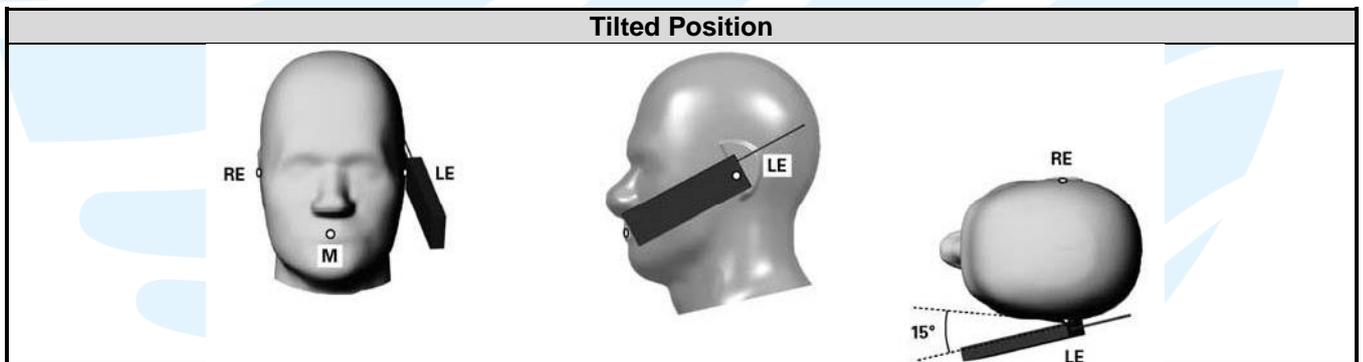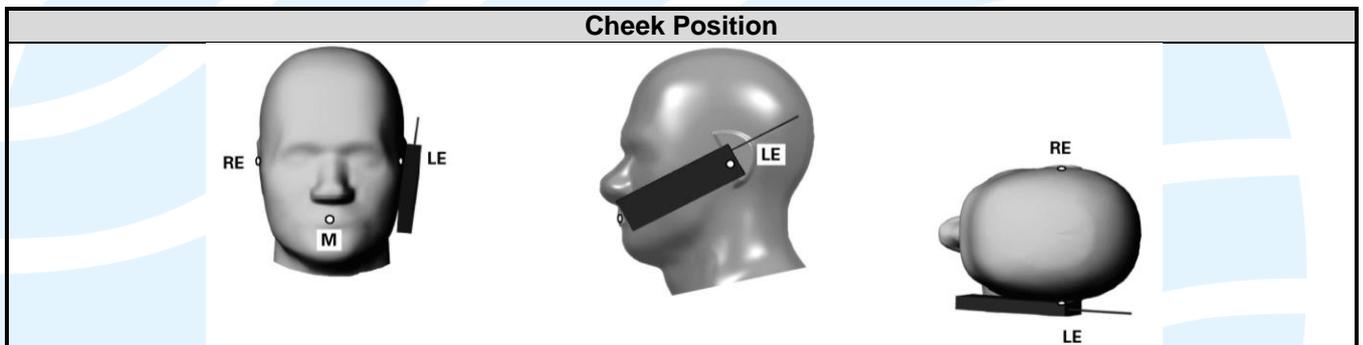

Define two imaginary lines on the handset

- 1) The vertical centerline passes through two points on the front side of the handset - the midpoint of the width w_t of the handset at the level of the acoustic output, and the midpoint of the width w_b of the bottom of the handset.
- 2) The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output. The horizontal line is also tangential to the face of the handset at point A.
- 3) The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset, especially for clamshell handsets, handsets with flip covers, and other irregularly shaped handsets.

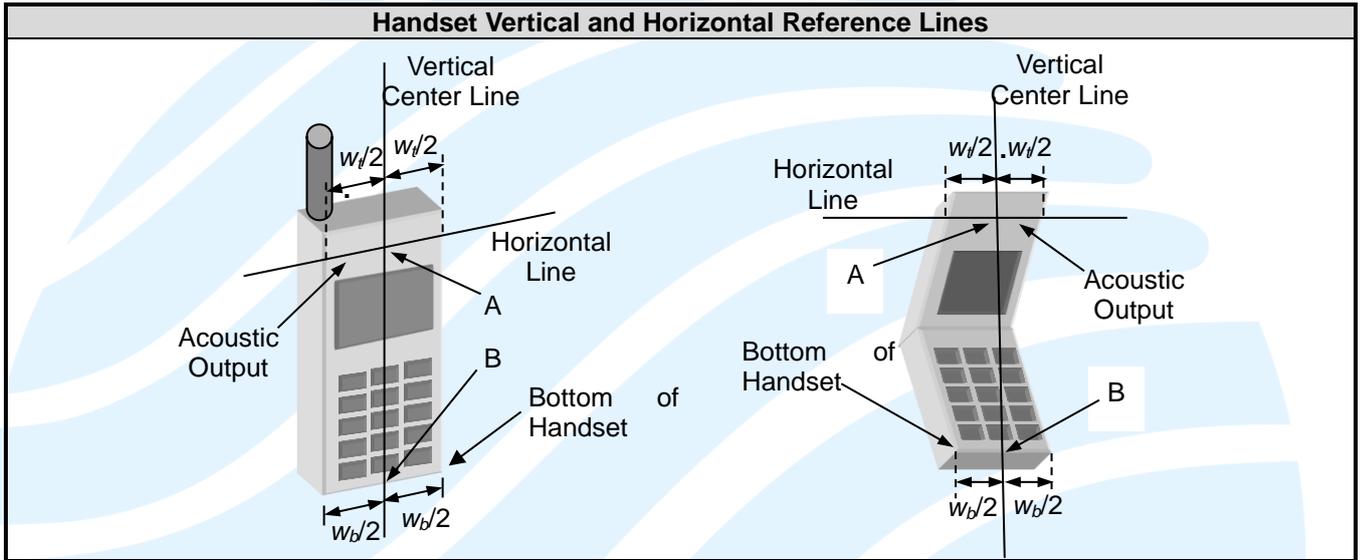


4.2.2. Body-worn Accessory Exposure Conditions

RF Exposure Conditions	Test Position	Separation Distance	SAR test exclusion
Body-worn	Front Face	0 ~ 2.5 cm	N/A
	Rear Face		

Note:

- 1) Body-worn accessories that do not contain metallic or conductive components may be tested according to worst-case exposure configurations, typically according to the smallest test separation distance required for the group of body-worn accessories with similar operating and exposure characteristics. All body-worn accessories containing metallic components are tested in conjunction with the host device.
- 2) Body-worn accessory SAR compliance is based on a single minimum test separation distance for all wireless and operating modes applicable to each body-worn accessory used by the host, and according to the relevant voice and/or data mode transmissions and operations. If a body-worn accessory supports voice only operations in its normal and expected use conditions, testing of data mode for body-worn compliance is not required.
- 3) A conservative minimum test separation distance for supporting off-the-shelf body-worn accessories that may be acquired by users of consumer handsets should be used to test for body-worn accessory SAR compliance. This distance is determined by the handset manufacturer according to the typical body-worn accessories users may acquire at the time of equipment certification, but not more than 2.5 cm, to enable users to purchase aftermarket body-worn accessories with the required minimum separation.
- 4) Devices that are designed to operate on the body of users using lanyards and straps or without requiring additional body-worn accessories must be tested for SAR compliance using a conservative minimum test separation distance ≤ 5 mm to support compliance.
- 5) When device supports VoIP, SAR evaluation for body-worn accessory Exposure Conditions using the most appropriate wireless data mode configurations is required.
- 6) Body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories.
- 7) When the reported SAR for a body-worn accessory, measured without a headset connected to the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for the body-worn accessory with a headset attached to the handset.

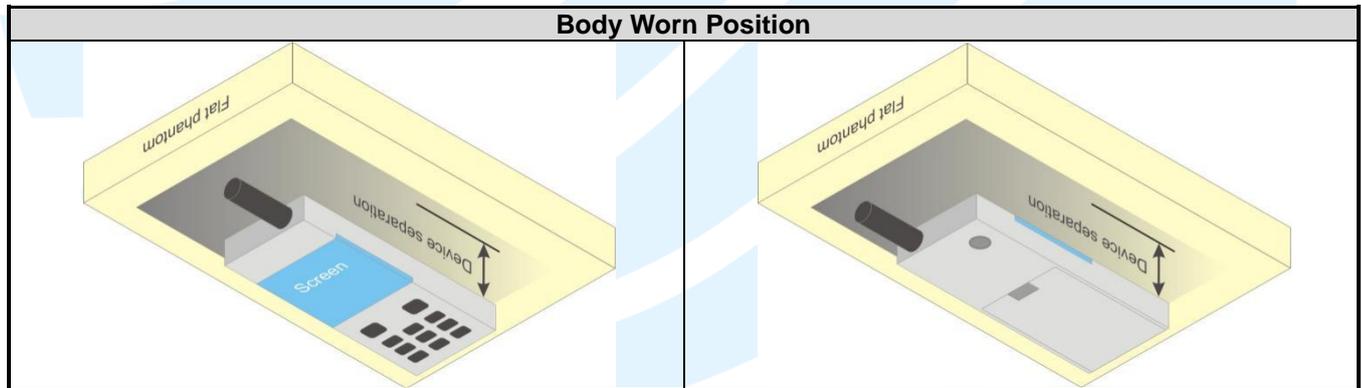


4.2.3. Hotspot Accessory Exposure Conditions

RF Exposure Conditions	Test Position	Separation Distance	SAR test exclusion
Hotspot	Front Face	1 cm	Note 2/3
	Rear Face		
	Left Side		
	Right Side		
	Top Side		
	Bottom Side		

Note:

- 1) The SAR test separation distance for hotspot mode is determined according to device form factor. When the overall length and width of a device is > 9 cm x 5 cm (~3.5" x 2"), a test separation distance of 10 mm is required for hotspot mode SAR measurements. A test separation distance of 5 mm or less is required for smaller devices. The SAR test separation distance for hotspot mode is determined according to device form factor.
- 2) Hotspot mode SAR is measured for all edges and surfaces of the device with a transmitting antenna located within 25 mm from that surface or edge.
- 3) Based on the antenna location shown on appendix D of this report, the SAR testing required for hotspot mode is listed on section 4.5.1.

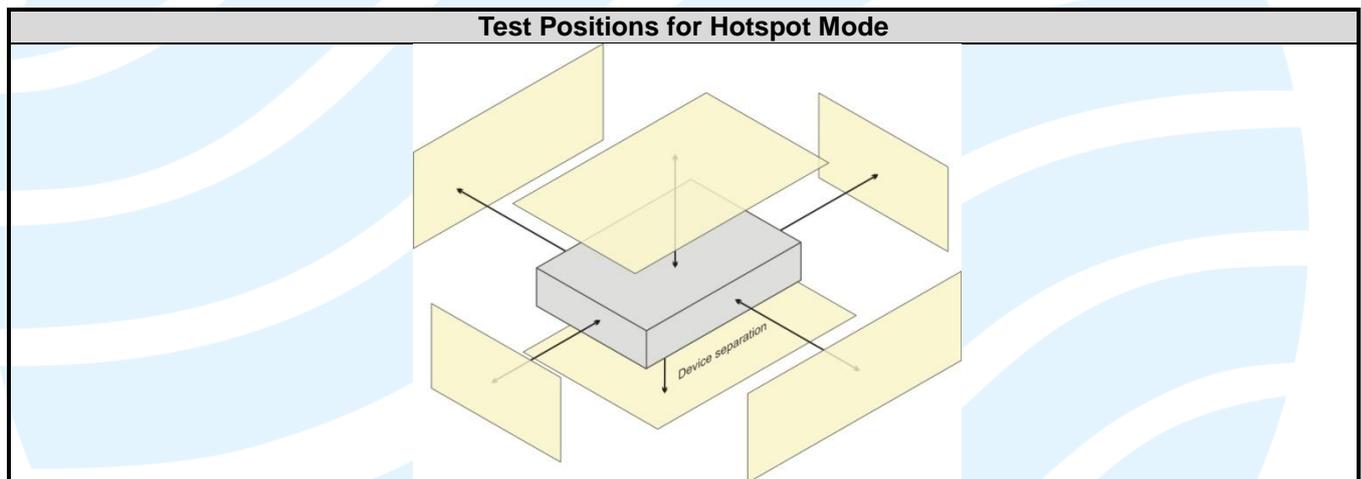

4.3. MEASURED CONDUCTED POWER RESULT

4.3.1. Conducted Power of GSM Bands

The measuring conducted average power (Unit: dBm) is shown as below.

Band	GSM 850			PCS 1900		
Channel	128	190	251	512	661	810
Frequency (MHz)	824.2	836.6	848.8	1850.2	1880.0	1909.8
Maximum Burst-Averaged Output Power						
GSM (GMSK, 1Tx-slot)	33.18	33.35	33.32	30.54	30.60	30.33
GPRS (GMSK, 1Tx-slot)	33.18	33.31	33.26	30.56	30.59	30.30
GPRS (GMSK, 2Tx-slot)	32.68	32.71	32.70	28.53	28.59	28.33
GPRS (GMSK, 3Tx-slot)	30.08	30.28	30.27	26.43	26.55	26.32
GPRS (GMSK, 4Tx-slot)	28.91	29.14	29.12	25.43	25.58	25.35
EDGE (8PSK, 1Tx-slot)	27.38	27.19	27.16	25.83	26.00	25.92
EDGE (8PSK, 2Tx-slot)	26.30	26.17	26.19	25.16	25.25	25.21
EDGE (8PSK, 3Tx-slot)	24.14	24.03	24.14	23.50	23.63	23.57
EDGE (8PSK, 4Tx-slot)	22.90	22.86	22.85	22.57	22.67	22.58
Maximum Frame-Averaged Output Power						
GSM (GMSK, 1Tx-slot)	24.18	24.35	24.32	21.54	21.60	21.33
GPRS (GMSK, 1Tx-slot)	24.18	24.31	24.26	21.56	21.59	21.30
GPRS (GMSK, 2Tx-slot)	26.68	26.71	26.70	22.53	22.59	22.33
GPRS (GMSK, 3Tx-slot)	25.82	26.02	26.01	22.17	22.29	22.06
GPRS (GMSK, 4Tx-slot)	25.91	26.14	26.12	22.43	22.58	22.35
EDGE (8PSK, 1Tx-slot)	18.38	18.19	18.16	16.83	17.00	16.92
EDGE (8PSK, 2Tx-slot)	20.30	20.17	20.19	19.16	19.25	19.21
EDGE (8PSK, 3Tx-slot)	19.88	19.77	19.88	19.24	19.37	19.31
EDGE (8PSK, 4Tx-slot)	19.90	19.86	19.85	19.57	19.67	19.58

Power Reduction: Receiver ON

Band	PCS 1900		
Channel	512	661	810
Frequency (MHz)	1850.2	1880.0	1909.8
Maximum Burst-Averaged Output Power			
GSM (GMSK, 1Tx-slot)	25.45	25.57	25.27
GPRS (GMSK, 1Tx-slot)	25.44	25.55	25.25
GPRS (GMSK, 2Tx-slot)	23.94	24.22	23.78
GPRS (GMSK, 3Tx-slot)	22.36	22.46	22.22
GPRS (GMSK, 4Tx-slot)	20.81	20.94	20.91
EDGE (8PSK, 1Tx-slot)	21.19	21.38	21.30
EDGE (8PSK, 2Tx-slot)	19.27	19.34	19.25
EDGE (8PSK, 3Tx-slot)	21.33	21.38	21.33
EDGE (8PSK, 4Tx-slot)	17.16	17.25	17.21
Maximum Frame-Averaged Output Power			
GSM (GMSK, 1Tx-slot)	16.45	16.57	16.27
GPRS (GMSK, 1Tx-slot)	16.44	16.55	16.25
GPRS (GMSK, 2Tx-slot)	17.94	18.22	17.78
GPRS (GMSK, 3Tx-slot)	18.10	18.20	17.96
GPRS (GMSK, 4Tx-slot)	17.81	17.94	17.91
EDGE (8PSK, 1Tx-slot)	12.19	12.38	12.30
EDGE (8PSK, 2Tx-slot)	13.27	13.34	13.25
EDGE (8PSK, 3Tx-slot)	17.07	17.12	17.07
EDGE (8PSK, 4Tx-slot)	14.16	14.25	14.21

Note:

- 1) SAR testing was performed on the maximum frame-averaged power mode.
- 2) The frame-averaged power is linearly proportion to the slot number configured and it is linearly scaled the maximum burst-averaged power based on time slots. The calculated method is shown as below:
- 3) Frame-averaged power = 10 x log (Burst-averaged power mW x Slot used / 8)

4.3.2. Conducted Power of WCDMA Bands

The measuring conducted average power (Unit: dBm) is shown as below.

Band	WCDMA Band II			WCDMA Band IV			WCDMA Band V			3GPP MPR (dB)
Channel	9262	9400	9538	1312	1413	1513	4132	4182	4233	
Frequency (MHz)	1852.4	1880.0	1907.6	1712.4	1732.6	1752.6	826.4	836.4	846.6	
RMC 12.2K	23.04	23.16	23.04	23.31	23.38	23.30	22.74	22.64	22.69	-
HSDPA Subtest-1	22.07	22.19	22.08	21.98	21.74	21.79	22.35	22.38	22.36	0
HSDPA Subtest-2	21.59	21.69	21.55	21.42	21.16	21.13	21.93	21.93	21.83	0
HSDPA Subtest-3	21.59	21.71	21.59	21.43	21.23	21.22	21.86	21.94	21.88	0.5
HSDPA Subtest-4	21.56	21.63	21.56	21.40	21.10	21.24	21.79	21.84	21.83	0.5
HSUPA Subtest-1	20.42	20.53	20.36	20.28	20.02	20.11	20.67	20.69	20.65	0
HSUPA Subtest-2	20.03	20.17	19.98	19.87	19.61	19.70	20.25	20.24	20.25	2
HSUPA Subtest-3	21.07	21.17	20.99	20.91	20.69	20.73	21.25	21.22	21.17	1
HSUPA Subtest-4	19.57	19.63	19.50	19.45	19.19	19.29	19.71	19.74	19.66	2
HSUPA Subtest-5	21.13	21.20	21.04	20.89	20.67	20.76	21.25	21.18	21.18	0

Power Reduction: Receiver ON

Band	WCDMA Band II			WCDMA Band IV			3GPP MPR (dB)
Channel	9262	9400	9538	1312	1413	1513	
Frequency (MHz)	1852.4	1880.0	1907.6	1712.4	1732.6	1752.6	
RMC 12.2K	16.97	17.00	16.92	16.73	16.99	16.73	-
HSDPA Subtest-1	16.07	16.10	16.00	15.96	15.73	15.80	0
HSDPA Subtest-2	15.55	15.61	15.44	15.41	15.16	15.30	0
HSDPA Subtest-3	15.49	15.58	15.40	15.41	15.32	15.33	0.5
HSDPA Subtest-4	15.51	15.53	15.45	15.36	15.16	15.30	0.5
HSUPA Subtest-1	14.00	14.46	14.32	13.97	13.74	13.75	0
HSUPA Subtest-2	14.03	14.09	13.94	13.92	13.71	13.76	2
HSUPA Subtest-3	15.02	15.09	14.95	14.96	14.73	14.76	1
HSUPA Subtest-4	13.48	13.60	13.44	13.42	13.17	13.24	2
HSUPA Subtest-5	15.03	15.07	14.92	14.88	14.69	14.77	0

4.3.3. Conducted Power of LTE Bands

The measuring conducted average power (Unit: dBm) is shown as below.

➤ **LTE Band 2**

Conducted Power(dBm)											
Modulation		QPSK			16QAM			64QAM			
Band	Bandwidth (MHz)	RB	18607	18900	19193	18607	18900	19193	18607	18900	19193
			1850.7	1880	1909.3	1850.7	1880	1909.3	1850.7	1880	1909.3
2	1.4	1@0	23.17	23.26	23.18	22.07	22.11	21.92	21.03	21.50	20.90
		1@3	23.10	23.23	23.21	22.14	22.12	21.98	21.17	21.60	21.16
		1@5	23.14	23.21	23.19	22.03	22.08	21.94	20.91	21.45	21.00
		3@0	23.34	23.36	23.32	22.12	22.28	22.11	21.25	21.41	21.51
		3@1	23.32	23.39	23.31	22.13	22.24	22.09	21.34	21.32	21.46
		3@3	23.31	23.34	23.29	22.06	22.23	22.09	21.44	21.35	21.38
		6@0	22.32	22.35	22.26	21.40	21.26	21.27	20.30	20.30	20.29
Band	Bandwidth (MHz)	RB	18615	18900	19185	18615	18900	19185	18615	18900	19185
			1851.5	1880	1908.5	1851.5	1880	1908.5	1851.5	1880	1908.5
2	3	1@0	23.06	23.13	23.07	22.09	22.10	21.85	20.94	21.40	21.01
		1@8	23.19	23.21	23.20	22.24	22.08	21.95	21.18	21.43	21.17
		1@14	23.05	23.12	23.09	22.12	21.95	21.80	20.88	21.38	20.93
		8@0	22.23	22.30	22.27	21.36	21.37	21.31	20.26	20.40	20.49
		8@4	22.23	22.29	22.26	21.35	21.35	21.29	20.29	20.26	20.39
		8@7	22.34	22.34	22.25	21.40	21.36	21.33	20.29	20.39	20.41
		15@0	22.31	22.36	22.25	21.39	21.37	21.24	20.45	20.26	20.34
Band	Bandwidth (MHz)	RB	18625	18900	19175	18625	18900	19175	18625	18900	19175
			1852.5	1880	1907.5	1852.5	1880	1907.5	1852.5	1880	1907.5
2	5	1@0	23.43	23.40	23.38	22.29	22.52	22.23	21.02	21.52	20.89
		1@12	23.55	23.54	23.52	22.46	22.61	22.44	21.13	21.54	21.13
		1@24	23.38	23.37	23.34	22.37	22.46	22.28	20.97	21.35	20.95
		12@0	22.32	22.38	22.33	21.33	21.53	21.39	20.13	20.41	20.59
		12@7	22.27	22.40	22.28	21.37	21.52	21.48	20.35	20.27	20.53
		12@13	22.34	22.36	22.34	21.44	21.54	21.47	20.39	20.48	20.30
		25@0	22.34	22.44	22.36	21.49	21.52	21.51	20.43	20.27	20.34
Band	Bandwidth (MHz)	RB	18650	18900	19150	18650	18900	19150	18650	18900	19150
			1855	1880	1905	1855	1880	1905	1855	1880	1905
2	10	1@0	23.37	23.46	23.44	22.42	22.36	22.16	20.95	21.48	20.88
		1@25	23.44	23.52	23.44	22.50	22.37	22.22	21.20	21.56	21.18
		1@49	23.42	23.43	23.39	22.47	22.30	22.19	20.89	21.41	20.84
		25@0	22.33	22.42	22.34	21.41	21.54	21.48	20.21	20.43	20.61
		25@12	22.33	22.41	22.32	21.39	21.52	21.47	20.30	20.37	20.41
		25@25	22.40	22.39	22.34	21.50	21.54	21.51	20.25	20.42	20.34
		50@0	22.43	22.43	22.45	21.51	21.54	21.54	20.32	20.31	20.37
Band	Bandwidth (MHz)	RB	18675	18900	19125	18675	18900	19125	18675	18900	19125
			1857.5	1880	1902.5	1857.5	1880	1902.5	1857.5	1880	1902.5
2	15	1@0	23.35	23.35	23.44	22.39	22.49	22.22	21.04	21.53	21.03
		1@37	23.48	23.44	23.46	22.50	22.57	22.25	21.23	21.60	21.20
		1@74	23.38	23.30	23.29	22.39	22.45	22.10	20.90	21.42	20.99
		36@0	22.32	22.36	22.39	22.37	22.40	22.40	20.13	20.44	20.66
		36@20	22.36	22.37	22.41	22.39	22.39	22.41	20.34	20.28	20.44
		36@39	22.35	22.39	22.35	22.36	22.41	22.38	20.35	20.47	20.38
		75@0	22.35	22.40	22.38	21.35	21.46	21.45	20.41	20.29	20.43
Band	Bandwidth (MHz)	RB	18700	18900	19100	18700	18900	19100	18700	18900	19100
			1860	1880	1900	1860	1880	1900	1860	1880	1900
2	20	1@0	23.31	23.32	23.30	22.20	22.53	22.13	21.12	21.53	21.08
		1@49	23.74	23.71	23.59	22.41	22.66	22.28	21.32	21.63	21.24
		1@99	23.35	23.36	23.26	22.20	22.54	22.07	21.05	21.48	21.03
		50@0	22.34	22.41	22.54	21.41	21.46	21.70	20.27	20.45	20.68
		50@24	22.37	22.36	22.54	21.42	21.46	21.64	20.38	20.37	20.54
		50@50	22.55	22.41	22.33	21.55	21.55	21.48	20.45	20.51	20.43
		100@0	22.40	22.36	22.41	21.49	21.47	21.51	20.45	20.38	20.47

➤ LTE Band 4

Conducted Power(dBm)											
Modulation			QPSK			16QAM			64QAM		
Band	Bandwidth (MHz)	RB	19957	20175	20393	19957	20175	20393	19957	20175	20393
			1710.7	1732.5	1754.3	1710.7	1732.5	1754.3	1710.7	1732.5	1754.3
4	1.4	1@0	22.98	22.91	22.90	21.74	21.69	21.86	20.76	21.19	20.59
		1@3	22.97	22.93	22.92	21.84	21.73	21.92	20.87	21.27	20.88
		1@5	22.96	22.89	22.90	21.81	21.65	21.85	20.69	21.14	20.83
		3@0	23.06	23.04	23.09	21.95	21.84	21.87	20.94	20.03	20.01
		3@1	23.07	23.05	23.09	21.91	21.84	21.91	21.00	19.97	20.02
		3@3	23.09	23.05	23.04	21.92	21.78	21.88	21.19	20.04	20.13
		6@0	22.02	22.07	22.09	20.94	21.06	21.13	20.01	20.01	19.92
Band	Bandwidth (MHz)	RB	19965	20175	20385	19965	20175	20385	19965	20175	20385
			1711.5	1732.5	1753.5	1711.5	1732.5	1753.5	1711.5	1732.5	1753.5
4	3	1@0	22.80	22.78	22.82	21.84	21.70	21.56	20.67	21.09	20.70
		1@8	22.91	22.85	22.96	21.91	21.77	21.73	20.88	21.10	20.89
		1@14	22.77	22.80	22.81	21.91	21.68	21.63	20.66	21.07	20.76
		8@0	22.02	21.94	22.03	21.04	20.97	21.06	19.95	20.02	19.99
		8@4	21.99	21.98	22.04	21.08	20.99	21.05	19.95	19.91	19.95
		8@7	22.05	22.00	22.05	21.09	21.00	21.12	20.04	20.08	20.16
		15@0	22.08	22.01	22.08	21.12	21.00	21.02	20.16	19.97	19.97
Band	Bandwidth (MHz)	RB	19975	20175	20375	19975	20175	20375	19975	20175	20375
			1712.5	1732.5	1752.5	1712.5	1732.5	1752.5	1712.5	1732.5	1752.5
4	5	1@0	23.10	23.02	23.09	22.05	22.19	22.00	20.75	21.21	20.58
		1@12	23.07	23.13	23.03	22.16	22.27	22.12	20.83	21.21	20.85
		1@24	23.11	23.00	23.10	22.13	22.11	22.08	20.75	21.04	20.78
		12@0	22.05	22.05	22.13	21.09	21.13	21.14	19.82	20.03	20.09
		12@7	22.10	22.08	22.17	21.08	21.12	21.14	20.01	19.92	20.09
		12@13	22.11	22.13	22.17	21.17	21.25	21.17	20.14	20.17	20.05
		25@0	22.06	22.09	22.13	21.18	21.14	21.21	20.14	19.98	19.97
Band	Bandwidth (MHz)	RB	20000	20175	20350	20000	20175	20350	20000	20175	20350
			1715	1732.5	1750	1715	1732.5	1750	1715	1732.5	1750
4	10	1@0	23.04	23.10	23.08	22.08	22.04	21.85	20.68	21.17	20.57
		1@25	23.13	23.16	23.15	22.21	22.02	21.92	20.90	21.23	20.90
		1@49	23.13	23.15	23.18	22.22	22.05	21.96	20.67	21.10	20.67
		25@0	22.06	22.04	22.05	21.12	21.13	21.15	19.90	20.05	20.11
		25@12	22.01	22.05	22.04	21.08	21.11	21.17	19.96	20.02	19.97
		25@25	22.13	22.13	22.16	21.18	21.25	21.22	20.00	20.11	20.09
		50@0	22.14	22.13	22.13	21.17	21.20	21.15	20.03	20.02	20.00
Band	Bandwidth (MHz)	RB	20025	20175	20325	20025	20175	20325	20025	20175	20325
			1717.5	1732.5	1747.5	1717.5	1732.5	1747.5	1717.5	1732.5	1747.5
4	15	1@0	23.04	22.98	23.04	22.12	22.13	21.84	20.77	21.22	20.72
		1@37	23.21	23.04	23.16	22.26	22.27	21.97	20.93	21.27	20.92
		1@74	23.07	22.96	23.14	22.17	22.15	21.93	20.68	21.11	20.82
		36@0	22.19	22.11	22.17	22.12	22.11	22.23	19.82	20.06	20.16
		36@20	22.15	22.12	22.17	22.13	22.13	22.17	20.00	19.93	20.00
		36@39	22.15	22.12	22.19	22.09	22.08	22.21	20.10	20.16	20.13
		75@0	22.10	22.09	22.16	21.11	21.15	21.17	20.12	20.00	20.06
Band	Bandwidth (MHz)	RB	20050	20175	20300	20050	20175	20300	20050	20175	20300
			1720	1732.5	1745	1720	1732.5	1745	1720	1732.5	1745
4	20	1@0	23.01	22.99	22.95	21.93	22.22	21.82	20.85	21.22	20.77
		1@50	23.24	23.16	23.13	22.11	22.33	22.00	21.02	21.30	20.96
		1@99	23.04	23.04	23.02	21.98	22.23	21.90	20.83	21.17	20.86
		50@0	22.08	22.03	22.11	21.10	21.08	21.20	19.96	20.07	20.18
		50@25	22.07	22.07	22.07	21.08	21.11	21.20	20.04	20.02	20.10
		50@50	22.23	22.19	22.14	21.30	21.24	21.23	20.20	20.20	20.18
		100@0	22.15	22.12	22.14	21.20	21.18	21.14	20.16	20.09	20.10

➤ LTE Band 5

			Conducted Power(dBm)								
Modulation			QPSK			16QAM			64QAM		
Band	Bandwidth (MHz)	RB	20407	20525	20643	20407	20525	20643	20407	20525	20643
			824.7	836.5	848.3	824.7	836.5	848.3	824.7	836.5	848.3
5	1.4	1@0	23.68	23.69	23.62	22.62	22.47	22.37	21.65	21.60	21.38
		1@3	23.63	23.66	23.61	22.61	22.51	22.38	21.76	21.64	21.48
		1@5	23.62	23.68	23.60	22.54	22.44	22.30	21.76	21.37	21.36
		3@0	23.83	23.80	23.82	22.59	22.62	22.51	21.64	21.87	21.68
		3@1	23.79	23.83	23.77	22.57	22.58	22.55	21.62	21.72	21.71
		3@3	23.76	23.81	23.75	22.59	22.60	22.49	21.76	21.72	21.77
		6@0	22.80	22.81	22.74	21.84	21.70	21.79	20.80	20.73	20.54
Band	Bandwidth (MHz)	RB	20415	20525	20635	20415	20525	20635	20415	20525	20635
			825.5	836.5	847.5	825.5	836.5	847.5	825.5	836.5	847.5
5	3	1@0	23.52	23.53	23.57	22.48	22.43	22.24	21.67	21.57	21.42
		1@8	23.64	23.61	23.65	22.60	22.47	22.37	21.78	21.60	21.54
		1@14	23.55	23.57	23.50	22.52	22.37	22.25	21.84	21.46	21.35
		8@0	22.74	22.73	22.66	21.81	21.72	21.68	20.64	20.68	20.83
		8@4	22.70	22.68	22.69	21.82	21.70	21.68	20.69	20.70	20.62
		8@7	22.70	22.69	22.72	21.81	21.69	21.71	20.70	20.66	20.77
		15@0	22.76	22.76	22.74	21.84	21.66	21.72	20.78	20.70	20.72
Band	Bandwidth (MHz)	RB	20425	20525	20625	20425	20525	20625	20425	20525	20625
			826.5	836.5	846.5	826.5	836.5	846.5	826.5	836.5	846.5
5	5	1@0	23.87	23.78	23.87	22.80	22.85	22.77	21.60	21.68	21.37
		1@12	23.91	23.89	23.95	22.88	23.02	22.81	21.69	21.62	21.56
		1@24	23.83	23.79	23.76	22.75	22.89	22.76	21.85	21.39	21.23
		12@0	22.74	22.87	22.77	21.80	21.95	21.87	20.72	20.78	20.82
		12@7	22.75	22.88	22.81	21.83	21.91	21.82	20.64	20.70	20.52
		12@13	22.83	22.75	22.78	21.87	21.89	21.86	20.78	20.79	20.66
		25@0	22.80	22.78	22.81	21.92	21.88	21.86	20.83	20.78	20.57
Band	Bandwidth (MHz)	RB	20450	20525	20600	20450	20525	20600	20450	20525	20600
			829	836.5	844	829	836.5	844	829	836.5	844
5	10	1@0	23.86	23.89	23.80	22.84	22.66	22.59	21.74	21.69	21.50
		1@25	23.85	23.90	23.98	22.93	22.72	22.64	21.83	21.69	21.62
		1@49	23.84	23.88	23.86	22.91	22.67	22.59	21.90	21.55	21.43
		25@0	22.63	22.83	22.68	21.74	21.94	21.82	20.75	20.88	20.84
		25@12	22.64	22.84	22.73	21.72	21.90	21.86	20.70	20.82	20.71
		25@25	22.81	22.81	22.82	21.86	21.85	21.94	20.84	20.84	20.82
		50@0	22.78	22.85	22.80	21.83	21.88	21.87	20.85	20.85	20.74

➤ LTE Band 7

Conducted Power(dBm)											
Modulation			QPSK			16QAM			64QAM		
Band	Bandwidth (MHz)	RB	20775	21100	21425	20775	21100	21425	20775	21100	21425
			2502.5	2535	2567.5	2502.5	2535	2567.5	2502.5	2535	2567.5
7	5	1@0	23.30	23.34	23.20	22.16	22.23	22.19	20.90	20.95	21.30
		1@12	23.43	23.38	23.28	22.35	22.36	22.34	21.02	21.22	21.26
		1@24	23.30	23.28	23.18	22.22	22.19	22.24	21.08	20.88	20.89
		12@0	22.21	22.27	22.21	21.16	21.22	21.27	20.06	20.06	20.06
		12@7	22.22	22.25	22.26	21.13	21.20	21.22	19.80	20.20	20.17
		12@13	22.26	22.27	22.19	21.18	21.20	21.18	20.01	20.17	19.97
		25@0	22.26	22.25	22.21	21.26	21.29	21.15	20.11	20.17	20.02
Band	Bandwidth (MHz)	RB	20800	21100	21400	20800	21100	21400	20800	21100	21400
			2505	2535	2565	2505	2535	2565	2505	2535	2565
7	10	1@0	23.28	23.32	23.31	22.30	22.28	22.11	20.86	20.95	21.19
		1@25	23.31	23.32	23.34	22.28	22.31	22.13	21.12	21.20	21.19
		1@49	23.29	23.35	23.32	22.35	22.34	22.11	21.06	21.02	20.95
		25@0	22.20	22.27	22.30	21.14	21.30	21.33	20.05	20.14	20.17
		25@12	22.19	22.30	22.34	21.20	21.27	21.33	19.86	20.23	20.19
		25@25	22.31	22.33	22.22	21.31	21.30	21.22	20.04	20.08	19.92
		50@0	22.32	22.34	22.29	21.25	21.37	21.28	20.09	20.20	19.95
Band	Bandwidth (MHz)	RB	20825	21100	21375	20825	21100	21375	20825	21100	21375
			2507.5	2535	2562.5	2507.5	2535	2562.5	2507.5	2535	2562.5
7	15	1@0	23.26	23.33	23.17	22.24	22.28	22.32	21.00	20.98	21.28
		1@37	23.36	23.39	23.27	22.32	22.36	22.38	21.01	21.25	21.17
		1@74	23.25	23.28	23.12	22.19	22.28	22.23	21.10	20.92	20.89
		36@0	22.26	22.38	22.32	22.34	22.33	22.29	20.03	19.99	20.24
		36@20	22.30	22.40	22.29	22.30	22.34	22.30	19.81	20.28	20.19
		36@39	22.30	22.40	22.29	22.31	22.36	22.33	20.03	20.02	19.91
		75@0	22.26	22.35	22.34	21.19	21.29	21.28	20.17	20.15	19.88
Band	Bandwidth (MHz)	RB	20850	21100	21350	20850	21100	21350	20850	21100	21350
			2510	2535	2560	2510	2535	2560	2510	2535	2560
7	20	1@0	23.22	23.27	23.22	22.07	22.11	22.31	21.06	21.07	21.32
		1@49	23.36	23.41	23.44	22.24	22.28	22.48	21.15	21.29	21.35
		1@99	23.22	23.29	23.21	22.11	22.19	22.24	21.13	21.08	21.09
		50@0	22.09	22.30	22.35	21.10	21.28	21.21	20.09	20.16	20.25
		50@24	22.12	22.28	22.19	21.08	21.27	21.20	19.97	20.30	20.22
		50@50	22.27	22.29	22.19	21.22	21.31	21.16	20.15	20.19	20.06
		100@0	22.17	22.29	22.23	21.16	21.28	21.19	20.19	20.24	20.06

➤ LTE Band 12

Conducted Power(dBm)											
Modulation			QPSK			16QAM			64QAM		
Band	Bandwidth (MHz)	RB	23017	23095	23173	23017	23095	23173	23017	23095	23173
			699.7	707.5	715.3	699.7	707.5	715.3	699.7	707.5	715.3
12	1.4	1@0	23.66	23.70	23.73	22.41	22.60	22.53	21.79	21.62	21.54
		1@3	23.73	23.70	23.70	22.45	22.62	22.54	21.76	21.59	21.47
		1@5	23.69	23.63	23.70	22.44	22.54	22.57	21.68	21.41	21.50
		3@0	23.79	23.82	23.83	22.62	22.61	22.69	21.71	21.66	21.94
		3@1	23.80	23.81	23.82	22.56	22.65	22.65	21.68	21.58	21.88
		3@3	23.85	23.80	23.78	22.58	22.62	22.56	21.97	21.66	21.91
		6@0	22.87	22.90	22.91	21.86	21.92	21.74	20.65	20.57	20.86
Band	Bandwidth (MHz)	RB	23025	23095	23165	23025	23095	23165	23025	23095	23165
			700.5	707.5	714.5	700.5	707.5	714.5	700.5	707.5	714.5
12	3	1@0	23.49	23.59	23.59	22.51	22.50	22.32	21.70	21.70	21.50
		1@8	23.65	23.68	23.64	22.72	22.55	22.43	21.81	21.72	21.40
		1@14	23.51	23.62	23.52	22.59	22.37	22.28	21.70	21.55	21.41
		8@0	22.73	22.78	22.82	21.77	21.74	21.78	20.66	20.67	20.89
		8@4	22.73	22.80	22.79	21.76	21.75	21.77	20.66	20.58	20.89
		8@7	22.84	22.78	22.87	21.83	21.78	21.81	20.86	20.73	20.79
		15@0	22.81	22.80	22.83	21.85	21.76	21.76	20.81	20.68	20.72
Band	Bandwidth (MHz)	RB	23035	23095	23155	23035	23095	23155	23035	23095	23155
			701.5	707.5	713.5	701.5	707.5	713.5	701.5	707.5	713.5
12	5	1@0	23.84	23.82	23.82	22.80	22.88	22.80	21.78	21.76	21.58
		1@12	23.96	23.92	24.00	22.92	23.01	22.94	21.86	21.75	21.31
		1@24	23.94	23.82	23.82	22.91	22.90	22.75	21.64	21.39	21.52
		12@0	22.87	22.89	22.92	21.90	21.91	21.92	20.65	20.72	21.00
		12@7	22.90	22.89	22.90	21.87	21.90	22.02	20.70	20.57	20.90
		12@13	22.93	22.81	22.91	21.96	21.86	21.91	20.97	20.69	20.93
		25@0	22.91	22.83	22.91	21.94	21.88	22.02	20.74	20.65	20.78
Band	Bandwidth (MHz)	RB	23060	23095	23130	23060	23095	23130	23060	23095	23130
			704	707.5	711	704	707.5	711	704	707.5	711
12	10	1@0	23.82	23.95	23.87	22.86	22.78	22.66	21.82	21.77	21.62
		1@25	23.95	24.21	23.90	23.02	22.77	22.67	21.94	21.76	21.49
		1@49	23.87	23.91	23.87	22.94	22.73	22.68	21.79	21.56	21.60
		25@0	22.85	22.83	22.94	21.85	21.88	22.02	20.75	20.80	21.01
		25@12	22.85	22.81	22.91	21.86	21.87	22.00	20.78	20.72	20.95
		25@25	22.96	22.74	22.89	22.01	21.81	21.95	20.99	20.75	20.94
		50@0	22.94	22.80	22.97	21.96	21.85	21.96	20.85	20.75	20.87

➤ LTE Band 13

Conducted Power(dBm)											
Modulation			QPSK			16QAM			64QAM		
Band	Bandwidth (MHz)	RB	23205	23230	23255	23205	23230	23255	23205	23230	23255
			779.5	782	784.5	779.5	782	784.5	779.5	782	784.5
13	5	1@0	23.98	23.94	23.96	22.94	23.01	22.87	21.81	21.94	21.82
		1@12	24.12	24.03	24.07	23.04	23.07	22.98	22.06	22.00	21.90
		1@24	24.00	23.95	23.98	22.90	23.01	22.90	21.83	21.84	21.81
		12@0	22.89	22.85	22.99	21.95	21.93	21.99	20.87	20.92	20.88
		12@7	22.93	22.88	23.00	22.02	21.96	22.04	20.97	20.94	21.01
		12@13	23.03	22.94	22.87	22.05	22.07	22.00	21.02	21.07	20.88
		25@0	22.97	22.96	22.95	22.10	21.97	22.06	21.05	20.82	20.95
Band	Bandwidth (MHz)	RB	0	23230	0	0	23230	0	0	23230	0
			0	782	0	0	782	0	0	782	0
3	10	1@0	/	23.95	/	/	22.94	/	/	21.97	/
		1@25	/	24.13	/	/	23.00	/	/	22.03	/
		1@49	/	24.01	/	/	23.01	/	/	22.04	/
		25@0	/	22.86	/	/	21.92	/	/	20.95	/
		25@12	/	22.87	/	/	21.93	/	/	20.96	/
		25@25	/	22.91	/	/	21.94	/	/	20.97	/
		50@0	/	22.89	/	/	21.96	/	/	20.99	/

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-SAR-IEEE Std 1528-2013-V1.1

➤ LTE Band 17

Conducted Power(dBm)											
Modulation			QPSK			16QAM			64QAM		
Band	Bandwidth (MHz)	RB	23755	23790	23825	23755	23790	23825	23755	23790	23825
			706.5	710	713.5	706.5	710	713.5	706.5	710	713.5
17	5	1@0	24.00	24.00	23.96	22.91	22.94	23.04	21.62	21.43	21.55
		1@12	24.13	24.11	24.11	23.06	23.04	23.13	21.89	21.55	21.43
		1@24	24.05	23.96	23.96	22.93	22.99	22.99	21.72	21.79	21.66
		12@0	23.00	23.08	23.03	22.02	22.07	22.07	20.62	20.72	20.95
		12@7	23.03	23.08	23.04	22.00	22.08	22.10	20.76	21.01	21.03
		12@13	22.95	22.91	23.03	22.03	21.89	22.06	20.45	20.52	20.92
		25@0	23.04	22.94	23.10	22.10	22.04	22.08	20.78	20.76	20.69
Band	Bandwidth (MHz)	RB	23780	23790	23800	23780	23790	23800	23780	23790	23800
			709	710	711	709	710	711	709	710	711
17	10	1@0	23.92	24.03	24.00	23.04	22.85	22.73	21.79	21.60	21.60
		1@25	24.01	24.13	24.04	23.05	22.85	22.79	21.93	21.66	21.57
		1@49	23.95	24.07	24.03	23.02	22.89	22.82	21.83	21.80	21.70
		25@0	22.95	23.01	23.11	21.98	22.04	22.13	20.76	20.84	21.00
		25@12	22.98	22.99	23.04	21.98	22.09	22.17	20.83	21.01	21.06
		25@25	22.92	22.94	22.98	21.91	21.96	22.08	20.64	20.70	20.96
		50@0	23.00	23.03	23.08	21.96	22.06	22.05	20.83	20.87	20.83

➤ LTE Band 66

Conducted Power(dBm)											
Modulation			QPSK			16QAM			64QAM		
Band	Bandwidth (MHz)	RB	131979	132322	132665	131979	132322	132665	131979	132322	132665
			1710.7	1745	1779.3	1710.7	1745	1779.3	1710.7	1745	1779.3
66	1.4	1@0	23.16	23.21	23.14	22.07	22.07	21.94	21.05	21.46	20.79
		1@3	23.24	23.21	23.22	22.16	22.05	21.98	21.15	21.48	21.10
		1@5	23.15	23.23	23.21	22.04	22.04	21.96	20.98	21.29	21.03
		3@0	23.30	23.31	23.31	22.14	22.11	22.08	21.20	21.35	21.29
		3@1	23.32	23.29	23.26	22.13	22.12	22.08	21.32	21.27	21.31
		3@3	23.30	23.33	23.28	22.11	22.10	22.07	21.43	21.23	21.19
		6@0	22.36	22.34	22.30	21.38	21.23	21.32	20.26	20.26	20.17
Band	Bandwidth (MHz)	RB	131987	132322	132657	131987	132322	132657	131987	132322	132657
			1711.5	1745	1778.5	1711.5	1745	1778.5	1711.5	1745	1778.5
66	3	1@0	23.00	23.06	23.00	22.02	21.91	21.78	20.96	21.36	20.90
		1@8	23.13	23.16	23.14	22.16	22.03	21.90	21.16	21.31	21.11
		1@14	23.06	23.07	23.07	22.08	21.86	21.81	20.95	21.22	20.96
		8@0	22.22	22.23	22.21	21.29	21.23	21.23	20.21	20.34	20.27
		8@4	22.25	22.18	22.25	21.28	21.25	21.23	20.27	20.21	20.24
		8@7	22.32	22.25	22.23	21.28	21.22	21.27	20.28	20.27	20.22
		15@0	22.31	22.27	22.21	21.34	21.20	21.18	20.41	20.22	20.22
Band	Bandwidth (MHz)	RB	131997	132322	132647	131997	132322	132647	131997	132322	132647
			1712.5	1745	1777.5	1712.5	1745	1777.5	1712.5	1745	1777.5
66	5	1@0	23.34	23.28	23.27	22.33	22.32	22.14	21.04	21.48	20.78
		1@12	23.47	23.39	23.40	22.47	22.41	22.31	21.11	21.42	21.07
		1@24	23.40	23.24	23.28	22.36	22.31	22.19	21.04	21.19	20.98
		12@0	22.33	22.31	22.32	21.35	21.42	21.33	20.08	20.35	20.37
		12@7	22.32	22.32	22.34	21.35	21.38	21.31	20.33	20.22	20.38
		12@13	22.39	22.30	22.32	21.41	21.40	21.30	20.38	20.36	20.11
		25@0	22.37	22.29	22.33	21.46	21.33	21.43	20.39	20.23	20.22
Band	Bandwidth (MHz)	RB	132022	132322	132622	132022	132322	132622	132022	132322	132622
			1715	1745	1775	1715	1745	1775	1715	1745	1775
66	10	1@0	23.33	23.39	23.33	22.36	22.23	22.09	20.97	21.44	20.77
		1@25	23.37	23.43	23.40	22.45	22.21	22.19	21.18	21.44	21.12
		1@49	23.39	23.39	23.42	22.48	22.18	22.21	20.96	21.25	20.87
		25@0	22.32	22.25	22.33	21.40	21.36	21.40	20.16	20.37	20.39
		25@12	22.34	22.28	22.32	21.33	21.36	21.40	20.28	20.32	20.26
		25@25	22.40	22.34	22.31	21.46	21.40	21.37	20.24	20.30	20.15
		50@0	22.41	22.35	22.37	21.45	21.40	21.35	20.28	20.27	20.25
Band	Bandwidth (MHz)	RB	132047	132322	132597	132047	132322	132597	132047	132322	132597
			1717.5	1745	1772.5	1717.5	1745	1772.5	1717.5	1745	1772.5

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-SAR-IEEE Std 1528-2013-V1.1

66	15	1@0	23.30	23.25	23.30	22.32	22.43	22.04	21.06	21.49	20.92
		1@37	23.44	23.37	23.36	22.48	22.42	22.18	21.21	21.48	21.14
		1@74	23.27	23.24	23.32	22.35	22.37	22.05	20.97	21.26	21.02
		36@0	22.37	22.39	22.31	22.38	22.42	22.35	20.08	20.38	20.44
		36@20	22.36	22.25	22.31	22.35	22.38	22.31	20.32	20.23	20.29
		36@39	22.41	22.37	22.34	22.38	22.33	22.28	20.34	20.35	20.19
		75@0	22.36	22.37	22.32	21.33	21.41	21.30	20.37	20.25	20.31
Band	Bandwidth (MHz)	RB	132072	132322	132572	132072	132322	132572	132072	132322	132572
			1720	1745	1770	1720	1745	1770	1720	1745	1770
66	20	1@0	23.26	23.26	23.17	22.18	22.45	21.98	21.14	21.49	20.97
		1@50	23.49	23.46	23.36	22.35	22.50	22.18	21.30	21.51	21.18
		1@99	23.29	23.24	23.20	22.23	22.34	22.06	21.12	21.32	21.06
		50@0	22.35	22.27	22.28	21.32	21.36	21.44	20.22	20.39	20.46
		50@25	22.32	22.27	22.30	21.36	21.37	21.45	20.36	20.32	20.39
		50@50	22.42	22.33	22.22	21.50	21.39	21.25	20.44	20.39	20.24
		100@0	22.37	22.31	22.28	21.41	21.39	21.35	20.41	20.34	20.35

➤ LTE Band 71

Conducted Power(dBm)											
Modulation			QPSK			16QAM			64QAM		
Band	Bandwidth (MHz)	RB	133147	133297	133447	133147	133297	133447	133147	133297	133447
			665.5	680.5	695.5	665.5	680.5	695.5	665.5	680.5	695.5
71	5	1@0	24.29	23.65	23.73	23.24	22.68	22.70	21.96	22.03	21.17
		1@12	24.46	23.76	23.83	23.44	22.83	22.76	22.00	21.76	21.51
		1@24	24.31	23.74	23.77	23.26	22.76	22.72	21.34	21.75	21.42
		12@0	23.23	22.75	22.77	22.18	21.78	21.79	20.82	20.86	20.86
		12@7	23.27	22.66	22.72	22.23	21.77	21.75	20.99	20.69	20.86
		12@13	23.47	22.61	22.71	22.49	21.63	21.76	20.68	20.91	20.83
		25@0	23.36	22.71	22.74	22.42	21.70	21.84	20.91	20.69	20.83
Band	Bandwidth (MHz)	RB	133172	133297	133422	133172	133297	133422	133172	133297	133422
			668	680.5	693	668	680.5	693	668	680.5	693
71	10	1@0	24.33	23.67	23.71	23.17	22.51	22.82	21.89	21.99	21.16
		1@25	24.39	23.74	23.77	23.15	22.46	22.87	22.07	21.78	21.56
		1@49	24.32	23.76	23.78	23.09	22.60	22.85	21.26	21.81	21.31
		25@0	23.04	22.71	22.70	22.07	21.83	21.69	20.90	20.88	20.88
		25@12	23.09	22.75	22.70	22.07	21.81	21.68	20.94	20.79	20.74
		25@25	23.29	22.64	22.75	22.31	21.73	21.76	20.54	20.85	20.87
		50@0	23.23	22.74	22.75	22.26	21.75	21.76	20.80	20.73	20.86
Band	Bandwidth (MHz)	RB	133197	133297	133397	133197	133297	133397	133197	133297	133397
			670.5	680.5	690.5	670.5	680.5	690.5	670.5	680.5	690.5
71	15	1@0	24.19	24.01	23.68	23.35	22.82	22.68	21.98	22.04	21.31
		1@37	24.30	23.75	23.85	23.35	22.53	22.95	22.10	21.82	21.58
		1@74	23.62	23.76	23.71	22.84	22.50	22.81	21.27	21.82	21.46
		36@0	23.37	22.81	22.66	23.34	22.81	22.65	20.82	20.89	20.93
		36@20	23.35	22.52	22.93	23.40	22.53	22.90	20.98	20.70	20.77
		36@39	22.83	22.56	22.81	22.82	22.59	22.80	20.64	20.90	20.91
		75@0	23.22	22.84	22.87	22.17	21.78	21.80	20.89	20.71	20.92
Band	Bandwidth (MHz)	RB	133222	133322	133372	133222	133322	133372	133222	133322	133372
			673	683	688	673	683	688	673	683	688
71	20	1@0	24.19	23.95	23.52	23.14	23.04	22.41	22.06	22.04	21.36
		1@49	24.53	23.89	23.84	23.28	22.88	22.66	22.19	21.85	21.62
		1@99	23.74	23.75	23.68	22.57	22.94	22.54	21.42	21.88	21.50
		50@0	23.10	22.86	22.92	22.10	21.91	21.97	20.96	20.90	20.95
		50@24	23.11	22.89	22.94	22.06	21.88	21.97	21.02	20.79	20.87
		50@50	22.82	22.89	22.99	21.84	21.98	22.01	20.74	20.94	20.96
		100@0	22.96	22.89	22.97	21.97	21.89	22.00	20.93	20.80	20.96

➤ LTE CA_7C

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)
7-7	10MHz-20MHz	QPSK-QPSK	20805-20949	1RB#0-0RB#0	23.26
7-7	10MHz-20MHz	QPSK-QPSK	20805-20949	1RB#0-1RB#99	14.75
7-7	10MHz-20MHz	QPSK-QPSK	20805-20949	1RB#49-0RB#0	23.33
7-7	10MHz-20MHz	QPSK-QPSK	20805-20949	12RB#0-0RB#0	23.23
7-7	10MHz-20MHz	QPSK-QPSK	20805-20949	50RB#0-100RB#0	21.40
7-7	10MHz-20MHz	QPSK-QPSK	21006-21150	1RB#0-0RB#0	23.14
7-7	10MHz-20MHz	QPSK-QPSK	21006-21150	1RB#0-1RB#99	14.76
7-7	10MHz-20MHz	QPSK-QPSK	21006-21150	1RB#49-0RB#0	23.38
7-7	10MHz-20MHz	QPSK-QPSK	21006-21150	12RB#0-0RB#0	23.33
7-7	10MHz-20MHz	QPSK-QPSK	21006-21150	50RB#0-100RB#0	21.58
7-7	10MHz-20MHz	QPSK-QPSK	21206-21350	1RB#0-0RB#0	23.15
7-7	10MHz-20MHz	QPSK-QPSK	21206-21350	1RB#0-1RB#99	14.86
7-7	10MHz-20MHz	QPSK-QPSK	21206-21350	1RB#49-0RB#0	23.39
7-7	10MHz-20MHz	QPSK-QPSK	21206-21350	12RB#0-0RB#0	23.40
7-7	10MHz-20MHz	QPSK-QPSK	21206-21350	50RB#0-100RB#0	21.63
7-7	10MHz-20MHz	16QAM-16QAM	20805-20949	1RB#0-0RB#0	22.19
7-7	10MHz-20MHz	16QAM-16QAM	20805-20949	1RB#0-1RB#99	14.69
7-7	10MHz-20MHz	16QAM-16QAM	20805-20949	1RB#49-0RB#0	22.48
7-7	10MHz-20MHz	16QAM-16QAM	20805-20949	12RB#0-0RB#0	22.24
7-7	10MHz-20MHz	16QAM-16QAM	20805-20949	50RB#0-100RB#0	20.39
7-7	10MHz-20MHz	16QAM-16QAM	21006-21150	1RB#0-0RB#0	22.13
7-7	10MHz-20MHz	16QAM-16QAM	21006-21150	1RB#0-1RB#99	14.66
7-7	10MHz-20MHz	16QAM-16QAM	21006-21150	1RB#49-0RB#0	22.45
7-7	10MHz-20MHz	16QAM-16QAM	21006-21150	12RB#0-0RB#0	22.35
7-7	10MHz-20MHz	16QAM-16QAM	21006-21150	50RB#0-100RB#0	20.52
7-7	10MHz-20MHz	16QAM-16QAM	21206-21350	1RB#0-0RB#0	22.87
7-7	10MHz-20MHz	16QAM-16QAM	21206-21350	1RB#0-1RB#99	15.29
7-7	10MHz-20MHz	16QAM-16QAM	21206-21350	1RB#49-0RB#0	23.15
7-7	10MHz-20MHz	16QAM-16QAM	21206-21350	12RB#0-0RB#0	22.41
7-7	10MHz-20MHz	16QAM-16QAM	21206-21350	50RB#0-100RB#0	20.64
7-7	15MHz-10MHz	QPSK-QPSK	20825-20945	1RB#0-0RB#0	23.34
7-7	15MHz-10MHz	QPSK-QPSK	20825-20945	1RB#0-1RB#49	14.83
7-7	15MHz-10MHz	QPSK-QPSK	20825-20945	1RB#74-0RB#0	23.35
7-7	15MHz-10MHz	QPSK-QPSK	20825-20945	16RB#0-0RB#0	22.32
7-7	15MHz-10MHz	QPSK-QPSK	20825-20945	75RB#0-50RB#0	21.43
7-7	15MHz-10MHz	QPSK-QPSK	21051-21171	1RB#0-0RB#0	23.35
7-7	15MHz-10MHz	QPSK-QPSK	21051-21171	1RB#0-1RB#49	14.83
7-7	15MHz-10MHz	QPSK-QPSK	21051-21171	1RB#74-0RB#0	23.41
7-7	15MHz-10MHz	QPSK-QPSK	21051-21171	16RB#0-0RB#0	22.46
7-7	15MHz-10MHz	QPSK-QPSK	21051-21171	75RB#0-50RB#0	21.57
7-7	15MHz-10MHz	QPSK-QPSK	21277-21397	1RB#0-0RB#0	23.35
7-7	15MHz-10MHz	QPSK-QPSK	21277-21397	1RB#0-1RB#49	14.95
7-7	15MHz-10MHz	QPSK-QPSK	21277-21397	1RB#74-0RB#0	23.35
7-7	15MHz-10MHz	QPSK-QPSK	21277-21397	16RB#0-0RB#0	22.58
7-7	15MHz-10MHz	QPSK-QPSK	21277-21397	75RB#0-50RB#0	21.70
7-7	15MHz-10MHz	16QAM-16QAM	20825-20945	1RB#0-0RB#0	22.31
7-7	15MHz-10MHz	16QAM-16QAM	20825-20945	1RB#0-1RB#49	14.87
7-7	15MHz-10MHz	16QAM-16QAM	20825-20945	1RB#74-0RB#0	22.66
7-7	15MHz-10MHz	16QAM-16QAM	20825-20945	16RB#0-0RB#0	21.33
7-7	15MHz-10MHz	16QAM-16QAM	20825-20945	75RB#0-50RB#0	20.44
7-7	15MHz-10MHz	16QAM-16QAM	21051-21171	1RB#0-0RB#0	22.58
7-7	15MHz-10MHz	16QAM-16QAM	21051-21171	1RB#0-1RB#49	15.03
7-7	15MHz-10MHz	16QAM-16QAM	21051-21171	1RB#74-0RB#0	22.85
7-7	15MHz-10MHz	16QAM-16QAM	21051-21171	16RB#0-0RB#0	21.49
7-7	15MHz-10MHz	16QAM-16QAM	21051-21171	75RB#0-50RB#0	20.53
7-7	15MHz-10MHz	16QAM-16QAM	21277-21397	1RB#0-0RB#0	23.01
7-7	15MHz-10MHz	16QAM-16QAM	21277-21397	1RB#0-1RB#49	15.34
7-7	15MHz-10MHz	16QAM-16QAM	21277-21397	1RB#74-0RB#0	23.30
7-7	15MHz-10MHz	16QAM-16QAM	21277-21397	16RB#0-0RB#0	21.65
7-7	15MHz-10MHz	16QAM-16QAM	21277-21397	75RB#0-50RB#0	20.65

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-SAR-IEEE Std 1528-2013-V1.1

7-7	15MHz-15MHz	QPSK-QPSK	20825-20975	1RB#0-0RB#0	23.30
7-7	15MHz-15MHz	QPSK-QPSK	20825-20975	1RB#0-1RB#74	14.76
7-7	15MHz-15MHz	QPSK-QPSK	20825-20975	1RB#74-0RB#0	23.37
7-7	15MHz-15MHz	QPSK-QPSK	20825-20975	16RB#0-0RB#0	23.25
7-7	15MHz-15MHz	QPSK-QPSK	20825-20975	75RB#0-75RB#0	21.45
7-7	15MHz-15MHz	QPSK-QPSK	21025-21175	1RB#0-0RB#0	23.35
7-7	15MHz-15MHz	QPSK-QPSK	21025-21175	1RB#0-1RB#74	16.52
7-7	15MHz-15MHz	QPSK-QPSK	21025-21175	1RB#74-0RB#0	23.37
7-7	15MHz-15MHz	QPSK-QPSK	21025-21175	16RB#0-0RB#0	23.41
7-7	15MHz-15MHz	QPSK-QPSK	21025-21175	75RB#0-75RB#0	21.56
7-7	15MHz-15MHz	QPSK-QPSK	21225-21375	1RB#0-0RB#0	23.33
7-7	15MHz-15MHz	QPSK-QPSK	21225-21375	1RB#0-1RB#74	14.89
7-7	15MHz-15MHz	QPSK-QPSK	21225-21375	1RB#74-0RB#0	23.23
7-7	15MHz-15MHz	QPSK-QPSK	21225-21375	16RB#0-0RB#0	23.35
7-7	15MHz-15MHz	QPSK-QPSK	21225-21375	75RB#0-75RB#0	21.65
7-7	15MHz-15MHz	16QAM-16QAM	20825-20975	1RB#0-0RB#0	22.27
7-7	15MHz-15MHz	16QAM-16QAM	20825-20975	1RB#0-1RB#74	14.74
7-7	15MHz-15MHz	16QAM-16QAM	20825-20975	1RB#74-0RB#0	22.66
7-7	15MHz-15MHz	16QAM-16QAM	20825-20975	16RB#0-0RB#0	22.24
7-7	15MHz-15MHz	16QAM-16QAM	20825-20975	75RB#0-75RB#0	20.46
7-7	15MHz-15MHz	16QAM-16QAM	21025-21175	1RB#0-0RB#0	22.56
7-7	15MHz-15MHz	16QAM-16QAM	21025-21175	1RB#0-1RB#74	15.01
7-7	15MHz-15MHz	16QAM-16QAM	21025-21175	1RB#74-0RB#0	22.91
7-7	15MHz-15MHz	16QAM-16QAM	21025-21175	16RB#0-0RB#0	22.41
7-7	15MHz-15MHz	16QAM-16QAM	21025-21175	75RB#0-75RB#0	20.55
7-7	15MHz-15MHz	16QAM-16QAM	21225-21375	1RB#0-0RB#0	22.96
7-7	15MHz-15MHz	16QAM-16QAM	21225-21375	1RB#0-1RB#74	15.23
7-7	15MHz-15MHz	16QAM-16QAM	21225-21375	1RB#74-0RB#0	23.25
7-7	15MHz-15MHz	16QAM-16QAM	21225-21375	16RB#0-0RB#0	22.50
7-7	15MHz-15MHz	16QAM-16QAM	21225-21375	75RB#0-75RB#0	20.63
7-7	15MHz-20MHz	QPSK-QPSK	20828-20999	1RB#0-0RB#0	23.12
7-7	15MHz-20MHz	QPSK-QPSK	20828-20999	1RB#0-1RB#99	14.70
7-7	15MHz-20MHz	QPSK-QPSK	20828-20999	1RB#74-0RB#0	23.38
7-7	15MHz-20MHz	QPSK-QPSK	20828-20999	16RB#0-0RB#0	23.18
7-7	15MHz-20MHz	QPSK-QPSK	20828-20999	75RB#0-100RB#0	21.37
7-7	15MHz-20MHz	QPSK-QPSK	21003-21174	1RB#0-0RB#0	23.25
7-7	15MHz-20MHz	QPSK-QPSK	21003-21174	1RB#0-1RB#99	16.43
7-7	15MHz-20MHz	QPSK-QPSK	21003-21174	1RB#74-0RB#0	23.32
7-7	15MHz-20MHz	QPSK-QPSK	21003-21174	16RB#0-0RB#0	23.28
7-7	15MHz-20MHz	QPSK-QPSK	21003-21174	75RB#0-100RB#0	21.52
7-7	15MHz-20MHz	QPSK-QPSK	21179-21350	1RB#0-0RB#0	23.22
7-7	15MHz-20MHz	QPSK-QPSK	21179-21350	1RB#0-1RB#99	14.77
7-7	15MHz-20MHz	QPSK-QPSK	21179-21350	1RB#74-0RB#0	23.30
7-7	15MHz-20MHz	QPSK-QPSK	21179-21350	16RB#0-0RB#0	23.34
7-7	15MHz-20MHz	QPSK-QPSK	21179-21350	75RB#0-100RB#0	21.66
7-7	15MHz-20MHz	16QAM-16QAM	20828-20999	1RB#0-0RB#0	22.10
7-7	15MHz-20MHz	16QAM-16QAM	20828-20999	1RB#0-1RB#99	14.59
7-7	15MHz-20MHz	16QAM-16QAM	20828-20999	1RB#74-0RB#0	22.66
7-7	15MHz-20MHz	16QAM-16QAM	20828-20999	16RB#0-0RB#0	22.15
7-7	15MHz-20MHz	16QAM-16QAM	20828-20999	75RB#0-100RB#0	20.35
7-7	15MHz-20MHz	16QAM-16QAM	21003-21174	1RB#0-0RB#0	22.49
7-7	15MHz-20MHz	16QAM-16QAM	21003-21174	1RB#0-1RB#99	14.85
7-7	15MHz-20MHz	16QAM-16QAM	21003-21174	1RB#74-0RB#0	22.85
7-7	15MHz-20MHz	16QAM-16QAM	21003-21174	16RB#0-0RB#0	22.30
7-7	15MHz-20MHz	16QAM-16QAM	21003-21174	75RB#0-100RB#0	20.43
7-7	15MHz-20MHz	16QAM-16QAM	21179-21350	1RB#0-0RB#0	22.72
7-7	15MHz-20MHz	16QAM-16QAM	21179-21350	1RB#0-1RB#99	15.18
7-7	15MHz-20MHz	16QAM-16QAM	21179-21350	1RB#74-0RB#0	23.25
7-7	15MHz-20MHz	16QAM-16QAM	21179-21350	16RB#0-0RB#0	22.43
7-7	15MHz-20MHz	16QAM-16QAM	21179-21350	75RB#0-100RB#0	20.63
7-7	20MHz-10MHz	QPSK-QPSK	20850-20994	1RB#0-0RB#0	23.40
7-7	20MHz-10MHz	QPSK-QPSK	20850-20994	1RB#0-1RB#49	14.84
7-7	20MHz-10MHz	QPSK-QPSK	20850-20994	1RB#99-0RB#0	23.38

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-SAR-IEEE Std 1528-2013-V1.1

7-7	20MHz-10MHz	QPSK-QPSK	20850-20994	18RB#0-0RB#0	22.44
7-7	20MHz-10MHz	QPSK-QPSK	20850-20994	100RB#0-50RB#0	21.58
7-7	20MHz-10MHz	QPSK-QPSK	21051-21195	1RB#0-0RB#0	23.36
7-7	20MHz-10MHz	QPSK-QPSK	21051-21195	1RB#0-1RB#49	16.52
7-7	20MHz-10MHz	QPSK-QPSK	21051-21195	1RB#99-0RB#0	23.35
7-7	20MHz-10MHz	QPSK-QPSK	21051-21195	18RB#0-0RB#0	22.43
7-7	20MHz-10MHz	QPSK-QPSK	21051-21195	100RB#0-50RB#0	21.53
7-7	20MHz-10MHz	QPSK-QPSK	21251-21395	1RB#0-0RB#0	23.26
7-7	20MHz-10MHz	QPSK-QPSK	21251-21395	1RB#0-1RB#49	14.92
7-7	20MHz-10MHz	QPSK-QPSK	21251-21395	1RB#99-0RB#0	23.36
7-7	20MHz-10MHz	QPSK-QPSK	21251-21395	18RB#0-0RB#0	22.50
7-7	20MHz-10MHz	QPSK-QPSK	21251-21395	100RB#0-50RB#0	21.67
7-7	20MHz-10MHz	16QAM-16QAM	20850-20994	1RB#0-0RB#0	22.45
7-7	20MHz-10MHz	16QAM-16QAM	20850-20994	1RB#0-1RB#49	14.93
7-7	20MHz-10MHz	16QAM-16QAM	20850-20994	1RB#99-0RB#0	22.84
7-7	20MHz-10MHz	16QAM-16QAM	20850-20994	18RB#0-0RB#0	21.27
7-7	20MHz-10MHz	16QAM-16QAM	20850-20994	100RB#0-50RB#0	20.57
7-7	20MHz-10MHz	16QAM-16QAM	21051-21195	1RB#0-0RB#0	22.83
7-7	20MHz-10MHz	16QAM-16QAM	21051-21195	1RB#0-1RB#49	15.09
7-7	20MHz-10MHz	16QAM-16QAM	21051-21195	1RB#99-0RB#0	23.15
7-7	20MHz-10MHz	16QAM-16QAM	21051-21195	18RB#0-0RB#0	21.44
7-7	20MHz-10MHz	16QAM-16QAM	21051-21195	100RB#0-50RB#0	20.53
7-7	20MHz-10MHz	16QAM-16QAM	21251-21395	1RB#0-0RB#0	22.62
7-7	20MHz-10MHz	16QAM-16QAM	21251-21395	1RB#0-1RB#49	14.88
7-7	20MHz-10MHz	16QAM-16QAM	21251-21395	1RB#99-0RB#0	22.97
7-7	20MHz-10MHz	16QAM-16QAM	21251-21395	18RB#0-0RB#0	21.42
7-7	20MHz-10MHz	16QAM-16QAM	21251-21395	100RB#0-50RB#0	20.64
7-7	20MHz-15MHz	QPSK-QPSK	20850-21021	1RB#0-0RB#0	23.15
7-7	20MHz-15MHz	QPSK-QPSK	20850-21021	1RB#0-1RB#74	14.64
7-7	20MHz-15MHz	QPSK-QPSK	20850-21021	1RB#99-0RB#0	23.32
7-7	20MHz-15MHz	QPSK-QPSK	20850-21021	18RB#0-0RB#0	22.17
7-7	20MHz-15MHz	QPSK-QPSK	20850-21021	100RB#0-75RB#0	21.43
7-7	20MHz-15MHz	QPSK-QPSK	21026-21197	1RB#0-0RB#0	23.35
7-7	20MHz-15MHz	QPSK-QPSK	21026-21197	1RB#0-1RB#74	16.45
7-7	20MHz-15MHz	QPSK-QPSK	21026-21197	1RB#99-0RB#0	23.32
7-7	20MHz-15MHz	QPSK-QPSK	21026-21197	18RB#0-0RB#0	22.31
7-7	20MHz-15MHz	QPSK-QPSK	21026-21197	100RB#0-75RB#0	21.48
7-7	20MHz-15MHz	QPSK-QPSK	21201-21372	1RB#0-0RB#0	23.39
7-7	20MHz-15MHz	QPSK-QPSK	21201-21372	1RB#0-1RB#74	14.81
7-7	20MHz-15MHz	QPSK-QPSK	21201-21372	1RB#99-0RB#0	23.33
7-7	20MHz-15MHz	QPSK-QPSK	21201-21372	18RB#0-0RB#0	22.34
7-7	20MHz-15MHz	QPSK-QPSK	21201-21372	100RB#0-75RB#0	21.64
7-7	20MHz-15MHz	16QAM-16QAM	20850-21021	1RB#0-0RB#0	22.21
7-7	20MHz-15MHz	16QAM-16QAM	20850-21021	1RB#0-1RB#74	14.74
7-7	20MHz-15MHz	16QAM-16QAM	20850-21021	1RB#99-0RB#0	22.74
7-7	20MHz-15MHz	16QAM-16QAM	20850-21021	18RB#0-0RB#0	21.08
7-7	20MHz-15MHz	16QAM-16QAM	20850-21021	100RB#0-75RB#0	20.41
7-7	20MHz-15MHz	16QAM-16QAM	21026-21197	1RB#0-0RB#0	22.67
7-7	20MHz-15MHz	16QAM-16QAM	21026-21197	1RB#0-1RB#74	14.97
7-7	20MHz-15MHz	16QAM-16QAM	21026-21197	1RB#99-0RB#0	23.16
7-7	20MHz-15MHz	16QAM-16QAM	21026-21197	18RB#0-0RB#0	21.30
7-7	20MHz-15MHz	16QAM-16QAM	21026-21197	100RB#0-75RB#0	20.46
7-7	20MHz-15MHz	16QAM-16QAM	21201-21372	1RB#0-0RB#0	22.43
7-7	20MHz-15MHz	16QAM-16QAM	21201-21372	1RB#0-1RB#74	14.79
7-7	20MHz-15MHz	16QAM-16QAM	21201-21372	1RB#99-0RB#0	22.94
7-7	20MHz-15MHz	16QAM-16QAM	21201-21372	18RB#0-0RB#0	21.34
7-7	20MHz-15MHz	16QAM-16QAM	21201-21372	100RB#0-75RB#0	20.61
7-7	20MHz-20MHz	QPSK-QPSK	20850-21048	1RB#0-0RB#0	23.03
7-7	20MHz-20MHz	QPSK-QPSK	20850-21048	1RB#0-1RB#99	14.59
7-7	20MHz-20MHz	QPSK-QPSK	20850-21048	1RB#99-0RB#0	23.30
7-7	20MHz-20MHz	QPSK-QPSK	20850-21048	18RB#0-0RB#0	23.05
7-7	20MHz-20MHz	QPSK-QPSK	20850-21048	100RB#0-100RB#0	21.30
7-7	20MHz-20MHz	QPSK-QPSK	21001-21199	1RB#0-0RB#0	23.01

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-SAR-IEEE Std 1528-2013-V1.1

7-7	20MHz-20MHz	QPSK-QPSK	21001-21199	1RB#0-1RB#99	14.61
7-7	20MHz-20MHz	QPSK-QPSK	21001-21199	1RB#99-0RB#0	23.36
7-7	20MHz-20MHz	QPSK-QPSK	21001-21199	18RB#0-0RB#0	23.14
7-7	20MHz-20MHz	QPSK-QPSK	21001-21199	100RB#0-100RB#0	21.44
7-7	20MHz-20MHz	QPSK-QPSK	21152-21350	1RB#0-0RB#0	23.05
7-7	20MHz-20MHz	QPSK-QPSK	21152-21350	1RB#0-1RB#99	14.68
7-7	20MHz-20MHz	QPSK-QPSK	21152-21350	1RB#99-0RB#0	23.34
7-7	20MHz-20MHz	QPSK-QPSK	21152-21350	18RB#0-0RB#0	23.27
7-7	20MHz-20MHz	QPSK-QPSK	21152-21350	100RB#0-100RB#0	21.67
7-7	20MHz-20MHz	16QAM-16QAM	20850-21048	1RB#0-0RB#0	22.18
7-7	20MHz-20MHz	16QAM-16QAM	20850-21048	1RB#0-1RB#99	14.50
7-7	20MHz-20MHz	16QAM-16QAM	20850-21048	1RB#99-0RB#0	22.80
7-7	20MHz-20MHz	16QAM-16QAM	20850-21048	18RB#0-0RB#0	22.04
7-7	20MHz-20MHz	16QAM-16QAM	20850-21048	100RB#0-100RB#0	20.33
7-7	20MHz-20MHz	16QAM-16QAM	21001-21199	1RB#0-0RB#0	22.26
7-7	20MHz-20MHz	16QAM-16QAM	21001-21199	1RB#0-1RB#99	14.72
7-7	20MHz-20MHz	16QAM-16QAM	21001-21199	1RB#99-0RB#0	22.84
7-7	20MHz-20MHz	16QAM-16QAM	21001-21199	18RB#0-0RB#0	22.06
7-7	20MHz-20MHz	16QAM-16QAM	21001-21199	100RB#0-100RB#0	20.41
7-7	20MHz-20MHz	16QAM-16QAM	21152-21350	1RB#0-0RB#0	22.24
7-7	20MHz-20MHz	16QAM-16QAM	21152-21350	1RB#0-1RB#99	14.80
7-7	20MHz-20MHz	16QAM-16QAM	21152-21350	1RB#99-0RB#0	22.85
7-7	20MHz-20MHz	16QAM-16QAM	21152-21350	18RB#0-0RB#0	22.16
7-7	20MHz-20MHz	16QAM-16QAM	21152-21350	100RB#0-100RB#0	20.66
Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)
7-7	10MHz-20MHz	64QAM-64QAM	20805-20949	1RB#0-0RB#0	21.47
7-7	10MHz-20MHz	64QAM-64QAM	20805-20949	1RB#0-1RB#99	14.01
7-7	10MHz-20MHz	64QAM-64QAM	20805-20949	1RB#49-0RB#0	21.78
7-7	10MHz-20MHz	64QAM-64QAM	20805-20949	12RB#0-0RB#0	21.50
7-7	10MHz-20MHz	64QAM-64QAM	20805-20949	50RB#0-100RB#0	19.67
7-7	10MHz-20MHz	64QAM-64QAM	21006-21150	1RB#0-0RB#0	21.39
7-7	10MHz-20MHz	64QAM-64QAM	21006-21150	1RB#0-1RB#99	15.55
7-7	10MHz-20MHz	64QAM-64QAM	21006-21150	1RB#49-0RB#0	21.70
7-7	10MHz-20MHz	64QAM-64QAM	21006-21150	12RB#0-0RB#0	21.60
7-7	10MHz-20MHz	64QAM-64QAM	21006-21150	50RB#0-100RB#0	19.77
7-7	10MHz-20MHz	64QAM-64QAM	21206-21350	1RB#0-0RB#0	22.12
7-7	10MHz-20MHz	64QAM-64QAM	21206-21350	1RB#0-1RB#99	16.38
7-7	10MHz-20MHz	64QAM-64QAM	21206-21350	1RB#49-0RB#0	22.39
7-7	10MHz-20MHz	64QAM-64QAM	21206-21350	12RB#0-0RB#0	21.67
7-7	10MHz-20MHz	64QAM-64QAM	21206-21350	50RB#0-100RB#0	19.85
7-7	15MHz-10MHz	64QAM-64QAM	20825-20945	1RB#0-0RB#0	21.75
7-7	15MHz-10MHz	64QAM-64QAM	20825-20945	1RB#0-1RB#49	14.38
7-7	15MHz-10MHz	64QAM-64QAM	20825-20945	1RB#74-0RB#0	22.05
7-7	15MHz-10MHz	64QAM-64QAM	20825-20945	16RB#0-0RB#0	20.61
7-7	15MHz-10MHz	64QAM-64QAM	20825-20945	75RB#0-50RB#0	19.64
7-7	15MHz-10MHz	64QAM-64QAM	21051-21171	1RB#0-0RB#0	22.23
7-7	15MHz-10MHz	64QAM-64QAM	21051-21171	1RB#0-1RB#49	16.26
7-7	15MHz-10MHz	64QAM-64QAM	21051-21171	1RB#74-0RB#0	22.45
7-7	15MHz-10MHz	64QAM-64QAM	21051-21171	16RB#0-0RB#0	20.80
7-7	15MHz-10MHz	64QAM-64QAM	21051-21171	75RB#0-50RB#0	19.85
7-7	15MHz-10MHz	64QAM-64QAM	21277-21397	1RB#0-0RB#0	21.74
7-7	15MHz-10MHz	64QAM-64QAM	21277-21397	1RB#0-1RB#49	16.06
7-7	15MHz-10MHz	64QAM-64QAM	21277-21397	1RB#74-0RB#0	22.00
7-7	15MHz-10MHz	64QAM-64QAM	21277-21397	16RB#0-0RB#0	20.75
7-7	15MHz-10MHz	64QAM-64QAM	21277-21397	75RB#0-50RB#0	19.83
7-7	15MHz-15MHz	64QAM-64QAM	20825-20975	1RB#0-0RB#0	21.53
7-7	15MHz-15MHz	64QAM-64QAM	20825-20975	1RB#0-1RB#74	14.09
7-7	15MHz-15MHz	64QAM-64QAM	20825-20975	1RB#74-0RB#0	21.91
7-7	15MHz-15MHz	64QAM-64QAM	20825-20975	16RB#0-0RB#0	21.54
7-7	15MHz-15MHz	64QAM-64QAM	20825-20975	75RB#0-75RB#0	19.67
7-7	15MHz-15MHz	64QAM-64QAM	21025-21175	1RB#0-0RB#0	21.75
7-7	15MHz-15MHz	64QAM-64QAM	21025-21175	1RB#0-1RB#74	15.95
7-7	15MHz-15MHz	64QAM-64QAM	21025-21175	1RB#74-0RB#0	22.10

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-SAR-IEEE Std 1528-2013-V1.1

7-7	15MHz-15MHz	64QAM-64QAM	21025-21175	16RB#0-0RB#0	21.62
7-7	15MHz-15MHz	64QAM-64QAM	21025-21175	75RB#0-75RB#0	19.78
7-7	15MHz-15MHz	64QAM-64QAM	21225-21375	1RB#0-0RB#0	22.21
7-7	15MHz-15MHz	64QAM-64QAM	21225-21375	1RB#0-1RB#74	16.46
7-7	15MHz-15MHz	64QAM-64QAM	21225-21375	1RB#74-0RB#0	22.48
7-7	15MHz-15MHz	64QAM-64QAM	21225-21375	16RB#0-0RB#0	21.75
7-7	15MHz-15MHz	64QAM-64QAM	21225-21375	75RB#0-75RB#0	19.80
7-7	15MHz-20MHz	64QAM-64QAM	20828-20999	1RB#0-0RB#0	21.45
7-7	15MHz-20MHz	64QAM-64QAM	20828-20999	1RB#0-1RB#99	13.92
7-7	15MHz-20MHz	64QAM-64QAM	20828-20999	1RB#74-0RB#0	21.94
7-7	15MHz-20MHz	64QAM-64QAM	20828-20999	16RB#0-0RB#0	21.46
7-7	15MHz-20MHz	64QAM-64QAM	20828-20999	75RB#0-100RB#0	19.63
7-7	15MHz-20MHz	64QAM-64QAM	21003-21174	1RB#0-0RB#0	21.62
7-7	15MHz-20MHz	64QAM-64QAM	21003-21174	1RB#0-1RB#99	15.88
7-7	15MHz-20MHz	64QAM-64QAM	21003-21174	1RB#74-0RB#0	22.10
7-7	15MHz-20MHz	64QAM-64QAM	21003-21174	16RB#0-0RB#0	21.51
7-7	15MHz-20MHz	64QAM-64QAM	21003-21174	75RB#0-100RB#0	19.69
7-7	15MHz-20MHz	64QAM-64QAM	21179-21350	1RB#0-0RB#0	21.55
7-7	15MHz-20MHz	64QAM-64QAM	21179-21350	1RB#0-1RB#99	15.81
7-7	15MHz-20MHz	64QAM-64QAM	21179-21350	1RB#74-0RB#0	21.99
7-7	15MHz-20MHz	64QAM-64QAM	21179-21350	16RB#0-0RB#0	21.58
7-7	15MHz-20MHz	64QAM-64QAM	21179-21350	75RB#0-100RB#0	19.84
7-7	20MHz-10MHz	64QAM-64QAM	20850-20994	1RB#0-0RB#0	21.65
7-7	20MHz-10MHz	64QAM-64QAM	20850-20994	1RB#0-1RB#49	14.10
7-7	20MHz-10MHz	64QAM-64QAM	20850-20994	1RB#99-0RB#0	22.02
7-7	20MHz-10MHz	64QAM-64QAM	20850-20994	18RB#0-0RB#0	20.45
7-7	20MHz-10MHz	64QAM-64QAM	20850-20994	100RB#0-50RB#0	19.75
7-7	20MHz-10MHz	64QAM-64QAM	21051-21195	1RB#0-0RB#0	22.07
7-7	20MHz-10MHz	64QAM-64QAM	21051-21195	1RB#0-1RB#49	16.10
7-7	20MHz-10MHz	64QAM-64QAM	21051-21195	1RB#99-0RB#0	22.45
7-7	20MHz-10MHz	64QAM-64QAM	21051-21195	18RB#0-0RB#0	20.62
7-7	20MHz-10MHz	64QAM-64QAM	21051-21195	100RB#0-50RB#0	19.77
7-7	20MHz-10MHz	64QAM-64QAM	21251-21395	1RB#0-0RB#0	21.87
7-7	20MHz-10MHz	64QAM-64QAM	21251-21395	1RB#0-1RB#49	16.05
7-7	20MHz-10MHz	64QAM-64QAM	21251-21395	1RB#99-0RB#0	22.16
7-7	20MHz-10MHz	64QAM-64QAM	21251-21395	18RB#0-0RB#0	20.70
7-7	20MHz-10MHz	64QAM-64QAM	21251-21395	100RB#0-50RB#0	19.79
7-7	20MHz-15MHz	64QAM-64QAM	20850-21021	1RB#0-0RB#0	21.48
7-7	20MHz-15MHz	64QAM-64QAM	20850-21021	1RB#0-1RB#74	14.04
7-7	20MHz-15MHz	64QAM-64QAM	20850-21021	1RB#99-0RB#0	22.04
7-7	20MHz-15MHz	64QAM-64QAM	20850-21021	18RB#0-0RB#0	20.40
7-7	20MHz-15MHz	64QAM-64QAM	20850-21021	100RB#0-75RB#0	19.68
7-7	20MHz-15MHz	64QAM-64QAM	21026-21197	1RB#0-0RB#0	21.88
7-7	20MHz-15MHz	64QAM-64QAM	21026-21197	1RB#0-1RB#74	16.03
7-7	20MHz-15MHz	64QAM-64QAM	21026-21197	1RB#99-0RB#0	22.38
7-7	20MHz-15MHz	64QAM-64QAM	21026-21197	18RB#0-0RB#0	20.53
7-7	20MHz-15MHz	64QAM-64QAM	21026-21197	100RB#0-75RB#0	19.72
7-7	20MHz-15MHz	64QAM-64QAM	21201-21372	1RB#0-0RB#0	21.74
7-7	20MHz-15MHz	64QAM-64QAM	21201-21372	1RB#0-1RB#74	15.93
7-7	20MHz-15MHz	64QAM-64QAM	21201-21372	1RB#99-0RB#0	22.14
7-7	20MHz-15MHz	64QAM-64QAM	21201-21372	18RB#0-0RB#0	20.58
7-7	20MHz-15MHz	64QAM-64QAM	21201-21372	100RB#0-75RB#0	19.82
7-7	20MHz-20MHz	64QAM-64QAM	20850-21048	1RB#0-0RB#0	21.37
7-7	20MHz-20MHz	64QAM-64QAM	20850-21048	1RB#0-1RB#99	13.91
7-7	20MHz-20MHz	64QAM-64QAM	20850-21048	1RB#99-0RB#0	22.00
7-7	20MHz-20MHz	64QAM-64QAM	20850-21048	18RB#0-0RB#0	21.28
7-7	20MHz-20MHz	64QAM-64QAM	20850-21048	100RB#0-100RB#0	19.56
7-7	20MHz-20MHz	64QAM-64QAM	21001-21199	1RB#0-0RB#0	21.83
7-7	20MHz-20MHz	64QAM-64QAM	21001-21199	1RB#0-1RB#99	15.98
7-7	20MHz-20MHz	64QAM-64QAM	21001-21199	1RB#99-0RB#0	22.40
7-7	20MHz-20MHz	64QAM-64QAM	21001-21199	18RB#0-0RB#0	21.35
7-7	20MHz-20MHz	64QAM-64QAM	21001-21199	100RB#0-100RB#0	19.64
7-7	20MHz-20MHz	64QAM-64QAM	21152-21350	1RB#0-0RB#0	21.64

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-SAR-IEEE Std 1528-2013-V1.1

7-7	20MHz-20MHz	64QAM-64QAM	21152-21350	1RB#0-1RB#99	15.73
7-7	20MHz-20MHz	64QAM-64QAM	21152-21350	1RB#99-0RB#0	22.17
7-7	20MHz-20MHz	64QAM-64QAM	21152-21350	18RB#0-0RB#0	21.43
7-7	20MHz-20MHz	64QAM-64QAM	21152-21350	100RB#0-100RB#0	19.84

➤ **LTE Band 2 (Power Reduction form Receiver ON)**

Conducted Power(dBm)												
Band	Modulation	Bandwidth (MHz)	RB	QPSK			16QAM			64QAM		
				18607	18900	19193	18607	18900	19193	18607	18900	19193
2	1.4	1@0	1850.7	1880	1909.3	1850.7	1880	1909.3	1850.7	1880	1909.3	
			15.83	15.90	15.87	15.94	15.97	15.83	14.94	14.97	14.83	
			1@3	15.82	15.90	15.91	16.03	16.06	15.93	15.03	15.08	14.93
			1@5	15.80	15.86	15.81	15.93	16.00	15.82	14.95	15.04	14.82
			3@0	16.15	16.18	16.03	15.99	16.01	15.95	14.88	14.91	14.95
			3@1	16.13	16.20	16.07	16.01	16.06	15.98	15.01	15.06	14.98
			3@3	16.12	16.16	16.08	15.99	16.04	15.94	14.99	14.97	14.94
			6@0	15.98	16.03	15.87	16.20	16.19	15.88	15.20	15.20	14.88
Band	Bandwidth (MHz)	RB	18615	18900	19185	18615	18900	19185	18615	18900	19185	
			1851.5	1880	1908.5	1851.5	1880	1908.5	1851.5	1880	1908.5	
2	3	1@0	1851.5	1880	1908.5	1851.5	1880	1908.5	1851.5	1880	1908.5	
			15.84	15.86	15.87	15.90	15.94	15.57	14.90	14.94	14.57	
			1@8	15.93	15.97	15.84	16.08	15.93	15.73	15.08	14.93	14.73
			1@14	15.80	15.84	15.79	15.93	15.84	15.58	14.95	14.86	14.47
			8@0	15.99	16.07	16.00	16.16	16.19	16.11	15.16	15.09	15.11
			8@4	15.95	16.08	15.97	16.15	16.16	16.12	15.15	15.16	15.05
			8@7	16.11	16.14	16.03	16.27	16.18	16.12	15.27	15.11	15.13
			15@0	16.08	16.15	16.02	16.23	16.18	16.08	15.23	15.19	15.08
Band	Bandwidth (MHz)	RB	18625	18900	19175	18625	18900	19175	18625	18900	19175	
			1852.5	1880	1907.5	1852.5	1880	1907.5	1852.5	1880	1907.5	
2	5	1@0	1852.5	1880	1907.5	1852.5	1880	1907.5	1852.5	1880	1907.5	
			16.16	16.16	16.08	16.18	16.37	16.10	15.18	15.37	15.10	
			1@12	16.31	16.31	16.19	16.32	16.45	16.23	15.22	15.47	15.16
			1@24	16.15	16.14	16.00	16.25	16.32	16.10	15.25	15.36	15.11
			12@0	16.13	16.29	16.14	16.23	16.39	16.27	15.16	15.29	15.27
			12@7	16.15	16.24	16.15	16.24	16.39	16.31	15.24	15.43	15.31
			12@13	16.30	16.21	16.09	16.30	16.38	16.21	15.30	15.31	15.21
			25@0	16.23	16.27	16.17	16.44	16.33	16.38	15.44	15.34	15.38
Band	Bandwidth (MHz)	RB	18650	18900	19150	18650	18900	19150	18650	18900	19150	
			1855	1880	1905	1855	1880	1905	1855	1880	1905	
2	10	1@0	1855	1880	1905	1855	1880	1905	1855	1880	1905	
			16.21	16.29	16.19	16.31	16.25	16.05	15.31	15.25	15.05	
			1@25	16.28	16.30	16.30	16.39	16.29	16.05	15.39	15.29	15.05
			1@49	16.22	16.20	16.15	16.32	16.15	15.99	15.34	15.15	14.99
			25@0	16.12	16.23	16.23	16.23	16.46	16.42	15.12	15.48	15.44
			25@12	16.11	16.27	16.26	16.27	16.45	16.44	15.27	15.45	15.44
			25@25	16.31	16.24	16.07	16.46	16.39	16.31	15.46	15.32	15.31
			50@0	16.31	16.33	16.24	16.44	16.41	16.39	15.44	15.42	15.39
Band	Bandwidth (MHz)	RB	18675	18900	19125	18675	18900	19125	18675	18900	19125	
			1857.5	1880	1902.5	1857.5	1880	1902.5	1857.5	1880	1902.5	
2	15	1@0	1857.5	1880	1902.5	1857.5	1880	1902.5	1857.5	1880	1902.5	
			16.14	16.14	16.29	16.26	16.35	16.09	15.26	15.35	15.09	
			1@37	16.29	16.17	16.26	16.42	16.46	16.10	15.42	15.46	15.10
			1@74	16.19	16.05	16.15	16.30	16.36	15.91	15.32	15.38	14.93
			36@0	16.19	16.20	16.10	16.19	16.24	16.12	15.08	15.13	15.01
			36@20	16.20	16.21	16.15	16.17	16.23	16.14	15.17	15.23	15.14
			36@39	16.17	16.20	16.14	16.21	16.24	16.16	15.21	15.17	15.16
			75@0	16.20	16.24	16.15	16.22	16.27	16.20	15.22	15.28	15.20
Band	Bandwidth (MHz)	RB	18700	18900	19100	18700	18900	19100	18700	18900	19100	
			1860	1880	1900	1860	1880	1900	1860	1880	1900	
2	20	1@0	1860	1880	1900	1860	1880	1900	1860	1880	1900	
			16.09	16.15	16.05	16.09	16.37	15.95	15.09	15.37	14.95	
			1@49	16.62	16.31	16.20	16.30	16.56	16.12	15.30	15.58	15.12
			1@99	16.17	16.10	15.96	16.12	16.41	15.87	15.14	15.41	14.87
			50@0	16.16	16.30	16.25	16.26	16.49	16.44	15.15	15.49	15.44
			50@24	16.18	16.28	16.29	16.31	16.46	16.43	15.31	15.46	15.43
			50@50	16.43	16.27	16.00	16.53	16.42	16.16	15.53	15.35	15.16
			100@0	16.25	16.32	16.13	16.42	16.38	16.28	15.42	15.39	15.28

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-SAR-IEEE Std 1528-2013-V1.1

➤ **LTE Band 4 (Power Reduction form Receiver ON)**

Conducted Power(dBm)											
Modulation			QPSK			16QAM			64QAM		
Band	Bandwidth (MHz)	RB	19957	20175	20393	19957	20175	20393	19957	20175	20393
			1710.7	1732.5	1754.3	1710.7	1732.5	1754.3	1710.7	1732.5	1754.3
4	1.4	1@0	16.68	16.69	16.86	16.58	16.75	16.69	15.58	15.75	15.69
		1@3	16.79	16.72	16.91	16.76	16.82	16.83	15.76	15.84	15.83
		1@5	16.68	16.62	16.80	16.64	16.69	16.75	15.64	15.73	15.75
		3@0	16.94	16.95	17.07	16.83	16.76	16.93	15.83	15.66	15.93
		3@1	16.86	16.95	17.06	16.80	16.79	16.91	15.80	15.79	15.91
		3@3	16.94	16.97	17.03	16.90	16.75	16.88	15.90	15.68	15.88
		6@0	16.76	16.81	16.88	16.71	16.97	16.84	15.71	15.98	15.84
Band	Bandwidth (MHz)	RB	19965	20175	20385	19965	20175	20385	19965	20175	20385
			1711.5	1732.5	1753.5	1711.5	1732.5	1753.5	1711.5	1732.5	1753.5
4	3	1@0	16.54	16.57	16.67	16.60	16.65	16.43	15.60	15.65	15.43
		1@8	16.67	16.75	16.82	16.76	16.68	16.64	15.76	15.68	15.64
		1@14	16.57	16.66	16.71	16.70	16.56	16.52	15.72	15.58	15.54
		8@0	16.70	16.76	16.88	16.93	16.90	16.97	15.93	15.90	15.97
		8@4	16.77	16.74	16.89	16.92	16.84	16.95	15.92	15.84	15.95
		8@7	16.83	16.83	16.98	16.97	16.95	17.03	15.97	15.88	16.04
		15@0	16.87	16.85	16.94	16.97	16.87	16.94	15.97	15.88	15.94
Band	Bandwidth (MHz)	RB	19975	20175	20375	19975	20175	20375	19975	20175	20375
			1712.5	1732.5	1752.5	1712.5	1732.5	1752.5	1712.5	1732.5	1752.5
4	5	1@0	16.92	16.93	16.98	16.91	17.09	16.93	15.91	16.09	15.93
		1@12	17.02	17.06	17.08	17.01	17.19	17.07	15.91	16.21	16.00
		1@24	16.91	16.90	16.97	16.94	17.04	16.97	15.96	16.08	15.98
		12@0	16.88	16.95	17.00	17.00	17.08	17.09	16.04	16.09	16.09
		12@7	16.92	16.95	17.02	17.06	17.07	17.04	15.96	16.07	16.04
		12@13	16.97	16.98	17.04	17.03	17.17	17.15	16.03	16.17	16.15
		25@0	16.96	16.97	17.03	17.08	17.07	17.22	16.08	16.08	16.22
Band	Bandwidth (MHz)	RB	20000	20175	20350	20000	20175	20350	20000	20175	20350
			1715	1732.5	1750	1715	1732.5	1750	1715	1732.5	1750
4	10	1@0	16.88	16.98	17.04	16.98	16.99	16.74	15.98	15.99	15.74
		1@25	17.02	17.04	17.15	17.11	17.00	16.88	16.11	16.00	15.88
		1@49	16.97	16.99	17.08	17.09	16.95	16.86	16.11	15.97	15.88
		25@0	16.92	16.91	16.99	17.02	17.04	17.13	15.91	15.93	16.02
		25@12	16.95	16.94	16.98	17.06	17.03	17.14	16.06	16.03	16.14
		25@25	16.98	17.05	17.00	17.18	17.19	17.21	16.18	16.12	16.21
		50@0	17.02	17.03	17.12	17.13	17.21	17.13	16.13	16.22	16.13
Band	Bandwidth (MHz)	RB	20025	20175	20325	20025	20175	20325	20025	20175	20325
			1717.5	1732.5	1747.5	1717.5	1732.5	1747.5	1717.5	1732.5	1747.5
4	15	1@0	16.91	16.84	16.97	16.98	17.04	16.74	15.98	16.04	15.74
		1@37	17.06	16.94	17.11	17.12	17.22	16.84	16.12	16.22	15.84
		1@74	16.93	16.84	17.05	17.04	17.03	16.85	16.06	16.05	15.87
		36@0	16.85	16.87	16.96	16.87	16.95	16.96	15.76	15.84	15.85
		36@20	16.92	16.88	16.96	16.90	16.87	16.96	15.90	15.87	15.96
		36@39	16.92	16.86	16.95	16.85	16.89	16.94	15.85	15.82	15.94
		75@0	16.89	16.90	16.92	16.92	17.04	17.02	15.92	16.05	16.02
Band	Bandwidth (MHz)	RB	20050	20175	20300	20050	20175	20300	20050	20175	20300
			1720	1732.5	1745	1720	1732.5	1745	1720	1732.5	1745
4	20	1@0	17.11	16.81	16.78	16.81	17.11	16.64	15.81	16.11	15.64
		1@50	17.31	17.01	17.02	17.06	17.25	16.91	16.06	16.27	15.91
		1@99	17.18	16.92	16.92	16.89	17.14	16.75	15.91	16.03	15.75
		50@0	16.92	16.92	16.96	17.07	17.09	17.14	15.96	16.09	16.14
		50@25	16.94	16.91	16.99	17.05	17.04	17.11	16.05	16.04	16.11
		50@50	17.14	17.09	17.05	17.28	17.21	17.18	16.28	16.14	16.18
		100@0	17.09	17.06	16.97	17.16	17.15	17.11	16.16	16.16	16.11

➤ **LTE Band 7 (Power Reduction form Receiver ON)**

Conducted Power(dBm)											
Band	Modulation		QPSK			16QAM			64QAM		
	Bandwidth (MHz)	RB	20775	21100	21425	20775	21100	21425	20775	21100	21425
7	5	1@0	15.18	15.34	15.27	15.14	15.28	15.42	14.14	14.28	14.42
		1@12	15.29	15.45	15.37	15.26	15.35	15.49	14.26	14.35	14.49
		1@24	15.14	15.30	15.35	15.13	15.23	15.46	14.13	14.23	14.46
		12@0	15.20	15.32	15.37	15.18	15.27	15.41	14.18	14.27	14.41
		12@7	15.15	15.26	15.34	15.22	15.31	15.46	14.22	14.31	14.48
		12@13	15.11	15.24	15.34	15.23	15.30	15.42	14.23	14.30	14.42
		25@0	15.16	15.29	15.37	15.31	15.39	15.44	14.32	14.40	14.44
Band	Bandwidth (MHz)	RB	20800	21100	21400	20800	21100	21400	20800	21100	21400
			2505	2535	2565	2505	2535	2565	2505	2535	2565
7	10	1@0	15.23	15.34	15.44	15.25	15.36	15.35	14.25	14.36	14.35
		1@25	15.25	15.36	15.40	15.34	15.41	15.31	14.34	14.41	14.32
		1@49	15.27	15.39	15.42	15.30	15.43	15.29	14.30	14.43	14.31
		25@0	15.13	15.32	15.38	15.25	15.42	15.50	14.25	14.42	14.50
		25@12	15.18	15.32	15.40	15.28	15.38	15.47	14.27	14.38	14.46
		25@25	15.24	15.34	15.32	15.32	15.42	15.47	14.32	14.35	14.48
		50@0	15.27	15.37	15.41	15.37	15.41	15.49	14.37	14.42	14.49
Band	Bandwidth (MHz)	RB	20825	21100	21375	20825	21100	21375	20825	21100	21375
			2507.5	2535	2562.5	2507.5	2535	2562.5	2507.5	2535	2562.5
7	15	1@0	15.16	15.26	15.27	15.23	15.30	15.44	14.23	14.30	14.44
		1@37	15.28	15.44	15.37	15.33	15.47	15.41	14.33	14.49	14.34
		1@74	15.23	15.36	15.25	15.23	15.37	15.42	14.23	14.41	14.43
		36@0	15.13	15.32	15.35	15.11	15.28	15.32	14.11	14.29	14.32
		36@20	15.16	15.30	15.32	15.12	15.30	15.31	14.02	14.30	14.31
		36@39	15.12	15.26	15.33	15.11	15.27	15.31	14.11	14.27	14.31
		75@0	15.12	15.27	15.31	15.12	15.33	15.42	14.12	14.34	14.42
Band	Bandwidth (MHz)	RB	20850	21100	21350	20850	21100	21350	20850	21100	21350
			2510	2535	2560	2510	2535	2560	2510	2535	2560
7	20	1@0	15.06	15.18	15.26	15.03	15.15	15.42	14.03	14.15	14.42
		1@49	15.31	15.42	15.53	15.24	15.37	15.43	14.24	14.37	14.39
		1@99	15.16	15.30	15.25	15.09	15.26	15.45	14.11	14.28	14.47
		50@0	15.16	15.30	15.42	15.25	15.38	15.47	14.27	14.27	14.36
		50@24	15.19	15.37	15.37	15.22	15.39	15.42	14.11	14.38	14.39
		50@50	15.36	15.35	15.41	15.40	15.42	15.51	14.39	14.35	14.51
		100@0	15.26	15.37	15.38	15.32	15.38	15.46	14.32	14.39	14.46

➤ **LTE Band 7 (Power Reduction form Hotspot ON)**

Conducted Power(dBm)											
Modulation			QPSK			16QAM			64QAM		
Band	Bandwidth (MHz)	RB	20775	21100	21425	20775	21100	21425	20775	21100	21425
			2502.5	2535	2567.5	2502.5	2535	2567.5	2502.5	2535	2567.5
7	5	1@0	19.67	19.71	19.80	19.58	19.82	19.74	19.65	19.83	19.72
		1@12	19.75	19.86	19.93	19.67	19.90	19.91	19.64	19.96	19.91
		1@24	19.64	19.72	19.83	19.56	19.82	19.74	19.62	19.86	19.74
		12@0	19.62	19.81	19.86	19.58	19.83	19.89	19.61	19.80	19.89
		12@7	19.64	19.79	19.84	19.64	19.83	19.88	19.65	19.82	19.86
		12@13	19.63	19.74	19.78	19.62	19.78	19.82	19.63	19.78	19.86
		25@0	19.62	19.78	19.88	19.68	19.78	19.93	19.71	19.80	19.92
Band	Bandwidth (MHz)	RB	20800	21100	21400	20800	21100	21400	20800	21100	21400
			2505	2535	2565	2505	2535	2565	2505	2535	2565
7	10	1@0	19.67	19.80	19.97	19.71	19.81	19.82	19.70	19.69	19.69
		1@25	19.72	19.83	19.90	19.73	19.90	19.76	19.75	19.73	19.65
		1@49	19.72	19.85	19.89	19.78	19.92	19.76	19.76	19.74	19.68
		25@0	19.67	19.82	19.88	19.70	19.83	19.92	19.71	19.86	19.96
		25@12	19.66	19.79	19.85	19.69	19.80	19.93	19.67	19.85	19.97
		25@25	19.73	19.80	19.87	19.75	19.81	19.95	19.75	19.84	19.95
		50@0	19.73	19.83	19.91	19.79	19.89	19.99	19.79	19.90	19.90
Band	Bandwidth (MHz)	RB	20825	21100	21375	20825	21100	21375	20825	21100	21375
			2507.5	2535	2562.5	2507.5	2535	2562.5	2507.5	2535	2562.5
7	15	1@0	19.61	19.71	19.91	19.66	19.86	19.61	19.63	19.83	19.60
		1@37	19.72	19.85	20.02	19.77	19.94	19.74	19.78	19.98	19.70
		1@74	19.62	19.69	19.85	19.66	19.85	19.56	19.67	19.87	19.55
		36@0	19.61	19.77	19.85	19.62	19.75	19.86	19.63	19.82	19.89
		36@20	19.59	19.81	19.84	19.61	19.76	19.82	19.64	19.80	19.85
		36@39	19.63	19.78	19.83	19.59	19.78	19.87	19.68	19.75	19.88
		75@0	19.63	19.82	19.84	19.61	19.86	19.84	19.64	19.82	19.81
Band	Bandwidth (MHz)	RB	20850	21100	21350	20850	21100	21350	20850	21100	21350
			2510	2535	2560	2510	2535	2560	2510	2535	2560
7	20	1@0	19.53	19.64	20.01	19.46	19.85	19.50	19.38	19.79	19.56
		1@49	19.83	19.88	20.03	19.75	19.99	19.73	19.69	20.02	19.80
		1@99	19.63	19.71	19.67	19.56	19.86	19.52	19.47	19.89	19.52
		50@0	19.57	19.77	19.92	19.61	19.84	19.87	19.62	19.83	19.94
		50@24	19.60	19.78	19.78	19.64	19.83	19.89	19.63	19.79	19.88
		50@50	19.78	19.76	19.89	19.82	19.83	19.91	19.78	19.81	19.97
		100@0	19.68	19.81	19.80	19.67	19.84	19.84	19.69	19.83	19.89

➤ **LTE Band 7 (Power Reduction form Sensor ON)**

Conducted Power(dBm)											
Modulation			QPSK			16QAM			64QAM		
Band	Bandwidth (MHz)	RB	20775	21100	21425	20775	21100	21425	20775	21100	21425
			2502.5	2535	2567.5	2502.5	2535	2567.5	2502.5	2535	2567.5
7	5	1@0	18.21	18.35	18.31	18.14	18.26	18.39	17.14	17.26	17.39
		1@12	18.29	18.46	18.42	18.26	18.37	18.55	17.26	17.37	17.55
		1@24	18.17	18.28	18.30	18.14	18.26	18.43	17.14	17.26	17.32
		12@0	18.19	18.32	18.37	18.15	18.31	18.41	17.15	17.31	17.41
		12@7	18.18	18.24	18.33	18.14	18.27	18.40	17.14	17.27	17.42
		12@13	18.14	18.26	18.32	18.20	18.26	18.40	17.20	17.26	17.40
		25@0	18.14	18.29	18.35	18.22	18.36	18.37	17.22	17.37	17.37
Band	Bandwidth (MHz)	RB	20800	21100	21400	20800	21100	21400	20800	21100	21400
			2505	2535	2565	2505	2535	2565	2505	2535	2565
7	10	1@0	18.19	18.35	18.44	18.24	18.37	18.34	17.24	17.37	17.34
		1@25	18.22	18.37	18.38	18.29	18.41	18.30	17.29	17.40	17.31
		1@49	18.28	18.36	18.39	18.29	18.42	18.24	17.29	17.44	17.26
		25@0	18.16	18.33	18.38	18.23	18.39	18.44	17.23	17.40	17.44
		25@12	18.16	18.31	18.39	18.22	18.36	18.46	17.21	17.38	17.45
		25@25	18.24	18.33	18.32	18.29	18.37	18.42	17.29	17.30	17.43
		50@0	18.24	18.39	18.38	18.29	18.39	18.45	17.29	17.40	17.44
Band	Bandwidth (MHz)	RB	20825	21100	21375	20825	21100	21375	20825	21100	21375
			2507.5	2535	2562.5	2507.5	2535	2562.5	2507.5	2535	2562.5
7	15	1@0	18.09	18.27	18.25	18.17	18.27	18.50	17.17	17.27	17.50
		1@37	18.29	18.38	18.41	18.33	18.38	18.53	17.35	17.40	17.46
		1@74	18.24	18.32	18.26	18.24	18.38	18.43	17.28	17.42	17.44
		36@0	18.19	18.30	18.34	18.15	18.27	18.32	17.16	17.28	17.32
		36@20	18.18	18.27	18.34	18.17	18.33	18.35	17.19	17.33	17.35
		36@39	18.19	18.29	18.32	18.18	18.31	18.37	17.18	17.31	17.37
		75@0	18.15	18.29	18.36	18.16	18.29	18.37	17.16	17.30	17.37
Band	Bandwidth (MHz)	RB	20850	21100	21350	20850	21100	21350	20850	21100	21350
			2510	2535	2560	2510	2535	2560	2510	2535	2560
7	20	1@0	18.08	18.18	18.29	17.97	18.09	18.44	16.97	17.09	17.44
		1@49	18.27	18.36	18.67	18.29	18.32	18.47	17.29	17.33	17.47
		1@99	18.17	18.36	18.31	18.09	18.28	18.43	17.11	17.30	17.32
		50@0	18.09	18.29	18.37	18.15	18.28	18.36	17.17	17.30	17.36
		50@24	18.18	18.26	18.36	18.14	18.30	18.40	17.03	17.32	17.40
		50@50	18.35	18.31	18.35	18.37	18.35	18.41	17.37	17.24	17.41
		100@0	18.21	18.27	18.35	18.25	18.32	18.38	17.25	17.33	17.38

➤ **LTE Band 66 (Power Reduction form Receiver ON)**

Conducted Power(dBm)											
Modulation			QPSK			16QAM			64QAM		
Band	Bandwidth (MHz)	RB	131979	132322	132665	131979	132322	132665	131979	132322	132665
			1710.7	1745	1779.3	1710.7	1745	1779.3	1710.7	1745	1779.3
66	1.4	1@0	17.81	17.89	17.96	17.91	17.94	17.89	16.91	16.94	16.89
		1@3	17.87	17.93	17.97	18.07	18.08	18.00	17.07	17.10	17.00
		1@5	17.85	17.91	18.00	17.90	17.90	17.91	16.90	16.90	16.91
		3@0	18.16	18.19	18.19	17.96	18.04	18.04	16.98	16.97	17.06
		3@1	18.12	18.18	18.17	17.99	17.98	18.05	17.03	16.99	17.09
		3@3	18.06	18.18	18.21	17.98	17.95	18.01	16.98	16.88	17.01
		6@0	17.96	18.06	18.03	18.11	18.17	17.99	17.11	17.18	16.89
Band	Bandwidth (MHz)	RB	131987	132322	132657	131987	132322	132657	131987	132322	132657
			1711.5	1745	1778.5	1711.5	1745	1778.5	1711.5	1745	1778.5
66	3	1@0	17.72	17.81	17.84	17.75	17.82	17.60	16.75	16.82	16.60
		1@8	17.84	17.95	17.91	17.93	17.82	17.74	16.93	16.82	16.74
		1@14	17.71	17.82	17.87	17.88	17.74	17.61	16.81	16.76	16.63
		8@0	17.91	17.99	17.98	18.07	18.09	18.06	17.08	17.09	17.06
		8@4	17.92	17.99	17.96	18.08	18.11	18.08	17.08	17.11	17.01
		8@7	18.04	18.06	18.10	18.13	18.09	18.16	17.13	17.02	17.17
		15@0	18.03	18.09	18.03	18.14	18.10	18.07	17.14	17.11	17.08
Band	Bandwidth (MHz)	RB	131997	132322	132647	131997	132322	132647	131997	132322	132647
			1712.5	1745	1777.5	1712.5	1745	1777.5	1712.5	1745	1777.5
66	5	1@0	18.11	18.10	18.10	18.13	18.29	18.10	17.13	17.29	17.10
		1@12	18.22	18.22	18.24	18.26	18.39	18.23	17.16	17.41	17.16
		1@24	18.15	18.08	18.08	18.16	18.28	18.10	17.16	17.32	17.11
		12@0	18.09	18.17	18.11	18.20	18.30	18.26	17.13	17.30	17.30
		12@7	18.11	18.13	18.12	18.19	18.25	18.24	17.20	17.18	17.25
		12@13	18.17	18.11	18.09	18.27	18.31	18.25	17.27	17.32	17.25
		25@0	18.13	18.13	18.15	18.31	18.25	18.30	17.31	17.26	17.30
Band	Bandwidth (MHz)	RB	132022	132322	132622	132022	132322	132622	132022	132322	132622
			1715	1745	1775	1715	1745	1775	1715	1745	1775
66	10	1@0	18.12	18.15	18.18	18.24	18.18	18.00	17.24	17.18	17.00
		1@25	18.23	18.22	18.21	18.36	18.19	18.03	17.40	17.19	16.92
		1@49	18.17	18.20	18.22	18.33	18.13	17.99	17.34	17.15	16.99
		25@0	18.05	18.14	18.14	18.23	18.28	18.35	17.12	17.17	17.24
		25@12	18.10	18.16	18.14	18.28	18.28	18.29	17.28	17.28	17.29
		25@25	18.21	18.20	18.14	18.37	18.34	18.24	17.37	17.27	17.24
		50@0	18.20	18.19	18.18	18.39	18.37	18.28	17.39	17.38	17.28
Band	Bandwidth (MHz)	RB	132047	132322	132597	132047	132322	132597	132047	132322	132597
			1717.5	1745	1772.5	1717.5	1745	1772.5	1717.5	1745	1772.5
66	15	1@0	18.08	18.01	18.14	18.22	18.29	17.93	17.22	17.29	16.82
		1@37	18.25	18.12	18.23	18.33	18.35	17.99	17.33	17.35	16.99
		1@74	18.08	18.02	18.17	18.23	18.31	17.94	17.25	17.20	16.96
		36@0	18.10	18.15	18.11	18.09	18.18	18.08	17.11	17.18	17.08
		36@20	18.13	18.20	18.07	18.09	18.14	18.07	16.98	17.14	17.07
		36@39	18.04	18.15	18.06	18.11	18.16	18.11	17.11	17.09	17.11
		75@0	18.13	18.17	18.08	18.10	18.20	18.16	17.10	17.21	17.16
Band	Bandwidth (MHz)	RB	132072	132322	132572	132072	132322	132572	132072	132322	132572
			1720	1745	1770	1720	1745	1770	1720	1745	1770
66	20	1@0	17.98	18.03	17.98	18.04	18.26	17.87	17.04	17.26	16.90
		1@50	18.48	18.25	18.20	18.22	18.47	18.10	17.23	17.38	17.10
		1@99	18.05	18.03	17.99	18.07	18.36	17.86	17.09	17.38	16.88
		50@0	18.16	18.14	18.21	18.26	18.27	18.38	17.15	17.16	17.27
		50@25	18.14	18.16	18.20	18.28	18.31	18.37	17.28	17.31	17.37
		50@50	18.23	18.17	18.11	18.44	18.31	18.32	17.44	17.20	17.36
		100@0	18.15	18.16	18.18	18.35	18.27	18.27	17.35	17.28	17.27

➤ LTE CA_7C(Power Reduction form Receiver ON)

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)
7-7	10MHz-20MHz	QPSK-QPSK	20805-20949	1RB#0-0RB#0	15.31
7-7	10MHz-20MHz	QPSK-QPSK	20805-20949	1RB#0-1RB#99	14.79
7-7	10MHz-20MHz	QPSK-QPSK	20805-20949	1RB#49-0RB#0	15.43
7-7	10MHz-20MHz	QPSK-QPSK	20805-20949	12RB#0-0RB#0	15.36
7-7	10MHz-20MHz	QPSK-QPSK	20805-20949	50RB#0-100RB#0	15.52
7-7	10MHz-20MHz	QPSK-QPSK	21006-21150	1RB#0-0RB#0	15.30
7-7	10MHz-20MHz	QPSK-QPSK	21006-21150	1RB#0-1RB#99	15.38
7-7	10MHz-20MHz	QPSK-QPSK	21006-21150	1RB#49-0RB#0	15.52
7-7	10MHz-20MHz	QPSK-QPSK	21006-21150	12RB#0-0RB#0	15.30
7-7	10MHz-20MHz	QPSK-QPSK	21006-21150	50RB#0-100RB#0	15.52
7-7	10MHz-20MHz	QPSK-QPSK	21206-21350	1RB#0-0RB#0	15.32
7-7	10MHz-20MHz	QPSK-QPSK	21206-21350	1RB#0-1RB#99	15.43
7-7	10MHz-20MHz	QPSK-QPSK	21206-21350	1RB#49-0RB#0	15.38
7-7	10MHz-20MHz	QPSK-QPSK	21206-21350	12RB#0-0RB#0	15.35
7-7	10MHz-20MHz	QPSK-QPSK	21206-21350	50RB#0-100RB#0	15.35
7-7	10MHz-20MHz	16QAM-16QAM	20805-20949	1RB#0-0RB#0	15.19
7-7	10MHz-20MHz	16QAM-16QAM	20805-20949	1RB#0-1RB#99	14.62
7-7	10MHz-20MHz	16QAM-16QAM	20805-20949	1RB#49-0RB#0	15.47
7-7	10MHz-20MHz	16QAM-16QAM	20805-20949	12RB#0-0RB#0	15.46
7-7	10MHz-20MHz	16QAM-16QAM	20805-20949	50RB#0-100RB#0	15.37
7-7	10MHz-20MHz	16QAM-16QAM	21006-21150	1RB#0-0RB#0	15.39
7-7	10MHz-20MHz	16QAM-16QAM	21006-21150	1RB#0-1RB#99	15.17
7-7	10MHz-20MHz	16QAM-16QAM	21006-21150	1RB#49-0RB#0	15.27
7-7	10MHz-20MHz	16QAM-16QAM	21006-21150	12RB#0-0RB#0	15.41
7-7	10MHz-20MHz	16QAM-16QAM	21006-21150	50RB#0-100RB#0	15.34
7-7	10MHz-20MHz	16QAM-16QAM	21206-21350	1RB#0-0RB#0	15.36
7-7	10MHz-20MHz	16QAM-16QAM	21206-21350	1RB#0-1RB#99	14.74
7-7	10MHz-20MHz	16QAM-16QAM	21206-21350	1RB#49-0RB#0	15.43
7-7	10MHz-20MHz	16QAM-16QAM	21206-21350	12RB#0-0RB#0	15.36
7-7	10MHz-20MHz	16QAM-16QAM	21206-21350	50RB#0-100RB#0	15.46
7-7	15MHz-10MHz	QPSK-QPSK	20825-20945	1RB#0-0RB#0	15.43
7-7	15MHz-10MHz	QPSK-QPSK	20825-20945	1RB#0-1RB#49	14.93
7-7	15MHz-10MHz	QPSK-QPSK	20825-20945	1RB#74-0RB#0	15.51
7-7	15MHz-10MHz	QPSK-QPSK	20825-20945	16RB#0-0RB#0	15.45
7-7	15MHz-10MHz	QPSK-QPSK	20825-20945	75RB#0-50RB#0	15.36
7-7	15MHz-10MHz	QPSK-QPSK	21051-21171	1RB#0-0RB#0	15.38
7-7	15MHz-10MHz	QPSK-QPSK	21051-21171	1RB#0-1RB#49	15.49
7-7	15MHz-10MHz	QPSK-QPSK	21051-21171	1RB#74-0RB#0	15.42
7-7	15MHz-10MHz	QPSK-QPSK	21051-21171	16RB#0-0RB#0	15.45
7-7	15MHz-10MHz	QPSK-QPSK	21051-21171	75RB#0-50RB#0	15.36
7-7	15MHz-10MHz	QPSK-QPSK	21277-21397	1RB#0-0RB#0	15.40
7-7	15MHz-10MHz	QPSK-QPSK	21277-21397	1RB#0-1RB#49	15.46
7-7	15MHz-10MHz	QPSK-QPSK	21277-21397	1RB#74-0RB#0	15.47
7-7	15MHz-10MHz	QPSK-QPSK	21277-21397	16RB#0-0RB#0	15.51
7-7	15MHz-10MHz	QPSK-QPSK	21277-21397	75RB#0-50RB#0	15.34
7-7	15MHz-10MHz	16QAM-16QAM	20825-20945	1RB#0-0RB#0	15.24
7-7	15MHz-10MHz	16QAM-16QAM	20825-20945	1RB#0-1RB#49	15.42
7-7	15MHz-10MHz	16QAM-16QAM	20825-20945	1RB#74-0RB#0	15.33
7-7	15MHz-10MHz	16QAM-16QAM	20825-20945	16RB#0-0RB#0	15.33
7-7	15MHz-10MHz	16QAM-16QAM	20825-20945	75RB#0-50RB#0	15.39
7-7	15MHz-10MHz	16QAM-16QAM	21051-21171	1RB#0-0RB#0	15.43
7-7	15MHz-10MHz	16QAM-16QAM	21051-21171	1RB#0-1RB#49	14.84
7-7	15MHz-10MHz	16QAM-16QAM	21051-21171	1RB#74-0RB#0	15.51
7-7	15MHz-10MHz	16QAM-16QAM	21051-21171	16RB#0-0RB#0	15.47
7-7	15MHz-10MHz	16QAM-16QAM	21051-21171	75RB#0-50RB#0	15.52
7-7	15MHz-10MHz	16QAM-16QAM	21277-21397	1RB#0-0RB#0	15.43
7-7	15MHz-10MHz	16QAM-16QAM	21277-21397	1RB#0-1RB#49	15.06
7-7	15MHz-10MHz	16QAM-16QAM	21277-21397	1RB#74-0RB#0	15.43
7-7	15MHz-10MHz	16QAM-16QAM	21277-21397	16RB#0-0RB#0	15.36
7-7	15MHz-10MHz	16QAM-16QAM	21277-21397	75RB#0-50RB#0	15.51
7-7	15MHz-15MHz	QPSK-QPSK	20825-20975	1RB#0-0RB#0	15.32

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-SAR-IEEE Std 1528-2013-V1.1

7-7	15MHz-15MHz	QPSK-QPSK	20825-20975	1RB#0-1RB#74	14.86
7-7	15MHz-15MHz	QPSK-QPSK	20825-20975	1RB#74-0RB#0	15.49
7-7	15MHz-15MHz	QPSK-QPSK	20825-20975	16RB#0-0RB#0	15.36
7-7	15MHz-15MHz	QPSK-QPSK	20825-20975	75RB#0-75RB#0	15.51
7-7	15MHz-15MHz	QPSK-QPSK	21025-21175	1RB#0-0RB#0	15.31
7-7	15MHz-15MHz	QPSK-QPSK	21025-21175	1RB#0-1RB#74	15.33
7-7	15MHz-15MHz	QPSK-QPSK	21025-21175	1RB#74-0RB#0	15.21
7-7	15MHz-15MHz	QPSK-QPSK	21025-21175	16RB#0-0RB#0	15.32
7-7	15MHz-15MHz	QPSK-QPSK	21025-21175	75RB#0-75RB#0	15.47
7-7	15MHz-15MHz	QPSK-QPSK	21225-21375	1RB#0-0RB#0	15.36
7-7	15MHz-15MHz	QPSK-QPSK	21225-21375	1RB#0-1RB#74	15.33
7-7	15MHz-15MHz	QPSK-QPSK	21225-21375	1RB#74-0RB#0	15.36
7-7	15MHz-15MHz	QPSK-QPSK	21225-21375	16RB#0-0RB#0	15.42
7-7	15MHz-15MHz	QPSK-QPSK	21225-21375	75RB#0-75RB#0	15.35
7-7	15MHz-15MHz	16QAM-16QAM	20825-20975	1RB#0-0RB#0	15.38
7-7	15MHz-15MHz	16QAM-16QAM	20825-20975	1RB#0-1RB#74	14.93
7-7	15MHz-15MHz	16QAM-16QAM	20825-20975	1RB#74-0RB#0	15.38
7-7	15MHz-15MHz	16QAM-16QAM	20825-20975	16RB#0-0RB#0	15.41
7-7	15MHz-15MHz	16QAM-16QAM	20825-20975	75RB#0-75RB#0	15.44
7-7	15MHz-15MHz	16QAM-16QAM	21025-21175	1RB#0-0RB#0	15.46
7-7	15MHz-15MHz	16QAM-16QAM	21025-21175	1RB#0-1RB#74	15.18
7-7	15MHz-15MHz	16QAM-16QAM	21025-21175	1RB#74-0RB#0	15.31
7-7	15MHz-15MHz	16QAM-16QAM	21025-21175	16RB#0-0RB#0	15.47
7-7	15MHz-15MHz	16QAM-16QAM	21025-21175	75RB#0-75RB#0	15.50
7-7	15MHz-15MHz	16QAM-16QAM	21225-21375	1RB#0-0RB#0	15.36
7-7	15MHz-15MHz	16QAM-16QAM	21225-21375	1RB#0-1RB#74	14.78
7-7	15MHz-15MHz	16QAM-16QAM	21225-21375	1RB#74-0RB#0	15.34
7-7	15MHz-15MHz	16QAM-16QAM	21225-21375	16RB#0-0RB#0	15.44
7-7	15MHz-15MHz	16QAM-16QAM	21225-21375	75RB#0-75RB#0	15.51
7-7	15MHz-20MHz	QPSK-QPSK	20828-20999	1RB#0-0RB#0	15.27
7-7	15MHz-20MHz	QPSK-QPSK	20828-20999	1RB#0-1RB#99	14.77
7-7	15MHz-20MHz	QPSK-QPSK	20828-20999	1RB#74-0RB#0	15.32
7-7	15MHz-20MHz	QPSK-QPSK	20828-20999	16RB#0-0RB#0	15.29
7-7	15MHz-20MHz	QPSK-QPSK	20828-20999	75RB#0-100RB#0	15.52
7-7	15MHz-20MHz	QPSK-QPSK	21003-21174	1RB#0-0RB#0	15.14
7-7	15MHz-20MHz	QPSK-QPSK	21003-21174	1RB#0-1RB#99	15.47
7-7	15MHz-20MHz	QPSK-QPSK	21003-21174	1RB#74-0RB#0	15.40
7-7	15MHz-20MHz	QPSK-QPSK	21003-21174	16RB#0-0RB#0	15.27
7-7	15MHz-20MHz	QPSK-QPSK	21003-21174	75RB#0-100RB#0	15.42
7-7	15MHz-20MHz	QPSK-QPSK	21179-21350	1RB#0-0RB#0	15.22
7-7	15MHz-20MHz	QPSK-QPSK	21179-21350	1RB#0-1RB#99	15.35
7-7	15MHz-20MHz	QPSK-QPSK	21179-21350	1RB#74-0RB#0	15.26
7-7	15MHz-20MHz	QPSK-QPSK	21179-21350	16RB#0-0RB#0	15.30
7-7	15MHz-20MHz	QPSK-QPSK	21179-21350	75RB#0-100RB#0	15.34
7-7	15MHz-20MHz	16QAM-16QAM	20828-20999	1RB#0-0RB#0	15.31
7-7	15MHz-20MHz	16QAM-16QAM	20828-20999	1RB#0-1RB#99	14.65
7-7	15MHz-20MHz	16QAM-16QAM	20828-20999	1RB#74-0RB#0	15.41
7-7	15MHz-20MHz	16QAM-16QAM	20828-20999	16RB#0-0RB#0	15.31
7-7	15MHz-20MHz	16QAM-16QAM	20828-20999	75RB#0-100RB#0	15.45
7-7	15MHz-20MHz	16QAM-16QAM	21003-21174	1RB#0-0RB#0	15.43
7-7	15MHz-20MHz	16QAM-16QAM	21003-21174	1RB#0-1RB#99	14.82
7-7	15MHz-20MHz	16QAM-16QAM	21003-21174	1RB#74-0RB#0	15.34
7-7	15MHz-20MHz	16QAM-16QAM	21003-21174	16RB#0-0RB#0	15.28
7-7	15MHz-20MHz	16QAM-16QAM	21003-21174	75RB#0-100RB#0	15.42
7-7	15MHz-20MHz	16QAM-16QAM	21179-21350	1RB#0-0RB#0	15.33
7-7	15MHz-20MHz	16QAM-16QAM	21179-21350	1RB#0-1RB#99	15.12
7-7	15MHz-20MHz	16QAM-16QAM	21179-21350	1RB#74-0RB#0	15.34
7-7	15MHz-20MHz	16QAM-16QAM	21179-21350	16RB#0-0RB#0	15.42
7-7	15MHz-20MHz	16QAM-16QAM	21179-21350	75RB#0-100RB#0	15.51
7-7	20MHz-10MHz	QPSK-QPSK	20850-20994	1RB#0-0RB#0	15.39
7-7	20MHz-10MHz	QPSK-QPSK	20850-20994	1RB#0-1RB#49	14.79
7-7	20MHz-10MHz	QPSK-QPSK	20850-20994	1RB#99-0RB#0	15.33
7-7	20MHz-10MHz	QPSK-QPSK	20850-20994	18RB#0-0RB#0	15.40

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-SAR-IEEE Std 1528-2013-V1.1

7-7	20MHz-10MHz	QPSK-QPSK	20850-20994	100RB#0-50RB#0	15.34
7-7	20MHz-10MHz	QPSK-QPSK	21051-21195	1RB#0-0RB#0	15.34
7-7	20MHz-10MHz	QPSK-QPSK	21051-21195	1RB#0-1RB#49	15.27
7-7	20MHz-10MHz	QPSK-QPSK	21051-21195	1RB#99-0RB#0	15.47
7-7	20MHz-10MHz	QPSK-QPSK	21051-21195	18RB#0-0RB#0	15.32
7-7	20MHz-10MHz	QPSK-QPSK	21051-21195	100RB#0-50RB#0	15.47
7-7	20MHz-10MHz	QPSK-QPSK	21251-21395	1RB#0-0RB#0	15.37
7-7	20MHz-10MHz	QPSK-QPSK	21251-21395	1RB#0-1RB#49	15.51
7-7	20MHz-10MHz	QPSK-QPSK	21251-21395	1RB#99-0RB#0	15.32
7-7	20MHz-10MHz	QPSK-QPSK	21251-21395	18RB#0-0RB#0	15.36
7-7	20MHz-10MHz	QPSK-QPSK	21251-21395	100RB#0-50RB#0	15.43
7-7	20MHz-10MHz	16QAM-16QAM	20850-20994	1RB#0-0RB#0	15.42
7-7	20MHz-10MHz	16QAM-16QAM	20850-20994	1RB#0-1RB#49	14.89
7-7	20MHz-10MHz	16QAM-16QAM	20850-20994	1RB#99-0RB#0	15.35
7-7	20MHz-10MHz	16QAM-16QAM	20850-20994	18RB#0-0RB#0	15.36
7-7	20MHz-10MHz	16QAM-16QAM	20850-20994	100RB#0-50RB#0	15.51
7-7	20MHz-10MHz	16QAM-16QAM	21051-21195	1RB#0-0RB#0	15.34
7-7	20MHz-10MHz	16QAM-16QAM	21051-21195	1RB#0-1RB#49	14.97
7-7	20MHz-10MHz	16QAM-16QAM	21051-21195	1RB#99-0RB#0	15.17
7-7	20MHz-10MHz	16QAM-16QAM	21051-21195	18RB#0-0RB#0	15.39
7-7	20MHz-10MHz	16QAM-16QAM	21051-21195	100RB#0-50RB#0	15.50
7-7	20MHz-10MHz	16QAM-16QAM	21251-21395	1RB#0-0RB#0	15.44
7-7	20MHz-10MHz	16QAM-16QAM	21251-21395	1RB#0-1RB#49	14.84
7-7	20MHz-10MHz	16QAM-16QAM	21251-21395	1RB#99-0RB#0	15.45
7-7	20MHz-10MHz	16QAM-16QAM	21251-21395	18RB#0-0RB#0	15.41
7-7	20MHz-10MHz	16QAM-16QAM	21251-21395	100RB#0-50RB#0	15.46
7-7	20MHz-15MHz	QPSK-QPSK	20850-21021	1RB#0-0RB#0	15.27
7-7	20MHz-15MHz	QPSK-QPSK	20850-21021	1RB#0-1RB#74	14.84
7-7	20MHz-15MHz	QPSK-QPSK	20850-21021	1RB#99-0RB#0	15.42
7-7	20MHz-15MHz	QPSK-QPSK	20850-21021	18RB#0-0RB#0	15.30
7-7	20MHz-15MHz	QPSK-QPSK	20850-21021	100RB#0-75RB#0	15.34
7-7	20MHz-15MHz	QPSK-QPSK	21026-21197	1RB#0-0RB#0	15.24
7-7	20MHz-15MHz	QPSK-QPSK	21026-21197	1RB#0-1RB#74	15.32
7-7	20MHz-15MHz	QPSK-QPSK	21026-21197	1RB#99-0RB#0	15.33
7-7	20MHz-15MHz	QPSK-QPSK	21026-21197	18RB#0-0RB#0	15.26
7-7	20MHz-15MHz	QPSK-QPSK	21026-21197	100RB#0-75RB#0	15.42
7-7	20MHz-15MHz	QPSK-QPSK	21201-21372	1RB#0-0RB#0	15.22
7-7	20MHz-15MHz	QPSK-QPSK	21201-21372	1RB#0-1RB#74	15.35
7-7	20MHz-15MHz	QPSK-QPSK	21201-21372	1RB#99-0RB#0	14.71
7-7	20MHz-15MHz	QPSK-QPSK	21201-21372	18RB#0-0RB#0	15.27
7-7	20MHz-15MHz	QPSK-QPSK	21201-21372	100RB#0-75RB#0	15.50
7-7	20MHz-15MHz	16QAM-16QAM	20850-21021	1RB#0-0RB#0	15.47
7-7	20MHz-15MHz	16QAM-16QAM	20850-21021	1RB#0-1RB#74	14.71
7-7	20MHz-15MHz	16QAM-16QAM	20850-21021	1RB#99-0RB#0	15.22
7-7	20MHz-15MHz	16QAM-16QAM	20850-21021	18RB#0-0RB#0	15.34
7-7	20MHz-15MHz	16QAM-16QAM	20850-21021	100RB#0-75RB#0	15.34
7-7	20MHz-15MHz	16QAM-16QAM	21026-21197	1RB#0-0RB#0	15.37
7-7	20MHz-15MHz	16QAM-16QAM	21026-21197	1RB#0-1RB#74	14.75
7-7	20MHz-15MHz	16QAM-16QAM	21026-21197	1RB#99-0RB#0	15.43
7-7	20MHz-15MHz	16QAM-16QAM	21026-21197	18RB#0-0RB#0	15.21
7-7	20MHz-15MHz	16QAM-16QAM	21026-21197	100RB#0-75RB#0	15.44
7-7	20MHz-15MHz	16QAM-16QAM	21201-21372	1RB#0-0RB#0	15.39
7-7	20MHz-15MHz	16QAM-16QAM	21201-21372	1RB#0-1RB#74	14.95
7-7	20MHz-15MHz	16QAM-16QAM	21201-21372	1RB#99-0RB#0	15.21
7-7	20MHz-15MHz	16QAM-16QAM	21201-21372	18RB#0-0RB#0	15.36
7-7	20MHz-15MHz	16QAM-16QAM	21201-21372	100RB#0-75RB#0	15.52
7-7	20MHz-20MHz	QPSK-QPSK	20850-21048	1RB#0-0RB#0	15.01
7-7	20MHz-20MHz	QPSK-QPSK	20850-21048	1RB#0-1RB#99	14.46
7-7	20MHz-20MHz	QPSK-QPSK	20850-21048	1RB#99-0RB#0	15.43
7-7	20MHz-20MHz	QPSK-QPSK	20850-21048	18RB#0-0RB#0	15.10
7-7	20MHz-20MHz	QPSK-QPSK	20850-21048	100RB#0-100RB#0	15.36
7-7	20MHz-20MHz	QPSK-QPSK	21001-21199	1RB#0-0RB#0	15.05
7-7	20MHz-20MHz	QPSK-QPSK	21001-21199	1RB#0-1RB#99	15.44

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-SAR-IEEE Std 1528-2013-V1.1

7-7	20MHz-20MHz	QPSK-QPSK	21001-21199	1RB#99-0RB#0	15.34
7-7	20MHz-20MHz	QPSK-QPSK	21001-21199	18RB#0-0RB#0	15.11
7-7	20MHz-20MHz	QPSK-QPSK	21001-21199	100RB#0-100RB#0	15.35
7-7	20MHz-20MHz	QPSK-QPSK	21152-21350	1RB#0-0RB#0	15.11
7-7	20MHz-20MHz	QPSK-QPSK	21152-21350	1RB#0-1RB#99	15.32
7-7	20MHz-20MHz	QPSK-QPSK	21152-21350	1RB#99-0RB#0	15.34
7-7	20MHz-20MHz	QPSK-QPSK	21152-21350	18RB#0-0RB#0	15.10
7-7	20MHz-20MHz	QPSK-QPSK	21152-21350	100RB#0-100RB#0	15.44
7-7	20MHz-20MHz	16QAM-16QAM	20850-21048	1RB#0-0RB#0	15.19
7-7	20MHz-20MHz	16QAM-16QAM	20850-21048	1RB#0-1RB#99	14.56
7-7	20MHz-20MHz	16QAM-16QAM	20850-21048	1RB#99-0RB#0	15.41
7-7	20MHz-20MHz	16QAM-16QAM	20850-21048	18RB#0-0RB#0	15.02
7-7	20MHz-20MHz	16QAM-16QAM	20850-21048	100RB#0-100RB#0	15.38
7-7	20MHz-20MHz	16QAM-16QAM	21001-21199	1RB#0-0RB#0	15.36
7-7	20MHz-20MHz	16QAM-16QAM	21001-21199	1RB#0-1RB#99	14.79
7-7	20MHz-20MHz	16QAM-16QAM	21001-21199	1RB#99-0RB#0	15.29
7-7	20MHz-20MHz	16QAM-16QAM	21001-21199	18RB#0-0RB#0	15.19
7-7	20MHz-20MHz	16QAM-16QAM	21001-21199	100RB#0-100RB#0	15.35
7-7	20MHz-20MHz	16QAM-16QAM	21152-21350	1RB#0-0RB#0	15.31
7-7	20MHz-20MHz	16QAM-16QAM	21152-21350	1RB#0-1RB#99	14.62
7-7	20MHz-20MHz	16QAM-16QAM	21152-21350	1RB#99-0RB#0	15.34
7-7	20MHz-20MHz	16QAM-16QAM	21152-21350	18RB#0-0RB#0	15.16
7-7	20MHz-20MHz	16QAM-16QAM	21152-21350	100RB#0-100RB#0	15.47
Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)
7-7	10MHz-20MHz	64QAM-64QAM	20805-20949	1RB#0-0RB#0	15.37
7-7	10MHz-20MHz	64QAM-64QAM	20805-20949	1RB#0-1RB#99	15.21
7-7	10MHz-20MHz	64QAM-64QAM	20805-20949	1RB#49-0RB#0	15.24
7-7	10MHz-20MHz	64QAM-64QAM	20805-20949	12RB#0-0RB#0	15.33
7-7	10MHz-20MHz	64QAM-64QAM	20805-20949	50RB#0-100RB#0	15.36
7-7	10MHz-20MHz	64QAM-64QAM	21006-21150	1RB#0-0RB#0	15.40
7-7	10MHz-20MHz	64QAM-64QAM	21006-21150	1RB#0-1RB#99	15.33
7-7	10MHz-20MHz	64QAM-64QAM	21006-21150	1RB#49-0RB#0	15.46
7-7	10MHz-20MHz	64QAM-64QAM	21006-21150	12RB#0-0RB#0	15.42
7-7	10MHz-20MHz	64QAM-64QAM	21006-21150	50RB#0-100RB#0	15.49
7-7	10MHz-20MHz	64QAM-64QAM	21206-21350	1RB#0-0RB#0	15.31
7-7	10MHz-20MHz	64QAM-64QAM	21206-21350	1RB#0-1RB#99	15.44
7-7	10MHz-20MHz	64QAM-64QAM	21206-21350	1RB#49-0RB#0	15.46
7-7	10MHz-20MHz	64QAM-64QAM	21206-21350	12RB#0-0RB#0	15.47
7-7	10MHz-20MHz	64QAM-64QAM	21206-21350	50RB#0-100RB#0	15.24
7-7	15MHz-10MHz	64QAM-64QAM	20825-20945	1RB#0-0RB#0	15.50
7-7	15MHz-10MHz	64QAM-64QAM	20825-20945	1RB#0-1RB#49	15.03
7-7	15MHz-10MHz	64QAM-64QAM	20825-20945	1RB#74-0RB#0	15.43
7-7	15MHz-10MHz	64QAM-64QAM	20825-20945	16RB#0-0RB#0	15.45
7-7	15MHz-10MHz	64QAM-64QAM	20825-20945	75RB#0-50RB#0	15.52
7-7	15MHz-10MHz	64QAM-64QAM	21051-21171	1RB#0-0RB#0	15.38
7-7	15MHz-10MHz	64QAM-64QAM	21051-21171	1RB#0-1RB#49	15.44
7-7	15MHz-10MHz	64QAM-64QAM	21051-21171	1RB#74-0RB#0	15.33
7-7	15MHz-10MHz	64QAM-64QAM	21051-21171	16RB#0-0RB#0	15.48
7-7	15MHz-10MHz	64QAM-64QAM	21051-21171	75RB#0-50RB#0	15.49
7-7	15MHz-10MHz	64QAM-64QAM	21277-21397	1RB#0-0RB#0	15.09
7-7	15MHz-10MHz	64QAM-64QAM	21277-21397	1RB#0-1RB#49	15.29
7-7	15MHz-10MHz	64QAM-64QAM	21277-21397	1RB#74-0RB#0	15.32
7-7	15MHz-10MHz	64QAM-64QAM	21277-21397	16RB#0-0RB#0	15.45
7-7	15MHz-10MHz	64QAM-64QAM	21277-21397	75RB#0-50RB#0	15.36
7-7	15MHz-15MHz	64QAM-64QAM	20825-20975	1RB#0-0RB#0	15.47
7-7	15MHz-15MHz	64QAM-64QAM	20825-20975	1RB#0-1RB#74	14.76
7-7	15MHz-15MHz	64QAM-64QAM	20825-20975	1RB#74-0RB#0	15.38
7-7	15MHz-15MHz	64QAM-64QAM	20825-20975	16RB#0-0RB#0	15.27
7-7	15MHz-15MHz	64QAM-64QAM	20825-20975	75RB#0-75RB#0	15.39
7-7	15MHz-15MHz	64QAM-64QAM	21025-21175	1RB#0-0RB#0	15.43
7-7	15MHz-15MHz	64QAM-64QAM	21025-21175	1RB#0-1RB#74	15.39
7-7	15MHz-15MHz	64QAM-64QAM	21025-21175	1RB#74-0RB#0	15.23
7-7	15MHz-15MHz	64QAM-64QAM	21025-21175	16RB#0-0RB#0	15.27

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-SAR-IEEE Std 1528-2013-V1.1

7-7	15MHz-15MHz	64QAM-64QAM	21025-21175	75RB#0-75RB#0	15.32
7-7	15MHz-15MHz	64QAM-64QAM	21225-21375	1RB#0-0RB#0	15.27
7-7	15MHz-15MHz	64QAM-64QAM	21225-21375	1RB#0-1RB#74	15.46
7-7	15MHz-15MHz	64QAM-64QAM	21225-21375	1RB#74-0RB#0	14.93
7-7	15MHz-15MHz	64QAM-64QAM	21225-21375	16RB#0-0RB#0	15.30
7-7	15MHz-15MHz	64QAM-64QAM	21225-21375	75RB#0-75RB#0	15.45
7-7	15MHz-20MHz	64QAM-64QAM	20828-20999	1RB#0-0RB#0	15.03
7-7	15MHz-20MHz	64QAM-64QAM	20828-20999	1RB#0-1RB#99	14.44
7-7	15MHz-20MHz	64QAM-64QAM	20828-20999	1RB#74-0RB#0	15.51
7-7	15MHz-20MHz	64QAM-64QAM	20828-20999	16RB#0-0RB#0	15.06
7-7	15MHz-20MHz	64QAM-64QAM	20828-20999	75RB#0-100RB#0	15.26
7-7	15MHz-20MHz	64QAM-64QAM	21003-21174	1RB#0-0RB#0	15.26
7-7	15MHz-20MHz	64QAM-64QAM	21003-21174	1RB#0-1RB#99	15.50
7-7	15MHz-20MHz	64QAM-64QAM	21003-21174	1RB#74-0RB#0	15.33
7-7	15MHz-20MHz	64QAM-64QAM	21003-21174	16RB#0-0RB#0	15.05
7-7	15MHz-20MHz	64QAM-64QAM	21003-21174	75RB#0-100RB#0	15.25
7-7	15MHz-20MHz	64QAM-64QAM	21179-21350	1RB#0-0RB#0	15.48
7-7	15MHz-20MHz	64QAM-64QAM	21179-21350	1RB#0-1RB#99	15.39
7-7	15MHz-20MHz	64QAM-64QAM	21179-21350	1RB#74-0RB#0	15.37
7-7	15MHz-20MHz	64QAM-64QAM	21179-21350	16RB#0-0RB#0	15.25
7-7	15MHz-20MHz	64QAM-64QAM	21179-21350	75RB#0-100RB#0	15.50
7-7	20MHz-10MHz	64QAM-64QAM	20850-20994	1RB#0-0RB#0	15.28
7-7	20MHz-10MHz	64QAM-64QAM	20850-20994	1RB#0-1RB#49	14.80
7-7	20MHz-10MHz	64QAM-64QAM	20850-20994	1RB#99-0RB#0	15.43
7-7	20MHz-10MHz	64QAM-64QAM	20850-20994	18RB#0-0RB#0	15.10
7-7	20MHz-10MHz	64QAM-64QAM	20850-20994	100RB#0-50RB#0	15.33
7-7	20MHz-10MHz	64QAM-64QAM	21051-21195	1RB#0-0RB#0	15.44
7-7	20MHz-10MHz	64QAM-64QAM	21051-21195	1RB#0-1RB#49	15.38
7-7	20MHz-10MHz	64QAM-64QAM	21051-21195	1RB#99-0RB#0	15.43
7-7	20MHz-10MHz	64QAM-64QAM	21051-21195	18RB#0-0RB#0	15.24
7-7	20MHz-10MHz	64QAM-64QAM	21051-21195	100RB#0-50RB#0	15.32
7-7	20MHz-10MHz	64QAM-64QAM	21251-21395	1RB#0-0RB#0	15.50
7-7	20MHz-10MHz	64QAM-64QAM	21251-21395	1RB#0-1RB#49	15.32
7-7	20MHz-10MHz	64QAM-64QAM	21251-21395	1RB#99-0RB#0	15.34
7-7	20MHz-10MHz	64QAM-64QAM	21251-21395	18RB#0-0RB#0	15.33
7-7	20MHz-10MHz	64QAM-64QAM	21251-21395	100RB#0-50RB#0	15.49
7-7	20MHz-15MHz	64QAM-64QAM	20850-21021	1RB#0-0RB#0	15.18
7-7	20MHz-15MHz	64QAM-64QAM	20850-21021	1RB#0-1RB#74	14.58
7-7	20MHz-15MHz	64QAM-64QAM	20850-21021	1RB#99-0RB#0	15.37
7-7	20MHz-15MHz	64QAM-64QAM	20850-21021	18RB#0-0RB#0	15.00
7-7	20MHz-15MHz	64QAM-64QAM	20850-21021	100RB#0-75RB#0	15.25
7-7	20MHz-15MHz	64QAM-64QAM	21026-21197	1RB#0-0RB#0	15.46
7-7	20MHz-15MHz	64QAM-64QAM	21026-21197	1RB#0-1RB#74	15.43
7-7	20MHz-15MHz	64QAM-64QAM	21026-21197	1RB#99-0RB#0	15.34
7-7	20MHz-15MHz	64QAM-64QAM	21026-21197	18RB#0-0RB#0	15.15
7-7	20MHz-15MHz	64QAM-64QAM	21026-21197	100RB#0-75RB#0	15.24
7-7	20MHz-15MHz	64QAM-64QAM	21201-21372	1RB#0-0RB#0	15.30
7-7	20MHz-15MHz	64QAM-64QAM	21201-21372	1RB#0-1RB#74	15.43
7-7	20MHz-15MHz	64QAM-64QAM	21201-21372	1RB#99-0RB#0	15.37
7-7	20MHz-15MHz	64QAM-64QAM	21201-21372	18RB#0-0RB#0	15.17
7-7	20MHz-15MHz	64QAM-64QAM	21201-21372	100RB#0-75RB#0	15.50
7-7	20MHz-20MHz	64QAM-64QAM	20850-21048	1RB#0-0RB#0	15.41
7-7	20MHz-20MHz	64QAM-64QAM	20850-21048	1RB#0-1RB#99	14.60
7-7	20MHz-20MHz	64QAM-64QAM	20850-21048	1RB#99-0RB#0	15.43
7-7	20MHz-20MHz	64QAM-64QAM	20850-21048	18RB#0-0RB#0	15.04
7-7	20MHz-20MHz	64QAM-64QAM	20850-21048	100RB#0-100RB#0	15.21
7-7	20MHz-20MHz	64QAM-64QAM	21001-21199	1RB#0-0RB#0	15.15
7-7	20MHz-20MHz	64QAM-64QAM	21001-21199	1RB#0-1RB#99	15.34
7-7	20MHz-20MHz	64QAM-64QAM	21001-21199	1RB#99-0RB#0	15.39
7-7	20MHz-20MHz	64QAM-64QAM	21001-21199	18RB#0-0RB#0	14.94
7-7	20MHz-20MHz	64QAM-64QAM	21001-21199	100RB#0-100RB#0	15.22
7-7	20MHz-20MHz	64QAM-64QAM	21152-21350	1RB#0-0RB#0	15.13
7-7	20MHz-20MHz	64QAM-64QAM	21152-21350	1RB#0-1RB#99	15.33

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-SAR-IEEE Std 1528-2013-V1.1

7-7	20MHz-20MHz	64QAM-64QAM	21152-21350	1RB#99-0RB#0	15.43
7-7	20MHz-20MHz	64QAM-64QAM	21152-21350	18RB#0-0RB#0	14.96
7-7	20MHz-20MHz	64QAM-64QAM	21152-21350	100RB#0-100RB#0	15.46

➤ LTE CA_7C(Power Reduction form Hotspot ON)

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)
7-7	10MHz-20MHz	QPSK-QPSK	20805-20949	1RB#0-0RB#0	19.42
7-7	10MHz-20MHz	QPSK-QPSK	20805-20949	1RB#0-1RB#99	14.92
7-7	10MHz-20MHz	QPSK-QPSK	20805-20949	1RB#49-0RB#0	19.66
7-7	10MHz-20MHz	QPSK-QPSK	20805-20949	12RB#0-0RB#0	19.40
7-7	10MHz-20MHz	QPSK-QPSK	20805-20949	50RB#0-100RB#0	19.53
7-7	10MHz-20MHz	QPSK-QPSK	21006-21150	1RB#0-0RB#0	19.47
7-7	10MHz-20MHz	QPSK-QPSK	21006-21150	1RB#0-1RB#99	16.73
7-7	10MHz-20MHz	QPSK-QPSK	21006-21150	1RB#49-0RB#0	19.76
7-7	10MHz-20MHz	QPSK-QPSK	21006-21150	12RB#0-0RB#0	19.46
7-7	10MHz-20MHz	QPSK-QPSK	21006-21150	50RB#0-100RB#0	19.68
7-7	10MHz-20MHz	QPSK-QPSK	21206-21350	1RB#0-0RB#0	19.54
7-7	10MHz-20MHz	QPSK-QPSK	21206-21350	1RB#0-1RB#99	16.75
7-7	10MHz-20MHz	QPSK-QPSK	21206-21350	1RB#49-0RB#0	19.80
7-7	10MHz-20MHz	QPSK-QPSK	21206-21350	12RB#0-0RB#0	19.60
7-7	10MHz-20MHz	QPSK-QPSK	21206-21350	50RB#0-100RB#0	19.84
7-7	10MHz-20MHz	16QAM-16QAM	20805-20949	1RB#0-0RB#0	20.01
7-7	10MHz-20MHz	16QAM-16QAM	20805-20949	1RB#0-1RB#99	15.56
7-7	10MHz-20MHz	16QAM-16QAM	20805-20949	1RB#49-0RB#0	19.98
7-7	10MHz-20MHz	16QAM-16QAM	20805-20949	12RB#0-0RB#0	19.51
7-7	10MHz-20MHz	16QAM-16QAM	20805-20949	50RB#0-100RB#0	19.59
7-7	10MHz-20MHz	16QAM-16QAM	21006-21150	1RB#0-0RB#0	19.48
7-7	10MHz-20MHz	16QAM-16QAM	21006-21150	1RB#0-1RB#99	14.97
7-7	10MHz-20MHz	16QAM-16QAM	21006-21150	1RB#49-0RB#0	19.79
7-7	10MHz-20MHz	16QAM-16QAM	21006-21150	12RB#0-0RB#0	19.51
7-7	10MHz-20MHz	16QAM-16QAM	21006-21150	50RB#0-100RB#0	19.68
7-7	10MHz-20MHz	16QAM-16QAM	21206-21350	1RB#0-0RB#0	19.37
7-7	10MHz-20MHz	16QAM-16QAM	21206-21350	1RB#0-1RB#99	14.87
7-7	10MHz-20MHz	16QAM-16QAM	21206-21350	1RB#49-0RB#0	19.67
7-7	10MHz-20MHz	16QAM-16QAM	21206-21350	12RB#0-0RB#0	19.65
7-7	10MHz-20MHz	16QAM-16QAM	21206-21350	50RB#0-100RB#0	19.83
7-7	15MHz-10MHz	QPSK-QPSK	20825-20945	1RB#0-0RB#0	19.50
7-7	15MHz-10MHz	QPSK-QPSK	20825-20945	1RB#0-1RB#49	15.06
7-7	15MHz-10MHz	QPSK-QPSK	20825-20945	1RB#74-0RB#0	19.79
7-7	15MHz-10MHz	QPSK-QPSK	20825-20945	16RB#0-0RB#0	19.53
7-7	15MHz-10MHz	QPSK-QPSK	20825-20945	75RB#0-50RB#0	19.57
7-7	15MHz-10MHz	QPSK-QPSK	21051-21171	1RB#0-0RB#0	19.58
7-7	15MHz-10MHz	QPSK-QPSK	21051-21171	1RB#0-1RB#49	16.79
7-7	15MHz-10MHz	QPSK-QPSK	21051-21171	1RB#74-0RB#0	19.89
7-7	15MHz-10MHz	QPSK-QPSK	21051-21171	16RB#0-0RB#0	19.66
7-7	15MHz-10MHz	QPSK-QPSK	21051-21171	75RB#0-50RB#0	19.69
7-7	15MHz-10MHz	QPSK-QPSK	21277-21397	1RB#0-0RB#0	19.70
7-7	15MHz-10MHz	QPSK-QPSK	21277-21397	1RB#0-1RB#49	16.94
7-7	15MHz-10MHz	QPSK-QPSK	21277-21397	1RB#74-0RB#0	19.96
7-7	15MHz-10MHz	QPSK-QPSK	21277-21397	16RB#0-0RB#0	19.79
7-7	15MHz-10MHz	QPSK-QPSK	21277-21397	75RB#0-50RB#0	19.86
7-7	15MHz-10MHz	16QAM-16QAM	20825-20945	1RB#0-0RB#0	19.53
7-7	15MHz-10MHz	16QAM-16QAM	20825-20945	1RB#0-1RB#49	15.06
7-7	15MHz-10MHz	16QAM-16QAM	20825-20945	1RB#74-0RB#0	19.81
7-7	15MHz-10MHz	16QAM-16QAM	20825-20945	16RB#0-0RB#0	19.56
7-7	15MHz-10MHz	16QAM-16QAM	20825-20945	75RB#0-50RB#0	19.62
7-7	15MHz-10MHz	16QAM-16QAM	21051-21171	1RB#0-0RB#0	19.83
7-7	15MHz-10MHz	16QAM-16QAM	21051-21171	1RB#0-1RB#49	15.25
7-7	15MHz-10MHz	16QAM-16QAM	21051-21171	1RB#74-0RB#0	19.95
7-7	15MHz-10MHz	16QAM-16QAM	21051-21171	16RB#0-0RB#0	19.99
7-7	15MHz-10MHz	16QAM-16QAM	21051-21171	75RB#0-50RB#0	19.69
7-7	15MHz-10MHz	16QAM-16QAM	21277-21397	1RB#0-0RB#0	19.89

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-SAR-IEEE Std 1528-2013-V1.1

7-7	15MHz-10MHz	16QAM-16QAM	21277-21397	1RB#0-1RB#49	15.55
7-7	15MHz-10MHz	16QAM-16QAM	21277-21397	1RB#74-ORB#0	20.01
7-7	15MHz-10MHz	16QAM-16QAM	21277-21397	16RB#0-ORB#0	19.90
7-7	15MHz-10MHz	16QAM-16QAM	21277-21397	75RB#0-50RB#0	19.86
7-7	15MHz-15MHz	QPSK-QPSK	20825-20975	1RB#0-ORB#0	19.97
7-7	15MHz-15MHz	QPSK-QPSK	20825-20975	1RB#0-1RB#74	14.91
7-7	15MHz-15MHz	QPSK-QPSK	20825-20975	1RB#74-ORB#0	19.76
7-7	15MHz-15MHz	QPSK-QPSK	20825-20975	16RB#0-ORB#0	19.39
7-7	15MHz-15MHz	QPSK-QPSK	20825-20975	75RB#0-75RB#0	19.61
7-7	15MHz-15MHz	QPSK-QPSK	21025-21175	1RB#0-ORB#0	19.44
7-7	15MHz-15MHz	QPSK-QPSK	21025-21175	1RB#0-1RB#74	16.75
7-7	15MHz-15MHz	QPSK-QPSK	21025-21175	1RB#74-ORB#0	19.83
7-7	15MHz-15MHz	QPSK-QPSK	21025-21175	16RB#0-ORB#0	19.54
7-7	15MHz-15MHz	QPSK-QPSK	21025-21175	75RB#0-75RB#0	19.67
7-7	15MHz-15MHz	QPSK-QPSK	21225-21375	1RB#0-ORB#0	19.58
7-7	15MHz-15MHz	QPSK-QPSK	21225-21375	1RB#0-1RB#74	16.80
7-7	15MHz-15MHz	QPSK-QPSK	21225-21375	1RB#74-ORB#0	19.93
7-7	15MHz-15MHz	QPSK-QPSK	21225-21375	16RB#0-ORB#0	19.69
7-7	15MHz-15MHz	QPSK-QPSK	21225-21375	75RB#0-75RB#0	19.80
7-7	15MHz-15MHz	16QAM-16QAM	20825-20975	1RB#0-ORB#0	19.40
7-7	15MHz-15MHz	16QAM-16QAM	20825-20975	1RB#0-1RB#74	14.83
7-7	15MHz-15MHz	16QAM-16QAM	20825-20975	1RB#74-ORB#0	19.73
7-7	15MHz-15MHz	16QAM-16QAM	20825-20975	16RB#0-ORB#0	19.38
7-7	15MHz-15MHz	16QAM-16QAM	20825-20975	75RB#0-75RB#0	19.62
7-7	15MHz-15MHz	16QAM-16QAM	21025-21175	1RB#0-ORB#0	19.68
7-7	15MHz-15MHz	16QAM-16QAM	21025-21175	1RB#0-1RB#74	15.16
7-7	15MHz-15MHz	16QAM-16QAM	21025-21175	1RB#74-ORB#0	19.74
7-7	15MHz-15MHz	16QAM-16QAM	21025-21175	16RB#0-ORB#0	19.56
7-7	15MHz-15MHz	16QAM-16QAM	21025-21175	75RB#0-75RB#0	19.68
7-7	15MHz-15MHz	16QAM-16QAM	21225-21375	1RB#0-ORB#0	19.89
7-7	15MHz-15MHz	16QAM-16QAM	21225-21375	1RB#0-1RB#74	15.49
7-7	15MHz-15MHz	16QAM-16QAM	21225-21375	1RB#74-ORB#0	19.92
7-7	15MHz-15MHz	16QAM-16QAM	21225-21375	16RB#0-ORB#0	19.77
7-7	15MHz-15MHz	16QAM-16QAM	21225-21375	75RB#0-75RB#0	19.82
7-7	15MHz-20MHz	QPSK-QPSK	20828-20999	1RB#0-ORB#0	19.35
7-7	15MHz-20MHz	QPSK-QPSK	20828-20999	1RB#0-1RB#99	14.88
7-7	15MHz-20MHz	QPSK-QPSK	20828-20999	1RB#74-ORB#0	19.82
7-7	15MHz-20MHz	QPSK-QPSK	20828-20999	16RB#0-ORB#0	19.40
7-7	15MHz-20MHz	QPSK-QPSK	20828-20999	75RB#0-100RB#0	19.54
7-7	15MHz-20MHz	QPSK-QPSK	21003-21174	1RB#0-ORB#0	19.35
7-7	15MHz-20MHz	QPSK-QPSK	21003-21174	1RB#0-1RB#99	16.65
7-7	15MHz-20MHz	QPSK-QPSK	21003-21174	1RB#74-ORB#0	19.83
7-7	15MHz-20MHz	QPSK-QPSK	21003-21174	16RB#0-ORB#0	19.41
7-7	15MHz-20MHz	QPSK-QPSK	21003-21174	75RB#0-100RB#0	19.62
7-7	15MHz-20MHz	QPSK-QPSK	21179-21350	1RB#0-ORB#0	19.41
7-7	15MHz-20MHz	QPSK-QPSK	21179-21350	1RB#0-1RB#99	16.64
7-7	15MHz-20MHz	QPSK-QPSK	21179-21350	1RB#74-ORB#0	19.95
7-7	15MHz-20MHz	QPSK-QPSK	21179-21350	16RB#0-ORB#0	19.55
7-7	15MHz-20MHz	QPSK-QPSK	21179-21350	75RB#0-100RB#0	19.84
7-7	15MHz-20MHz	16QAM-16QAM	20828-20999	1RB#0-ORB#0	19.36
7-7	15MHz-20MHz	16QAM-16QAM	20828-20999	1RB#0-1RB#99	14.92
7-7	15MHz-20MHz	16QAM-16QAM	20828-20999	1RB#74-ORB#0	19.85
7-7	15MHz-20MHz	16QAM-16QAM	20828-20999	16RB#0-ORB#0	19.38
7-7	15MHz-20MHz	16QAM-16QAM	20828-20999	75RB#0-100RB#0	19.57
7-7	15MHz-20MHz	16QAM-16QAM	21003-21174	1RB#0-ORB#0	19.61
7-7	15MHz-20MHz	16QAM-16QAM	21003-21174	1RB#0-1RB#99	14.99
7-7	15MHz-20MHz	16QAM-16QAM	21003-21174	1RB#74-ORB#0	19.93
7-7	15MHz-20MHz	16QAM-16QAM	21003-21174	16RB#0-ORB#0	19.47
7-7	15MHz-20MHz	16QAM-16QAM	21003-21174	75RB#0-100RB#0	19.58
7-7	15MHz-20MHz	16QAM-16QAM	21179-21350	1RB#0-ORB#0	19.85
7-7	15MHz-20MHz	16QAM-16QAM	21179-21350	1RB#0-1RB#99	15.37
7-7	15MHz-20MHz	16QAM-16QAM	21179-21350	1RB#74-ORB#0	19.82
7-7	15MHz-20MHz	16QAM-16QAM	21179-21350	16RB#0-ORB#0	19.61

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-SAR-IEEE Std 1528-2013-V1.1

7-7	15MHz-20MHz	16QAM-16QAM	21179-21350	75RB#0-100RB#0	19.89
7-7	20MHz-10MHz	QPSK-QPSK	20850-20994	1RB#0-0RB#0	19.46
7-7	20MHz-10MHz	QPSK-QPSK	20850-20994	1RB#0-1RB#49	14.94
7-7	20MHz-10MHz	QPSK-QPSK	20850-20994	1RB#99-0RB#0	19.81
7-7	20MHz-10MHz	QPSK-QPSK	20850-20994	18RB#0-0RB#0	19.44
7-7	20MHz-10MHz	QPSK-QPSK	20850-20994	100RB#0-50RB#0	19.64
7-7	20MHz-10MHz	QPSK-QPSK	21051-21195	1RB#0-0RB#0	19.50
7-7	20MHz-10MHz	QPSK-QPSK	21051-21195	1RB#0-1RB#49	16.75
7-7	20MHz-10MHz	QPSK-QPSK	21051-21195	1RB#99-0RB#0	19.86
7-7	20MHz-10MHz	QPSK-QPSK	21051-21195	18RB#0-0RB#0	19.49
7-7	20MHz-10MHz	QPSK-QPSK	21051-21195	100RB#0-50RB#0	19.65
7-7	20MHz-10MHz	QPSK-QPSK	21251-21395	1RB#0-0RB#0	19.67
7-7	20MHz-10MHz	QPSK-QPSK	21251-21395	1RB#0-1RB#49	16.83
7-7	20MHz-10MHz	QPSK-QPSK	21251-21395	1RB#99-0RB#0	19.99
7-7	20MHz-10MHz	QPSK-QPSK	21251-21395	18RB#0-0RB#0	19.70
7-7	20MHz-10MHz	QPSK-QPSK	21251-21395	100RB#0-50RB#0	19.80
7-7	20MHz-10MHz	16QAM-16QAM	20850-20994	1RB#0-0RB#0	19.54
7-7	20MHz-10MHz	16QAM-16QAM	20850-20994	1RB#0-1RB#49	15.15
7-7	20MHz-10MHz	16QAM-16QAM	20850-20994	1RB#99-0RB#0	19.94
7-7	20MHz-10MHz	16QAM-16QAM	20850-20994	18RB#0-0RB#0	19.41
7-7	20MHz-10MHz	16QAM-16QAM	20850-20994	100RB#0-50RB#0	19.57
7-7	20MHz-10MHz	16QAM-16QAM	21051-21195	1RB#0-0RB#0	20.01
7-7	20MHz-10MHz	16QAM-16QAM	21051-21195	1RB#0-1RB#49	15.20
7-7	20MHz-10MHz	16QAM-16QAM	21051-21195	1RB#99-0RB#0	19.86
7-7	20MHz-10MHz	16QAM-16QAM	21051-21195	18RB#0-0RB#0	19.57
7-7	20MHz-10MHz	16QAM-16QAM	21051-21195	100RB#0-50RB#0	19.64
7-7	20MHz-10MHz	16QAM-16QAM	21251-21395	1RB#0-0RB#0	19.82
7-7	20MHz-10MHz	16QAM-16QAM	21251-21395	1RB#0-1RB#49	15.06
7-7	20MHz-10MHz	16QAM-16QAM	21251-21395	1RB#99-0RB#0	19.94
7-7	20MHz-10MHz	16QAM-16QAM	21251-21395	18RB#0-0RB#0	19.66
7-7	20MHz-10MHz	16QAM-16QAM	21251-21395	100RB#0-50RB#0	19.81
7-7	20MHz-15MHz	QPSK-QPSK	20850-21021	1RB#0-0RB#0	19.33
7-7	20MHz-15MHz	QPSK-QPSK	20850-21021	1RB#0-1RB#74	14.87
7-7	20MHz-15MHz	QPSK-QPSK	20850-21021	1RB#99-0RB#0	19.91
7-7	20MHz-15MHz	QPSK-QPSK	20850-21021	18RB#0-0RB#0	19.37
7-7	20MHz-15MHz	QPSK-QPSK	20850-21021	100RB#0-75RB#0	19.55
7-7	20MHz-15MHz	QPSK-QPSK	21026-21197	1RB#0-0RB#0	19.37
7-7	20MHz-15MHz	QPSK-QPSK	21026-21197	1RB#0-1RB#74	16.65
7-7	20MHz-15MHz	QPSK-QPSK	21026-21197	1RB#99-0RB#0	19.88
7-7	20MHz-15MHz	QPSK-QPSK	21026-21197	18RB#0-0RB#0	19.40
7-7	20MHz-15MHz	QPSK-QPSK	21026-21197	100RB#0-75RB#0	19.55
7-7	20MHz-15MHz	QPSK-QPSK	21201-21372	1RB#0-0RB#0	19.48
7-7	20MHz-15MHz	QPSK-QPSK	21201-21372	1RB#0-1RB#74	16.71
7-7	20MHz-15MHz	QPSK-QPSK	21201-21372	1RB#99-0RB#0	19.95
7-7	20MHz-15MHz	QPSK-QPSK	21201-21372	18RB#0-0RB#0	19.50
7-7	20MHz-15MHz	QPSK-QPSK	21201-21372	100RB#0-75RB#0	19.78
7-7	20MHz-15MHz	16QAM-16QAM	20850-21021	1RB#0-0RB#0	19.50
7-7	20MHz-15MHz	16QAM-16QAM	20850-21021	1RB#0-1RB#74	15.03
7-7	20MHz-15MHz	16QAM-16QAM	20850-21021	1RB#99-0RB#0	19.99
7-7	20MHz-15MHz	16QAM-16QAM	20850-21021	18RB#0-0RB#0	19.32
7-7	20MHz-15MHz	16QAM-16QAM	20850-21021	100RB#0-75RB#0	19.60
7-7	20MHz-15MHz	16QAM-16QAM	21026-21197	1RB#0-0RB#0	19.82
7-7	20MHz-15MHz	16QAM-16QAM	21026-21197	1RB#0-1RB#74	15.13
7-7	20MHz-15MHz	16QAM-16QAM	21026-21197	1RB#99-0RB#0	19.79
7-7	20MHz-15MHz	16QAM-16QAM	21026-21197	18RB#0-0RB#0	19.47
7-7	20MHz-15MHz	16QAM-16QAM	21026-21197	100RB#0-75RB#0	19.58
7-7	20MHz-15MHz	16QAM-16QAM	21201-21372	1RB#0-0RB#0	19.70
7-7	20MHz-15MHz	16QAM-16QAM	21201-21372	1RB#0-1RB#74	14.98
7-7	20MHz-15MHz	16QAM-16QAM	21201-21372	1RB#99-0RB#0	19.98
7-7	20MHz-15MHz	16QAM-16QAM	21201-21372	18RB#0-0RB#0	19.53
7-7	20MHz-15MHz	16QAM-16QAM	21201-21372	100RB#0-75RB#0	19.81
7-7	20MHz-20MHz	QPSK-QPSK	20850-21048	1RB#0-0RB#0	19.22
7-7	20MHz-20MHz	QPSK-QPSK	20850-21048	1RB#0-1RB#99	14.76

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-SAR-IEEE Std 1528-2013-V1.1

7-7	20MHz-20MHz	QPSK-QPSK	20850-21048	1RB#99-0RB#0	19.84
7-7	20MHz-20MHz	QPSK-QPSK	20850-21048	18RB#0-0RB#0	19.29
7-7	20MHz-20MHz	QPSK-QPSK	20850-21048	100RB#0-100RB#0	19.49
7-7	20MHz-20MHz	QPSK-QPSK	21001-21199	1RB#0-0RB#0	19.26
7-7	20MHz-20MHz	QPSK-QPSK	21001-21199	1RB#0-1RB#99	16.59
7-7	20MHz-20MHz	QPSK-QPSK	21001-21199	1RB#99-0RB#0	19.88
7-7	20MHz-20MHz	QPSK-QPSK	21001-21199	18RB#0-0RB#0	19.30
7-7	20MHz-20MHz	QPSK-QPSK	21001-21199	100RB#0-100RB#0	19.52
7-7	20MHz-20MHz	QPSK-QPSK	21152-21350	1RB#0-0RB#0	19.38
7-7	20MHz-20MHz	QPSK-QPSK	21152-21350	1RB#0-1RB#99	16.58
7-7	20MHz-20MHz	QPSK-QPSK	21152-21350	1RB#99-0RB#0	19.99
7-7	20MHz-20MHz	QPSK-QPSK	21152-21350	18RB#0-0RB#0	19.38
7-7	20MHz-20MHz	QPSK-QPSK	21152-21350	100RB#0-100RB#0	19.74
7-7	20MHz-20MHz	16QAM-16QAM	20850-21048	1RB#0-0RB#0	19.40
7-7	20MHz-20MHz	16QAM-16QAM	20850-21048	1RB#0-1RB#99	14.97
7-7	20MHz-20MHz	16QAM-16QAM	20850-21048	1RB#99-0RB#0	19.99
7-7	20MHz-20MHz	16QAM-16QAM	20850-21048	18RB#0-0RB#0	19.24
7-7	20MHz-20MHz	16QAM-16QAM	20850-21048	100RB#0-100RB#0	19.49
7-7	20MHz-20MHz	16QAM-16QAM	21001-21199	1RB#0-0RB#0	19.76
7-7	20MHz-20MHz	16QAM-16QAM	21001-21199	1RB#0-1RB#99	14.99
7-7	20MHz-20MHz	16QAM-16QAM	21001-21199	1RB#99-0RB#0	19.98
7-7	20MHz-20MHz	16QAM-16QAM	21001-21199	18RB#0-0RB#0	19.32
7-7	20MHz-20MHz	16QAM-16QAM	21001-21199	100RB#0-100RB#0	19.50
7-7	20MHz-20MHz	16QAM-16QAM	21152-21350	1RB#0-0RB#0	19.59
7-7	20MHz-20MHz	16QAM-16QAM	21152-21350	1RB#0-1RB#99	14.88
7-7	20MHz-20MHz	16QAM-16QAM	21152-21350	1RB#99-0RB#0	19.86
7-7	20MHz-20MHz	16QAM-16QAM	21152-21350	18RB#0-0RB#0	19.42
7-7	20MHz-20MHz	16QAM-16QAM	21152-21350	100RB#0-100RB#0	19.79
Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)
7-7	10MHz-20MHz	64QAM-64QAM	20805-20949	1RB#0-0RB#0	19.26
7-7	10MHz-20MHz	64QAM-64QAM	20805-20949	1RB#0-1RB#99	14.78
7-7	10MHz-20MHz	64QAM-64QAM	20805-20949	1RB#49-0RB#0	19.54
7-7	10MHz-20MHz	64QAM-64QAM	20805-20949	12RB#0-0RB#0	19.52
7-7	10MHz-20MHz	64QAM-64QAM	20805-20949	50RB#0-100RB#0	19.64
7-7	10MHz-20MHz	64QAM-64QAM	21006-21150	1RB#0-0RB#0	19.78
7-7	10MHz-20MHz	64QAM-64QAM	21006-21150	1RB#0-1RB#99	17.23
7-7	10MHz-20MHz	64QAM-64QAM	21006-21150	1RB#49-0RB#0	19.68
7-7	10MHz-20MHz	64QAM-64QAM	21006-21150	12RB#0-0RB#0	19.58
7-7	10MHz-20MHz	64QAM-64QAM	21006-21150	50RB#0-100RB#0	19.71
7-7	10MHz-20MHz	64QAM-64QAM	21206-21350	1RB#0-0RB#0	19.59
7-7	10MHz-20MHz	64QAM-64QAM	21206-21350	1RB#0-1RB#99	16.77
7-7	10MHz-20MHz	64QAM-64QAM	21206-21350	1RB#49-0RB#0	19.82
7-7	10MHz-20MHz	64QAM-64QAM	21206-21350	12RB#0-0RB#0	19.63
7-7	10MHz-20MHz	64QAM-64QAM	21206-21350	50RB#0-100RB#0	19.82
7-7	15MHz-10MHz	64QAM-64QAM	20825-20945	1RB#0-0RB#0	19.73
7-7	15MHz-10MHz	64QAM-64QAM	20825-20945	1RB#0-1RB#49	15.33
7-7	15MHz-10MHz	64QAM-64QAM	20825-20945	1RB#74-0RB#0	19.68
7-7	15MHz-10MHz	64QAM-64QAM	20825-20945	16RB#0-0RB#0	19.57
7-7	15MHz-10MHz	64QAM-64QAM	20825-20945	75RB#0-50RB#0	19.61
7-7	15MHz-10MHz	64QAM-64QAM	21051-21171	1RB#0-0RB#0	19.71
7-7	15MHz-10MHz	64QAM-64QAM	21051-21171	1RB#0-1RB#49	17.26
7-7	15MHz-10MHz	64QAM-64QAM	21051-21171	1RB#74-0RB#0	19.49
7-7	15MHz-10MHz	64QAM-64QAM	21051-21171	16RB#0-0RB#0	19.71
7-7	15MHz-10MHz	64QAM-64QAM	21051-21171	75RB#0-50RB#0	19.76
7-7	15MHz-10MHz	64QAM-64QAM	21277-21397	1RB#0-0RB#0	19.78
7-7	15MHz-10MHz	64QAM-64QAM	21277-21397	1RB#0-1RB#49	16.96
7-7	15MHz-10MHz	64QAM-64QAM	21277-21397	1RB#74-0RB#0	19.96
7-7	15MHz-10MHz	64QAM-64QAM	21277-21397	16RB#0-0RB#0	19.76
7-7	15MHz-10MHz	64QAM-64QAM	21277-21397	75RB#0-50RB#0	19.83
7-7	15MHz-15MHz	64QAM-64QAM	20825-20975	1RB#0-0RB#0	19.51
7-7	15MHz-15MHz	64QAM-64QAM	20825-20975	1RB#0-1RB#74	15.06
7-7	15MHz-15MHz	64QAM-64QAM	20825-20975	1RB#74-0RB#0	19.80
7-7	15MHz-15MHz	64QAM-64QAM	20825-20975	16RB#0-0RB#0	19.48

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-SAR-IEEE Std 1528-2013-V1.1

7-7	15MHz-15MHz	64QAM-64QAM	20825-20975	75RB#0-75RB#0	19.65
7-7	15MHz-15MHz	64QAM-64QAM	21025-21175	1RB#0-0RB#0	19.74
7-7	15MHz-15MHz	64QAM-64QAM	21025-21175	1RB#0-1RB#74	17.01
7-7	15MHz-15MHz	64QAM-64QAM	21025-21175	1RB#74-0RB#0	19.73
7-7	15MHz-15MHz	64QAM-64QAM	21025-21175	16RB#0-0RB#0	19.58
7-7	15MHz-15MHz	64QAM-64QAM	21025-21175	75RB#0-75RB#0	19.70
7-7	15MHz-15MHz	64QAM-64QAM	21225-21375	1RB#0-0RB#0	19.58
7-7	15MHz-15MHz	64QAM-64QAM	21225-21375	1RB#0-1RB#74	17.31
7-7	15MHz-15MHz	64QAM-64QAM	21225-21375	1RB#74-0RB#0	19.56
7-7	15MHz-15MHz	64QAM-64QAM	21225-21375	16RB#0-0RB#0	19.75
7-7	15MHz-15MHz	64QAM-64QAM	21225-21375	75RB#0-75RB#0	19.83
7-7	15MHz-20MHz	64QAM-64QAM	20828-20999	1RB#0-0RB#0	19.94
7-7	15MHz-20MHz	64QAM-64QAM	20828-20999	1RB#0-1RB#99	15.57
7-7	15MHz-20MHz	64QAM-64QAM	20828-20999	1RB#74-0RB#0	19.77
7-7	15MHz-20MHz	64QAM-64QAM	20828-20999	16RB#0-0RB#0	19.49
7-7	15MHz-20MHz	64QAM-64QAM	20828-20999	75RB#0-100RB#0	19.59
7-7	15MHz-20MHz	64QAM-64QAM	21003-21174	1RB#0-0RB#0	19.42
7-7	15MHz-20MHz	64QAM-64QAM	21003-21174	1RB#0-1RB#99	16.69
7-7	15MHz-20MHz	64QAM-64QAM	21003-21174	1RB#74-0RB#0	19.90
7-7	15MHz-20MHz	64QAM-64QAM	21003-21174	16RB#0-0RB#0	19.45
7-7	15MHz-20MHz	64QAM-64QAM	21003-21174	75RB#0-100RB#0	19.65
7-7	15MHz-20MHz	64QAM-64QAM	21179-21350	1RB#0-0RB#0	19.70
7-7	15MHz-20MHz	64QAM-64QAM	21179-21350	1RB#0-1RB#99	16.88
7-7	15MHz-20MHz	64QAM-64QAM	21179-21350	1RB#74-0RB#0	19.75
7-7	15MHz-20MHz	64QAM-64QAM	21179-21350	16RB#0-0RB#0	19.58
7-7	15MHz-20MHz	64QAM-64QAM	21179-21350	75RB#0-100RB#0	19.83
7-7	20MHz-10MHz	64QAM-64QAM	20850-20994	1RB#0-0RB#0	19.60
7-7	20MHz-10MHz	64QAM-64QAM	20850-20994	1RB#0-1RB#49	15.13
7-7	20MHz-10MHz	64QAM-64QAM	20850-20994	1RB#99-0RB#0	19.90
7-7	20MHz-10MHz	64QAM-64QAM	20850-20994	18RB#0-0RB#0	19.41
7-7	20MHz-10MHz	64QAM-64QAM	20850-20994	100RB#0-50RB#0	19.62
7-7	20MHz-10MHz	64QAM-64QAM	21051-21195	1RB#0-0RB#0	19.82
7-7	20MHz-10MHz	64QAM-64QAM	21051-21195	1RB#0-1RB#49	17.08
7-7	20MHz-10MHz	64QAM-64QAM	21051-21195	1RB#99-0RB#0	19.92
7-7	20MHz-10MHz	64QAM-64QAM	21051-21195	18RB#0-0RB#0	19.58
7-7	20MHz-10MHz	64QAM-64QAM	21051-21195	100RB#0-50RB#0	19.63
7-7	20MHz-10MHz	64QAM-64QAM	21251-21395	1RB#0-0RB#0	19.80
7-7	20MHz-10MHz	64QAM-64QAM	21251-21395	1RB#0-1RB#49	16.90
7-7	20MHz-10MHz	64QAM-64QAM	21251-21395	1RB#99-0RB#0	19.79
7-7	20MHz-10MHz	64QAM-64QAM	21251-21395	18RB#0-0RB#0	19.68
7-7	20MHz-10MHz	64QAM-64QAM	21251-21395	100RB#0-50RB#0	19.81
7-7	20MHz-15MHz	64QAM-64QAM	20850-21021	1RB#0-0RB#0	19.42
7-7	20MHz-15MHz	64QAM-64QAM	20850-21021	1RB#0-1RB#74	15.04
7-7	20MHz-15MHz	64QAM-64QAM	20850-21021	1RB#99-0RB#0	19.95
7-7	20MHz-15MHz	64QAM-64QAM	20850-21021	18RB#0-0RB#0	19.34
7-7	20MHz-15MHz	64QAM-64QAM	20850-21021	100RB#0-75RB#0	19.59
7-7	20MHz-15MHz	64QAM-64QAM	21026-21197	1RB#0-0RB#0	19.86
7-7	20MHz-15MHz	64QAM-64QAM	21026-21197	1RB#0-1RB#74	17.04
7-7	20MHz-15MHz	64QAM-64QAM	21026-21197	1RB#99-0RB#0	19.85
7-7	20MHz-15MHz	64QAM-64QAM	21026-21197	18RB#0-0RB#0	19.49
7-7	20MHz-15MHz	64QAM-64QAM	21026-21197	100RB#0-75RB#0	19.62
7-7	20MHz-15MHz	64QAM-64QAM	21201-21372	1RB#0-0RB#0	19.69
7-7	20MHz-15MHz	64QAM-64QAM	21201-21372	1RB#0-1RB#74	16.79
7-7	20MHz-15MHz	64QAM-64QAM	21201-21372	1RB#99-0RB#0	19.69
7-7	20MHz-15MHz	64QAM-64QAM	21201-21372	18RB#0-0RB#0	19.59
7-7	20MHz-15MHz	64QAM-64QAM	21201-21372	100RB#0-75RB#0	19.85
7-7	20MHz-20MHz	64QAM-64QAM	20850-21048	1RB#0-0RB#0	19.73
7-7	20MHz-20MHz	64QAM-64QAM	20850-21048	1RB#0-1RB#99	15.25
7-7	20MHz-20MHz	64QAM-64QAM	20850-21048	1RB#99-0RB#0	19.92
7-7	20MHz-20MHz	64QAM-64QAM	20850-21048	18RB#0-0RB#0	19.28
7-7	20MHz-20MHz	64QAM-64QAM	20850-21048	100RB#0-100RB#0	19.45
7-7	20MHz-20MHz	64QAM-64QAM	21001-21199	1RB#0-0RB#0	19.49
7-7	20MHz-20MHz	64QAM-64QAM	21001-21199	1RB#0-1RB#99	16.72

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-SAR-IEEE Std 1528-2013-V1.1

7-7	20MHz-20MHz	64QAM-64QAM	21001-21199	1RB#99-0RB#0	19.94
7-7	20MHz-20MHz	64QAM-64QAM	21001-21199	18RB#0-0RB#0	19.25
7-7	20MHz-20MHz	64QAM-64QAM	21001-21199	100RB#0-100RB#0	19.55
7-7	20MHz-20MHz	64QAM-64QAM	21152-21350	1RB#0-0RB#0	19.50
7-7	20MHz-20MHz	64QAM-64QAM	21152-21350	1RB#0-1RB#99	16.65
7-7	20MHz-20MHz	64QAM-64QAM	21152-21350	1RB#99-0RB#0	19.99
7-7	20MHz-20MHz	64QAM-64QAM	21152-21350	18RB#0-0RB#0	19.32
7-7	20MHz-20MHz	64QAM-64QAM	21152-21350	100RB#0-100RB#0	19.79



Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-SAR-IEEE Std 1528-2013-V1.1

➤ LTE CA_7C(Power Reduction form Sensor ON)

Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)
7-7	10MHz-20MHz	QPSK-QPSK	20805-20949	1RB#0-0RB#0	18.16
7-7	10MHz-20MHz	QPSK-QPSK	20805-20949	1RB#0-1RB#99	14.68
7-7	10MHz-20MHz	QPSK-QPSK	20805-20949	1RB#49-0RB#0	18.47
7-7	10MHz-20MHz	QPSK-QPSK	20805-20949	12RB#0-0RB#0	18.20
7-7	10MHz-20MHz	QPSK-QPSK	20805-20949	50RB#0-100RB#0	18.33
7-7	10MHz-20MHz	QPSK-QPSK	21006-21150	1RB#0-0RB#0	18.16
7-7	10MHz-20MHz	QPSK-QPSK	21006-21150	1RB#0-1RB#99	16.50
7-7	10MHz-20MHz	QPSK-QPSK	21006-21150	1RB#49-0RB#0	18.50
7-7	10MHz-20MHz	QPSK-QPSK	21006-21150	12RB#0-0RB#0	18.21
7-7	10MHz-20MHz	QPSK-QPSK	21006-21150	50RB#0-100RB#0	18.43
7-7	10MHz-20MHz	QPSK-QPSK	21206-21350	1RB#0-0RB#0	18.26
7-7	10MHz-20MHz	QPSK-QPSK	21206-21350	1RB#0-1RB#99	16.50
7-7	10MHz-20MHz	QPSK-QPSK	21206-21350	1RB#49-0RB#0	18.53
7-7	10MHz-20MHz	QPSK-QPSK	21206-21350	12RB#0-0RB#0	18.29
7-7	10MHz-20MHz	QPSK-QPSK	21206-21350	50RB#0-100RB#0	18.51
7-7	10MHz-20MHz	16QAM-16QAM	20805-20949	1RB#0-0RB#0	18.02
7-7	10MHz-20MHz	16QAM-16QAM	20805-20949	1RB#0-1RB#99	14.49
7-7	10MHz-20MHz	16QAM-16QAM	20805-20949	1RB#49-0RB#0	18.32
7-7	10MHz-20MHz	16QAM-16QAM	20805-20949	12RB#0-0RB#0	18.29
7-7	10MHz-20MHz	16QAM-16QAM	20805-20949	50RB#0-100RB#0	18.37
7-7	10MHz-20MHz	16QAM-16QAM	21006-21150	1RB#0-0RB#0	18.61
7-7	10MHz-20MHz	16QAM-16QAM	21006-21150	1RB#0-1RB#99	15.14
7-7	10MHz-20MHz	16QAM-16QAM	21006-21150	1RB#49-0RB#0	18.48
7-7	10MHz-20MHz	16QAM-16QAM	21006-21150	12RB#0-0RB#0	18.32
7-7	10MHz-20MHz	16QAM-16QAM	21006-21150	50RB#0-100RB#0	18.45
7-7	10MHz-20MHz	16QAM-16QAM	21206-21350	1RB#0-0RB#0	18.30
7-7	10MHz-20MHz	16QAM-16QAM	21206-21350	1RB#0-1RB#99	14.70
7-7	10MHz-20MHz	16QAM-16QAM	21206-21350	1RB#49-0RB#0	18.61
7-7	10MHz-20MHz	16QAM-16QAM	21206-21350	12RB#0-0RB#0	18.36
7-7	10MHz-20MHz	16QAM-16QAM	21206-21350	50RB#0-100RB#0	18.52
7-7	15MHz-10MHz	QPSK-QPSK	20825-20945	1RB#0-0RB#0	18.27
7-7	15MHz-10MHz	QPSK-QPSK	20825-20945	1RB#0-1RB#49	14.74
7-7	15MHz-10MHz	QPSK-QPSK	20825-20945	1RB#74-0RB#0	18.59
7-7	15MHz-10MHz	QPSK-QPSK	20825-20945	16RB#0-0RB#0	18.27
7-7	15MHz-10MHz	QPSK-QPSK	20825-20945	75RB#0-50RB#0	18.39
7-7	15MHz-10MHz	QPSK-QPSK	21051-21171	1RB#0-0RB#0	18.30
7-7	15MHz-10MHz	QPSK-QPSK	21051-21171	1RB#0-1RB#49	16.47
7-7	15MHz-10MHz	QPSK-QPSK	21051-21171	1RB#74-0RB#0	18.65
7-7	15MHz-10MHz	QPSK-QPSK	21051-21171	16RB#0-0RB#0	18.30
7-7	15MHz-10MHz	QPSK-QPSK	21051-21171	75RB#0-50RB#0	18.39
7-7	15MHz-10MHz	QPSK-QPSK	21277-21397	1RB#0-0RB#0	18.34
7-7	15MHz-10MHz	QPSK-QPSK	21277-21397	1RB#0-1RB#49	16.65
7-7	15MHz-10MHz	QPSK-QPSK	21277-21397	1RB#74-0RB#0	18.63
7-7	15MHz-10MHz	QPSK-QPSK	21277-21397	16RB#0-0RB#0	18.46
7-7	15MHz-10MHz	QPSK-QPSK	21277-21397	75RB#0-50RB#0	18.42
7-7	15MHz-10MHz	16QAM-16QAM	20825-20945	1RB#0-0RB#0	18.45
7-7	15MHz-10MHz	16QAM-16QAM	20825-20945	1RB#0-1RB#49	15.08
7-7	15MHz-10MHz	16QAM-16QAM	20825-20945	1RB#74-0RB#0	18.15
7-7	15MHz-10MHz	16QAM-16QAM	20825-20945	16RB#0-0RB#0	18.38
7-7	15MHz-10MHz	16QAM-16QAM	20825-20945	75RB#0-50RB#0	18.39
7-7	15MHz-10MHz	16QAM-16QAM	21051-21171	1RB#0-0RB#0	18.33
7-7	15MHz-10MHz	16QAM-16QAM	21051-21171	1RB#0-1RB#49	14.74
7-7	15MHz-10MHz	16QAM-16QAM	21051-21171	1RB#74-0RB#0	18.62
7-7	15MHz-10MHz	16QAM-16QAM	21051-21171	16RB#0-0RB#0	18.32
7-7	15MHz-10MHz	16QAM-16QAM	21051-21171	75RB#0-50RB#0	18.42
7-7	15MHz-10MHz	16QAM-16QAM	21277-21397	1RB#0-0RB#0	18.60
7-7	15MHz-10MHz	16QAM-16QAM	21277-21397	1RB#0-1RB#49	15.02
7-7	15MHz-10MHz	16QAM-16QAM	21277-21397	1RB#74-0RB#0	18.59
7-7	15MHz-10MHz	16QAM-16QAM	21277-21397	16RB#0-0RB#0	18.53
7-7	15MHz-10MHz	16QAM-16QAM	21277-21397	75RB#0-50RB#0	18.45
7-7	15MHz-15MHz	QPSK-QPSK	20825-20975	1RB#0-0RB#0	18.10

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-SAR-IEEE Std 1528-2013-V1.1

7-7	15MHz-15MHz	QPSK-QPSK	20825-20975	1RB#0-1RB#74	14.57
7-7	15MHz-15MHz	QPSK-QPSK	20825-20975	1RB#74-0RB#0	18.46
7-7	15MHz-15MHz	QPSK-QPSK	20825-20975	16RB#0-0RB#0	18.13
7-7	15MHz-15MHz	QPSK-QPSK	20825-20975	75RB#0-75RB#0	18.26
7-7	15MHz-15MHz	QPSK-QPSK	21025-21175	1RB#0-0RB#0	18.11
7-7	15MHz-15MHz	QPSK-QPSK	21025-21175	1RB#0-1RB#74	16.40
7-7	15MHz-15MHz	QPSK-QPSK	21025-21175	1RB#74-0RB#0	18.56
7-7	15MHz-15MHz	QPSK-QPSK	21025-21175	16RB#0-0RB#0	18.16
7-7	15MHz-15MHz	QPSK-QPSK	21025-21175	75RB#0-75RB#0	18.30
7-7	15MHz-15MHz	QPSK-QPSK	21225-21375	1RB#0-0RB#0	18.20
7-7	15MHz-15MHz	QPSK-QPSK	21225-21375	1RB#0-1RB#74	16.48
7-7	15MHz-15MHz	QPSK-QPSK	21225-21375	1RB#74-0RB#0	18.63
7-7	15MHz-15MHz	QPSK-QPSK	21225-21375	16RB#0-0RB#0	18.32
7-7	15MHz-15MHz	QPSK-QPSK	21225-21375	75RB#0-75RB#0	18.44
7-7	15MHz-15MHz	16QAM-16QAM	20825-20975	1RB#0-0RB#0	18.29
7-7	15MHz-15MHz	16QAM-16QAM	20825-20975	1RB#0-1RB#74	14.91
7-7	15MHz-15MHz	16QAM-16QAM	20825-20975	1RB#74-0RB#0	18.54
7-7	15MHz-15MHz	16QAM-16QAM	20825-20975	16RB#0-0RB#0	18.14
7-7	15MHz-15MHz	16QAM-16QAM	20825-20975	75RB#0-75RB#0	18.27
7-7	15MHz-15MHz	16QAM-16QAM	21025-21175	1RB#0-0RB#0	18.66
7-7	15MHz-15MHz	16QAM-16QAM	21025-21175	1RB#0-1RB#74	15.06
7-7	15MHz-15MHz	16QAM-16QAM	21025-21175	1RB#74-0RB#0	18.54
7-7	15MHz-15MHz	16QAM-16QAM	21025-21175	16RB#0-0RB#0	18.30
7-7	15MHz-15MHz	16QAM-16QAM	21025-21175	75RB#0-75RB#0	18.33
7-7	15MHz-15MHz	16QAM-16QAM	21225-21375	1RB#0-0RB#0	18.31
7-7	15MHz-15MHz	16QAM-16QAM	21225-21375	1RB#0-1RB#74	14.70
7-7	15MHz-15MHz	16QAM-16QAM	21225-21375	1RB#74-0RB#0	18.58
7-7	15MHz-15MHz	16QAM-16QAM	21225-21375	16RB#0-0RB#0	18.30
7-7	15MHz-15MHz	16QAM-16QAM	21225-21375	75RB#0-75RB#0	18.48
7-7	15MHz-20MHz	QPSK-QPSK	20828-20999	1RB#0-0RB#0	18.03
7-7	15MHz-20MHz	QPSK-QPSK	20828-20999	1RB#0-1RB#99	14.58
7-7	15MHz-20MHz	QPSK-QPSK	20828-20999	1RB#74-0RB#0	18.54
7-7	15MHz-20MHz	QPSK-QPSK	20828-20999	16RB#0-0RB#0	18.08
7-7	15MHz-20MHz	QPSK-QPSK	20828-20999	75RB#0-100RB#0	18.27
7-7	15MHz-20MHz	QPSK-QPSK	21003-21174	1RB#0-0RB#0	18.04
7-7	15MHz-20MHz	QPSK-QPSK	21003-21174	1RB#0-1RB#99	16.33
7-7	15MHz-20MHz	QPSK-QPSK	21003-21174	1RB#74-0RB#0	18.50
7-7	15MHz-20MHz	QPSK-QPSK	21003-21174	16RB#0-0RB#0	18.13
7-7	15MHz-20MHz	QPSK-QPSK	21003-21174	75RB#0-100RB#0	18.31
7-7	15MHz-20MHz	QPSK-QPSK	21179-21350	1RB#0-0RB#0	18.14
7-7	15MHz-20MHz	QPSK-QPSK	21179-21350	1RB#0-1RB#99	16.33
7-7	15MHz-20MHz	QPSK-QPSK	21179-21350	1RB#74-0RB#0	18.63
7-7	15MHz-20MHz	QPSK-QPSK	21179-21350	16RB#0-0RB#0	18.19
7-7	15MHz-20MHz	QPSK-QPSK	21179-21350	75RB#0-100RB#0	18.48
7-7	15MHz-20MHz	16QAM-16QAM	20828-20999	1RB#0-0RB#0	18.07
7-7	15MHz-20MHz	16QAM-16QAM	20828-20999	1RB#0-1RB#99	14.64
7-7	15MHz-20MHz	16QAM-16QAM	20828-20999	1RB#74-0RB#0	18.55
7-7	15MHz-20MHz	16QAM-16QAM	20828-20999	16RB#0-0RB#0	18.13
7-7	15MHz-20MHz	16QAM-16QAM	20828-20999	75RB#0-100RB#0	18.26
7-7	15MHz-20MHz	16QAM-16QAM	21003-21174	1RB#0-0RB#0	18.29
7-7	15MHz-20MHz	16QAM-16QAM	21003-21174	1RB#0-1RB#99	14.71
7-7	15MHz-20MHz	16QAM-16QAM	21003-21174	1RB#74-0RB#0	18.59
7-7	15MHz-20MHz	16QAM-16QAM	21003-21174	16RB#0-0RB#0	18.19
7-7	15MHz-20MHz	16QAM-16QAM	21003-21174	75RB#0-100RB#0	18.29
7-7	15MHz-20MHz	16QAM-16QAM	21179-21350	1RB#0-0RB#0	18.62
7-7	15MHz-20MHz	16QAM-16QAM	21179-21350	1RB#0-1RB#99	15.06
7-7	15MHz-20MHz	16QAM-16QAM	21179-21350	1RB#74-0RB#0	18.54
7-7	15MHz-20MHz	16QAM-16QAM	21179-21350	16RB#0-0RB#0	18.30
7-7	15MHz-20MHz	16QAM-16QAM	21179-21350	75RB#0-100RB#0	18.54
7-7	20MHz-10MHz	QPSK-QPSK	20850-20994	1RB#0-0RB#0	18.17
7-7	20MHz-10MHz	QPSK-QPSK	20850-20994	1RB#0-1RB#49	14.68
7-7	20MHz-10MHz	QPSK-QPSK	20850-20994	1RB#99-0RB#0	18.50
7-7	20MHz-10MHz	QPSK-QPSK	20850-20994	18RB#0-0RB#0	18.14

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-SAR-IEEE Std 1528-2013-V1.1

7-7	20MHz-10MHz	QPSK-QPSK	20850-20994	100RB#0-50RB#0	18.30
7-7	20MHz-10MHz	QPSK-QPSK	21051-21195	1RB#0-0RB#0	18.14
7-7	20MHz-10MHz	QPSK-QPSK	21051-21195	1RB#0-1RB#49	16.40
7-7	20MHz-10MHz	QPSK-QPSK	21051-21195	1RB#99-0RB#0	18.55
7-7	20MHz-10MHz	QPSK-QPSK	21051-21195	18RB#0-0RB#0	18.21
7-7	20MHz-10MHz	QPSK-QPSK	21051-21195	100RB#0-50RB#0	18.29
7-7	20MHz-10MHz	QPSK-QPSK	21251-21395	1RB#0-0RB#0	18.34
7-7	20MHz-10MHz	QPSK-QPSK	21251-21395	1RB#0-1RB#49	16.54
7-7	20MHz-10MHz	QPSK-QPSK	21251-21395	1RB#99-0RB#0	18.59
7-7	20MHz-10MHz	QPSK-QPSK	21251-21395	18RB#0-0RB#0	18.32
7-7	20MHz-10MHz	QPSK-QPSK	21251-21395	100RB#0-50RB#0	18.48
7-7	20MHz-10MHz	16QAM-16QAM	20850-20994	1RB#0-0RB#0	18.29
7-7	20MHz-10MHz	16QAM-16QAM	20850-20994	1RB#0-1RB#49	14.82
7-7	20MHz-10MHz	16QAM-16QAM	20850-20994	1RB#99-0RB#0	18.64
7-7	20MHz-10MHz	16QAM-16QAM	20850-20994	18RB#0-0RB#0	18.15
7-7	20MHz-10MHz	16QAM-16QAM	20850-20994	100RB#0-50RB#0	18.30
7-7	20MHz-10MHz	16QAM-16QAM	21051-21195	1RB#0-0RB#0	18.66
7-7	20MHz-10MHz	16QAM-16QAM	21051-21195	1RB#0-1RB#49	14.93
7-7	20MHz-10MHz	16QAM-16QAM	21051-21195	1RB#99-0RB#0	18.42
7-7	20MHz-10MHz	16QAM-16QAM	21051-21195	18RB#0-0RB#0	18.31
7-7	20MHz-10MHz	16QAM-16QAM	21051-21195	100RB#0-50RB#0	18.32
7-7	20MHz-10MHz	16QAM-16QAM	21251-21395	1RB#0-0RB#0	18.51
7-7	20MHz-10MHz	16QAM-16QAM	21251-21395	1RB#0-1RB#49	14.78
7-7	20MHz-10MHz	16QAM-16QAM	21251-21395	1RB#99-0RB#0	18.53
7-7	20MHz-10MHz	16QAM-16QAM	21251-21395	18RB#0-0RB#0	18.36
7-7	20MHz-10MHz	16QAM-16QAM	21251-21395	100RB#0-50RB#0	18.48
7-7	20MHz-15MHz	QPSK-QPSK	20850-21021	1RB#0-0RB#0	18.04
7-7	20MHz-15MHz	QPSK-QPSK	20850-21021	1RB#0-1RB#74	14.63
7-7	20MHz-15MHz	QPSK-QPSK	20850-21021	1RB#99-0RB#0	18.62
7-7	20MHz-15MHz	QPSK-QPSK	20850-21021	18RB#0-0RB#0	18.15
7-7	20MHz-15MHz	QPSK-QPSK	20850-21021	100RB#0-75RB#0	18.33
7-7	20MHz-15MHz	QPSK-QPSK	21026-21197	1RB#0-0RB#0	18.03
7-7	20MHz-15MHz	QPSK-QPSK	21026-21197	1RB#0-1RB#74	16.34
7-7	20MHz-15MHz	QPSK-QPSK	21026-21197	1RB#99-0RB#0	18.59
7-7	20MHz-15MHz	QPSK-QPSK	21026-21197	18RB#0-0RB#0	18.11
7-7	20MHz-15MHz	QPSK-QPSK	21026-21197	100RB#0-75RB#0	18.25
7-7	20MHz-15MHz	QPSK-QPSK	21201-21372	1RB#0-0RB#0	18.17
7-7	20MHz-15MHz	QPSK-QPSK	21201-21372	1RB#0-1RB#74	16.41
7-7	20MHz-15MHz	QPSK-QPSK	21201-21372	1RB#99-0RB#0	18.61
7-7	20MHz-15MHz	QPSK-QPSK	21201-21372	18RB#0-0RB#0	18.24
7-7	20MHz-15MHz	QPSK-QPSK	21201-21372	100RB#0-75RB#0	18.46
7-7	20MHz-15MHz	16QAM-16QAM	20850-21021	1RB#0-0RB#0	18.23
7-7	20MHz-15MHz	16QAM-16QAM	20850-21021	1RB#0-1RB#74	14.79
7-7	20MHz-15MHz	16QAM-16QAM	20850-21021	1RB#99-0RB#0	18.56
7-7	20MHz-15MHz	16QAM-16QAM	20850-21021	18RB#0-0RB#0	18.08
7-7	20MHz-15MHz	16QAM-16QAM	20850-21021	100RB#0-75RB#0	18.35
7-7	20MHz-15MHz	16QAM-16QAM	21026-21197	1RB#0-0RB#0	18.53
7-7	20MHz-15MHz	16QAM-16QAM	21026-21197	1RB#0-1RB#74	14.81
7-7	20MHz-15MHz	16QAM-16QAM	21026-21197	1RB#99-0RB#0	18.53
7-7	20MHz-15MHz	16QAM-16QAM	21026-21197	18RB#0-0RB#0	18.17
7-7	20MHz-15MHz	16QAM-16QAM	21026-21197	100RB#0-75RB#0	18.26
7-7	20MHz-15MHz	16QAM-16QAM	21201-21372	1RB#0-0RB#0	18.41
7-7	20MHz-15MHz	16QAM-16QAM	21201-21372	1RB#0-1RB#74	14.66
7-7	20MHz-15MHz	16QAM-16QAM	21201-21372	1RB#99-0RB#0	18.45
7-7	20MHz-15MHz	16QAM-16QAM	21201-21372	18RB#0-0RB#0	18.26
7-7	20MHz-15MHz	16QAM-16QAM	21201-21372	100RB#0-75RB#0	18.52
7-7	20MHz-20MHz	QPSK-QPSK	20850-21048	1RB#0-0RB#0	17.98
7-7	20MHz-20MHz	QPSK-QPSK	20850-21048	1RB#0-1RB#99	14.43
7-7	20MHz-20MHz	QPSK-QPSK	20850-21048	1RB#99-0RB#0	18.57
7-7	20MHz-20MHz	QPSK-QPSK	20850-21048	18RB#0-0RB#0	17.95
7-7	20MHz-20MHz	QPSK-QPSK	20850-21048	100RB#0-100RB#0	18.19
7-7	20MHz-20MHz	QPSK-QPSK	21001-21199	1RB#0-0RB#0	17.92
7-7	20MHz-20MHz	QPSK-QPSK	21001-21199	1RB#0-1RB#99	16.34

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-SAR-IEEE Std 1528-2013-V1.1

7-7	20MHz-20MHz	QPSK-QPSK	21001-21199	1RB#99-0RB#0	18.60
7-7	20MHz-20MHz	QPSK-QPSK	21001-21199	18RB#0-0RB#0	17.89
7-7	20MHz-20MHz	QPSK-QPSK	21001-21199	100RB#0-100RB#0	18.17
7-7	20MHz-20MHz	QPSK-QPSK	21152-21350	1RB#0-0RB#0	18.04
7-7	20MHz-20MHz	QPSK-QPSK	21152-21350	1RB#0-1RB#99	16.20
7-7	20MHz-20MHz	QPSK-QPSK	21152-21350	1RB#99-0RB#0	18.60
7-7	20MHz-20MHz	QPSK-QPSK	21152-21350	18RB#0-0RB#0	18.01
7-7	20MHz-20MHz	QPSK-QPSK	21152-21350	100RB#0-100RB#0	18.43
7-7	20MHz-20MHz	16QAM-16QAM	20850-21048	1RB#0-0RB#0	18.51
7-7	20MHz-20MHz	16QAM-16QAM	20850-21048	1RB#0-1RB#99	15.01
7-7	20MHz-20MHz	16QAM-16QAM	20850-21048	1RB#99-0RB#0	18.58
7-7	20MHz-20MHz	16QAM-16QAM	20850-21048	18RB#0-0RB#0	18.08
7-7	20MHz-20MHz	16QAM-16QAM	20850-21048	100RB#0-100RB#0	18.25
7-7	20MHz-20MHz	16QAM-16QAM	21001-21199	1RB#0-0RB#0	18.16
7-7	20MHz-20MHz	16QAM-16QAM	21001-21199	1RB#0-1RB#99	14.43
7-7	20MHz-20MHz	16QAM-16QAM	21001-21199	1RB#99-0RB#0	18.54
7-7	20MHz-20MHz	16QAM-16QAM	21001-21199	18RB#0-0RB#0	17.97
7-7	20MHz-20MHz	16QAM-16QAM	21001-21199	100RB#0-100RB#0	18.20
7-7	20MHz-20MHz	16QAM-16QAM	21152-21350	1RB#0-0RB#0	18.16
7-7	20MHz-20MHz	16QAM-16QAM	21152-21350	1RB#0-1RB#99	14.59
7-7	20MHz-20MHz	16QAM-16QAM	21152-21350	1RB#99-0RB#0	18.56
7-7	20MHz-20MHz	16QAM-16QAM	21152-21350	18RB#0-0RB#0	18.00
7-7	20MHz-20MHz	16QAM-16QAM	21152-21350	100RB#0-100RB#0	18.44
Band	Bandwidth	Modulation	Channel	RB Configuration	Result(dBm)
7-7	10MHz-20MHz	64QAM-64QAM	20805-20949	1RB#0-0RB#0	18.03
7-7	10MHz-20MHz	64QAM-64QAM	20805-20949	1RB#0-1RB#99	14.46
7-7	10MHz-20MHz	64QAM-64QAM	20805-20949	1RB#49-0RB#0	18.32
7-7	10MHz-20MHz	64QAM-64QAM	20805-20949	12RB#0-0RB#0	18.29
7-7	10MHz-20MHz	64QAM-64QAM	20805-20949	50RB#0-100RB#0	18.34
7-7	10MHz-20MHz	64QAM-64QAM	21006-21150	1RB#0-0RB#0	18.52
7-7	10MHz-20MHz	64QAM-64QAM	21006-21150	1RB#0-1RB#99	17.01
7-7	10MHz-20MHz	64QAM-64QAM	21006-21150	1RB#49-0RB#0	17.59
7-7	10MHz-20MHz	64QAM-64QAM	21006-21150	12RB#0-0RB#0	18.36
7-7	10MHz-20MHz	64QAM-64QAM	21006-21150	50RB#0-100RB#0	18.49
7-7	10MHz-20MHz	64QAM-64QAM	21206-21350	1RB#0-0RB#0	18.31
7-7	10MHz-20MHz	64QAM-64QAM	21206-21350	1RB#0-1RB#99	16.50
7-7	10MHz-20MHz	64QAM-64QAM	21206-21350	1RB#49-0RB#0	18.63
7-7	10MHz-20MHz	64QAM-64QAM	21206-21350	12RB#0-0RB#0	18.35
7-7	10MHz-20MHz	64QAM-64QAM	21206-21350	50RB#0-100RB#0	18.56
7-7	15MHz-10MHz	64QAM-64QAM	20825-20945	1RB#0-0RB#0	18.59
7-7	15MHz-10MHz	64QAM-64QAM	20825-20945	1RB#0-1RB#49	15.46
7-7	15MHz-10MHz	64QAM-64QAM	20825-20945	1RB#74-0RB#0	18.31
7-7	15MHz-10MHz	64QAM-64QAM	20825-20945	16RB#0-0RB#0	18.44
7-7	15MHz-10MHz	64QAM-64QAM	20825-20945	75RB#0-50RB#0	18.40
7-7	15MHz-10MHz	64QAM-64QAM	21051-21171	1RB#0-0RB#0	18.38
7-7	15MHz-10MHz	64QAM-64QAM	21051-21171	1RB#0-1RB#49	16.55
7-7	15MHz-10MHz	64QAM-64QAM	21051-21171	1RB#74-0RB#0	18.61
7-7	15MHz-10MHz	64QAM-64QAM	21051-21171	16RB#0-0RB#0	18.39
7-7	15MHz-10MHz	64QAM-64QAM	21051-21171	75RB#0-50RB#0	18.47
7-7	15MHz-10MHz	64QAM-64QAM	21277-21397	1RB#0-0RB#0	18.51
7-7	15MHz-10MHz	64QAM-64QAM	21277-21397	1RB#0-1RB#49	16.91
7-7	15MHz-10MHz	64QAM-64QAM	21277-21397	1RB#74-0RB#0	18.52
7-7	15MHz-10MHz	64QAM-64QAM	21277-21397	16RB#0-0RB#0	18.56
7-7	15MHz-10MHz	64QAM-64QAM	21277-21397	75RB#0-50RB#0	18.52
7-7	15MHz-15MHz	64QAM-64QAM	20825-20975	1RB#0-0RB#0	18.52
7-7	15MHz-15MHz	64QAM-64QAM	20825-20975	1RB#0-1RB#74	15.13
7-7	15MHz-15MHz	64QAM-64QAM	20825-20975	1RB#74-0RB#0	18.52
7-7	15MHz-15MHz	64QAM-64QAM	20825-20975	16RB#0-0RB#0	18.30
7-7	15MHz-15MHz	64QAM-64QAM	20825-20975	75RB#0-75RB#0	18.40
7-7	15MHz-15MHz	64QAM-64QAM	21025-21175	1RB#0-0RB#0	18.48
7-7	15MHz-15MHz	64QAM-64QAM	21025-21175	1RB#0-1RB#74	17.03
7-7	15MHz-15MHz	64QAM-64QAM	21025-21175	1RB#74-0RB#0	18.47
7-7	15MHz-15MHz	64QAM-64QAM	21025-21175	16RB#0-0RB#0	18.39

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-SAR-IEEE Std 1528-2013-V1.1

7-7	15MHz-15MHz	64QAM-64QAM	21025-21175	75RB#0-75RB#0	18.45
7-7	15MHz-15MHz	64QAM-64QAM	21225-21375	1RB#0-0RB#0	18.39
7-7	15MHz-15MHz	64QAM-64QAM	21225-21375	1RB#0-1RB#74	16.57
7-7	15MHz-15MHz	64QAM-64QAM	21225-21375	1RB#74-0RB#0	18.54
7-7	15MHz-15MHz	64QAM-64QAM	21225-21375	16RB#0-0RB#0	18.43
7-7	15MHz-15MHz	64QAM-64QAM	21225-21375	75RB#0-75RB#0	18.61
7-7	15MHz-20MHz	64QAM-64QAM	20828-20999	1RB#0-0RB#0	18.42
7-7	15MHz-20MHz	64QAM-64QAM	20828-20999	1RB#0-1RB#99	14.99
7-7	15MHz-20MHz	64QAM-64QAM	20828-20999	1RB#74-0RB#0	18.59
7-7	15MHz-20MHz	64QAM-64QAM	20828-20999	16RB#0-0RB#0	18.25
7-7	15MHz-20MHz	64QAM-64QAM	20828-20999	75RB#0-100RB#0	18.30
7-7	15MHz-20MHz	64QAM-64QAM	21003-21174	1RB#0-0RB#0	18.21
7-7	15MHz-20MHz	64QAM-64QAM	21003-21174	1RB#0-1RB#99	16.44
7-7	15MHz-20MHz	64QAM-64QAM	21003-21174	1RB#74-0RB#0	18.64
7-7	15MHz-20MHz	64QAM-64QAM	21003-21174	16RB#0-0RB#0	18.23
7-7	15MHz-20MHz	64QAM-64QAM	21003-21174	75RB#0-100RB#0	18.38
7-7	15MHz-20MHz	64QAM-64QAM	21179-21350	1RB#0-0RB#0	18.45
7-7	15MHz-20MHz	64QAM-64QAM	21179-21350	1RB#0-1RB#99	16.59
7-7	15MHz-20MHz	64QAM-64QAM	21179-21350	1RB#74-0RB#0	18.44
7-7	15MHz-20MHz	64QAM-64QAM	21179-21350	16RB#0-0RB#0	18.32
7-7	15MHz-20MHz	64QAM-64QAM	21179-21350	75RB#0-100RB#0	18.56
7-7	20MHz-10MHz	64QAM-64QAM	20850-20994	1RB#0-0RB#0	18.55
7-7	20MHz-10MHz	64QAM-64QAM	20850-20994	1RB#0-1RB#49	15.27
7-7	20MHz-10MHz	64QAM-64QAM	20850-20994	1RB#99-0RB#0	18.34
7-7	20MHz-10MHz	64QAM-64QAM	20850-20994	18RB#0-0RB#0	18.34
7-7	20MHz-10MHz	64QAM-64QAM	20850-20994	100RB#0-50RB#0	18.38
7-7	20MHz-10MHz	64QAM-64QAM	21051-21195	1RB#0-0RB#0	18.48
7-7	20MHz-10MHz	64QAM-64QAM	21051-21195	1RB#0-1RB#49	16.66
7-7	20MHz-10MHz	64QAM-64QAM	21051-21195	1RB#99-0RB#0	18.55
7-7	20MHz-10MHz	64QAM-64QAM	21051-21195	18RB#0-0RB#0	18.29
7-7	20MHz-10MHz	64QAM-64QAM	21051-21195	100RB#0-50RB#0	18.43
7-7	20MHz-10MHz	64QAM-64QAM	21251-21395	1RB#0-0RB#0	18.52
7-7	20MHz-10MHz	64QAM-64QAM	21251-21395	1RB#0-1RB#49	16.72
7-7	20MHz-10MHz	64QAM-64QAM	21251-21395	1RB#99-0RB#0	18.47
7-7	20MHz-10MHz	64QAM-64QAM	21251-21395	18RB#0-0RB#0	18.37
7-7	20MHz-10MHz	64QAM-64QAM	21251-21395	100RB#0-50RB#0	18.57
7-7	20MHz-15MHz	64QAM-64QAM	20850-21021	1RB#0-0RB#0	18.42
7-7	20MHz-15MHz	64QAM-64QAM	20850-21021	1RB#0-1RB#74	14.94
7-7	20MHz-15MHz	64QAM-64QAM	20850-21021	1RB#99-0RB#0	18.56
7-7	20MHz-15MHz	64QAM-64QAM	20850-21021	18RB#0-0RB#0	18.24
7-7	20MHz-15MHz	64QAM-64QAM	20850-21021	100RB#0-75RB#0	18.40
7-7	20MHz-15MHz	64QAM-64QAM	21026-21197	1RB#0-0RB#0	18.35
7-7	20MHz-15MHz	64QAM-64QAM	21026-21197	1RB#0-1RB#74	16.56
7-7	20MHz-15MHz	64QAM-64QAM	21026-21197	1RB#99-0RB#0	18.47
7-7	20MHz-15MHz	64QAM-64QAM	21026-21197	18RB#0-0RB#0	18.16
7-7	20MHz-15MHz	64QAM-64QAM	21026-21197	100RB#0-75RB#0	18.32
7-7	20MHz-15MHz	64QAM-64QAM	21201-21372	1RB#0-0RB#0	18.43
7-7	20MHz-15MHz	64QAM-64QAM	21201-21372	1RB#0-1RB#74	16.76
7-7	20MHz-15MHz	64QAM-64QAM	21201-21372	1RB#99-0RB#0	18.58
7-7	20MHz-15MHz	64QAM-64QAM	21201-21372	18RB#0-0RB#0	18.41
7-7	20MHz-15MHz	64QAM-64QAM	21201-21372	100RB#0-75RB#0	18.60
7-7	20MHz-20MHz	64QAM-64QAM	20850-21048	1RB#0-0RB#0	18.57
7-7	20MHz-20MHz	64QAM-64QAM	20850-21048	1RB#0-1RB#99	15.14
7-7	20MHz-20MHz	64QAM-64QAM	20850-21048	1RB#99-0RB#0	18.47
7-7	20MHz-20MHz	64QAM-64QAM	20850-21048	18RB#0-0RB#0	18.17
7-7	20MHz-20MHz	64QAM-64QAM	20850-21048	100RB#0-100RB#0	18.30
7-7	20MHz-20MHz	64QAM-64QAM	21001-21199	1RB#0-0RB#0	18.48
7-7	20MHz-20MHz	64QAM-64QAM	21001-21199	1RB#0-1RB#99	16.72
7-7	20MHz-20MHz	64QAM-64QAM	21001-21199	1RB#99-0RB#0	18.57
7-7	20MHz-20MHz	64QAM-64QAM	21001-21199	18RB#0-0RB#0	18.06
7-7	20MHz-20MHz	64QAM-64QAM	21001-21199	100RB#0-100RB#0	18.25
7-7	20MHz-20MHz	64QAM-64QAM	21152-21350	1RB#0-0RB#0	18.24
7-7	20MHz-20MHz	64QAM-64QAM	21152-21350	1RB#0-1RB#99	16.42

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-SAR-IEEE Std 1528-2013-V1.1

7-7	20MHz-20MHz	64QAM-64QAM	21152-21350	1RB#99-0RB#0	18.47
7-7	20MHz-20MHz	64QAM-64QAM	21152-21350	18RB#0-0RB#0	18.11
7-7	20MHz-20MHz	64QAM-64QAM	21152-21350	100RB#0-100RB#0	18.51



4.3.4. Conducted Power of WLAN

The measuring conducted average power is shown as below.

Band	Mode	Channel	Frequency (MHz)	Average Power (dBm)
2.4GHz	802.11b	1	2412	16.87
		6	2437	16.99
		11	2462	17.30
	802.11g	1	2412	14.60
		6	2437	14.59
		11	2462	14.97
	802.11n-HT20	1	2412	14.42
		6	2437	14.53
		11	2462	14.83
	802.11n-HT40	3	2422	13.65
		6	2437	13.95
		9	2452	14.00

Mode	Band	Channel	Frequency (MHz)	Average Power (dBm)
802.11a	U-NII-1	36	5180	12.49
		44	5220	12.62
		48	5240	12.48
	U-NII-2A	52	5260	12.51
		60	5300	12.41
		64	5320	12.47
	U-NII-2C	100	5500	12.07
		120	5600	12.27
		140	5700	12.54
	U-NII-3	149	5745	14.40
		157	5785	14.74
		165	5825	14.71

Mode	Band	Channel	Frequency (MHz)	Average Power (dBm)
802.11n-HT20	U-NII-1	36	5180	12.37
		44	5220	12.57
		48	5240	12.42
	U-NII-2A	52	5260	12.48
		60	5300	12.19
		64	5320	12.44
	U-NII-2C	100	5500	12.04
		120	5600	12.16
		140	5700	12.36
	U-NII-3	149	5745	14.30
		157	5785	14.53
		165	5825	15.16

Mode	Band	Channel	Frequency (MHz)	Average Power (dBm)
802.11n-HT40	U-NII-1	38	5190	12.34
		46	5230	12.38
	U-NII-2A	54	5270	12.35
		62	5310	12.09
	U-NII-2C	102	5510	11.64
		118	5590	11.83

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-SAR-IEEE Std 1528-2013-V1.1

		134	5670	12.06
	U-NII-3	151	5755	13.41
		159	5795	13.61

Mode	Band	Channel	Frequency (MHz)	Average Power (dBm)
802.11ac-VHT20	U-NII-1	36	5180	12.16
		44	5220	12.29
		48	5240	12.22
	U-NII-2A	52	5260	12.21
		60	5300	12.01
		64	5320	12.07
	U-NII-2C	100	5500	11.49
		120	5600	11.29
		140	5700	11.87
	U-NII-3	149	5745	12.75
157		5785	13.03	
165		5825	12.99	

Mode	Band	Channel	Frequency (MHz)	Average Power (dBm)
802.11ac-VHT40	U-NII-1	38	5190	12.29
		46	5230	12.28
	U-NII-2A	54	5270	12.29
		62	5310	12.06
	U-NII-2C	102	5510	11.60
		118	5590	11.70
		134	5670	12.06
	U-NII-3	151	5755	13.35
159		5795	13.62	

Mode	Band	Channel	Frequency (MHz)	Average Power (dBm)
802.11ac-VHT80	U-NII-1	42	5210	12.22
	U-NII-2A	58	5290	12.21
	U-NII-2C	106	5530	11.56
		122	5610	12.11
	U-NII-3	155	5775	13.48

4.3.5. Conducted Power of BT

Mode	Modulation	Channel	Frequency (MHz)	Average Power (dBm)
BR + EDR	GFSK	0	2402	14.55
		39	2441	15.29
		78	2480	16.38
	π/4-DQPSK	0	2402	11.62
		39	2441	12.03
		78	2480	13.46
	8-DPSK	0	2402	11.75
		39	2441	11.79
		78	2480	13.38

Mode	Modulation	Channel	Frequency (MHz)	Average Power (dBm)
LE	GFSK	0	2402	2.68
		19	2440	3.48
		39	2480	2.70

4.4. NFC EXPOSURE REQUIREMENTS

According to the KDB 447498 D01 V06, clause 4.3, the following RF exposure evaluation shall to demonstrate RF exposure compliance.

Tx frequency: 13.56 MHz Type of Modulation: ASK
 Antenna Type: FPCB Antenna
 Nominal rated field strength: 60.9 dBµV/m at 3 meter

Based on the Maximum allowed field strength was 60.9 dBµV/m at 3m in frequency 13.56MHz, thus;

The EIRP = $[(FS \cdot D)^2 \cdot 1000 / 30] = 0.000369 \text{ mW}$

Thus;

Conducted power = Radiated Power (EIRP) – Antenna Gain

So;

Conducted Power = 0.000369 mW.

The SAR Exclusion Threshold Level for 13.56MHz when the minimum test separation distance is < 50mm:
 $= [474 \cdot (1 + \log_{10}(f(\text{MHz})))]/2$
 $= 443\text{mW}$

Since the source-based time-averaging conducted output power is well below the SAR low threshold level, so the EUT is considered to comply with SAR requirement without testing.

4.5. POWER REDUCTION SPECIFICATION


4.5.1. Proximity sensor triggering distance

Proximity sensor triggering distance testing was performed according to the procedures outlined in KDB 616217 D04 section 6.2, and EUT moving further away from the flat phantom and EUT moving toward the flat phantom were both assessed.

Proximity sensor triggering distance testing was performed according and EUT moving further away from the flat phantom and EUT moving toward the flat phantom were both assessed and the tissue-equivalent medium for highest frequency (2500MHz) was used for proximity sensor triggering testing.

4.5.2. Triggering distance for perpendicular DUT orientation

Both the proximity sensor and WWAN antenna 1 are located at the top of the smartphone and are only available for LTE Band 7(WWAN antenna 1). The distance sensor is triggered when an object approaches the phone, and is only effective on the front of the phone.

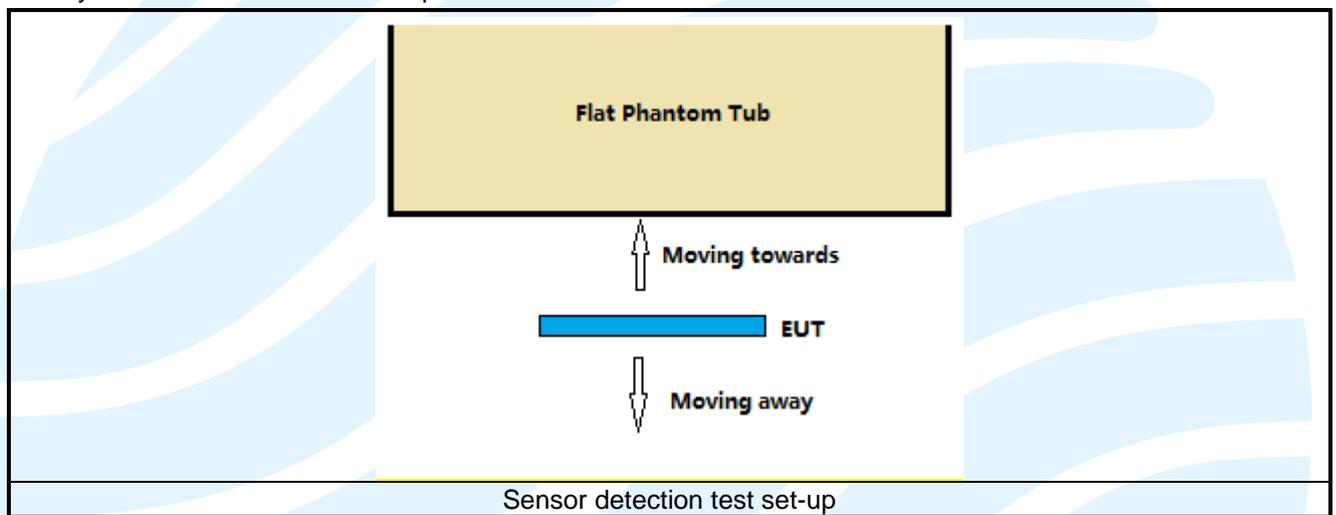

The trigger distance shown in the sections below.

P-Sensor < Sensor for WWAN Antenna 1 >

Proximity Sensor Triggering Distance (mm)				
Position	Front		Rear	
	Moving towards	Moving away	Moving towards	Moving away
Triggering Distance	16	19	16	22

4.5.3. Voice routing (where the presence of audio is employed to determine operating state)

This device uses the receiver to indicate whether the user is making a voice call in head scenario or not. The selection between head and body power levels is based on the receiver detection mechanism. A fixed level power reduction is applied for some frequency bands when the audio receiver is on.

4.5.4. Hotspot mode (where the presence of hotspot on is employed to determine operating state)

This device will trigger the mechanism when working in hotspot mode. A fixed level power reduction is applied for some frequency bands when the hotspot is on.

The detailed power reduction information can be referred to 4.3 chapter (MEASURED CONDUCTED POWER RESULT).

4.6. SAR TESTING RESULTS

4.6.1. SAR Test Reduction Considerations

KDB 447498 D01 General RF Exposure Guidance

Testing of other required channels within the operating mode of a frequency band is not required when the reported SAR for the mid-band or highest output power channel is:

- a) ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
- b) ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
- c) ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz

KDB 941225 D01 3G SAR Procedures

a) GSM SAR Test Reduction

SAR test reduction for GPRS and EDGE modes is determined by the source-based time-averaged output power specified for production units, including tune-up tolerance. The data mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. The GMSK EDGE configurations are grouped with GPRS and considered with respect to time-averaged maximum output power to determine compliance. The 3G SAR test reduction procedure is applied to 8-PSK EDGE with GMSK GPRS/EDGE as the primary mode.

b) 3G SAR Test Reduction Procedure

The mode tested for SAR is referred to as the primary mode. The equivalent modes considered for SAR test reduction are denoted as secondary modes. Both primary and secondary modes must be in the same frequency band. When the maximum output power and tune-up tolerance specified for production units in a secondary mode is $\leq 1/4$ dB higher than the primary mode or when the highest reported SAR of the primary mode is scaled by the ratio of specified maximum output power and tune-up tolerance of secondary to primary mode and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for the secondary mode.

KDB 941225 D05 SAR for LTE Devices

a) QPSK with 1 RB and 50% RB allocation

Start with the largest channel bandwidth and measure SAR, using the RB offset and required test channel combination with the highest maximum output power among RB offsets at the upper edge, middle and lower edge of each required test channel. When the reported SAR is ≤ 0.8 W/kg, testing of the remaining RB offset configurations and required test channels is not required; otherwise, SAR is required for the remaining required test channels and only for the RB offset configuration with the highest output power for that channel. When the reported SAR of a required test channel is > 1.45 W/kg, SAR is required for all three RB offset configurations for that required test channel.

b) QPSK with 100% RB allocation

SAR is not required when the highest maximum output power for 100% RB allocation is less than the highest maximum output power in 50% and 1 RB allocations and the highest reported SAR for 1 RB and 50% RB allocation are ≤ 0.8 W/kg. Otherwise, SAR is measured for the highest output power channel; and if the reported SAR is > 1.45 W/kg, the remaining required test channels must also be tested.

c) Higher order modulations

SAR is required only when the highest maximum output power for the configuration in the higher order modulation is $> 1/2$ dB higher than the same configuration in QPSK or when the reported SAR for the QPSK configuration is > 1.45 W/kg.

d) Others channel bandwidth

SAR is required when the highest maximum output power of the smaller channel bandwidth is $> 1/2$ dB higher than the equivalent channel configurations in the largest channel bandwidth configuration or the reported SAR of a configuration for the largest channel bandwidth is > 1.45 W/kg.

KDB 941225 D06 Hot Spot SAR

Hotspot mode SAR is measured for all edges and surfaces of the device with a transmitting antenna located within 25 mm from that surface or edge.

Antenna	Front Face	Rear Face	Left Side	Right Side	Top Side	Bottom Side
WWAN Ant. 2	Yes	Yes	Yes	Yes	N/A	Yes
WWAN Ant. 1	Yes	Yes	N/A	Yes	Yes	N/A
WLAN / BT Ant. 0	Yes	Yes	Yes	N/A	Yes	N/A

KDB 248227 D01 Wi-Fi SAR

- a) For handsets operating next to ear, hotspot mode or mini-tablet configurations, the initial test position procedures were applied. The test position with the highest extrapolated peak SAR will be used as the initial test position. When the reported SAR of initial test position is ≤ 0.4 W/kg, SAR testing for remaining test positions is not required. Otherwise, SAR is evaluated at the subsequent highest peak SAR positions until the reported SAR result is ≤ 0.8 W/kg or all test positions are measured.
- b) For WLAN 2.4 GHz, the highest measured maximum output power channel for DSSS was selected for SAR measurement. When the reported SAR is ≤ 0.8 W/kg, no further SAR testing is required. Otherwise, SAR is evaluated at the next highest measured output power channel. When any reported SAR is > 1.2 W/kg, SAR is required for the third channel. For OFDM modes (802.11g/n), SAR is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and it is ≤ 1.2 W/kg.
- c) For WLAN 5 GHz, the initial test configuration was selected according to the transmission mode with the highest maximum output power. When the reported SAR of initial test configuration is > 0.8 W/kg, SAR is required for the subsequent highest measured output power channel until the reported SAR result is ≤ 1.2 W/kg or all required channels are measured. For other transmission modes, SAR is not required when the highest reported SAR for initial test configuration is adjusted by the ratio of subsequent test configuration to initial test configuration specified maximum output power and it is ≤ 1.2 W/kg.
- d) For WLAN MIMO mode, the power-based standalone SAR test exclusion or the sum of SAR provision in KDB 447498 to determine simultaneous transmission SAR test exclusion should be applied. Otherwise, SAR for MIMO mode will be measured with all applicable antennas transmitting simultaneously at the specified maximum output power of MIMO operation.

4.6.2. SAR Results for Head Exposure Condition

Plot No.	Band	Mode	Test Position	Channel	RB#	RB Offset	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaling Factor	Scaled SAR-1g (W/kg)	Antenna	States	Note
1	GSM 850	GPRS10	Right Cheek	190	-	-	33.0	32.71	0.15	0.57	1.07	0.609	2	--	--
	GSM 850	GPRS10	Right Tilted	190	-	-	33.0	32.71	0.02	0.311	1.07	0.332	2	--	--
	GSM 850	GPRS10	Left Cheek	190	-	-	33.0	32.71	-0.05	0.451	1.07	0.482	2	--	--
	GSM 850	GPRS10	Left Tilted	190	-	-	33.0	32.71	-0.02	0.273	1.07	0.292	2	--	--
	GSM1900	GPRS10	Right Cheek	661	-	-	25.0	24.42	0.03	0.821	1.14	0.938	1	Receiver ON	--
	GSM1900	GPRS10	Right Tilted	661	-	-	25.0	24.42	0.05	0.488	1.14	0.558	1	Receiver ON	--
	GSM1900	GPRS10	Left Cheek	661	-	-	25.0	24.42	0.01	0.481	1.14	0.550	1	Receiver ON	--
	GSM1900	GPRS10	Left Tilted	661	-	-	25.0	24.42	-0.05	0.316	1.14	0.361	1	Receiver ON	--
	GSM1900	GPRS10	Right Cheek	512	-	-	25.0	23.94	0.02	0.759	1.28	0.969	1	Receiver ON	
2	GSM1900	GPRS10	Right Cheek	810	-	-	25.0	23.78	0.14	0.893	1.32	1.183	1	Receiver ON	
	GSM1900	GPRS10	Right Cheek	810	-	-	25.0	23.78	0.03	0.876	1.32	1.160	1	Receiver ON	REPEAT
3	WCDMA Band II	RMC12.2K	Right Cheek	9400	-	-	17.5	17.00	-0.01	0.628	1.12	0.705	1	Receiver ON	--
	WCDMA Band II	RMC12.2K	Right Tilted	9400	-	-	17.5	17.00	0.08	0.426	1.12	0.478	1	Receiver ON	--
	WCDMA Band II	RMC12.2K	Left Cheek	9400	-	-	17.5	17.00	0.03	0.356	1.12	0.399	1	Receiver ON	--
	WCDMA Band II	RMC12.2K	Left Tilted	9400	-	-	17.5	17.00	-0.08	0.279	1.12	0.313	1	Receiver ON	--
4	WCDMA Band IV	RMC12.2K	Right Cheek	1413	-	-	17.5	16.99	-0.09	0.643	1.12	0.723	1	Receiver ON	--
	WCDMA Band IV	RMC12.2K	Right Tilted	1413	-	-	17.5	16.99	0.03	0.419	1.12	0.471	1	Receiver ON	--
	WCDMA Band IV	RMC12.2K	Left Cheek	1413	-	-	17.5	16.99	0.01	0.357	1.12	0.401	1	Receiver ON	--
	WCDMA Band IV	RMC12.2K	Left Tilted	1413	-	-	17.5	16.99	-0.04	0.359	1.12	0.404	1	Receiver ON	--

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-SAR-IEEE Std 1528-2013-V1.1

Plot No.	Band	Mode	Test Position	Channel	RB#	RB Offset	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaling Factor	Scaled SAR-1g (W/kg)	Antenna	States	Note
5	WCDMA Band V	RMC12.2K	Right Cheek	4132	-	-	23.0	22.74	0.18	0.352	1.06	0.374	2	--	--
	WCDMA Band V	RMC12.2K	Right Tilted	4132	-	-	23.0	22.74	0.00	0.183	1.06	0.194	2	--	--
	WCDMA Band V	RMC12.2K	Left Cheek	4132	-	-	23.0	22.74	0.19	0.292	1.06	0.310	2	--	--
	WCDMA Band V	RMC12.2K	Left Tilted	4132	-	-	23.0	22.74	0.00	0.168	1.06	0.178	2	--	--
6	LTE Band 2	QPSK20M	Right Cheek	18700	1	49	17.0	16.62	-0.03	0.574	1.09	0.626	1	Receiver ON	--
	LTE Band 2	QPSK20M	Right Tilted	18700	1	49	17.0	16.62	-0.03	0.342	1.09	0.373	1	Receiver ON	--
	LTE Band 2	QPSK20M	Left Cheek	18700	1	49	17.0	16.62	-0.04	0.388	1.09	0.423	1	Receiver ON	--
	LTE Band 2	QPSK20M	Left Tilted	18700	1	49	17.0	16.62	-0.03	0.336	1.09	0.367	1	Receiver ON	--
	LTE Band 2	QPSK20M	Right Cheek	18700	50	50	17.0	16.43	0.04	0.601	1.14	0.685	1	Receiver ON	--
	LTE Band 2	QPSK20M	Right Tilted	18700	50	50	17.0	16.43	-0.18	0.356	1.14	0.406	1	Receiver ON	--
	LTE Band 2	QPSK20M	Left Cheek	18700	50	50	17.0	16.43	0.08	0.409	1.14	0.466	1	Receiver ON	--
	LTE Band 2	QPSK20M	Left Tilted	18700	50	50	17.0	16.43	-0.08	0.351	1.14	0.400	1	Receiver ON	--
7	LTE Band 2	QPSK20M	Right Cheek	18900	50	50	17.0	16.27	0.09	0.481	1.18	0.569	1	Receiver ON	
	LTE Band 2	QPSK20M	Right Cheek	19100	50	50	17.0	16.00	0.01	0.45	1.26	0.567	1	Receiver ON	
	LTE Band 5	QPSK10M	Right Cheek	20600	1	25	24.5	23.98	0.05	0.168	1.13	0.189	2	--	--
	LTE Band 5	QPSK10M	Right Tilted	20600	1	25	24.5	23.98	0.00	0.164	1.13	0.185	2	--	--
	LTE Band 5	QPSK10M	Left Cheek	20600	1	25	24.5	23.98	0.04	0.261	1.13	0.294	2	--	--
	LTE Band 5	QPSK10M	Left Tilted	20600	1	25	24.5	23.98	-0.07	0.156	1.13	0.176	2	--	--
	LTE Band 5	QPSK10M	Right Cheek	20600	25	25	23.5	22.82	0.16	0.151	1.17	0.177	2	--	--
	LTE Band 5	QPSK10M	Right Tilted	20600	25	25	23.5	22.82	-0.05	0.131	1.17	0.153	2	--	--
8	LTE Band 5	QPSK10M	Left Cheek	20600	25	25	23.5	22.82	0.04	0.209	1.17	0.244	2	--	--
	LTE Band 5	QPSK10M	Left Tilted	20600	25	25	23.5	22.82	-0.05	0.123	1.17	0.144	2	--	--
8	LTE Band 7	QPSK20M	Right Cheek	21350	1	49	16.0	15.53	0.02	0.991	1.11	1.104	1	Receiver ON	--
	LTE Band 7	QPSK20M	Right Tilted	21350	1	49	16.0	15.53	0.11	0.795	1.11	0.886	1	Receiver	--

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China
 Tel: +86-755-28230888 Fax: +86-755-28230886 E-mail: info@uttlab.com <http://www.uttlab.com>
 UTRR-SAR-IEEE Std 1528-2013-V1.1

Plot No.	Band	Mode	Test Position	Channel	RB#	RB Offset	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaling Factor	Scaled SAR-1g (W/kg)	Antenna	States	Note
														ON	
	LTE Band 7	QPSK20M	Left Cheek	21350	1	49	16.0	15.53	0.02	0.495	1.11	0.552	1	Receiver ON	--
	LTE Band 7	QPSK20M	Left Tilted	21350	1	49	16.0	15.53	-0.03	0.591	1.11	0.659	1	Receiver ON	--
	LTE Band 7	QPSK20M	Right Cheek	21350	50	0	16.0	15.42	0.09	0.943	1.14	1.078	1	Receiver ON	--
	LTE Band 7	QPSK20M	Right Tilted	21350	50	0	16.0	15.42	-0.15	0.756	1.14	0.864	1	Receiver ON	--
	LTE Band 7	QPSK20M	Left Cheek	21350	50	0	16.0	15.42	-0.03	0.443	1.14	0.506	1	Receiver ON	--
	LTE Band 7	QPSK20M	Left Tilted	21350	50	0	16.0	15.42	0.00	0.553	1.14	0.632	1	Receiver ON	--
	LTE Band 7	QPSK20M	Right Cheek	20850	1	49	16.0	15.31	0.01	0.766	1.17	0.898	1	Receiver ON	--
	LTE Band 7	QPSK20M	Right Cheek	21100	1	49	16.0	15.42	0.00	0.796	1.14	0.910	1	Receiver ON	--
	LTE Band 12	QPSK10M	Right Cheek	23095	1	25	24.5	24.21	0.03	0.0976	1.07	0.104	2	--	--
	LTE Band 12	QPSK10M	Right Tilted	23095	1	25	24.5	24.21	0.06	0.126	1.07	0.135	2	--	--
9	LTE Band 12	QPSK10M	Left Cheek	23095	1	25	24.5	24.21	0.01	0.216	1.07	0.231	2	--	--
	LTE Band 12	QPSK10M	Left Tilted	23095	1	25	24.5	24.21	-0.06	0.118	1.07	0.126	2	--	--
	LTE Band 12	QPSK10M	Right Cheek	23060	25	25	23.5	22.96	0.19	0.0878	1.13	0.099	2	--	--
	LTE Band 12	QPSK10M	Right Tilted	23060	25	25	23.5	22.96	0.11	0.0978	1.13	0.111	2	--	--
	LTE Band 12	QPSK10M	Left Cheek	23060	25	25	23.5	22.96	-0.17	0.0579	1.13	0.066	2	--	--
	LTE Band 12	QPSK10M	Left Tilted	23060	25	25	23.5	22.96	0.09	0.0927	1.13	0.105	2	--	--
	LTE Band 13	QPSK10M	Right Cheek	23230	1	25	24.5	24.13	-0.03	0.0825	1.09	0.090	2	--	--
	LTE Band 13	QPSK10M	Right Tilted	23230	1	25	24.5	24.13	0.03	0.098	1.09	0.107	2	--	--
10	LTE Band 13	QPSK10M	Left Cheek	23230	1	25	24.5	24.13	-0.07	0.16	1.09	0.174	2	--	--
	LTE Band 13	QPSK10M	Left Tilted	23230	1	25	24.5	24.13	0.17	0.0949	1.09	0.103	2	--	--
	LTE Band 13	QPSK10M	Right Cheek	23230	25	25	23.5	22.91	0.05	0.0656	1.15	0.075	2	--	--
	LTE Band 13	QPSK10M	Right Tilted	23230	25	25	23.5	22.91	0.03	0.076	1.15	0.087	2	--	--
	LTE Band 13	QPSK10M	Left Cheek	23230	25	25	23.5	22.91	0.07	0.124	1.15	0.142	2	--	--
	LTE Band 13	QPSK10M	Left Tilted	23230	25	25	23.5	22.91	0.03	0.0731	1.15	0.084	2	--	--

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China
 Tel: +86-755-28230888 Fax: +86-755-28230886 E-mail: info@uttlab.com <http://www.uttlab.com>
 UTR-SAR-IEEE Std 1528-2013-V1.1

Plot No.	Band	Mode	Test Position	Channel	RB#	RB Offset	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaling Factor	Scaled SAR-1g (W/kg)	Antenna	States	Note
	LTE Band 66	QPSK20M	Right Cheek	132072	1	49	19.0	18.48	-0.01	0.869	1.13	0.980	1	Receiver ON	--
	LTE Band 66	QPSK20M	Right Tilted	132072	1	49	19.0	18.48	0.01	0.646	1.13	0.728	1	Receiver ON	--
	LTE Band 66	QPSK20M	Left Cheek	132072	1	49	19.0	18.48	-0.05	0.531	1.13	0.599	1	Receiver ON	--
	LTE Band 66	QPSK20M	Left Tilted	132072	1	49	19.0	18.48	-0.01	0.527	1.13	0.594	1	Receiver ON	--
	LTE Band 66	QPSK20M	Right Cheek	132072	50	50	18.5	18.23	0.01	0.883	1.06	0.940	1	Receiver ON	--
	LTE Band 66	QPSK20M	Right Tilted	132072	50	50	18.5	18.23	0.00	0.65	1.06	0.692	1	Receiver ON	--
	LTE Band 66	QPSK20M	Left Cheek	132072	50	50	18.5	18.23	-0.02	0.533	1.06	0.567	1	Receiver ON	--
	LTE Band 66	QPSK20M	Left Tilted	132072	50	50	18.5	18.23	-0.04	0.524	1.06	0.558	1	Receiver ON	--
	LTE Band 66	QPSK20M	Right Cheek	132322	1	49	19.0	18.25	0.01	0.647	1.19	0.769	1	Receiver ON	--
11	LTE Band 66	QPSK20M	Right Cheek	132572	1	49	19.0	18.20	-0.01	0.992	1.20	1.193	1	Receiver ON	--
	LTE Band 66	QPSK20M	Right Cheek	132572	1	49	19.0	18.20	0.18	0.985	1.20	1.184	1	Receiver ON	REPEAT
12	LTE Band 71	QPSK20M	Right Cheek	133322	1	49	25.0	24.53	-0.12	0.208	1.11	0.232	2	--	--
	LTE Band 71	QPSK20M	Right Tilted	133322	1	49	25.0	24.53	0.04	0.106	1.11	0.118	2	--	--
	LTE Band 71	QPSK20M	Left Cheek	133322	1	49	25.0	24.53	-0.12	0.172	1.11	0.192	2	--	--
	LTE Band 71	QPSK20M	Left Tilted	133322	1	49	25.0	24.53	0.01	0.0986	1.11	0.110	2	--	--
	LTE Band 71	QPSK20M	Right Cheek	133322	50	0	23.5	23.10	0.17	0.162	1.10	0.178	2	--	--
	LTE Band 71	QPSK20M	Right Tilted	133322	50	0	23.5	23.10	0.11	0.0821	1.10	0.090	2	--	--
	LTE Band 71	QPSK20M	Left Cheek	133322	50	0	23.5	23.10	-0.09	0.138	1.10	0.151	2	--	--
	LTE Band 71	QPSK20M	Left Tilted	133322	50	0	23.5	23.10	-0.01	0.0768	1.10	0.084	2	--	--

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-SAR-IEEE Std 1528-2013-V1.1

Plot No.	Band	Mode	Test Position	Channel	Duty Cycle	Duty Cycle Scaling Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaling Factor	Scaled SAR-1g (W/kg)	States	Note
	2.4GHz ISM	Bluetooth_DH5	Right Cheek	78	76.60%	1.3055	17.0	16.38	-0.19	0.176	1.15	0.265	--	--
	2.4GHz ISM	Bluetooth_DH5	Right Tilted	78	76.60%	1.3055	17.0	16.38	-0.15	0.138	1.15	0.208	--	--
13	2.4GHz ISM	Bluetooth_DH5	Left Cheek	78	76.60%	1.3055	17.0	16.38	0.03	0.408	1.15	0.614	--	--
	2.4GHz ISM	Bluetooth_DH5	Left Tilted	78	76.60%	1.3055	17.0	16.38	0.15	0.342	1.15	0.515	--	--
	2.4GHz ISM	IEEE 802.11b	Right Cheek	11	99.64%	1.0036	18.0	17.30	0.03	0.303	1.17	0.357	--	--
	2.4GHz ISM	IEEE 802.11b	Right Tilted	11	99.64%	1.0036	18.0	17.30	-0.05	0.242	1.17	0.285	--	--
14	2.4GHz ISM	IEEE 802.11b	Left Cheek	11	99.64%	1.0036	18.0	17.30	0.05	0.63	1.17	0.743	--	--
	2.4GHz ISM	IEEE 802.11b	Left Tilted	11	99.64%	1.0036	18.0	17.30	0.04	0.549	1.17	0.647	--	--
	U-NII-1	IEEE 802.11a	Right Cheek	44	96.50%	1.036	13.0	12.62	0.17	0.346	1.09	0.391	--	--
	U-NII-1	IEEE 802.11a	Right Tilted	44	96.50%	1.036	13.0	12.62	0.11	0.387	1.09	0.438	--	--
	U-NII-1	IEEE 802.11a	Left Cheek	44	96.50%	1.036	13.0	12.62	-0.14	0.557	1.09	0.630	--	--
15	U-NII-1	IEEE 802.11a	Left Tilted	44	96.50%	1.036	13.0	12.62	-0.07	0.633	1.09	0.716	--	--
	U-NII-2A	IEEE 802.11a	Right Cheek	52	96.50%	1.036	13.0	12.51	-0.06	0.35	1.12	0.406	--	--
	U-NII-2A	IEEE 802.11a	Right Tilted	52	96.50%	1.036	13.0	12.51	0.08	0.389	1.12	0.451	--	--
	U-NII-2A	IEEE 802.11a	Left Cheek	52	96.50%	1.036	13.0	12.51	-0.10	0.592	1.12	0.687	--	--
16	U-NII-2A	IEEE 802.11a	Left Tilted	52	96.50%	1.036	13.0	12.51	0.07	0.651	1.12	0.755	--	--
	U-NII-2C	IEEE 802.11a	Right Cheek	140	96.50%	1.036	13.0	12.54	0.03	0.347	1.11	0.400	--	--
	U-NII-2C	IEEE 802.11a	Right Tilted	140	96.50%	1.036	13.0	12.54	0.07	0.394	1.11	0.454	--	--
	U-NII-2C	IEEE 802.11a	Left Cheek	140	96.50%	1.036	13.0	12.54	-0.09	0.518	1.11	0.597	--	--
17	U-NII-2C	IEEE 802.11a	Left Tilted	140	96.50%	1.036	13.0	12.54	-0.08	0.536	1.11	0.618	--	--
	U-NII-3	IEEE 802.11n-HT20	Right Cheek	165	96.99%	1.031	15.5	15.16	-0.11	0.342	1.08	0.381	--	--
	U-NII-3	IEEE 802.11n-HT20	Right Tilted	165	96.99%	1.031	15.5	15.16	0.10	0.373	1.08	0.416	--	--
	U-NII-3	IEEE 802.11n-HT20	Left Cheek	165	96.99%	1.031	15.5	15.16	-0.01	0.463	1.08	0.516	--	--
18	U-NII-3	IEEE 802.11n-HT20	Left Tilted	165	96.99%	1.031	15.5	15.16	-0.03	0.593	1.08	0.661	--	--

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-SAR-IEEE Std 1528-2013-V1.1

4.6.3. SAR Results for Body-worn Exposure Condition (Separation Distance is 1.0 cm)

Plot No.	Band	Mode	Test Position	Channel	RB#	RB Offset	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaling Factor	Scaled SAR-1g (W/kg)	Antenna	States	Note
19	GSM 850	GPRS10	Front Face	190	-	-	33.0	32.71	0.04	0.753	1.07	0.805	2	--	--
	GSM 850	GPRS10	Rear Face	190	-	-	33.0	32.71	0.07	1.18	1.07	1.261	2	--	--
	GSM 850	GPRS10	Rear Face	190	-	-	33.0	32.71	-0.10	1.12	1.07	1.197	2	--	REPEAT
	GSM 850	GPRS10	Rear Face	128	-	-	33.0	32.68	-0.11	0.432	1.08	0.465	2	--	--
	GSM 850	GPRS10	Rear Face	251	-	-	33.0	32.70	0.03	1.1	1.07	1.179	2	--	--
20	PCS 1900	GPRS10	Front Face	661	-	-	29.0	28.59	-0.02	0.624	1.10	0.686	1	--	--
	PCS 1900	GPRS10	Rear Face	661	-	-	29.0	28.59	0.03	0.867	1.10	0.953	1	--	--
	PCS 1900	GPRS10	Rear Face	661	-	-	29.0	28.59	0.02	0.852	1.10	0.936	1	--	REPEAT
	PCS 1900	GPRS10	Rear Face	512	-	-	29.0	28.53	-0.05	0.754	1.11	0.840	1	--	--
	PCS 1900	GPRS10	Rear Face	810	-	-	29.0	28.33	0.02	0.722	1.17	0.842	1	--	--
21	WCDMA Band II	RMC12.2K	Front Face	9400	-	-	23.5	23.16	0.09	0.667	1.08	0.721	1	--	--
	WCDMA Band II	RMC12.2K	Rear Face	9400	-	-	23.5	23.16	0.00	0.969	1.08	1.048	1	--	--
	WCDMA Band II	RMC12.2K	Rear Face	9262	-	-	23.5	23.04	0.03	0.973	1.11	1.082	1	--	--
	WCDMA Band II	RMC12.2K	Rear Face	9262	-	-	23.5	23.04	0.01	0.969	1.11	1.077	1	--	REPEAT
	WCDMA Band II	RMC12.2K	Rear Face	9538	-	-	23.5	23.04	-0.01	0.936	1.11	1.041	1	--	--
22	WCDMA Band IV	RMC12.2K	Front Face	1413	-	-	24.0	23.38	-0.05	0.544	1.15	0.627	1	--	--
	WCDMA Band IV	RMC12.2K	Rear Face	1413	-	-	24.0	23.38	-0.10	0.746	1.15	0.860	1	--	--
	WCDMA Band IV	RMC12.2K	Rear Face	1312	-	-	24.0	23.31	-0.02	0.774	1.17	0.907	1	--	--
	WCDMA Band IV	RMC12.2K	Rear Face	1513	-	-	24.0	23.30	0.07	0.82	1.17	0.963	1	--	--
	WCDMA Band IV	RMC12.2K	Rear Face	1513	-	-	24.0	23.30	0.08	0.814	1.17	0.956	1	--	REPEAT
23	WCDMA Band V	RMC12.2K	Front Face	4132	-	-	23.0	22.74	0.05	0.479	1.06	0.509	2	--	--
	WCDMA Band V	RMC12.2K	Rear Face	4132	-	-	23.0	22.74	0.02	0.709	1.06	0.753	2	--	--
	LTE Band 2	QPSK20M	Front Face	18700	1	49	24.0	23.74	-0.08	0.813	1.06	0.863	1	--	--
	LTE Band 2	QPSK20M	Rear Face	18700	1	49	24.0	23.74	-0.09	1.06	1.06	1.125	1	--	--
	LTE Band 2	QPSK20M	Front Face	18700	50	50	23.0	22.55	0.02	0.657	1.11	0.729	1	--	--
	LTE Band 2	QPSK20M	Rear Face	18700	50	50	23.0	22.55	0.07	0.857	1.11	0.951	1	--	--

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-SAR-IEEE Std 1528-2013-V1.1

Plot No.	Band	Mode	Test Position	Channel	RB#	RB Offset	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaling Factor	Scaled SAR-1g (W/kg)	Antenna	States	Note
24	LTE Band 2	QPSK20M	Rear Face	18900	1	49	24.0	23.71	0.07	1.11	1.07	1.187	1	--	--
	LTE Band 2	QPSK20M	Rear Face	18900	1	49	24.0	23.71	0.03	1.05	1.07	1.123	1	--	REPEAT
	LTE Band 2	QPSK20M	Rear Face	19100	1	49	24.0	23.59	0.01	1.04	1.10	1.143	1	--	--
25	LTE Band 5	QPSK10M	Front Face	20600	1	25	24.5	23.98	-0.07	0.45	1.13	0.507	2	--	--
	LTE Band 5	QPSK10M	Rear Face	20600	1	25	24.5	23.98	0.08	0.626	1.13	0.706	2	--	--
	LTE Band 5	QPSK10M	Front Face	20600	25	25	23.5	22.82	0.02	0.364	1.17	0.426	2	--	--
	LTE Band 5	QPSK10M	Rear Face	20600	25	25	23.5	22.82	0.09	0.503	1.17	0.588	2	--	--
26	LTE Band 7	QPSK20M	Front Face	21350	1	49	19.0	18.67	-0.03	0.284	1.08	0.306	1	Sensor ON	--
	LTE Band 7	QPSK20M	Rear Face	21350	1	49	19.0	18.67	-0.14	0.508	1.08	0.548	1	Sensor ON	--
	LTE Band 7	QPSK20M	Front Face	21350	50	0	18.8	18.37	-0.17	0.267	1.09	0.291	1	Sensor ON	--
	LTE Band 7	QPSK20M	Rear Face	21350	50	0	18.8	18.37	-0.11	0.477	1.09	0.521	1	Sensor ON	--
	LTE Band 7	QPSK20M	Front Face	21350	1	49	24.0	23.44	0.04	0.441	1.14	0.502	1	--	1.5 mm
	LTE Band 7	QPSK20M	Rear Face	21350	1	49	24.0	23.44	-0.14	0.786	1.14	0.894	1	--	1.5 mm
27	LTE Band 7	QPSK20M	Front Face	21350	50	0	23.0	22.35	0.08	0.324	1.16	0.376	1	--	1.5 mm
	LTE Band 7	QPSK20M	Rear Face	21350	50	0	23.0	22.35	-0.12	0.576	1.16	0.669	1	--	1.5 mm
	LTE Band 12	QPSK10M	Front Face	23095	1	25	24.5	24.21	0.01	0.285	1.07	0.305	2	--	--
	LTE Band 12	QPSK10M	Rear Face	23095	1	25	24.5	24.21	-0.02	0.329	1.07	0.352	2	--	--
28	LTE Band 12	QPSK10M	Front Face	23060	25	25	23.5	22.96	-0.02	0.224	1.13	0.254	2	--	--
	LTE Band 12	QPSK10M	Rear Face	23060	25	25	23.5	22.96	0.01	0.233	1.13	0.264	2	--	--
	LTE Band 13	QPSK10M	Front Face	23230	1	25	24.5	24.13	0.02	0.288	1.09	0.314	2	--	--
	LTE Band 13	QPSK10M	Rear Face	23230	1	25	24.5	24.13	0.07	0.407	1.09	0.443	2	--	--
29	LTE Band 13	QPSK10M	Front Face	23230	25	25	23.5	22.91	0.04	0.225	1.15	0.258	2	--	--
	LTE Band 13	QPSK10M	Rear Face	23230	25	25	23.5	22.91	0.08	0.317	1.15	0.363	2	--	--
	LTE Band 66	QPSK20M	Front Face	132072	1	49	24.0	23.49	-0.02	0.718	1.12	0.807	1	--	--
30	LTE Band 66	QPSK20M	Rear Face	132072	1	49	24.0	23.49	-0.01	0.933	1.12	1.049	1	--	--
	LTE Band 66	QPSK20M	Front Face	132072	50	50	23.0	22.42	0.04	0.568	1.14	0.649	1	--	--

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-SAR-IEEE Std 1528-2013-V1.1

Plot No.	Band	Mode	Test Position	Channel	RB#	RB Offset	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaling Factor	Scaled SAR-1g (W/kg)	Antenna	States	Note
	LTE Band 66	QPSK20M	Rear Face	132072	50	50	23.0	22.42	0.03	0.782	1.14	0.894	1	--	--
	LTE Band 66	QPSK20M	Rear Face	132322	1	49	24.0	23.46	-0.02	0.624	1.13	0.707	1	--	--
	LTE Band 66	QPSK20M	Rear Face	132572	1	49	24.0	23.36	0.12	0.538	1.16	0.623	1	--	--
	LTE Band 71	QPSK20M	Front Face	133322	1	49	25.0	24.53	0.07	0.238	1.11	0.265	2	--	--
31	LTE Band 71	QPSK20M	Rear Face	133322	1	49	25.0	24.53	-0.04	0.249	1.11	0.277	2	--	--
	LTE Band 71	QPSK20M	Front Face	133322	50	0	23.5	23.10	0.05	0.187	1.10	0.205	2	--	--
	LTE Band 71	QPSK20M	Rear Face	133322	50	0	23.5	23.10	0.06	0.22	1.10	0.241	2	--	--

Plot No.	Band	Mode	Test Position	Channel	Duty Cycle	Duty Cycle Scaling Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaling Factor	Scaled SAR-1g (W/kg)	Note
	2.4GHz ISM	Bluetooth_DH5	Front Face	78	76.60%	1.3055	17.0	16.38	0.00	0.0833	1.15	0.125	--
32	2.4GHz ISM	Bluetooth_DH5	Rear Face	78	76.60%	1.3055	17.0	16.38	0.02	0.152	1.15	0.229	--
	2.4GHz ISM	IEEE 802.11b	Front Face	11	99.64%	1.0036	18.0	17.30	-0.07	0.176	1.17	0.208	--
33	2.4GHz ISM	IEEE 802.11b	Rear Face	11	99.64%	1.0036	18.0	17.30	-0.15	0.221	1.17	0.261	--
	U-NII-1	IEEE 802.11a	Front Face	44	96.50%	1.036	13.0	12.62	0.03	0.098	1.09	0.111	--
34	U-NII-1	IEEE 802.11a	Rear Face	44	96.50%	1.036	13.0	12.62	0.00	0.245	1.09	0.277	--
	U-NII-2A	IEEE 802.11a	Front Face	52	96.50%	1.036	13.0	12.51	0.05	0.108	1.12	0.125	--
35	U-NII-2A	IEEE 802.11a	Rear Face	52	96.50%	1.036	13.0	12.51	0.00	0.229	1.12	0.266	--
	U-NII-2C	IEEE 802.11a	Front Face	14	96.50%	1.036	13.0	12.54	0.03	0.102	1.11	0.118	--
36	U-NII-2C	IEEE 802.11a	Rear Face	14	96.50%	1.036	13.0	12.54	0.00	0.217	1.11	0.250	--
	U-NII-3	IEEE 802.11n-HT20	Front Face	165	96.99%	1.031	15.5	15.16	-0.06	0.1	1.08	0.111	--
37	U-NII-3	IEEE 802.11n-HT20	Rear Face	165	96.99%	1.031	15.5	15.16	0.00	0.252	1.08	0.281	--

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-SAR-IEEE Std 1528-2013-V1.1

4.6.4. SAR Results for Hotspot Exposure Condition (Separation Distance is 1.0 cm)

Plot No.	Band	Mode	Test Position	Channel	RB#	RB Offset	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaling Factor	Scaled SAR-1g (W/kg)	Antenna	States	Note
	GSM 850	GPRS10	Front Face	190	-	-	33.0	32.71	0.04	0.753	1.07	0.805	2	--	--
19	GSM 850	GPRS10	Rear Face	190	-	-	33.0	32.71	0.07	1.18	1.07	1.261	2	--	--
	GSM 850	GPRS10	Rear Face	190	-	-	33.0	32.71	-0.10	1.12	1.07	1.197	2	--	REPEAT
	GSM 850	GPRS10	Left Side	190	-	-	33.0	32.71	0.07	0.24	1.07	0.257	2	--	--
	GSM 850	GPRS10	Right Side	190	-	-	33.0	32.71	0.11	0.801	1.07	0.856	2	--	--
	GSM 850	GPRS10	Bottom Side	190	-	-	33.0	32.71	0.03	0.785	1.07	0.839	2	--	--
	GSM 850	GPRS10	Front Face	128	-	-	33.0	32.68	-0.11	0.432	1.08	0.465	2	--	--
	GSM 850	GPRS10	Rear Face	251	-	-	33.0	32.70	0.03	1.1	1.07	1.179	2	--	--
	PCS 1900	GPRS10	Front Face	661	-	-	29.0	28.59	-0.02	0.624	1.10	0.686	1	--	--
20	PCS 1900	GPRS10	Rear Face	661	-	-	29.0	28.59	0.03	0.867	1.10	0.953	1	--	--
	PCS 1900	GPRS10	Rear Face	661	-	-	29.0	28.59	0.02	0.852	1.10	0.936	1	--	REPEAT
	PCS 1900	GPRS10	Left Side	661	-	-	29.0	28.59	0.05	0.488	1.10	0.536	1	--	--
	PCS 1900	GPRS10	Top Side	661	-	-	29.0	28.59	-0.10	0.763	1.10	0.839	1	--	--
	PCS 1900	GPRS10	Rear Face	512	-	-	29.0	28.53	-0.05	0.754	1.11	0.840	1	--	--
	PCS 1900	GPRS10	Rear Face	810	-	-	29.0	28.33	0.02	0.722	1.17	0.842	1	--	--
	WCDMA Band II	RMC12.2K	Front Face	9400	-	-	23.5	23.16	0.09	0.667	1.08	0.721	1	--	--
	WCDMA Band II	RMC12.2K	Rear Face	9400	-	-	23.5	23.16	0.00	0.969	1.08	1.048	1	--	--
	WCDMA Band II	RMC12.2K	Left Side	9400	-	-	23.5	23.16	0.02	0.588	1.08	0.636	1	--	--
	WCDMA Band II	RMC12.2K	Top Side	9400	-	-	23.5	23.16	0.08	0.774	1.08	0.837	1	--	--
21	WCDMA Band II	RMC12.2K	Rear Face	9262	-	-	23.5	23.04	0.03	0.973	1.11	1.082	1	--	--
	WCDMA Band II	RMC12.2K	Rear Face	9262	-	-	23.5	23.04	0.01	0.969	1.11	1.077	1	--	REPEAT
	WCDMA Band II	RMC12.2K	Rear Face	9538	-	-	23.5	23.04	-0.01	0.936	1.11	1.041	1	--	--
	WCDMA Band IV	RMC12.2K	Front Face	1413	-	-	24.0	23.38	-0.05	0.544	1.15	0.627	1	--	--
	WCDMA Band IV	RMC12.2K	Rear Face	1413	-	-	24.0	23.38	-0.10	0.746	1.15	0.860	1	--	--
	WCDMA Band IV	RMC12.2K	Left Side	1413	-	-	24.0	23.38	0.12	0.434	1.15	0.501	1	--	--
	WCDMA Band IV	RMC12.2K	Top Side	1413	-	-	24.0	23.38	0.14	0.693	1.15	0.799	1	--	--
	WCDMA Band IV	RMC12.2K	Rear Face	1312	-	-	24.0	23.31	-0.02	0.774	1.17	0.907	1	--	--
22	WCDMA Band IV	RMC12.2K	Rear Face	1513	-	-	24.0	23.30	0.07	0.82	1.17	0.963	1	--	--

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Plot No.	Band	Mode	Test Position	Channel	RB#	RB Offset	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaling Factor	Scaled SAR-1g (W/kg)	Antenna	States	Note
	WCDMA Band IV	RMC12.2K	Rear Face	1513	-	-	24.0	23.30	0.08	0.814	1.17	0.956	1	--	REPEAT
	WCDMA Band V	RMC12.2K	Front Face	4132	-	-	23.0	22.74	0.05	0.479	1.06	0.509	2	--	--
23	WCDMA Band V	RMC12.2K	Rear Face	4132	-	-	23.0	22.74	0.02	0.709	1.06	0.753	2	--	--
	WCDMA Band V	RMC12.2K	Left Side	4132	-	-	23.0	22.74	0.13	0.155	1.06	0.165	2	--	--
	WCDMA Band V	RMC12.2K	Right Side	4132	-	-	23.0	22.74	0.14	0.58	1.06	0.616	2	--	--
	WCDMA Band V	RMC12.2K	Bottom Side	4132			23.0	22.74	0.04	0.454	1.06	0.482	2	--	--
	LTE Band 2	QPSK20M	Front Face	18700	1	49	24.0	23.74	-0.08	0.813	1.06	0.863	1	--	--
	LTE Band 2	QPSK20M	Rear Face	18700	1	49	24.0	23.74	-0.09	1.06	1.06	1.125	1	--	--
	LTE Band 2	QPSK20M	Left Side	18700	1	49	24.0	23.74	0.03	0.579	1.06	0.615	1	--	--
	LTE Band 2	QPSK20M	Top Side	18700	1	49	24.0	23.74	0.11	0.63	1.06	0.669	1	--	--
	LTE Band 2	QPSK20M	Front Face	18700	50	50	23.0	22.55	0.02	0.657	1.11	0.729	1	--	--
	LTE Band 2	QPSK20M	Rear Face	18700	50	50	23.0	22.55	0.07	0.857	1.11	0.951	1	--	--
	LTE Band 2	QPSK20M	Left Side	18700	50	50	23.0	22.55	0.03	0.469	1.11	0.520	1	--	--
	LTE Band 2	QPSK20M	Top Side	18700	50	50	23.0	22.55	0.13	0.494	1.11	0.548	1	--	--
24	LTE Band 2	QPSK20M	Rear Face	18900	1	49	24.0	23.71	0.07	1.11	1.07	1.187	1	--	--
	LTE Band 2	QPSK20M	Rear Face	18900	1	49	24.0	23.71	0.03	1.05	1.07	1.123	1	--	REPEAT
	LTE Band 2	QPSK20M	Rear Face	19100	1	49	24.0	23.59	0.01	1.04	1.10	1.143	1	--	--
	LTE Band 5	QPSK10M	Front Face	20600	1	25	24.5	23.98	-0.07	0.45	1.13	0.507	2	--	--
25	LTE Band 5	QPSK10M	Rear Face	20600	1	25	24.5	23.98	0.08	0.626	1.13	0.706	2	--	--
	LTE Band 5	QPSK10M	Left Side	20600	1	25	24.5	23.98	0.06	0.121	1.13	0.136	2	--	--
	LTE Band 5	QPSK10M	Right Side	20600	1	25	24.5	23.98	0.00	0.504	1.13	0.568	2	--	--
	LTE Band 5	QPSK10M	Bottom Side	20600	1	25	24.5	23.98	0.03	0.49	1.13	0.552	2	--	--
	LTE Band 5	QPSK10M	Front Face	20600	25	25	23.5	22.82	0.02	0.364	1.17	0.426	2	--	--
	LTE Band 5	QPSK10M	Rear Face	20600	25	25	23.5	22.82	0.09	0.503	1.17	0.588	2	--	--
	LTE Band 5	QPSK10M	Left Side	20600	25	25	23.5	22.82	0.06	0.0939	1.17	0.110	2	--	--
	LTE Band 5	QPSK10M	Right Side	20600	25	25	23.5	22.82	0.07	0.4	1.17	0.468	2	--	--
	LTE Band 5	QPSK10M	Bottom Side	20600	25	25	23.5	22.82	0.03	0.394	1.17	0.461	2	--	--
	LTE Band 7	QPSK20M	Front Face	21350	1	49	20.5	20.03	-0.14	0.366	1.11	0.408	1	Hotspot ON	--

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-SAR-IEEE Std 1528-2013-V1.1

Plot No.	Band	Mode	Test Position	Channel	RB#	RB Offset	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaling Factor	Scaled SAR-1g (W/kg)	Antenna	States	Note
38	LTE Band 7	QPSK20M	Rear Face	21350	1	49	20.5	20.03	0.01	0.505	1.11	0.563	1	Hotspot ON	--
	LTE Band 7	QPSK20M	Left Side	21350	1	49	20.5	20.03	0.04	0.183	1.11	0.204	1	Hotspot ON	--
	LTE Band 7	QPSK20M	Top Side	21350	1	49	20.5	20.03	-0.03	0.37	1.11	0.412	1	Hotspot ON	--
	LTE Band 7	QPSK20M	Front Face	21350	50	0	20.5	19.92	-0.05	0.268	1.14	0.306	1	Hotspot ON	--
	LTE Band 7	QPSK20M	Rear Face	21350	50	0	20.5	19.92	-0.04	0.371	1.14	0.424	1	Hotspot ON	--
	LTE Band 7	QPSK20M	Left Side	21350	50	0	20.5	19.92	0.08	0.134	1.14	0.153	1	Hotspot ON	--
	LTE Band 7	QPSK20M	Top Side	21350	50	0	20.5	19.92	-0.01	0.271	1.14	0.310	1	Hotspot ON	--
	LTE Band 12	QPSK10M	Front Face	23095	1	25	24.5	24.21	0.01	0.285	1.07	0.305	2	--	--
	LTE Band 12	QPSK10M	Rear Face	23095	1	25	24.5	24.21	-0.02	0.329	1.07	0.352	2	--	--
	LTE Band 12	QPSK10M	Left Side	23095	1	25	24.5	24.21	0.11	0.232	1.07	0.248	2	--	--
39	LTE Band 12	QPSK10M	Right Side	23095	1	25	24.5	24.21	0.12	0.615	1.07	0.657	2	--	--
	LTE Band 12	QPSK10M	Bottom Side	23095	1	25	24.5	24.21	-0.02	0.211	1.07	0.226	2	--	--
	LTE Band 12	QPSK10M	Front Face	23060	25	25	23.5	22.96	-0.02	0.224	1.13	0.254	2	--	--
	LTE Band 12	QPSK10M	Rear Face	23060	25	25	23.5	22.96	0.01	0.233	1.13	0.264	2	--	--
	LTE Band 12	QPSK10M	Left Side	23060	25	25	23.5	22.96	0.13	0.184	1.13	0.208	2	--	--
	LTE Band 12	QPSK10M	Right Side	23060	25	25	23.5	22.96	0.12	0.498	1.13	0.564	2	--	--
	LTE Band 12	QPSK10M	Bottom Side	23060	25	25	23.5	22.96	0.06	0.169	1.13	0.191	2	--	--
	LTE Band 13	QPSK10M	Front Face	23230	1	25	24.5	24.13	0.02	0.288	1.09	0.314	2	--	--
	LTE Band 13	QPSK10M	Rear Face	23230	1	25	24.5	24.13	0.07	0.407	1.09	0.443	2	--	--
	LTE Band 13	QPSK10M	Left Side	23230	1	25	24.5	24.13	0.04	0.11	1.09	0.120	2	--	--
40	LTE Band 13	QPSK10M	Right Side	23230	1	25	24.5	24.13	0.15	0.444	1.09	0.483	2	--	--
	LTE Band 13	QPSK10M	Bottom Side	23230	1	25	24.5	24.13	0.12	0.35	1.09	0.381	2	--	--
	LTE Band 13	QPSK10M	Front Face	23230	25	25	23.5	22.91	0.04	0.225	1.15	0.258	2	--	--
	LTE Band 13	QPSK10M	Rear Face	23230	25	25	23.5	22.91	0.08	0.317	1.15	0.363	2	--	--
	LTE Band 13	QPSK10M	Left Side	23230	25	25	23.5	22.91	0.09	0.0871	1.15	0.100	2	--	--
	LTE Band 13	QPSK10M	Right Side	23230	25	25	23.5	22.91	0.15	0.337	1.15	0.386	2	--	--
	LTE Band 13	QPSK10M	Bottom Side	23230	25	25	23.5	22.91	0.16	0.276	1.15	0.316	2	--	--

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-SAR-IEEE Std 1528-2013-V1.1

Plot No.	Band	Mode	Test Position	Channel	RB#	RB Offset	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Power Drift (dB)	Measured SAR-1g (W/kg)	Scaling Factor	Scaled SAR-1g (W/kg)	Antenna	States	Note
	LTE Band 66	QPSK20M	Front Face	132072	1	49	24.0	23.49	-0.02	0.718	1.12	0.807	1	--	--
	LTE Band 66	QPSK20M	Rear Face	132072	1	49	24.0	23.49	-0.01	0.933	1.12	1.049	1	--	--
	LTE Band 66	QPSK20M	Left Side	132072	1	49	24.0	23.49	0.13	0.61	1.12	0.686	1	--	--
41	LTE Band 66	QPSK20M	Top Side	132072	1	49	24.0	23.49	0.17	1.1	1.12	1.237	1	--	--
	LTE Band 66	QPSK20M	Top Side	132072	1	49	24.0	23.49	0.05	1.02	1.12	1.147	1	--	REPEAT
	LTE Band 66	QPSK20M	Front Face	132072	50	50	23.0	22.42	0.04	0.568	1.14	0.649	1	--	--
	LTE Band 66	QPSK20M	Rear Face	132072	50	50	23.0	22.42	0.03	0.782	1.14	0.894	1	--	--
	LTE Band 66	QPSK20M	Left Side	132072	50	50	23.0	22.42	0.02	0.489	1.14	0.559	1	--	--
	LTE Band 66	QPSK20M	Top Side	132072	50	50	23.0	22.42	0.02	0.859	1.14	0.982	1	--	--
	LTE Band 66	QPSK20M	Rear Face	132322	1	49	24.0	23.46	-0.02	0.624	1.13	0.707	1	--	--
	LTE Band 66	QPSK20M	Rear Face	132572	1	49	24.0	23.36	0.12	0.538	1.16	0.623	1	--	--
	LTE Band 66	QPSK20M	Top Side	132322	1	49	24.0	23.46	-0.11	0.774	1.13	0.876	1	--	--
	LTE Band 66	QPSK20M	Top Side	132572	1	49	24.0	23.36	0.05	0.721	1.16	0.835	1	--	--
	LTE Band 71	QPSK20M	Front Face	133322	1	49	25.0	24.53	0.07	0.238	1.11	0.265	2	--	--
	LTE Band 71	QPSK20M	Rear Face	133322	1	49	25.0	24.53	-0.04	0.249	1.11	0.277	2	--	--
	LTE Band 71	QPSK20M	Left Side	133322	1	49	25.0	24.53	0.05	0.0872	1.11	0.097	2	--	--
	LTE Band 71	QPSK20M	Right Side	133322	1	49	25.0	24.53	0.16	0.228	1.11	0.254	2	--	--
42	LTE Band 71	QPSK20M	Bottom Side	133322	1	49	25.0	24.53	0.04	0.289	1.11	0.322	2	--	--
	LTE Band 71	QPSK20M	Front Face	133322	50	0	23.5	23.10	0.05	0.187	1.10	0.205	2	--	--
	LTE Band 71	QPSK20M	Rear Face	133322	50	0	23.5	23.10	0.06	0.22	1.10	0.241	2	--	--
	LTE Band 71	QPSK20M	Left Side	133322	50	0	23.5	23.10	-0.14	0.0662	1.10	0.073	2	--	--
	LTE Band 71	QPSK20M	Right Side	133322	50	0	23.5	23.10	0.08	0.173	1.10	0.190	2	--	--
	LTE Band 71	QPSK20M	Bottom Side	133322	50	0	23.5	23.10	0.06	0.219	1.10	0.240	2	--	--

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-SAR-IEEE Std 1528-2013-V1.1

Plot No.	Band	Mode	Test Position	Channel	Duty Cycle	Duty Cycle Scaling Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Power Drift (dB)	Measured SAR-1g (W/kg)	Measured SAR-10g (W/kg)	Scaling Factor	Scaled SAR-1g (W/kg)	Scaled SAR-10g (W/kg)	States	Note
	2.4GHz ISM	Bluetooth_DH5	Front Face	78	76.60%	1.3055	17.0	16.38	0.00	0.0833	--	1.15	0.125	--	--	--
32	2.4GHz ISM	Bluetooth_DH5	Rear Face	78	76.60%	1.3055	17.0	16.38	0.02	0.152	--	1.15	0.229	--	--	--
	2.4GHz ISM	Bluetooth_DH5	Right Side	78	76.60%	1.3055	17.0	16.38	-0.15	0.102	--	1.15	0.154	--	--	--
	2.4GHz ISM	Bluetooth_DH5	Top Side	78	76.60%	1.3055	17.0	16.38	0.03	0.118	--	1.15	0.178	--	--	--
	2.4GHz ISM	IEEE 802.11b	Front Face	11	99.64%	1.0036	18.0	17.30	-0.07	0.176	--	1.17	0.208	--	--	--
33	2.4GHz ISM	IEEE 802.11b	Rear Face	11	99.64%	1.0036	18.0	17.30	-0.15	0.221	--	1.17	0.261	--	--	--
	2.4GHz ISM	IEEE 802.11b	Right Side	11	99.64%	1.0036	18.0	17.30	-0.03	0.212	--	1.17	0.250	--	--	--
	2.4GHz ISM	IEEE 802.11b	Top Side	11	99.64%	1.0036	18.0	17.30	-0.02	0.212	--	1.17	0.250	--	--	--
	U-NII-1	IEEE 802.11a	Front Face	44	96.50%	1.036	13.0	12.62	0.03	0.098	--	1.09	0.111	--	--	--
34	U-NII-1	IEEE 802.11a	Rear Face	44	96.50%	1.036	13.0	12.62	0.00	0.245	--	1.09	0.277	--	--	--
	U-NII-1	IEEE 802.11a	Right Side	44	96.50%	1.036	13.0	12.62	0.05	0.141	--	1.09	0.159	--	--	--
	U-NII-1	IEEE 802.11a	Top Side	44	96.50%	1.036	13.0	12.62	0.04	0.142	--	1.09	0.161	--	--	--
	U-NII-2A	IEEE 802.11a	Front Face	52	96.50%	1.036	13.0	12.51	0.00	--	0.267	1.12	--	0.310	--	0 mm
	U-NII-2A	IEEE 802.11a	Rear Face	52	96.50%	1.036	13.0	12.51	-0.01	--	0.188	1.12	--	0.218	--	0 mm
	U-NII-2A	IEEE 802.11a	Right Side	52	96.50%	1.036	13.0	12.51	-0.02	--	0.188	1.12	--	0.218	--	0 mm
43	U-NII-2A	IEEE 802.11a	Top Side	52	96.50%	1.036	13.0	12.51	-0.16	--	0.361	1.12	--	0.419	--	0 mm
	U-NII-2C	IEEE 802.11a	Front Face	140	96.50%	1.036	13.0	12.54	0.00	--	0.253	1.11	--	0.291	--	0 mm
	U-NII-2C	IEEE 802.11a	Rear Face	140	96.50%	1.036	13.0	12.54	0.00	--	0.205	1.11	--	0.236	--	0 mm

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-SAR-IEEE Std 1528-2013-V1.1

Plot No.	Band	Mode	Test Position	Channel	Duty Cycle	Duty Cycle Scaling Factor	Max. Tune-up Power (dBm)	Measured Conducted Power (dBm)	Power Drift (dB)	Measured SAR-1g (W/kg)	Measured SAR-10g (W/kg)	Scaling Factor	Scaled SAR-1g (W/kg)	Scaled SAR-10g (W/kg)	States	Note
44	U-NII-2C	IEEE 802.11a	Right Side	140	96.50%	1.036	13.0	12.54	-0.04	--	0.313	1.11	--	0.361	--	0 mm
	U-NII-2C	IEEE 802.11a	Top Side	140	96.50%	1.036	13.0	12.54	-0.03	--	0.304	1.11	--	0.350	--	0 mm
	U-NII-3	IEEE 802.11a	Front Face	165	96.99%	1.031	15.5	15.16	-0.06	0.1	--	1.08	0.111	--	--	--
45	U-NII-3	IEEE 802.11a	Rear Face	165	96.99%	1.031	15.5	15.16	0.00	0.252	--	1.08	0.281	--	--	--
	U-NII-3	IEEE 802.11a	Right Side	165	96.99%	1.031	15.5	15.16	-0.09	0.248	--	1.08	0.277	--	--	--
	U-NII-3	IEEE 802.11a	Top Side	165	96.99%	1.031	15.5	15.16	-0.08	0.24	--	1.08	0.268	--	--	--

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: 16/F, Block A, Building 6th, Baoneng Science and Technology Park, Longhua Street, Longhua District, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-SAR-IEEE Std 1528-2013-V1.1

4.7. SAR MEASUREMENT VARIABILITY

4.7.1 Repeated Measurement

According to KDB 865664 D01, SAR measurement variability was assessed for each frequency band, which is determined by the SAR probe calibration point and tissue-equivalent medium used for the device measurements. When both head and body tissue-equivalent media are required for SAR measurements in a frequency band, the variability measurement procedures should be applied to the tissue medium with the highest measured SAR, using the highest measured SAR configuration for that tissue-equivalent medium. Alternatively, if the highest measured SAR for both head and body tissue-equivalent media are ≤ 1.45 W/kg and the ratio of these highest SAR values, i.e., largest divided by smallest value, is ≤ 1.10 , the highest SAR configuration for either head or body tissue-equivalent medium may be used to perform the repeated measurement. These additional measurements are repeated after the completion of all measurements requiring the same head or body tissue-equivalent medium in a frequency band. The test device should be returned to ambient conditions (normal room temperature) with the battery fully charged before it is re-mounted on the device holder for the repeated measurement(s) to minimize any unexpected variations in the repeated results.

SAR repeated measurement procedure:

- 1) When the highest measured SAR is < 0.80 W/kg, repeated measurement is not required.
- 2) When the highest measured SAR is ≥ 0.80 W/kg, repeat that measurement once.
- 3) If the ratio of largest to smallest SAR for the original and first repeated measurements is > 1.20 , or when the original or repeated measurement is ≥ 1.45 W/kg, perform a second repeated measurement.
- 4) If the ratio of largest to smallest SAR for the original, first and second repeated measurements is > 1.20 , and the original, first or second repeated measurement is ≥ 1.5 W/kg, perform a third repeated measurement.

Band	Mode	Test Position	Channel	Original Measured SAR-1g (W/kg)	1st Repeated SAR-1g (W/kg)	L/S Ratio	2nd Repeated SAR-1g (W/kg)	L/S Ratio	3rd Repeated SAR-1g (W/kg)	L/S Ratio
Head Exposure Condition										
GSM1900	GPRS10	Right Cheek	810	0.893	0.876	1.02	N/A	N/A	N/A	N/A
LTE 66	QPSK20M	Right Cheek	132572	0.992	0.985	1.01	N/A	N/A	N/A	N/A
Body-worn Exposure Condition										
GSM850	GPRS10	Rear Face	190	1.18	1.12	1.05	N/A	N/A	N/A	N/A
GSM1900	GPRS10	Rear Face	661	0.867	0.852	1.02	N/A	N/A	N/A	N/A
WCDMA II	RMC12.2K	Rear Face	9262	0.973	0.969	1.00	N/A	N/A	N/A	N/A
WCDMA IV	RMC12.2K	Rear Face	1513	0.82	0.814	1.01	N/A	N/A	N/A	N/A
LTE 2	QPSK20M	Rear Face	18900	1.11	1.05	1.06	N/A	N/A	N/A	N/A
Hotspot Exposure Condition										
GSM850	GPRS10	Rear Face	190	1.18	1.12	1.05	N/A	N/A	N/A	N/A
GSM1900	GPRS10	Rear Face	661	0.867	0.852	1.02	N/A	N/A	N/A	N/A
WCDMA II	RMC12.2K	Rear Face	9262	0.973	0.969	1.00	N/A	N/A	N/A	N/A
WCDMA IV	RMC12.2K	Rear Face	1513	0.82	0.814	1.01	N/A	N/A	N/A	N/A
LTE 2	QPSK20M	Rear Face	18900	1.11	1.05	1.06	N/A	N/A	N/A	N/A
LTE 66	QPSK20M	Top Side	132072	1.1	1.02	1.08	N/A	N/A	N/A	N/A

4.8. SIMULTANEOUS MULTI-BAND TRANSMISSION EVALUATION

4.8.1 Simultaneous Transmission SAR Test Exclusion Considerations

a) Sum of SAR

Simultaneous transmission SAR test exclusion is determined for each operating configuration and exposure condition according to the reported standalone SAR of each applicable simultaneous transmitting antenna. When the sum of SAR_{1g} of all simultaneously transmitting antennas in an operating mode and exposure condition combination is within the SAR limit (SAR_{1g} 1.6 W/kg), the simultaneous transmission SAR is not required. When the sum of SAR_{1g} is greater than the SAR limit (SAR_{1g} 1.6 W/kg), SAR test exclusion is determined by the SPLSR.

b) SAR to Peak Location Separation Ratio

The simultaneous transmitting antennas in each operating mode and exposure condition combination are considered one pair at a time to determine the SPLSR.

$$SPLSR = (SAR_1 + SAR_2)^{1.5} / R_i$$

The ratio is rounded to two decimal digits, and must be ≤ 0.04 for all antenna pairs in the configuration to qualify for 1-g SAR test exclusion. When 10-g SAR applies, the ratio must be ≤ 0.10 .

SAR_1 and SAR_2 are the highest reported or estimated SAR values for each antenna in the pair, and R_i is the separation distance in mm between the peak SAR locations for the antenna pair

$$\text{peak location separation distance} = \sqrt{(x_1 - x_2)^2 + (y_1 - y_2)^2 + (z_1 - z_2)^2}$$

Where (x_1, y_1, z_1) and (x_2, y_2, z_2) are the coordinates of the extrapolated peak SAR locations in the area or zoom scans.

When standalone test exclusion applies, SAR is estimated; the peak location is assumed to be at the feed-point or geometric center of the antenna. Due to curvatures on the SAM phantom, when SAR is estimated for one of the antennas in an antenna pair, the measured peak SAR location will be translated onto the test device to determine the peak location separation for the antenna pair.

When SAR is estimated for both antennas, the peak location separation should be determined by the closest physical separation of the antennas, according to the feed-point or geometric center of the antennas.

c) Volume Scan

When the SPLSR is ≤ 0.04 for 1-g SAR and ≤ 0.10 for 10-g SAR, the simultaneous transmission SAR is not required. Otherwise, the enlarged zoom scan and volume scan post-processing procedures will be performed.

4.8.2 Simultaneous Transmission Possibilities

The simultaneous transmission possibilities for this device are listed as below.

Simultaneous Transmission Configurations	Head (Voice / VoIP)	Body-worn (Voice / VoIP)	Hotspot (Data)
GSM (Voice / Data) + WLAN (Data)	Yes	Yes	Yes
WCDMA (Voice / Data) + WLAN (Data)	Yes	Yes	Yes
LTE (Data) + WLAN (Data)	Yes	Yes	Yes
GSM (Voice / Data) + BT (Data)	Yes	Yes	No
WCDMA (Voice / Data) + BT (Data)	Yes	Yes	No
LTE (Data) + BT (Data)	Yes	Yes	No
GSM (Voice / Data) + WLAN (Data) + BT (Data)	No	No	No
WCDMA (Voice / Data) + WLAN (Data) + BT (Data)	No	No	No
LTE (Data) + WLAN (Data) + BT (Data)	No	No	No

Note:

- 1) The 2.4G WLAN and 5G WLAN cannot transmit simultaneously.
- 2) The WLAN and Bluetooth cannot transmit simultaneously, so there is no co-location test requirement for WLAN and Bluetooth.
- 3) Both GSM/WCDMA and LTE can transmit through either antenna-0 or antenna-1. However, only one technology (GSM/WCDMA or LTE) can transmit from an antenna at a time, and the other technology transmits through the other antenna.

4.8.3 Max. Standalone SAR

Position		GSM Band		WCDMA Band			LTE Band						
		850	1900	II	IV	V	2	5	7	12 (17)	13	66 (4)	71
Head	Right Cheek	0.609	1.183	0.705	0.723	0.374	0.685	0.189	1.104	0.104	0.090	1.193	0.232
	Right Tilted	0.332	0.558	0.478	0.471	0.194	0.406	0.185	0.886	0.135	0.107	0.728	0.118
	Left Cheek	0.482	0.550	0.399	0.401	0.310	0.466	0.294	0.552	0.231	0.174	0.599	0.192
	Left Tilted	0.292	0.361	0.313	0.404	0.178	0.400	0.176	0.659	0.126	0.103	0.594	0.110
Body-worn	Front Face	0.805	0.686	0.721	0.627	0.509	0.863	0.507	0.306	0.305	0.314	0.807	0.265
	Rear Face	1.261	0.953	1.082	0.963	0.753	1.187	0.706	0.548	0.352	0.443	1.049	0.277
Hotspot	Front Face	0.805	0.686	0.721	0.627	0.509	0.863	0.507	0.408	0.305	0.314	0.807	0.265
	Rear Face	1.261	0.953	1.082	0.963	0.753	1.187	0.706	0.563	0.352	0.443	1.049	0.277
	Left Side	0.257	0.536	0.636	0.501	0.165	0.615	0.136	0.204	0.248	0.120	0.686	0.097
	Right Side	0.856	--	--	--	0.616	--	0.568	--	0.657	0.483	--	0.254
	Top Side	--	0.839	0.837	0.799	--	0.669	--	0.412	--	--	1.237	--
	Bottom Side	0.839	--	--	--	0.482	--	0.552	--	0.381	--	--	0.322

Position		WLAN					BT
		2.4G	5.2G	5.3G	5.6G	5.8G	2.4G
Head	Right Cheek	0.357	0.391	0.406	0.400	0.381	0.265
	Right Tilted	0.285	0.438	0.451	0.454	0.416	0.208
	Left Cheek	0.743	0.630	0.687	0.597	0.516	0.614
	Left Tilted	0.647	0.716	0.755	0.618	0.661	0.515
Body-worn	Front Face	0.208	0.111	0.125	0.118	0.111	0.125
	Rear Face	0.261	0.277	0.266	0.250	0.281	0.229
Hotspot	Front Face	0.208	0.111	--	--	0.111	0.125
	Rear Face	0.261	0.277	--	--	0.281	0.229
	Left Side	--	--	--	--	--	--
	Right Side	0.250	0.159	--	--	0.277	0.154
	Top Side	0.250	0.161	--	--	0.268	0.178
	Bottom Side	--	--	--	--	--	--

4.8.4 Sum of SAR

WWAN + WLAN (DTS)

Position		Highest Simultaneous Transmission SAR	GSM Band		WCDMA Band			LTE Band						
			850	1900	II	IV	V	2	5	7	12 (17)	13	66 (4)	71
Head	Right Cheek	1.550	0.966	1.540	1.062	1.080	0.731	1.042	0.546	1.461	0.461	0.447	1.550	0.589
	Right Tilted		0.617	0.843	0.763	0.756	0.479	0.691	0.470	1.171	0.420	0.392	1.013	0.403
	Left Cheek		1.225	1.293	1.142	1.144	1.053	1.209	1.037	1.295	0.974	0.917	1.342	0.935
	Left Tilted		0.939	1.008	0.960	1.051	0.825	1.047	0.823	1.306	0.773	0.750	1.241	0.757
Body-worn	Front Face	1.522	1.013	0.894	0.929	0.835	0.717	1.071	0.715	0.514	0.513	0.522	1.015	0.473
	Rear Face		1.522	1.214	1.343	1.224	1.014	1.448	0.967	0.809	0.613	0.704	1.310	0.538
Hotspot	Front Face	1.522	1.013	0.894	0.929	0.835	0.717	1.071	0.715	0.616	0.513	0.522	1.015	0.473
	Rear Face		1.522	1.214	1.343	1.224	1.014	1.448	0.967	0.824	0.613	0.704	1.310	0.538
	Left Side		--	--	--	--	--	--	--	--	--	--	--	--
	Right Side		1.106	--	--	--	0.866	--	0.818	0.662	0.907	0.733	--	0.504
	Top Side		--	1.089	1.087	1.049	--	0.919	--	--	--	--	1.487	--
	Bottom Side	--	--	--	--	--	--	--	--	--	--	--	--	

WWAN + WLAN (NII)

Position		Highest Simultaneous Transmission SAR	GSM Band		WCDMA Band			LTE Band						
			850	1900	II	IV	V	2	5	7	12 (17)	13	66 (4)	71
Head	Right Cheek	1.599	1.015	1.589	1.111	1.129	0.780	1.091	0.595	1.510	0.510	0.496	1.599	0.638
	Right Tilted		0.786	1.012	0.932	0.925	0.648	0.860	0.639	1.340	0.589	0.561	1.182	0.572
	Left Cheek		1.169	1.237	1.086	1.088	0.997	1.153	0.981	1.239	0.918	0.861	1.286	0.879
	Left Tilted		1.047	1.116	1.068	1.159	0.933	1.155	0.931	1.414	0.881	0.858	1.349	0.865
Body-worn	Front Face	1.542	0.930	0.811	0.846	0.752	0.634	0.988	0.632	0.431	0.430	0.439	0.932	0.390
	Rear Face		1.542	1.234	1.363	1.244	1.034	1.468	0.987	0.829	0.633	0.724	1.330	0.558
Hotspot	Front Face	1.542	0.916	0.797	0.832	0.738	0.620	0.974	0.618	0.519	0.416	0.425	0.918	0.376
	Rear Face		1.542	1.234	1.363	1.244	1.034	1.468	0.987	0.844	0.633	0.724	1.330	0.558
	Left Side		--	--	--	--	--	--	--	--	--	--	--	--
	Right Side		1.133	--	--	--	0.893	--	0.845	0.680	0.934	0.760	--	0.531
	Top Side		--	1.107	1.105	1.067	--	0.937	--	--	--	--	--	--
	Bottom Side		--	--	--	--	--	--	--	--	--	--	--	--

WWAN + BT (DSS)

Position		Highest Simultaneous Transmission SAR	GSM Band		WCDMA Band			LTE Band						
			850	1900	II	IV	V	2	5	7	12 (17)	13	66 (4)	71
Head	Right Cheek	1.458	0.874	1.448	0.970	0.988	0.639	0.950	0.454	1.369	0.369	0.355	1.458	0.497
	Right Tilted		0.540	0.766	0.686	0.679	0.402	0.614	0.393	1.094	0.343	0.315	0.936	0.326
	Left Cheek		1.096	1.164	1.013	1.015	0.924	1.080	0.908	1.166	0.845	0.788	1.213	0.806
	Left Tilted		0.807	0.876	0.828	0.919	0.693	0.915	0.691	1.174	0.641	0.618	1.109	0.625
Body-worn	Front Face	1.490	0.930	0.811	0.846	0.752	0.634	0.988	0.632	0.431	0.430	0.439	0.932	0.390
	Rear Face		1.490	1.182	1.311	1.192	0.982	1.416	0.935	0.777	0.581	0.672	1.278	0.506
Hotspot	Front Face	1.490	0.930	0.811	0.846	0.752	0.634	0.988	0.632	0.533	0.430	0.439	0.932	0.390
	Rear Face		1.490	1.182	1.311	1.192	0.982	1.416	0.935	0.792	0.581	0.672	1.278	0.506
	Left Side		--	--	--	--	--	--	--	--	--	--	--	--
	Right Side		1.010	--	--	--	0.770	--	0.722	0.590	0.811	0.637	--	0.408
	Top Side		--	1.017	1.015	0.977	--	0.847	--	--	--	--	1.415	--
	Bottom Side		--	--	--	--	--	--	--	--	--	--	--	--

*** End of Report ***

The test report is effective only with both signature and specialized stamp. The result(s) shown in this report refer only to the sample(s) tested. Without written approval of UnionTrust, this report can't be reproduced except in full.

APPENDIX A. SAR PLOTS OF SYSTEM VERIFICATION

The plots for system verification with largest deviation for each SAR system combination are shown as follows.



APPENDIX B. SAR PLOTS OF SAR MEASUREMENT

The SAR plots for highest measured SAR in each exposure configuration, wireless mode and frequency band combination, and measured SAR > 1.5 W/kg are shown as follows.



APPENDIX C. CALIBRATION CERTIFICATE FOR PROBE AND DIPOLE

The calibration certificates are shown as follows.



APPENDIX D. PHOTOGRAPHS OF EUT AND SETUP

The photographs of EUT and setup are shown as follows.

