

GSM850_GPRS10_Right Cheek_190

DUT: EUT-G95

Communication System: UID 0, GPRS 850-2solt; Frequency: 836.6 MHz;Duty Cycle: 1:4

Medium: H835 Medium parameters used: $f = 837$ MHz; $\sigma = 0.921$ S/m; $\epsilon_r = 40.535$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(9.12, 9.72, 9.05) @ 836.6 MHz; Calibrated: 2024/11/12
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2024/10/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.633 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.199 V/m; Power Drift = 0.14 dB


Peak SAR (extrapolated) = 0.716 W/kg

SAR(1 g) = 0.570 W/kg; SAR(10 g) = 0.438 W/kg

Smallest distance from peaks to all points 3 dB below = 23.3 mm

Ratio of SAR at M2 to SAR at M1 = 79.8%

Maximum value of SAR (measured) = 0.633 W/kg

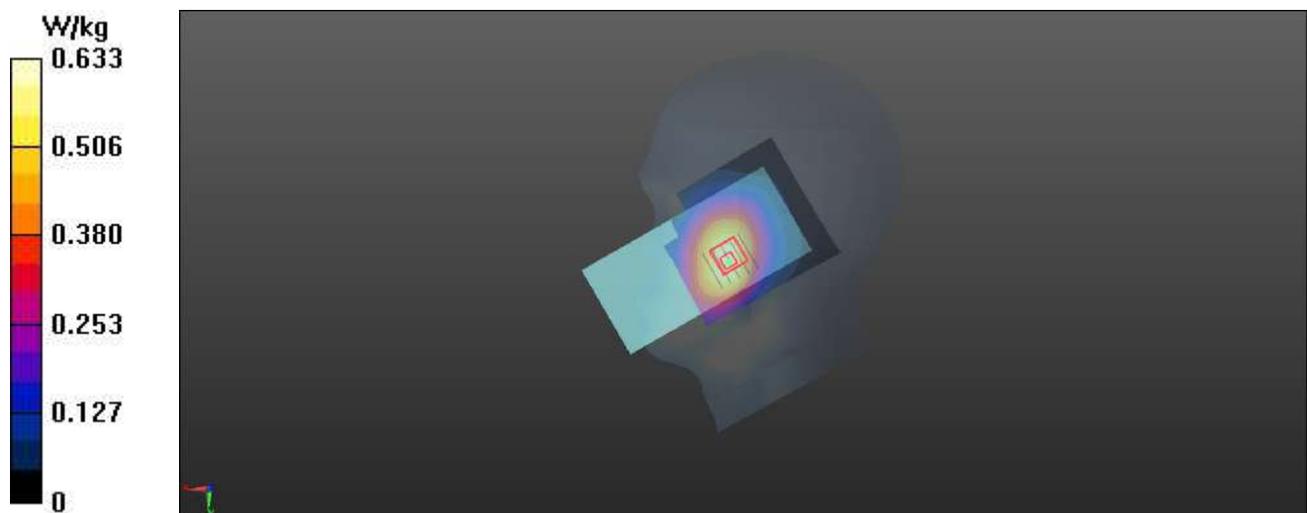

GSM1900_GPRS10_Right Cheek_810

DUT: EUT-G95


Communication System: UID 0, GPRS1900-2slots; Frequency: 1909.8 MHz; Duty Cycle: 1:4
Medium: H1900 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.401$ S/m; $\epsilon_r = 40.551$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(7.37, 7.85, 7.31) @ 1909.8 MHz; Calibrated: 2024/11/12
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2024/10/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.11 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 14.18 V/m; Power Drift = 0.14 dB
Peak SAR (extrapolated) = 1.56 W/kg
SAR(1 g) = 0.893 W/kg; SAR(10 g) = 0.502 W/kg
Smallest distance from peaks to all points 3 dB below = 13.6 mm
Ratio of SAR at M2 to SAR at M1 = 61.5%
Maximum value of SAR (measured) = 1.06 W/kg

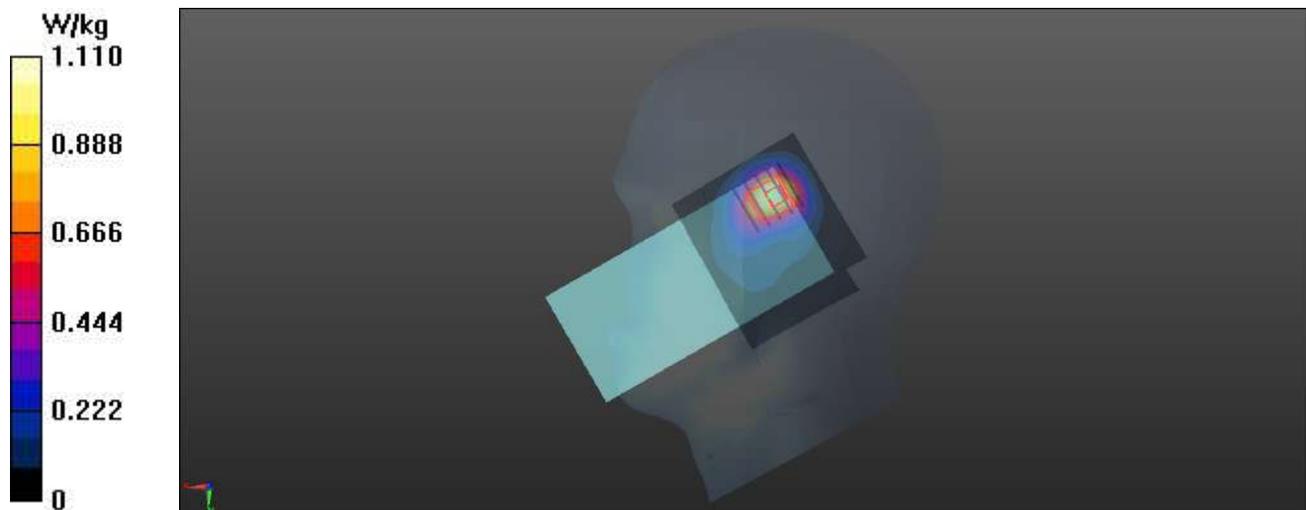

WCDMA II_RMC12.2K_Right Cheek_9400**DUT: EUT-G95**


Communication System: UID 0, WCDMA Band II; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium: H1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.371$ S/m; $\epsilon_r = 40.651$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(7.37, 7.85, 7.31) @ 1880 MHz; Calibrated: 2024/11/12
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2024/10/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.881 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 12.87 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 1.05 W/kg
SAR(1 g) = 0.628 W/kg; SAR(10 g) = 0.367 W/kg
Smallest distance from peaks to all points 3 dB below = 13.7 mm
Ratio of SAR at M2 to SAR at M1 = 60.3%
Maximum value of SAR (measured) = 0.738 W/kg

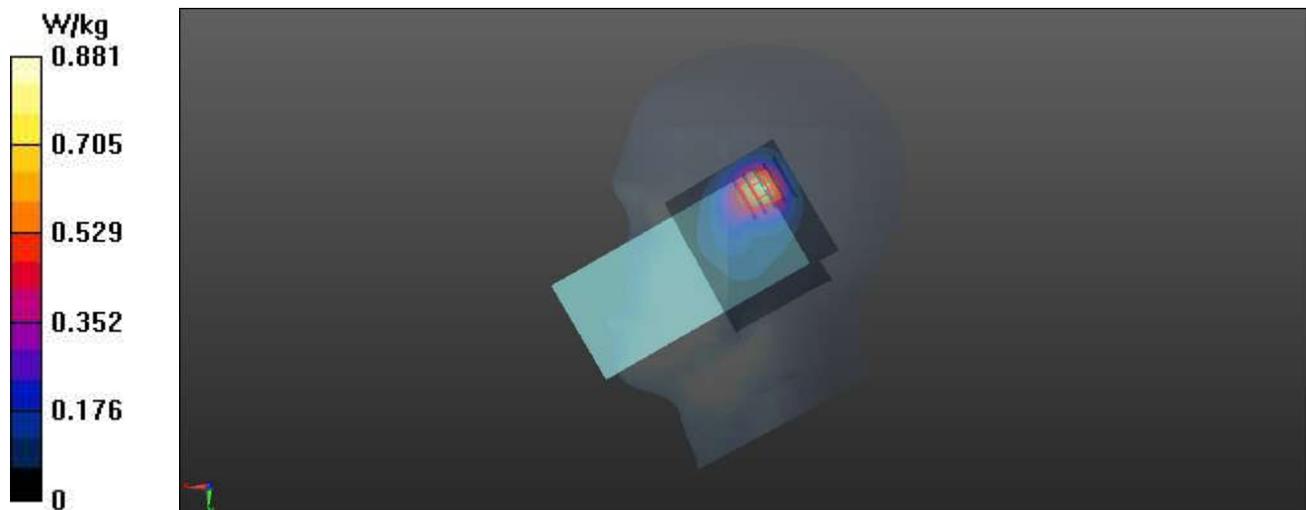

WCDMA IV_RMC12.2K_Right Cheek_1413

DUT: EUT-G95


Communication System: UID 0, WCDMA Band IV; Frequency: 1732.6 MHz; Duty Cycle: 1:1
Medium: H1750 Medium parameters used: $f = 1733$ MHz; $\sigma = 1.345$ S/m; $\epsilon_r = 40.465$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(7.7, 8.21, 7.64) @ 1732.6 MHz; Calibrated: 2024/11/12
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2024/10/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.823 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 14.97 V/m; Power Drift = -0.09 dB
Peak SAR (extrapolated) = 1.08 W/kg
SAR(1 g) = 0.643 W/kg; SAR(10 g) = 0.372 W/kg
Smallest distance from peaks to all points 3 dB below = 11.6 mm
Ratio of SAR at M2 to SAR at M1 = 61%
Maximum value of SAR (measured) = 0.727 W/kg

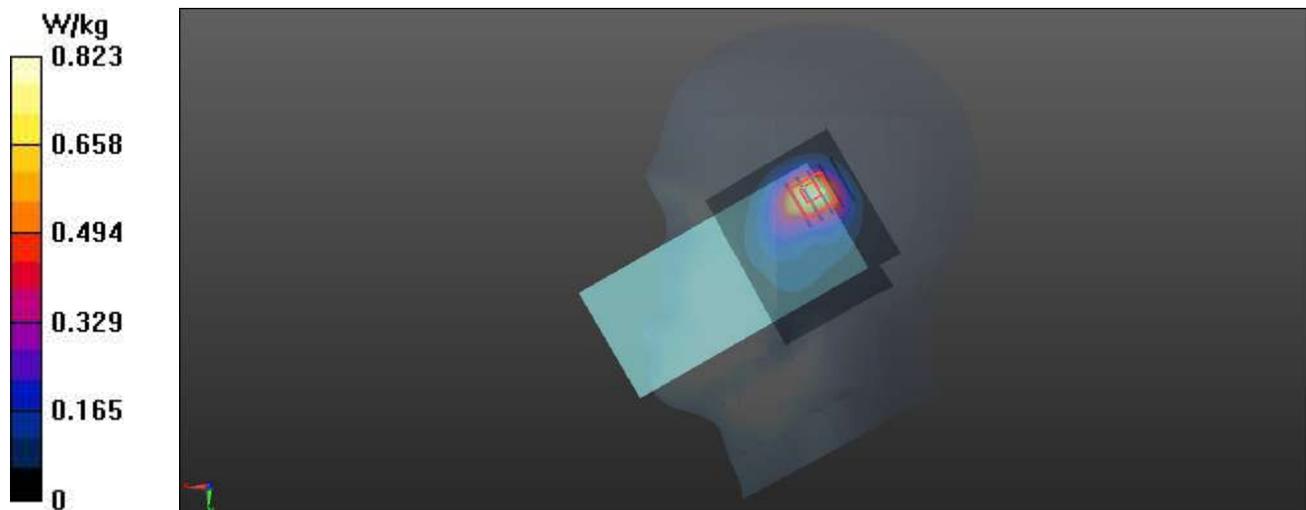

WCDMA V_RMC12.2K_Right Cheek_4132

DUT: EUT-G95


Communication System: UID 0, WCDMA Band V; Frequency: 826.4 MHz; Duty Cycle: 1:1
Medium: H835 Medium parameters used : $f = 826.4$ MHz; $\sigma = 0.913$ S/m; $\epsilon_r = 40.627$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(9.12, 9.72, 9.05) @ 826.4 MHz; Calibrated: 2024/11/12
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2024/10/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.385 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 7.075 V/m; Power Drift = 0.18 dB
Peak SAR (extrapolated) = 0.437 W/kg
SAR(1 g) = 0.352 W/kg; SAR(10 g) = 0.271 W/kg
Smallest distance from peaks to all points 3 dB below = 23.4 mm
Ratio of SAR at M2 to SAR at M1 = 81.1%
Maximum value of SAR (measured) = 0.390 W/kg

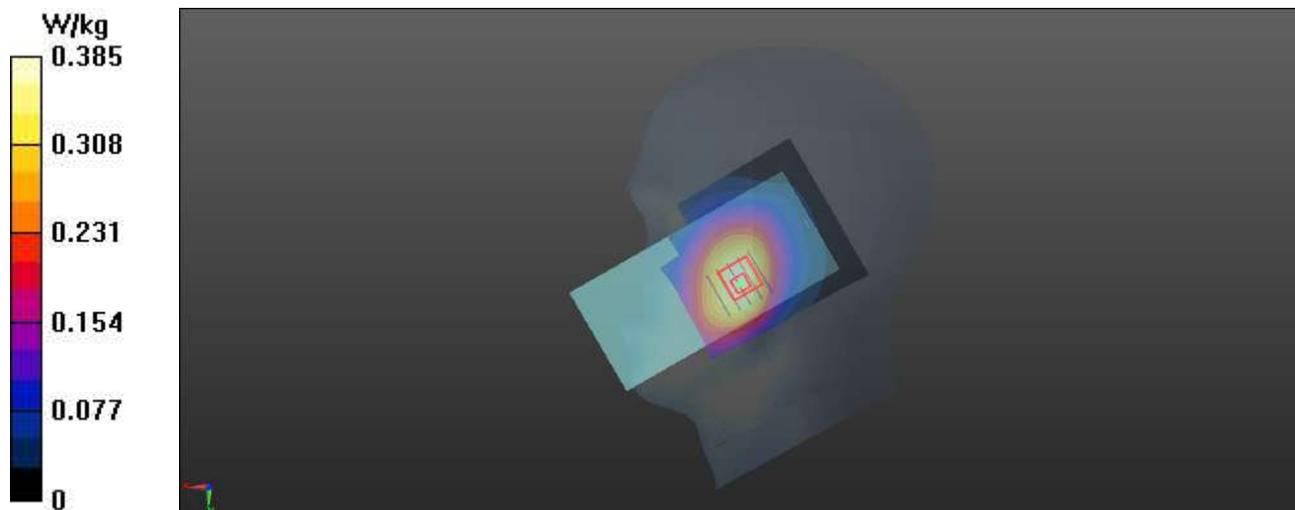

LTE 2_QPSK20M_50_50_Right Cheek_18700

DUT: EUT-G95

Communication System: UID 0, LTE Band 2; Frequency: 1860 MHz; Duty Cycle: 1:1


Medium: H1900 Medium parameters used: $f = 1860$ MHz; $\sigma = 1.351$ S/m; $\epsilon_r = 40.73$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(7.37, 7.85, 7.31) @ 1860 MHz; Calibrated: 2024/11/12
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2024/10/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.744 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 11.89 V/m; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 1.04 W/kg
SAR(1 g) = 0.601 W/kg; SAR(10 g) = 0.339 W/kg
Smallest distance from peaks to all points 3 dB below = 12.2 mm
Ratio of SAR at M2 to SAR at M1 = 64.7%
Maximum value of SAR (measured) = 0.697 W/kg

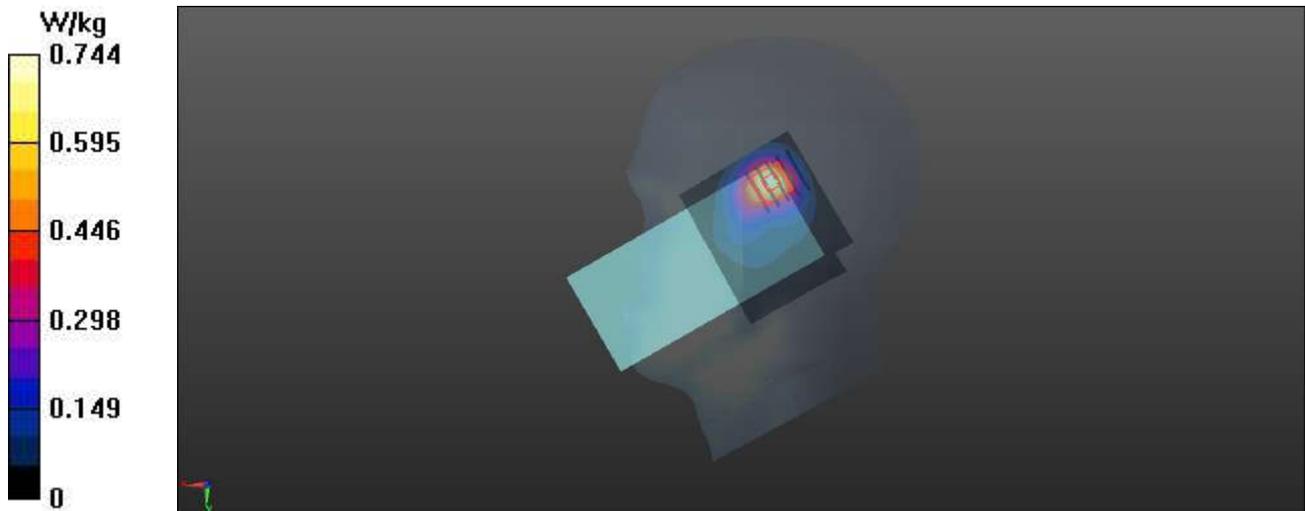

LTE 5_QPSK10M_1_25_Left Cheek_20600

DUT: EUT-G95

Communication System: UID 0, LTE Band5; Frequency: 844 MHz;Duty Cycle: 1:1

Medium: H835 Medium parameters used: $f = 844$ MHz; $\sigma = 0.926$ S/m; $\epsilon_r = 40.474$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(9.12, 9.72, 9.05) @ 844 MHz; Calibrated: 2024/11/12
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2024/10/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.281 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.136 V/m; Power Drift = 0.04 dB



Peak SAR (extrapolated) = 0.312 W/kg

SAR(1 g) = 0.261 W/kg; SAR(10 g) = 0.207 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 83.3%

Maximum value of SAR (measured) = 0.281 W/kg

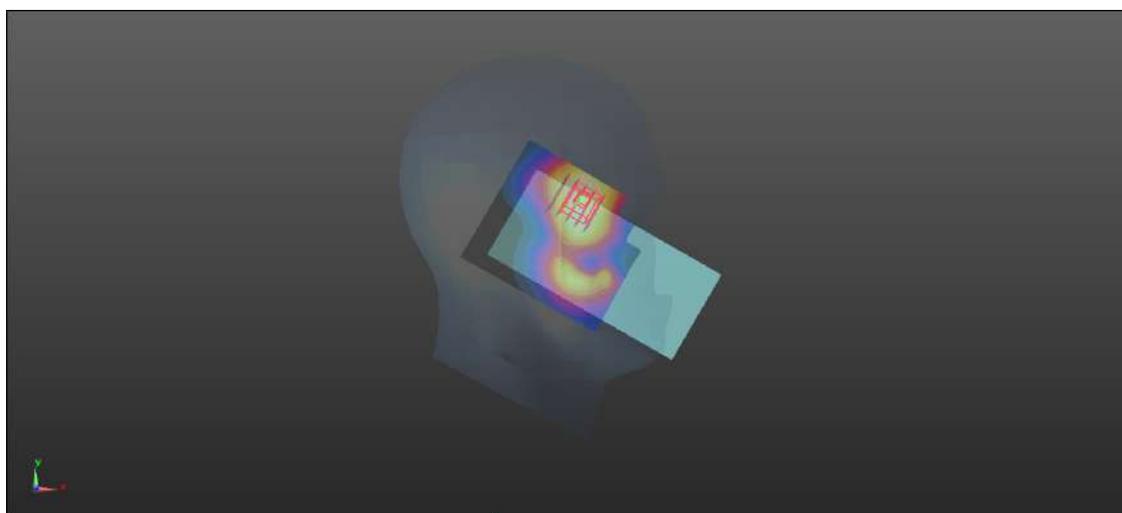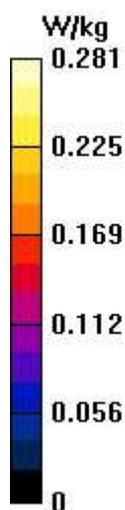

LTE 7_QPSK20M_1_49_Right Cheek_21350**DUT: EUT-G95**


Communication System: UID 0, LTE Band 7&20M; Frequency: 2560 MHz; Duty Cycle: 1:1
Medium: H2600 Medium parameters used: $f = 2560$ MHz; $\sigma = 1.907$ S/m; $\epsilon_r = 38.016$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(6.7, 7.14, 6.64) @ 2560 MHz; Calibrated: 2024/11/12
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2024/10/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (91x91x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 1.39 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 11.36 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 2.23 W/kg
SAR(1 g) = 0.991 W/kg; SAR(10 g) = 0.502 W/kg
Smallest distance from peaks to all points 3 dB below = 7.6 mm
Ratio of SAR at M2 to SAR at M1 = 45.7%
Maximum value of SAR (measured) = 1.30 W/kg

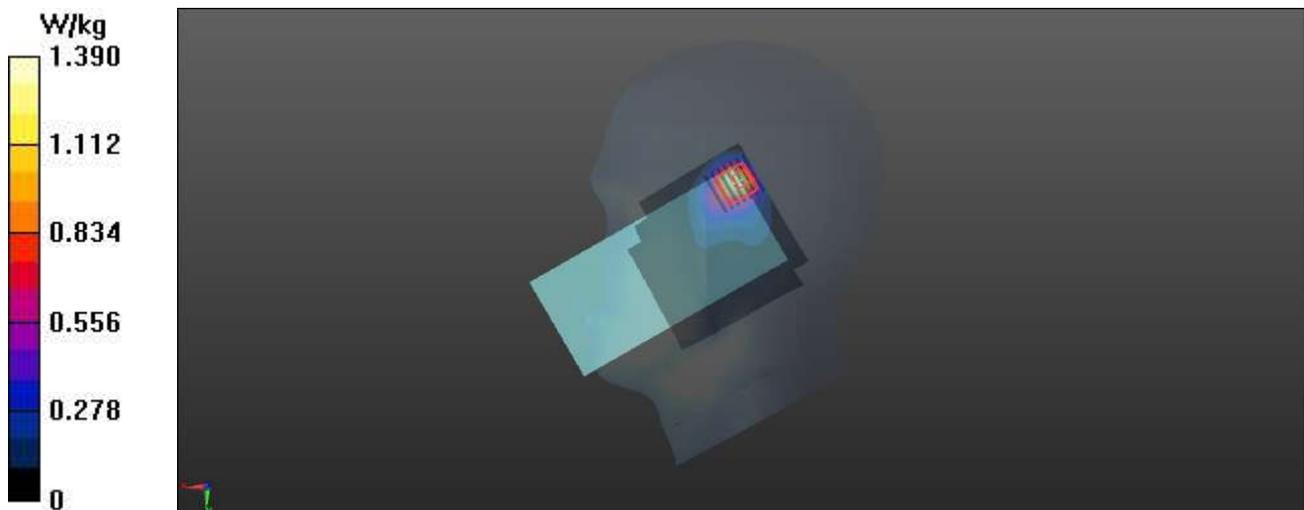

LTE 12_QPSK10M_1_25_Left Cheek_23095**DUT: EUT-G95**

Communication System: UID 0, LTE Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium: H750 Medium parameters used : $f = 707.5$ MHz; $\sigma = 0.879$ S/m; $\epsilon_r = 40.891$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(9.35, 9.96, 9.27) @ 707.5 MHz; Calibrated: 2024/11/12
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2024/10/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.233 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.412 V/m; Power Drift = 0.01 dB


Peak SAR (extrapolated) = 0.252 W/kg

SAR(1 g) = 0.216 W/kg; SAR(10 g) = 0.173 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 85.2%

Maximum value of SAR (measured) = 0.232 W/kg

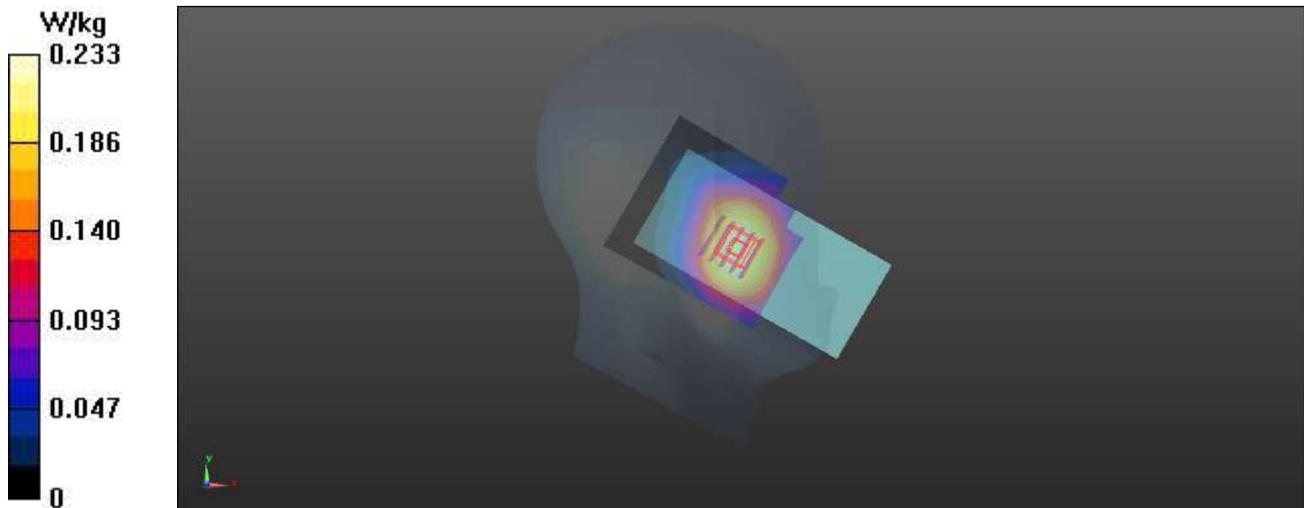

LTE 13_QPSK10M_1_25_Left Cheek_23230**DUT: EUT-G95**

Communication System: UID 0, LTE Band 13; Frequency: 782 MHz; Duty Cycle: 1:1

Medium: H750 Medium parameters used: $f = 782$ MHz; $\sigma = 0.898$ S/m; $\epsilon_r = 40.494$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(9.35, 9.96, 9.27) @ 782 MHz; Calibrated: 2024/11/12
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2024/10/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.177 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.810 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 0.189 W/kg

SAR(1 g) = 0.160 W/kg; SAR(10 g) = 0.126 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 84.3%

Maximum value of SAR (measured) = 0.173 W/kg

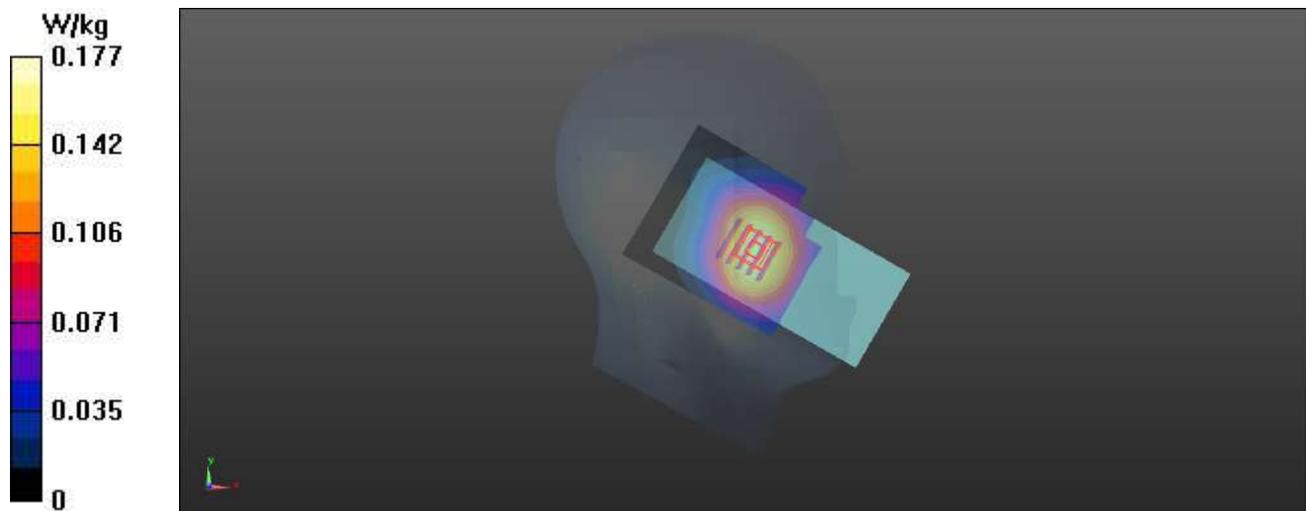

LTE 66_QPSK20M_1_49_Right Cheek_132572

DUT: EUT-G95


Communication System: UID 0, LTE Band 66&QPSK20M; Frequency: 1770 MHz;Duty Cycle: 1:1
Medium: H1750 Medium parameters used: $f = 1770$ MHz; $\sigma = 1.394$ S/m; $\epsilon_r = 40.332$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(7.7, 8.21, 7.64) @ 1770 MHz; Calibrated: 2024/11/12
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2024/10/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.32 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 15.72 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 1.70 W/kg
SAR(1 g) = 0.992 W/kg; SAR(10 g) = 0.573 W/kg
Smallest distance from peaks to all points 3 dB below = 11.3 mm
Ratio of SAR at M2 to SAR at M1 = 60.4%
Maximum value of SAR (measured) = 1.12 W/kg

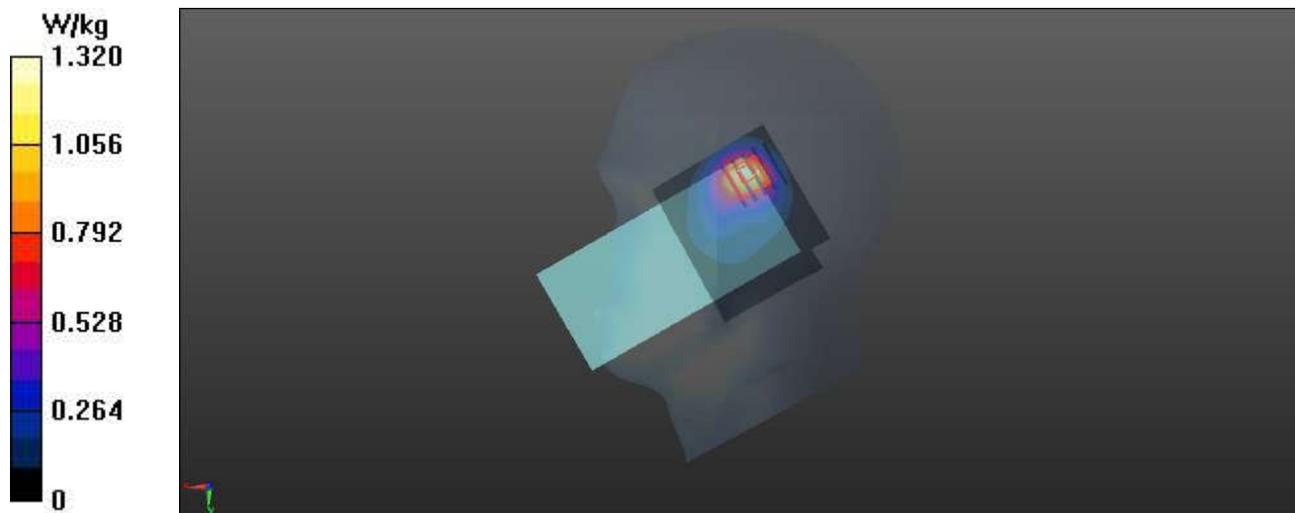

LTE 71_QPSK50M_1_49_Right Cheek_133222

DUT: EUT-G95

Communication System: UID 0, LTE Band 71&QPSK20M; Frequency: 673 MHz;Duty Cycle: 1:1
Medium: H750 Medium parameters used: $f = 673 \text{ MHz}$; $\sigma = 0.857 \text{ S/m}$; $\epsilon_r = 40.967$; $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(9.35, 9.96, 9.27) @ 673 MHz; Calibrated: 2024/11/12
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2024/10/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x81x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
Maximum value of SAR (interpolated) = 0.229 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 5.069 V/m ; Power Drift = -0.12 dB


Peak SAR (extrapolated) = 0.256 W/kg

SAR(1 g) = 0.208 W/kg ; SAR(10 g) = 0.167 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 79.7%

Maximum value of SAR (measured) = 0.224 W/kg

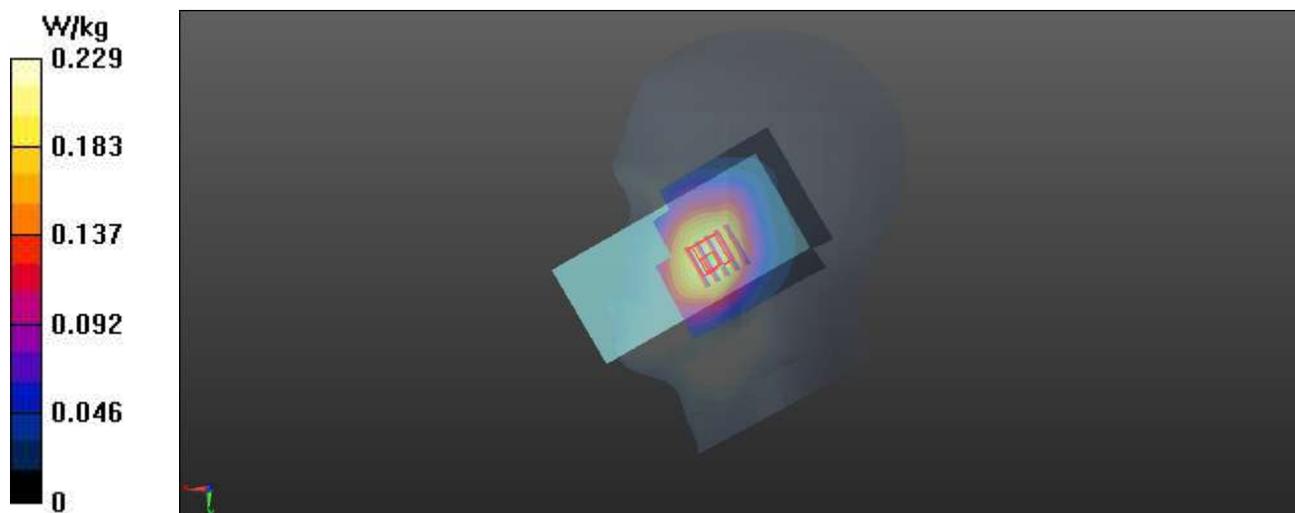

EDR_DH5_Left Cheek_78

DUT: EUT-G95

Communication System: UID 0, Bluetooth; Frequency: 2480 MHz; Duty Cycle: 1:1

Medium: H2450 Medium parameters used: $f = 2480$ MHz; $\sigma = 1.8$ S/m; $\epsilon_r = 38.15$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(6.78, 7.22, 6.73) @ 2480 MHz; Calibrated: 2024/11/12
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2024/10/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (91x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.567 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.480 V/m; Power Drift = 0.03 dB


Peak SAR (extrapolated) = 0.772 W/kg

SAR(1 g) = 0.408 W/kg; SAR(10 g) = 0.212 W/kg

Smallest distance from peaks to all points 3 dB below = 12.1 mm

Ratio of SAR at M2 to SAR at M1 = 53.5%

Maximum value of SAR (measured) = 0.525 W/kg

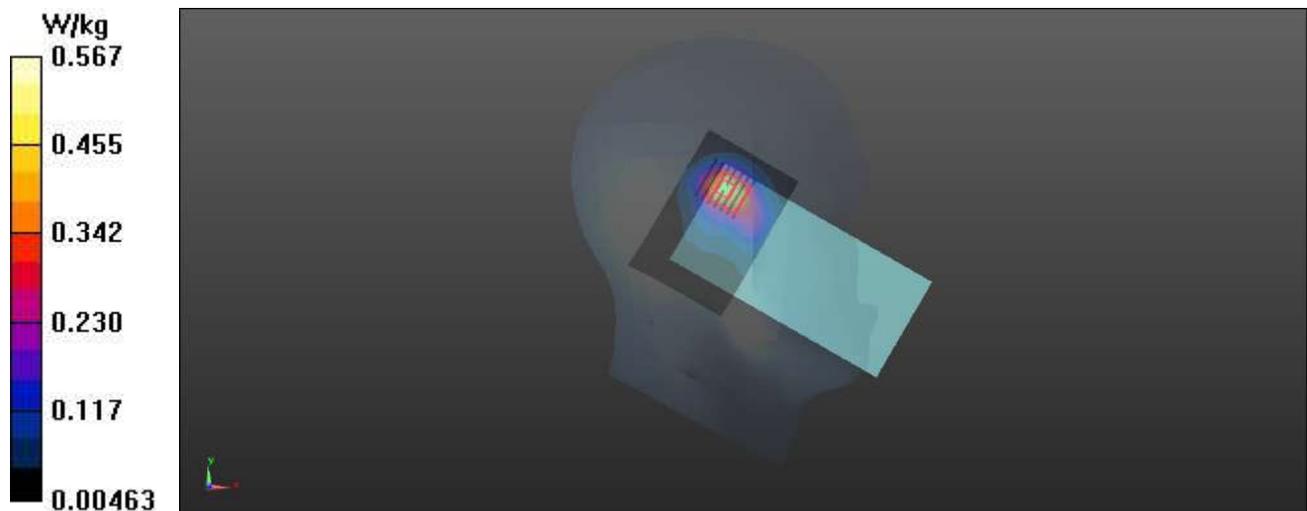

WIFI 2.4G_802.11b_Left Cheek_11**DUT: EUT-G95**


Communication System: UID 0, Wlan 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1
Medium: H2450 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.765$ S/m; $\epsilon_r = 38.145$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(6.78, 7.22, 6.73) @ 2462 MHz; Calibrated: 2024/11/12
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2024/10/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (91x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.843 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 11.27 V/m; Power Drift = 0.05 dB
Peak SAR (extrapolated) = 1.19 W/kg
SAR(1 g) = 0.630 W/kg; SAR(10 g) = 0.339 W/kg
Smallest distance from peaks to all points 3 dB below = 11.4 mm
Ratio of SAR at M2 to SAR at M1 = 55.4%
Maximum value of SAR (measured) = 0.795 W/kg

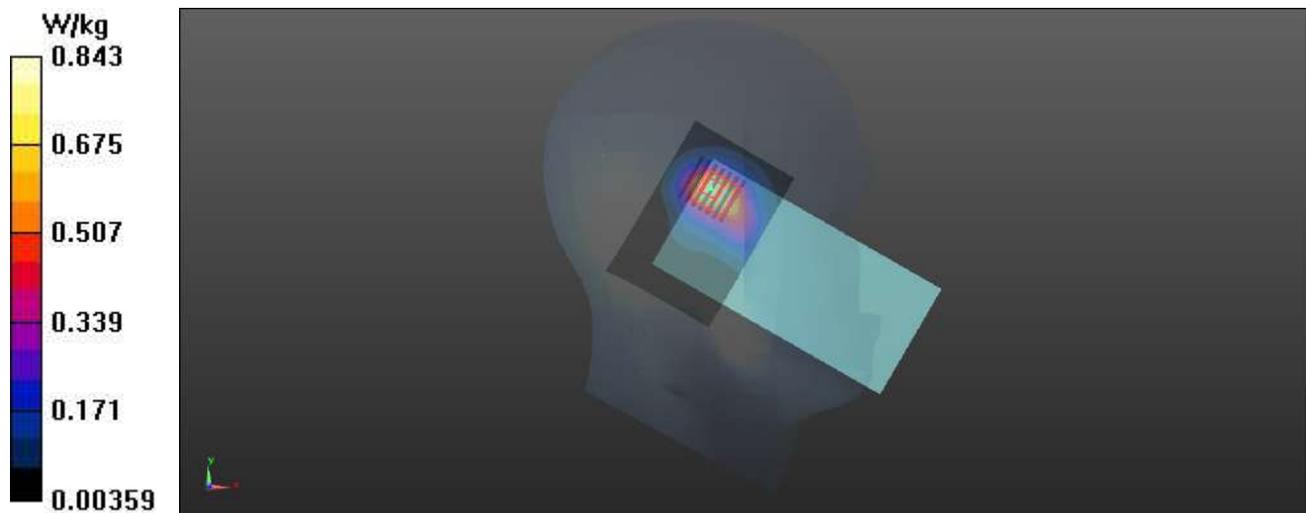

P01 802.11a_Left Tilted_Ch44

DUT: EUT

Communication System: UID 0, 802.11a; Frequency: 5220 MHz; Duty Cycle: 1:1

Medium: H5G Medium parameters used: $f = 5220$ MHz; $\sigma = 4.596$ S/m; $\epsilon_r = 37.181$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(5.63, 6, 5.58) @ 5220 MHz; Calibrated: 2024/11/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2024/10/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (61x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.82 W/kg

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 7.297 V/m; Power Drift = -0.07 dB


Peak SAR (extrapolated) = 2.98 W/kg

SAR(1 g) = 0.633 W/kg; SAR(10 g) = 0.190 W/kg

Smallest distance from peaks to all points 3 dB below = 5.7 mm

Ratio of SAR at M2 to SAR at M1 = 61.8%

Maximum value of SAR (measured) = 1.61 W/kg

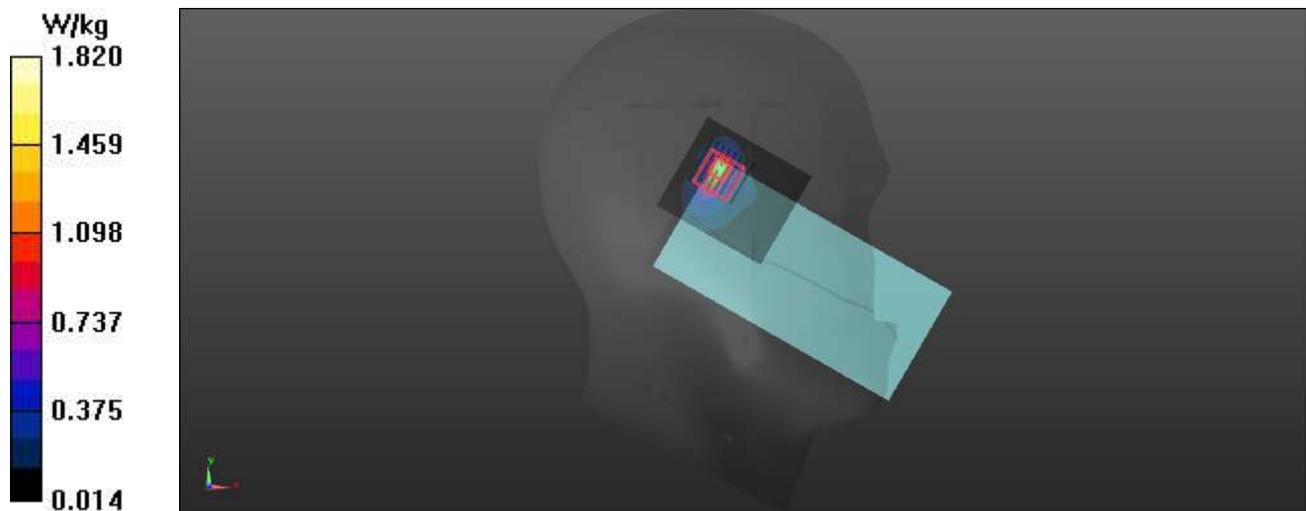

P02 802.11a_Left Tilted_Ch52

DUT: EUT

Communication System: UID 0, 802.11a; Frequency: 5260 MHz; Duty Cycle: 1:1

Medium: H5G Medium parameters used: $f = 5260$ MHz; $\sigma = 4.636$ S/m; $\epsilon_r = 37.125$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(5.63, 6, 5.58) @ 5260 MHz; Calibrated: 2024/11/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2024/10/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (61x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.86 W/kg

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 7.217 V/m; Power Drift = 0.07 dB



Peak SAR (extrapolated) = 3.09 W/kg

SAR(1 g) = 0.651 W/kg; SAR(10 g) = 0.196 W/kg

Smallest distance from peaks to all points 3 dB below = 5.7 mm

Ratio of SAR at M2 to SAR at M1 = 61.3%

Maximum value of SAR (measured) = 1.67 W/kg

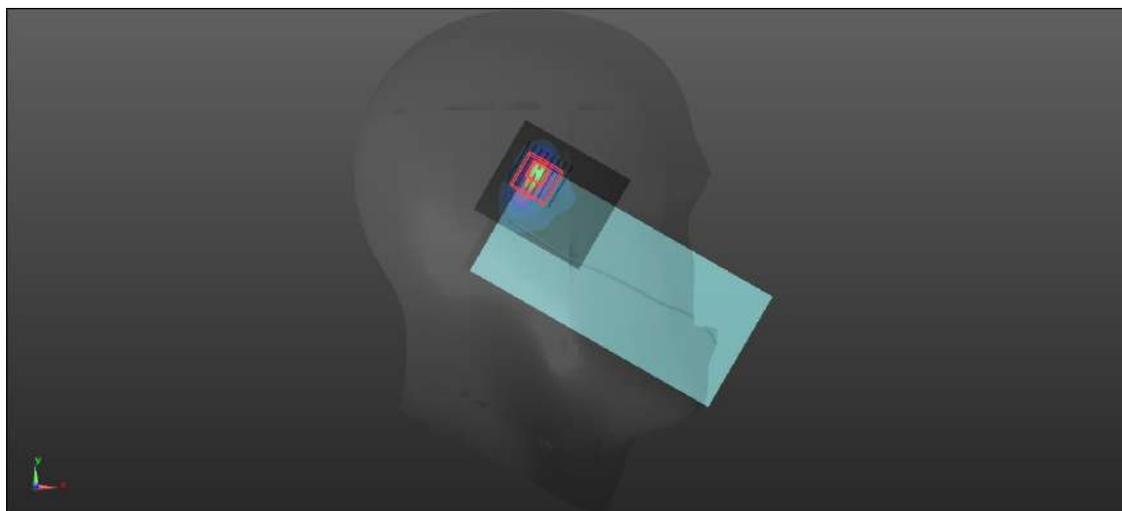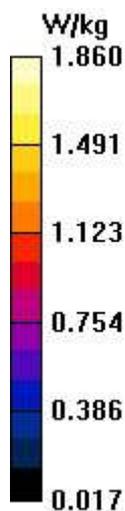

P03 802.11a_Left Tilted_Ch140

DUT: EUT

Communication System: UID 0, 802.11a; Frequency: 5700 MHz; Duty Cycle: 1:1

Medium: H5G Medium parameters used: $f = 5700$ MHz; $\sigma = 5.15$ S/m; $\epsilon_r = 36.342$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(5.26, 5.6, 5.22) @ 5700 MHz; Calibrated: 2024/11/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2024/10/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (61x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.54 W/kg

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 7.892 V/m; Power Drift = -0.08 dB


Peak SAR (extrapolated) = 2.66 W/kg

SAR(1 g) = 0.536 W/kg; SAR(10 g) = 0.173 W/kg

Smallest distance from peaks to all points 3 dB below = 5.8 mm

Ratio of SAR at M2 to SAR at M1 = 53.3%

Maximum value of SAR (measured) = 1.50 W/kg

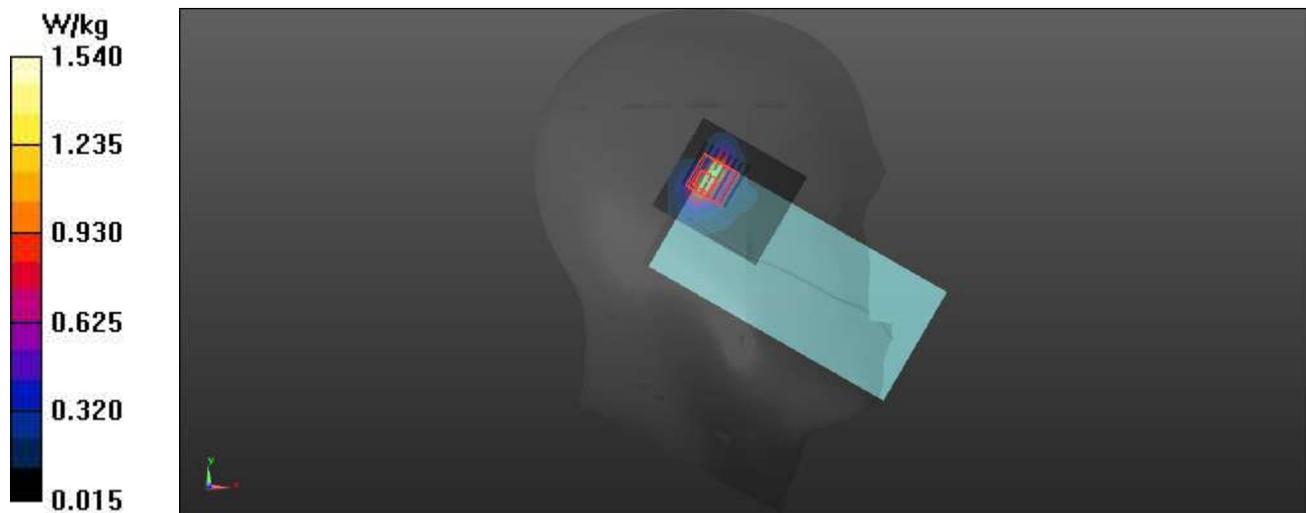

P04 802.11n_HT20_Left Tilted_Ch165**DUT: EUT**

Communication System: UID 0, 802.11n; Frequency: 5825 MHz; Duty Cycle: 1:1

Medium: H5G Medium parameters used: $f = 5825$ MHz; $\sigma = 5.271$ S/m; $\epsilon_r = 36.074$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(5.12, 5.45, 5.08) @ 5825 MHz; Calibrated: 2024/11/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2024/10/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (61x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 1.49 W/kg

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 8.456 V/m; Power Drift = -0.03 dB


Peak SAR (extrapolated) = 3.62 W/kg

SAR(1 g) = 0.593 W/kg; SAR(10 g) = 0.176 W/kg

Smallest distance from peaks to all points 3 dB below = 5.7 mm

Ratio of SAR at M2 to SAR at M1 = 53.5%

Maximum value of SAR (measured) = 1.73 W/kg

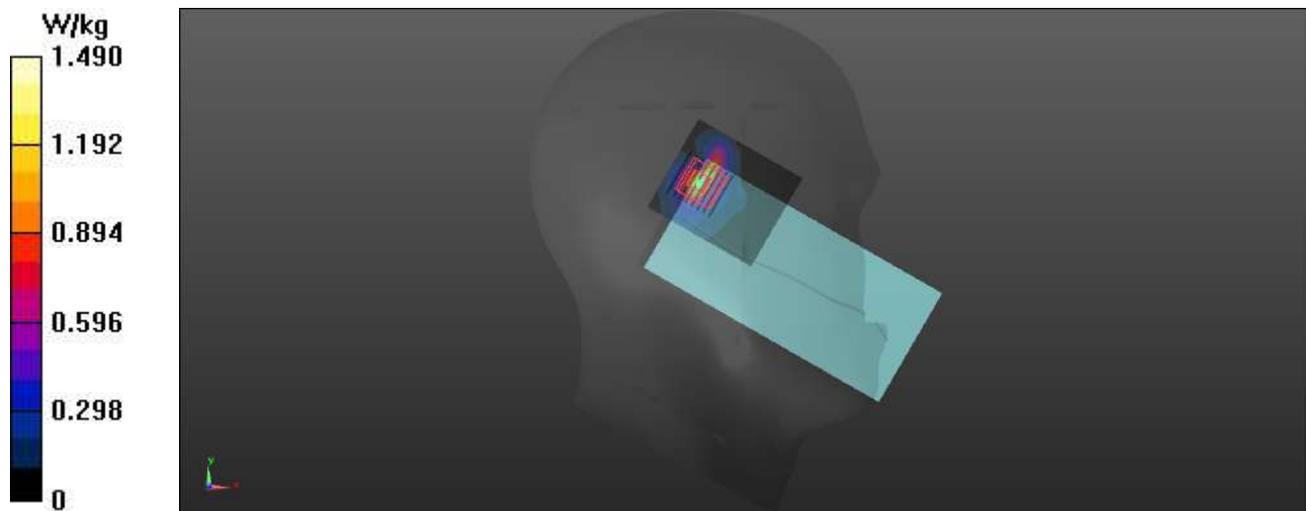

GSM850_GPRS10_Rear Face_10MM_190

DUT: EUT-G95

Communication System: UID 0, GPRS 850-2solt; Frequency: 836.6 MHz;Duty Cycle: 1:4

Medium: H835 Medium parameters used: $f = 837$ MHz; $\sigma = 0.921$ S/m; $\epsilon_r = 40.535$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(9.12, 9.72, 9.05) @ 836.6 MHz; Calibrated: 2024/11/12
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2024/10/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 1.41 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.68 V/m; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 2.03 W/kg

SAR(1 g) = 1.18 W/kg; SAR(10 g) = 0.692 W/kg

Smallest distance from peaks to all points 3 dB below = 11.5 mm

Ratio of SAR at M2 to SAR at M1 = 60.8%

Maximum value of SAR (measured) = 1.39 W/kg

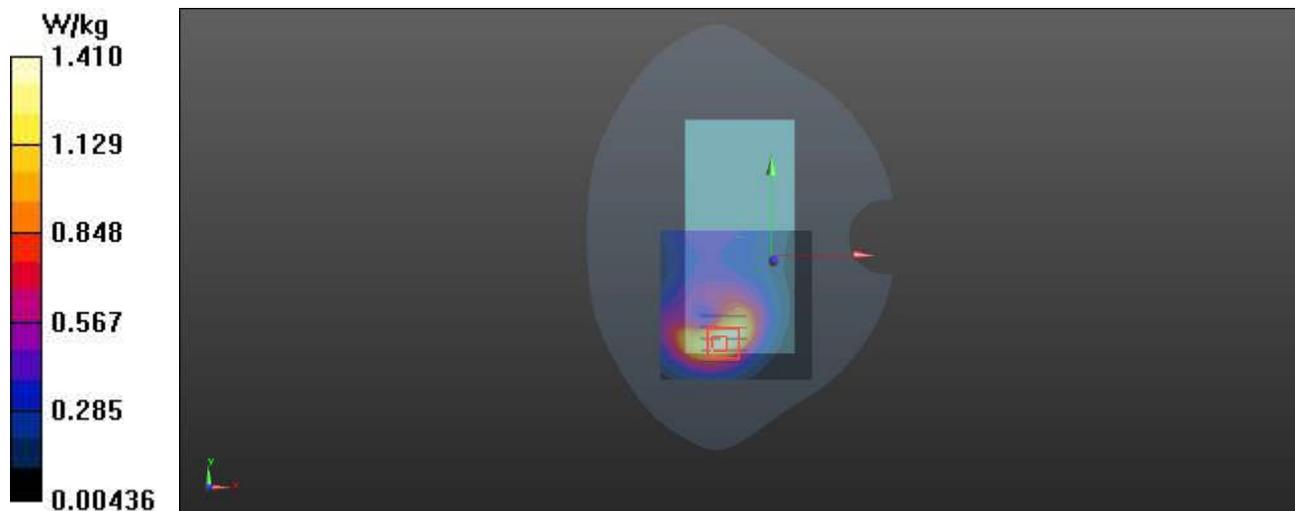

GSM1900_GPRS10_Rear Face_10MM_661**DUT: EUT-G95**


Communication System: UID 0, GPRS1900-2slots; Frequency: 1880 MHz; Duty Cycle: 1:4
Medium: H1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.371$ S/m; $\epsilon_r = 40.651$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(7.37, 7.85, 7.31) @ 1880 MHz; Calibrated: 2024/11/12
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2024/10/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.07 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 16.76 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 1.41 W/kg
SAR(1 g) = 0.867 W/kg; SAR(10 g) = 0.528 W/kg
Smallest distance from peaks to all points 3 dB below = 14.7 mm
Ratio of SAR at M2 to SAR at M1 = 63%
Maximum value of SAR (measured) = 1.03 W/kg

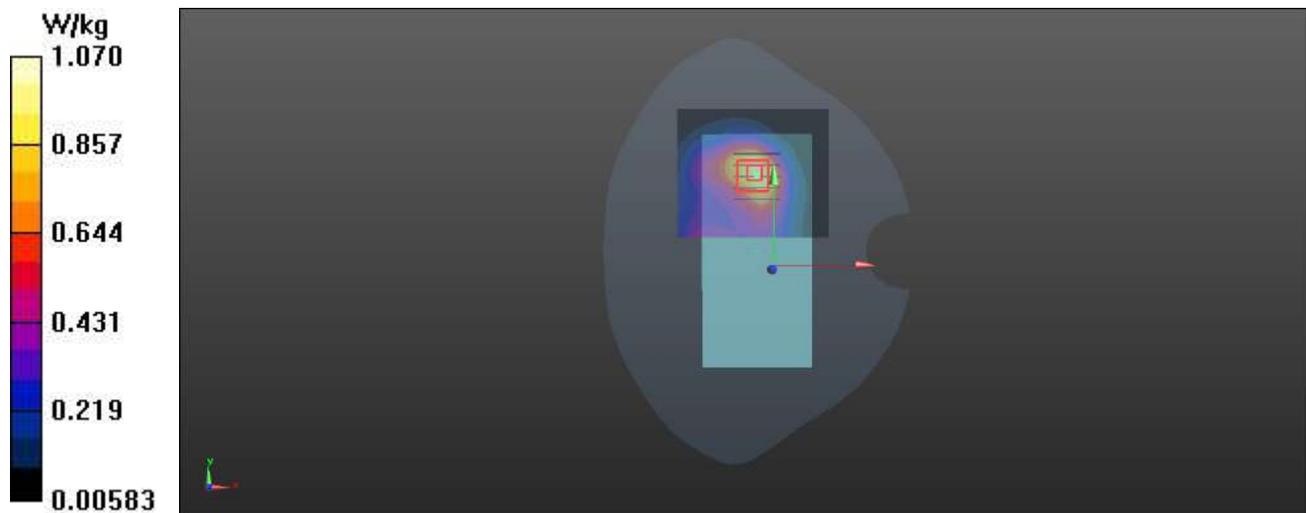

WCDMA II_RMC12.2K_Rear Face_10MM_9262**DUT: EUT-G95**


Communication System: UID 0, WCDMA Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1
Medium: H1900 Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.345$ S/m; $\epsilon_r = 40.764$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(7.37, 7.85, 7.31) @ 1852.4 MHz; Calibrated: 2024/11/12
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2024/10/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.23 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 21.93 V/m; Power Drift = 0.03 dB
Peak SAR (extrapolated) = 1.57 W/kg
SAR(1 g) = 0.973 W/kg; SAR(10 g) = 0.595 W/kg
Smallest distance from peaks to all points 3 dB below = 15.7 mm
Ratio of SAR at M2 to SAR at M1 = 63.1%
Maximum value of SAR (measured) = 1.16 W/kg

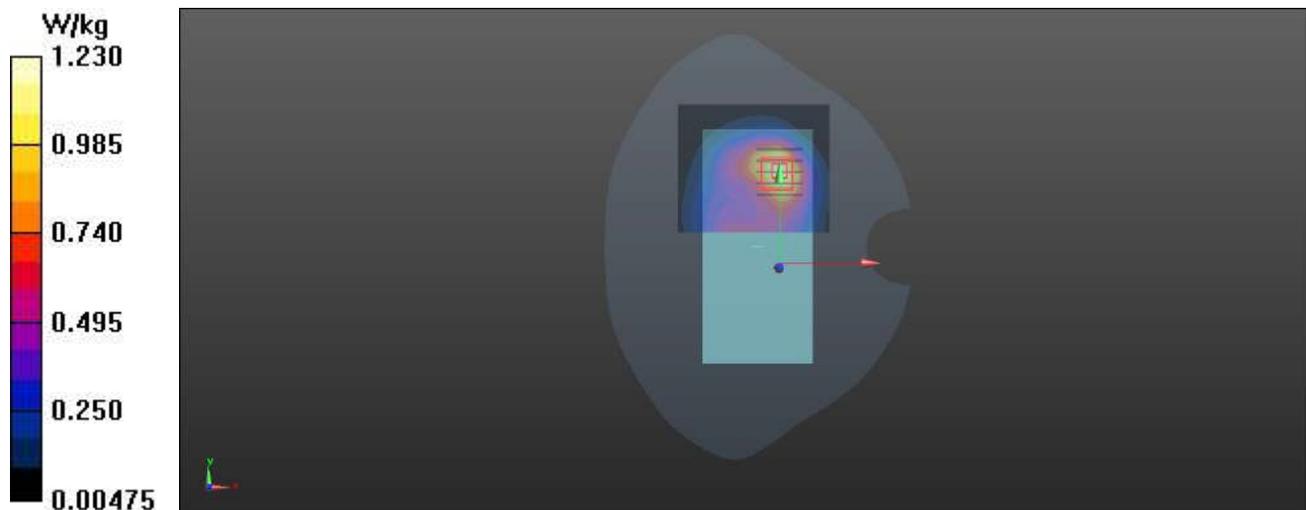

WCDMA IV_RMC12.2K_Rear Face_10MM_1513**DUT: EUT-G95**


Communication System: UID 0, WCDMA Band IV; Frequency: 1752.6 MHz; Duty Cycle: 1:1
Medium: H1750 Medium parameters used: $f = 1753$ MHz; $\sigma = 1.368$ S/m; $\epsilon_r = 40.359$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(7.7, 8.21, 7.64) @ 1752.6 MHz; Calibrated: 2024/11/12
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2024/10/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.00 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 17.83 V/m; Power Drift = 0.07 dB
Peak SAR (extrapolated) = 1.33 W/kg
SAR(1 g) = 0.820 W/kg; SAR(10 g) = 0.502 W/kg
Smallest distance from peaks to all points 3 dB below = 14.3 mm
Ratio of SAR at M2 to SAR at M1 = 62.1%
Maximum value of SAR (measured) = 0.959 W/kg

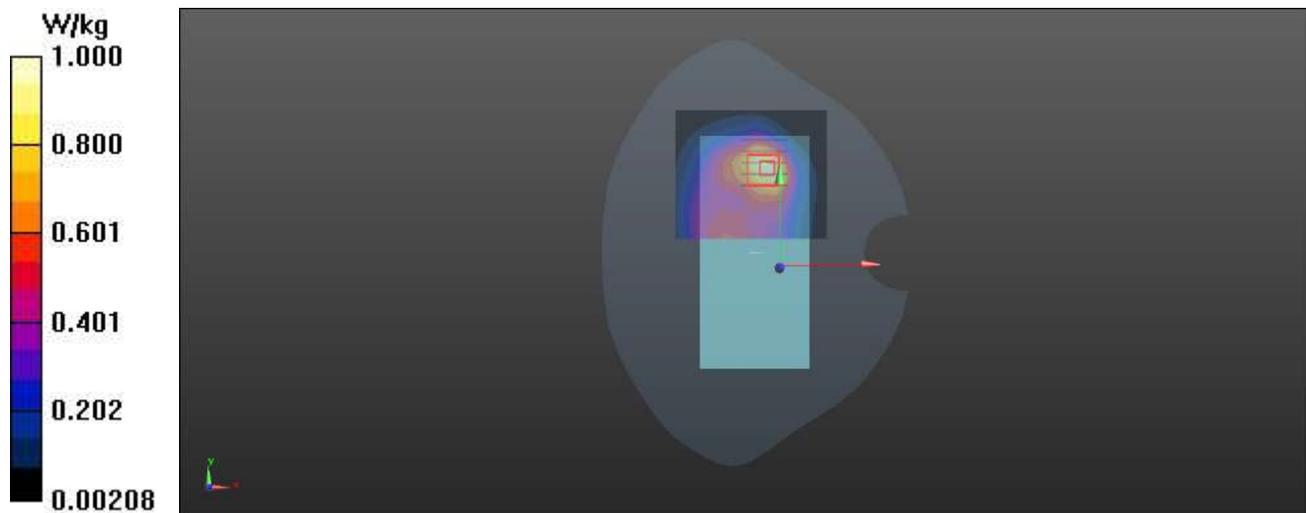

WCDMA V_RMC12.2K_Rear Face_10MM_4132

DUT: EUT-G95


Communication System: UID 0, WCDMA Band V; Frequency: 826.4 MHz; Duty Cycle: 1:1
Medium: H835 Medium parameters used : $f = 826.4$ MHz; $\sigma = 0.913$ S/m; $\epsilon_r = 40.627$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(9.12, 9.72, 9.05) @ 826.4 MHz; Calibrated: 2024/11/12
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2024/10/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.863 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 18.18 V/m; Power Drift = 0.02 dB
Peak SAR (extrapolated) = 1.22 W/kg
SAR(1 g) = 0.709 W/kg; SAR(10 g) = 0.413 W/kg
Smallest distance from peaks to all points 3 dB below = 12.2 mm
Ratio of SAR at M2 to SAR at M1 = 58%
Maximum value of SAR (measured) = 0.857 W/kg

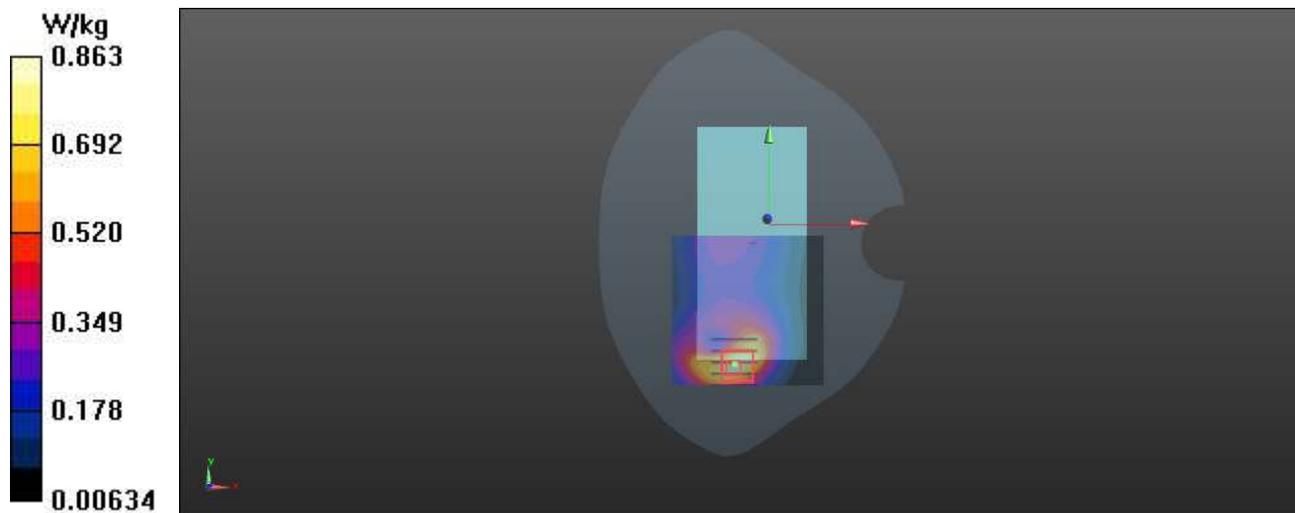

LTE 2_QPSK20M_1_49_Rear Face_10MM_18900

DUT: EUT-G95


Communication System: UID 0, LTE Band 2; Frequency: 1880 MHz; Duty Cycle: 1:1
Medium: H1900 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.371$ S/m; $\epsilon_r = 40.651$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(7.37, 7.85, 7.31) @ 1880 MHz; Calibrated: 2024/11/12
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2024/10/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.38 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 19.30 V/m; Power Drift = 0.07 dB
Peak SAR (extrapolated) = 1.78 W/kg
SAR(1 g) = 1.11 W/kg; SAR(10 g) = 0.683 W/kg
Smallest distance from peaks to all points 3 dB below = 14.3 mm
Ratio of SAR at M2 to SAR at M1 = 64.3%
Maximum value of SAR (measured) = 1.31 W/kg

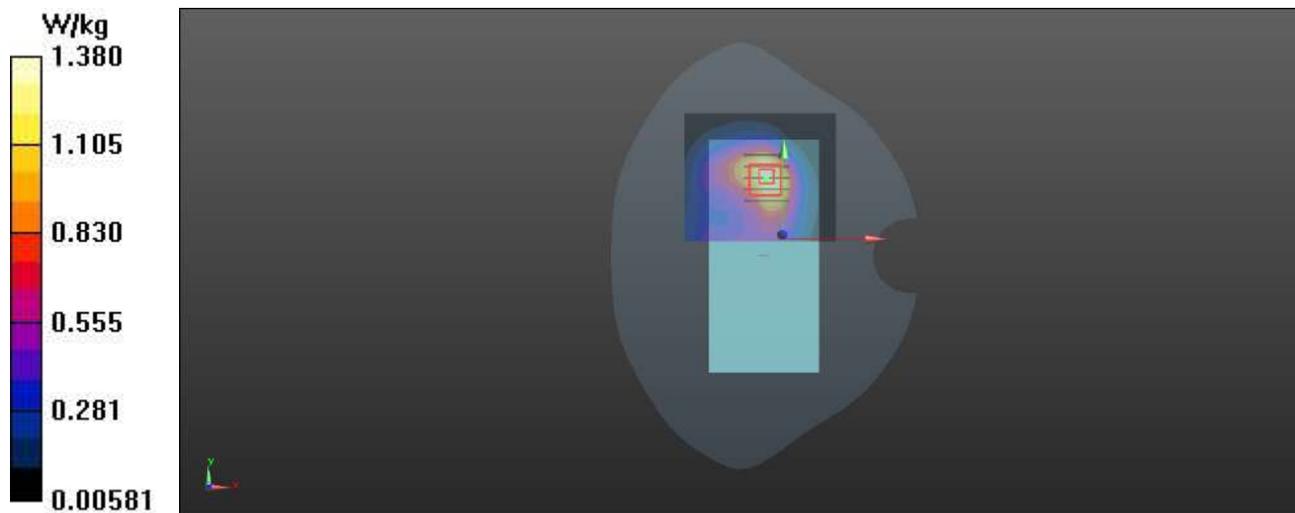

LTE 5_QPSK10M_1_25_Rear Face_10MM_20600

DUT: EUT-G95

Communication System: UID 0, LTE Band5; Frequency: 844 MHz; Duty Cycle: 1:1

Medium: H835 Medium parameters used: $f = 844$ MHz; $\sigma = 0.926$ S/m; $\epsilon_r = 40.474$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(9.12, 9.72, 9.05) @ 844 MHz; Calibrated: 2024/11/12
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2024/10/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm

Maximum value of SAR (interpolated) = 0.760 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.02 V/m; Power Drift = 0.08 dB


Peak SAR (extrapolated) = 1.06 W/kg

SAR(1 g) = 0.626 W/kg; SAR(10 g) = 0.369 W/kg

Smallest distance from peaks to all points 3 dB below = 13.7 mm

Ratio of SAR at M2 to SAR at M1 = 59.3%

Maximum value of SAR (measured) = 0.772 W/kg

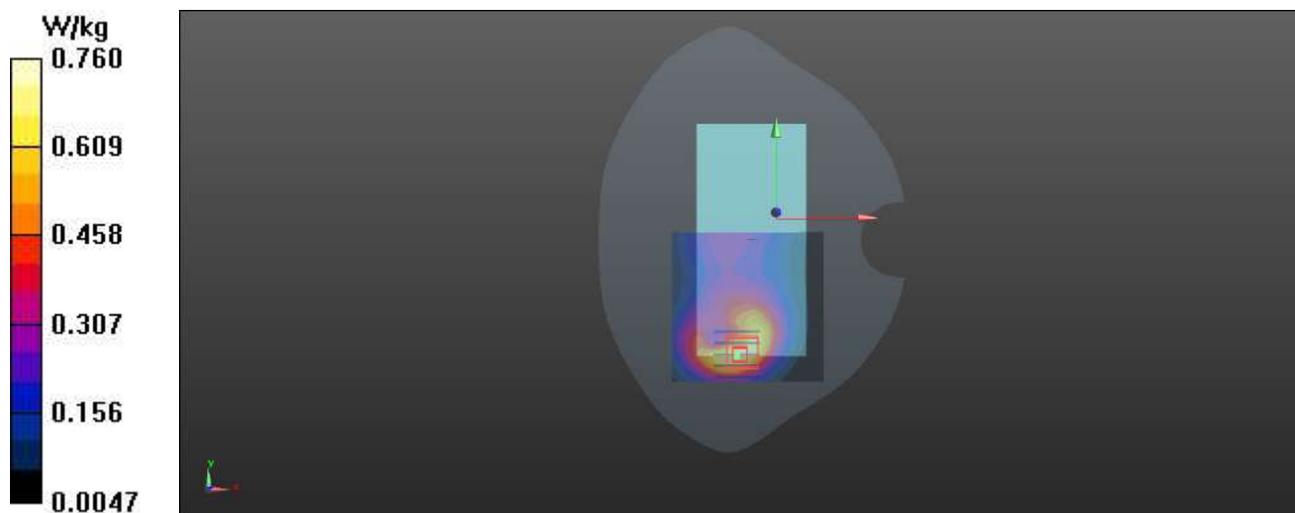

LTE 7_QPSK20M_1_49_Rear Face_10MM_21350**DUT: EUT-G95**


Communication System: UID 0, LTE Band 7&20M; Frequency: 2560 MHz; Duty Cycle: 1:1
Medium: H2600 Medium parameters used: $f = 2560$ MHz; $\sigma = 1.907$ S/m; $\epsilon_r = 38.016$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(6.7, 7.14, 6.64) @ 2560 MHz; Calibrated: 2024/11/12
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2024/10/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (81x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.723 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 7.779 V/m; Power Drift = -0.14 dB
Peak SAR (extrapolated) = 1.02 W/kg
SAR(1 g) = 0.508 W/kg; SAR(10 g) = 0.267 W/kg
Smallest distance from peaks to all points 3 dB below = 9.9 mm
Ratio of SAR at M2 to SAR at M1 = 50.4%
Maximum value of SAR (measured) = 0.640 W/kg

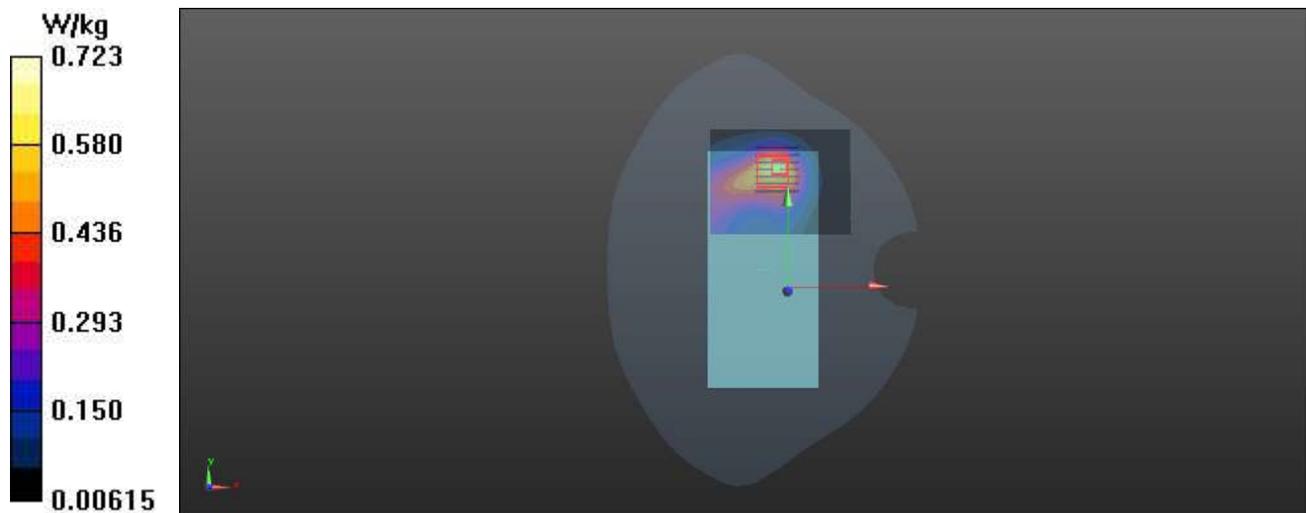

LTE 7_QPSK20M_1_49_Rear Face_15MM_21350**DUT: EUT-G95**


Communication System: UID 0, LTE Band 7&20M; Frequency: 2560 MHz; Duty Cycle: 1:1
Medium: H2600 Medium parameters used: $f = 2560$ MHz; $\sigma = 1.907$ S/m; $\epsilon_r = 38.016$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(6.7, 7.14, 6.64) @ 2560 MHz; Calibrated: 2024/11/12
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2024/10/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (81x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 1.02 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 10.29 V/m; Power Drift = -0.14 dB
Peak SAR (extrapolated) = 1.53 W/kg
SAR(1 g) = 0.786 W/kg; SAR(10 g) = 0.421 W/kg
Smallest distance from peaks to all points 3 dB below = 13.4 mm
Ratio of SAR at M2 to SAR at M1 = 51.5%
Maximum value of SAR (measured) = 0.990 W/kg

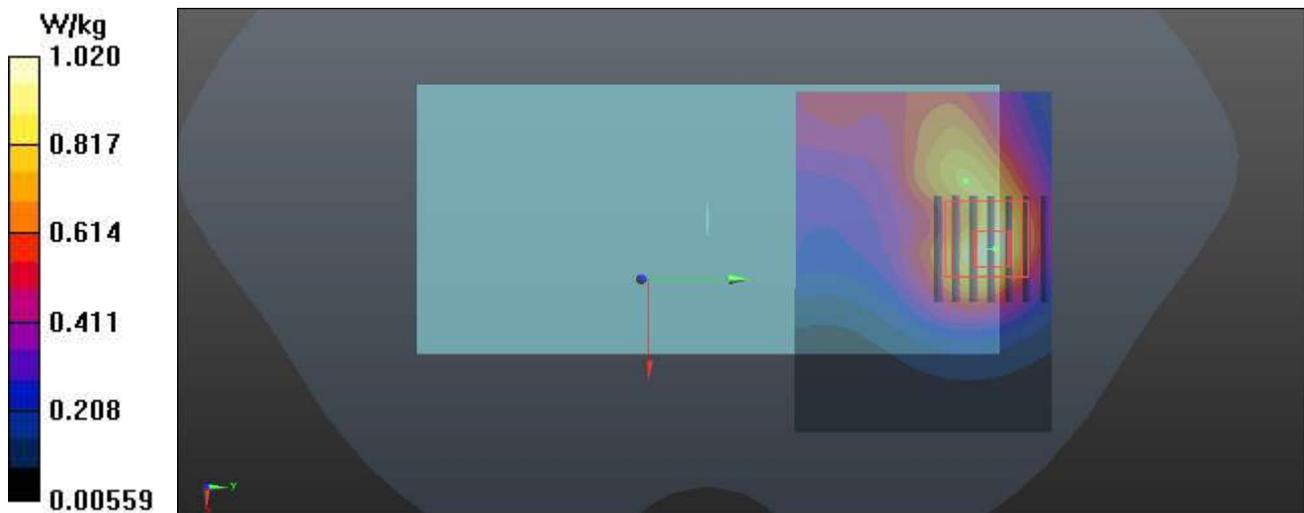

LTE 12_QPSK10M_1_25_Rear Face_10MM_23095**DUT: EUT-G95**


Communication System: UID 0, LTE Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium: H750 Medium parameters used : $f = 707.5$ MHz; $\sigma = 0.879$ S/m; $\epsilon_r = 40.891$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(9.35, 9.96, 9.27) @ 707.5 MHz; Calibrated: 2024/11/12
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2024/10/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x71x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.390 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 15.19 V/m; Power Drift = -0.02 dB
Peak SAR (extrapolated) = 0.553 W/kg
SAR(1 g) = 0.329 W/kg; SAR(10 g) = 0.196 W/kg
Smallest distance from peaks to all points 3 dB below = 12.2 mm
Ratio of SAR at M2 to SAR at M1 = 61.9%
Maximum value of SAR (measured) = 0.398 W/kg

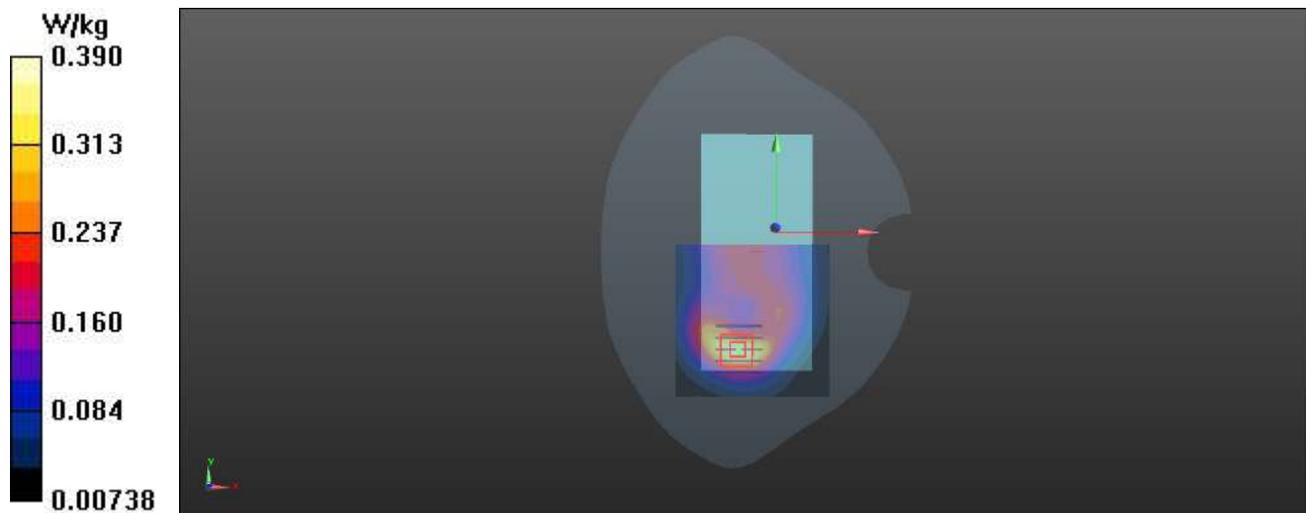

LTE 13_QPSK10M_1_25_Rear Face_10MM_23230

DUT: EUT-G95

Communication System: UID 0, LTE Band 13; Frequency: 782 MHz; Duty Cycle: 1:1

Medium: H750 Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.898 \text{ S/m}$; $\epsilon_r = 40.494$; $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(9.35, 9.96, 9.27) @ 782 MHz; Calibrated: 2024/11/12
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2024/10/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x71x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.493 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 15.41 V/m ; Power Drift = 0.07 dB


Peak SAR (extrapolated) = 0.690 W/kg

SAR(1 g) = 0.407 W/kg ; SAR(10 g) = 0.238 W/kg

Smallest distance from peaks to all points 3 dB below = 13.8 mm

Ratio of SAR at M2 to SAR at M1 = 59.5%

Maximum value of SAR (measured) = 0.497 W/kg

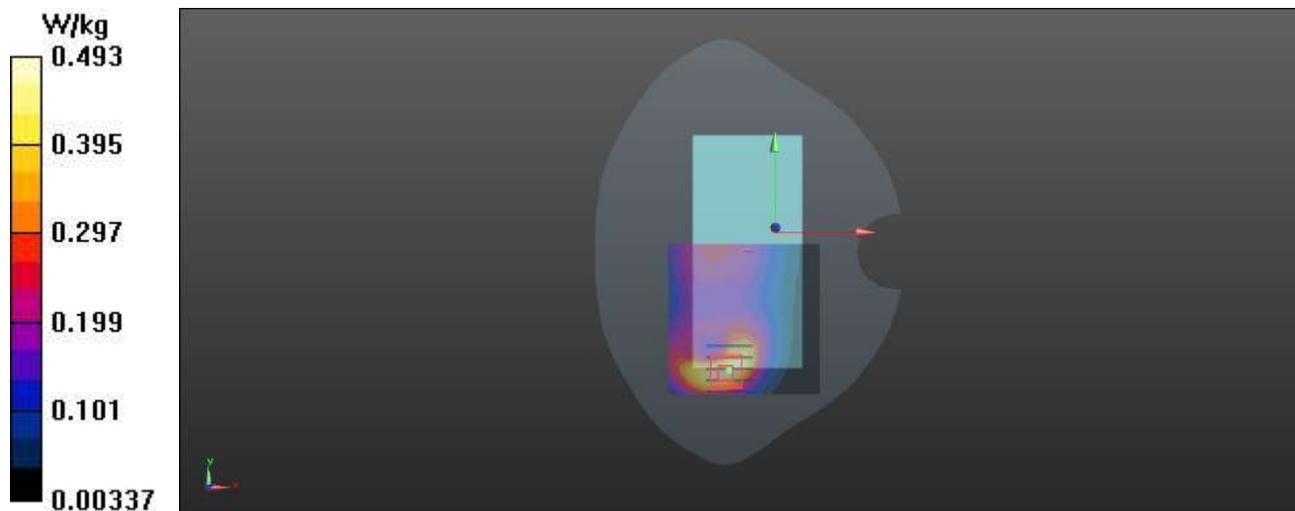

LTE 66_QPSK20M_1_49_Rear Face_10MM_132072**DUT: EUT-G95**


Communication System: UID 0, LTE Band 66&QPSK20M; Frequency: 1720 MHz;Duty Cycle: 1:1
Medium: H1750 Medium parameters used: $f = 1720$ MHz; $\sigma = 1.335$ S/m; $\epsilon_r = 40.574$; $\rho = 1000$
kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(7.7, 8.21, 7.64) @ 1720 MHz; Calibrated: 2024/11/12
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2024/10/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x61x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.19 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 19.64 V/m; Power Drift = -0.01 dB
Peak SAR (extrapolated) = 1.51 W/kg
SAR(1 g) = 0.933 W/kg; SAR(10 g) = 0.581 W/kg
Smallest distance from peaks to all points 3 dB below = 13.6 mm
Ratio of SAR at M2 to SAR at M1 = 62.5%
Maximum value of SAR (measured) = 1.08 W/kg

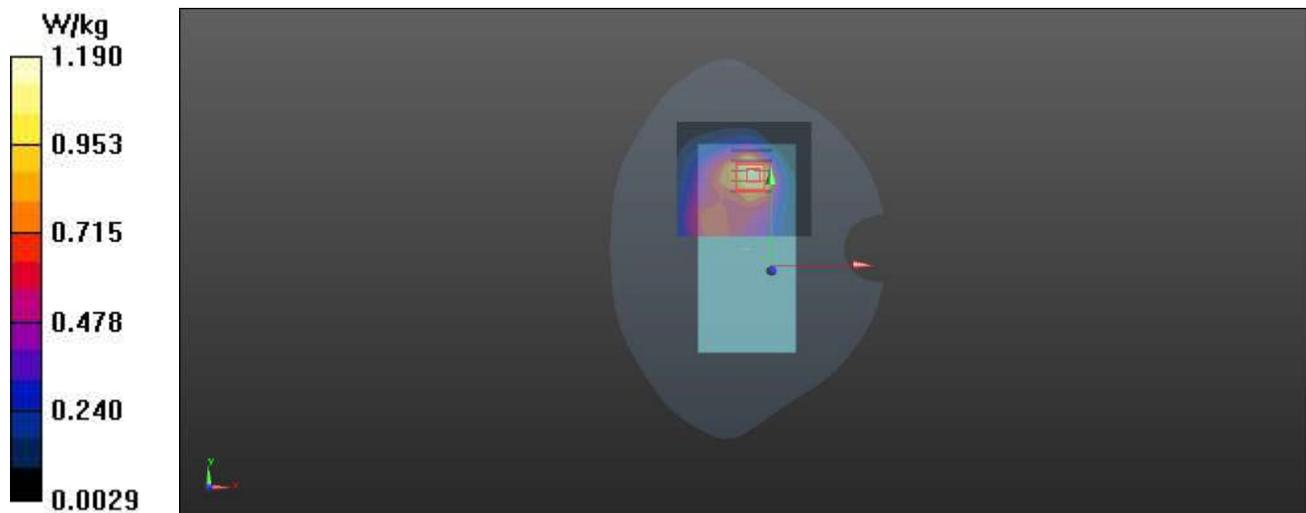

LTE 71_QPSK20M_1_49_Rear Face_10MM_133222

DUT: EUT-G95


Communication System: UID 0, LTE Band 71&QPSK20M; Frequency: 673 MHz;Duty Cycle: 1:1
 Medium: H750 Medium parameters used: $f = 673 \text{ MHz}$; $\sigma = 0.857 \text{ S/m}$; $\epsilon_r = 40.967$; $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(9.35, 9.96, 9.27) @ 673 MHz; Calibrated: 2024/11/12
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2024/10/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x71x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
 Maximum value of SAR (interpolated) = 0.297 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 13.10 V/m ; Power Drift = -0.04 dB
 Peak SAR (extrapolated) = 0.411 W/kg
SAR(1 g) = 0.249 W/kg ; SAR(10 g) = 0.151 W/kg
 Smallest distance from peaks to all points 3 dB below = 14.3 mm
 Ratio of SAR at M2 to SAR at M1 = 61.8%
 Maximum value of SAR (measured) = 0.301 W/kg

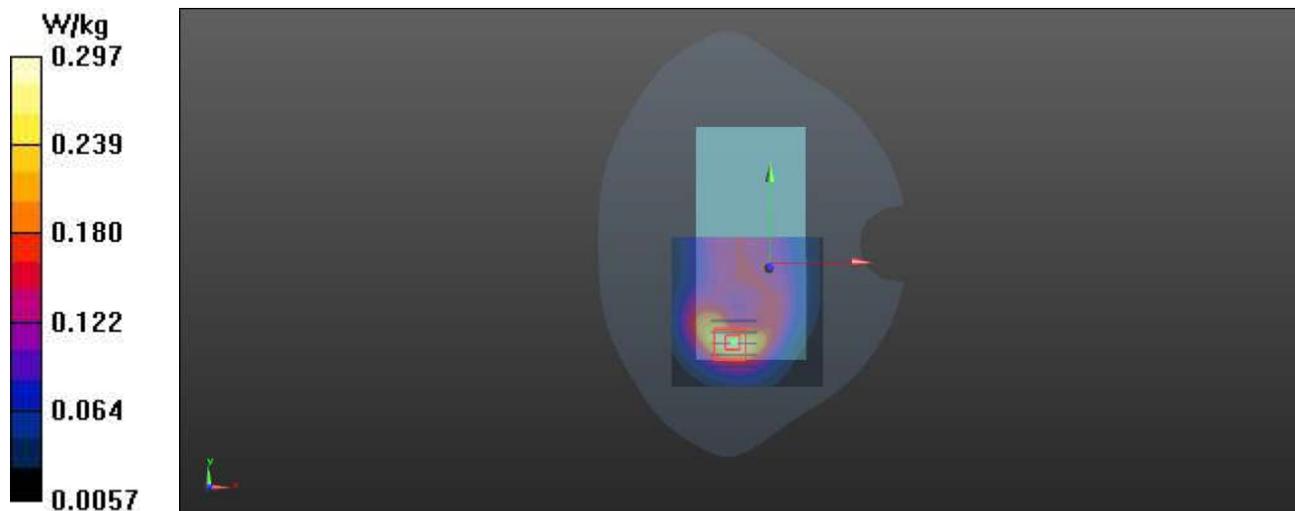

EDR_DH5_Rear Face_10MM_78

DUT: EUT-G95

Communication System: UID 0, Bluetooth; Frequency: 2480 MHz; Duty Cycle: 1:1

Medium: H2450 Medium parameters used: $f = 2480$ MHz; $\sigma = 1.8$ S/m; $\epsilon_r = 38.15$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(6.78, 7.22, 6.73) @ 2480 MHz; Calibrated: 2024/11/12
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2024/10/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (91x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm

Maximum value of SAR (interpolated) = 0.178 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.964 V/m; Power Drift = 0.02 dB


Peak SAR (extrapolated) = 0.322 W/kg

SAR(1 g) = 0.152 W/kg; SAR(10 g) = 0.080 W/kg

Smallest distance from peaks to all points 3 dB below = 11.7 mm

Ratio of SAR at M2 to SAR at M1 = 52%

Maximum value of SAR (measured) = 0.191 W/kg

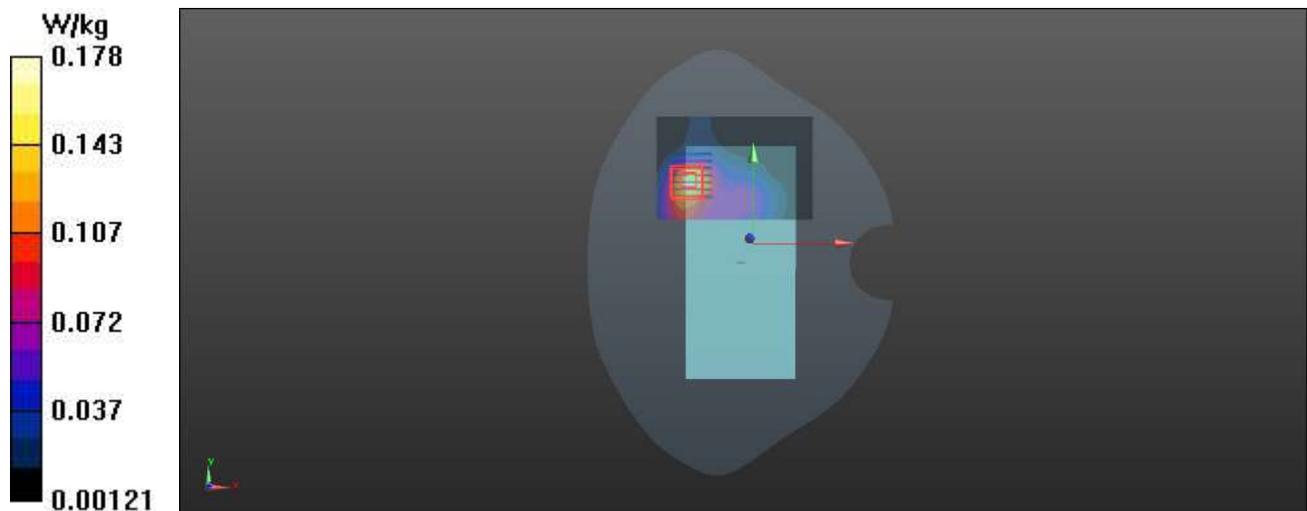

WIFI 2.4G_802.11b_Rear Face_10MM_11

DUT: EUT-G95


Communication System: UID 0, Wlan 802.11b; Frequency: 2462 MHz; Duty Cycle: 1:1
Medium: H2450 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.765$ S/m; $\epsilon_r = 38.145$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(6.78, 7.22, 6.73) @ 2462 MHz; Calibrated: 2024/11/12
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2024/10/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (91x61x1): Interpolated grid: dx=1.200 mm, dy=1.200 mm
Maximum value of SAR (interpolated) = 0.310 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 7.205 V/m; Power Drift = -0.15 dB
Peak SAR (extrapolated) = 0.473 W/kg
SAR(1 g) = 0.221 W/kg; SAR(10 g) = 0.111 W/kg
Smallest distance from peaks to all points 3 dB below = 10.3 mm
Ratio of SAR at M2 to SAR at M1 = 48.5%
Maximum value of SAR (measured) = 0.279 W/kg

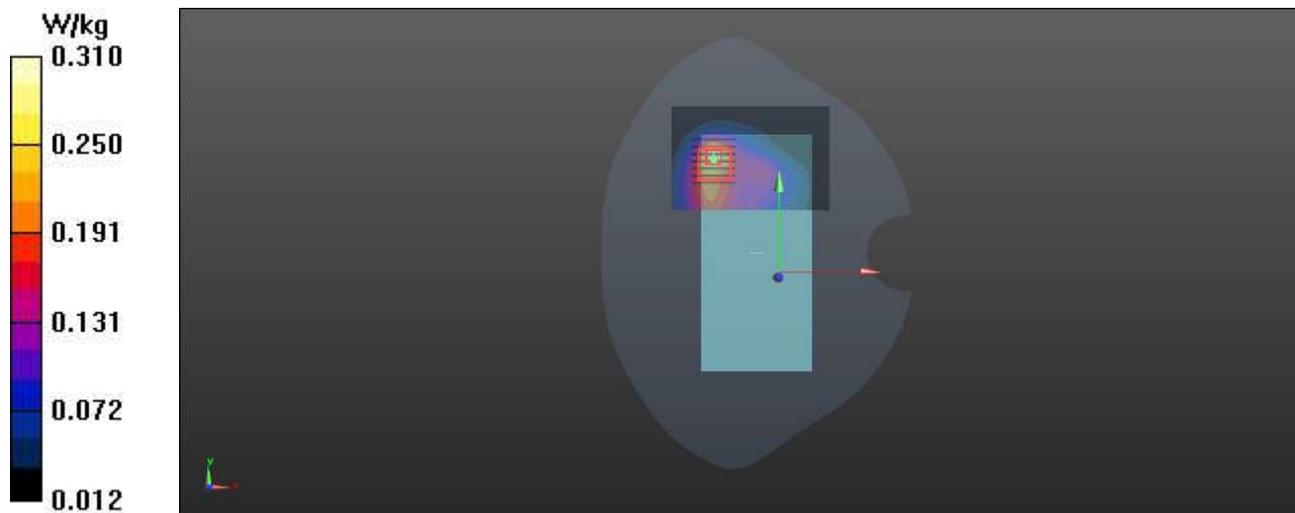

P05 802.11a_Rear Face_1cm_Ch44

DUT: EUT

Communication System: UID 0, 802.11a; Frequency: 5220 MHz; Duty Cycle: 1:1

Medium: H5G Medium parameters used: $f = 5220$ MHz; $\sigma = 4.596$ S/m; $\epsilon_r = 37.181$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(5.63, 6, 5.58) @ 5220 MHz; Calibrated: 2024/11/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2024/10/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.640 W/kg

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 1.175 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 0.997 W/kg

SAR(1 g) = 0.245 W/kg; SAR(10 g) = 0.074 W/kg

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 63.1%

Maximum value of SAR (measured) = 0.564 W/kg

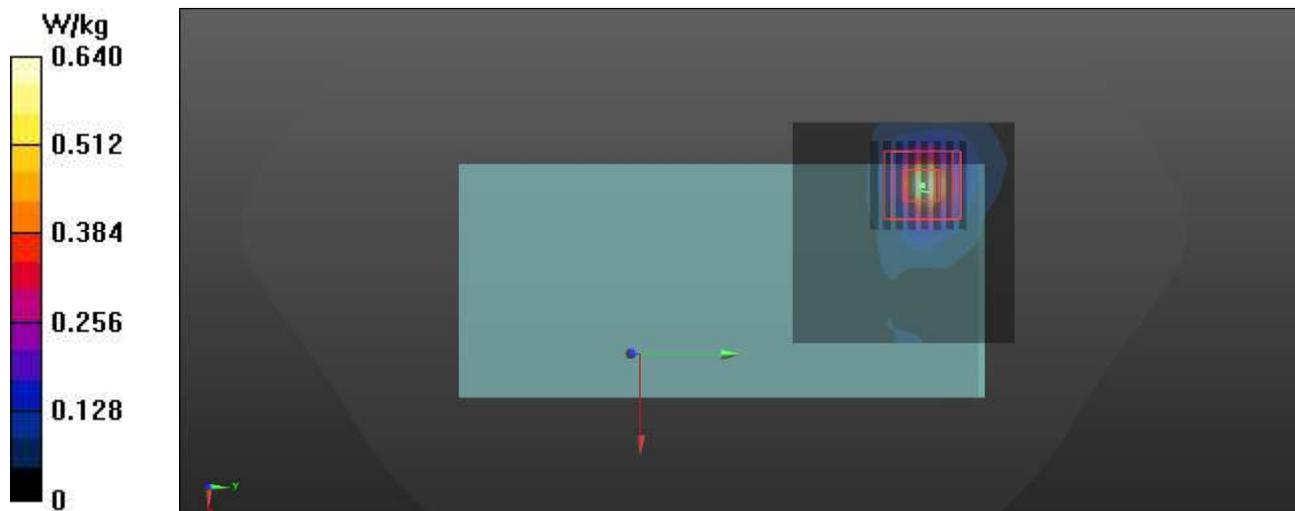

P06 802.11a_Rear Face_1cm_Ch52**DUT: EUT**

Communication System: UID 0, 802.11a; Frequency: 5260 MHz; Duty Cycle: 1:1

Medium: H5G Medium parameters used: $f = 5260$ MHz; $\sigma = 4.636$ S/m; $\epsilon_r = 37.125$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(5.63, 6, 5.58) @ 5260 MHz; Calibrated: 2024/11/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2024/10/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.531 W/kg

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0.8090 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 0.965 W/kg

SAR(1 g) = 0.229 W/kg; SAR(10 g) = 0.070 W/kg

Smallest distance from peaks to all points 3 dB below = 7.9 mm

Ratio of SAR at M2 to SAR at M1 = 60.9%

Maximum value of SAR (measured) = 0.546 W/kg

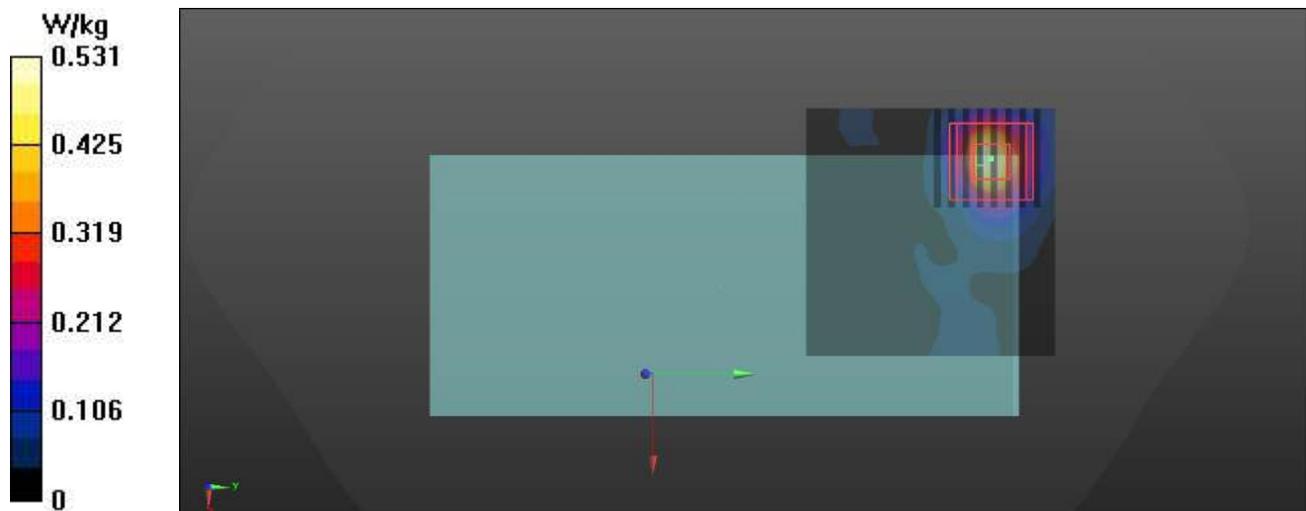

P07 802.11a_Rear Face_1cm_Ch140

DUT: EUT

Communication System: UID 0, 802.11a; Frequency: 5700 MHz; Duty Cycle: 1:1

Medium: H5G Medium parameters used: $f = 5700$ MHz; $\sigma = 5.15$ S/m; $\epsilon_r = 36.342$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(5.26, 5.6, 5.22) @ 5700 MHz; Calibrated: 2024/11/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2024/10/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.550 W/kg

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 1.094 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 0.997 W/kg

SAR(1 g) = 0.217 W/kg; SAR(10 g) = 0.072 W/kg

Smallest distance from peaks to all points 3 dB below = 8.2 mm

Ratio of SAR at M2 to SAR at M1 = 58.7%

Maximum value of SAR (measured) = 0.531 W/kg

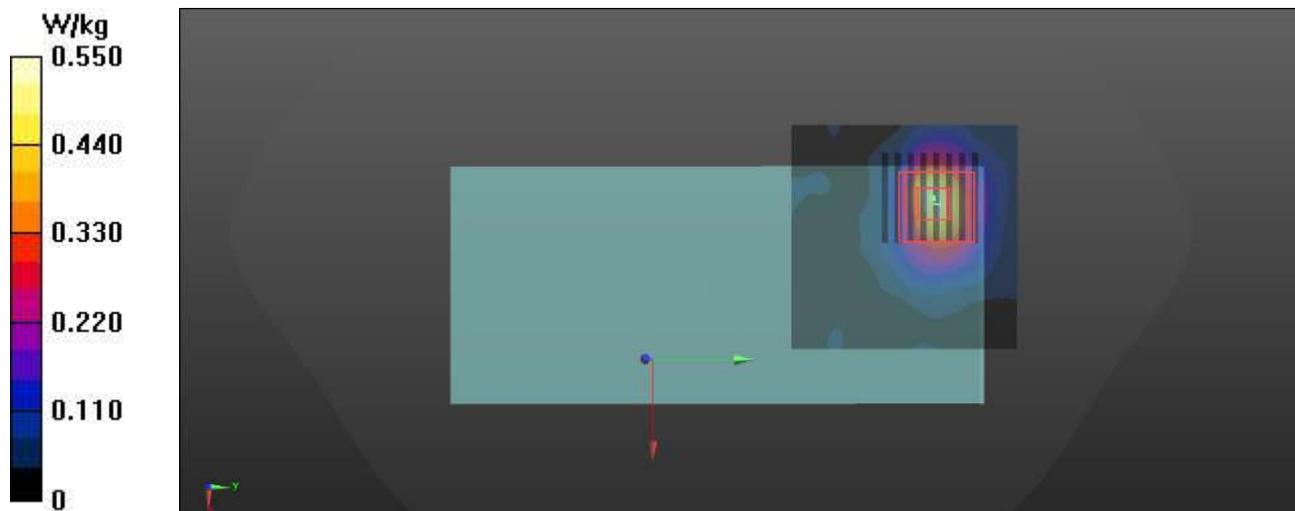

P08 802.11n_HT20_Rear Face_1cm_Ch165

DUT: EUT

Communication System: UID 0, 802.11n; Frequency: 5825 MHz; Duty Cycle: 1:1

Medium: H5G Medium parameters used: $f = 5825$ MHz; $\sigma = 5.271$ S/m; $\epsilon_r = 36.074$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(5.12, 5.45, 5.08) @ 5825 MHz; Calibrated: 2024/11/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2024/10/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 0.629 W/kg

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 0.9160 V/m; Power Drift = 0.00 dB


Peak SAR (extrapolated) = 1.21 W/kg

SAR(1 g) = 0.252 W/kg; SAR(10 g) = 0.089 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 55.9%

Maximum value of SAR (measured) = 0.623 W/kg

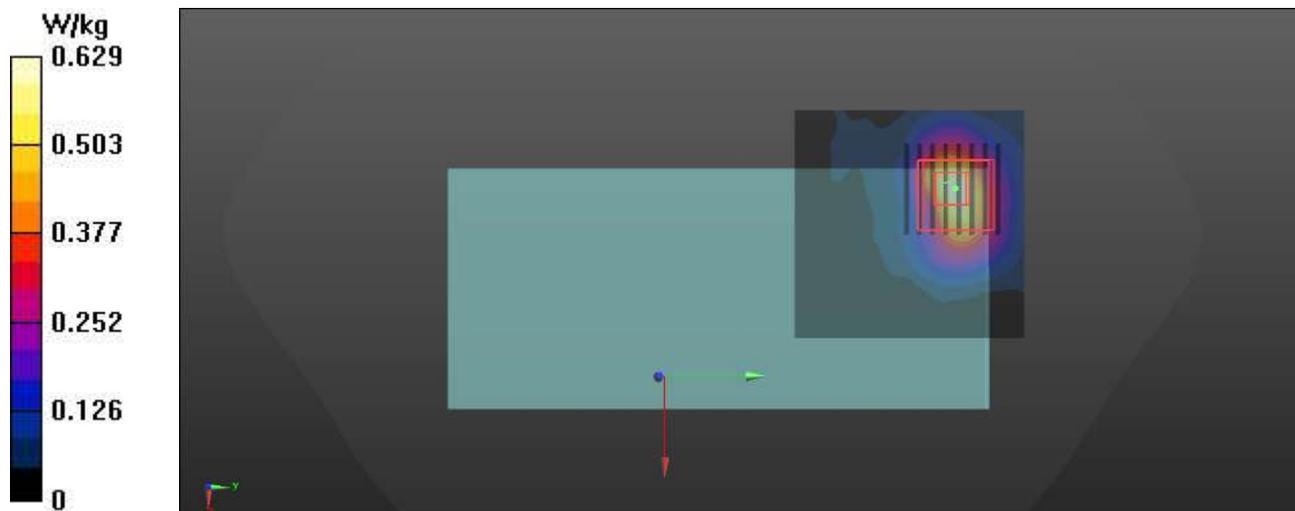

LTE 7_QPSK20M_1_49_Rear Face_10MM_21350**DUT: EUT-G95**


Communication System: UID 0, LTE Band 7&20M; Frequency: 2560 MHz; Duty Cycle: 1:1
Medium: H2600 Medium parameters used: $f = 2560$ MHz; $\sigma = 1.907$ S/m; $\epsilon_r = 38.016$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(6.7, 7.14, 6.64) @ 2560 MHz; Calibrated: 2024/11/12
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2024/10/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (81x61x1): Interpolated grid: $dx=1.200$ mm, $dy=1.200$ mm
Maximum value of SAR (interpolated) = 0.654 W/kg

Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm
Reference Value = 8.308 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 1.05 W/kg
SAR(1 g) = 0.505 W/kg; SAR(10 g) = 0.255 W/kg
Smallest distance from peaks to all points 3 dB below = 10.3 mm
Ratio of SAR at M2 to SAR at M1 = 48.5%
Maximum value of SAR (measured) = 0.645 W/kg

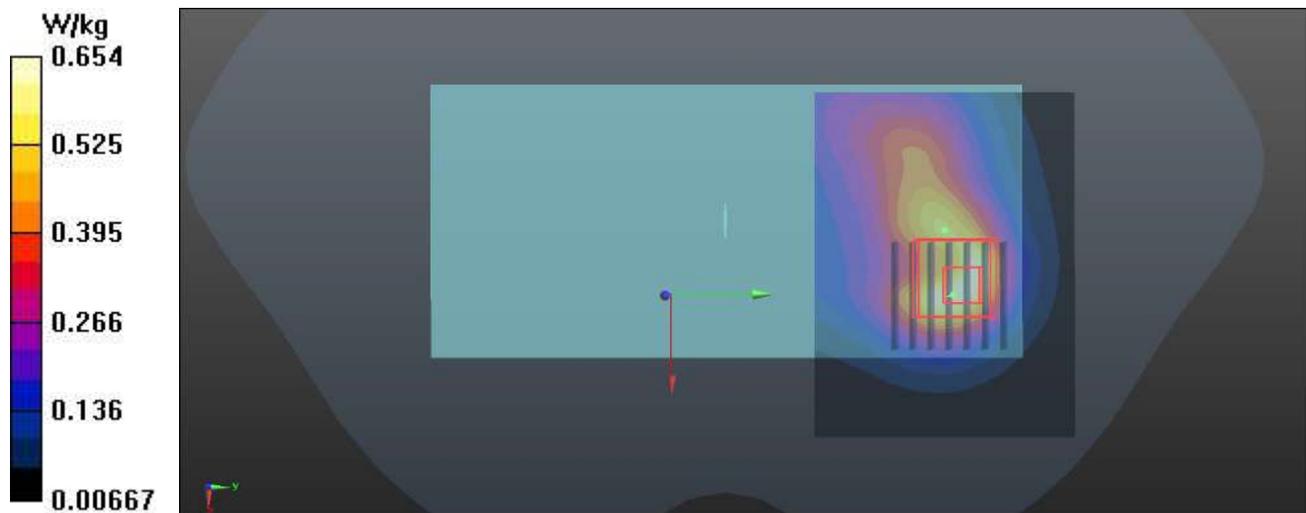

LTE 12_QPSK10M_1_25_Right Side_10MM_23095

DUT: EUT-G95

Communication System: UID 0, LTE Band 12; Frequency: 707.5 MHz; Duty Cycle: 1:1
Medium: H750 Medium parameters used : $f = 707.5$ MHz; $\sigma = 0.879$ S/m; $\epsilon_r = 40.891$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(9.35, 9.96, 9.27) @ 707.5 MHz; Calibrated: 2024/11/12
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2024/10/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (51x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 0.692 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.20 V/m; Power Drift = 0.12 dB


Peak SAR (extrapolated) = 0.835 W/kg

SAR(1 g) = 0.615 W/kg; SAR(10 g) = 0.436 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 72.9%

Maximum value of SAR (measured) = 0.699 W/kg

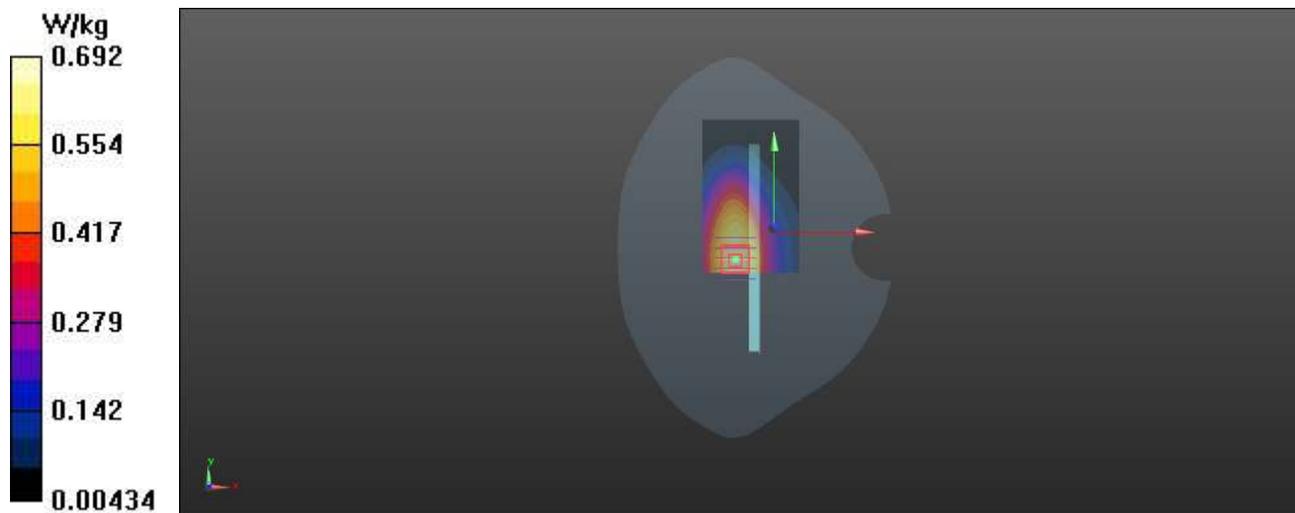

LTE 13_QPSK10M_1_25_Right Side_10MM_23230

DUT: EUT-G95

Communication System: UID 0, LTE Band 13; Frequency: 782 MHz; Duty Cycle: 1:1

Medium: H750 Medium parameters used: $f = 782 \text{ MHz}$; $\sigma = 0.898 \text{ S/m}$; $\epsilon_r = 40.494$; $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(9.35, 9.96, 9.27) @ 782 MHz; Calibrated: 2024/11/12
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2024/10/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (51x81x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$

Maximum value of SAR (interpolated) = 0.505 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 19.43 V/m ; Power Drift = 0.15 dB


Peak SAR (extrapolated) = 0.608 W/kg

SAR(1 g) = 0.444 W/kg ; SAR(10 g) = 0.311 W/kg

Smallest distance from peaks to all points 3 dB below: Larger than measurement grid

Ratio of SAR at M2 to SAR at M1 = 72.2%

Maximum value of SAR (measured) = 0.505 W/kg

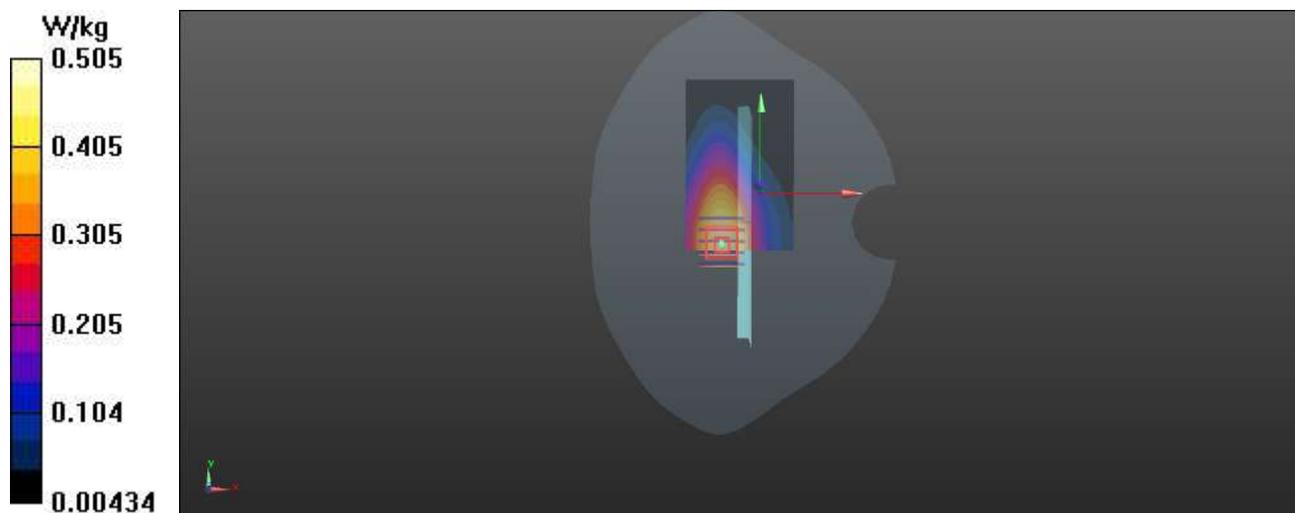

LTE 66_QPSK20M_1_49_Top Side_10MM_132072

DUT: EUT-G95


Communication System: UID 0, LTE Band 66&QPSK20M; Frequency: 1720 MHz;Duty Cycle: 1:1
Medium: H1750 Medium parameters used: $f = 1720$ MHz; $\sigma = 1.335$ S/m; $\epsilon_r = 40.574$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(7.7, 8.21, 7.64) @ 1720 MHz; Calibrated: 2024/11/12
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2024/10/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (51x81x1): Interpolated grid: dx=1.500 mm, dy=1.500 mm
Maximum value of SAR (interpolated) = 1.35 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 26.88 V/m; Power Drift = 0.17 dB
Peak SAR (extrapolated) = 1.64 W/kg
SAR(1 g) = 1.1 W/kg; SAR(10 g) = 0.686 W/kg
Smallest distance from peaks to all points 3 dB below = 16 mm
Ratio of SAR at M2 to SAR at M1 = 67.8%
Maximum value of SAR (measured) = 1.29 W/kg

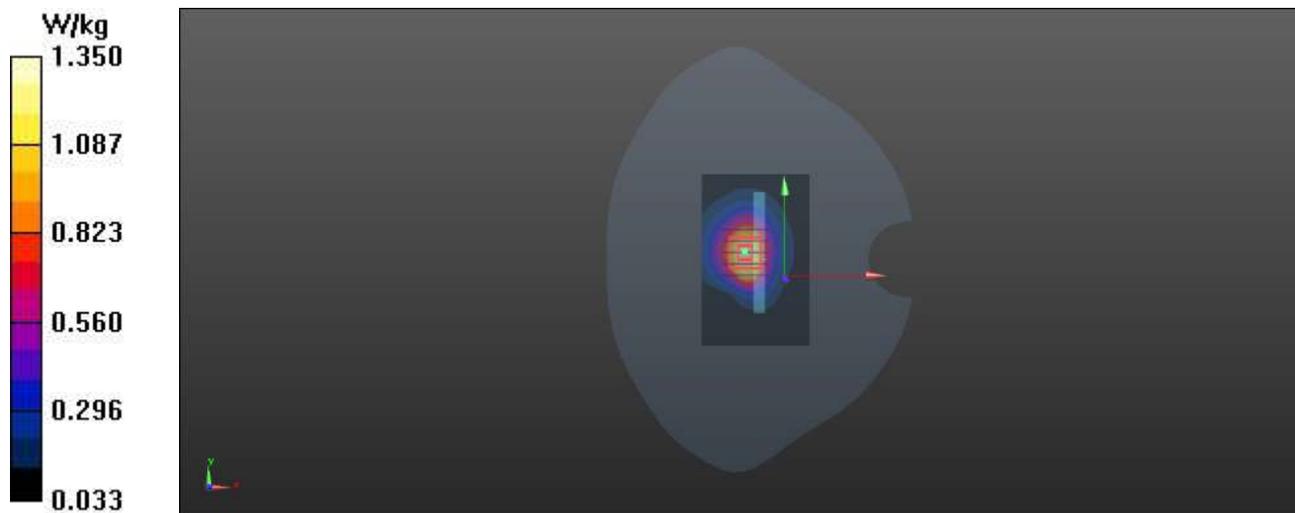

LTE 71_QPSK20M_1_49_Bottom Side_10MM_133222

DUT: EUT-G95


Communication System: UID 0, LTE Band 71&QPSK20M; Frequency: 673 MHz;Duty Cycle: 1:1
Medium: H750 Medium parameters used: $f = 673 \text{ MHz}$; $\sigma = 0.857 \text{ S/m}$; $\epsilon_r = 40.967$; $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(9.35, 9.96, 9.27) @ 673 MHz; Calibrated: 2024/11/12
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2024/10/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (51x81x1): Interpolated grid: $dx=1.500 \text{ mm}$, $dy=1.500 \text{ mm}$
Maximum value of SAR (interpolated) = 0.342 W/kg

Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
Reference Value = 9.665 V/m ; Power Drift = 0.04 dB
Peak SAR (extrapolated) = 0.528 W/kg
SAR(1 g) = 0.289 W/kg ; SAR(10 g) = 0.160 W/kg
Smallest distance from peaks to all points 3 dB below = 11.2 mm
Ratio of SAR at M2 to SAR at M1 = 57.6%
Maximum value of SAR (measured) = 0.359 W/kg

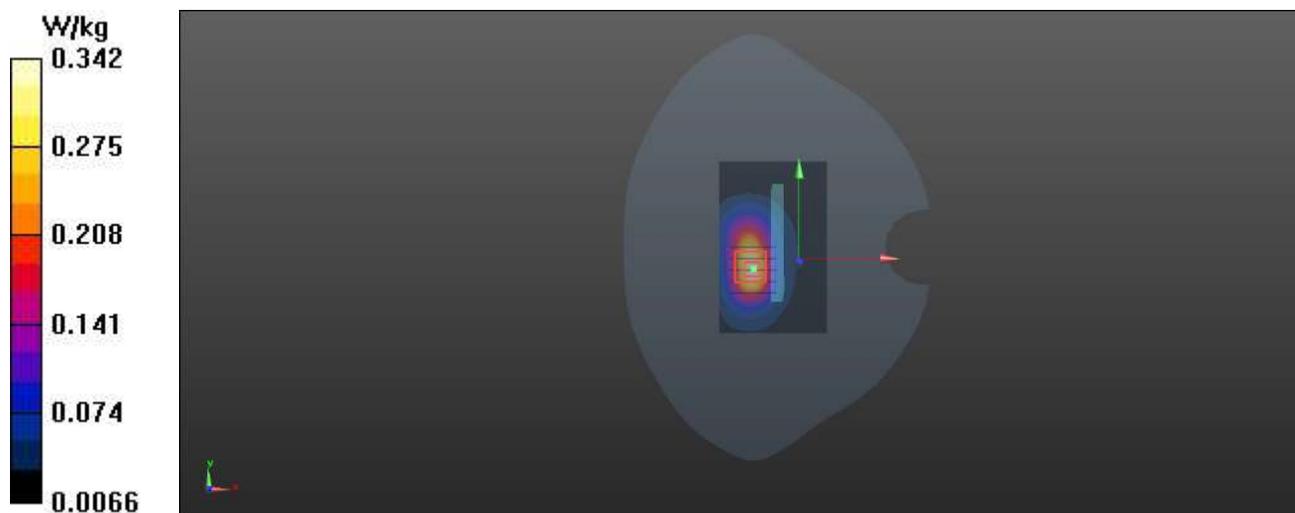

P06 802.11a_Top Side_0cm_Ch52

DUT: EUT

Communication System: UID 0, 802.11a; Frequency: 5260 MHz; Duty Cycle: 1:1

Medium: H5G Medium parameters used: $f = 5260$ MHz; $\sigma = 4.636$ S/m; $\epsilon_r = 37.125$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(5.63, 6, 5.58) @ 5260 MHz; Calibrated: 2024/11/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2024/10/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (61x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 3.64 W/kg

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 10.34 V/m; Power Drift = -0.16 dB


Peak SAR (extrapolated) = 8.20 W/kg

SAR(1 g) = 1.19 W/kg; SAR(10 g) = 0.361 W/kg

Smallest distance from peaks to all points 3 dB below = 4.8 mm

Ratio of SAR at M2 to SAR at M1 = 51.7%

Maximum value of SAR (measured) = 3.56 W/kg

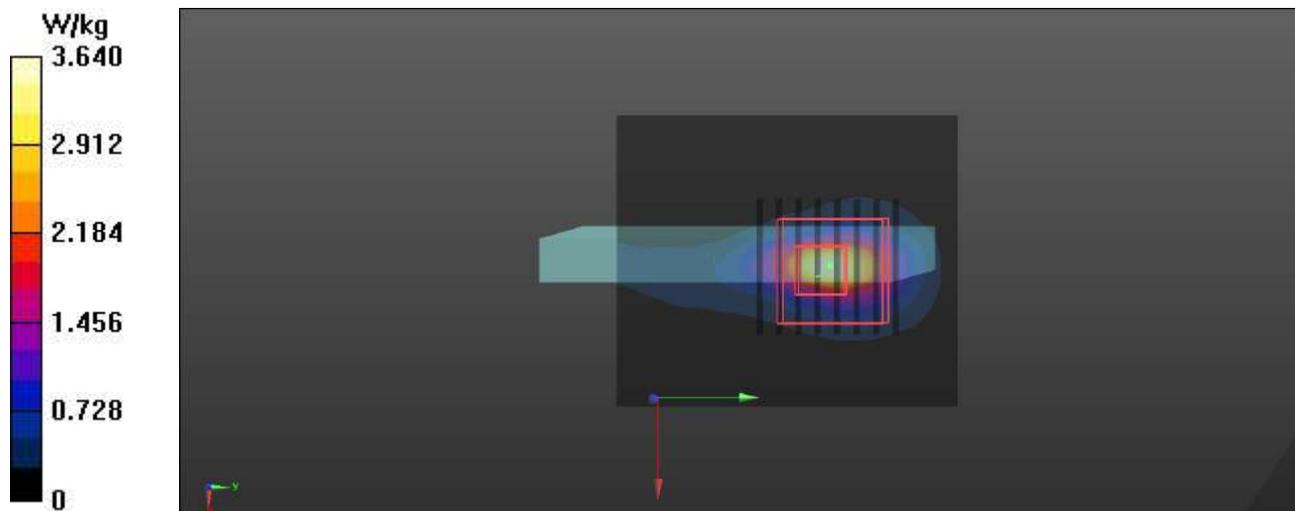

P07 802.11a_Right Side_0cm_Ch140

DUT: EUT

Communication System: UID 0, 802.11a; Frequency: 5700 MHz; Duty Cycle: 1:1

Medium: H5G Medium parameters used: $f = 5700$ MHz; $\sigma = 5.15$ S/m; $\epsilon_r = 36.342$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(5.26, 5.6, 5.22) @ 5700 MHz; Calibrated: 2024/11/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2024/10/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (61x71x1): Interpolated grid: dx=1.000 mm, dy=1.000 mm

Maximum value of SAR (interpolated) = 5.67 W/kg

Zoom Scan (8x8x7)/Cube 0: Measurement grid: dx=4mm, dy=4mm, dz=1.4mm

Reference Value = 1.717 V/m; Power Drift = -0.04 dB


Peak SAR (extrapolated) = 18.7 W/kg

SAR(1 g) = 1.92 W/kg; SAR(10 g) = 0.313 W/kg

Smallest distance from peaks to all points 3 dB below = 5.6 mm

Ratio of SAR at M2 to SAR at M1 = 52.7%

Maximum value of SAR (measured) = 6.86 W/kg

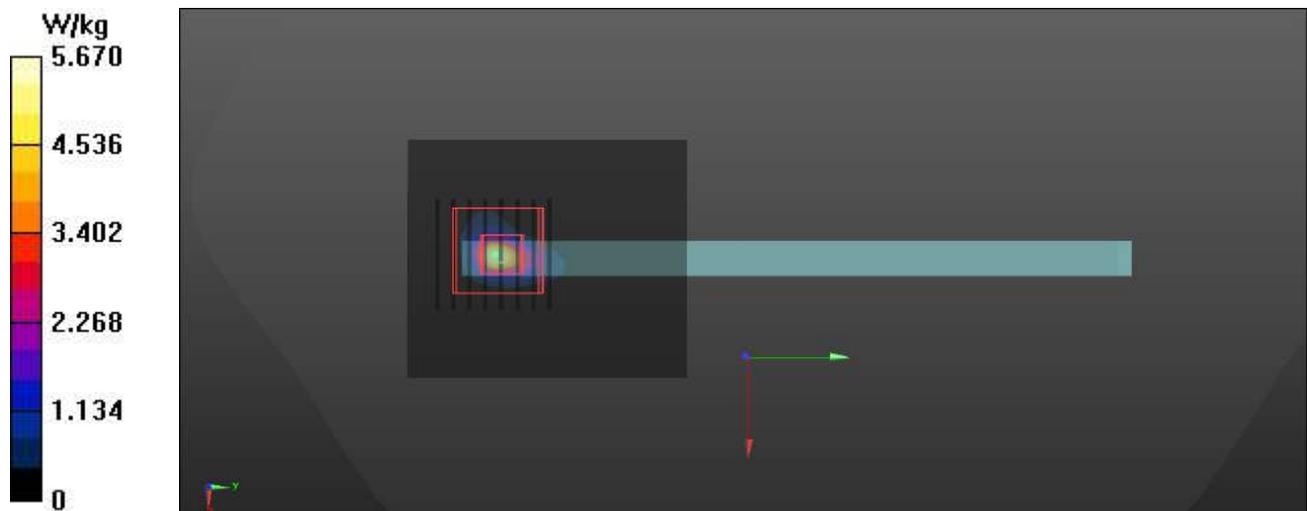

P08 802.11n_HT20_Rear Face_1cm_Ch165

DUT: EUT

Communication System: UID 0, 802.11n; Frequency: 5825 MHz; Duty Cycle: 1:1

Medium: H5G Medium parameters used: $f = 5825 \text{ MHz}$; $\sigma = 5.271 \text{ S/m}$; $\epsilon_r = 36.074$; $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:

- Probe: EX3DV4 - SN7506; ConvF(5.12, 5.45, 5.08) @ 5825 MHz; Calibrated: 2024/11/12
- Sensor-Surface: 1.4mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1557; Calibrated: 2024/10/8
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x71x1): Interpolated grid: $dx=1.000 \text{ mm}$, $dy=1.000 \text{ mm}$

Maximum value of SAR (interpolated) = 0.629 W/kg

Zoom Scan (8x8x7)/Cube 0: Measurement grid: $dx=4\text{mm}$, $dy=4\text{mm}$, $dz=1.4\text{mm}$

Reference Value = 0.9160 V/m; Power Drift = 0.00 dB

Peak SAR (extrapolated) = 1.21 W/kg

SAR(1 g) = 0.252 W/kg; SAR(10 g) = 0.089 W/kg

Smallest distance from peaks to all points 3 dB below = 8.6 mm

Ratio of SAR at M2 to SAR at M1 = 55.9%

Maximum value of SAR (measured) = 0.623 W/kg

