

## System Check\_H835

### DUT: Dipole 835 MHz


Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1  
Medium: H835 Medium parameters used:  $f = 835$  MHz;  $\sigma = 0.878$  mho/m;  $\epsilon_r = 40.6$ ;  $\rho = 1000$  kg/m<sup>3</sup>

#### DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.13, 6.13, 6.13); Calibrated: 2020/5/9
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2020/5/6
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

**Area Scan (51x101x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (interpolated) = 1.16 mW/g

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 10.1 V/m; Power Drift = -0.011 dB  
Peak SAR (extrapolated) = 0.146 W/kg  
**SAR(1 g) = 2.51 mW/g; SAR(10 g) = 1.58 mW/g**  
Maximum value of SAR (measured) = 2.18 mW/g

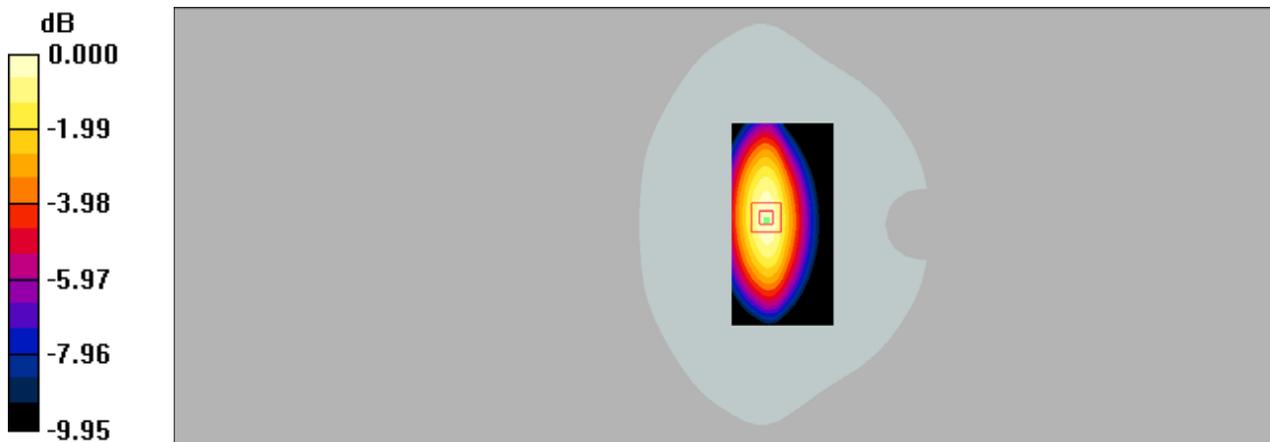

## System Check\_H1750

### DUT: Dipole 1750 MHz


Communication System: CW; Frequency: 1750 MHz; Duty Cycle: 1:1  
Medium: H1750 Medium parameters used:  $f = 1750$  MHz;  $\sigma = 1.38$  mho/m;  $\epsilon_r = 39.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

#### DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.38, 5.38, 5.38); Calibrated: 2020/5/9
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2020/5/6
- Phantom: SAM 2; Type: QD 000 P40 CB; Serial: TP-1376
- Postprocessing SW: SEMCAD, V1.8 Build 186

**Area Scan (51x71x1):** Measurement grid: dx=15mm, dy=15mm  
Maximum value of SAR (interpolated) = 4.76 mW/g

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 111.3 V/m; Power Drift = 0.002 dB  
Peak SAR (extrapolated) = 0.752 W/kg  
**SAR(1 g) = 8.8 mW/g; SAR(10 g) = 0.491 mW/g**  
Maximum value of SAR (measured) = 14.9 mW/g

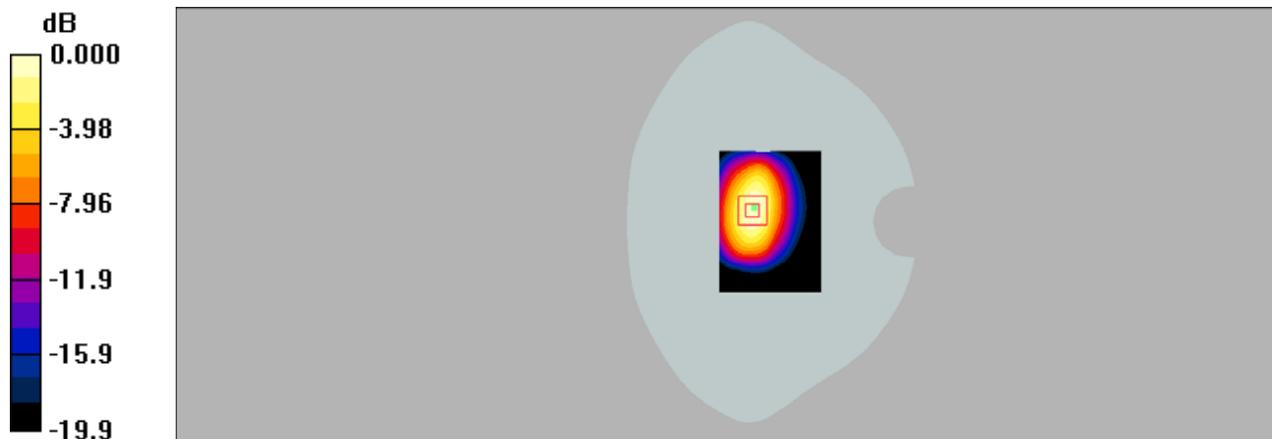

## System Check\_H1900

### DUT: Dipole 1900 MHz

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: H1900 Medium parameters used:  $f = 1900$  MHz;  $\sigma = 1.44$  mho/m;  $\epsilon_r = 41$ ;  $\rho = 1000$  kg/m<sup>3</sup>

#### DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.1, 5.1, 5.1); Calibrated: 2020/5/9
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2020/5/6
- Phantom: SAM 2; Type: QD 000 P40 CB; Serial: TP-1376
- Postprocessing SW: SEMCAD, V1.8 Build 186

**Area Scan (51x71x1):** Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 5.51 mW/g


**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 102.7 V/m; Power Drift = 0.015 dB

Peak SAR (extrapolated) = 0.880 W/kg

**SAR(1 g) = 9.70 mW/g; SAR(10 g) = 4.99 mW/g**

Maximum value of SAR (measured) = 15.63 mW/g

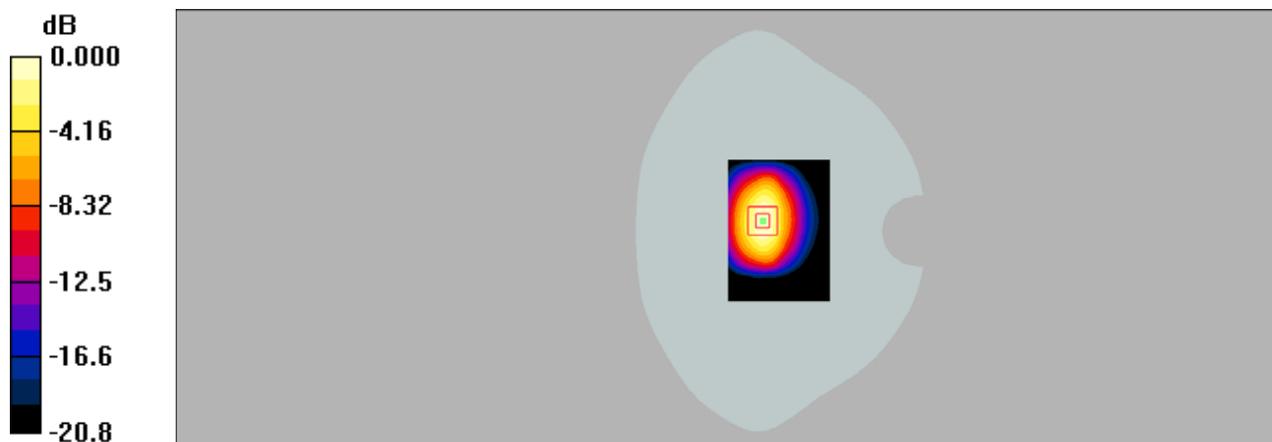

## System Check\_H2450

### DUT: Dipole 2450 MHz


Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1  
Medium: H2450 Medium parameters used:  $f = 2450$  MHz;  $\sigma = 1.8$  mho/m;  $\epsilon_r = 40.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

#### DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(4.61, 4.61, 4.61); Calibrated: 2020/5/9
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2020/5/6
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

**Area Scan (51x71x1):** Measurement grid: dx=12mm, dy=12mm  
Maximum value of SAR (interpolated) = 7.57 mW/g

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm  
Reference Value = 105.1 V/m; Power Drift = 0.005 dB  
Peak SAR (extrapolated) = 2.17 W/kg  
**SAR(1 g) = 12.6 mW/g; SAR(10 g) = 6.1 mW/g**  
Maximum value of SAR (measured) = 20.09 mW/g

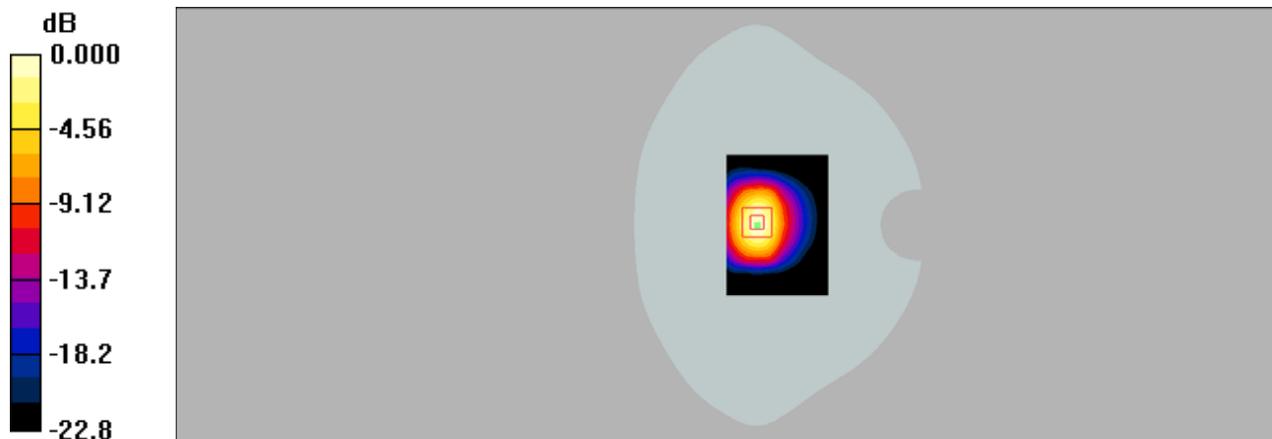

## System Check\_H2600

### DUT: Dipole 2600 MHz

Communication System: CW; Frequency: 2600 MHz; Duty Cycle: 1:1

Medium: H2600 Medium parameters used:  $f = 2600$  MHz;  $\sigma = 2.01$  mho/m;  $\epsilon_r = 38.3$ ;  $\rho = 1000$  kg/m<sup>3</sup>

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(4.51, 4.51, 4.51); Calibrated: 2020/5/9
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2020/5/6
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

**Area Scan (51x71x1):** Measurement grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 6.49 mW/g

**Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 108.4 V/m; Power Drift = 0.003 dB

Peak SAR (extrapolated) = 30.7 W/kg

**SAR(1 g) = 14.04 mW/g; SAR(10 g) = 0.629 mW/g**

Maximum value of SAR (measured) = 24.0 mW/g

