



No. 23T04Z80629-021



No. 23T04Z80629-021

For

BLU Products, Inc.

Smart phone

Model name: B160V

With

Hardware Version: V1.0

Software Version: BLU_B160V_V14.0.01.01.01.03_FSec

FCC ID: YHLBLUB160V

Note:

The test results in this test report relate only to the devices specified in this report. This report shall not be reproduced except in full without the written approval of CTTL.

Test Laboratory:

CTTL, Telecommunication Technology Labs, CAICT

No. 52, Huayuan North Road, Haidian District, Beijing, P. R. China 100191.

Tel: +86(0)10-62304633-2512, Fax: +86(0)10-62304633-2504

Email: cttl_terminals@caict.ac.cn, website: www.caict.ac.cn


©Copyright. All rights reserved by CTTL.




Picture 1: Constituents of the sample

Test positions for head:

The Head SAR is tested at the following 4 test positions:

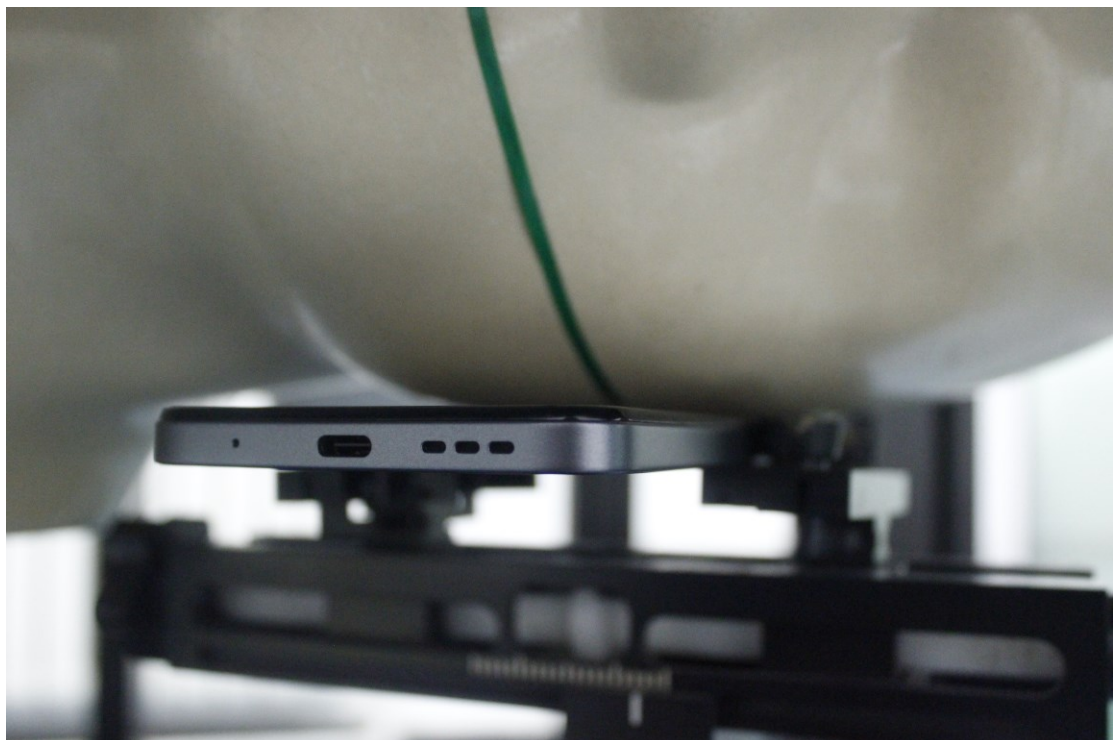

Picture 2: Left Head Touch Cheek Position

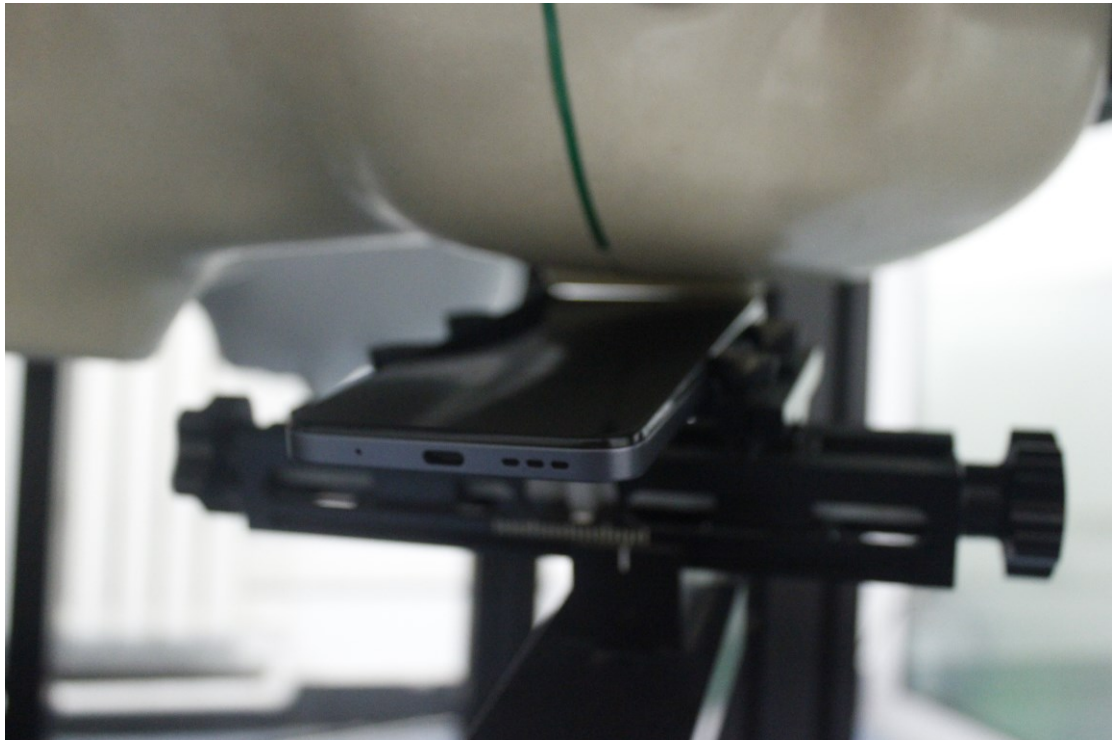

Picture 3: Left Head Tilt 15° Position




Picture 4: Right Head Touch Cheek Position




Picture 5: Right Head Tilt 15° Position

Test positions for body:

The Body SAR is tested at the following 10 test positions all with the distance =10/15/0mm between the EUT and the phantom bottom:

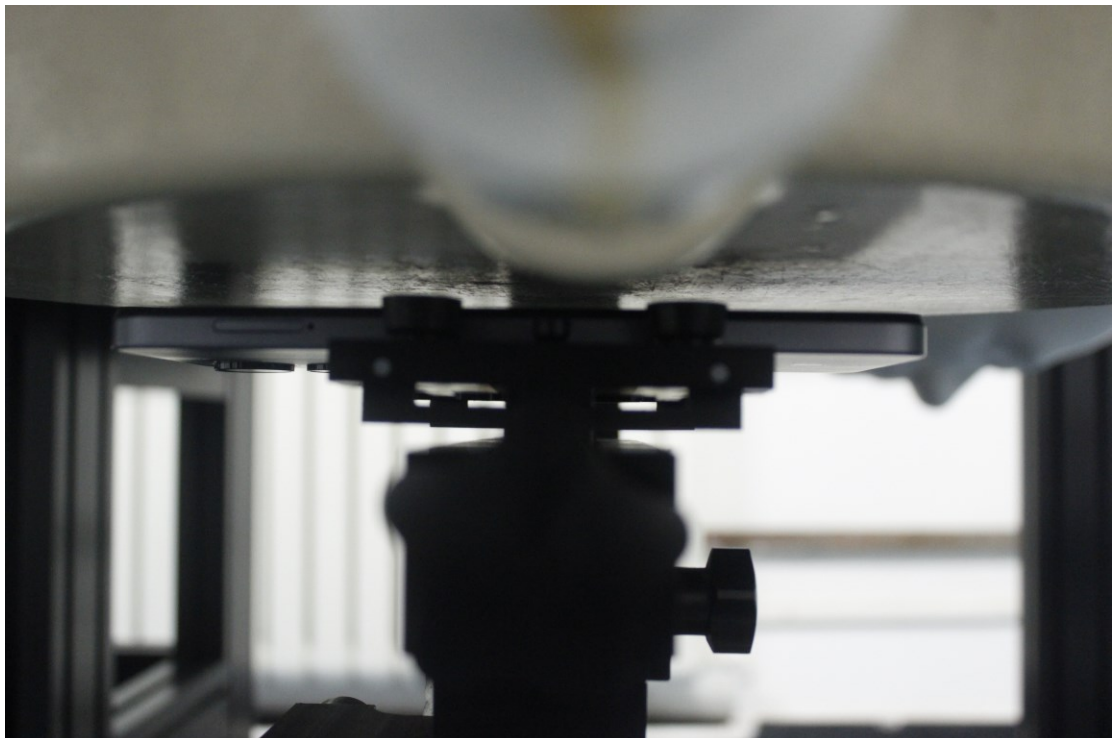


Picture 6: Front 10mm

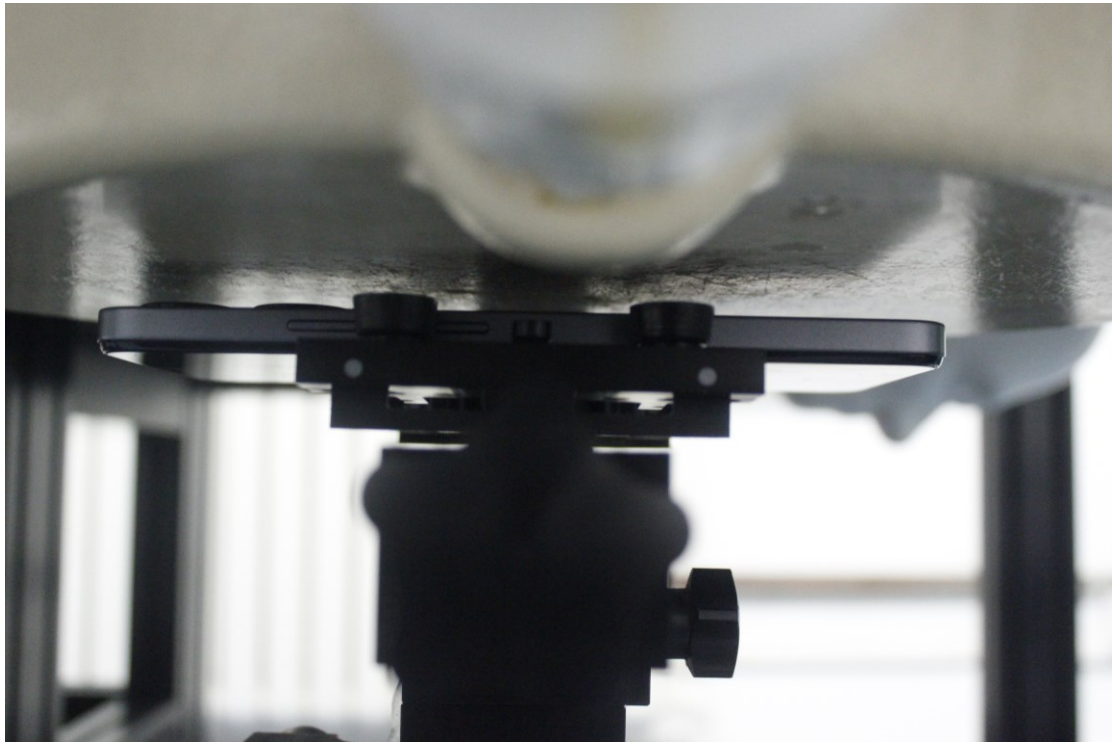

Picture 7: Rear 10mm




Picture 8: Left 10mm

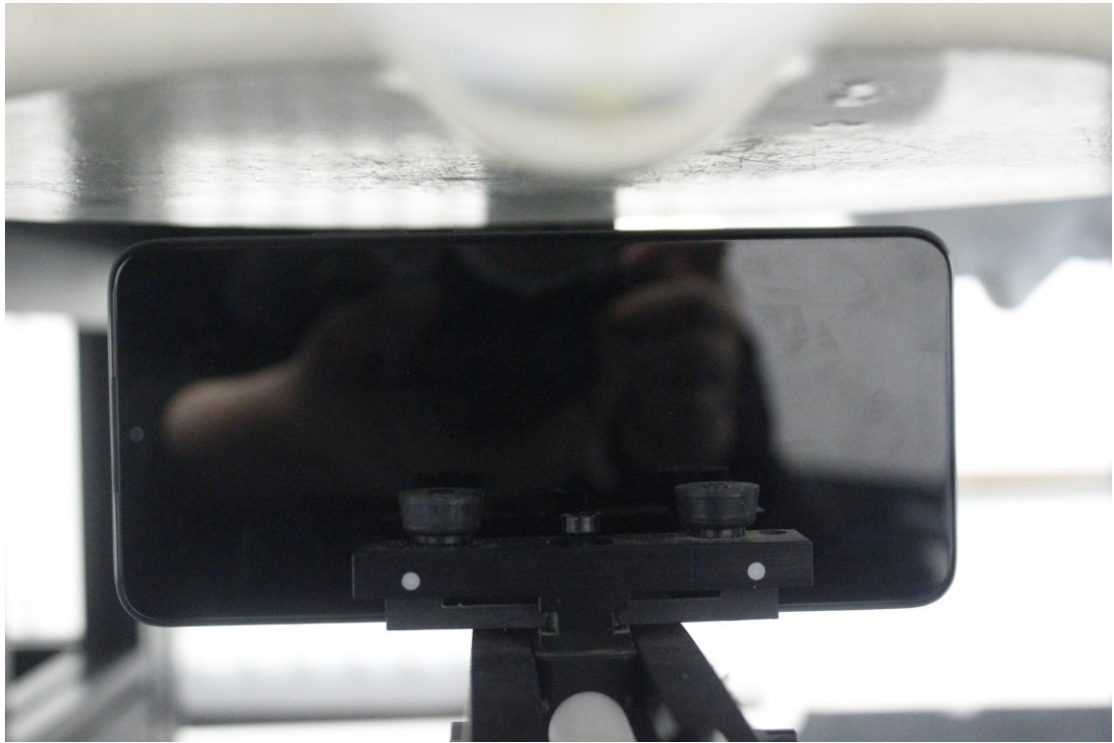


Picture 9: Right 10mm




Picture 10: Top 10mm

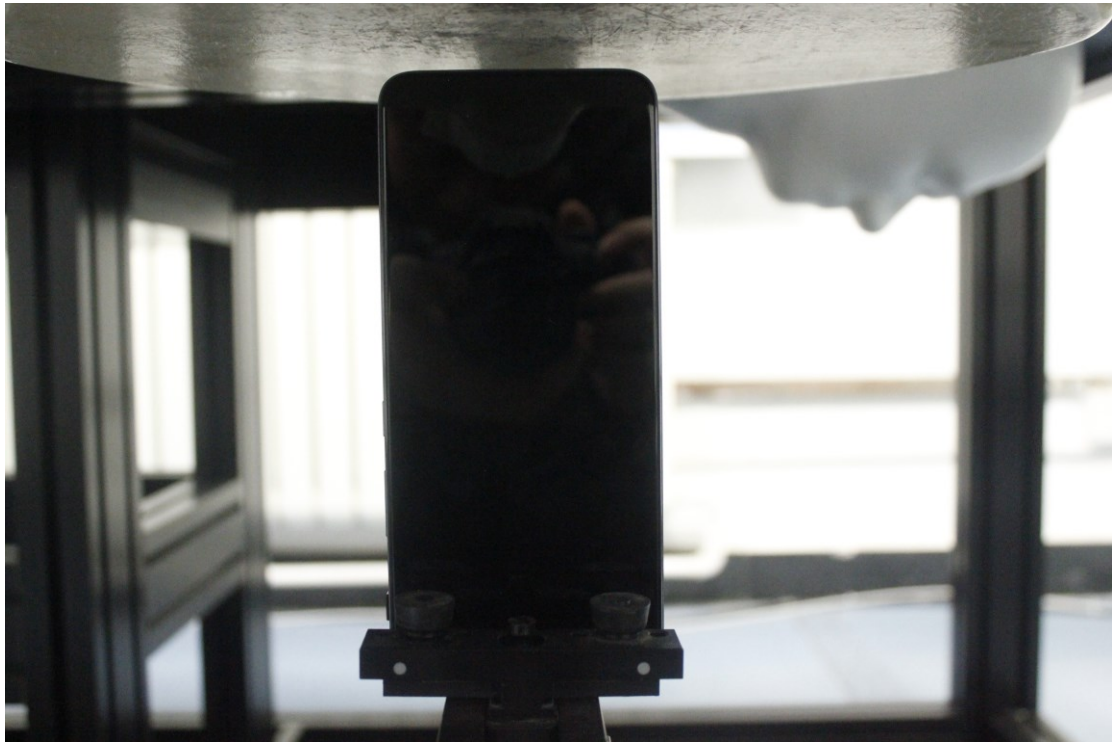


Picture 11: Bottom 10mm

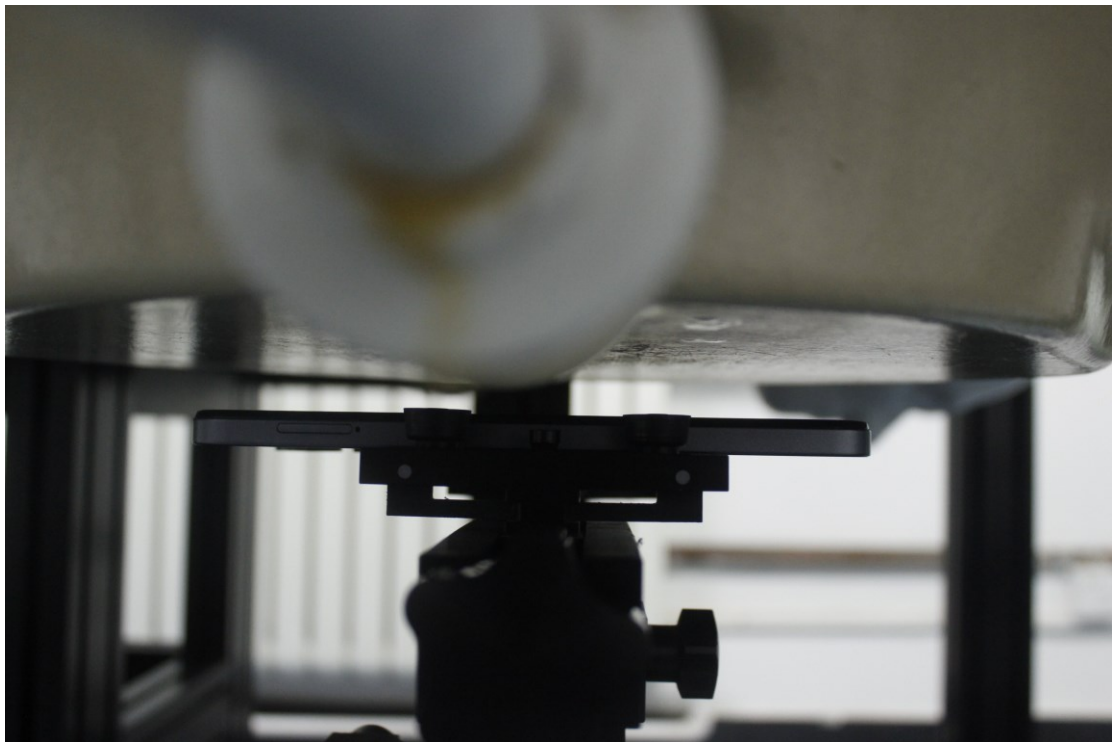


Picture 12: Front 15mm

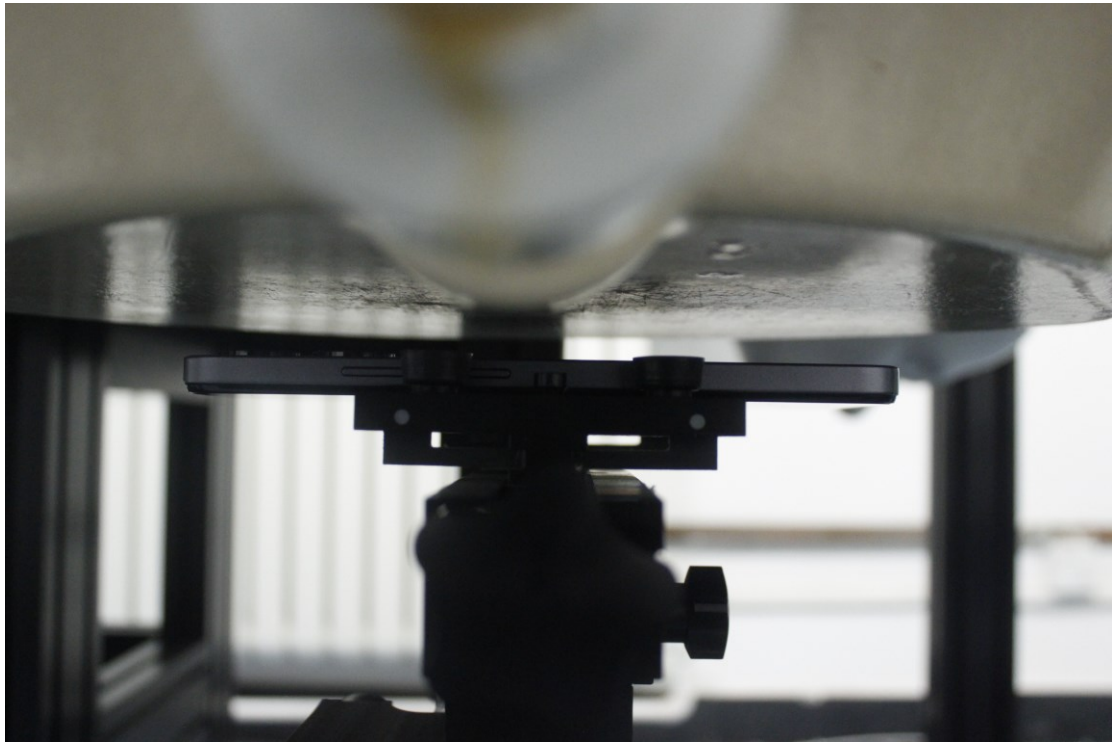


Picture 13: Rear 15mm

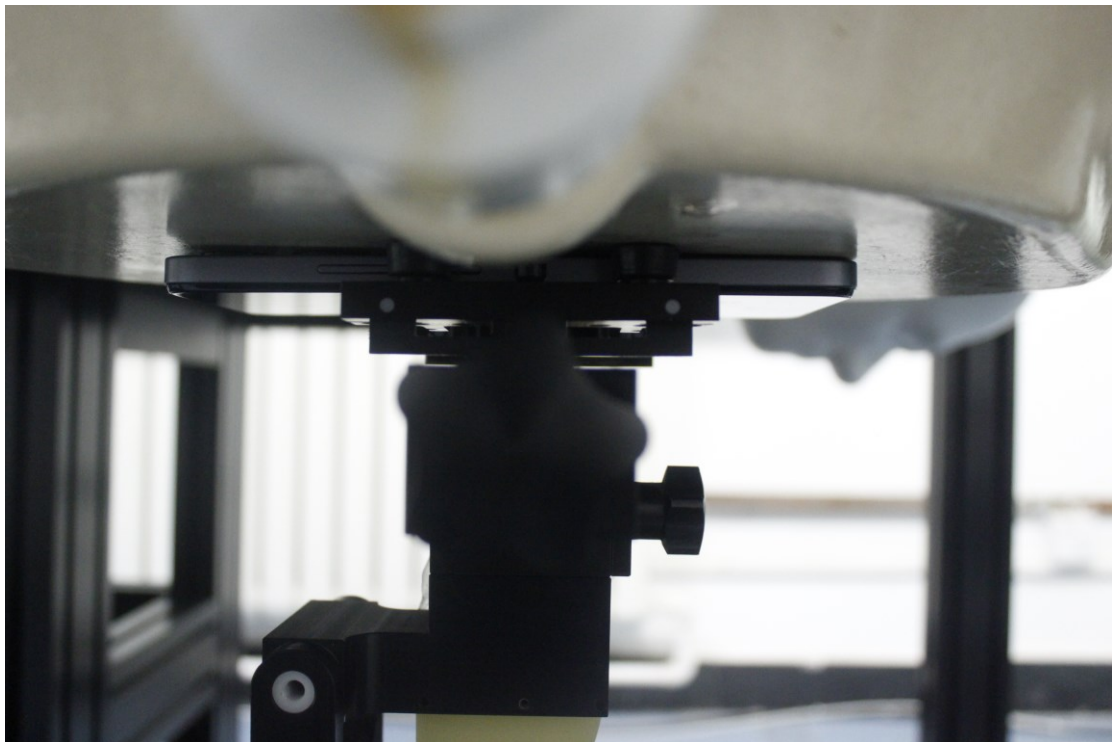

Picture 14: Rear 0mm

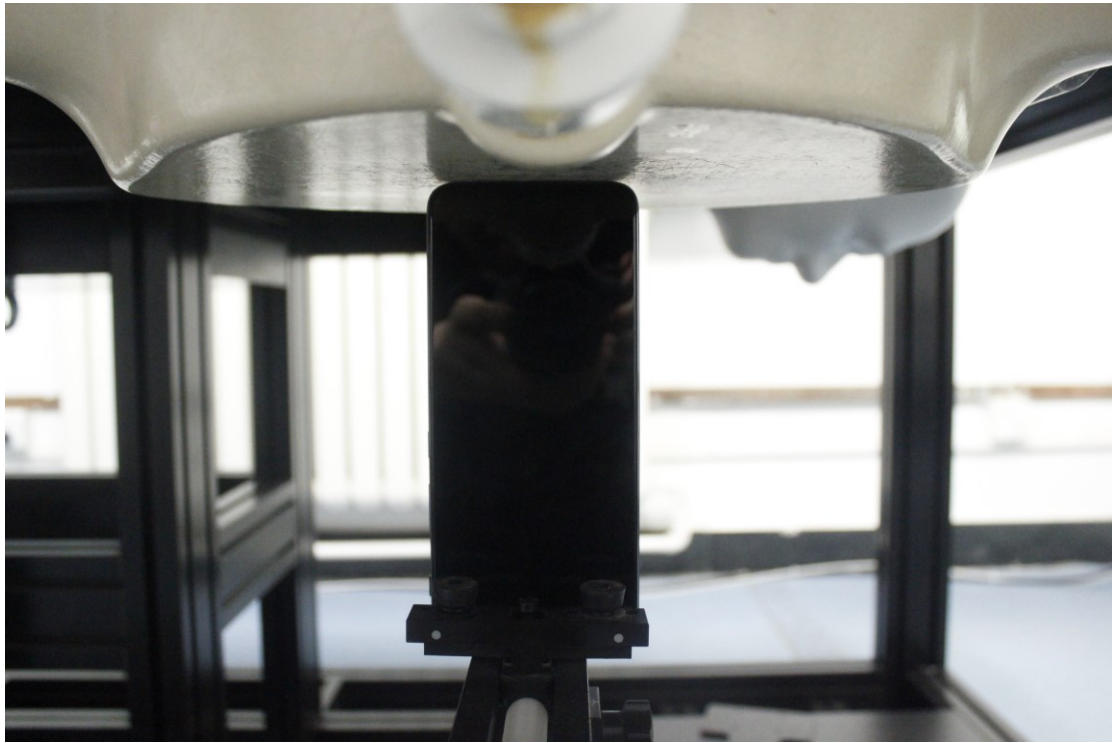

Picture 15: Bottom 0mm

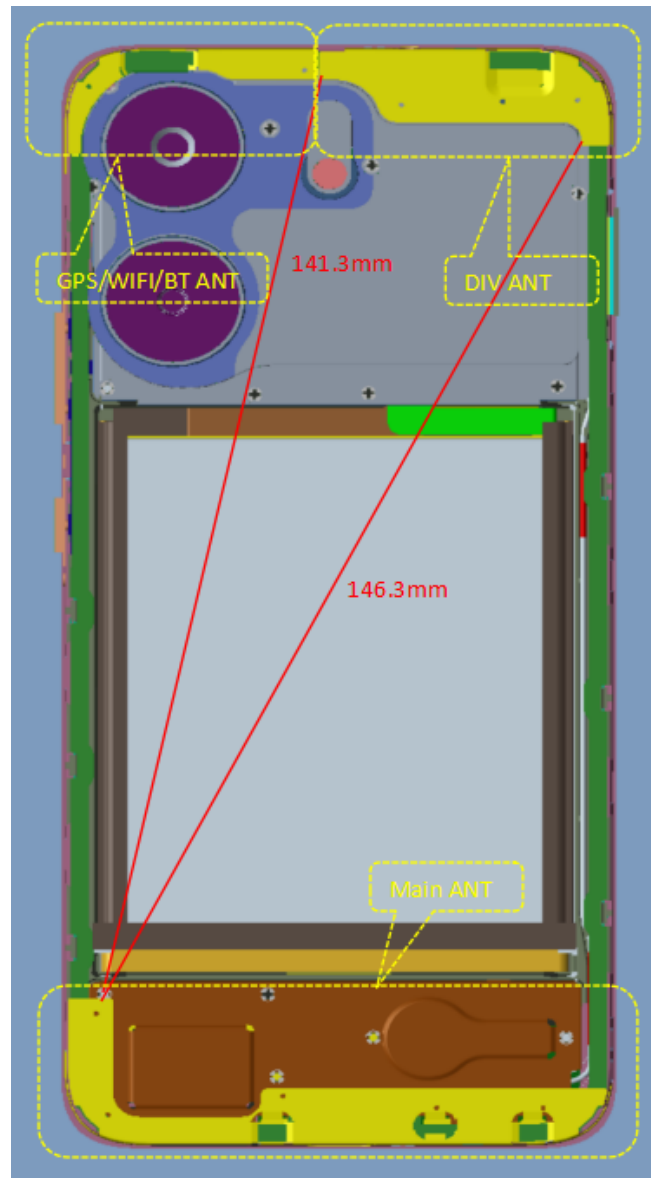

Picture 16: Antenna Locations