

RF TEST REPORT



Report No.: 17070456-FCC-R2-V1

Supersede Report No.: N/A

Applicant	BLU Products, Inc.	
Product Name	Mobile Phone	
Model No.	BLU C5	
Serial No.	N/A	
Test Standard	FCC Part 15.247: 2016, ANSI C63.10: 2013	
Test Date	July 27 to August 13, 2017	
Issue Date	August 21, 2017	
Test Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail	
Equipment complied with the specification	<input checked="" type="checkbox"/>	
Equipment did not comply with the specification	<input type="checkbox"/>	
<i>Loren Luo</i>	<i>David Huang</i>	
Loren Luo Test Engineer	David Huang Checked By	
<p>This test report may be reproduced in full only</p> <p>Test result presented in this test report is applicable to the tested sample only</p>		

Issued by:

SIEMIC (SHENZHEN-CHINA) LABORATORIES

Zone A, Floor 1, Building 2 Wan Ye Long Technology Park

South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108

Phone: +86 0755 2601 4629801 Email: China@siemic.com.cn

Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC, RF/Wireless, SAR, Telecom
Canada	EMC, RF/Wireless, SAR, Telecom
Taiwan	EMC, RF, Telecom, SAR, Safety
Hong Kong	RF/Wireless, SAR, Telecom
Australia	EMC, RF, Telecom, SAR, Safety
Korea	EMI, EMS, RF, SAR, Telecom, Safety
Japan	EMI, RF/Wireless, SAR, Telecom
Singapore	EMC, RF, SAR, Telecom
Europe	EMC, RF, SAR, Telecom, Safety

Test Report	17070456-FCC-R2-V1
Page	3 of 67

This page has been left blank intentionally.

CONTENTS

1. REPORT REVISION HISTORY	5
2. CUSTOMER INFORMATION.....	5
3. TEST SITE INFORMATION	5
4. EQUIPMENT UNDER TEST (EUT) INFORMATION	7
5. TEST SUMMARY	9
6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS.....	10
6.1 ANTENNA REQUIREMENT	10
6.2 CHANNEL SEPARATION.....	11
6.3 20DB BANDWIDTH	15
6.4 PEAK OUTPUT POWER	19
6.5 NUMBER OF HOPPING CHANNEL	23
6.6 TIME OF OCCUPANCY (DWELL TIME).....	25
6.7 BAND EDGE & RESTRICTED BAND	29
6.8 AC POWER LINE CONDUCTED EMISSIONS.....	37
6.9 RADIATED EMISSIONS & RESTRICTED BAND.....	43
ANNEX A. TEST INSTRUMENT.....	50
ANNEX B. EUT AND TEST SETUP PHOTOGRAPHS.....	51
ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT.....	62
ANNEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST	66
ANNEX E. DECLARATION OF SIMILARITY	67

1. Report Revision History

Report No.	Report Version	Description	Issue Date
17070456-FCC-R2	NONE	Original	August 14, 2017
17070456-FCC-R2-V1	V1	P8 Changed the GPRS/EGPRS Multi-slot class data	August 21, 2017

2. Customer information

Applicant Name	BLU Products, Inc.
Applicant Add	10814 NW 33rd St # 100 Doral, FL 33172
Manufacturer	BLU Products, Inc.
Manufacturer Add	10814 NW 33rd St # 100 Doral, FL 33172

3. Test site information

Test Lab A:

Lab performing tests	SIEMIC (Shenzhen-China) LABORATORIES
Lab Address	Zone A, Floor 1, Building 2 Wan Ye Long Technology Park South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108
FCC Test Site No.	718246
IC Test Site No.	4842E-1
Test Software	Radiated Emission Program-To Shenzhen v2.0

Test Lab B:

Lab performing tests	SIEMIC (Nanjing-China) Laboratories
Lab Address	2-1 Longcang Avenue Yuhua Economic and Technology Development Park, Nanjing, China
FCC Test Site No.	986914
IC Test Site No.	4842B-1
Test Software	EZ_EMG(ver.lcp-03A1)

Test Report	17070456-FCC-R2-V1
Page	6 of 67

Note: We just perform Radiated Spurious Emission above 18GHz in the test Lab. B.

4. Equipment under Test (EUT) Information

Description of EUT:	Mobile Phone
Main Model:	BLU C5
Serial Model:	N/A
Date EUT received:	July 26, 2017
Test Date(s):	July 27 to August 13, 2017
Equipment Category :	DSS
Antenna Gain:	GSM850: -2.0dBi PCS1900: -1.2dBi UMTS-FDD Band V: -2.0dBi UMTS-FDD Band IV: -1.5dBi UMTS-FDD Band II: -2.0dBi WIFI: 0.5dBi Bluetooth/BLE:0.5dBi GPS: 0.5dBi
Antenna Type:	PIFA antenna
Type of Modulation:	GSM / GPRS: GMSK EGPRS: GMSK,8PSK UMTS-FDD: QPSK 802.11b/g/n: DSSS, OFDM Bluetooth: GFSK, π /4DQPSK, 8DPSK BLE: GFSK GPS:BPSK
RF Operating Frequency (ies):	GSM850 TX: 824.2 ~ 848.8 MHz; RX: 869.2 ~ 893.8 MHz PCS1900 TX: 1850.2 ~ 1909.8 MHz; RX: 1930.2 ~ 1989.8 MHz UMTS-FDD Band V TX: 826.4 ~ 846.6 MHz; RX: 871.4 ~ 891.6 MHz UMTS-FDD Band IV TX:1712.4 ~ 1752.6 MHz; RX : 2112.4 ~ 2152.6 MHz UMTS-FDD Band II TX:1852.4 ~ 1907.6 MHz;

RX: 1932.4 ~ 1987.6 MHz

WIFI: 802.11b/g/n(20M): 2412-2462 MHz

WIFI: 802.11n(40M): 2422-2452 MHz

Bluetooth& BLE: 2402-2480 MHz

GPS: 1575.42 MHz

Max. Output Power: -1.856dBm

GSM 850: 124CH

PCS1900: 299CH

UMTS-FDD Band V: 102CH

UMTS-FDD Band IV: 202CH

Number of Channels: UMTS-FDD Band II: 277CH

WIFI :802.11b/g/n(20M): 11CH

WIFI :802.11n(40M): 7CH

Bluetooth: 79CH

BLE: 40CH

GPS:1CH

Port: USB Port, Earphone Port

Adapter:

Model: US-WW-1001

Input: AC100-240V~50/60Hz,0.2A

Input Power: Output: DC 5.0V,1000mA

Battery:

Model: C775840200L

Spec: 3.8V, 2000mAh, 7.60Wh

Trade Name : BLU

GPRS/ EGPRS Multi-slot class 8/10/11/12

FCC ID: YHLBLUC5

5. Test Summary

The product was tested in accordance with the following specifications.

All testing has been performed according to below product classification:

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.247(a)(1)	Channel Separation	Compliance
§15.247(a)(1)	20 dB Bandwidth	Compliance
§15.247(b)(1)	Peak Output Power	Compliance
§15.247(a)(1)(iii)	Number of Hopping Channel	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(d)	Band Edge& Restricted Band	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Radiated Emissions& Restricted Band	Compliance

Measurement Uncertainty

Emissions		
Test Item	Description	Uncertainty
Band Edge& Restricted Band and Radiated Emissions& Restricted Band	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	+5.6dB/-4.5dB
-	-	-

6. Measurements, Examination And Derived Results

6.1 Antenna Requirement

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has 2 antennas:

A permanently attached PIFA antenna for GSM/PCS/ UMTS-FDD Band V/ IV /II, the gain is -2.0dBi for GSM850/ UMTS-FDD Band V/ II, the gain is -1.2dBi for PCS1900, the gain is -1.5dBi for UMTS-FDD Band IV.

A permanently attached PIFA antenna for Bluetooth/BLE/WIFI/GPS, the gain is 0.5dBi for WIFI/Bluetooth/BLE/GPS.


The antenna meets up with the ANTENNA REQUIREMENT.

Result: Compliance.

6.2 Channel Separation

Temperature	25 °C
Relative Humidity	55%
Atmospheric Pressure	1012mbar
Test date :	July 10, 2017
Tested By :	Loren Luo

Requirement(s):

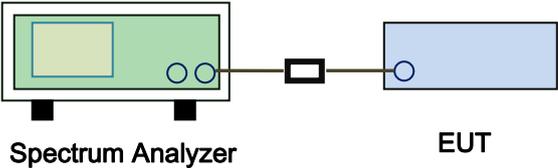Spec	Item	Requirement	Applicable
§ 15.247(a)(1)	a)	Channel Separation < 20dB BW and 20dB BW < 25KHz ; Channel Separation Limit=25KHz Chanel Separation < 20dB BW and 20dB BW > 25kHz ; Channel Separation Limit=2/3 20dB BW	<input checked="" type="checkbox"/>
Test Setup	 <p style="text-align: center;">Spectrum Analyzer EUT</p>		
Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines. Use the following spectrum analyzer settings:</p> <ul style="list-style-type: none"> - The EUT must have its hopping function enabled - Span = wide enough to capture the peaks of two adjacent channels - Resolution (or IF) Bandwidth (RBW) ≥ 1% of the span - Video (or Average) Bandwidth (VBW) ≥ RBW - Sweep = auto - Detector function = peak - Trace = max hold - Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section. Submit this plot. 		

Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data Yes N/A


Test Plot Yes (See below) N/A

Channel Separation measurement result

Type/ Modulation	CH	CH Frequency (MHz)	CH Separation (MHz)	Limit (MHz)	Result
CH Separation GFSK	Low Channel	2402	1.002	0.695	Pass
	Adjacency Channel	2403			
	Mid Channel	2440	1.002	0.689	Pass
	Adjacency Channel	2441			
	High Channel	2480	1.002	0.685	Pass
	Adjacency Channel	2479			
CH Separation $\pi/4$ DQPSK	Low Channel	2402	1.002	0.863	Pass
	Adjacency Channel	2403			
	Mid Channel	2440	1.002	0.861	Pass
	Adjacency Channel	2441			
	High Channel	2480	1.002	0.860	Pass
	Adjacency Channel	2479			
CH Separation 8DPSK	Low Channel	2402	1.002	0.861	Pass
	Adjacency Channel	2403			
	Mid Channel	2440	1.002	0.864	Pass
	Adjacency Channel	2441			
	High Channel	2480	1.002	0.861	Pass
	Adjacency Channel	2479			

Test Plots


Channel Separation measurement result

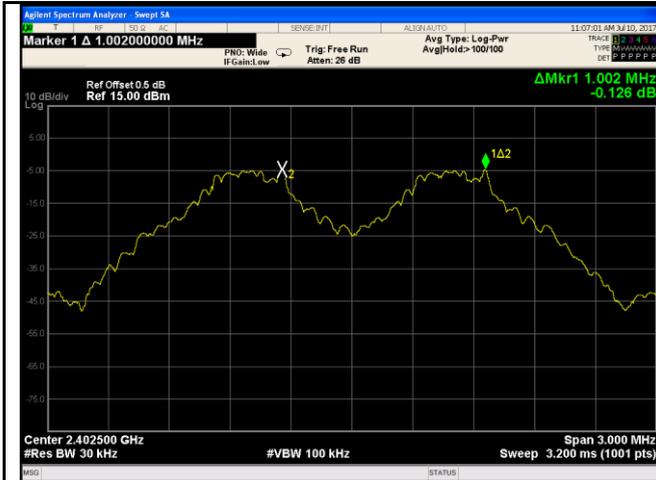


GFSK - Low Channel



GFSK - Middle Channel

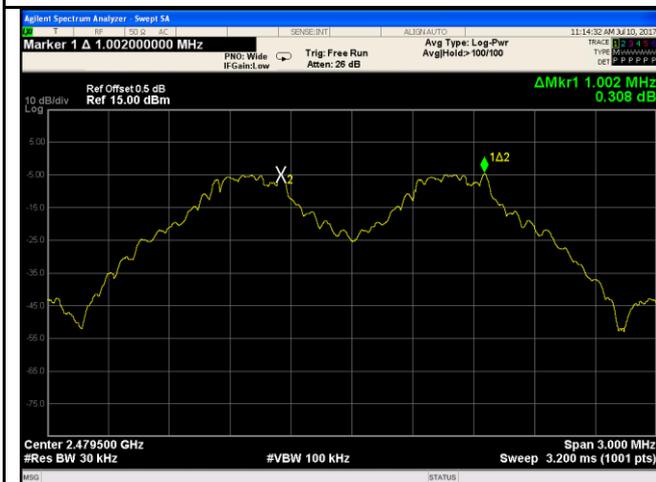

GFSK - High Channel

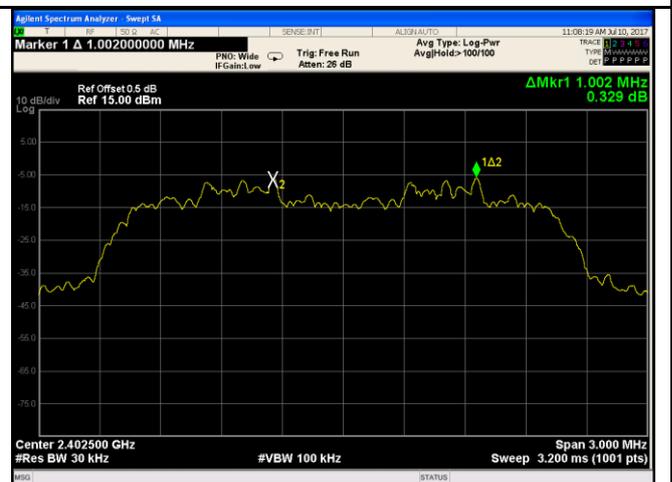

$\pi/4$ DPSK - Low Channel



$\pi/4$ DQPSK - Middle Channel



$\pi/4$ DQPSK - High Channel



8DPSK - Low Channel



8DPSK - Middle Channel



8DPSK - High Channel




6.3 20dB Bandwidth

Temperature	25 °C
Relative Humidity	55%
Atmospheric Pressure	1012mbar
Test date :	July 10, 2017
Tested By :	Loren Luo

Requirement(s):

Spec	Item	Requirement	Applicable
§15.247(a) (1)	a)	Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.	<input checked="" type="checkbox"/>

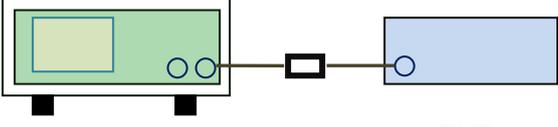Test Setup	 <p style="text-align: center;">Spectrum Analyzer EUT</p>
------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------

Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines. Use the following spectrum analyzer settings:</p> <ul style="list-style-type: none"> - Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel - RBW \geq 1% of the 20 dB bandwidth - VBW \geq RBW - Sweep = auto - Detector function = peak - Trace = max hold. - The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference
----------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

	marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data Yes N/A


Test Plot Yes (See below) N/A

Measurement result

Modulation	CH	CH Frequency (MHz)	20dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
GFSK	Low	2402	1.042	0.9077
	Mid	2441	1.034	0.8994
	High	2480	1.027	0.8940
$\pi/4$ DQPSK	Low	2402	1.295	1.1809
	Mid	2441	1.292	1.1738
	High	2480	1.290	1.1690
8-DPSK	Low	2402	1.292	1.1846
	Mid	2441	1.296	1.1803
	High	2480	1.292	1.1736

Test Plots

20dB Bandwidth measurement result

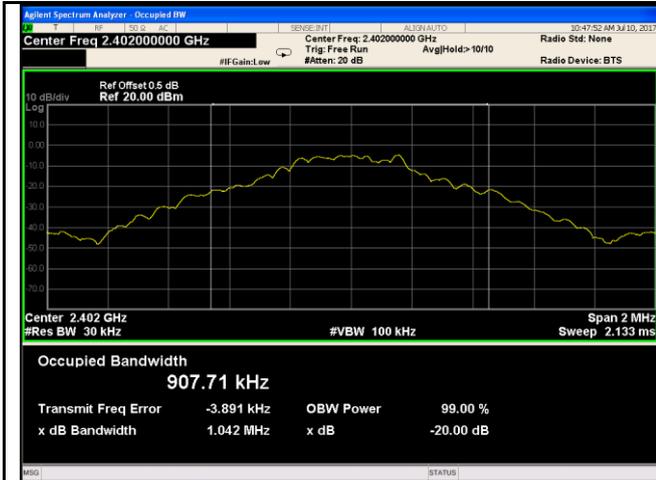

GFSK - Low Channel




GFSK - Middle Channel



GFSK - High Channel




$\pi/4$ DPSK - Low Channel

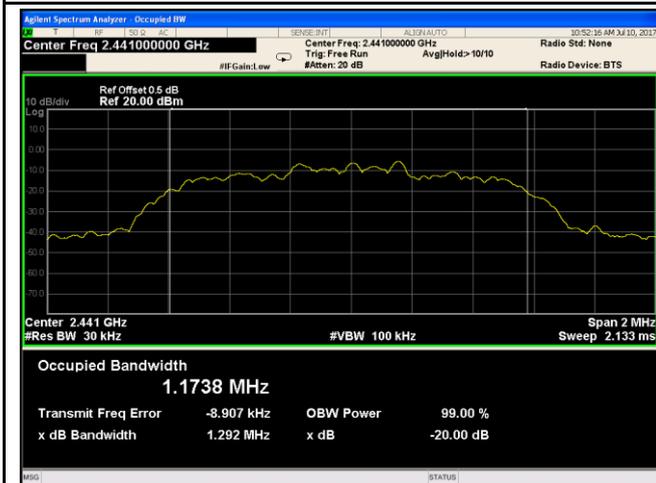

$\pi/4$ DQPSK - Middle Channel




$\pi/4$ DQPSK - High Channel

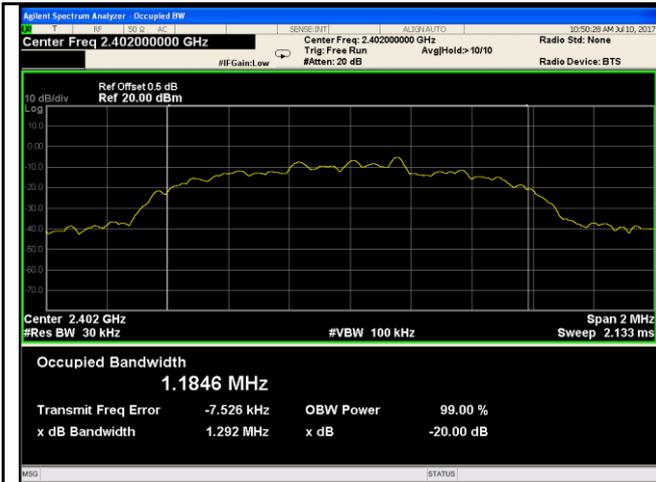

8DPSK - Low Channel



8DPSK - Middle Channel

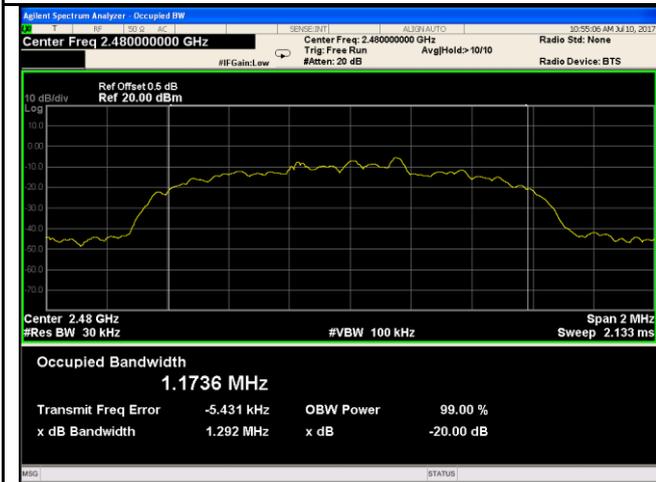


8DPSK - High Channel

6.4 Peak Output Power

Temperature	25 °C
Relative Humidity	55%
Atmospheric Pressure	1012mbar
Test date :	July 10, 2017
Tested By :	Loren Luo

Requirement(s):

Spec	Item	Requirement	Applicable
§15.247(b) (3)	a)	FHSS in 2400-2483.5MHz with ≥ 75 channels: ≤ 1 Watt	<input checked="" type="checkbox"/>
	b)	FHSS in 5725-5850MHz: ≤ 1 Watt	<input type="checkbox"/>
	c)	For all other FHSS in the 2400-2483.5MHz band: ≤ 0.125 Watt.	<input checked="" type="checkbox"/>
	d)	FHSS in 902-928MHz with ≥ 50 channels: ≤ 1 Watt	<input type="checkbox"/>
	e)	FHSS in 902-928MHz with ≥ 25 & < 50 channels: ≤ 0.25 Watt	<input type="checkbox"/>
	f)	DTS in 902-928MHz, 2400-2483.5MHz: ≤ 1 Watt	<input type="checkbox"/>

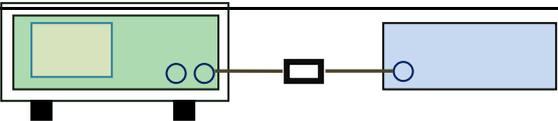Test Setup	 <p style="text-align: center;">Spectrum Analyzer EUT</p>
------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------

Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines.</p> <p><u>Use the following spectrum analyzer settings:</u></p> <ul style="list-style-type: none"> - Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel - RBW > the 20 dB bandwidth of the emission being measured - VBW \geq RBW - Sweep = auto - Detector function = peak - Trace = max hold - Allow the trace to stabilize.
----------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

	<ul style="list-style-type: none"> - Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power (see the note above regarding external attenuation and cable loss). The limit is specified in one of the subparagraphs of this Section. Submit this plot. A peak responding power meter may be used instead of a spectrum analyzer.
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail


Test Data Yes N/A
 Test Plot Yes (See below) N/A

Peak Output Power measurement result

Type	Modulation	CH	Frequency (MHz)	Conducted Power (dBm)	Limit (mW)	Result
Output power	GFSK	Low	2402	-2.234	125	Pass
		Mid	2441	-1.856	125	Pass
		High	2480	-2.188	125	Pass
	$\pi/4$ DQPSK	Low	2402	-2.345	125	Pass
		Mid	2441	-1.983	125	Pass
		High	2480	-2.386	125	Pass
	8-DPSK	Low	2402	-2.332	125	Pass
		Mid	2441	-1.939	125	Pass
		High	2480	-2.281	125	Pass

Test Plots

Output Power measurement result

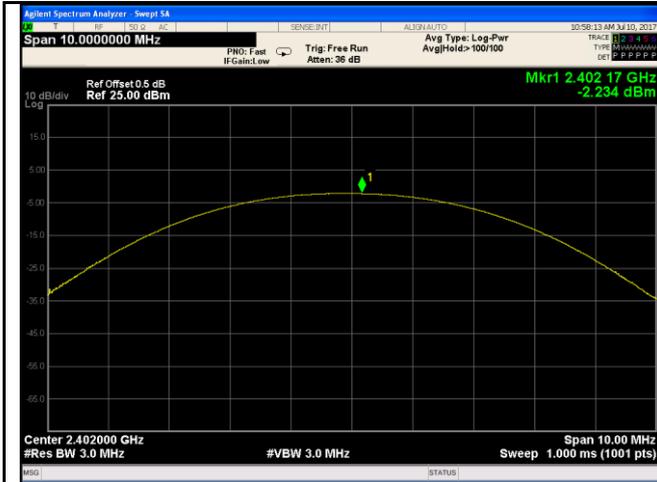


GFSK Output power - Low CH 2402




GFSK Output power - Mid CH 2441




GFSK Output power - High CH 2480

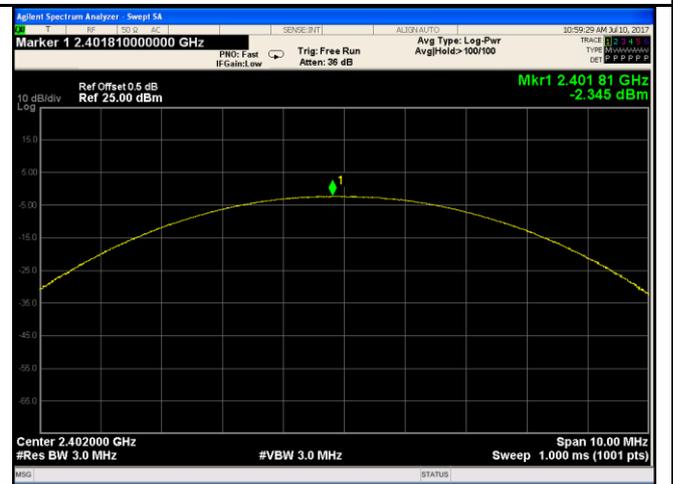

$\pi/4$ DQPSK Output power - Low CH 2402

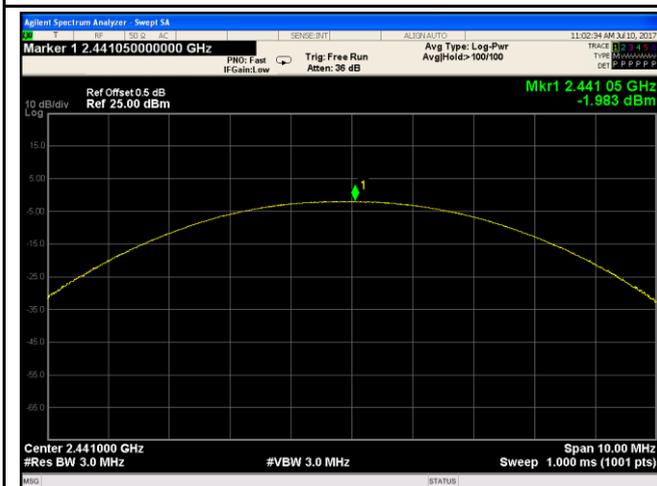


$\pi/4$ DQPSK Output power - Mid CH 2441

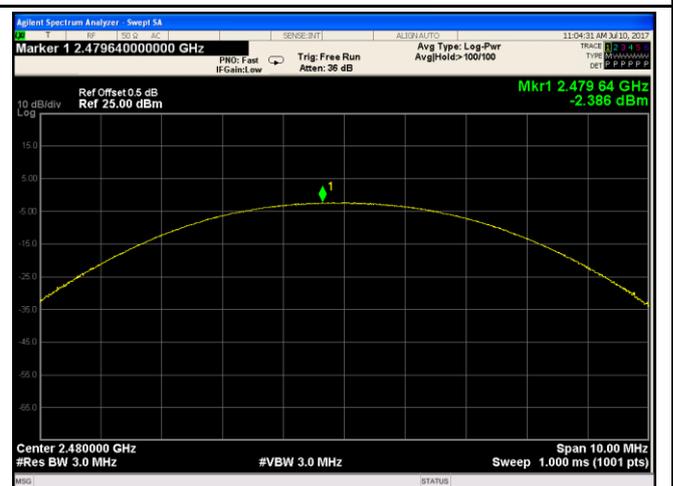


$\pi/4$ DQPSK Output power - High CH 2480



8DPSK Output power - Low CH 2402

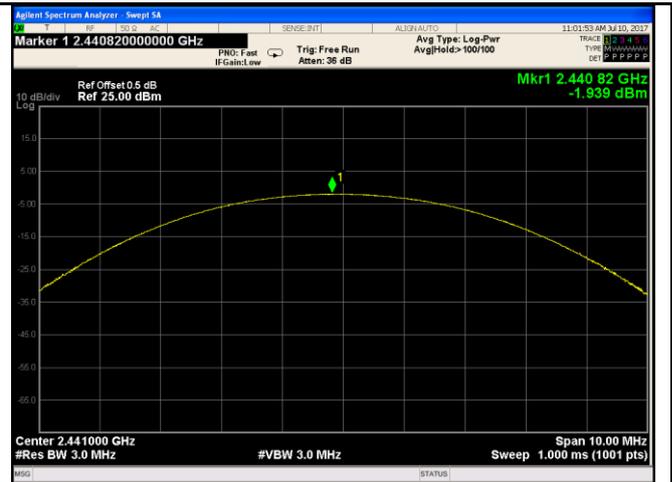

8DPSK Output power - Mid CH 2441

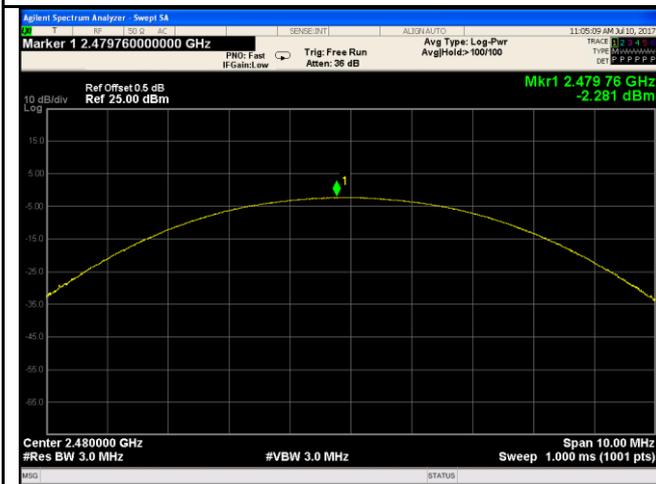


8DPSK Output power - High CH 2480



6.5 Number of Hopping Channel

Temperature	25 °C
Relative Humidity	55%
Atmospheric Pressure	1012mbar
Test date :	July 10, 2017
Tested By :	Loren Luo

Requirement(s):

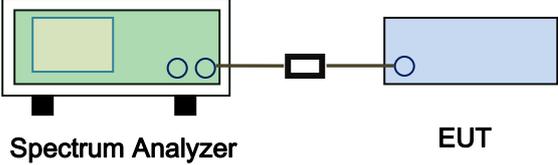Spec	Item	Requirement	Applicable
§15.247(a) (1)(iii)	a)	FHSS in 2400-2483.5MHz ≥ 15 channels	<input checked="" type="checkbox"/>
Test Setup	 <p style="text-align: center;">Spectrum Analyzer EUT</p>		
Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines. <u>Use the following spectrum analyzer settings:</u> The EUT must have its hopping function enabled.</p> <ul style="list-style-type: none"> - Span = the frequency band of operation - RBW ≥ 1% of the span - VBW ≥ RBW - Sweep = auto - Detector function = peak - Trace = max hold - Allow trace to fully stabilize. - It may prove necessary to break the span up to sections, in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s). 		
Remark			
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		


Test Data Yes N/A
 Test Plot Yes (See below) N/A

Number of Hopping Channel measurement result

Type	Modulation	Frequency Range	Number of Hopping Channel	Limit
Number of Hopping Channel	GFSK	2400-2483.5	79	15
	$\pi/4$ DQPSK	2400-2483.5	79	15
	8-DPSK	2400-2483.5	79	15

Test Plots


Number of Hopping Channels measurement result

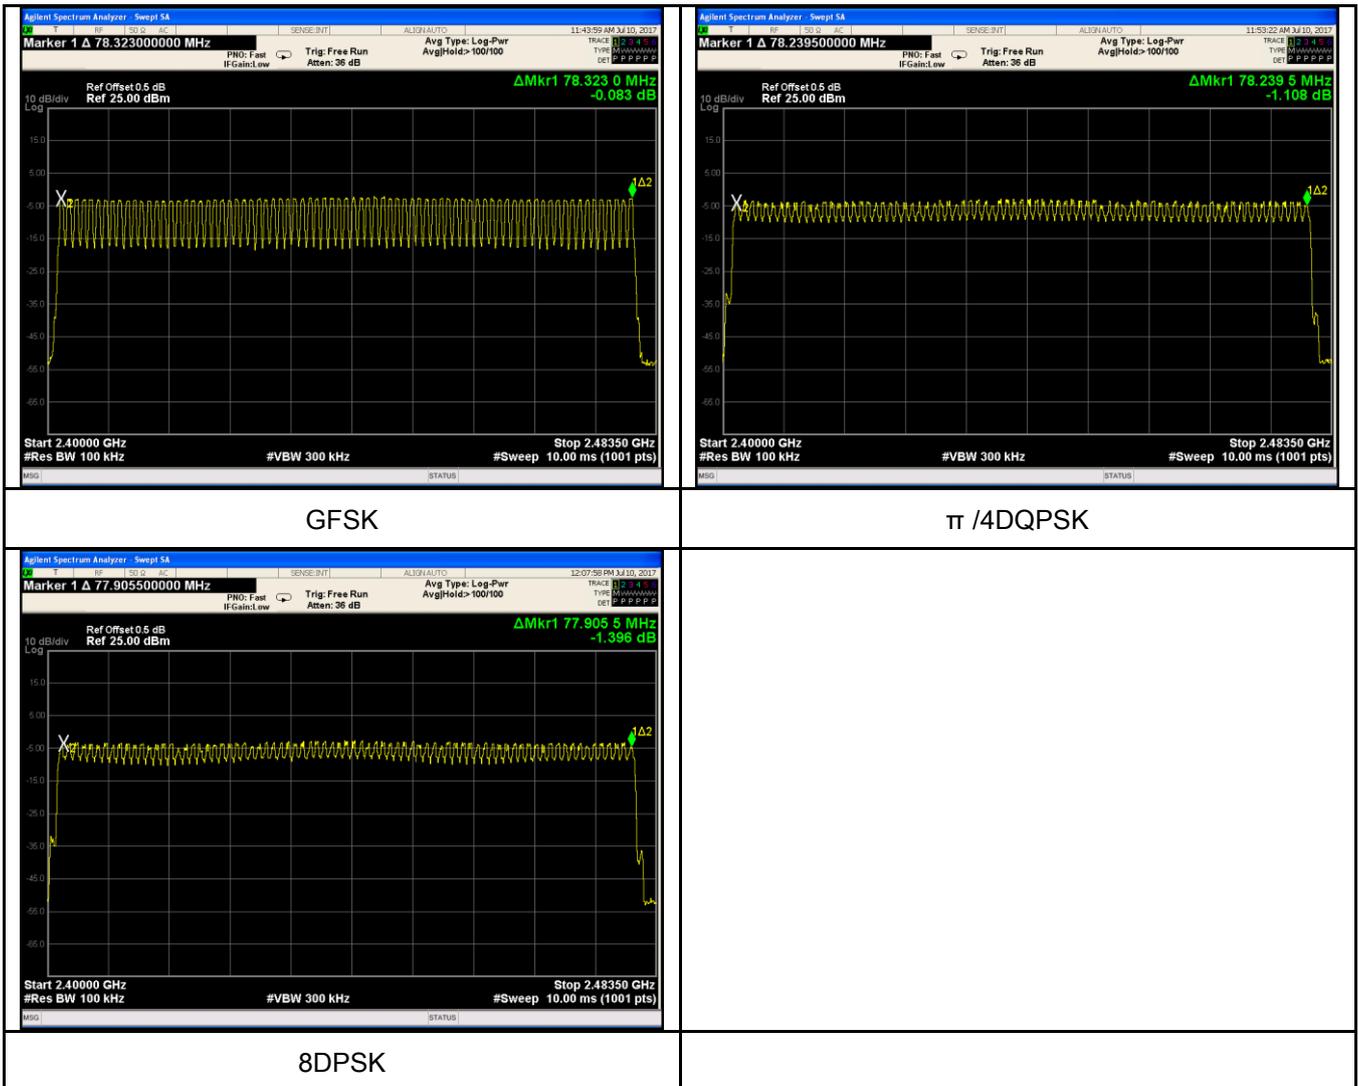

6.6 Time of Occupancy (Dwell Time)

Temperature	25 °C
Relative Humidity	55%
Atmospheric Pressure	1012mbar
Test date :	July 10, 2017
Tested By :	Loren Luo

Requirement(s):

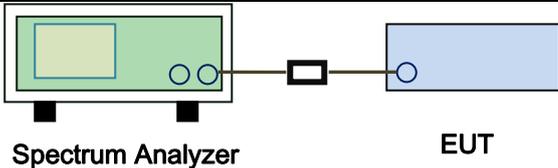Spec	Item	Requirement	Applicable
§15.247(a) (1)(iii)	a)	Dwell Time < 0.4s	<input checked="" type="checkbox"/>
Test Setup	 <p style="text-align: center;">Spectrum Analyzer EUT</p>		
Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines. <u>Use the following spectrum analyzer</u></p> <ul style="list-style-type: none"> - Span = zero span, centered on a hopping channel - RBW = 1 MHz - VBW ≥ RBW - Sweep = as necessary to capture the entire dwell time per hopping channel - Detector function = peak - Trace = max hold - use the marker-delta function to determine the dwell time 		
Remark			
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		


Test Data Yes N/A
 Test Plot Yes (See below) N/A


Dwell Time measurement result

Type	Modulation	CH	Pulse Width (ms)	Dwell Time (ms)	Limit (ms)	Result
Dwell Time	GFSK	Low	2.870	306.133	400	Pass
		Mid	2.860	305.067	400	Pass
		High	2.850	304.000	400	Pass
	π /4 DQPSK	Low	2.870	306.133	400	Pass
		Mid	2.870	306.133	400	Pass
		High	2.870	306.133	400	Pass
	8-DPSK	Low	2.870	306.133	400	Pass
		Mid	2.860	305.067	400	Pass
		High	2.880	307.200	400	Pass
Note: Dwell time=Pulse Time (ms) × (1600 ÷ 6 ÷ 79) ×31.6						

Test Plots

Dwell Time measurement result

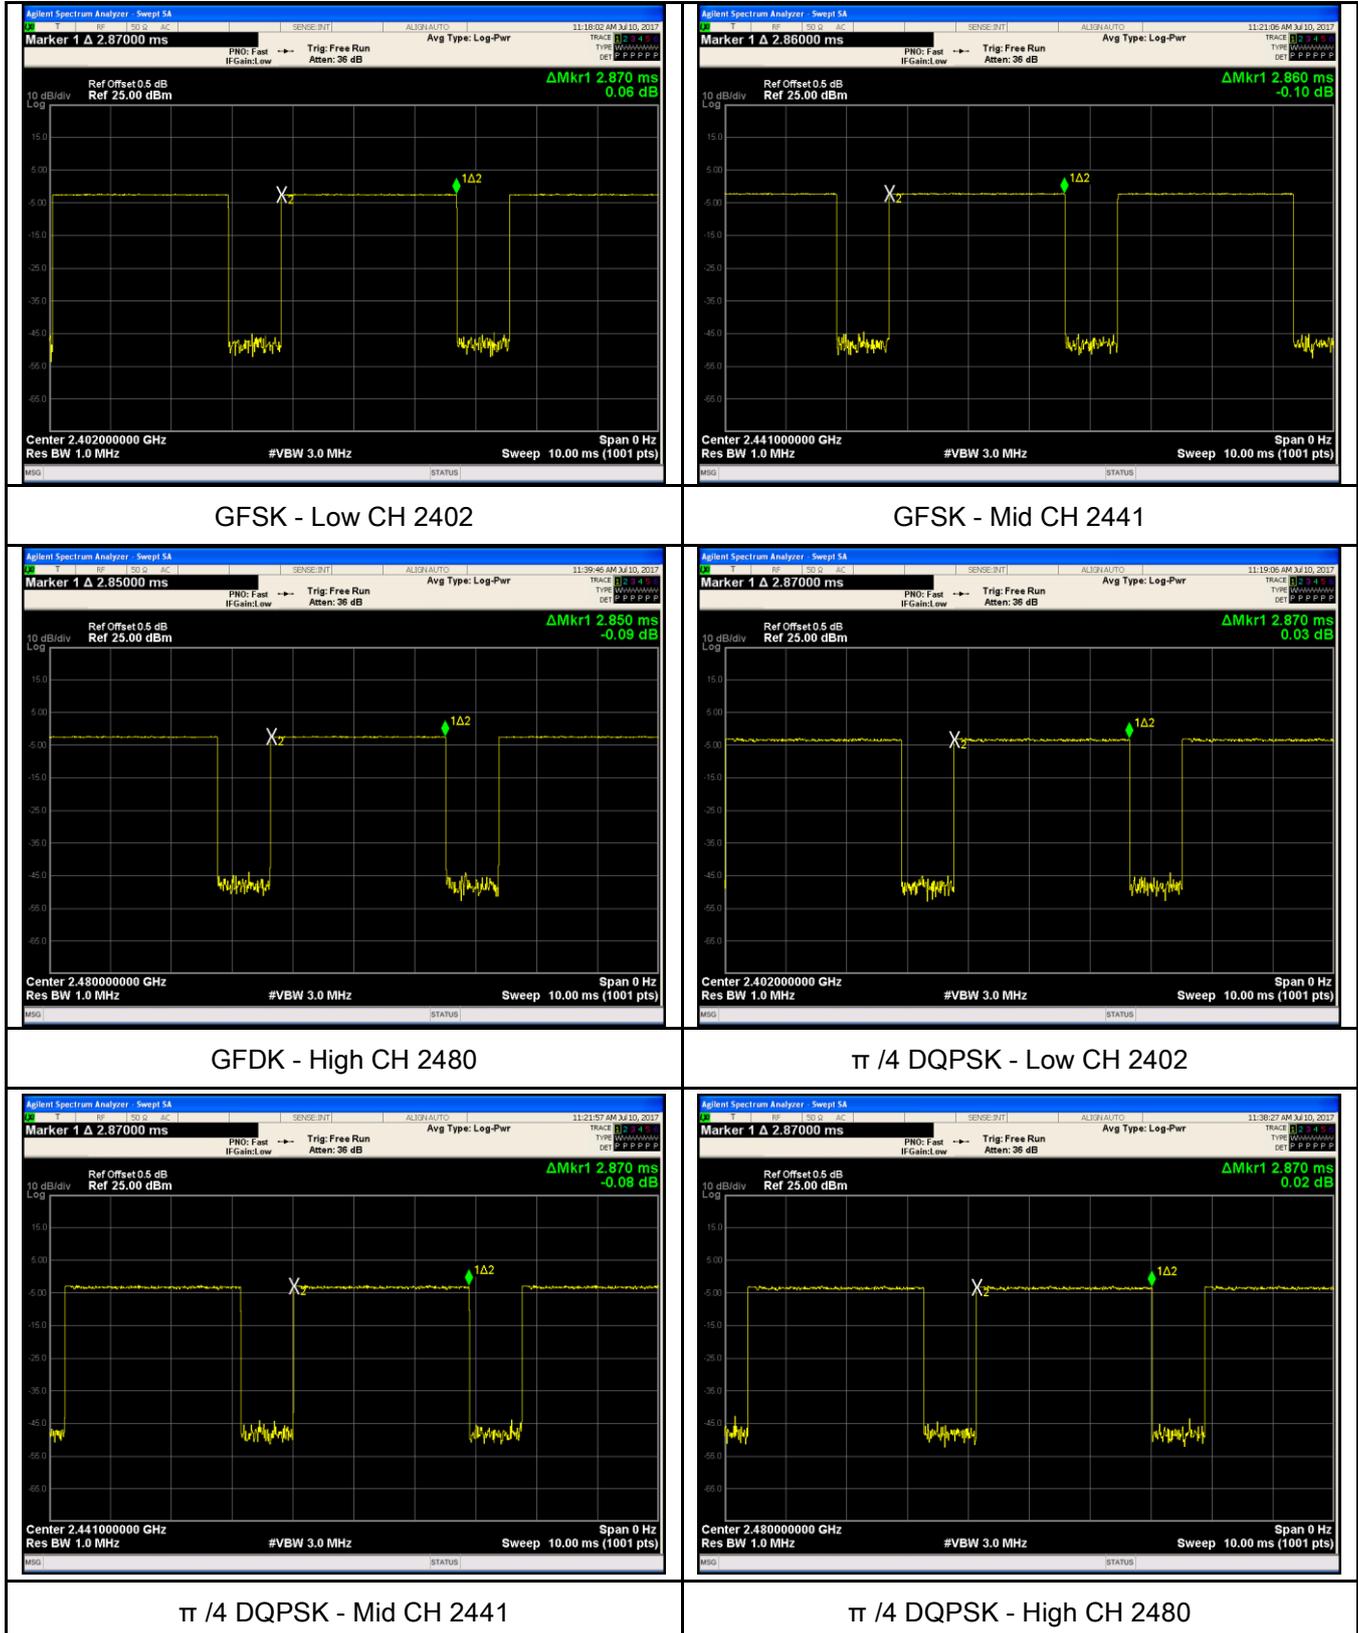

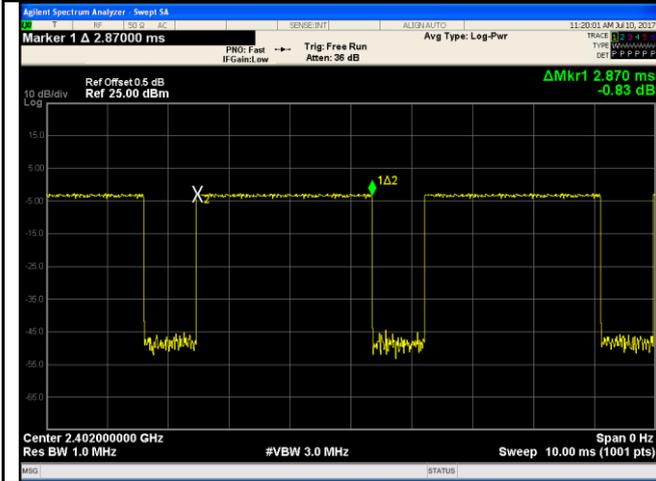

8DPSK - Low CH 2402



8DPSK - Mid CH 2441




8DPSK - High CH 2480

6.7 Band Edge & Restricted Band

Temperature	25 °C
Relative Humidity	50%
Atmospheric Pressure	1008mbar
Test date :	August 08, 2017
Tested By :	Loren Luo

Requirement(s):

Spec	Item	Requirement	Applicable
§15.247(a) (1)(iii)	a)	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. □	<input checked="" type="checkbox"/>

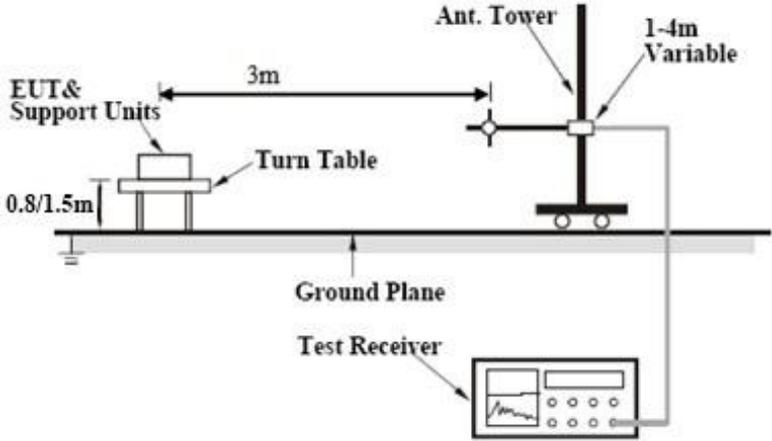Test Setup	 <p>The diagram illustrates the test setup for radiated emissions. A Turn Table is placed on a Ground Plane, with EUT & Support Units on top. The distance from the EUT to the Ground Plane is 0.8/1.5m. An Ant. Tower is positioned 3m away from the Turn Table. A 1-4m Variable antenna is attached to the tower. A Test Receiver is connected to the antenna.</p>
------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------



Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines. Radiated Method Only</p> <ul style="list-style-type: none"> - 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator. - 2. Position the EUT without connection to measurement instrument. Put it on the Rotated table and turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range,
----------------	--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------

	<p>and make sure the instrument is operated in its linear range.</p> <ul style="list-style-type: none"> - 3. First, set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, check the emission of EUT, if pass then set Spectrum Analyzer as below: <ul style="list-style-type: none"> a. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasiy Peak detection at frequency below 1GHz. b. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz. c. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz with Peak detection for Average Measurement as below at frequency above 1GHz. - 4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency. - 5. Repeat above procedures until all measured frequencies were complete.
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail


Test Data Yes N/A
Test Plot Yes (See below) N/A

Test Plots


GFSK Mode:

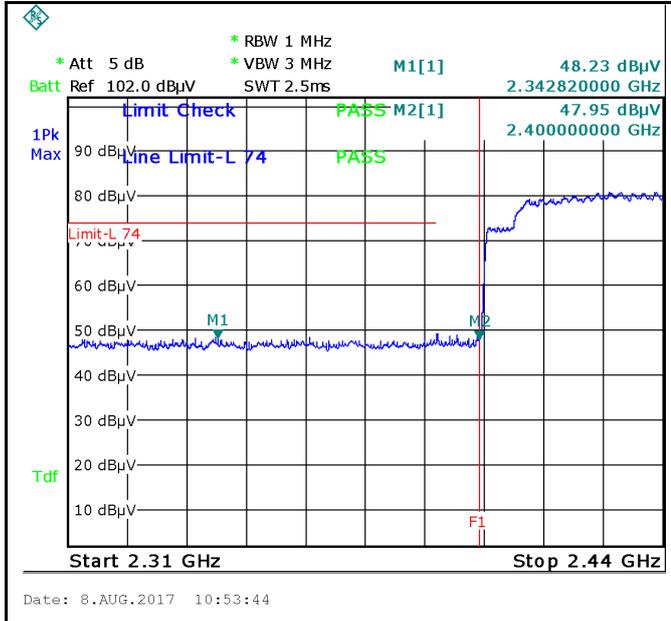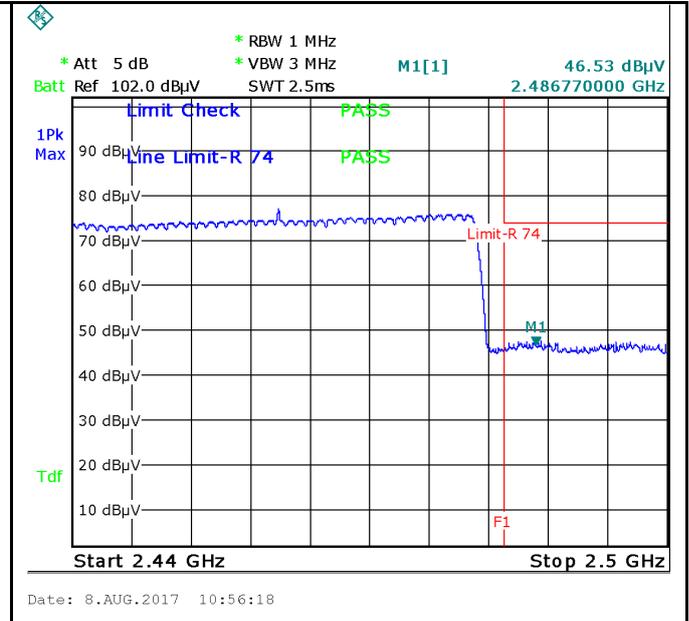 <p>* RBW 1 MHz * VBW 3 MHz * Att 5 dB * Ref 102.0 dBµV * SWT 2.5ms</p> <p>M1[1] 48.23 dBµV 2.342820000 GHz M2[1] 47.95 dBµV 2.400000000 GHz</p> <p>Limit Check PASS Line Limit-L 74 PASS Limit-L 74 M1 M2 F1</p> <p>Start 2.31 GHz Stop 2.44 GHz</p> <p>Date: 8.AUG.2017 10:53:44</p>	 <p>* RBW 1 MHz * VBW 3 MHz * Att 5 dB * Ref 102.0 dBµV * SWT 2.5ms</p> <p>M1[1] 46.53 dBµV 2.486770000 GHz</p> <p>Limit Check PASS Line Limit-R 74 PASS Limit-R 74 M1 F1</p> <p>Start 2.44 GHz Stop 2.5 GHz</p> <p>Date: 8.AUG.2017 10:56:18</p>
<p>GFSK-Hopping Left Side-PK</p> <p>Note: F1 is frequency 2400MHz</p>	<p>GFSK-Hopping Right Side-PK</p> <p>Note: F1 is frequency 2483.5MHz</p>
<p>Note: (no need if PK value less than the AV limit)</p>	<p>Note: (no need if PK value less than the AV limit)</p>
<p>GFSK-Hopping Left Side-AV</p>	<p>GFSK-Hopping Right Side-AV</p>

Note: Both Horizontal and vertical polarities were investigated.

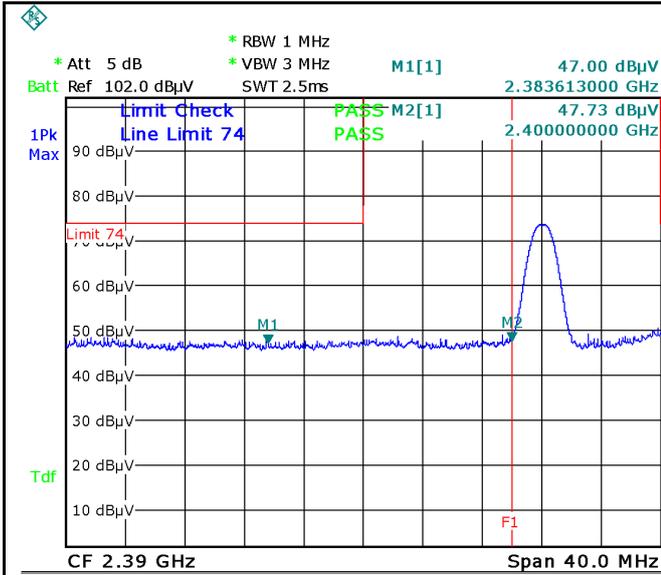

Date: 8.AUG.2017 10:18:16

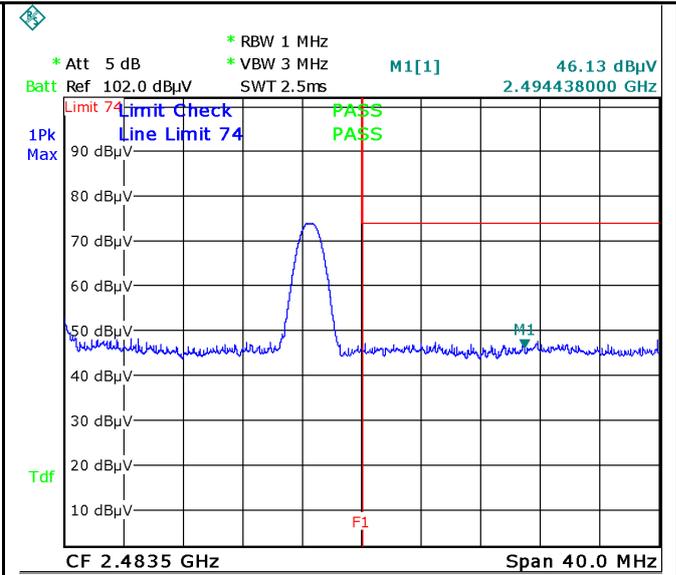

Date: 8.AUG.2017 10:45:22

GFSK-Left Side-PK

Note: F1 is frequency 2400MHz

GFSK-Right Side-PK

Note: F1 is frequency 2483.5MHz

Note: (no need if PK value less than the AV limit)



Note: (no need if PK value less than the AV limit)

GFSK-Left Side-AV

GFSK-Right Side-AV

Note: Both Horizontal and vertical polarities were investigated.

π / 4 DQPSK Mode:

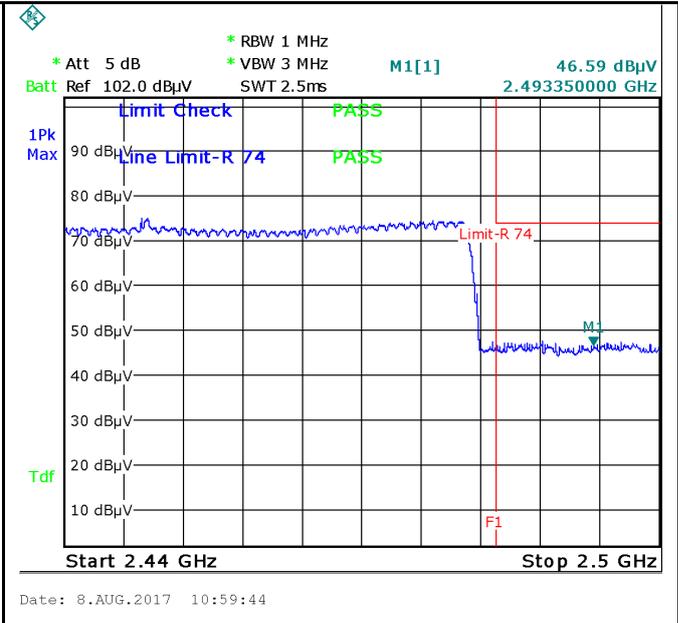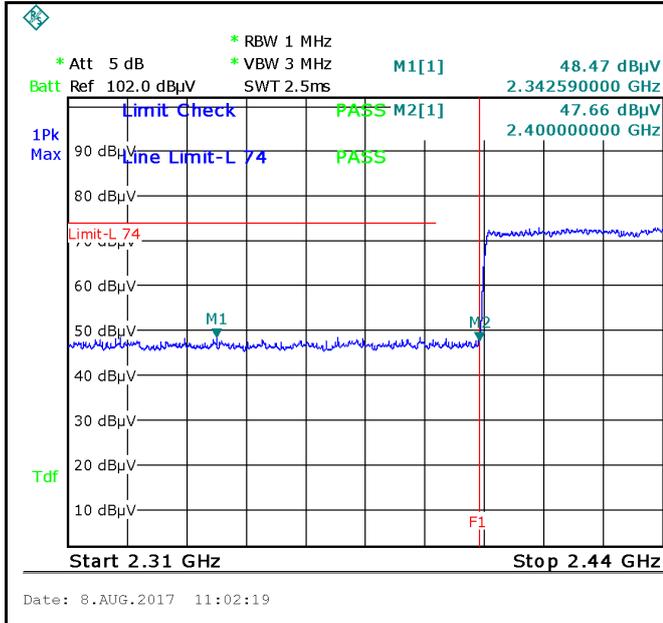

π / 4 DQPSK-Hopping Left Side-PK
Note: F1 is frequency 2400MHz

π / 4 DQPSK-Hopping Right Side-PK
Note: F1 is frequency 2483.5MHz


Note: (no need if PK value less than the AV limit)

Note: (no need if PK value less than the AV limit)


π / 4 DQPSK-Hopping Left-AV

π / 4 DQPSK-Hopping Right-AV

Note: Both Horizontal and vertical polarities were investigated.

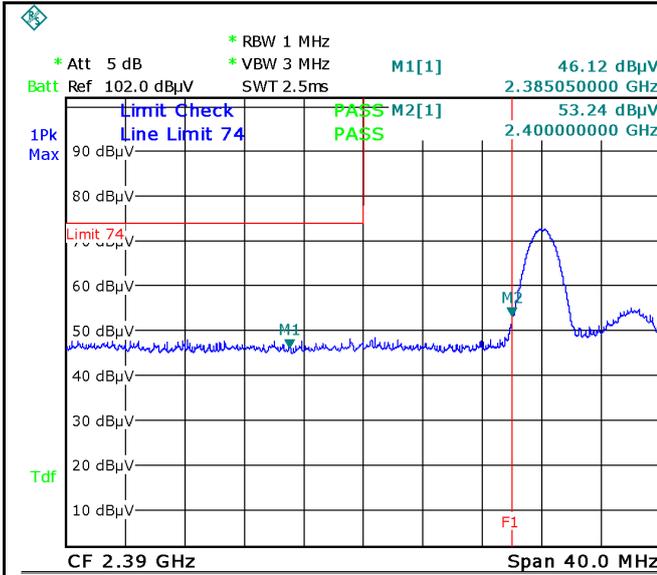

Date: 8.AUG.2017 10:26:34

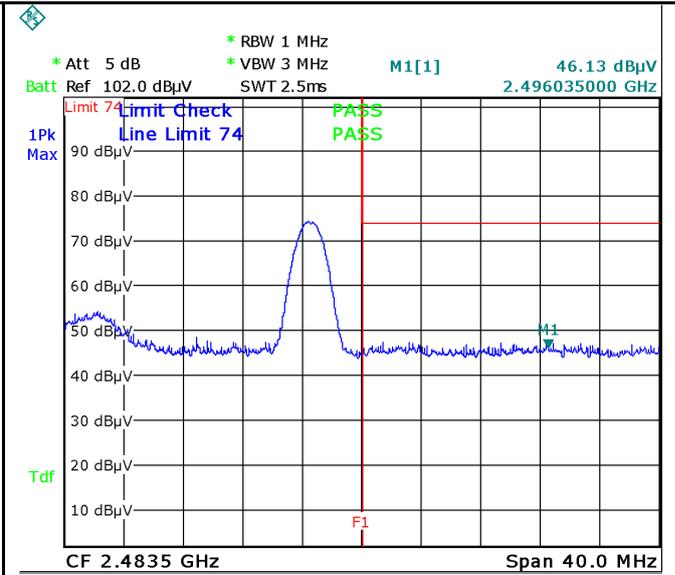

Date: 8.AUG.2017 10:43:23

π / 4 DQPSK-Left Side-PK

Note: F1 is frequency 2400MHz

π / 4 DQPSK-Right Side-PK

Note: F1 is frequency 2483.5MHz

Note: (no need if PK value less than the AV limit)



Note: (no need if PK value less than the AV limit)

π / 4 DQPSK-Left Side-AV

π / 4 DQPSK-Right Side-AV

Note: Both Horizontal and vertical polarities were investigated.

8-DPSK Mode:

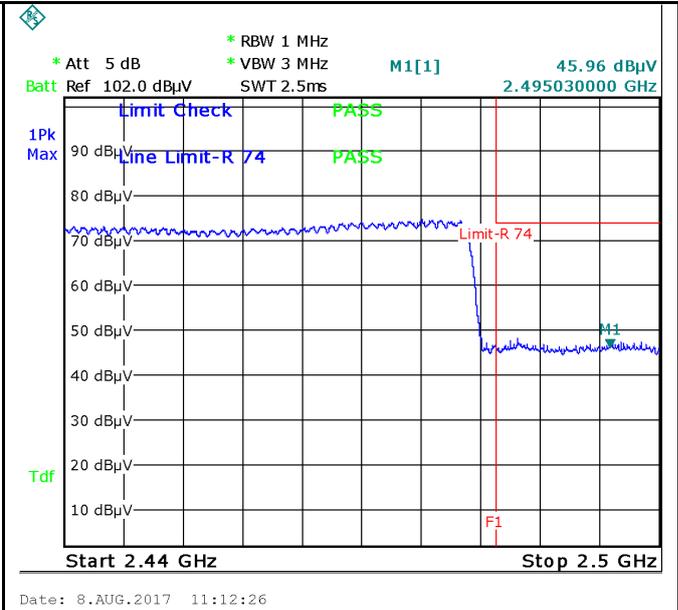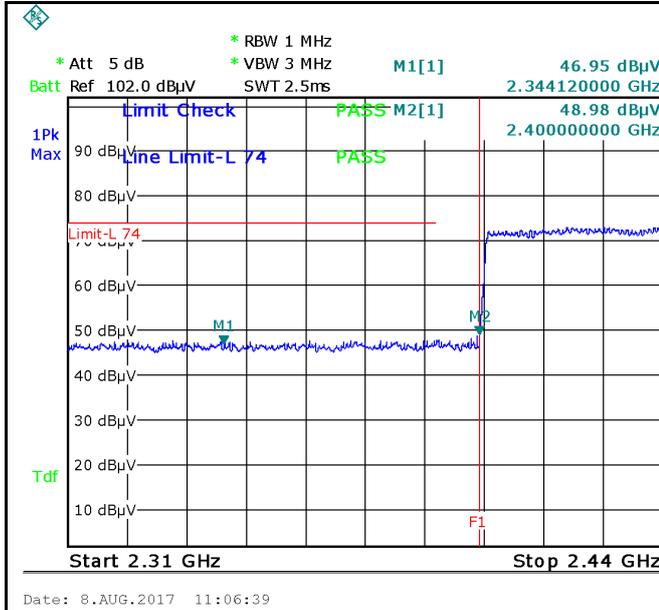

8DPSK-Hopping Left Side-PK
Note: F1 is frequency 2400MHz

8DPSK-Hopping Right Side-PK
Note: F1 is frequency 2483.5MHz


Note: (no need if PK value less than the AV limit)

Note: (no need if PK value less than the AV limit)


8DPSK-Hopping Left-AV

8DPSK-Hopping Right-AV

Note: Both Horizontal and vertical polarities were investigated.

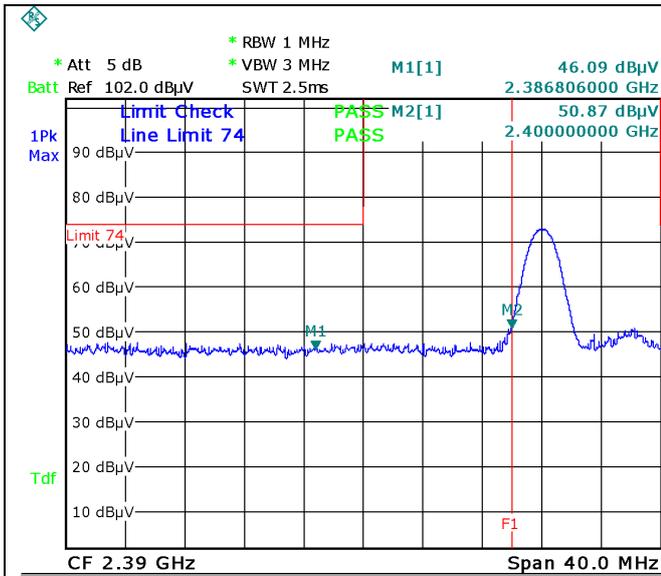

Date: 8.AUG.2017 10:32:52

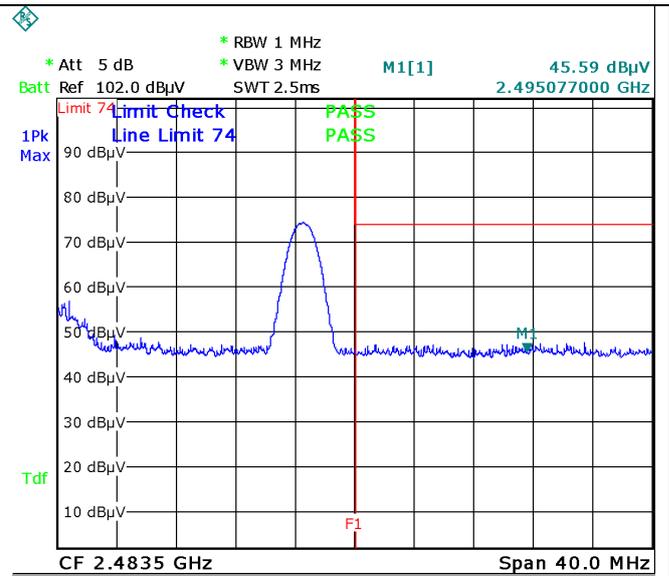

Date: 8.AUG.2017 10:38:47

8DPSK-Left Side-PK

Note: F1 is frequency 2400MHz

8DPSK-Right Side-PK

Note: F1 is frequency 2483.5MHz

Note: (no need if PK value less than the AV limit)

Note: (no need if PK value less than the AV limit)

8DPSK-Left Side-AV

8DPSK-Right Side-AV


Note: Both Horizontal and vertical polarities were investigated.

6.8 AC Power Line Conducted Emissions

Temperature	25 °C
Relative Humidity	57%
Atmospheric Pressure	1015mbar
Test date :	August 07, 2017
Tested By :	Loren Luo

Requirement(s):

Spec	Item	Requirement	Applicable														
47CFR§15.207, RSS210 (A8.1)	a)	For Low-power radio-frequency devices that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 [mu]H/50 ohms line impedance stabilization network (LISN). The lower limit applies at the boundary between the frequencies ranges.	<input checked="" type="checkbox"/>														
		<table border="1"> <thead> <tr> <th rowspan="2">Frequency ranges (MHz)</th> <th colspan="2">Limit (dBµV)</th> </tr> <tr> <th>QP</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15 ~ 0.5</td> <td>66 – 56</td> <td>56 – 46</td> </tr> <tr> <td>0.5 ~ 5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5 ~ 30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>		Frequency ranges (MHz)	Limit (dBµV)		QP	Average	0.15 ~ 0.5	66 – 56	56 – 46	0.5 ~ 5	56	46	5 ~ 30	60	50
		Frequency ranges (MHz)			Limit (dBµV)												
				QP	Average												
0.15 ~ 0.5	66 – 56	56 – 46															
0.5 ~ 5	56	46															
5 ~ 30	60	50															

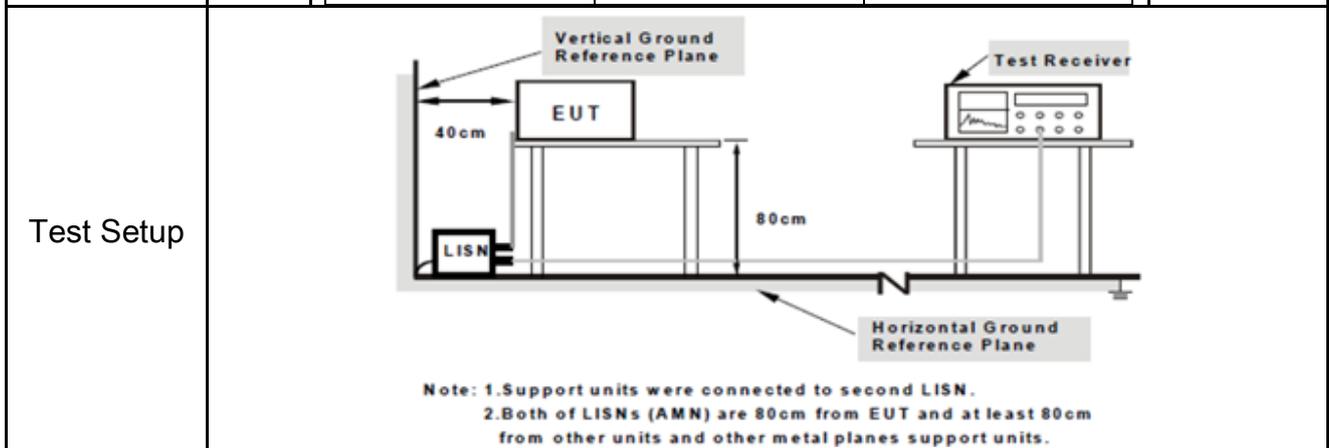

Procedure	<ol style="list-style-type: none"> The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table. The power supply for the EUT was fed through a 50W/50mH EUT LISN, connected to filtered mains. The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss
-----------	-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------


Test Report	17070456-FCC-R2-V1
Page	38 of 67

	<p>coaxial cable.</p> <ol style="list-style-type: none"> 4. All other supporting equipment were powered separately from another main supply. 5. The EUT was switched on and allowed to warm up to its normal operating condition. 6. A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power) over the required frequency range using an EMI test receiver. 7. High peaks, relative to the limit line, The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 10 kHz. 8. Step 7 was then repeated for the LIVE line (for AC mains) or DC line (for DC power).
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data Yes N/A

Test Plot Yes (See below) N/A

Test Mode:	Bluetooth Mode
-------------------	-----------------------

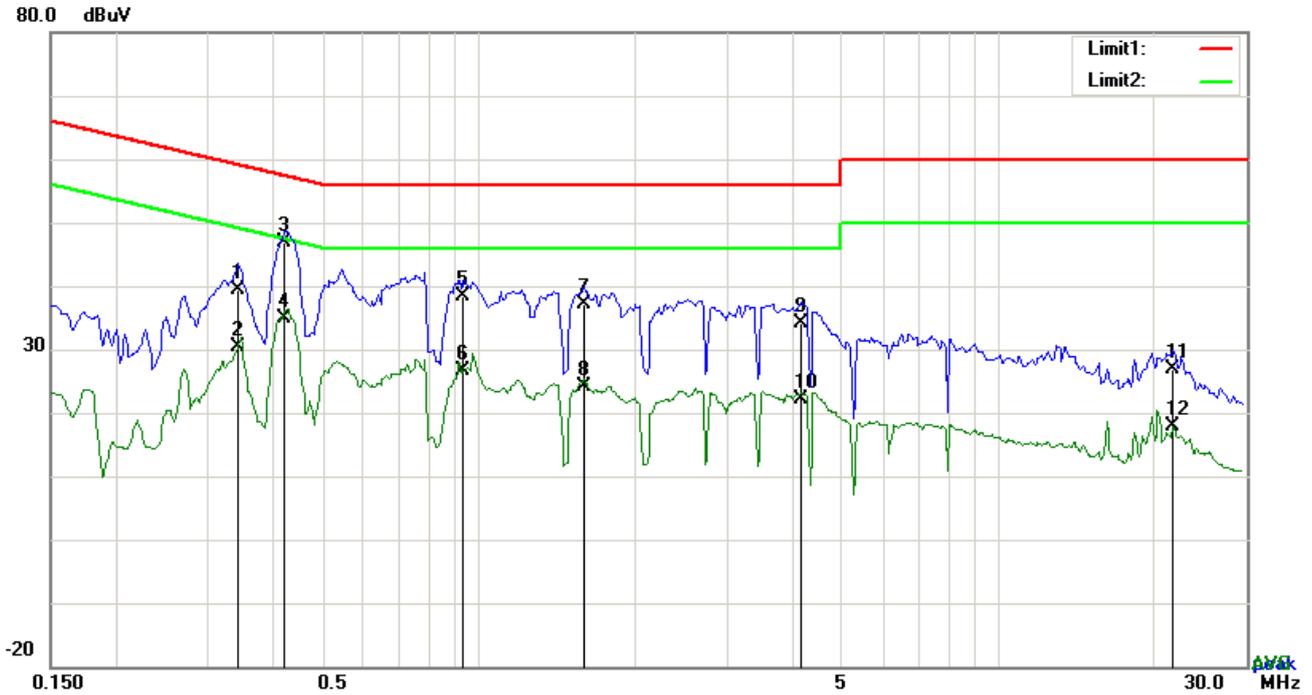


Test Data

Phase Line Plot at 120Vac, 60Hz

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB)	(dBuV)	(dBuV)	(dB)
1	L1	0.3450	29.28	QP	10.03	39.31	59.08	-19.77
2	L1	0.3450	20.41	AVG	10.03	30.44	49.08	-18.64
3	L1	0.4230	36.85	QP	10.03	46.88	57.39	-10.51
4	L1	0.4230	24.97	AVG	10.03	35.00	47.39	-12.39
5	L1	0.9378	28.44	QP	10.03	38.47	56.00	-17.53
6	L1	0.9378	16.54	AVG	10.03	26.57	46.00	-19.43
7	L1	1.5969	27.20	QP	10.04	37.24	56.00	-18.76
8	L1	1.5969	14.19	AVG	10.04	24.23	46.00	-21.77
9	L1	4.1778	24.12	QP	10.07	34.19	56.00	-21.81
10	L1	4.1778	12.02	AVG	10.07	22.09	46.00	-23.91
11	L1	21.6615	16.65	QP	10.33	26.98	60.00	-33.02
12	L1	21.6615	7.66	AVG	10.33	17.99	50.00	-32.01

Test Mode:	Bluetooth Mode
-------------------	-----------------------

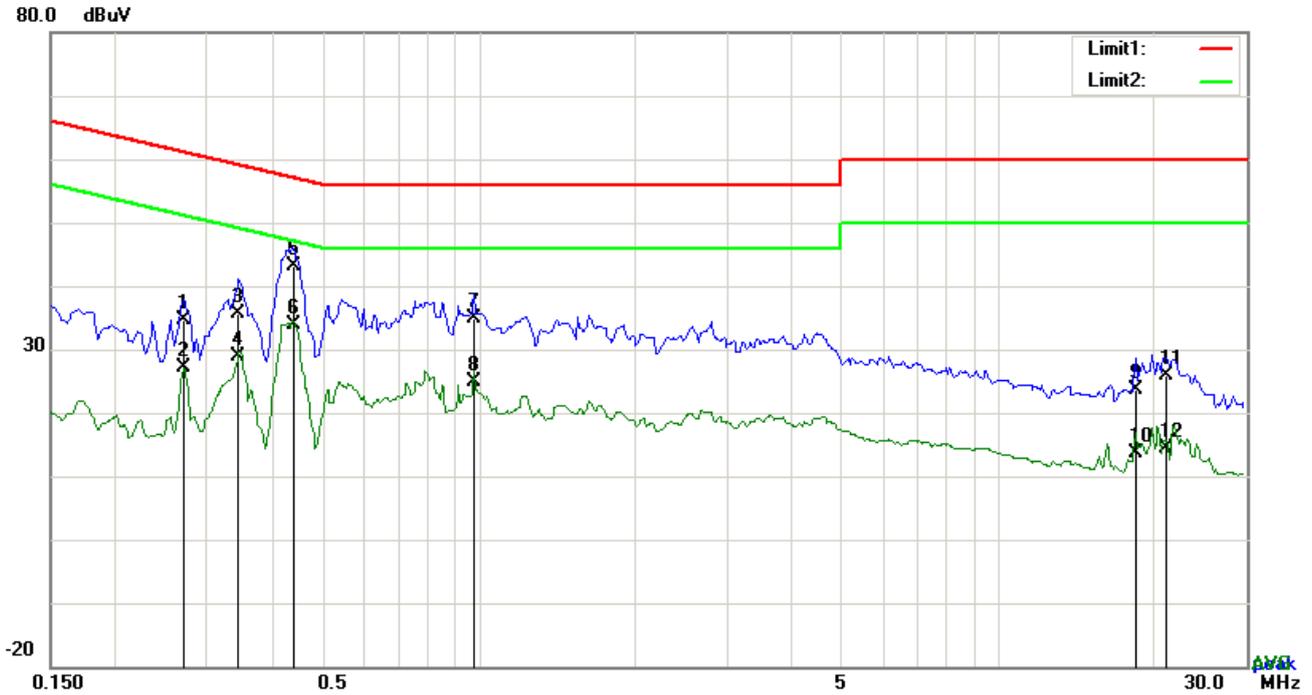


Test Data

Phase Neutral Plot at 120Vac, 60Hz

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB)	(dBuV)	(dBuV)	(dB)
1	N	0.2709	24.64	QP	10.02	34.66	61.09	-26.43
2	N	0.2709	17.07	AVG	10.02	27.09	51.09	-24.00
3	N	0.3450	25.72	QP	10.02	35.74	59.08	-23.34
4	N	0.3450	18.97	AVG	10.02	28.99	49.08	-20.09
5	N	0.4397	32.99	QP	10.02	43.01	57.07	-14.06
6	N	0.4397	23.76	AVG	10.02	33.78	47.07	-13.29
7	N	0.9807	24.80	QP	10.03	34.83	56.00	-21.17
8	N	0.9807	14.88	AVG	10.03	24.91	46.00	-21.09
9	N	18.3621	13.37	QP	10.24	23.61	60.00	-36.39
10	N	18.3621	3.32	AVG	10.24	13.56	50.00	-36.44
11	N	21.1155	15.48	QP	10.28	25.76	60.00	-34.24
12	N	21.1155	4.21	AVG	10.28	14.49	50.00	-35.51

Test Mode:	Bluetooth Mode
-------------------	-----------------------

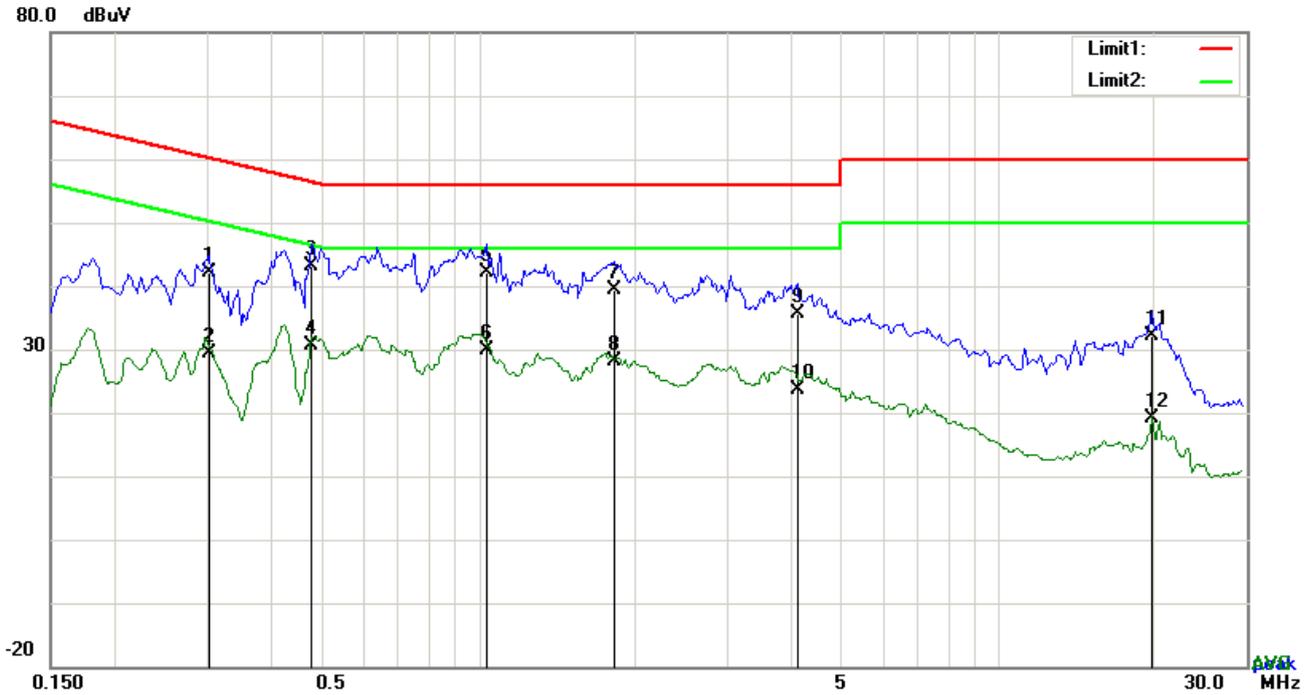


Test Data

Phase Line Plot at 240Vac, 60Hz

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB)	(dBuV)	(dBuV)	(dB)
1	L1	0.3021	32.15	QP	10.03	42.18	60.18	-18.00
2	L1	0.3021	19.35	AVG	10.03	29.38	50.18	-20.80
3	L1	0.4776	32.99	QP	10.03	43.02	56.38	-13.36
4	L1	0.4776	20.65	AVG	10.03	30.68	46.38	-15.70
5	L1	1.0353	32.04	QP	10.03	42.07	56.00	-13.93
6	L1	1.0353	19.96	AVG	10.03	29.99	46.00	-16.01
7	L1	1.8192	29.29	QP	10.04	39.33	56.00	-16.67
8	L1	1.8192	18.12	AVG	10.04	28.16	46.00	-17.84
9	L1	4.1076	25.54	QP	10.07	35.61	56.00	-20.39
10	L1	4.1076	13.45	AVG	10.07	23.52	46.00	-22.48
11	L1	19.7076	21.78	QP	10.30	32.08	60.00	-27.92
12	L1	19.7076	8.78	AVG	10.30	19.08	50.00	-30.92

Test Mode:	Bluetooth Mode
-------------------	-----------------------

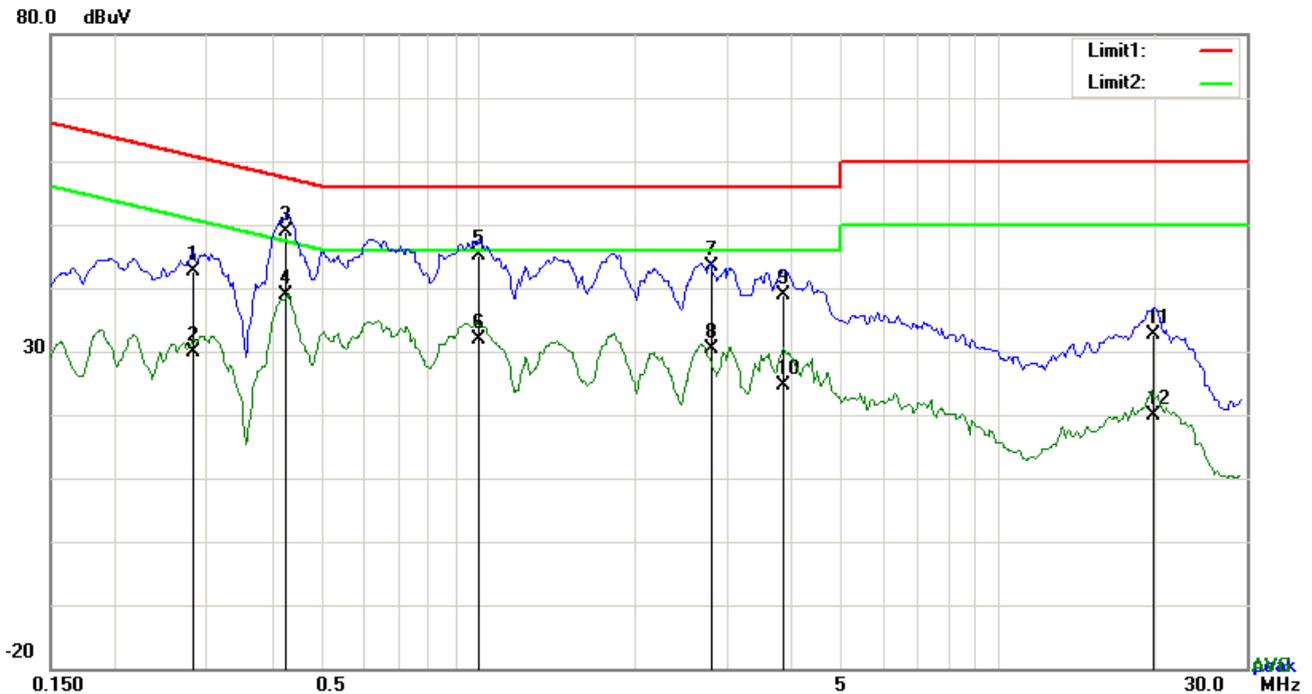

Test Data

Phase Neutral Plot at 240Vac, 60Hz


No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB)	(dBuV)	(dBuV)	(dB)
1	L1	0.2826	32.71	QP	10.03	42.74	60.74	-18.00
2	L1	0.2826	19.83	AVG	10.03	29.86	50.74	-20.88
3	L1	0.4269	38.73	QP	10.03	48.76	57.31	-8.55
4	L1	0.4269	28.75	AVG	10.03	38.78	47.31	-8.53
5	L1	1.0041	34.98	QP	10.03	45.01	56.00	-10.99
6	L1	1.0041	21.95	AVG	10.03	31.98	46.00	-14.02
7	L1	2.7981	33.45	QP	10.05	43.50	56.00	-12.50
8	L1	2.7981	20.29	AVG	10.05	30.34	46.00	-15.66
9	L1	3.8502	28.79	QP	10.07	38.86	56.00	-17.14
10	L1	3.8502	14.49	AVG	10.07	24.56	46.00	-21.44
11	L1	19.9182	22.40	QP	10.30	32.70	60.00	-27.30
12	L1	19.9182	9.46	AVG	10.30	19.76	50.00	-30.24


6.9 Radiated Emissions & Restricted Band

Temperature	25 °C
Relative Humidity	50%
Atmospheric Pressure	1008mbar
Test date :	August 08, 2017
Tested By :	Loren Luo

Requirement(s):

Spec	Item	Requirement	Applicable																
47CFR§15.205, §15.209, §15.247(d)	a)	Except higher limit as specified elsewhere in other section, the emissions from the low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges	<input checked="" type="checkbox"/>																
		<table border="1"> <thead> <tr> <th>Frequency range (MHz)</th> <th>Field Strength ($\mu\text{V}/\text{m}$)</th> </tr> </thead> <tbody> <tr> <td>0.009~0.490</td> <td>2400/F(KHz)</td> </tr> <tr> <td>0.490~1.705</td> <td>24000/F(KHz)</td> </tr> <tr> <td>1.705~30.0</td> <td>30</td> </tr> <tr> <td>30 – 88</td> <td>100</td> </tr> <tr> <td>88 – 216</td> <td>150</td> </tr> <tr> <td>216 960</td> <td>200</td> </tr> <tr> <td>Above 960</td> <td>500</td> </tr> </tbody> </table>		Frequency range (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	0.009~0.490	2400/F(KHz)	0.490~1.705	24000/F(KHz)	1.705~30.0	30	30 – 88	100	88 – 216	150	216 960	200	Above 960	500
		Frequency range (MHz)		Field Strength ($\mu\text{V}/\text{m}$)															
		0.009~0.490		2400/F(KHz)															
		0.490~1.705		24000/F(KHz)															
		1.705~30.0		30															
		30 – 88		100															
		88 – 216		150															
216 960	200																		
Above 960	500																		

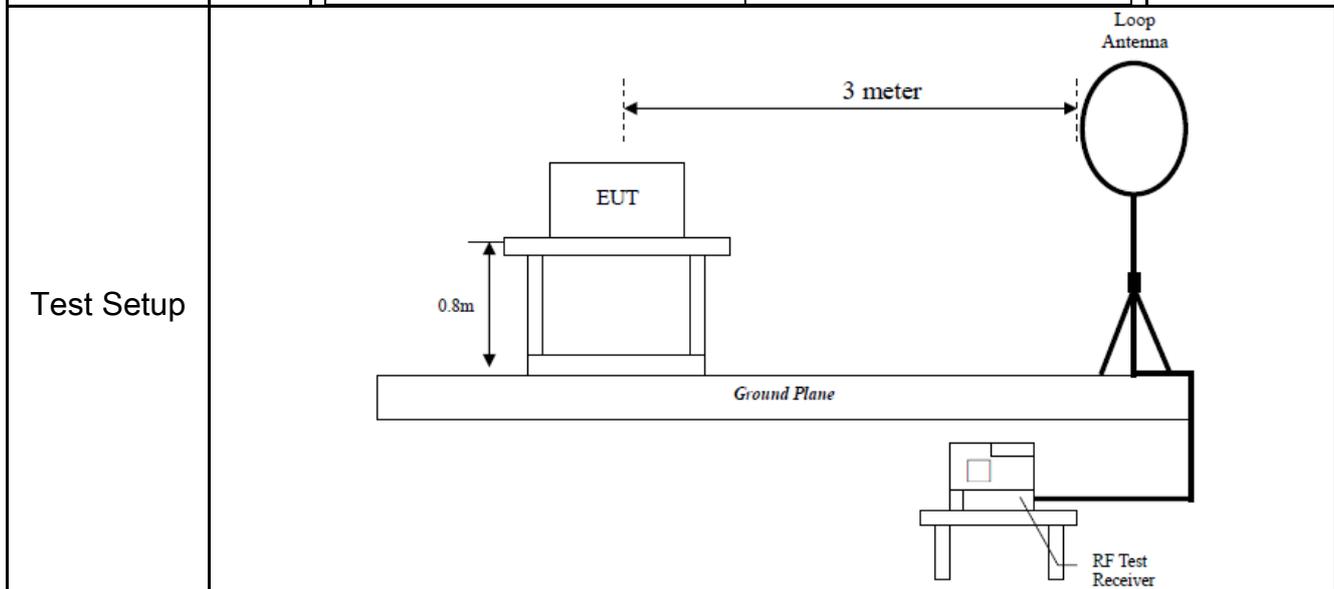

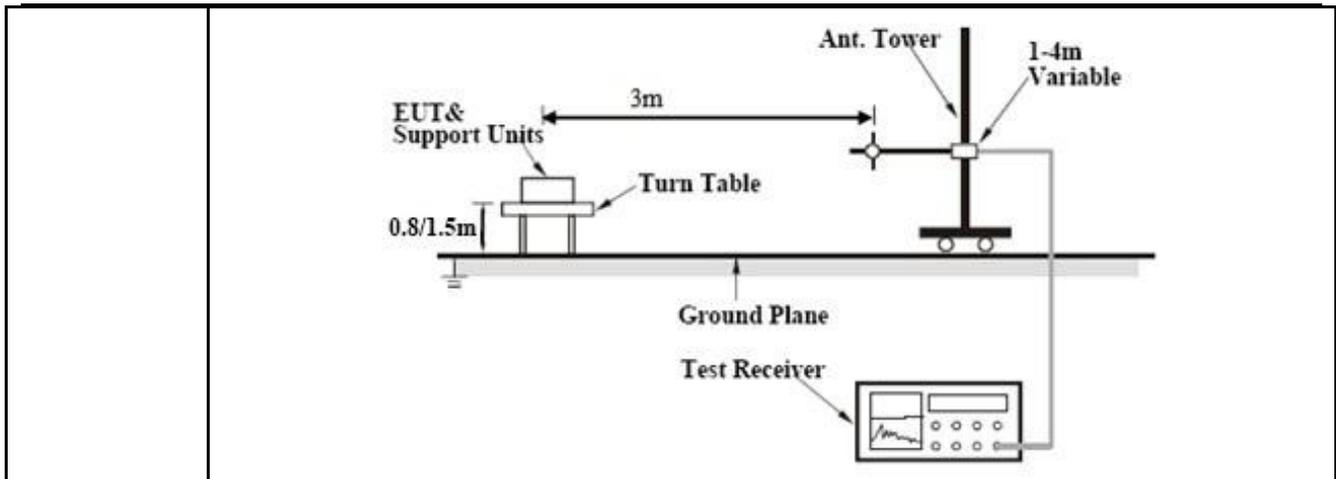

Procedure

- The EUT was switched on and allowed to warm up to its normal operating condition.
- The test was carried out at the selected frequency points obtained from the EUT characterization. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner:
 - Vertical or horizontal polarization (whichever gave the higher emission level over a full rotation of the EUT) was chosen.
 - The EUT was then rotated to the direction that gave the maximum emission.
 - Finally, the antenna height was adjusted to the height that gave the maximum emission.
- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasiy Peak detection at frequency below 1GHz.
- The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz.
The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz with Peak detection for Average Measurement as below at frequency above 1GHz.
- Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.

Remark

Result Pass Fail

Test Data Yes N/A

Test Plot Yes (See below) N/A

Test Result:

Test Mode:	Transmitting Mode
-------------------	-------------------

Frequency range: 9KHz - 30MHz

Freq. (MHz)	Detection value	Factor (dB/m)	Reading (dBuV/m)	Result (dBuV/m)	Limit@3m (dBuV/m)	Margin (dB)
--	--	--	--	--	--	>20
--	--	--	--	--	--	>20

Note:


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance}/\text{test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.

Test Mode: Bluetooth Mode

30MHz -1GHz

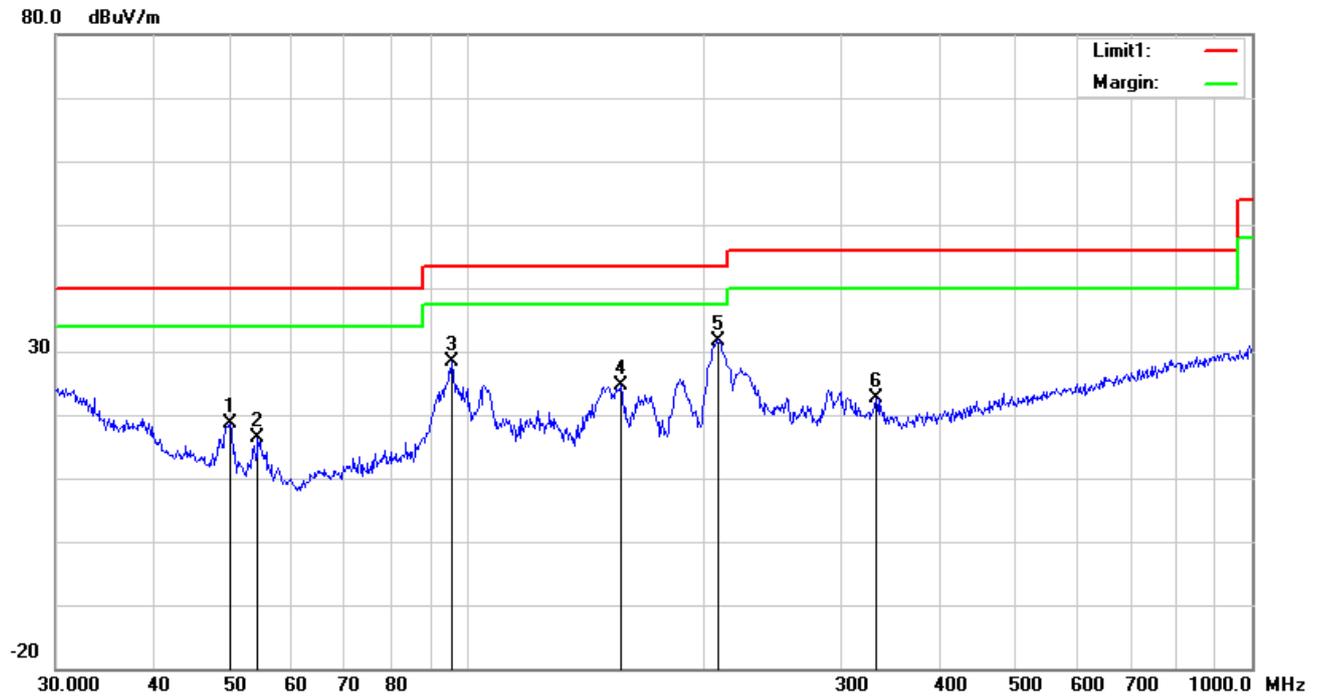

Test Data

Horizontal Polarity Plot @3m

No.	P/L	Frequency (MHz)	Reading (dBuV/m)	Detect or	Ant_F (dB/m)	PA_G (dB)	Cab_L (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degr ee ()
1	H	50.0566	31.74	peak	8.39	22.38	0.80	18.55	40.00	-21.45	100	156
2	H	54.2610	30.14	peak	7.93	22.39	0.78	16.46	40.00	-23.54	100	341
3	H	95.7622	40.29	peak	9.38	22.32	1.01	28.36	43.50	-15.14	100	1
4	H	157.5589	32.84	peak	12.60	22.29	1.38	24.53	43.50	-18.97	100	198
5	H	209.3129	40.57	peak	11.97	22.36	1.57	31.75	43.50	-11.75	100	244
6	H	332.5187	28.51	peak	14.28	22.20	1.95	22.54	46.00	-23.46	100	330

30MHz -1GHz

80.0 dBuV/m



Test Data

Vertical Polarity Plot @3m

No.	P/L	Frequency	Reading	Detect or	Ant_F	PA_G	Cab_L	Result	Limit	Margin	Height	Degr ee
		(MHz)	(dBuV/m)		(dB/m)	(dB)	(dB)	(dBuV/m)	(dBuV/m)	(dB)	(cm)	()
1	V	31.1798	31.65	peak	20.49	22.27	0.65	30.52	40.00	-9.48	100	356
2	V	49.3594	50.04	QP	8.68	22.37	0.79	37.14	40.00	-2.86	100	330
3	V	55.4147	49.65	QP	7.80	22.40	0.78	35.83	40.00	-4.17	100	198
4	V	97.7983	45.36	peak	9.87	22.32	1.06	33.97	43.50	-9.53	100	294
5	V	171.9946	38.48	peak	11.64	22.26	1.36	29.22	43.50	-14.28	100	290
6	V	217.5443	39.09	peak	11.85	22.35	1.60	30.19	46.00	-15.81	100	58

Above 1GHz

Test Mode:	Transmitting Mode
-------------------	--------------------------

Low Channel: GFSK Mode (Worst Case) (2402 MHz)

Frequency (MHz)	S.A. Reading (dB μ V)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
4804	39.31	AV	V	33.67	6.86	32.66	47.18	54	-6.82
4804	39.7	AV	H	33.67	6.86	32.66	47.57	54	-6.43
4804	48.34	PK	V	33.67	6.86	32.66	56.21	74	-17.79
4804	45.88	PK	H	33.67	6.86	32.66	53.75	74	-20.25
8687	24.37	AV	V	37.74	7.89	47.8	22.2	54	-31.8
8687	24.94	AV	H	37.74	7.89	47.8	22.77	54	-31.23
8687	40.32	PK	V	37.74	7.89	47.8	38.15	74	-35.85
8687	42.1	PK	H	37.74	7.89	47.8	39.93	74	-34.07

Middle Channel: GFSK Mode (Worst Case) (2441 MHz)

Frequency (MHz)	S.A. Reading (dB μ V)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
4882	39.14	AV	V	33.71	6.95	32.74	47.06	54	-6.94
4882	38.91	AV	H	33.71	6.95	32.74	46.83	54	-7.17
4882	49.06	PK	V	33.71	6.95	32.74	56.98	74	-17.02
4882	47.11	PK	H	33.71	6.95	32.74	55.03	74	-18.97
12457	25.08	AV	V	40.44	13.42	46.15	32.79	54	-21.21
12457	23.5	AV	H	40.44	13.42	46.15	31.21	54	-22.79
12457	40.98	PK	V	40.44	13.42	46.15	48.69	74	-25.31
12457	41.4	PK	H	40.44	13.42	46.15	49.11	74	-24.89

High Channel: GFSK Mode (Worst Case) (2480 MHz)

Frequency (MHz)	S.A. Reading (dBμV)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
4960	37.24	AV	V	33.9	6.76	32.74	45.16	54	-8.84
4960	38.17	AV	H	33.9	6.76	32.74	46.09	54	-7.91
4960	47.74	PK	V	33.9	6.76	32.74	55.66	74	-18.34
4960	47.28	PK	H	33.9	6.76	32.74	55.2	74	-18.8
17820	23.77	AV	V	43.21	19.44	44.4	42.02	54	-11.98
17820	24.54	AV	H	43.21	19.44	44.4	42.79	54	-11.21
17820	42.39	PK	V	43.21	19.44	44.4	60.64	74	-13.36
17820	41.13	PK	H	43.21	19.44	44.4	59.38	74	-14.62

Note:

- 1, The testing has been conformed to $10 \times 2480 \text{MHz} = 24,800 \text{MHz}$
- 2, All other emissions more than 30 dB below the limit
- 3, X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.
- 4, The radiated spurious test above 18GHz is subcontracted to SIEMIC (Nanjing-China) Laboratories. and found 30dB below the limit at least.

Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Due	In use
AC Line Conducted					
EMI test receiver	ESCS30	8471241027	09/16/2016	09/15/2017	<input checked="" type="checkbox"/>
Line Impedance	LI-125A	191106	09/24/2016	09/23/2017	<input checked="" type="checkbox"/>
Line Impedance	LI-125A	191107	09/24/2016	09/23/2017	<input checked="" type="checkbox"/>
ISN	ISN T800	34373	09/24/2016	09/23/2017	<input type="checkbox"/>
Transient Limiter	LIT-153	531118	08/31/2016	08/30/2017	<input checked="" type="checkbox"/>
RF conducted test					
Agilent ESA-E SERIES	E4407B	MY45108319	09/16/2016	09/15/2017	<input checked="" type="checkbox"/>
Power Splitter	1#	1#	08/31/2016	08/30/2017	<input checked="" type="checkbox"/>
DC Power Supply	E3640A	MY40004013	09/16/2016	09/15/2017	<input checked="" type="checkbox"/>
Radiated Emissions					
EMI test receiver	ESL6	100262	09/16/2016	09/15/2017	<input checked="" type="checkbox"/>
Positioning Controller	UC3000	MF780208282	11/18/2016	11/17/2017	<input checked="" type="checkbox"/>
OPT 010 AMPLIFIER (0.1-1300MHz)	8447E	2727A02430	08/31/2016	08/30/2017	<input checked="" type="checkbox"/>
Horn Antenna	BBHA9170	3145226D1	09/28/2016	09/27/2017	<input checked="" type="checkbox"/>
Microwave Preamplifier (1 ~ 26.5GHz)	8449B	3008A02402	03/23/2017	03/22/2018	<input checked="" type="checkbox"/>
Active Antenna (9kHz-30MHz)	AL-130	121031	10/13/2016	10/12/2017	<input checked="" type="checkbox"/>
Bilog Antenna (30MHz~6GHz)	JB6	A110712	09/20/2016	09/19/2017	<input checked="" type="checkbox"/>
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71283	09/23/2016	09/22/2017	<input checked="" type="checkbox"/>
Universal Radio Communication Tester	CMU200	121393	09/24/2016	09/23/2017	<input checked="" type="checkbox"/>

Annex B. EUT And Test Setup Photographs

Annex B.i. Photograph: EUT External Photo

Whole Package View



Adapter - Label View



EUT - Front View



EUT - Rear View



EUT - Top View



EUT - Bottom View



EUT - Left View



EUT - Right View



Annex B.ii. Photograph: EUT Internal Photo

Cover Off - Top View 1



Cover Off - Top View 2



Battery - Front View




Battery - Rear View



Mainboard with Shielding – Front View



Mainboard with Shielding – Rear View

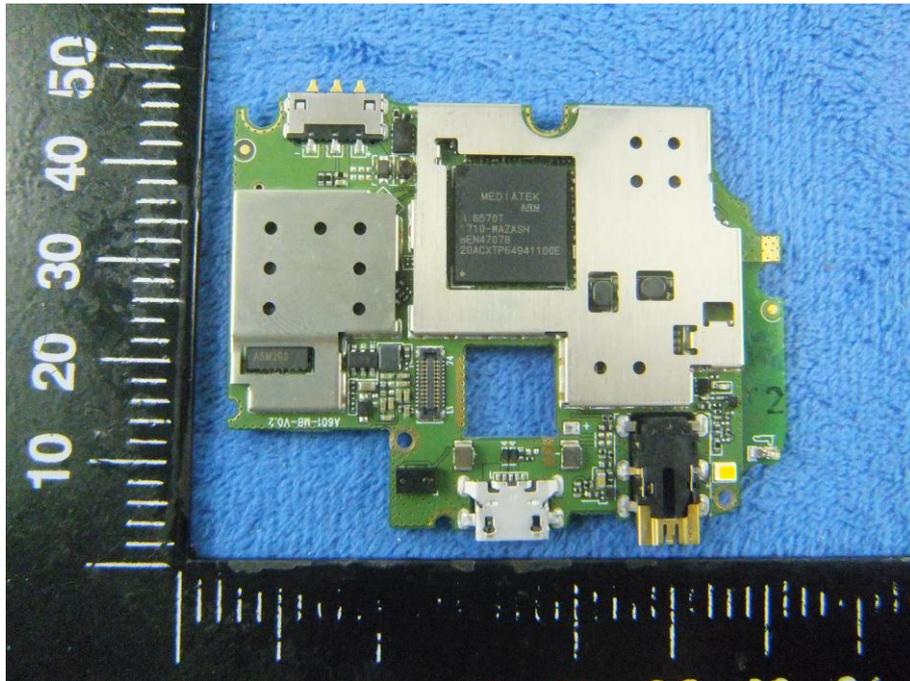

Mainboard without Shielding – Front View



Mainboard without Shielding – Rear View



LCD – Front View



LCD – Rear View



GSM/PCS/UMTS-FDD - Antenna View



WIFI/BT/BLE/GPS - Antenna View




Annex B.iii. Photograph: Test Setup Photo




Conducted Emissions Test Setup Front View



Conducted Emissions Test Setup Side View

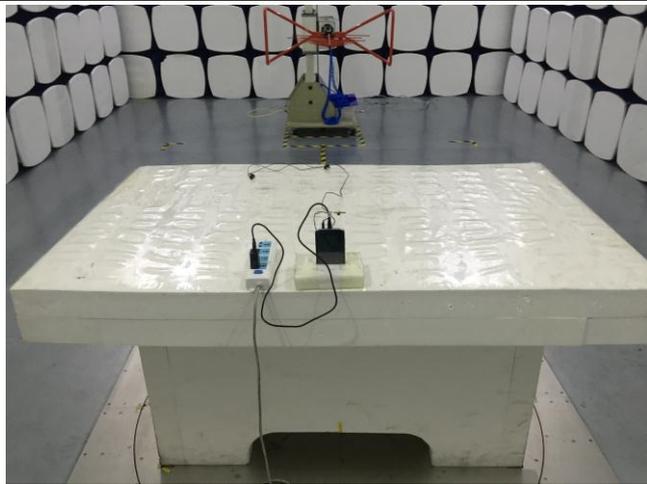

Radiated Spurious Emissions Test Setup Below 1GHz

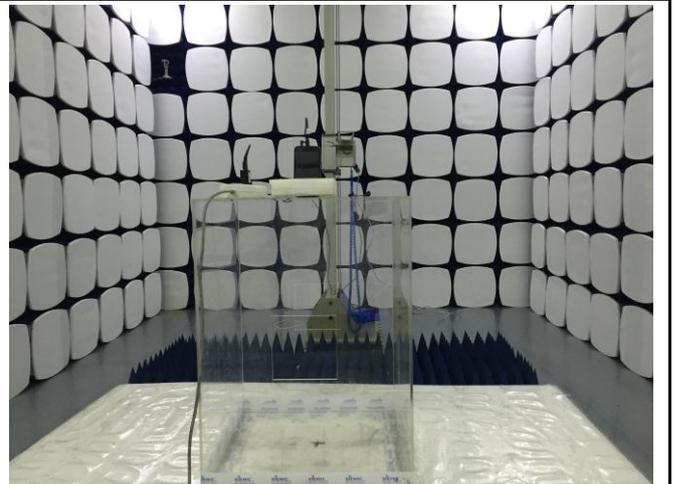


Radiated Spurious Emissions Test Setup Above
1GHz


Annex C. TEST SETUP AND SUPPORTING EQUIPMENT

Annex C.ii. TEST SET UP BLOCK


Block Configuration Diagram for AC Line Conducted Emissions

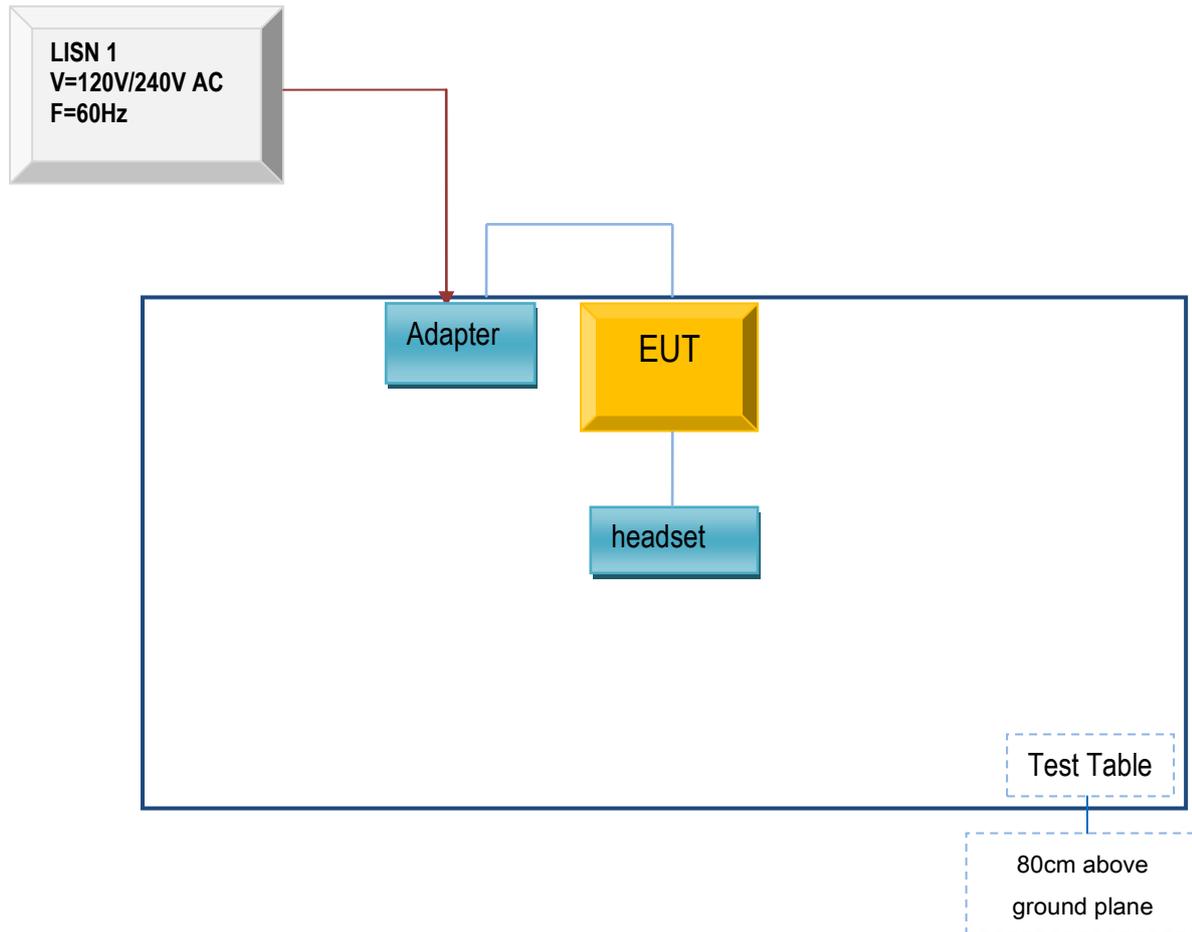

Block Configuration Diagram for Radiated Emissions (Below 1GHz) .

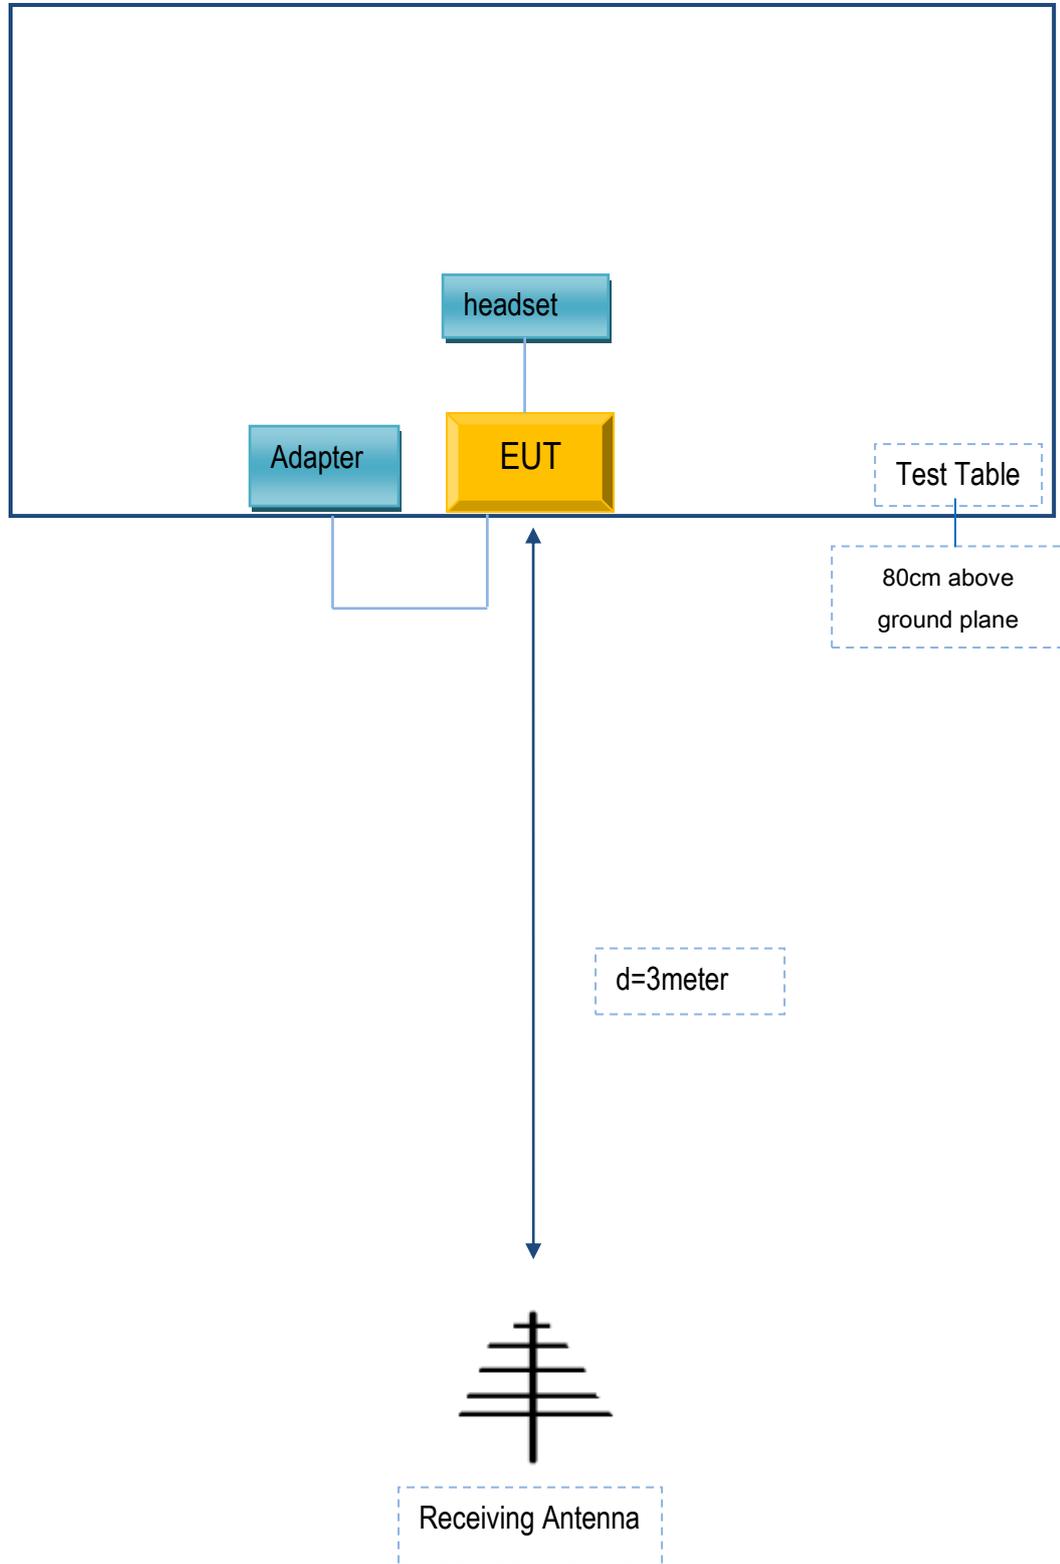

Block Configuration Diagram for Radiated Emissions (Above 1GHz) .

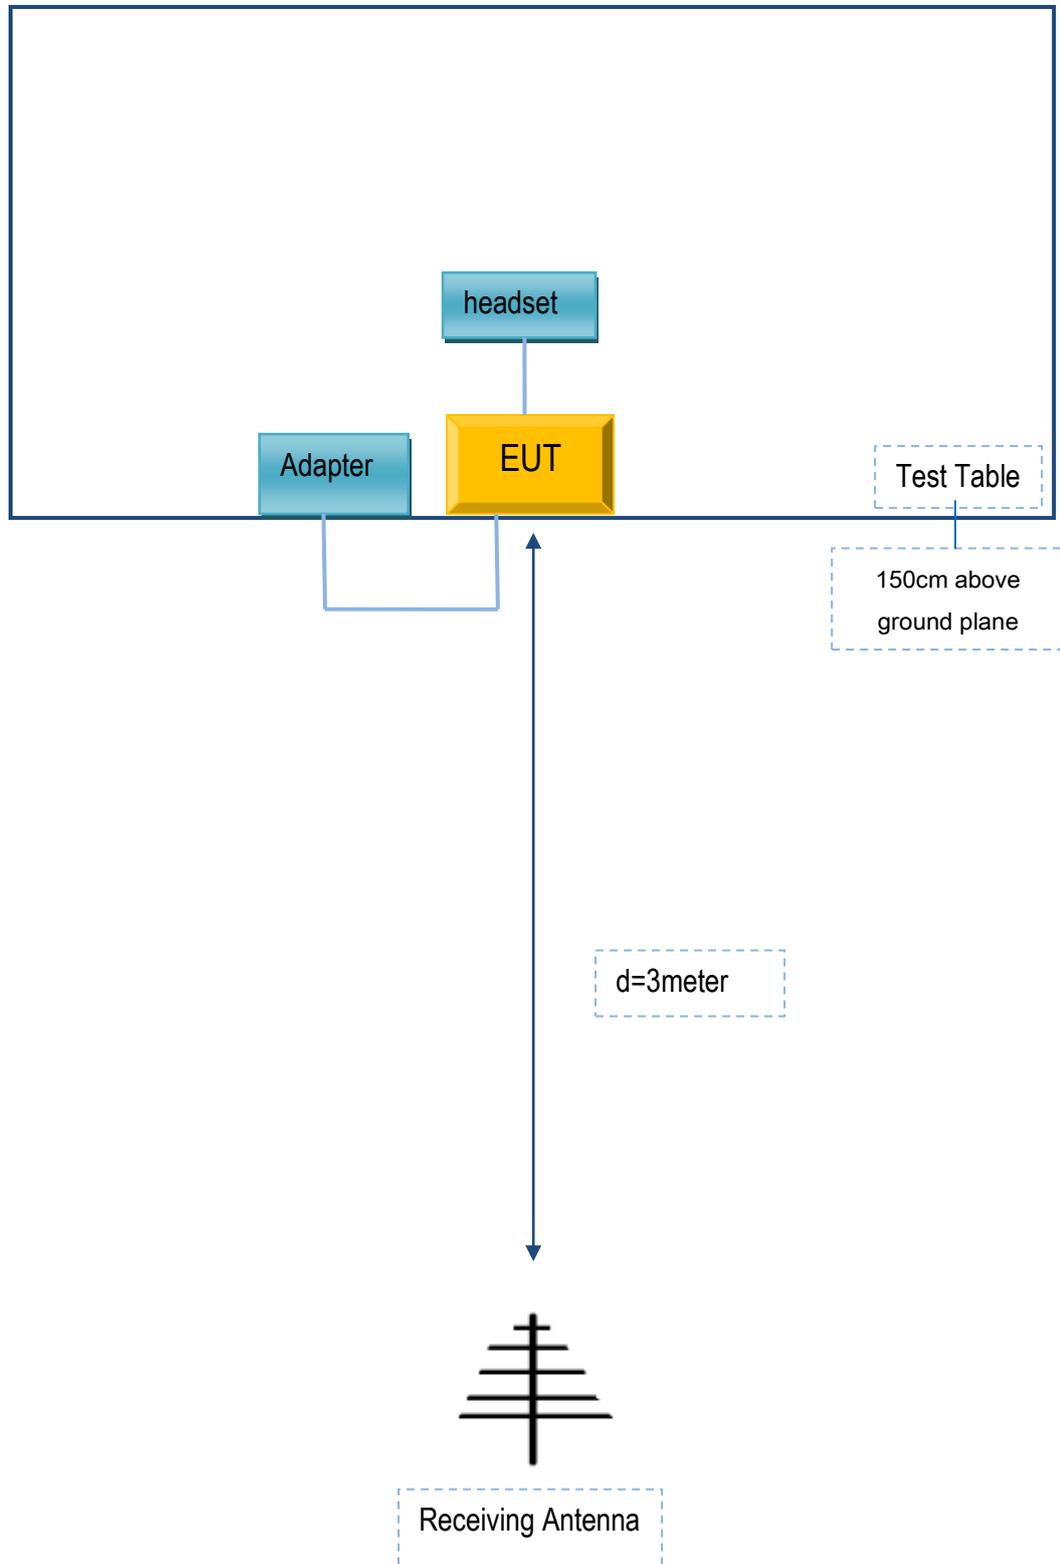

Annex C. ii. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

Supporting Equipment:

Manufacturer	Equipment Description	Model	Serial No
BLU Products, Inc.	Adapter	US-WW-1001	N/A
SAMSUNG	headset	HS330	N/A

Supporting Cable:

Cable type	Shield Type	Ferrite Core	Length	Serial No
USB Cable	Un-shielding	No	0.8m	N/A

Test Report	17070456-FCC-R2-V1
Page	66 of 67

Annex D. User Manual / Block Diagram / Schematics / Partlist

Please see the attachment

Test Report	17070456-FCC-R2-V1
Page	67 of 67

Annex E. DECLARATION OF SIMILARITY

N/A