

FCC TEST REPORT

Product Name: Mobile Phone
Trade Mark: BLU,BOLD
Model No.: C5L 2021
Add. Model No.: T6
Report Number: 210630083RFM-2
Test Standards: FCC 47 CFR Part 22
FCC 47 CFR Part 24
FCC 47 CFR Part 27
FCC ID: YHLBLUC5L21
Test Result: PASS
Date of Issue: August 12, 2021

Prepared for:

BLU Products, Inc.
10814 NW 33rd St # 100 Doral, FL 33172 ,USA

Prepared by:

Shenzhen UnionTrust Quality and Technology Co., Ltd.
Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and
technology park, Longhua district, Shenzhen, China
TEL: +86-755-2823 0888
FAX: +86-755-2823 0886

Prepared by:




Gavin Xu
Project Engineer

Reviewed by:



Henry Lu
Team Leader

Approved by:



Kevin Liang
Assistant Manager

Date:

August 12, 2021

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCC4G-V1.1

Version

Version No.	Date	Description
V1.0	August 12, 2021	Original

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com<http://www.uttlab.com>UTTR-RF-FCC4G-V1.1

CONTENTS

1. GENERAL INFORMATION	5
1.1 CLIENT INFORMATION	5
1.2 EUT INFORMATION	5
1.2.1 GENERAL DESCRIPTION OF EUT	5
1.2.2 DESCRIPTION OF ACCESSORIES	5
1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD	6
1.4 DESCRIPTION OF SUPPORT UNITS	9
1.5 TEST LOCATION	9
1.6 TEST FACILITY	9
1.7 DEVIATION FROM STANDARDS	10
1.8 ABNORMALITIES FROM STANDARD CONDITIONS	10
1.9 OTHER INFORMATION REQUESTED BY THE CUSTOMER	10
1.10 MEASUREMENT UNCERTAINTY	10
2. TEST SUMMARY	11
3. EQUIPMENT LIST	13
4. TEST CONFIGURATION	14
4.1 ENVIRONMENTAL CONDITIONS FOR TESTING	14
4.2 TEST SETUP	15
4.2.1 FOR RADIATED EMISSIONS TEST SETUP	15
4.2.2 FOR CONDUCTED RF TEST SETUP	16
4.3 TEST CHANNELS	17
4.4 SYSTEM TEST CONFIGURATION	19
4.5 PRE-SCAN	20
4.5.1 LTE BAND 2	20
4.5.2 LTE BAND 4	21
4.5.3 LTE BAND 5	22
4.5.4 LTE BAND 7	23
4.5.5 LTE BAND 12	24
4.5.6 LTE BAND 17	25
4.5.7 LTE BAND 66	26
5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION	31
5.1 REFERENCE DOCUMENTS FOR TESTING	31
5.2 ERP OR EIRP	31
5.2.1 LTE BAND 2	32
5.2.2 LTE BAND 4	33
5.2.3 LTE BAND 5	34
5.2.4 LTE BAND 7	34
5.2.5 LTE BAND 12	35
5.2.6 LTE BAND 17	35
5.2.7 LTE BAND 66	36
5.3 CONDUCTED OUTPUT POWER	37
5.4 PEAK-TO-AVERAGE RATIO	38
5.4.1 LTE BAND 2	38
5.4.2 LTE BAND 4	41
5.4.3 LTE BAND 5	44
5.4.4 LTE BAND 7	47
5.4.5 LTE BAND 12	50
5.4.6 LTE BAND 17	53
5.4.7 LTE BAND 66	56
5.5 99%&26dB BANDWIDTH	59
5.5.1 LTE BAND 2	59
5.5.2 LTE BAND 4	66
5.5.3 LTE BAND 5	73

5.5.4	LTE BAND 7	78
5.5.5	LTE BAND 12	83
5.5.6	LTE BAND 17	88
5.5.7	LTE BAND 66	91
5.6	BAND EDGE AT ANTENNA TERMINALS	98
5.6.1	LTE BAND 2	99
5.6.2	LTE BAND 4	111
5.6.3	LTE BAND 5	123
5.6.4	LTE BAND 7	131
5.6.5	LTE BAND 12	139
5.6.6	LTE BAND 17	147
5.6.7	LTE BAND 66	151
5.7	SPURIOUS EMISSIONS AT ANTENNA TERMINALS	163
5.7.1	LTE BAND 2	164
5.7.2	LTE BAND 4	170
5.7.3	LTE BAND 5	176
5.7.4	LTE BAND 7	180
5.7.5	LTE BAND 12	184
5.7.6	LTE BAND 17	188
5.7.7	LTE BAND 66	190
5.8	FIELD STRENGTH OF SPURIOUS RADIATION.....	196
5.8.1	LTE BAND 2	197
5.8.2	LTE BAND 4	198
5.8.3	LTE BAND 5	199
5.8.4	LTE BAND 7	200
5.8.5	LTE BAND 12	201
5.8.6	LTE BAND 17	202
5.8.7	LTE BAND 66	203
5.9	FREQUENCY STABILITY	205
5.9.1	LTE BAND 2	205
5.9.2	LTE BAND 4	206
5.9.3	LTE BAND 5	206
5.9.4	LTE BAND 7	207
5.9.5	LTE BAND 12	207
5.9.6	LTE BAND 17	208
5.9.7	LTE BAND 66	208
APPENDIX 1 PHOTOS OF TEST SETUP.....		209
APPENDIX 2 PHOTOS OF EUT CONSTRUCTIONAL DETAILS.....		209

1. GENERAL INFORMATION

1.1 CLIENT INFORMATION

Applicant:	BLU Products, Inc.
Address of Applicant:	10814 NW 33rd St # 100 Doral, FL 33172 ,USA
Manufacturer:	Shenzhen Water World Information Co.,Ltd.
Address of Manufacturer:	Room 201, No.26, Yifenghua Innovation Industrial Park, Xinshi Community, Dalang Subdistrict, Longhua District, Shenzhen

1.2 EUT INFORMATION

1.2.1 General Description of EUT

Product Name:	Mobile Phone	
Model No.:	C5L 2021	
Add. Model No.:	T6	
Trade Mark:	BLU,BOLD	
DUT Stage:	Identical Prototype	
EUT Supports Function:	GSM Bands:	GSM850/1900
	UTRA Bands:	Band II/ Band IV/ Band V
	E-UTRA Bands:	FDD Band 2/ Band 4/ Band 5/ Band 7/ Band 12/ Band 17/ Band 66
	2.4 GHz ISM Band:	IEEE 802.11b/g/n
		Bluetooth V4.2
Sample Received Date:	July 1, 2021	
Sample Tested Date:	July 1, 2021 to August 3, 2021	
Note: The additional model T6 is identical with the test model C5L 2021 except the model number and trade mark for marketing purpose.		

1.2.2 Description of Accessories

Adapter	
Model No.:	US-FC-0705
Input:	100-240 V~50/60 Hz 0.2A
Output:	5.0 V $\pm$ 750mA
DC Cable:	1.2 Meter, Unshielded without ferrite

Battery	
Model No.:	C775444200L
Battery Type:	Lithium-ion Rechargeable Battery
Rated Voltage:	3.8 Vdc
Limited Charge Voltage:	4.35 Vdc
Rated Capacity:	2000 mAh

Earphone	
Cable Type:	Unshielded without ferrite
Length:	1.2 Meter

1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD

Support Networks:	LTE	
Type of Modulation:	LTE Band 2/4/5/7/12/17/66	QPSK,16QAM
Antenna Type:	PIFA Antenna	
Antenna Gain:	LTE Band 2:	1.2 dBi
	LTE Band 4:	1.1 dBi
	LTE Band 5:	-2.0 dBi
	LTE Band 7:	1.8 dBi
	LTE Band 12:	-2.0 dBi
	LTE Band 17:	-2.0 dBi
	LTE Band 66:	1.1 dBi
Normal Test Voltage:	3.8 Vdc	
Extreme Test Voltage:	3.6 to 4.35Vdc	
Extreme Test Temperature:	-10 °C to +55 °C	

Summary of Results:								
Bands	BW	Modulation	Frequency Range	Max RF Output Power (dBm)		EIRP (W)	99% BW (MHz)	Emission Designator
	(MHz)		(MHz)	Conducted (Average)	ERP/EIRP (Average)			
2	1.4	QPSK	1850.7-1909.3	24.02	25.22	0.33266	1.1094	1M11G7D
		16QAM		23.33	24.53	0.28379	1.1152	1M12W7D
	3	QPSK	1851.5-1908.5	23.94	25.14	0.32659	2.7334	2M73G7D
		16QAM		23.97	25.17	0.32885	2.7270	2M73W7D
	5	QPSK	1852.5-1907.5	23.97	25.17	0.32885	4.5385	4M54G7D
		16QAM		23.47	24.67	0.29309	4.5360	4M54W7D
	10	QPSK	1855.0-1905.0	24.09	25.29	0.33806	9.0267	9M03G7D
		16QAM		23.44	24.64	0.29107	9.0256	9M03W7D
	15	QPSK	1857.5-1902.5	24.09	25.29	0.33806	13.559	13M6G7D
		16QAM		23.39	24.59	0.28774	13.545	13M5W7D
	20	QPSK	1860.0-1900.0	24.11	25.31	0.33963	18.091	18M1G7D
		16QAM		23.51	24.71	0.29580	18.152	18M2W7D

Summary of Results:								
Bands	BW	Modulation	Frequency Range	Max RF Output Power (dBm)		EIRP	99% BW	Emission Designator
	(MHz)		(MHz)	Conducted (Average)	ERP/EIRP (Average)	(W)	(MHz)	
4	1.4	QPSK	1710.7-1754.3	23.78	24.88	0.30761	1.1020	1M10G7D
		16QAM		23.05	24.15	0.26002	1.1024	1M10W7D
	3	QPSK	1711.5-1753.5	23.64	24.74	0.29785	2.7278	2M73G7D
		16QAM		23.06	24.16	0.26062	2.7578	2M76W7D
	5	QPSK	1712.5-1752.5	23.79	24.89	0.30832	4.5203	4M52G7D
		16QAM		22.99	24.09	0.25645	4.5428	4M54W7D
	10	QPSK	1715-1750	23.76	24.86	0.30620	9.0177	9M02G7D
		16QAM		22.94	24.04	0.25351	9.0020	9M00W7D
	15	QPSK	1717.5-1747.5	23.72	24.82	0.30339	13.512	13M5G7D
		16QAM		22.92	24.02	0.25235	13.532	13M5W7D
	20	QPSK	1720-1745	23.83	24.93	0.31117	18.039	18M0G7D
		16QAM		23.07	24.17	0.26122	18.055	18M1W7D
5	1.4	QPSK	824.7-848.3	24.22	20.07	0.10162	1.1006	1M10G7D
		16QAM		23.62	19.47	0.08851	1.1057	1M11W7D
	3	QPSK	825.5-847.5	24.29	20.14	0.10328	2.7253	2M73G7D
		16QAM		23.46	19.31	0.08531	2.7233	2M72W7D
	5	QPSK	826.5-846.5	24.19	20.04	0.10093	4.5312	4M53G7D
		16QAM		23.56	19.41	0.08730	4.5362	4M54W7D
	10	QPSK	829-844	24.37	20.22	0.10520	9.0264	9M03G7D
		16QAM		23.63	19.48	0.08872	9.0280	9M03W7D
7	5	QPSK	2502.5-2567.5	22.55	24.35	0.27227	4.5268	4M53G7D
		16QAM		21.84	23.64	0.23121	4.5438	4M54W7D
	10	QPSK	2505-2565	22.58	24.38	0.27416	9.0268	9M03G7D
		16QAM		21.76	23.56	0.22699	9.0173	9M02W7D
	15	QPSK	2507.5-2562.5	22.51	24.31	0.26977	13.483	13M5G7D
		16QAM		21.89	23.69	0.23388	13.504	13M5W7D
	20	QPSK	2510-2560	22.70	24.50	0.28184	18.025	18M0G7D
		16QAM		21.90	23.70	0.23442	18.046	18M0W7D
12	1.4	QPSK	699.7-715.3	23.61	19.46	0.08831	1.0999	1M10G7D
		16QAM		23.12	18.97	0.07889	1.1021	1M10W7D
	3	QPSK	700.5-714.5	23.56	19.41	0.08730	2.7253	2M73G7D
		16QAM		23.12	18.97	0.07889	2.7310	2M73W7D
	5	QPSK	701.5-713.5	23.59	19.44	0.08790	4.5330	4M53G7D
		16QAM		23.13	18.98	0.07907	4.5380	4M54W7D
	10	QPSK	704-711	23.65	19.50	0.08913	9.0177	9M02G7D
		16QAM		23.25	19.10	0.08128	9.0342	9M03W7D

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCC4G-V1.1

Summary of Results:								
Bands	BW	Modulation	Frequency Range	Max RF Output Power (dBm)		EIRP (W)	99% BW (MHz)	Emission Designator
	(MHz)		(MHz)	Conducted (Average)	ERP/EIRP (Average)			
17	5	QPSK	706.5-713.5	23.58	19.43	0.08770	4.5347	4M53G7D
		16QAM		23.14	18.99	0.07925	4.5439	4M54W7D
	10	QPSK	709-711	23.69	19.54	0.08995	9.0281	9M03G7D
		16QAM		23.18	19.03	0.07998	9.0209	9M02W7D
66	1.4	QPSK	1710.7-1779.3	23.56	24.66	0.29242	1.1045	1M10G7W
		16QAM		22.89	23.99	0.25061	1.1097	1M11D7W
	3	QPSK	1711.5-1778.5	23.42	24.52	0.28314	2.7272	2M73G7W
		16QAM		22.90	24.00	0.25119	2.7290	2M73D7W
	5	QPSK	1712.5-1777.5	23.53	24.63	0.29040	4.5177	4M52G7W
		16QAM		22.83	23.93	0.24717	4.5398	4M54D7W
	10	QPSK	1715-1775	23.58	24.68	0.29376	8.9996	9M00G7W
		16QAM		22.78	23.88	0.24434	9.0093	9M01D7W
	15	QPSK	1717.5-1772.5	23.58	24.68	0.29376	13.519	13M5G7W
		16QAM		22.82	23.92	0.24660	13.520	13M5D7W
	20	QPSK	1720-1770	23.60	24.70	0.29512	18.081	18M1G7W
		16QAM		22.91	24.01	0.25177	18.055	18M1D7W

1.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested with associated equipment below.

1) Support Cable

Cable No.	Description	Connector	Length	Supplied by
1	Antenna Cable	SMA	0.3 Meter	UnionTurst

1.5 TEST LOCATION

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Telephone: +86 (0) 755 2823 0888

Fax: +86 (0) 755 2823 0886

1.6 TEST FACILITY

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L9069

The measuring equipment utilized to perform the tests documented in this report has been calibrated once a year or in accordance with the manufacturer's recommendations, and is traceable under the ISO/IEC/EN 17025 to international or national standards. Equipment has been calibrated by accredited calibration laboratories.

A2LA-Lab Certificate No.: 4312.01

Shenzhen UnionTrust Quality and Technology Co., Ltd. has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025: 2005 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

ISED Wireless Device Testing Laboratories

CAB identifier: CN0032

FCC Accredited Lab.

Designation Number: CN1194

Test Firm Registration Number: 259480

1.7 DEVIATION FROM STANDARDS

None.

1.8 ABNORMALITIES FROM STANDARD CONDITIONS

None.

1.9 OTHER INFORMATION REQUESTED BY THE CUSTOMER

None.

1.10 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

No.	Item	Measurement Uncertainty
1	Conducted emission 9kHz-150kHz	±3.2 dB
2	Conducted emission 150kHz-30MHz	±2.7 dB
3	Radiated spurious emissions 30MHz-1GHz	± 4.9 dB
4	Radiated spurious emissions 1GHz-18GHz	± 4.8 dB
5	Radiated spurious emissions 18GHz-40GHz	± 5.1 dB
6	Occupied Bandwidth	± 1.86 %
7	DC Supply Voltages	± 0.68 %
8	Temperature	± 0.62 °C
9	Humidity	± 3.9 %
10	Conducted spurious emissions	± 2.7 dB
11	DC Supply Voltages	± 0.68 %
12	AC Supply Voltages	± 1.2 %
13	Radio Frequency	± 6.5 × 10 ⁻⁸
14	RF Power, Conducted	± 0.9 dB

2. TEST SUMMARY

FCC 47 CFR Part 24 Test Cases (Band 2)			
Test Item	Test Requirement	Test Method	Result
Equivalent Isotropic Radiated Power (EIRP)	FCC 47 CFR Part 2.1046(a) & FCC 47 CFR Part 24.232(c)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Conducted Output Power	FCC 47 CFR Part 2.1046(a) & FCC 47 CFR Part 24.232(c)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Peak-to-average ratio	FCC 47 CFR Part 24.232(d)	KDB 971168 D01v03r01	PASS
99%&26dB Bandwidth	FCC 47 CFR Part 2.1049(h) & FCC 47 CFR Part 24.238(b)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Band Edge at antenna terminals	FCC 47 CFR Part 2.1051 & FCC 47 CFR Part 24.238(a)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Spurious emissions at antenna terminals	FCC 47 CFR Part 2.1051 & FCC 47 CFR Part 24.238(a)(b)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Field strength of spurious radiation	FCC 47 CFR Part 2.1053 & FCC 47 CFR Part 24.238(a)(b)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Frequency stability	FCC 47 CFR Part 2.1055 & FCC 47 CFR Part 24.235	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS

FCC 47 CFR Part 27 Test Cases (LTE Band 4 & Band 66)			
Test Item	Test Requirement	Test Method	Result
Equivalent Isotropic Radiated Power (EIRP)	FCC 47 CFR Part 2.1046(a) & FCC 47 CFR Part 27.50(d)(4)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Conducted Output Power	FCC 47 CFR Part 2.1046(a) & FCC 47 CFR Part 27.50(d)(4)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Peak-to-average ratio	FCC 47 CFR Part 27.50(d)(5)	KDB 971168 D01v03r01	PASS
99%&26dB Bandwidth	FCC 47 CFR Part 2.1049(h) & FCC 47 CFR Part 27.53(h)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Band Edge at antenna terminals	FCC 47 CFR Part 27.53(h)(1)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Spurious emissions at antenna terminals	FCC 47 CFR Part 2.1051 & FCC 47 CFR Part 27.53(h)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Field strength of spurious radiation	FCC 47 CFR Part 2.1053 & FCC 47 CFR Part 27.53(h)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Frequency stability	FCC 47 CFR Part 2.1055 & FCC 47 CFR Part 27.54	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS

FCC 47 CFR Part 22 Test Cases (Band 5)			
Test Item	Test Requirement	Test Method	Result
Effective Radiated Power (ERP)	FCC 47 CFR Part 2.1046(a) & FCC 47 CFR Part 22.913(a)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Conducted Output Power	FCC 47 CFR Part 2.1046(a) & FCC 47 CFR Part 22.913(a)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Peak-to-average ratio	FCC 47 CFR Part 22.913(a)	KDB 971168 D01v03r01	PASS
99%&26dB Bandwidth	FCC 47 CFR Part 2.1049(h)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Band Edge at antenna terminals	FCC 47 CFR Part 2.1051 & FCC 47 CFR Part 22.917(a)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Spurious emissions at antenna terminals	FCC 47 CFR Part 2.1051 & FCC 47 CFR Part 22.917(a)(b)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Field strength of spurious radiation	FCC 47 CFR Part 2.1053 & FCC 47 CFR Part 22.917(a)(b)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Frequency stability	FCC 47 CFR Part 2.1055 &	ANSI C63.26-2015 &	PASS

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCC4G-V1.1

	FCC 47 CFR Part 22.355	KDB 971168 D01v03r01	
--	------------------------	----------------------	--

FCC 47 CFR Part 27 Test Cases (LTE Band 7)			
Test Item	Test Requirement	Test Method	Result
Equivalent Isotropic Radiated Power (EIRP)	FCC 47 CFR Part 2.1046(a) & FCC 47 CFR Part 27.50(h)(2)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Conducted Output Power	FCC 47 CFR Part 2.1046(a) & FCC 47 CFR Part 27.50(h)(2)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Peak-to-average ratio	FCC 47 CFR Part 27.50(d)(5)	KDB 971168 D01v03r01	PASS
99%&26dB Bandwidth	FCC 47 CFR Part 2.1049(h)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Band Edge at antenna terminals	FCC 47 CFR Part 27.53(m)(4)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Spurious emissions at antenna terminals	FCC 47 CFR Part 2.1051 & FCC 47 CFR Part 27.53(m)(4)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Field strength of spurious radiation	FCC 47 CFR Part 2.1053 & FCC 47 CFR Part 27.53(m)(4)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Frequency stability	FCC 47 CFR Part 2.1055 & FCC 47 CFR Part 27.54	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS

FCC 47 CFR Part 27 Test Cases (LTE Band 12&17)			
Test Item	Test Requirement	Test Method	Result
Effective Radiated Power (ERP)	FCC 47 CFR Part 2.1046(a) & FCC 47 CFR Part 27.50(c)(10)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Conducted Output Power	FCC 47 CFR Part 2.1046(a) & FCC 47 CFR Part 27.50(c)(10)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Peak-to-average ratio	FCC 47 CFR Part 27.50(d)(5)	KDB 971168 D01v03r01	PASS
99%&26dB Bandwidth	FCC 47 CFR Part 2.1049(h) FCC 47 CFR Part 27.53(g)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Band Edge at antenna terminals	FCC 47 CFR Part 27.53(g)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Spurious emissions at antenna terminals	FCC 47 CFR Part 2.1051 & FCC 47 CFR Part 27.53(g)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Field strength of spurious radiation	FCC 47 CFR Part 2.1053 & FCC 47 CFR Part 27.53(g)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Frequency stability	FCC 47 CFR Part 2.1055 & FCC 47 CFR Part 27.54	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS

3. EQUIPMENT LIST

Radiated Emission Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm dd, yyyy)	Cal. Due date (mm dd, yyyy)
☒	3m SAC	ETS-LINDGREN	3M	N/A	Jan. 22, 2021	Jan. 21, 2024
☒	Receiver	R&S	ESIB26	100114	Nov. 18, 2020	Nov. 17, 2021
☐	Loop Antenna	ETS-LINDGREN	6502	00202525	Nov. 14, 2020	Nov. 13, 2021
☒	Broadband Antenna	ETS-LINDGREN	3142E	00201566	Nov. 14, 2020	Nov. 13, 2021
☒	6dB Attenuator	Talent	RA6A5-N-18	18103001	Nov. 14, 2020	Nov.13, 2021
☒	Double-Ridged Waveguide Horn Antenna (Pre-amplifier)	ETS-LINDGREN	3117-PA	00201541	Apr. 30, 2021	Apr. 29, 2022
☒	Pre-amplifier	ETS-Lindgren	00118385	00201874	Nov. 10, 2020	Nov. 9, 2021
☒	Double-Ridged Waveguide Horn Antenna (Pre-amplifier)	ETS-LINDGREN	3116C-PA	00202652	Nov. 14, 2020	Nov. 13, 2021
☒	Pre-amplifier	ETS-Lindgren	00118384	00202652	Nov. 14, 2020	Nov. 13, 2022
☒	Multi device Controller	ETS-LINDGREN	7006-001	00160105	N/A	N/A
☒	Test Software	Audix	e3	Software Version: 9.160323		

RF Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date (mm dd, yyyy)	Cal. Due date (mm dd, yyyy)
☒	Receiver	R&S	ESR7	1316.3003K07-101181-K3	Nov. 18, 2020	Nov. 17, 2021
☒	EXA Spectrum Analyzer	KEYSIGHT	N9010A	MY51440197	Apr. 22, 2021	Apr. 21, 2022
☒	Wideband Radio Communication Tester	R&S	CMW500	120932	Apr. 22, 2021	Apr. 21, 2022
☒	DC Source	KIKUSUI	PWR400L	LK003024	N/A	N/A
☒	Digital multimeter	FLUKE	15B+	30701460WS15	Nov. 12, 2020	Nov. 11, 2021
☒	Temp & Humidity chamber	Votisch	VT4002	58566133290020	Apr. 22, 2021	Apr. 21, 2022

4. TEST CONFIGURATION

4.1 ENVIRONMENTAL CONDITIONS FOR TESTING


Test Environment	Selected Values During Tests		
Test Condition	Ambient		
	Temperature (°C)	Voltage (V)	Relative Humidity (%)
TN/VN	+15 to +35	3.85	20 to 75
TL/VL	-10	3.6	20 to 75
TH/VL	+55	3.6	20 to 75
TL/VH	-10	4.35	20 to 75
TH/VH	+55	4.35	20 to 75

Remark:


- 1) The EUT just work in such extreme temperature of -10 °C to +55 °C and the extreme voltage of 3.6 V to 4.35 V, so here the EUT is tested in the temperature of -10 °C to +55 °C and the voltage of 3.6 V to 4.35 V.
- 2) VN: Normal Voltage; TN: Normal Temperature;
TL: Low Extreme Test Temperature; TH: High Extreme Test Temperature;
VL: Low Extreme Test Voltage; VH: High Extreme Test Voltage.

4.2 TEST SETUP

4.2.1 For Radiated Emissions test setup

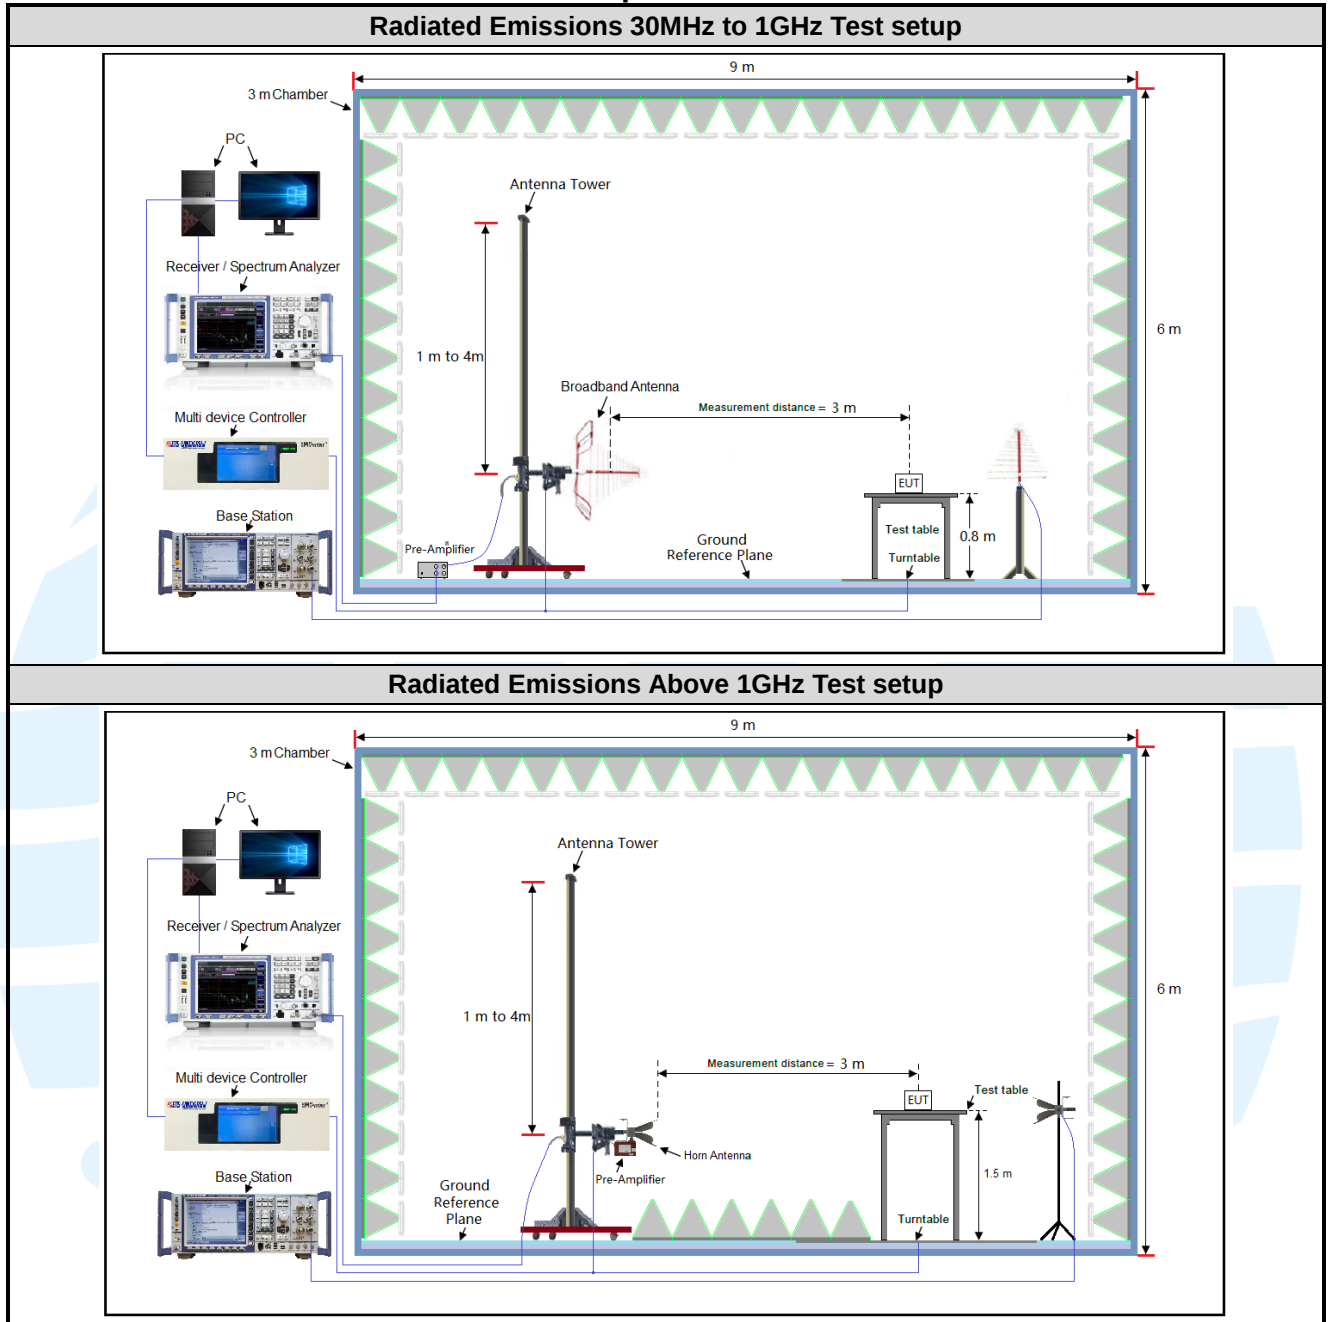

4.2.2 For Conducted RF test setup

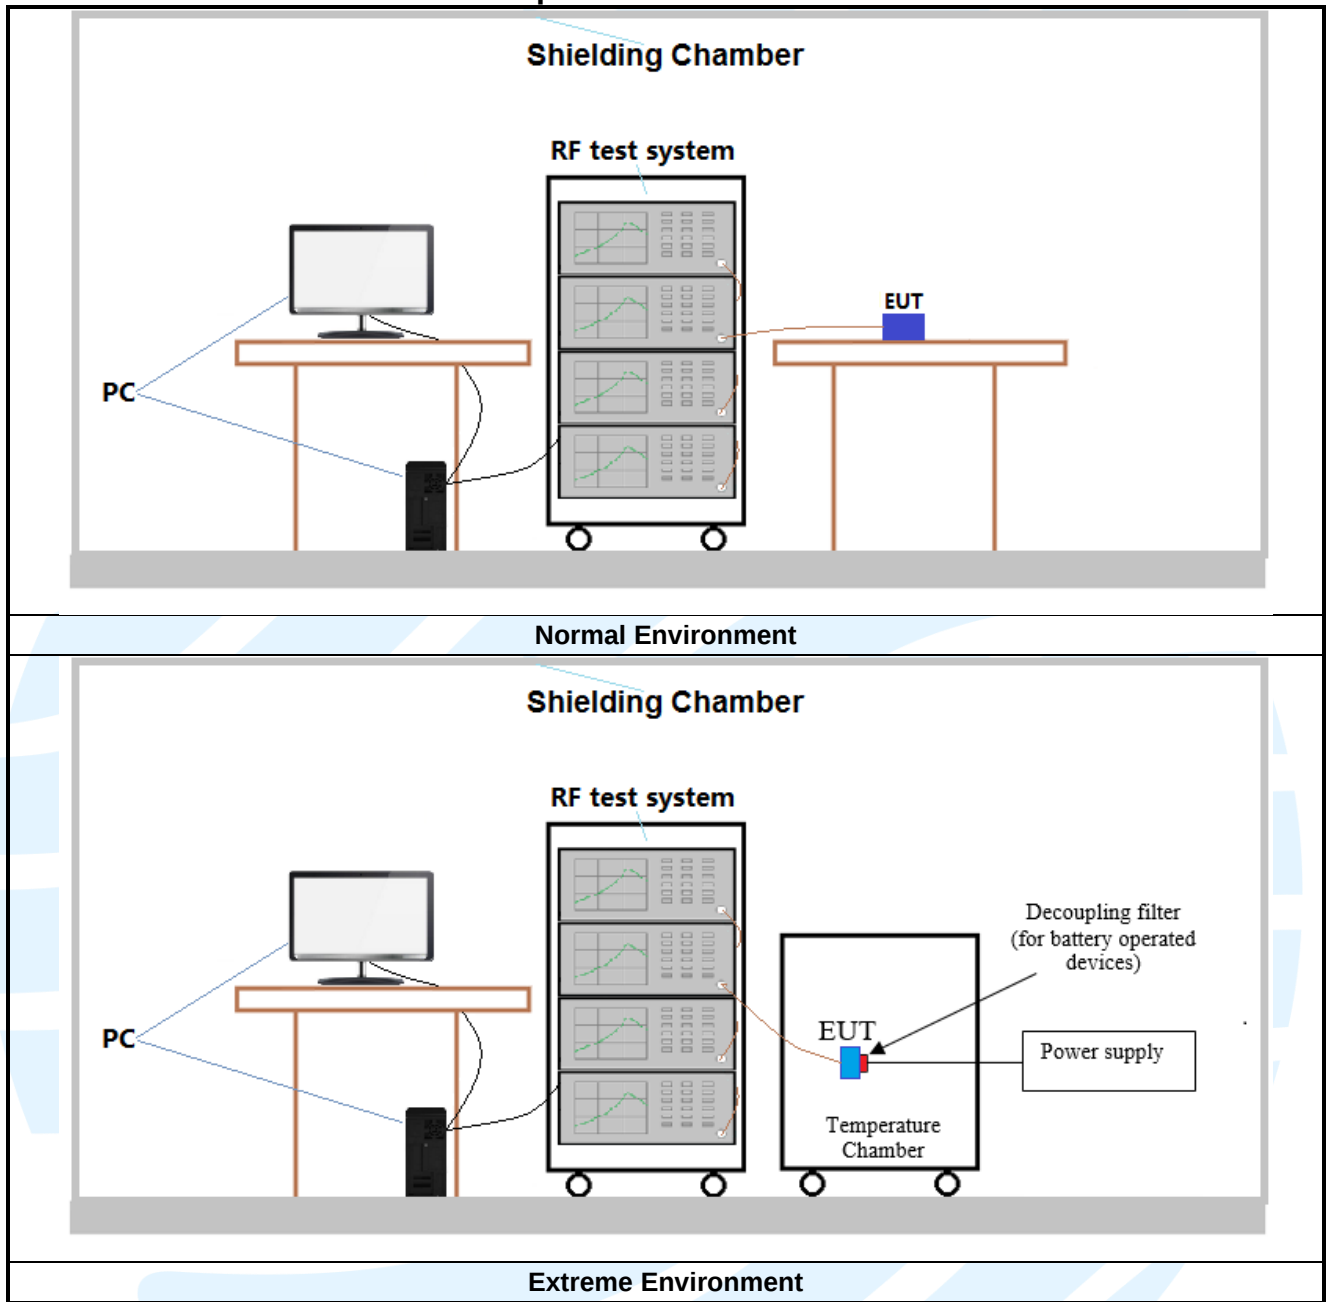

4.3 TEST CHANNELS

Band	Test Frequency ID	Bandwidth (MHz)	Number [UL]	Frequency of Uplink (MHz)
LTE Band 2 TX: 1850-1910MHz	Low Range	1.4	18607	1850.7
		3	18615	1851.5
		5	18625	1852.5
		10	18650	1855
		15	18675	1857.5
		20	18700	1860
	Middle Range	1.4/3/5/10/15/20	18900	1880
	High Range	1.4	19193	1909.3
		3	19185	1908.5
		5	19175	1907.5
		10	19150	1905
		15	19125	1902.5
		20	19100	1900
LTE Band 4 TX: 1710-1755MHz	Low Range	1.4	19957	1710.7
		3	19965	1711.5
		5	19975	1712.5
		10	20000	1715
		15	20025	1717.5
		20	20050	1720
	Middle Range	1.4/3/5/10/ 15/20	20175	1732.5
	High Range	1.4	20393	1754.3
		3	20385	1753.5
		5	20375	1752.5
		10	20350	1750
		15	20325	1747.5
		20	20300	1745
LTE band 5 TX: 824-849MHz	Low Range	1.4	20407	824.7
		3	20415	825.5
		5	20425	826.5
		10	20450	829
	Middle Range	1.4/3/5/10	20525	836.5
	High Range	1.4	20643	848.3
		3	20635	847.5
		5	20625	846.5
		10	20600	844

Band	Test Frequency ID	Bandwidth (MHz)	Number [UL]	Frequency of Uplink (MHz)
LTE Band 7 TX: 2500-2570MHz	Low Range	5	20775	2502.5
		10	20800	2505
		15	20825	2507.5
		20	20850	2510
	Middle Range	5/10/15/20	21100	2535
	High Range	5	21425	2567.5
		10	21400	2565
		15	21375	2562.5
		20	21350	2560
LTE Band 12 TX: 699-716MHz	Low Range	1.4	23017	699.7
		3	23025	700.5
		5	23035	701.5
		10	23060	704
	Middle Range	1.4/3/5/10	23095	707.5
	High Range	1.4	23173	715.3
		3	23165	714.5
		5	23155	713.5
		10	23130	711
LTE Band 17 TX: 704-716MHz	Low Range	5	23755	706.5
		10	23780	709
	Middle Range	5/10	23790	710
	High Range	5	23825	713.5
		10	23800	711
LTE Band 66 TX: 1710-1780MHz	Low Range	1.4	131979	1710.7
		3	131987	1711.5
		5	131997	1712.5
		10	132022	1715
		15	132047	1717.5
		20	132072	1720
	Middle Range	1.4/3/5/10/ 15/20	132322	1745
	High Range	1.4	132665	1779.3
		3	132657	1778.5
		5	132647	1777.5
		10	132622	1775
		15	132597	1772.5
		20	132572	1770

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCC4G-V1.1

4.4 SYSTEM TEST CONFIGURATION

For emissions testing, the equipment under test (EUT) setup to transmit continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, radiated emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario. It was powered by a 3.8V battery. Only the worst case data were recorded in this test report.

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, X/Y/Z axis, and antenna ports.

The worst case was found when positioned as the table below.

Band	Mode	Antenna Port	Worst-case axis positioning
LTE Band 2	1TX	Chain 0	Y axis
LTE Band 4	1TX	Chain 0	Y axis
LTE Band 5	1TX	Chain 0	Y axis
LTE Band 7	1TX	Chain 0	Y axis
LTE Band 12	1TX	Chain 0	Y axis
LTE Band 17	1TX	Chain 0	Y axis
LTE Band 66	1TX	Chain 0	Y axis

All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance. Analyzer resolution is 100 kHz or greater for frequencies below 1000MHz. The resolution is 1 MHz or greater for frequencies above 1000MHz. The spurious emissions more than 20 dB below the permissible value are not reported.

Radiated emission measurement were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

4.5 PRE-SCAN

Pre-scan under all rate at lowest middle and highest channel, find the transmitter power as below.

4.5.1 LTE Band 2

LTE Band 2 Maximum Average Power (dBm)										
Modulation	RB		Test Channel			RB		Test Channel		
	Size	Offset	Low	Mid	High	Size	Offset	Low	Mid	High
Channel Bandwidth: 1.4 MHz						Channel Bandwidth: 3 MHz				
QPSK	1	0	23.70	23.76	23.64	1	0	23.56	23.66	23.56
	1	2	23.83	23.80	23.69	1	7	23.77	23.73	23.64
	1	5	24.02	23.93	23.66	1	14	23.86	23.94	23.53
	3	0	23.83	23.84	23.86	8	0	22.73	22.83	22.96
	3	1	23.60	23.76	23.96	8	3	22.56	22.91	22.90
	3	3	23.69	23.71	23.68	8	7	22.57	22.81	22.82
	6	0	22.59	22.80	22.92	15	0	22.58	22.66	22.87
16QAM	1	0	23.08	22.73	23.19	1	0	23.09	22.73	23.03
	1	2	23.07	22.70	23.15	1	7	22.99	22.76	23.13
	1	5	23.04	23.03	23.33	1	14	22.95	23.05	23.44
	3	0	22.82	22.83	23.00	8	0	21.71	21.94	21.99
	3	1	22.85	22.85	23.01	8	3	21.81	21.92	21.98
	3	3	22.96	22.83	22.98	8	7	22.02	21.85	21.98
	6	0	21.70	22.00	21.97	15	0	21.83	21.83	22.07
Channel Bandwidth: 5 MHz						Channel Bandwidth: 10 MHz				
QPSK	1	0	23.71	23.68	23.63	1	0	23.65	23.70	23.68
	1	12	23.88	23.63	23.69	1	24	23.93	23.66	23.65
	1	24	23.97	23.93	23.62	1	49	23.93	24.09	23.60
	12	0	22.66	22.79	22.97	25	0	22.81	22.76	22.89
	12	6	22.63	22.84	22.86	25	12	22.57	22.84	22.89
	12	13	22.74	22.75	22.71	25	25	22.63	22.72	22.76
	25	0	22.68	22.70	22.86	50	0	22.63	22.79	22.92
16QAM	1	0	23.02	22.66	23.04	1	0	22.97	22.75	23.21
	1	12	22.89	22.80	23.21	1	24	22.90	22.65	23.24
	1	24	22.97	22.89	23.47	1	49	22.95	22.88	23.44
	12	0	21.81	21.98	21.90	25	0	21.69	21.99	22.06
	12	6	21.73	21.90	22.10	25	12	21.82	21.94	21.94
	12	13	22.05	21.74	21.98	25	25	21.98	21.87	21.87
	25	0	21.80	21.88	22.09	50	0	21.66	21.90	22.09
Channel Bandwidth: 15 MHz						Channel Bandwidth: 20 MHz				
QPSK	1	0	23.64	23.75	23.63	1	0	23.72	23.81	23.75
	1	37	23.75	23.77	23.64	1	50	23.95	23.81	23.75
	1	74	24.04	24.09	23.59	1	99	24.05	24.11	23.72
	37	0	22.78	22.91	22.86	50	0	22.86	22.95	23.02
	37	19	22.55	22.86	22.96	50	25	22.66	22.93	23.01
	37	39	22.62	22.80	22.73	50	50	22.77	22.87	22.85
	75	0	22.55	22.78	22.81	100	0	22.74	22.82	22.93
16QAM	1	0	22.95	22.74	23.16	1	0	23.10	22.85	23.21
	1	37	23.06	22.72	23.24	1	50	23.08	22.83	23.28
	1	74	23.09	22.93	23.39	1	99	23.14	23.06	23.51
	37	0	21.77	21.96	22.04	50	0	21.87	22.03	22.10
	37	19	21.69	21.92	21.98	50	25	21.88	21.98	22.11
	37	39	22.04	21.91	21.96	50	50	22.07	21.94	22.02
	75	0	21.65	21.82	22.07	100	0	21.85	22.01	22.14

4.5.2 LTE Band 4

LTE Band 4 Maximum Average Power (dBm)										
Modulation	RB		Test Channel			RB		Test Channel		
	Size	Offset	Low	Mid	High	Size	Offset	Low	Mid	High
Channel Bandwidth: 1.4 MHz						Channel Bandwidth: 3 MHz				
QPSK	1	0	23.78	23.52	23.72	1	0	23.64	23.42	23.64
	1	2	23.50	23.64	2.28	1	7	23.44	23.57	2.23
	1	5	23.61	23.43	23.31	1	14	23.45	23.44	23.18
	3	0	23.48	23.49	23.31	8	0	22.38	22.48	22.41
	3	1	23.59	23.26	23.31	8	3	22.55	22.41	22.25
	3	3	23.53	23.28	23.31	8	7	22.41	22.38	22.45
	6	0	22.40	22.50	22.36	15	0	22.39	22.36	22.31
16QAM	1	0	23.05	22.34	22.65	1	0	23.06	22.34	22.49
	1	2	22.81	22.32	22.60	1	7	22.73	22.38	22.58
	1	5	22.73	22.37	22.67	1	14	22.64	22.39	22.78
	3	0	22.65	22.46	22.32	8	0	21.54	21.57	21.31
	3	1	22.65	22.46	22.40	8	3	21.61	21.53	21.37
	3	3	22.58	22.51	22.45	8	7	21.64	21.53	21.45
	6	0	21.44	21.61	21.31	15	0	21.57	21.44	21.41
Channel Bandwidth: 5 MHz						Channel Bandwidth: 10 MHz				
QPSK	1	0	23.79	23.44	23.71	1	0	23.73	23.46	23.76
	1	12	23.55	23.47	2.28	1	24	23.60	23.50	2.24
	1	24	23.56	23.43	23.27	1	49	23.52	23.59	23.25
	12	0	22.31	22.44	22.42	25	0	22.46	22.41	22.34
	12	6	22.62	22.34	22.21	25	12	22.56	22.34	22.24
	12	13	22.58	22.32	22.34	25	25	22.47	22.29	22.39
	25	0	22.49	22.40	22.30	50	0	22.44	22.49	22.36
16QAM	1	0	22.99	22.27	22.50	1	0	22.94	22.36	22.67
	1	12	22.63	22.42	22.66	1	24	22.64	22.27	22.69
	1	24	22.66	22.23	22.81	1	49	22.64	22.22	22.78
	12	0	21.64	21.61	21.22	25	0	21.52	21.62	21.38
	12	6	21.53	21.51	21.49	25	12	21.62	21.55	21.33
	12	13	21.67	21.42	21.45	25	25	21.60	21.55	21.34
	25	0	21.54	21.49	21.43	50	0	21.40	21.51	21.43
Channel Bandwidth: 15 MHz						Channel Bandwidth: 20 MHz				
QPSK	1	0	23.72	23.51	23.71	1	0	23.80	23.57	23.83
	1	37	23.42	23.61	2.23	1	50	23.62	23.65	2.34
	1	74	23.63	23.59	23.24	1	99	23.64	23.61	23.37
	37	0	22.43	22.56	22.31	50	0	22.51	22.60	22.47
	37	19	22.54	22.36	22.31	50	25	22.65	22.43	22.36
	37	39	22.46	22.37	22.36	50	50	22.61	22.44	22.48
	75	0	22.36	22.48	22.25	100	0	22.55	22.52	22.37
16QAM	1	0	22.92	22.35	22.62	1	0	23.07	22.46	22.67
	1	37	22.80	22.34	22.69	1	50	22.82	22.45	22.73
	1	74	22.78	22.27	22.73	1	99	22.83	22.40	22.85
	37	0	21.60	21.59	21.36	50	0	21.70	21.66	21.42
	37	19	21.49	21.53	21.37	50	25	21.68	21.59	21.50
	37	39	21.66	21.59	21.43	50	50	21.69	21.62	21.49
	75	0	21.39	21.43	21.41	100	0	21.59	21.62	21.48

4.5.3 LTE Band 5

LTE Band 5 Maximum Average Power (dBm)										
Modulation	RB		Test Channel			RB		Test Channel		
	Size	Offset	Low	Mid	High	Size	Offset	Low	Mid	High
Channel Bandwidth: 1.4 MHz						Channel Bandwidth: 3 MHz				
QPSK	1	0	24.22	24.22	23.98	1	0	24.29	24.24	24.07
	1	2	23.61	23.88	23.94	1	7	23.48	23.90	23.84
	1	5	23.65	24.10	23.78	1	14	23.74	24.04	23.76
	3	0	23.56	23.72	23.59	8	0	22.64	22.58	22.57
	3	1	23.57	23.70	23.53	8	3	22.54	22.59	22.63
	3	3	23.49	23.57	23.77	8	7	22.41	22.58	22.61
	6	0	22.62	22.53	22.54	15	0	22.57	22.54	22.48
16QAM	1	0	23.62	23.10	23.31	1	0	23.46	22.98	23.27
	1	2	23.34	22.92	23.18	1	7	23.44	23.09	23.36
	1	5	23.43	22.91	23.22	1	14	23.46	22.92	23.25
	3	0	22.57	22.75	22.46	8	0	21.45	21.72	21.55
	3	1	22.59	22.59	22.41	8	3	21.52	21.58	21.36
	3	3	22.63	22.73	22.50	8	7	21.60	21.78	21.52
	6	0	21.67	21.52	21.61	15	0	21.74	21.55	21.73
Channel Bandwidth: 5 MHz						Channel Bandwidth: 10 MHz				
QPSK	1	0	24.19	24.12	24.15	1	0	24.37	24.27	24.15
	1	12	23.55	23.96	23.94	1	24	23.63	24.05	24.04
	1	24	23.72	24.09	23.84	1	49	23.76	24.14	23.89
	12	0	22.70	22.67	22.50	25	0	22.73	22.72	22.67
	12	6	22.47	22.73	22.57	25	12	22.63	22.77	22.73
	12	13	22.47	22.66	22.63	25	25	22.53	22.74	22.77
	25	0	22.47	22.55	22.59	50	0	22.67	22.67	22.61
16QAM	1	0	23.56	23.04	23.24	1	0	23.63	23.18	23.43
	1	12	23.45	22.95	23.35	1	24	23.50	23.12	23.37
	1	24	23.44	22.95	23.33	1	49	23.47	23.01	23.40
	12	0	21.53	21.73	21.52	25	0	21.63	21.81	21.61
	12	6	21.62	21.52	21.47	25	12	21.67	21.71	21.56
	12	13	21.66	21.68	21.57	25	25	21.70	21.79	21.65
	25	0	21.57	21.56	21.74	50	0	21.76	21.63	21.77

4.5.4 LTE Band 7

LTE Band 7 Maximum Average Power (dBm)										
Modulation	RB		Test Channel			RB		Test Channel		
	Size	Offset	Low	Mid	High	Size	Offset	Low	Mid	High
Channel Bandwidth: 5 MHz						Channel Bandwidth: 10 MHz				
QPSK	1	0	22.55	22.32	22.45	1	0	22.57	22.22	22.51
	1	12	22.34	22.35	22.17	1	24	22.45	22.34	22.21
	1	24	22.29	22.51	22.18	1	49	22.28	22.58	22.31
	12	0	21.29	21.45	21.37	25	0	21.37	21.47	21.31
	12	6	21.21	21.40	21.30	25	12	21.22	21.31	21.23
	12	13	21.31	21.18	21.33	25	25	21.30	21.17	21.37
	25	0	21.26	21.25	21.24	50	0	21.30	21.11	21.37
16QAM	1	0	21.50	21.23	21.65	1	0	21.54	21.13	21.70
	1	12	21.53	21.73	21.84	1	24	21.42	21.73	21.72
	1	24	21.48	21.75	21.83	1	49	21.45	21.76	21.67
	12	0	20.46	20.59	20.37	25	0	20.44	20.50	20.47
	12	6	20.41	20.57	20.57	25	12	20.51	20.53	20.41
	12	13	20.48	20.36	20.62	25	25	20.47	20.44	20.62
	25	0	20.49	20.36	20.50	50	0	20.43	20.49	20.44
Channel Bandwidth: 15 MHz						Channel Bandwidth: 20 MHz				
QPSK	1	0	22.51	22.26	22.49	1	0	22.70	22.38	22.52
	1	37	22.34	22.45	22.28	1	50	22.52	22.46	22.37
	1	74	22.33	22.45	22.28	1	99	22.33	22.59	22.37
	37	0	21.36	21.39	21.43	50	0	21.47	21.47	21.45
	37	19	21.34	21.34	21.23	50	25	21.35	21.40	21.35
	37	39	21.45	21.19	21.40	50	50	21.48	21.36	21.40
	75	0	21.20	21.13	21.21	100	0	21.31	21.31	21.39
16QAM	1	0	21.65	21.17	21.69	1	0	21.66	21.27	21.80
	1	37	21.52	21.89	21.89	1	50	21.56	21.90	21.90
	1	74	21.41	21.80	21.72	1	99	21.52	21.86	21.85
	37	0	20.43	20.59	20.52	50	0	20.59	20.63	20.56
	37	19	20.55	20.53	20.52	50	25	20.55	20.59	20.60
	37	39	20.50	20.38	20.44	50	50	20.53	20.54	20.63
	75	0	20.42	20.36	20.47	100	0	20.50	20.51	20.55

4.5.5 LTE Band 12

LTE Band 12 Maximum Average Power (dBm)										
Modulation	RB		Test Channel			RB		Test Channel		
	Size	Offset	Low	Mid	High	Size	Offset	Low	Mid	High
Channel Bandwidth: 1.4 MHz						Channel Bandwidth: 3 MHz				
QPSK	1	0	23.31	23.30	23.15	1	0	23.23	23.35	23.29
	1	2	23.55	23.48	23.45	1	7	23.47	23.47	23.40
	1	5	23.40	23.61	23.60	1	14	23.56	23.55	23.46
	3	0	23.11	23.40	23.34	8	0	22.23	22.42	22.25
	3	1	23.37	23.36	23.17	8	3	22.36	22.20	22.25
	3	3	23.42	23.36	23.28	8	7	22.35	22.36	22.27
16QAM	6	0	22.17	22.30	22.05	15	0	22.24	22.35	22.15
	1	0	22.96	22.40	22.96	1	0	23.03	22.53	22.98
	1	2	23.12	22.59	22.93	1	7	23.12	22.63	22.92
	1	5	22.95	22.50	22.94	1	14	22.92	22.44	23.04
	3	0	22.33	22.18	22.27	8	0	21.36	21.25	21.19
	3	1	22.42	22.36	22.21	8	3	21.33	21.50	21.14
16QAM	3	3	22.22	22.48	22.17	8	7	21.22	21.50	21.31
	6	0	21.31	21.56	21.20	15	0	21.32	21.43	21.21
Channel Bandwidth: 5 MHz						Channel Bandwidth: 10 MHz				
QPSK	1	0	23.24	23.17	23.13	1	0	23.32	23.36	23.33
	1	12	23.46	23.54	23.54	1	24	23.65	23.57	23.58
	1	24	23.59	23.48	23.44	1	49	23.60	23.63	23.61
	12	0	22.29	22.49	22.21	25	0	22.30	22.50	22.38
	12	6	22.35	22.29	22.17	25	12	22.43	22.37	22.26
	12	13	22.32	22.38	22.40	25	25	22.48	22.38	22.44
16QAM	25	0	22.25	22.29	22.11	50	0	22.34	22.40	22.19
	1	0	22.93	22.50	22.84	1	0	23.06	22.58	22.99
	1	12	23.13	22.66	22.81	1	24	23.25	22.68	22.97
	1	24	22.86	22.49	22.86	1	49	23.00	22.59	23.06
	12	0	21.42	21.27	21.34	25	0	21.49	21.34	21.36
	12	6	21.31	21.47	21.31	25	12	21.44	21.52	21.32
16QAM	12	13	21.29	21.43	21.16	25	25	21.40	21.51	21.33
	25	0	21.29	21.48	21.16	50	0	21.34	21.57	21.32

4.5.6 LTE Band 17

LTE Band 17 Maximum Average Power (dBm)										
Modulation	RB		Test Channel			RB		Test Channel		
	Size	Offset	Low	Mid	High	Size	Offset	Low	Mid	High
Channel Bandwidth: 5 MHz						Channel Bandwidth: 10 MHz				
QPSK	1	0	23.23	23.29	23.21	1	0	23.39	23.32	23.37
	1	12	23.33	23.35	23.49	1	24	23.36	23.51	23.57
	1	24	23.34	23.32	23.58	1	49	23.50	23.48	23.69
	12	0	22.30	22.21	22.33	25	0	22.50	22.35	22.35
	12	6	22.34	22.20	22.09	25	12	22.40	22.26	22.23
	12	13	22.30	22.14	22.26	25	25	22.32	22.30	22.43
	25	0	22.33	22.27	22.30	50	0	22.50	22.34	22.33
16QAM	1	0	23.14	22.46	22.89	1	0	23.18	22.63	23.03
	1	12	22.97	22.52	22.89	1	24	23.04	22.56	22.99
	1	24	22.96	22.38	22.84	1	49	23.15	22.56	23.04
	12	0	21.18	21.49	21.30	25	0	21.30	21.59	21.32
	12	6	21.52	21.42	21.09	25	12	21.57	21.44	21.13
	12	13	21.44	21.35	21.19	25	25	21.51	21.40	21.32
	25	0	21.18	21.23	21.25	50	0	21.24	21.38	21.26

4.5.7 LTE Band 66

LTE Band 66 Maximum Average Power (dBm)										
Modulation	RB		Test Channel			RB		Test Channel		
	Size	Offset	Low	Mid	High	Size	Offset	Low	Mid	High
Channel Bandwidth: 1.4 MHz						Channel Bandwidth: 3 MHz				
QPSK	1	0	23.50	23.45	23.46	1	0	23.36	23.35	23.38
	1	2	23.48	23.34	23.37	1	7	23.42	23.27	23.32
	1	5	23.56	23.20	23.35	1	14	23.40	23.21	23.22
	3	0	23.54	23.33	23.32	8	0	22.44	22.32	22.42
	3	1	23.47	23.30	23.42	8	3	22.43	22.45	22.36
	3	3	23.42	23.29	23.11	8	7	22.30	22.39	22.25
16QAM	6	0	22.44	22.43	22.29	15	0	22.43	22.29	22.24
	1	0	22.89	22.03	22.53	1	0	22.90	22.03	22.37
	1	2	22.82	22.19	22.38	1	7	22.74	22.25	22.36
	1	5	22.77	22.28	22.25	1	14	22.68	22.30	22.36
	3	0	22.66	22.28	22.43	8	0	21.55	21.39	21.42
	3	1	22.65	22.41	22.46	8	3	21.61	21.48	21.43
16QAM	3	3	22.57	22.37	22.43	8	7	21.63	21.39	21.43
	6	0	21.60	21.49	21.29	15	0	21.73	21.32	21.39
Channel Bandwidth: 5 MHz						Channel Bandwidth: 10 MHz				
QPSK	1	0	23.51	23.37	23.45	1	0	23.45	23.39	23.50
	1	12	23.53	23.17	23.37	1	24	23.58	23.20	23.33
	1	24	23.51	23.20	23.31	1	49	23.47	23.36	23.29
	12	0	22.37	22.28	22.43	25	0	22.52	22.25	22.35
	12	6	22.50	22.38	22.32	25	12	22.44	22.38	22.35
	12	13	22.47	22.33	22.14	25	25	22.36	22.30	22.19
16QAM	25	0	22.53	22.33	22.23	50	0	22.48	22.42	22.29
	1	0	22.83	21.96	22.38	1	0	22.78	22.05	22.55
	1	12	22.64	22.29	22.44	1	24	22.65	22.14	22.47
	1	24	22.70	22.14	22.39	1	49	22.68	22.13	22.36
	12	0	21.65	21.43	21.33	25	0	21.53	21.44	21.49
	12	6	21.53	21.46	21.55	25	12	21.62	21.50	21.39
16QAM	12	13	21.66	21.28	21.43	25	25	21.59	21.41	21.32
	25	0	21.70	21.37	21.41	50	0	21.56	21.39	21.41
Channel Bandwidth: 15 MHz						Channel Bandwidth: 20 MHz				
QPSK	1	0	23.44	23.44	23.45	1	0	23.52	23.50	23.57
	1	37	23.40	23.31	23.32	1	50	23.60	23.35	23.43
	1	74	23.58	23.36	23.28	1	99	23.59	23.38	23.41
	37	0	22.49	22.40	22.32	50	0	22.57	22.44	22.48
	37	19	22.42	22.40	22.42	50	25	22.53	22.47	22.47
	37	39	22.35	22.38	22.16	50	50	22.50	22.45	22.28
16QAM	75	0	22.40	22.41	22.18	100	0	22.59	22.45	22.30
	1	0	22.76	22.04	22.50	1	0	22.91	22.15	22.55
	1	37	22.81	22.21	22.47	1	50	22.83	22.32	22.51
	1	74	22.82	22.18	22.31	1	99	22.87	22.31	22.43
	37	0	21.61	21.41	21.47	50	0	21.71	21.48	21.53
	37	19	21.49	21.48	21.43	50	25	21.68	21.54	21.56
16QAM	37	39	21.65	21.45	21.41	50	50	21.68	21.48	21.47
	75	0	21.55	21.31	21.39	100	0	21.75	21.50	21.46

Pre-scan all bandwidth and RB, find worse case mode are chosen to the report, the LTE worse case mode applicability and tested channel detail as below:

Item	Band	Bandwidth(MHz)						Modulation			RB			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	64QAM	1	Half	Full	L	M	H
ERP/EIRP	2	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☐	☐	☒	☒	☒
	4	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☐	☐	☒	☒	☒
	5	☒	☒	☒	☒	--	--	☒	☒	☒	☒	☐	☐	☒	☒	☒
	7	-	-	☒	☒	☒	☒	☒	☒	☒	☒	☐	☐	☒	☒	☒
	12	☒	☒	☒	☒	-	-	☒	☒	☒	☒	☐	☐	☒	☒	☒
	17	-	-	☒	☒	-	-	☒	☒	☒	☒	☐	☐	☒	☒	☒
	66	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☐	☐	☒	☒	☒
Conducted output power	2	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒
	4	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒
	5	☒	☒	☒	☒	--	--	☒	☒	☒	☒	☒	☒	☒	☒	☒
	7	-	-	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒
	12	☒	☒	☒	☒	-	-	☒	☒	☒	☒	☒	☒	☒	☒	☒
	17	-	-	☒	☒	-	-	☒	☒	☒	☒	☒	☒	☒	☒	☒
	66	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒

Item	Band	Bandwidth(MHz)						Modulation			RB			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	64QAM	1	Half	Full	L	M	H
99%&26dB Bandwidth	2	☒	☒	☒	☒	☒	☒	☒	☒	☒	☐	☐	☒	☒	☒	☒
	4	☒	☒	☒	☒	☒	☒	☒	☒	☒	☐	☐	☒	☒	☒	☒
	5	☒	☒	☒	☒	--	--	☒	☒	☒	☐	☐	☒	☒	☒	☒
	7	-	-	☒	☒	☒	☒	☒	☒	☒	☐	☐	☒	☒	☒	☒
	12	☒	☒	☒	☒	-	-	☒	☒	☒	☐	☐	☒	☒	☒	☒
	17	-	-	☒	☒	-	-	☒	☒	☒	☐	☐	☒	☒	☒	☒
	66	☒	☒	☒	☒	☒	☒	☒	☒	☒	☐	☐	☒	☒	☒	☒
peak-to-av erage ratio	2	☐	☐	☐	☐	☐	☒	☒	☒	☒	☒	☐	☒	☒	☐	☒
	4	☐	☐	☐	☐	☐	☒	☒	☒	☒	☒	☐	☒	☒	☐	☒
	5	☐	☐	☐	☒	--	--	☒	☒	☒	☒	☐	☒	☒	☐	☒
	7	-	-	☐	☐	☐	☒	☒	☒	☒	☒	☐	☒	☒	☐	☒
	12	☐	☐	☐	☒	-	-	☒	☒	☒	☒	☐	☒	☒	☐	☒
	17	☐	☐	☐	☒	☐	☐	☒	☒	☒	☒	☐	☒	☒	☐	☒
	17	☐	☐	☐	☒	☐	☐	☒	☒	☒	☒	☐	☒	☒	☐	☒

Item	Band	Bandwidth(MHz)						Modulation			RB			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	64QAM	1	Half	Full	L	M	H
Band Edge at antenna terminals	2	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☐	☒	☒	☐	☒
	4	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☐	☒	☒	☐	☒
	5	☒	☒	☒	☒	--	--	☒	☒	☒	☒	☐	☒	☒	☐	☒
	7	-	-	☒	☒	☒	☒	☒	☒	☒	☒	☐	☒	☒	☐	☒
	12	☒	☒	☒	☒	-	-	☒	☒	☒	☒	☐	☒	☒	☐	☒
	17	-	-	☒	☒	-	-	☒	☒	☒	☒	☐	☒	☒	☐	☒
	66	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☐	☒	☒	☐	☒
Spurious emissions at antenna terminals	2	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☐	☐	☒	☒	☒
	4	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☐	☐	☒	☒	☒
	5	☒	☒	☒	☒	--	--	☒	☒	☒	☒	☐	☐	☒	☒	☒
	7	-	-	☒	☒	☒	☒	☒	☒	☒	☒	☐	☐	☒	☒	☒
	12	☒	☒	☒	☒	-	-	☒	☒	☒	☒	☐	☐	☒	☒	☒
	17	-	-	☒	☒	-	-	☒	☒	☒	☒	☐	☐	☒	☒	☒
	66	☒	☒	☒	☒	☒	☒	☒	☒	☒	☒	☐	☐	☒	☒	☒

Item	Band	Bandwidth(MHz)						Modulation			RB			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	64QAM	1	Half	Full	L	M	H
Field strength of spurious radiation	2	☐	☐	☐	☐	☐	☒	☒	☐	☐	☒	☐	☐	☒	☒	☒
	4	☐	☐	☐	☐	☐	☒	☒	☐	☐	☒	☐	☐	☒	☒	☒
	5	☐	☐	☐	☒	--	--	☒	☐	☐	☒	☐	☐	☒	☒	☒
	7	-	-	☐	☐	☐	☒	☒	☐	☐	☒	☐	☐	☒	☒	☒
	12	☐	☐	☐	☒	-	-	☒	☐	☐	☒	☐	☐	☒	☒	☒
	17	☐	☐	☐	☒	☐	☐	☒	☐	☐	☒	☐	☐	☒	☒	☒
	66	☐	☐	☐	☐	☐	☒	☒	☐	☐	☒	☐	☐	☒	☒	☒
Frequency stability	2	☐	☐	☐	☐	☐	☒	☒	☐	☐	☐	☐	☒	☐	☒	☐
	4	☐	☐	☐	☐	☐	☒	☒	☐	☐	☐	☐	☒	☐	☒	☐
	5	☐	☐	☐	☒	--	--	☒	☐	☐	☐	☐	☒	☐	☒	☐
	7	-	-	☐	☐	☐	☒	☒	☐	☐	☐	☐	☒	☐	☒	☐
	12	☐	☐	☐	☒	-	-	☒	☐	☐	☐	☐	☒	☐	☒	☐
	17	☐	☐	☐	☒	☐	☐	☒	☐	☐	☐	☐	☒	☐	☒	☐
	66	☐	☐	☐	☐	☐	☒	☒	☐	☐	☐	☐	☒	☐	☒	☐
Remark: The mark "☒" means is chosen for testing; The mark "☐" means is not chosen for testing; The mark "-" means is not supported bandwidth																

5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION

5.1 REFERENCE DOCUMENTS FOR TESTING

No.	Identity	Document Title
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations
2	FCC 47 CFR Part 22	Public Mobile Services
3	FCC 47 CFR Part 27	Miscellaneous Wireless Communications Services
4	FCC 47 CFR Part 24	Personal Communications Services
5	ANSI C63.26-2015	American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services
6	KDB 971168 D01	KDB 971168 D01 Power Meas License Digital Systems v03r01

5.2 ERP OR EIRP

Test Requirement: FCC 47 CFR Part 2.1046(a)
LTE Band 2: FCC 47 CFR Part 24.232(c)
LTE Band 4 & LTE Band 66: FCC 47 CFR Part 27.50(d)(4)
LTE Band 5: FCC 47 CFR Part 22.913(a)
LTE Band 7: FCC 47 CFR Part 27.50(h)(2)
LTE Band 12 & Band 17: FCC 47 CFR Part 27.50(c)(10)

Test Method: KDB 971168 D01v03r01 Section 5.6 & ANSI C63.26-2015

Limit:

FCC 47 CFR Part 22.913(a):

The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

FCC 47 CFR Part 24.232(c):

Mobile and portable stations are limited to 2 watts EIRP.

FCC 47 CFR Part 27.50(d)(4):

Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP.

FCC 47 CFR Part 27.50(c)(10):

Portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP.

FCC 47 CFR Part 27.50(h)(2):

Mobile and other user stations. Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

1. Power is given in terms of effective radiated power (ERP).
2. Applicants in the Los Angeles, CA, area who demonstrate a need to serve both the downtown and fringe areas will be permitted to utilize an ERP of 1 kw at the following mountaintop sites: Santiago Park, Sierra Peak, Mount Lukens, and Mount Wilson.
3. Stations with antennas below 305 m (1,000 ft) (AAT) will be restricted to a maximum power of 1 kw (ERP).
4. Licensees in San Diego, CA, will be permitted to utilize an ERP of 500 watts at the following mountaintop sites: Palomar, Otay, Woodson and Miguel.

Test Procedure:

$$\text{ERP or EIRP} = P_{\text{Meas}} + G_T - L_C$$

where:

ERP or EIRP = effective radiated power or equivalent isotropically radiated power, respectively (expressed in the same units as P_{Meas}, typically dBW or dBm);

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCC4G-V1.1

P_{Meas} = measured transmitter output power or PSD, in dBm or dBW;

G_T = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);

1) L_C = signal attenuation in the connecting cable between the transmitter and antenna, in dB.

Test Setup: Refer to section 4.2.1 for details.

Instruments Used: Refer to section 3 for details

Test Mode: Link mode

Test Results: Pass

Test Data: See table below

5.2.1 LTE Band 2

LTE Band 2 Maximum EIRP (dBm)					
Channel	QPSK; RB:1	16QAM; RB:1	64QAM; RB:1	Limit (dBm)	Result
Channel Bandwidth: 1.4MHz					
Lowest	25.22	24.28	/	33.01	Pass
Middle	25.13	24.23	/	33.01	Pass
Highest	25.16	24.53	/	33.01	Pass
Channel Bandwidth: 3MHz					
Lowest	25.06	25.17	/	33.01	Pass
Middle	25.14	25.13	/	33.01	Pass
Highest	24.84	24.89	/	33.01	Pass
Channel Bandwidth: 5MHz					
Lowest	25.17	24.22	/	33.01	Pass
Middle	25.13	24.09	/	33.01	Pass
Highest	24.89	24.67	/	33.01	Pass
Channel Bandwidth: 10MHz					
Lowest	25.13	24.17	/	33.01	Pass
Middle	25.29	24.08	/	33.01	Pass
Highest	24.88	24.64	/	33.01	Pass
Channel Bandwidth: 15MHz					
Lowest	25.24	24.29	/	33.01	Pass
Middle	25.29	24.13	/	33.01	Pass
Highest	24.84	24.59	/	33.01	Pass
Channel Bandwidth: 20MHz					
Lowest	25.25	24.34	/	33.01	Pass
Middle	25.31	24.26	/	33.01	Pass
Highest	24.95	24.71	/	33.01	Pass

5.2.2 LTE Band 4

LTE Band 4 Maximum EIRP (dBm)					
Channel	QPSK; RB:1	16QAM; RB:1	64QAM; RB:1	Limit (dBm)	Result
Channel Bandwidth: 1.4MHz					
Lowest	24.88	24.15	/	30.00	Pass
Middle	24.74	23.61	/	30.00	Pass
Highest	24.82	23.77	/	30.00	Pass
Channel Bandwidth: 3MHz					
Lowest	24.74	24.16	/	30.00	Pass
Middle	24.67	23.49	/	30.00	Pass
Highest	24.74	23.88	/	30.00	Pass
Channel Bandwidth: 5MHz					
Lowest	24.89	24.09	/	30.00	Pass
Middle	24.57	23.52	/	30.00	Pass
Highest	24.81	23.91	/	30.00	Pass
Channel Bandwidth: 10MHz					
Lowest	24.83	24.04	/	30.00	Pass
Middle	24.69	23.46	/	30.00	Pass
Highest	24.86	23.88	/	30.00	Pass
Channel Bandwidth: 15MHz					
Lowest	24.82	24.02	/	30.00	Pass
Middle	24.71	23.45	/	30.00	Pass
Highest	24.81	23.83	/	30.00	Pass
Channel Bandwidth: 20MHz					
Lowest	24.90	24.17	/	30.00	Pass
Middle	24.75	23.56	/	30.00	Pass
Highest	24.93	23.95	/	30.00	Pass

5.2.3 LTE Band 5

LTE Band 5 Maximum ERP (dBm)					
Channel	QPSK; RB:1	16QAM; RB:1	64QAM; RB:1	Limit (dBm)	Result
Channel Bandwidth: 1.4MHz					
Lowest	20.07	19.47	/	38.45	Pass
Middle	20.07	18.95	/	38.45	Pass
Highest	19.83	19.16	/	38.45	Pass
Channel Bandwidth: 3MHz					
Lowest	20.14	19.31	/	38.45	Pass
Middle	20.09	18.94	/	38.45	Pass
Highest	19.92	19.21	/	38.45	Pass
Channel Bandwidth: 5MHz					
Lowest	20.04	19.41	/	38.45	Pass
Middle	19.97	18.89	/	38.45	Pass
Highest	20.00	19.20	/	38.45	Pass
Channel Bandwidth: 10MHz					
Lowest	20.22	19.48	/	38.45	Pass
Middle	20.12	19.03	/	38.45	Pass
Highest	20.00	19.28	/	38.45	Pass

5.2.4 LTE Band 7

LTE Band 7 Maximum EIRP (dBm)					
Channel	QPSK; RB:1	16QAM; RB:1	64QAM; RB:1	Limit (dBm)	Result
Channel Bandwidth: 5MHz					
Lowest	24.35	23.33	/	33.01	Pass
Middle	24.31	23.55	/	33.01	Pass
Highest	24.25	23.64	/	33.01	Pass
Channel Bandwidth: 10MHz					
Lowest	24.37	23.34	/	33.01	Pass
Middle	24.38	23.56	/	33.01	Pass
Highest	24.31	23.52	/	33.01	Pass
Channel Bandwidth: 15MHz					
Lowest	24.31	23.45	/	33.01	Pass
Middle	24.25	23.69	/	33.01	Pass
Highest	24.29	23.69	/	33.01	Pass
Channel Bandwidth: 20MHz					
Lowest	24.50	23.46	/	33.01	Pass
Middle	24.39	23.70	/	33.01	Pass
Highest	24.32	23.70	/	33.01	Pass

5.2.5 LTE Band 12

LTE Band 12 Maximum ERP (dBm)					
Channel	QPSK; RB:1	16QAM; RB:1	64QAM; RB:1	Limit (dBm)	Result
Channel Bandwidth: 1.4MHz					
Lowest	19.40	18.97	/	34.77	Pass
Middle	19.46	18.44	/	34.77	Pass
Highest	19.45	18.81	/	34.77	Pass
Channel Bandwidth: 3MHz					
Lowest	19.41	18.97	/	34.77	Pass
Middle	19.40	18.48	/	34.77	Pass
Highest	19.31	18.89	/	34.77	Pass
Channel Bandwidth: 5MHz					
Lowest	19.44	18.98	/	34.77	Pass
Middle	19.39	18.51	/	34.77	Pass
Highest	19.39	18.71	/	34.77	Pass
Channel Bandwidth: 10MHz					
Lowest	19.50	19.10	/	34.77	Pass
Middle	19.48	18.53	/	34.77	Pass
Highest	19.46	18.91	/	34.77	Pass

5.2.6 LTE Band 17

LTE Band 17 Maximum ERP (dBm)					
Channel	QPSK; RB:1	16QAM; RB:1	64QAM; RB:1	Limit (dBm)	Result
Channel Bandwidth: 5MHz					
Lowest	19.19	18.99	/	34.77	Pass
Middle	19.20	18.37	/	34.77	Pass
Highest	19.43	18.74	/	34.77	Pass
Channel Bandwidth: 10MHz					
Lowest	19.35	19.03	/	34.77	Pass
Middle	19.36	18.48	/	34.77	Pass
Highest	19.54	18.89	/	34.77	Pass

5.2.7 LTE Band 66

LTE Band 66 Maximum EIRP (dBm)					
Channel	QPSK; RB:1	16QAM; RB:1	64QAM; RB:1	Limit (dBm)	Result
Channel Bandwidth: 1.4MHz					
Lowest	24.66	23.99	/	30.00	Pass
Middle	24.55	23.51	/	30.00	Pass
Highest	24.56	23.63	/	30.00	Pass
Channel Bandwidth: 3MHz					
Lowest	24.52	24.00	/	30.00	Pass
Middle	24.45	23.40	/	30.00	Pass
Highest	24.48	23.47	/	30.00	Pass
Channel Bandwidth: 5MHz					
Lowest	24.63	23.93	/	30.00	Pass
Middle	24.47	23.39	/	30.00	Pass
Highest	24.55	23.54	/	30.00	Pass
Channel Bandwidth: 10MHz					
Lowest	24.68	23.88	/	30.00	Pass
Middle	24.49	23.24	/	30.00	Pass
Highest	24.60	23.65	/	30.00	Pass
Channel Bandwidth: 15MHz					
Lowest	24.68	23.92	/	30.00	Pass
Middle	24.54	23.31	/	30.00	Pass
Highest	24.55	23.60	/	30.00	Pass
Channel Bandwidth: 20MHz					
Lowest	24.70	24.01	/	30.00	Pass
Middle	24.60	23.42	/	30.00	Pass
Highest	24.67	23.65	/	30.00	Pass

5.3 CONDUCTED OUTPUT POWER

Test Requirement: FCC 47 CFR Part 2.1046(a)
LTE Band 2: FCC 47 CFR Part 24.232(c)
LTE Band 4 & LTE Band 66: FCC 47 CFR Part 27.50(d)(4)
LTE Band 5: FCC 47 CFR Part 22.913(a)
LTE Band 7: FCC 47 CFR Part 27.50(h)(2)
LTE Band 12 & Band 17: FCC 47 CFR Part 27.50(c)(10)
Test Method: KDB 971168 D01v03r01 & ANSI C63.26-2015
Limit:
FCC 47 CFR Part 22.913(a):
The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

FCC 47 CFR Part 24.232(c):
Mobile and portable stations are limited to 2 watts EIRP.

FCC 47 CFR Part 27.50(d)(4):
Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP.

FCC 47 CFR Part 27.50(c)(10):
Portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP.

FCC 47 CFR Part 27.50(h)(2):
Mobile and other user stations. Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

1. Power is given in terms of effective radiated power (ERP).
2. Applicants in the Los Angeles, CA, area who demonstrate a need to serve both the downtown and fringe areas will be permitted to utilize an ERP of 1 kw at the following mountaintop sites: Santiago Park, Sierra Peak, Mount Lukens, and Mount Wilson.
3. Stations with antennas below 305 m (1,000 ft) (AAT) will be restricted to a maximum power of 1 kw (ERP).
4. Licensees in San Diego, CA, will be permitted to utilize an ERP of 500 watts at the following mountaintop sites: Palomar, Otay, Woodson and Miguel.

Test Procedure:
The EUT was set up for the maximum power with LTE link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

Test Setup: Refer to section 4.2.2 for details.

Instruments Used: Refer to section 3 for details

Test Mode: Link mode

Test Results: Pass

Test Data: [The full result refer to section 4.5 for details.](#)

5.4 PEAK-TO-AVERAGE RATIO

Test Requirement: LTE Band 2: FCC 47 CFR Part 24.232(d)
 LTE Band 4 & LTE Band 66: FCC 47 CFR Part 27.50(d)(5)
 LTE Band 5: FCC 47 CFR Part 22.913(a)
 LTE Band 7: FCC 47 CFR Part 27.50(d)(5)
 LTE Band 12 & Band 17: FCC 47 CFR Part 27.50(d)(5)

Test Method: KDB 971168 D01v03r01 Section 5.7

Limit: In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB

Test Procedure:
 The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer.

- Set resolution/measurement bandwidth $\geq$ signal's occupied bandwidth
- Set the number of counts to a value that stabilizes the measured CCDF curve
- Record the maximum PAPR level associated with a probability of 0.1 %

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

Test Setup: Refer to section 4.2.2 for details.

Instruments Used: Refer to section 3 for details

Test Mode: Link mode

Test Results: Pass

Test Data: See table below

5.4.1 LTE Band 2

LTE Band 2 Peak-to-average ratio (dB)						
Channel	RB Configuration	Channel Bandwidth: 20 MHz			Limit (dB)	Result
		QPSK	16QAM	64QAM		
Lowest	1 RB	2.70	3.61	/	13	Pass
	Full RB	4.82	5.52	/	13	Pass
Middle	1 RB	1.63	2.74	/	13	Pass
	Full RB	4.51	5.23	/	13	Pass
Highest	1 RB	1.92	3.19	/	13	Pass
	Full RB	4.49	5.26	/	13	Pass






5.4.2 LTE Band 4

LTE Band 4 Peak-to-average ratio (dB)						
Channel	RB Configuration	Channel Bandwidth: 20 MHz			Limit (dB)	Result
		QPSK	16QAM	64QAM		
Lowest	1 RB	4.19	5.02	/	13	Pass
	Full RB	5.37	6.13	/	13	Pass
Middle	1 RB	3.52	4.20	/	13	Pass
	Full RB	5.07	5.84	/	13	Pass
Highest	1 RB	3.39	4.30	/	13	Pass
	Full RB	4.92	5.58	/	13	Pass



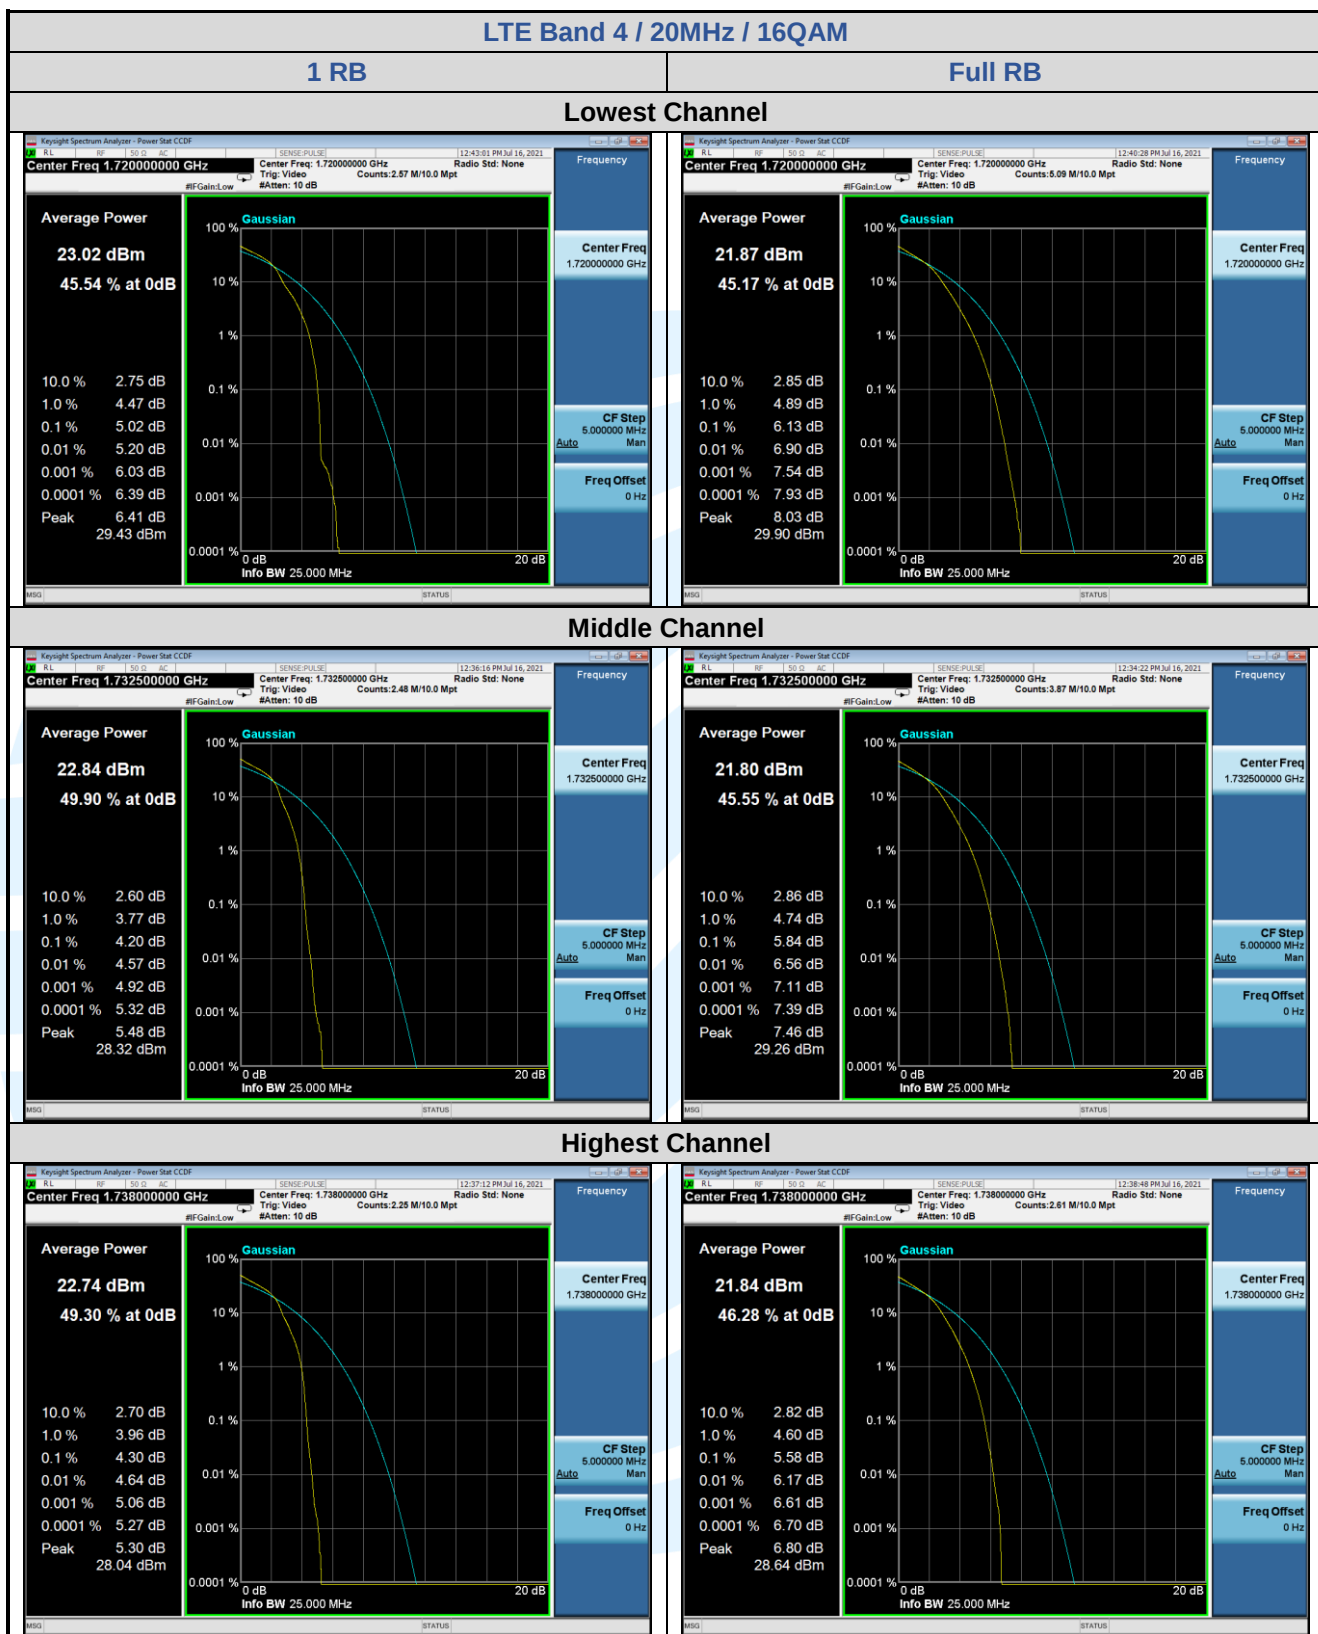

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886


E-mail: info@uttlab.com


<http://www.uttlab.com>

UTTR-RF-FCC4G-V1.1

5.4.3 LTE Band 5

LTE Band 5 Peak-to-average ratio (dB)						
Channel	RB Configuration	Channel Bandwidth: 10 MHz			Limit (dB)	Result
		QPSK	16QAM	64QAM		
Lowest	1 RB	4.78	5.58	/	13	Pass
	Full RB	5.65	6.25	/	13	Pass
Middle	1 RB	4.68	5.89	/	13	Pass
	Full RB	5.55	6.25	/	13	Pass
Highest	1 RB	4.28	4.63	/	13	Pass
	Full RB	5.18	5.99	/	13	Pass

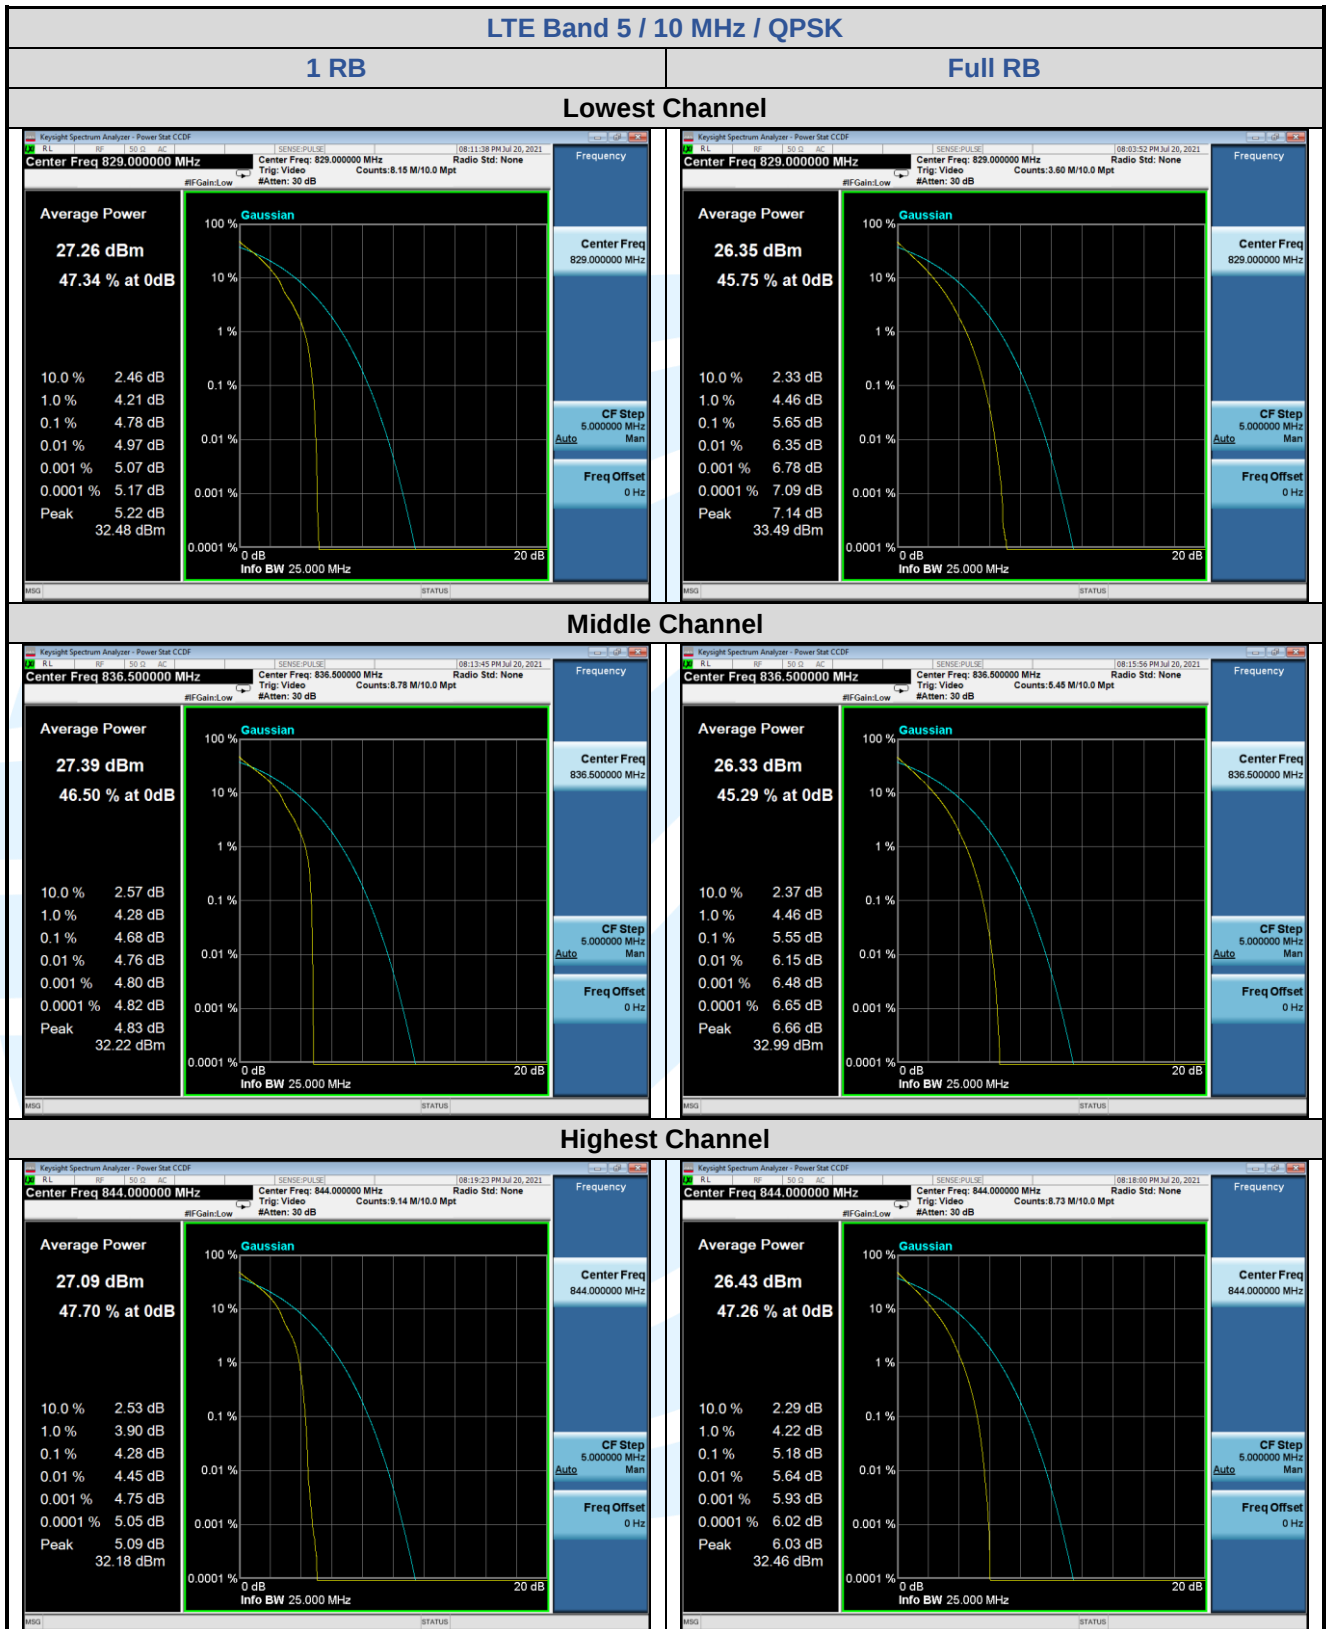

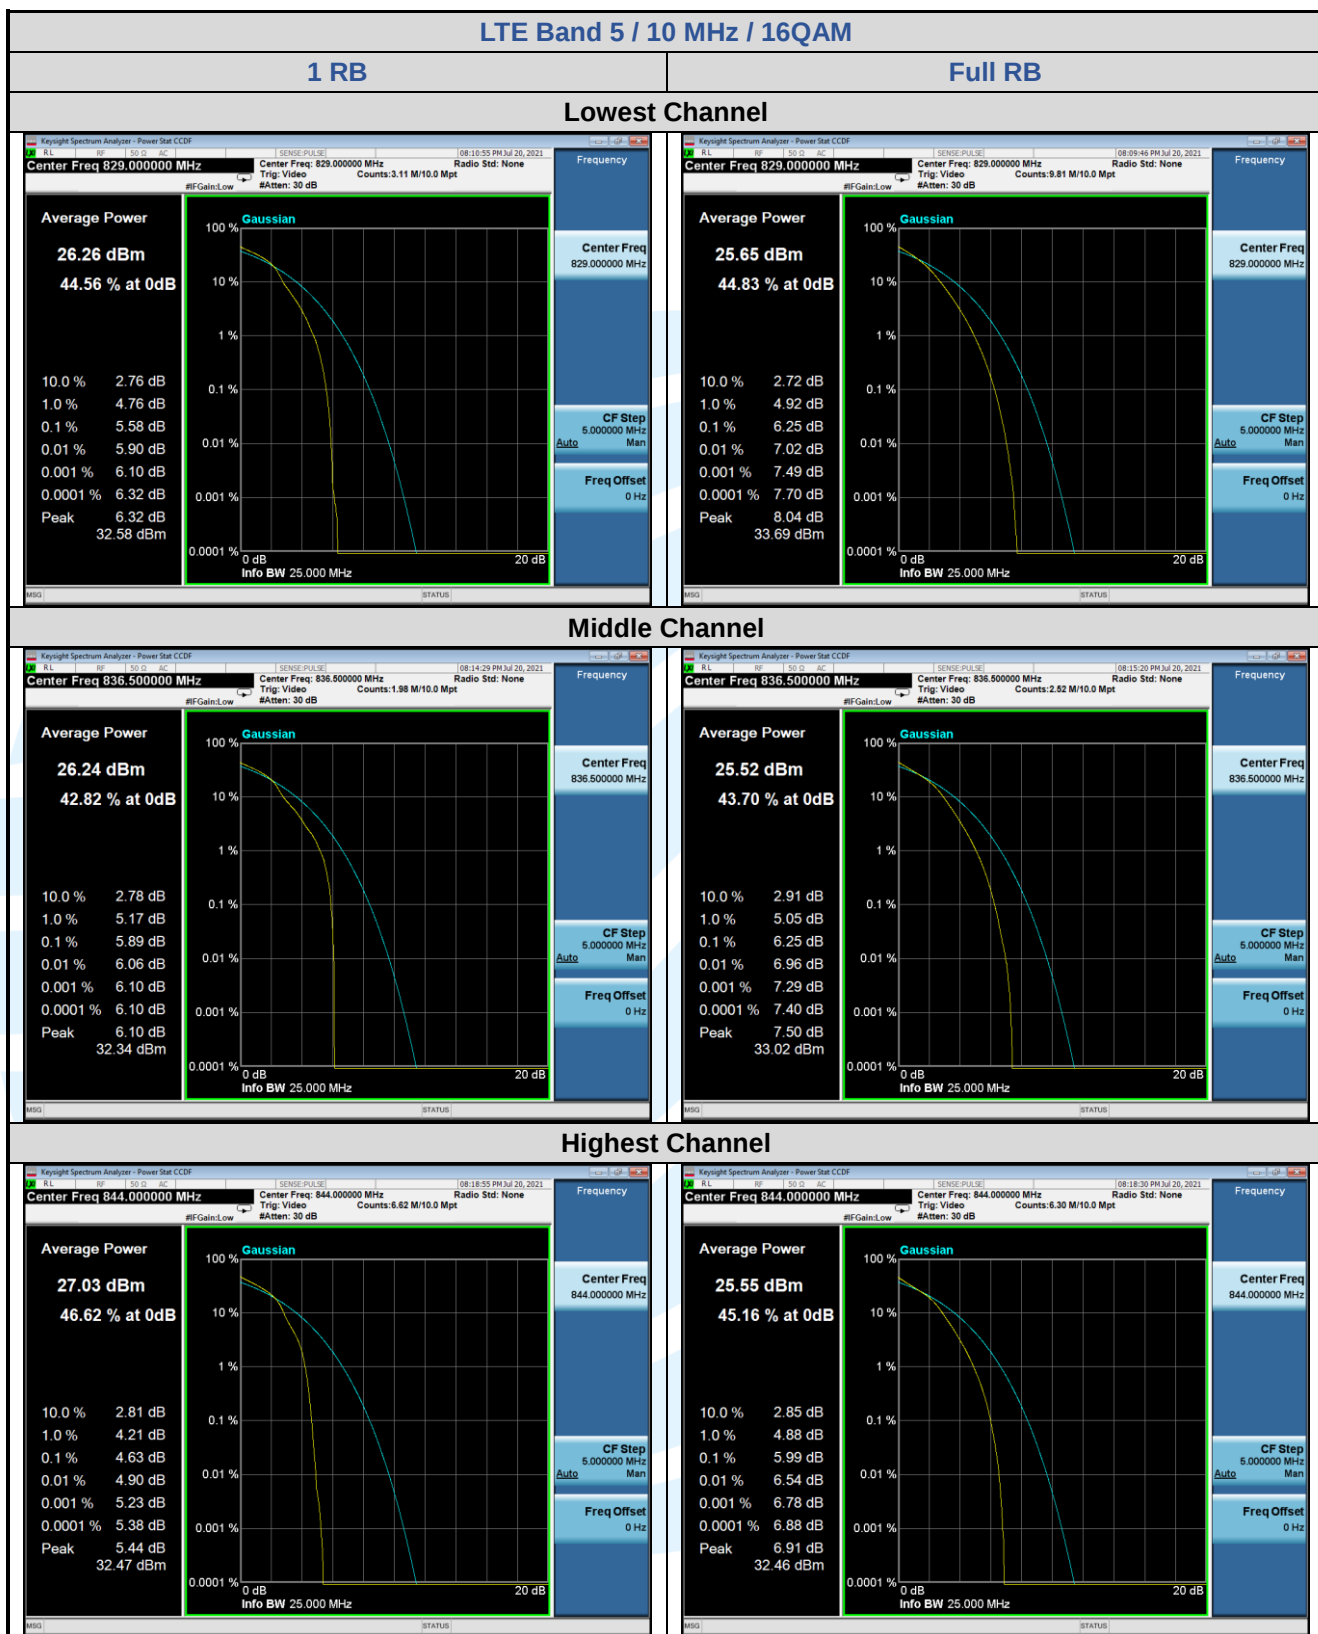

5.4.4 LTE Band 7

LTE Band 7 Peak-to-average ratio (dB)						
Channel	RB Configuration	Channel Bandwidth: 20 MHz			Limit (dB)	Result
		QPSK	16QAM	64QAM		
Lowest	1 RB	3.16	4.29	/	13	Pass
	Full RB	5.23	5.91	/	13	Pass
Middle	1 RB	3.79	4.47	/	13	Pass
	Full RB	5.15	5.75	/	13	Pass
Highest	1 RB	3.67	4.70	/	13	Pass
	Full RB	5.05	5.79	/	13	Pass

