



RF TEST REPORT



Report No.: 17070763-FCC-R2

Supersede Report No.: N/A

Applicant	BLU Products, Inc.	
Product Name	Mobile Phone	
Model No.	C5 LTE	
Serial No.	N/A	
Test Standard	FCC Part 15.247: 2016, ANSI C63.10: 2013	
Test Date	October 16 to November 06, 2017	
Issue Date	November 07, 2017	
Test Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail	
Equipment complied with the specification	<input checked="" type="checkbox"/>	
Equipment did not comply with the specification	<input type="checkbox"/>	
		
Loren Luo Test Engineer	David Huang Checked By	
This test report may be reproduced in full only Test result presented in this test report is applicable to the tested sample only		

Issued by:

SIEMIC (SHENZHEN-CHINA) LABORATORIES

Zone A, Floor 1, Building 2 Wan Ye Long Technology Park

South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108

Phone: +86 0755 2601 4629801 Email: China@siemic.com.cn

Laboratories Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management throughout a project. Our extensive experience with China, Asia Pacific, North America, European, and International compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

Country/Region	Scope
USA	EMC, RF/Wireless, SAR, Telecom
Canada	EMC, RF/Wireless, SAR, Telecom
Taiwan	EMC, RF, Telecom, SAR, Safety
Hong Kong	RF/Wireless, SAR, Telecom
Australia	EMC, RF, Telecom, SAR, Safety
Korea	EMI, EMS, RF, SAR, Telecom, Safety
Japan	EMI, RF/Wireless, SAR, Telecom
Singapore	EMC, RF, SAR, Telecom
Europe	EMC, RF, SAR, Telecom, Safety

Test Report	17070763-FCC-R2
Page	3 of 68

This page has been left blank intentionally.

CONTENTS

1. REPORT REVISION HISTORY.....	5
2. CUSTOMER INFORMATION	5
3. TEST SITE INFORMATION	5
4. EQUIPMENT UNDER TEST (EUT) INFORMATION	6
5. TEST SUMMARY	8
6. MEASUREMENTS, EXAMINATION AND DERIVED RESULTS	9
6.1 ANTENNA REQUIREMENT	9
6.2 CHANNEL SEPARATION	10
6.3 20DB BANDWIDTH.....	14
6.4 PEAK OUTPUT POWER.....	18
6.5 NUMBER OF HOPPING CHANNEL.....	22
6.6 TIME OF OCCUPANCY (DWELL TIME)	24
6.7 BAND EDGE & RESTRICTED BAND	28
6.8 AC POWER LINE CONDUCTED EMISSIONS.....	36
6.9 RADIATED EMISSIONS & RESTRICTED BAND.....	42
ANNEX A. TEST INSTRUMENT	49
ANNEX B. EUT AND TEST SETUP PHOTOGRAPHS	50
ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT	63
ANNEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PARTLIST	67
ANNEX E. DECLARATION OF SIMILARITY.....	68

1. Report Revision History

Report No.	Report Version	Description	Issue Date
17070763-FCC-R2	NONE	Original	November 07, 2017

2. Customer information

Applicant Name	BLU Products, Inc.
Applicant Add	10814 NW 33rd St#100 Doral, FL33172, USA
Manufacturer	BLU Products, Inc.
Manufacturer Add	10814 NW 33rd St#100 Doral, FL33172, USA

3. Test site information

Test Lab A:

Lab performing tests	SIEMIC (Shenzhen-China) LABORATORIES
Lab Address	Zone A, Floor 1, Building 2 Wan Ye Long Technology Park South Side of Zhoushi Road, Bao' an District, Shenzhen, Guangdong China 518108
FCC Test Site No.	535293
IC Test Site No.	4842E-1
Test Software	Radiated Emission Program-To Shenzhen v2.0

Test Lab B:

Lab performing tests	SIEMIC (Nanjing-China) Laboratories
Lab Address	2-1 Longcang Avenue Yuhua Economic and Technology Development Park, Nanjing, China
FCC Test Site No.	694825
IC Test Site No.	4842B-1
Test Software	EZ_EMG(ver.lcp-03A1)

Note: We just perform Radiated Spurious Emission above 18GHz in the test Lab. B.

4. Equipment under Test (EUT) Information

Description of EUT:	Mobile Phone
Main Model:	C5 LTE
Serial Model:	N/A
Date EUT received:	October 16, 2017
Test Date(s):	October 16 to November 06, 2017
Equipment Category :	DSS
Antenna Gain:	GSM850: 0.5dBi PCS1900: 0.8dBi UMTS-FDD Band V: 0.5dBi UMTS-FDD Band II: 0.8dBi LTE Band 5: 0.8dBi LTE Band 7: 1.2dBi Bluetooth/BLE: 0.5dBi WIFI: 0.5dBi GPS: 0.5dBi
Antenna Type:	PIFA antenna
Type of Modulation:	GSM / GPRS: GMSK EGPRS: GMSK,8PSK UMTS-FDD: QPSK LTE Band: QPSK, 16QAM 802.11b/g/n: DSSS, OFDM Bluetooth: GFSK, π /4DQPSK, 8DPSK BLE: GFSK GPS:BPSK FM: FM
RF Operating Frequency (ies):	GSM850 TX: 824.2 ~ 848.8 MHz; RX: 869.2 ~ 893.8 MHz PCS1900 TX: 1850.2 ~ 1909.8 MHz; RX: 1930.2 ~ 1989.8 MHz UMTS-FDD Band V TX: 826.4 ~ 846.6 MHz; RX: 871.4 ~ 891.6 MHz

UMTS-FDD Band II TX:1852.4 ~ 1907.6 MHz;
RX: 1932.4 ~ 1987.6 MHz
LTE Band 5 TX: 826.5 ~ 846.5 MHz; RX : 871.5 ~ 891.5 MHz
LTE Band 7 TX: 2502.5 ~ 2567.5 MHz; RX : 2622.5 ~ 2687.5 MHz
WIFI: 802.11b/g/n(20M): 2412-2462 MHz
WIFI: 802.11n(40M): 2422-2452 MHz
Bluetooth& BLE: 2402-2480 MHz
GPS: 1575.42 MHz
FM: 87.5 MHz - 108 MHz(RX)

Max. Output Power: 5.438dBm

Number of Channels: GSM 850: 124CH
PCS1900: 299CH
UMTS-FDD Band V: 102CH
UMTS-FDD Band II: 277CH
WIFI :802.11b/g/n(20M): 11CH
WIFI :802.11n(40M): 7CH
Bluetooth: 79CH
BLE: 40CH
GPS:1CH

Port: USB Port, Earphone Port

Input Power: Adapter:
Model: US-WW-1002
Input: AC100-240V~50/60Hz, 0.2A
Output: DC 5.0V,1000mA
Battery:
Model: C775840200L
Spec: 3.8V, 2000mAh, 7.60Wh

Trade Name : BLU

GPRS/ EGPRS Multi-slot class 8/10/11/12

FCC ID: YHLBLUC5LTE

5. Test Summary

The product was tested in accordance with the following specifications.

All testing has been performed according to below product classification:

FCC Rules	Description of Test	Result
§15.203	Antenna Requirement	Compliance
§15.247(a)(1)	Channel Separation	Compliance
§15.247(a)(1)	20 dB Bandwidth	Compliance
§15.247(b)(1)	Peak Output Power	Compliance
§15.247(a)(1)(iii)	Number of Hopping Channel	Compliance
§15.247(a)(1)(iii)	Time of Occupancy (Dwell Time)	Compliance
§15.247(d)	Band Edge& Restricted Band	Compliance
§15.207(a)	AC Line Conducted Emissions	Compliance
§15.205, §15.209, §15.247(d)	Radiated Emissions& Restricted Band	Compliance

Measurement Uncertainty

Emissions		
Test Item	Description	Uncertainty
Band Edge& Restricted Band and Radiated Emissions& Restricted Band	Confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2 (for EUTs < 0.5m X 0.5m X 0.5m)	+5.6dB/-4.5dB
-	-	-

6. Measurements, Examination And Derived Results

6.1 Antenna Requirement

Applicable Standard

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this section. The manufacturer may design the unit so that a broken antenna can be replaced by the user, but the user of a standard antenna jack or electrical connector is prohibited. The structure and application of the EUT were analyzed to determine compliance with section §15.203 of the rules. §15.203 state that the subject device must meet the following criteria:

- a. Antenna must be permanently attached to the unit.
- b. Antenna must use a unique type of connector to attach to the EUT.

Unit must be professionally installed, and installer shall be responsible for verifying that the correct antenna is employed with the unit.

And according to FCC 47 CFR section 15.247 (b), if the transmitting antennas of directional gain greater than 6dBi are used, the power shall be reduced by the amount in dB that the directional gain of the antenna exceeds 6 dBi.

Antenna Connector Construction

The EUT has 2 antennas:

A permanently attached PIFA antenna for Bluetooth/BLE/WIF/GPS, the gain is 0.5dBi for Bluetooth/BLE/WIFI/GPS.

A permanently attached PIFA antenna for GSM/PCS/UMTS/ LTE Band II/V/IV/VII, the gain is 0.5dBi for GSM850/ UMTS-FDD Band V, 0.8dBi for PCS1900/UMTS-FDD Band II, the gain is 0.8dBi for LTE Band V, 1.2dBi for LTE Band VII.


The antenna meets up with the ANTENNA REQUIREMENT.

Result: Compliance.

6.2 Channel Separation

Temperature	25 °C
Relative Humidity	57%
Atmospheric Pressure	1024mbar
Test date :	October 24, 2017
Tested By :	Loren Luo

Requirement(s):

Spec	Item	Requirement	Applicable
§ 15.247(a)(1)	a)	Channel Separation < 20dB BW and 20dB BW < 25KHz ; Channel Separation Limit=25KHz Chanel Separation < 20dB BW and 20dB BW > 25kHz ; Channel Separation Limit=2/3 20dB BW	<input checked="" type="checkbox"/>
Test Setup	 <p style="text-align: center;">Spectrum Analyzer EUT</p>		
Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines. Use the following spectrum analyzer settings:</p> <ul style="list-style-type: none"> - The EUT must have its hopping function enabled - Span = wide enough to capture the peaks of two adjacent channels - Resolution (or IF) Bandwidth (RBW) ≥ 1% of the span - Video (or Average) Bandwidth (VBW) ≥ RBW - Sweep = auto - Detector function = peak - Trace = max hold - Allow the trace to stabilize. Use the marker-delta function to determine the separation between the peaks of the adjacent channels. The limit is specified in one of the subparagraphs of this Section. Submit this plot. 		

Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data Yes N/A


Test Plot Yes (See below) N/A

Channel Separation measurement result

Type/ Modulation	CH	CH Frequency (MHz)	CH Separation (MHz)	Limit (MHz)	Result
CH Separation GFSK	Low Channel	2402	1.002	0.689	Pass
	Adjacency Channel	2403			
	Mid Channel	2440	1.002	0.868	Pass
	Adjacency Channel	2441			
	High Channel	2480	1.002	0.872	Pass
	Adjacency Channel	2479			
CH Separation $\pi/4$ DQPSK	Low Channel	2402	1.002	0.681	Pass
	Adjacency Channel	2403			
	Mid Channel	2440	1.002	0.994	Pass
	Adjacency Channel	2441			
	High Channel	2480	1.002	0.867	Pass
	Adjacency Channel	2479			
CH Separation 8DPSK	Low Channel	2402	1.002	0.685	Pass
	Adjacency Channel	2403			
	Mid Channel	2440	1.002	0.866	Pass
	Adjacency Channel	2441			
	High Channel	2480	1.002	0.867	Pass
	Adjacency Channel	2479			

Test Plots


Channel Separation measurement result

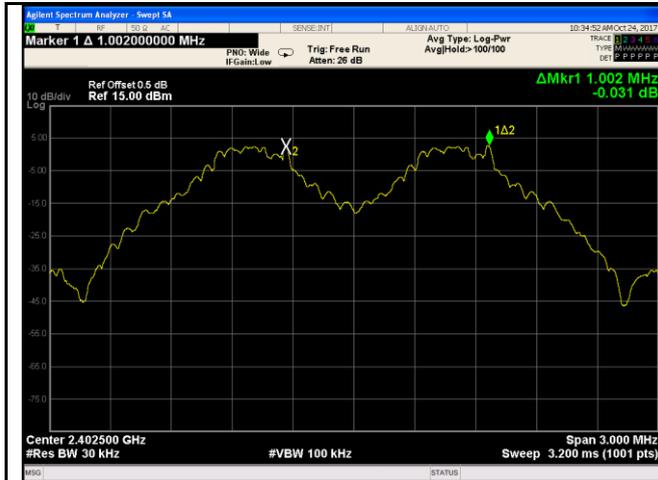

GFSK - Low Channel



GFSK - Middle Channel

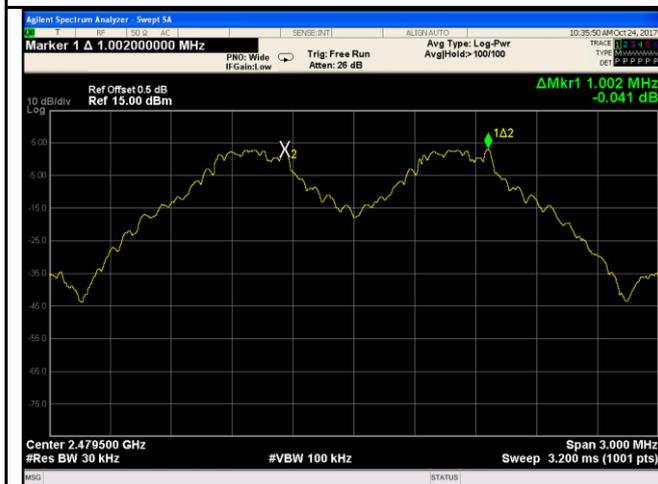

GFSK - High Channel



$\pi/4$ DPSK - Low Channel



$\pi/4$ DQPSK - Middle Channel



$\pi/4$ DQPSK - High Channel




8DPSK - Low Channel



8DPSK - Middle Channel



8DPSK - High Channel




6.3 20dB Bandwidth

Temperature	25 °C
Relative Humidity	57%
Atmospheric Pressure	1024mbar
Test date :	October 24, 2017
Tested By :	Loren Luo

Requirement(s):

Spec	Item	Requirement	Applicable
§15.247(a) (1)	a)	Frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater.	<input checked="" type="checkbox"/>

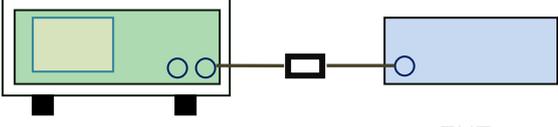Test Setup	 <p style="text-align: center;">Spectrum Analyzer EUT</p>
------------	--

Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines.</p> <p><u>Use the following spectrum analyzer settings:</u></p> <ul style="list-style-type: none"> - Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel - RBW \geq 1% of the 20 dB bandwidth - VBW \geq RBW - Sweep = auto - Detector function = peak - Trace = max hold. - The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference
----------------	--

	marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data Yes N/A


Test Plot Yes (See below) N/A

Measurement result


Modulation	CH	CH Frequency (MHz)	20dB Bandwidth (MHz)	99% Occupied Bandwidth (MHz)
GFSK	Low	2402	1.034	0.8966
	Mid	2441	1.302	1.1679
	High	2480	1.308	1.1878
$\pi/4$ DQPSK	Low	2402	1.022	0.8999
	Mid	2441	1.491	1.2107
	High	2480	1.300	1.1848
8-DPSK	Low	2402	1.027	0.8949
	Mid	2441	1.299	1.1704
	High	2480	1.301	1.1861

Test Plots


20dB Bandwidth measurement result

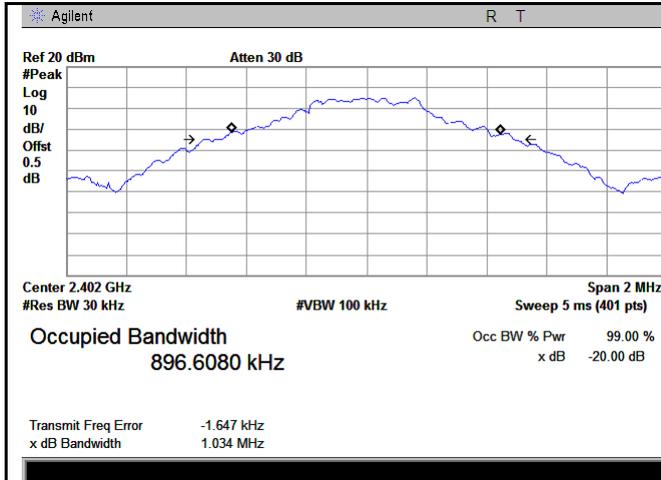


GFSK - Low Channel

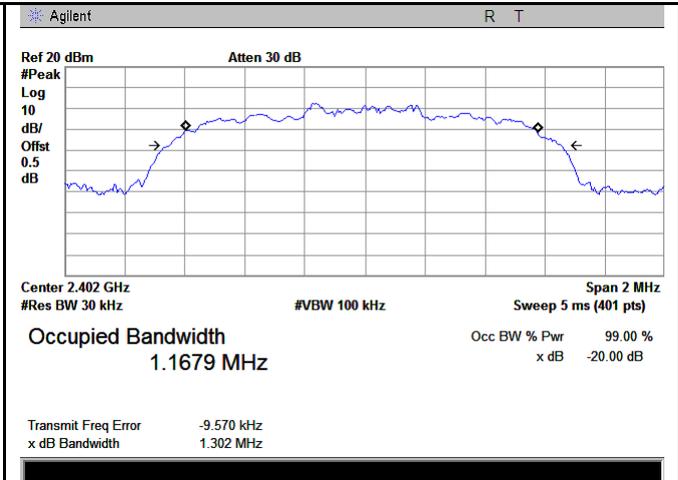


GFSK - Middle Channel

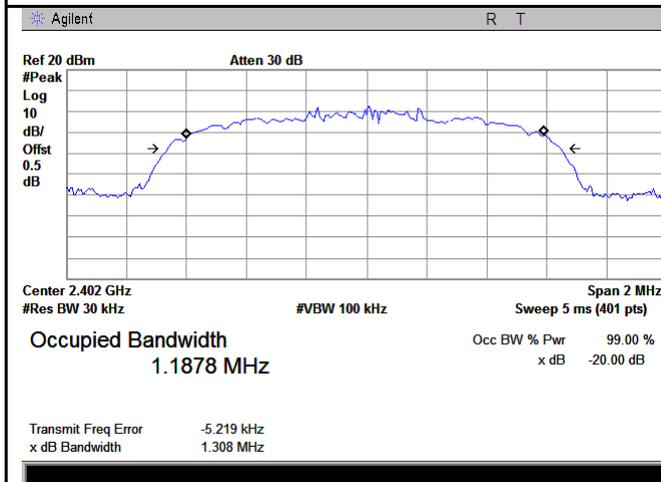


GFSK - High Channel

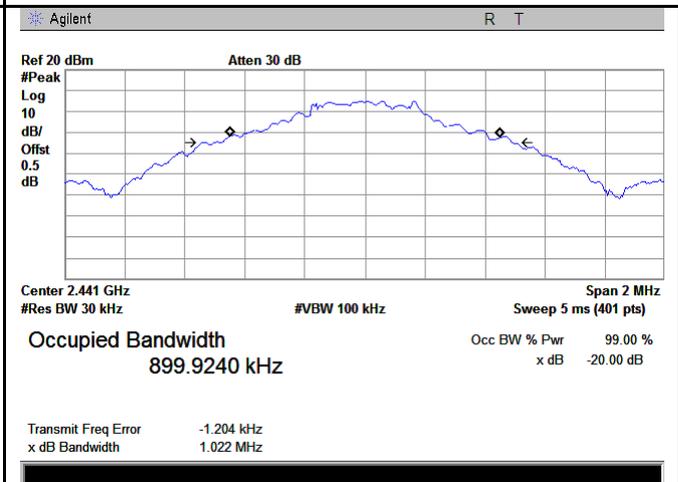


$\pi/4$ DPSK - Low Channel

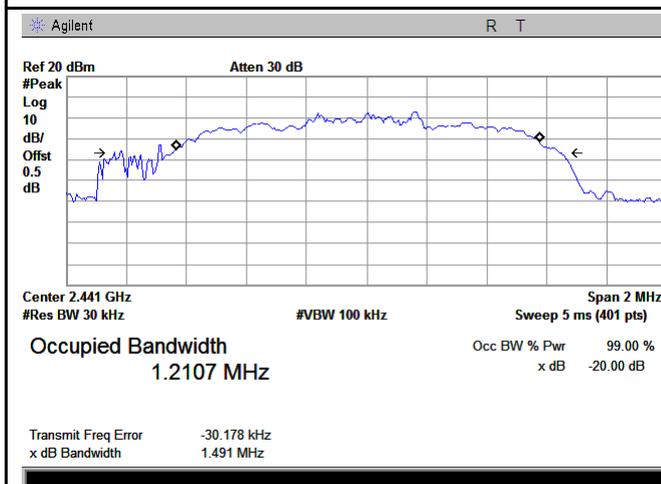


$\pi/4$ DQPSK - Middle Channel

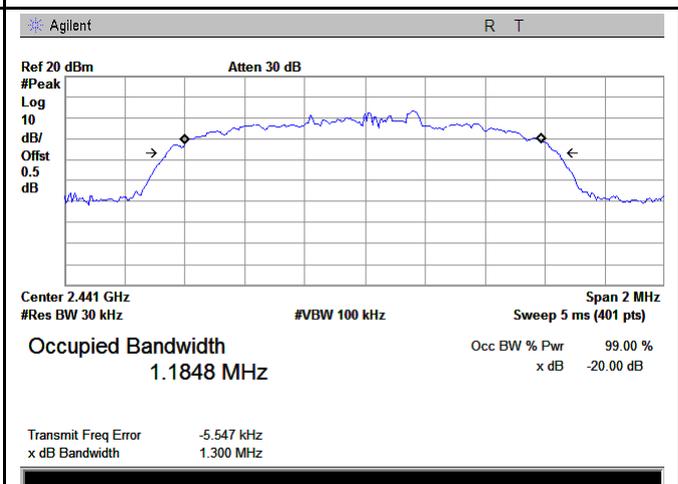


$\pi/4$ DQPSK - High Channel

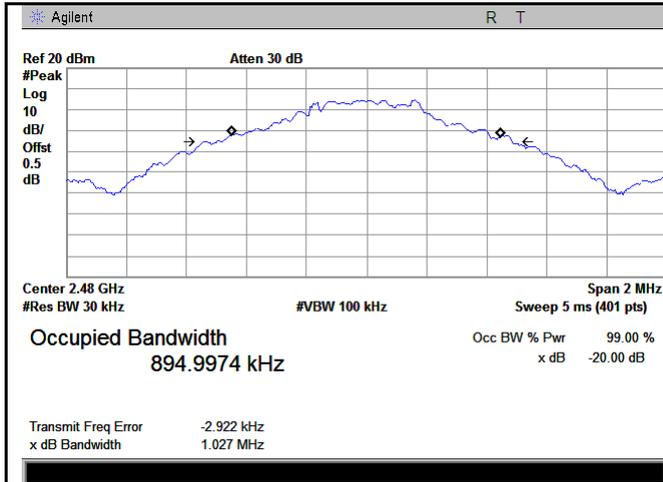

8DPSK - Low Channel

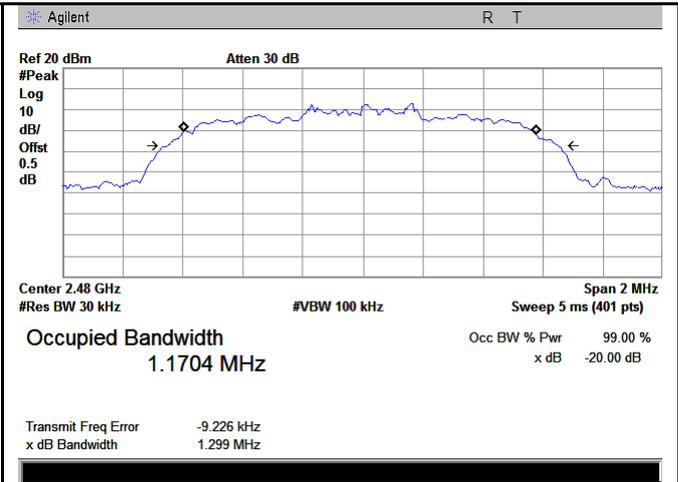

8DPSK - Middle Channel

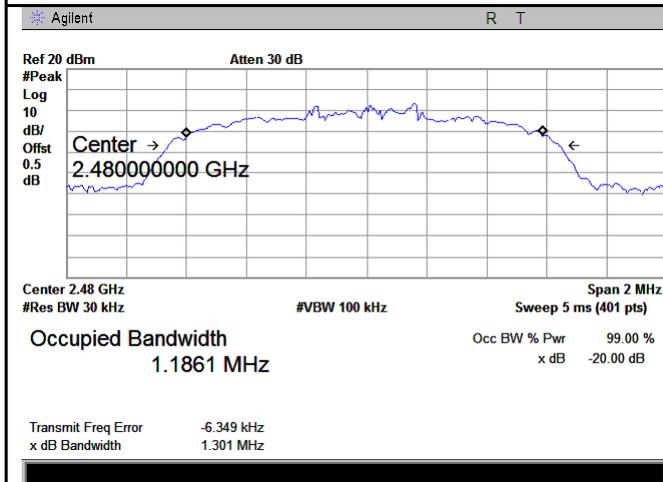


8DPSK - High Channel

6.4 Peak Output Power

Temperature	25 °C
Relative Humidity	57%
Atmospheric Pressure	1024mbar
Test date :	October 24, 2017
Tested By :	Loren Luo

Requirement(s):

Spec	Item	Requirement	Applicable
§15.247(b) (3)	a)	FHSS in 2400-2483.5MHz with ≥ 75 channels: ≤ 1 Watt	<input checked="" type="checkbox"/>
	b)	FHSS in 5725-5850MHz: ≤ 1 Watt	<input type="checkbox"/>
	c)	For all other FHSS in the 2400-2483.5MHz band: ≤ 0.125 Watt.	<input checked="" type="checkbox"/>
	d)	FHSS in 902-928MHz with ≥ 50 channels: ≤ 1 Watt	<input type="checkbox"/>
	e)	FHSS in 902-928MHz with ≥ 25 & < 50 channels: ≤ 0.25 Watt	<input type="checkbox"/>
	f)	DTS in 902-928MHz, 2400-2483.5MHz: ≤ 1 Watt	<input type="checkbox"/>

Test Setup	 <p style="text-align: center;">Spectrum Analyzer EUT</p>
------------	--

Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines.</p> <p><u>Use the following spectrum analyzer settings:</u></p> <ul style="list-style-type: none"> - Span = approximately 5 times the 20 dB bandwidth, centered on a hopping channel - RBW $>$ the 20 dB bandwidth of the emission being measured - VBW \geq RBW - Sweep = auto - Detector function = peak - Trace = max hold - Allow the trace to stabilize.
----------------	---

	<ul style="list-style-type: none"> - Use the marker-to-peak function to set the marker to the peak of the emission. The indicated level is the peak output power (see the note above regarding external attenuation and cable loss). The limit is specified in one of the subparagraphs of this Section. Submit this plot. A peak responding power meter may be used instead of a spectrum analyzer.
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data Yes N/A

Test Plot Yes (See below) N/A

Peak Output Power measurement result


Type	Modulation	CH	Frequency (MHz)	Conducted Power (dBm)	Limit (mW)	Result
Output power	GFSK	Low	2402	5.092	125	Pass
		Mid	2441	5.326	125	Pass
		High	2480	5.438	125	Pass
	$\pi/4$ DQPSK	Low	2402	4.133	125	Pass
		Mid	2441	4.406	125	Pass
		High	2480	4.767	125	Pass
	8-DPSK	Low	2402	4.253	125	Pass
		Mid	2441	4.582	125	Pass
		High	2480	4.798	125	Pass

Test Plots


Output Power measurement result



GFSK Output power - Low CH 2402

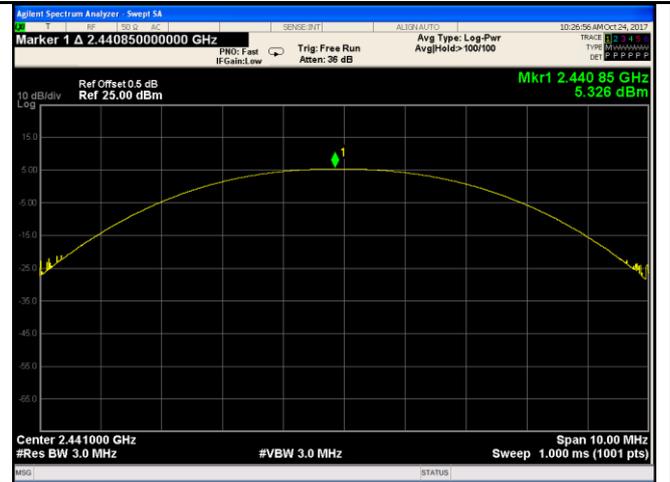


GFSK Output power - Mid CH 2441

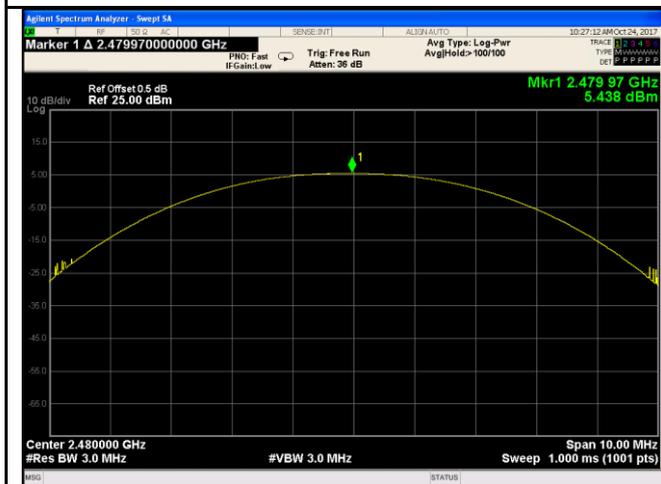


GFSK Output power - High CH 2480




$\pi/4$ DQPSK Output power - Low CH 2402

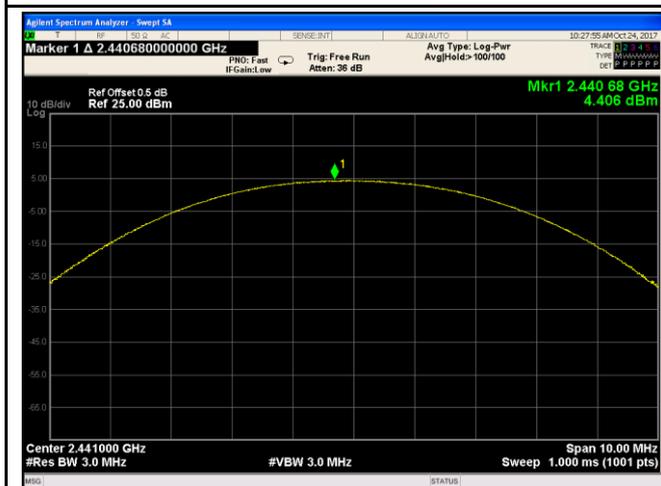

$\pi/4$ DQPSK Output power - Mid CH 2441

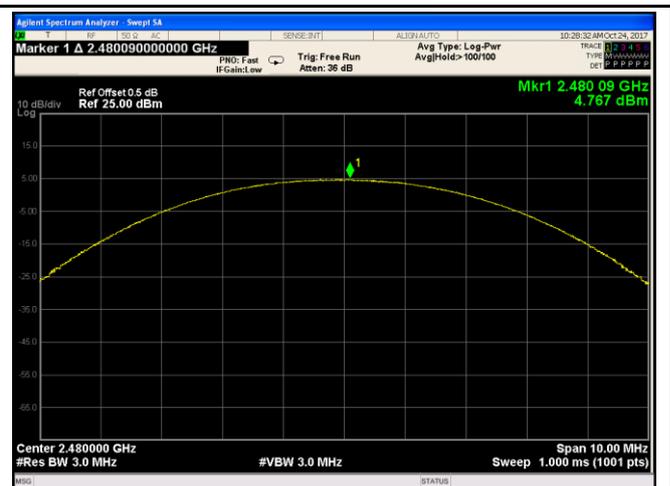

$\pi/4$ DQPSK Output power - High CH 2480

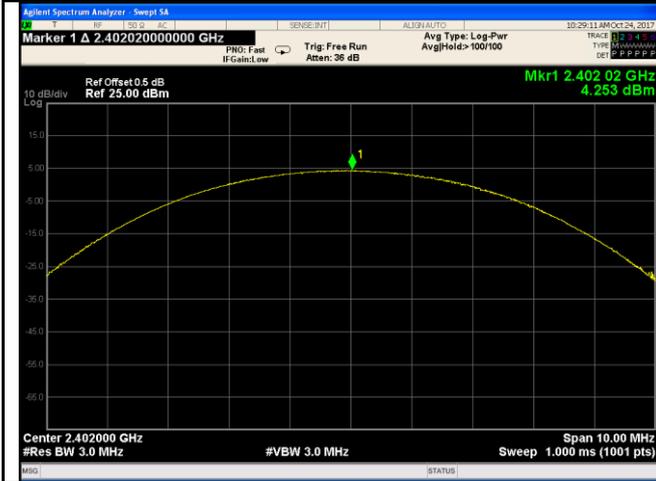

8DPSK Output power - Low CH 2402



8DPSK Output power - Mid CH 2441




8DPSK Output power - High CH 2480



6.5 Number of Hopping Channel

Temperature	26 °C
Relative Humidity	57%
Atmospheric Pressure	1025mbar
Test date :	October 25, 2017
Tested By :	Loren Luo

Requirement(s):

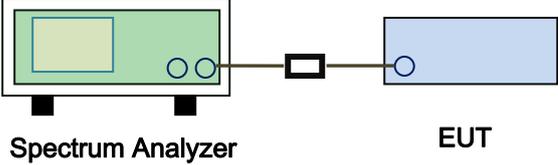Spec	Item	Requirement	Applicable
§15.247(a) (1)(iii)	a)	FHSS in 2400-2483.5MHz ≥ 15 channels	<input checked="" type="checkbox"/>
Test Setup	 <p style="text-align: center;">Spectrum Analyzer EUT</p>		
Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines. <u>Use the following spectrum analyzer settings:</u> The EUT must have its hopping function enabled.</p> <ul style="list-style-type: none"> - Span = the frequency band of operation - RBW ≥ 1% of the span - VBW ≥ RBW - Sweep = auto - Detector function = peak - Trace = max hold - Allow trace to fully stabilize. - It may prove necessary to break the span up to sections, in order to clearly show all of the hopping frequencies. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s). 		
Remark			
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		


Test Data Yes N/A
 Test Plot Yes (See below) N/A

Number of Hopping Channel measurement result


Type	Modulation	Frequency Range	Number of Hopping Channel	Limit
Number of Hopping Channel	GFSK	2400-2483.5	79	15
	$\pi/4$ DQPSK	2400-2483.5	79	15
	8-DPSK	2400-2483.5	79	15

Test Plots


Number of Hopping Channels measurement result

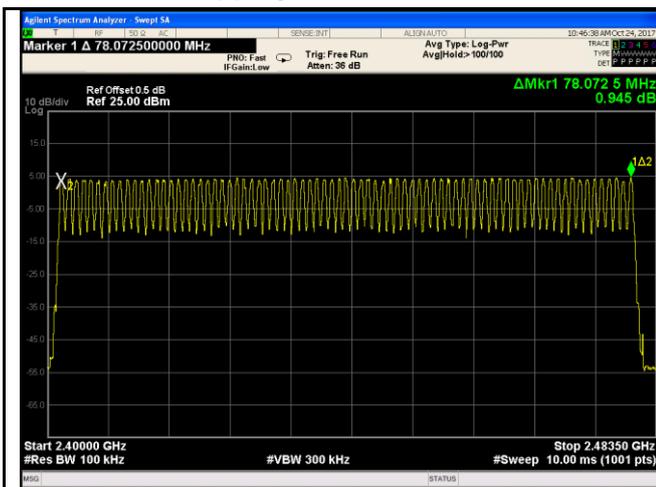

GFSK

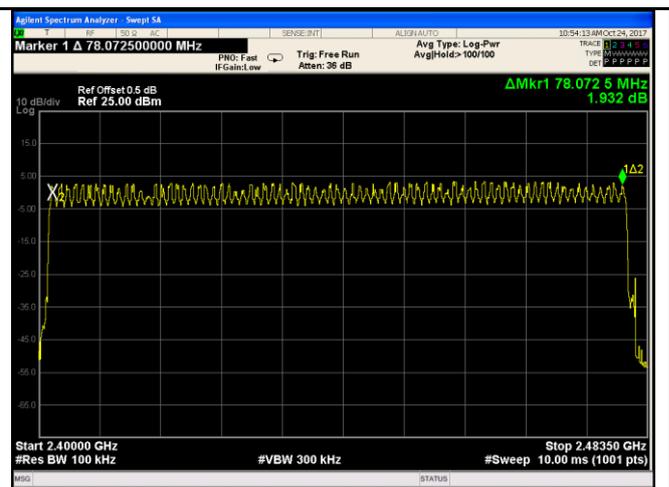

$\pi/4$ DQPSK

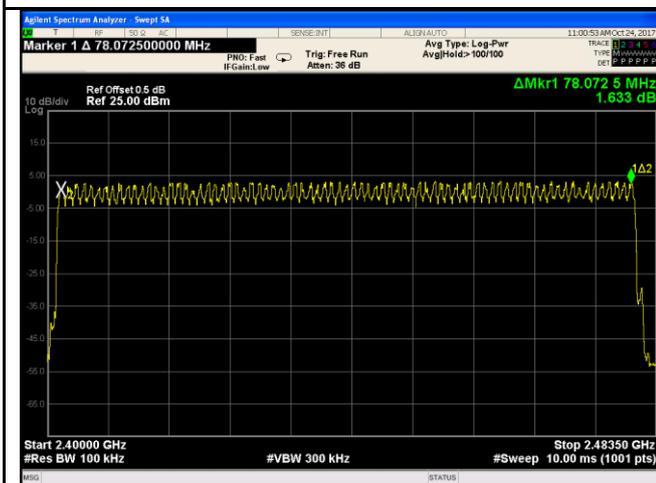


8DPSK

6.6 Time of Occupancy (Dwell Time)

Temperature	25 °C
Relative Humidity	57%
Atmospheric Pressure	1024mbar
Test date :	October 24, 2017
Tested By :	Loren Luo

Requirement(s):

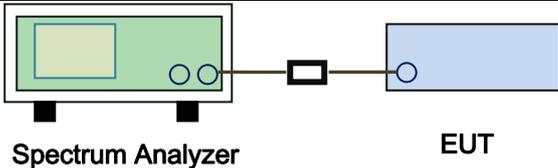Spec	Item	Requirement	Applicable
§15.247(a) (1)(iii)	a)	Dwell Time < 0.4s	<input checked="" type="checkbox"/>
Test Setup	 <p style="text-align: center;">Spectrum Analyzer EUT</p>		
Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines. <u>Use the following spectrum analyzer</u></p> <ul style="list-style-type: none"> - Span = zero span, centered on a hopping channel - RBW = 1 MHz - VBW ≥ RBW - Sweep = as necessary to capture the entire dwell time per hopping channel - Detector function = peak - Trace = max hold - use the marker-delta function to determine the dwell time 		
Remark			
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail		

Test Data Yes N/A


Test Plot Yes (See below) N/A

Dwell Time measurement result


Type	Modulation	CH	Pulse Width (ms)	Dwell Time (ms)	Limit (ms)	Result
Dwell Time	GFSK	Low	2.900	309.333	400	Pass
		Mid	2.910	310.400	400	Pass
		High	2.900	309.333	400	Pass
	π /4 DQPSK	Low	2.910	310.400	400	Pass
		Mid	2.910	310.400	400	Pass
		High	2.910	310.400	400	Pass
	8-DPSK	Low	2.910	310.400	400	Pass
		Mid	2.900	309.333	400	Pass
		High	2.910	310.400	400	Pass
Note: Dwell time=Pulse Time (ms) × (1600 ÷ 6 ÷ 79) ×31.6						

Test Plots

Dwell Time measurement result

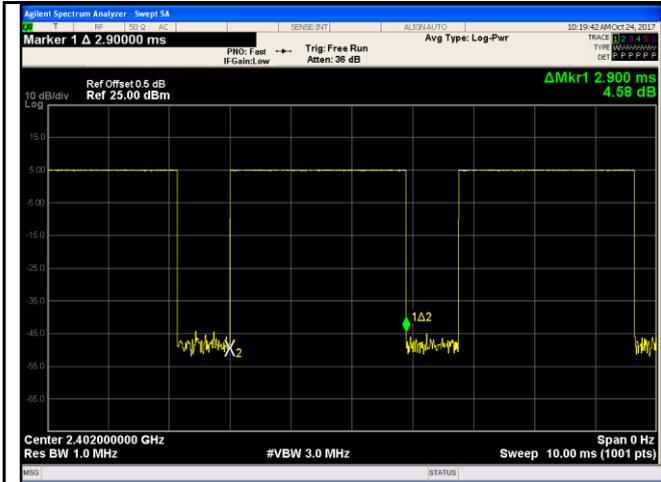


GFSK - Low CH 2402

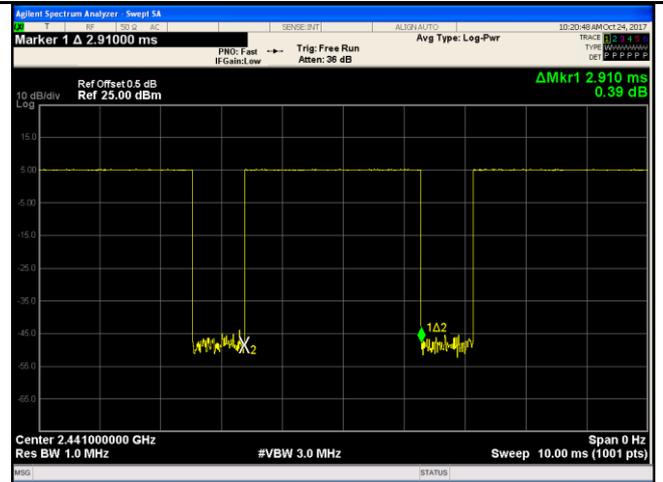


GFSK - Mid CH 2441



GFDK - High CH 2480

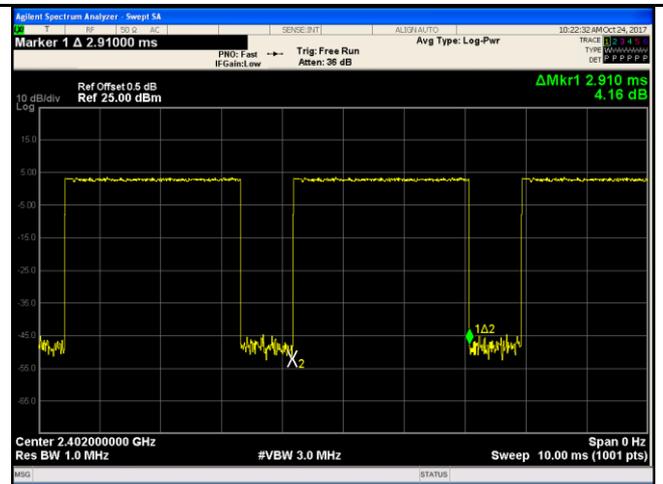

$\pi/4$ DQPSK - Low CH 2402

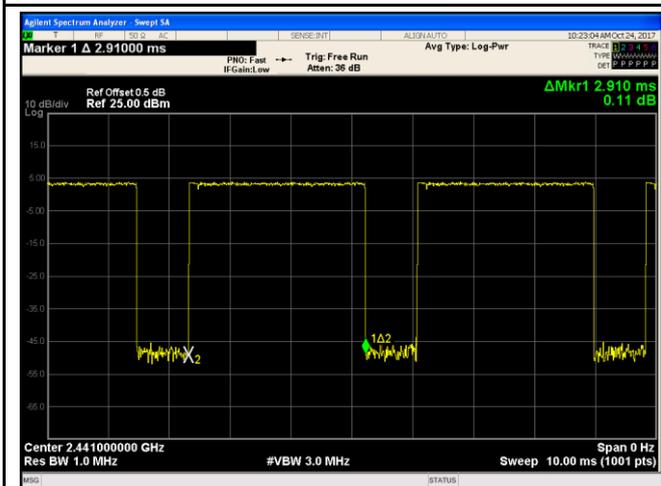

$\pi/4$ DQPSK - Mid CH 2441



$\pi/4$ DQPSK - High CH 2480



8DPSK - Low CH 2402



8DPSK - Mid CH 2441




8DPSK - High CH 2480

6.7 Band Edge & Restricted Band

Temperature	26 °C
Relative Humidity	56%
Atmospheric Pressure	1022mbar
Test date :	October 26, 2017
Tested By :	Loren Luo

Requirement(s):

Spec	Item	Requirement	Applicable
§15.247(a) (1)(iii)	a)	In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement, provided the transmitter demonstrates compliance with the peak conducted power limits. □	<input checked="" type="checkbox"/>

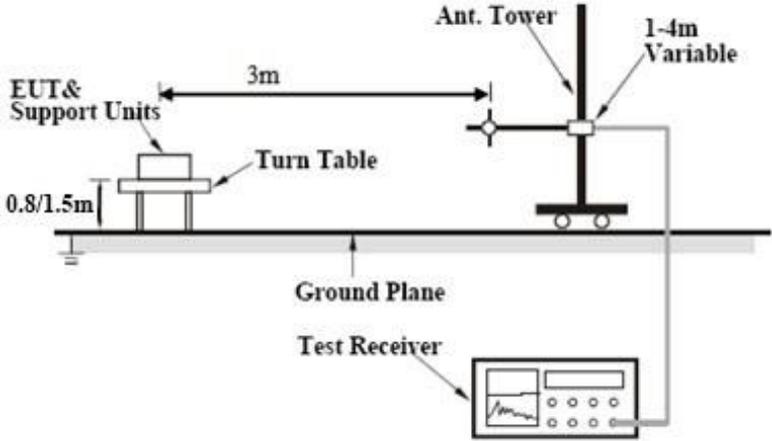Test Setup	
------------	--



Test Procedure	<p>The test follows FCC Public Notice DA 00-705 Measurement Guidelines. Radiated Method Only</p> <ul style="list-style-type: none"> - 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator. - 2. Position the EUT without connection to measurement instrument. Put it on the Rotated table and turn on the EUT and make it operate in transmitting mode. Then set it to Low Channel and High Channel within its operating range,
----------------	--

	<p>and make sure the instrument is operated in its linear range.</p> <ul style="list-style-type: none"> - 3. First, set both RBW and VBW of spectrum analyzer to 100 kHz with a convenient frequency span including 100kHz bandwidth from band edge, check the emission of EUT, if pass then set Spectrum Analyzer as below: <ul style="list-style-type: none"> a. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasiy Peak detection at frequency below 1GHz. b. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz. c. The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz with Peak detection for Average Measurement as below at frequency above 1GHz. - 4. Measure the highest amplitude appearing on spectral display and set it as a reference level. Plot the graph with marking the highest point and edge frequency. - 5. Repeat above procedures until all measured frequencies were complete.
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail


Test Data Yes N/A
Test Plot Yes (See below) N/A

Test Plots

GFSK Mode:

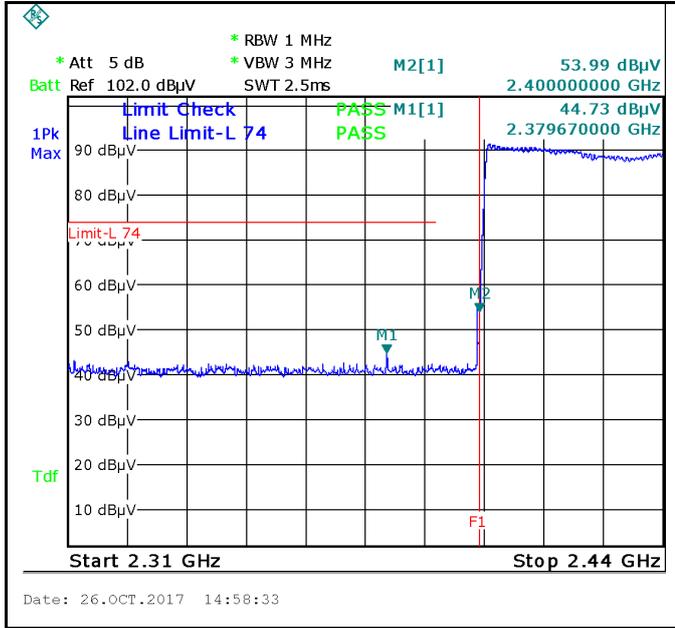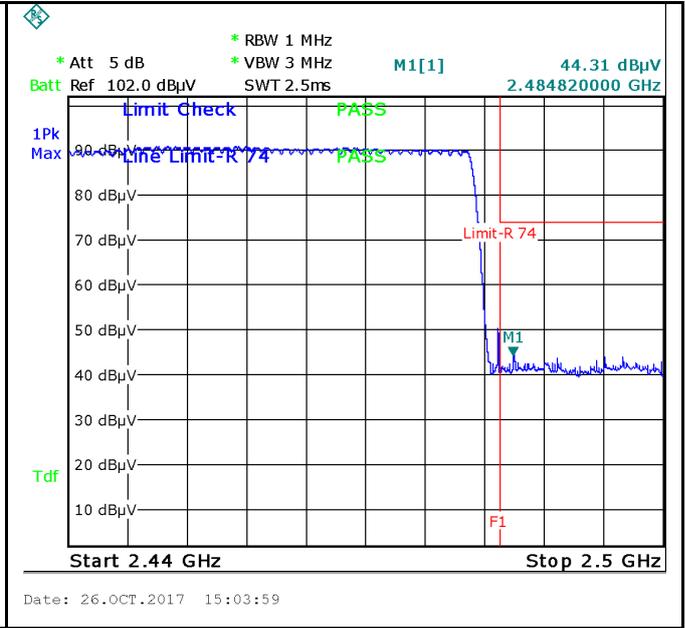
 <p> * RBW 1 MHz * Att 5 dB * VBW 3 MHz Batt Ref 102.0 dBμV SWT 2.5ms M2[1] 53.99 dBμV 2.400000000 GHz Limit Check Line Limit-L 74 PASS M1[1] PASS 44.73 dBμV 2.379670000 GHz 1Pk Max 90 dBμV 80 dBμV 70 dBμV 60 dBμV 50 dBμV 40 dBμV Tdf 20 dBμV 10 dBμV Start 2.31 GHz Stop 2.44 GHz Date: 26.OCT.2017 14:58:33 </p>	 <p> * RBW 1 MHz * Att 5 dB * VBW 3 MHz Batt Ref 102.0 dBμV SWT 2.5ms M1[1] 44.31 dBμV 2.484820000 GHz Limit Check Line Limit-R 74 PASS PASS 44.31 dBμV 2.484820000 GHz 1Pk Max 90 dBμV 80 dBμV 70 dBμV 60 dBμV 50 dBμV 40 dBμV Tdf 20 dBμV 10 dBμV Start 2.44 GHz Stop 2.5 GHz Date: 26.OCT.2017 15:03:59 </p>
<p align="center">GFSK-Hopping Left Side-PK Note: F1 is frequency 2400MHz</p>	<p align="center">GFSK-Hopping Right Side-PK Note: F1 is frequency 2483.5MHz</p>
<p align="center">Note: (no need if PK value less than the AV limit)</p>	<p align="center">Note: (no need if PK value less than the AV limit)</p>
<p align="center">GFSK-Hopping Left Side-AV</p>	<p align="center">GFSK-Hopping Right Side-AV</p>

Note: Both Horizontal and vertical polarities were investigated.

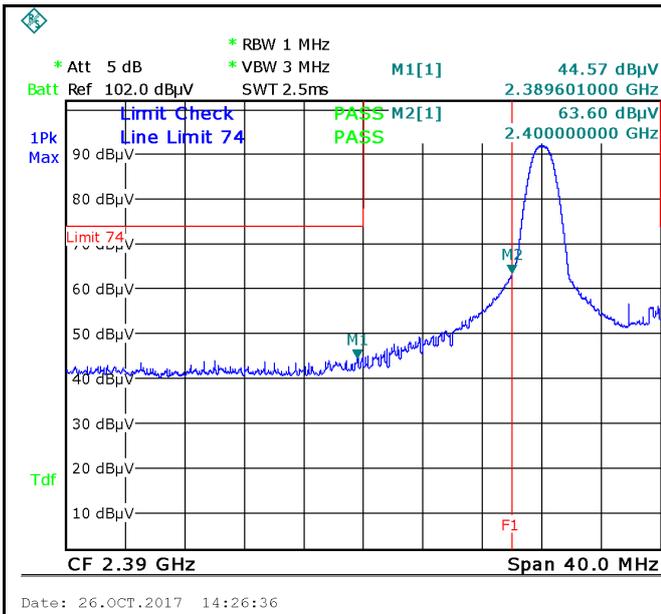


GFSK-Left Side-PK

Note: F1 is frequency 2400MHz

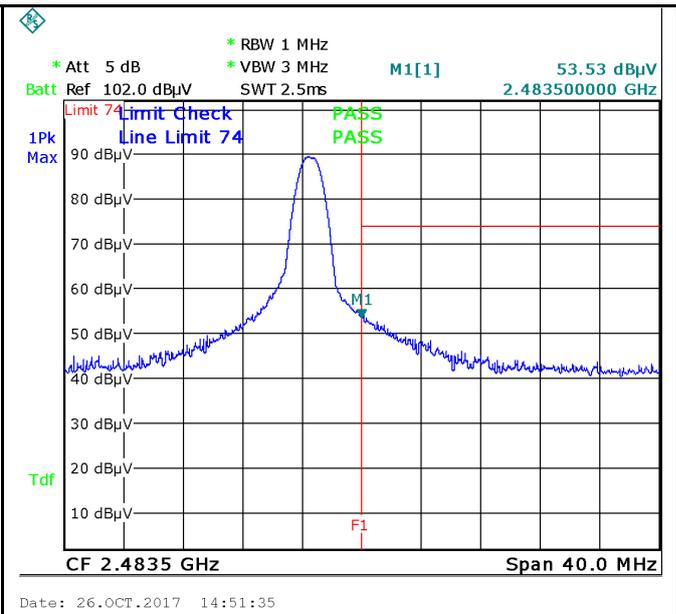

GFSK-Right Side-PK

Note: F1 is frequency 2483.5MHz

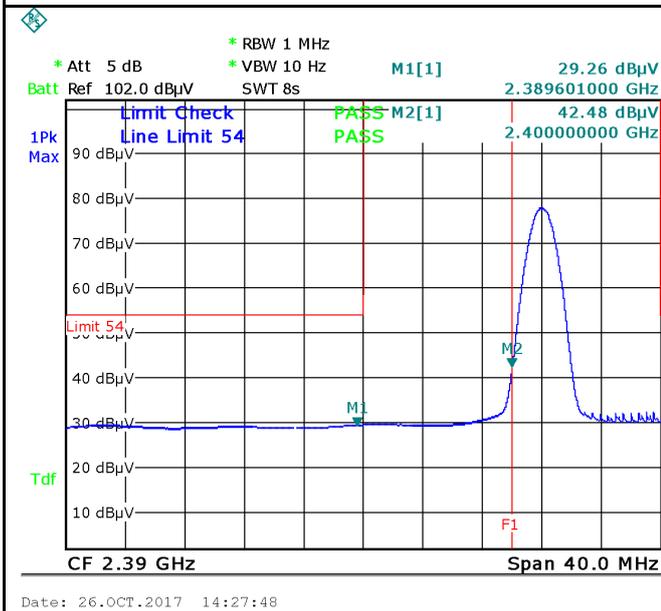



GFSK-Left Side-AV

Note: (no need if PK value less than the AV limit)

GFSK-Right Side-AV

Note: Both Horizontal and vertical polarities were investigated.

$\pi/4$ DQPSK Mode:

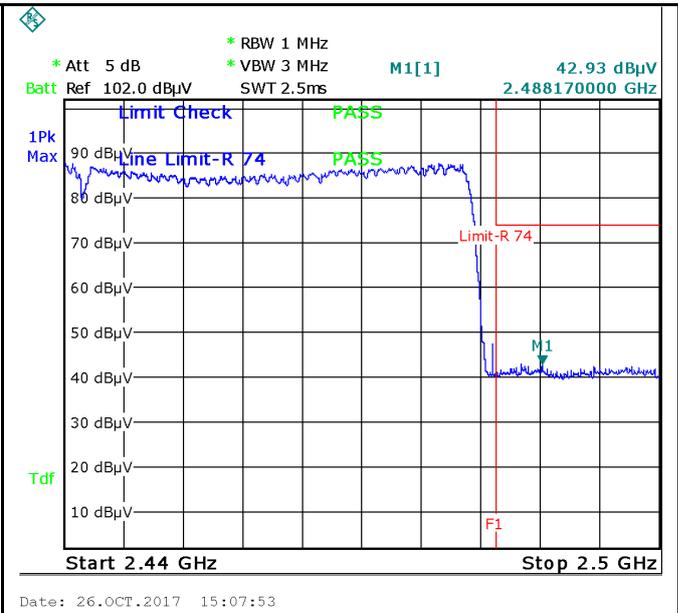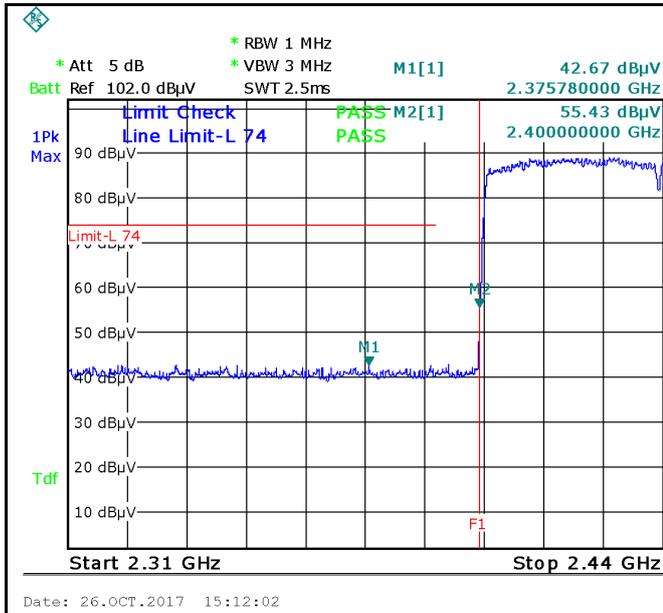


$\pi/4$ DQPSK-Hopping Left Side-PK

Note: F1 is frequency 2400MHz

$\pi/4$ DQPSK-Hopping Right Side-PK

Note: F1 is frequency 2483.5MHz

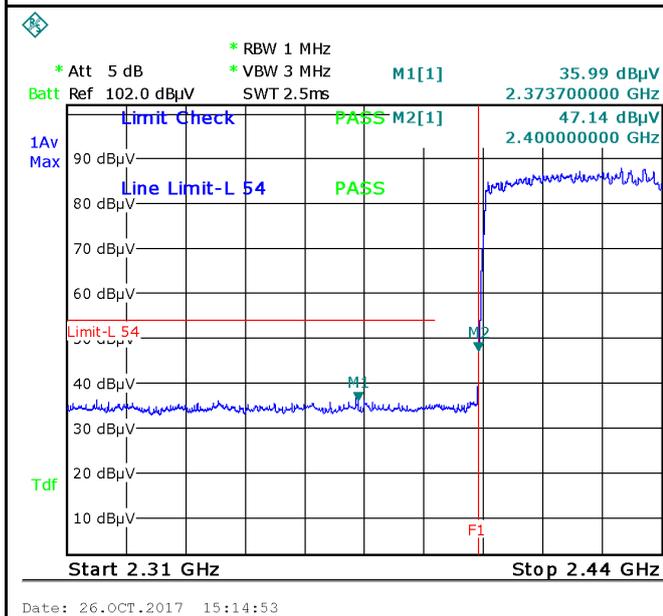


Note: (no need if PK value less than the AV limit)


$\pi/4$ DQPSK-Hopping Left-AV

$\pi/4$ DQPSK-Hopping Right-AV

Note: Both Horizontal and vertical polarities were investigated.

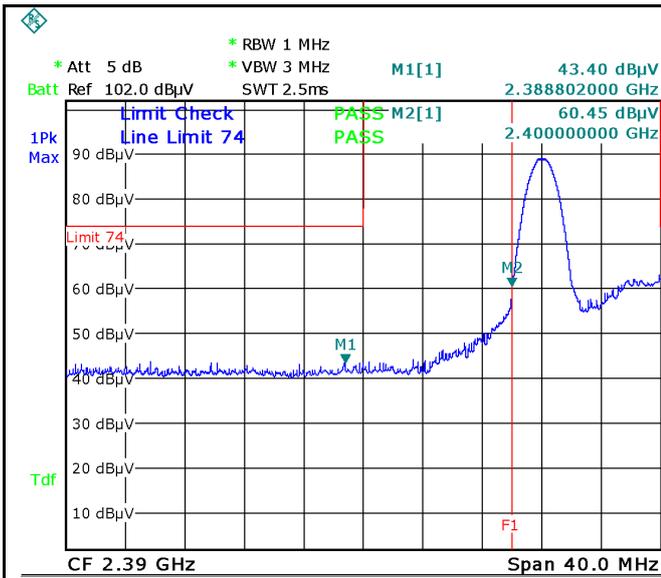

Date: 26.OCT.2017 14:33:57

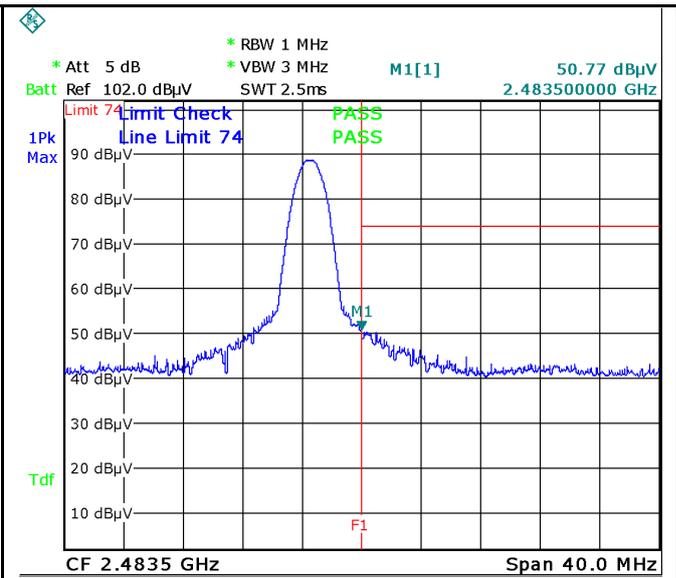


Date: 26.OCT.2017 14:48:57

π / 4 DQPSK-Left Side-PK

Note: F1 is frequency 2400MHz

π / 4 DQPSK-Right Side-PK

Note: F1 is frequency 2483.5MHz

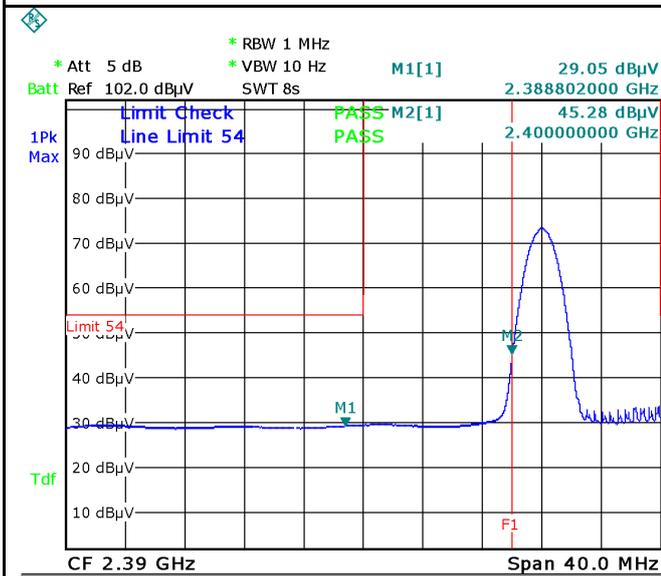

Date: 26.OCT.2017 14:34:47


Note: (no need if PK value less than the AV limit)

π / 4 DQPSK-Left Side-AV

π / 4 DQPSK-Right Side-AV


Note: Both Horizontal and vertical polarities were investigated.

8-DPSK Mode:

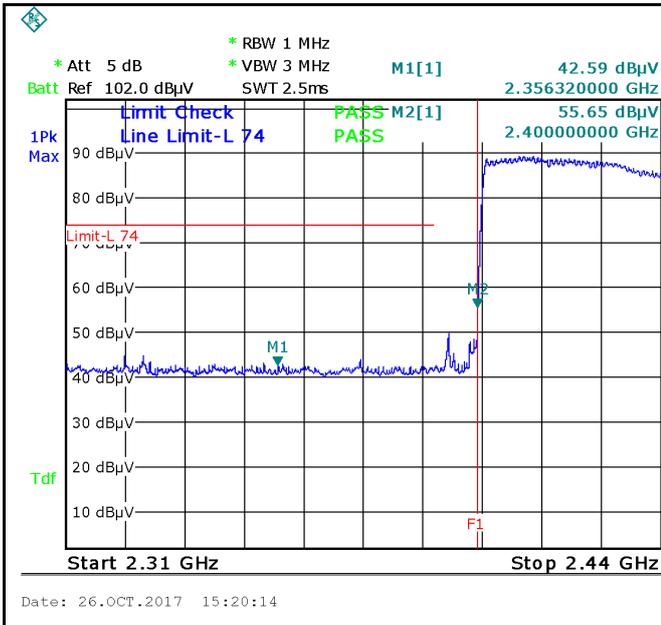


8DPSK-Hopping Left Side-PK

Note: F1 is frequency 2400MHz

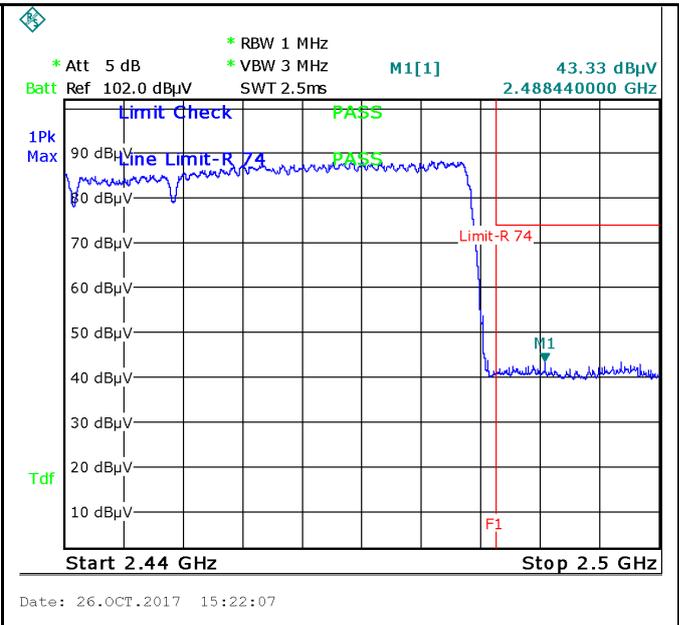

8DPSK-Hopping Right Side-PK

Note: F1 is frequency 2483.5MHz

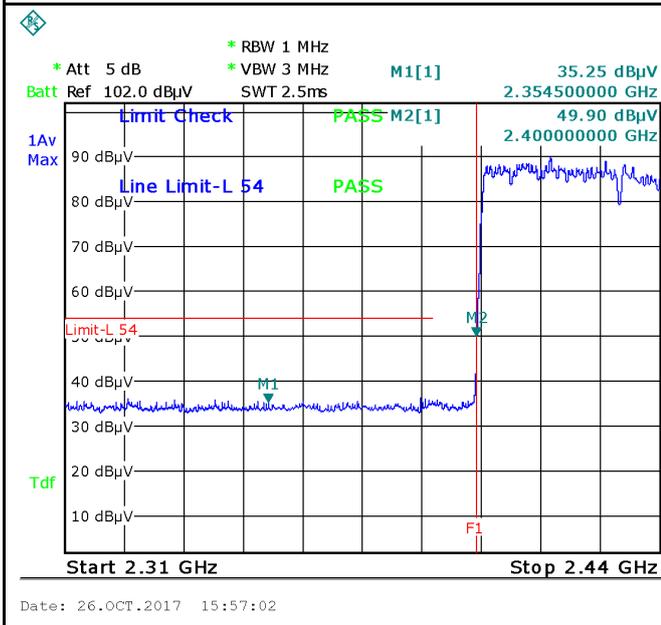


8DPSK-Hopping Left-AV


Note: (no need if PK value less than the AV limit)

8DPSK-Hopping Right-AV

Note: Both Horizontal and vertical polarities were investigated.

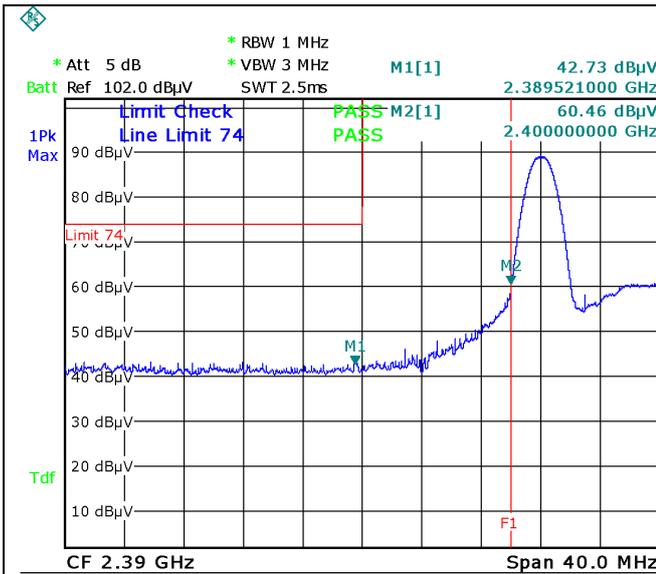

Date: 26.OCT.2017 14:38:39

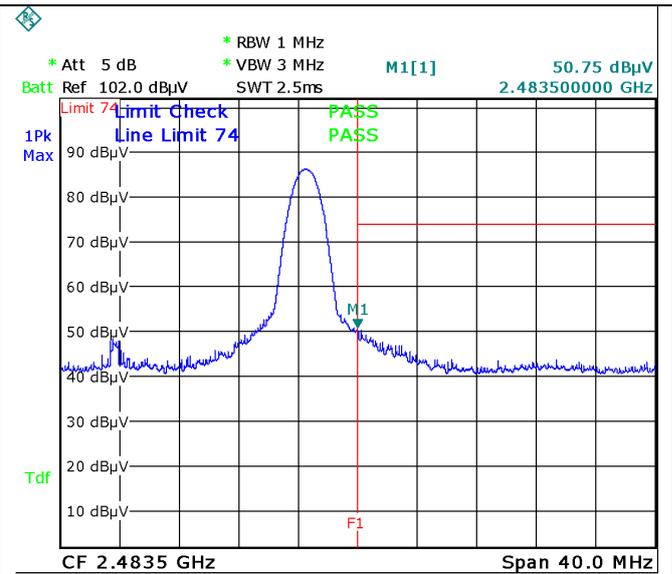


Date: 26.OCT.2017 14:46:14

8DPSK-Left Side-PK

Note: F1 is frequency 2400MHz

8DPSK-Right Side-PK

Note: F1 is frequency 2483.5MHz

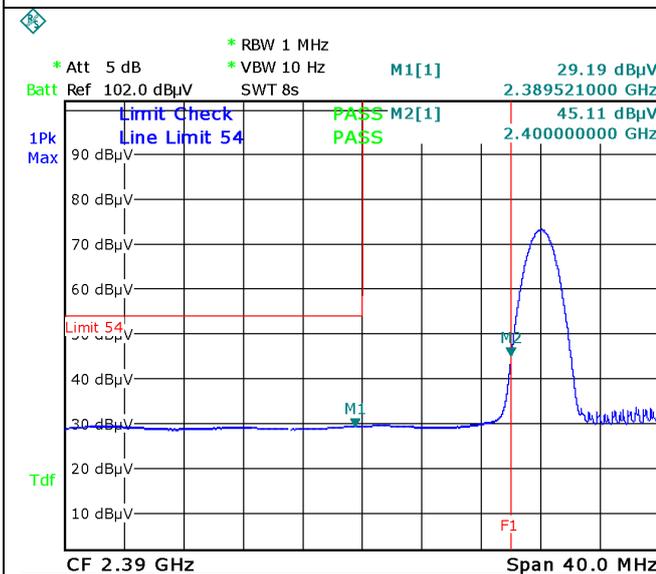

Date: 26.OCT.2017 14:37:27

Note: (no need if PK value less than the AV limit)

8DPSK-Left Side-AV

8DPSK-Right Side-AV


Note: Both Horizontal and vertical polarities were investigated.

6.8 AC Power Line Conducted Emissions

Temperature	26 °C
Relative Humidity	57%
Atmospheric Pressure	1025mbar
Test date :	October 25, 2017
Tested By :	Loren Luo

Requirement(s):

Spec	Item	Requirement	Applicable														
47CFR§15.207, RSS210 (A8.1)	a)	For Low-power radio-frequency devices that is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies, within the band 150 kHz to 30 MHz, shall not exceed the limits in the following table, as measured using a 50 [mu]H/50 ohms line impedance stabilization network (LISN). The lower limit applies at the boundary between the frequencies ranges.	<input checked="" type="checkbox"/>														
		<table border="1"> <thead> <tr> <th rowspan="2">Frequency ranges (MHz)</th> <th colspan="2">Limit (dBµV)</th> </tr> <tr> <th>QP</th> <th>Average</th> </tr> </thead> <tbody> <tr> <td>0.15 ~ 0.5</td> <td>66 – 56</td> <td>56 – 46</td> </tr> <tr> <td>0.5 ~ 5</td> <td>56</td> <td>46</td> </tr> <tr> <td>5 ~ 30</td> <td>60</td> <td>50</td> </tr> </tbody> </table>		Frequency ranges (MHz)	Limit (dBµV)		QP	Average	0.15 ~ 0.5	66 – 56	56 – 46	0.5 ~ 5	56	46	5 ~ 30	60	50
		Frequency ranges (MHz)			Limit (dBµV)												
				QP	Average												
0.15 ~ 0.5	66 – 56	56 – 46															
0.5 ~ 5	56	46															
5 ~ 30	60	50															

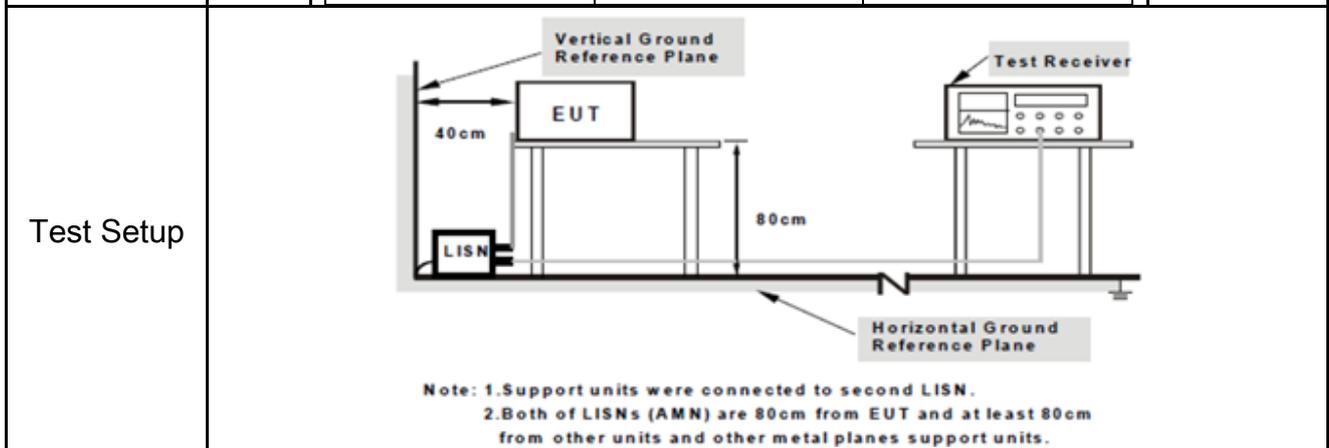

Procedure	<ol style="list-style-type: none"> The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table. The power supply for the EUT was fed through a 50W/50mH EUT LISN, connected to filtered mains. The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss
-----------	---


Test Report	17070763-FCC-R2
Page	37 of 68

	<p>coaxial cable.</p> <ol style="list-style-type: none"> 4. All other supporting equipment were powered separately from another main supply. 5. The EUT was switched on and allowed to warm up to its normal operating condition. 6. A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power) over the required frequency range using an EMI test receiver. 7. High peaks, relative to the limit line, The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 10 kHz. 8. Step 7 was then repeated for the LIVE line (for AC mains) or DC line (for DC power).
Remark	
Result	<input checked="" type="checkbox"/> Pass <input type="checkbox"/> Fail

Test Data Yes N/A

Test Plot Yes (See below) N/A

Test Mode:	Bluetooth Mode
-------------------	-----------------------

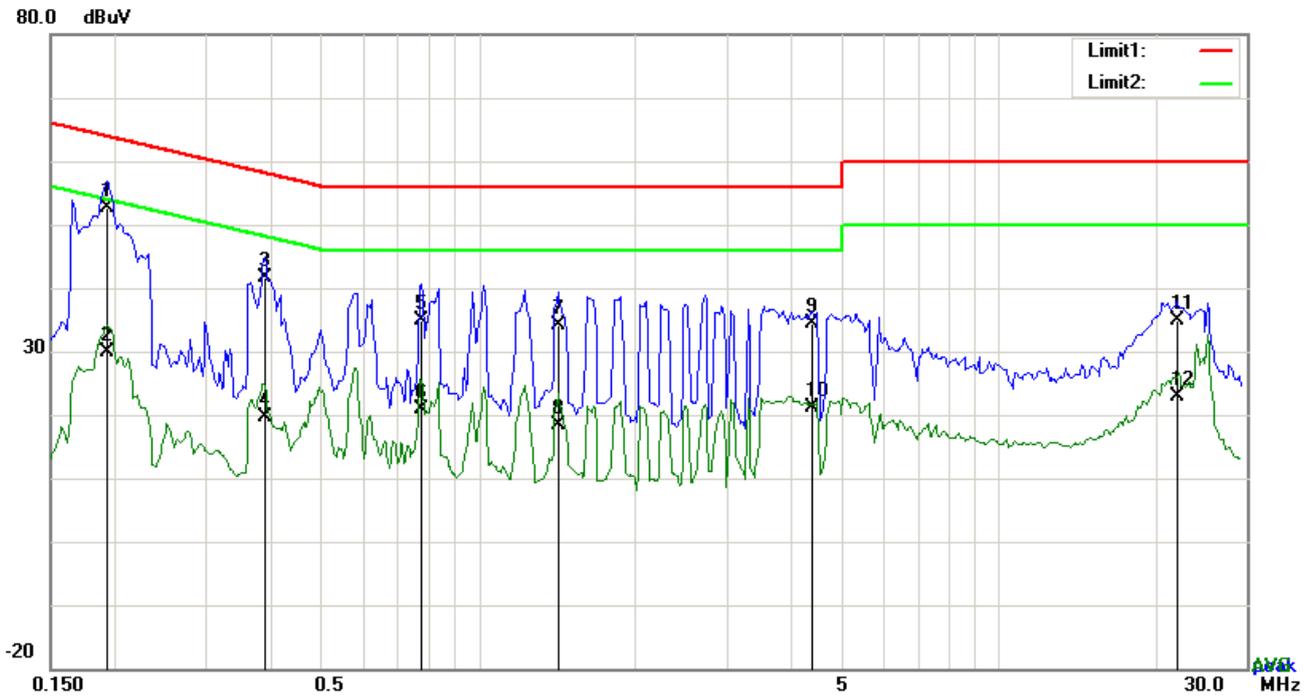


Test Data

Phase Line Plot at 120Vac, 60Hz

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB)	(dBuV)	(dBuV)	(dB)
1	L1	0.1929	42.64	QP	10.03	52.67	63.91	-11.24
2	L1	0.1929	19.83	AVG	10.03	29.86	53.91	-24.05
3	L1	0.3879	31.70	QP	10.03	41.73	58.11	-16.38
4	L1	0.3879	9.49	AVG	10.03	19.52	48.11	-28.59
5	L1	0.7779	24.85	QP	10.03	34.88	56.00	-21.12
6	L1	0.7779	10.97	AVG	10.03	21.00	46.00	-25.00
7	L1	1.4253	23.98	QP	10.04	34.02	56.00	-21.98
8	L1	1.4253	8.31	AVG	10.04	18.35	46.00	-27.65
9	L1	4.3728	24.26	QP	10.07	34.33	56.00	-21.67
10	L1	4.3728	11.07	AVG	10.07	21.14	46.00	-24.86
11	L1	22.0632	24.57	QP	10.34	34.91	60.00	-25.09
12	L1	22.0632	12.53	AVG	10.34	22.87	50.00	-27.13

Test Mode:	Bluetooth Mode
-------------------	-----------------------

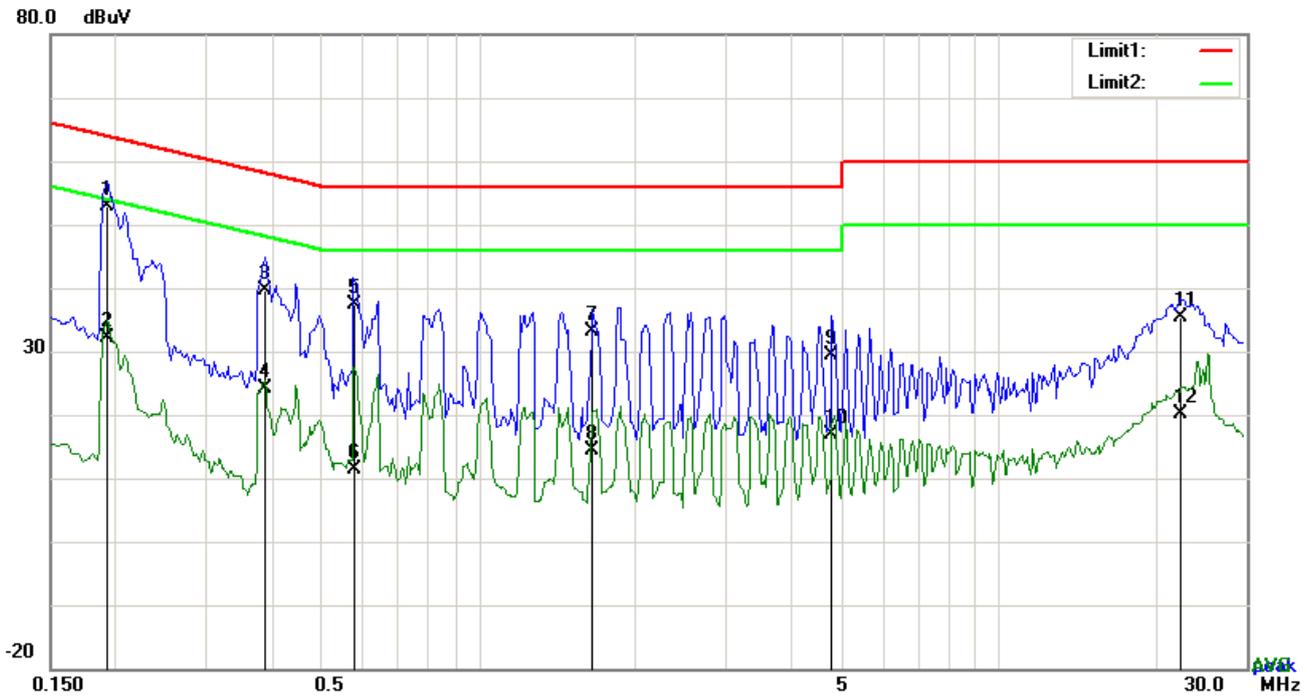


Test Data

Phase Neutral Plot at 120Vac, 60Hz

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB)	(dBuV)	(dBuV)	(dB)
1	N	0.1929	42.90	QP	10.02	52.92	63.91	-10.99
2	N	0.1929	22.23	AVG	10.02	32.25	53.91	-21.66
3	N	0.3879	29.66	QP	10.02	39.68	58.11	-18.43
4	N	0.3879	14.18	AVG	10.02	24.20	48.11	-23.91
5	N	0.5762	27.36	QP	10.02	37.38	56.00	-18.62
6	N	0.5762	1.34	AVG	10.02	11.36	46.00	-34.64
7	N	1.6554	23.20	QP	10.04	33.24	56.00	-22.76
8	N	1.6554	4.34	AVG	10.04	14.38	46.00	-31.62
9	N	4.7745	19.41	QP	10.07	29.48	56.00	-26.52
10	N	4.7745	6.75	AVG	10.07	16.82	46.00	-29.18
11	N	22.3947	25.17	QP	10.30	35.47	60.00	-24.53
12	N	22.3947	9.95	AVG	10.30	20.25	50.00	-29.75

Test Mode:	Bluetooth Mode
-------------------	-----------------------

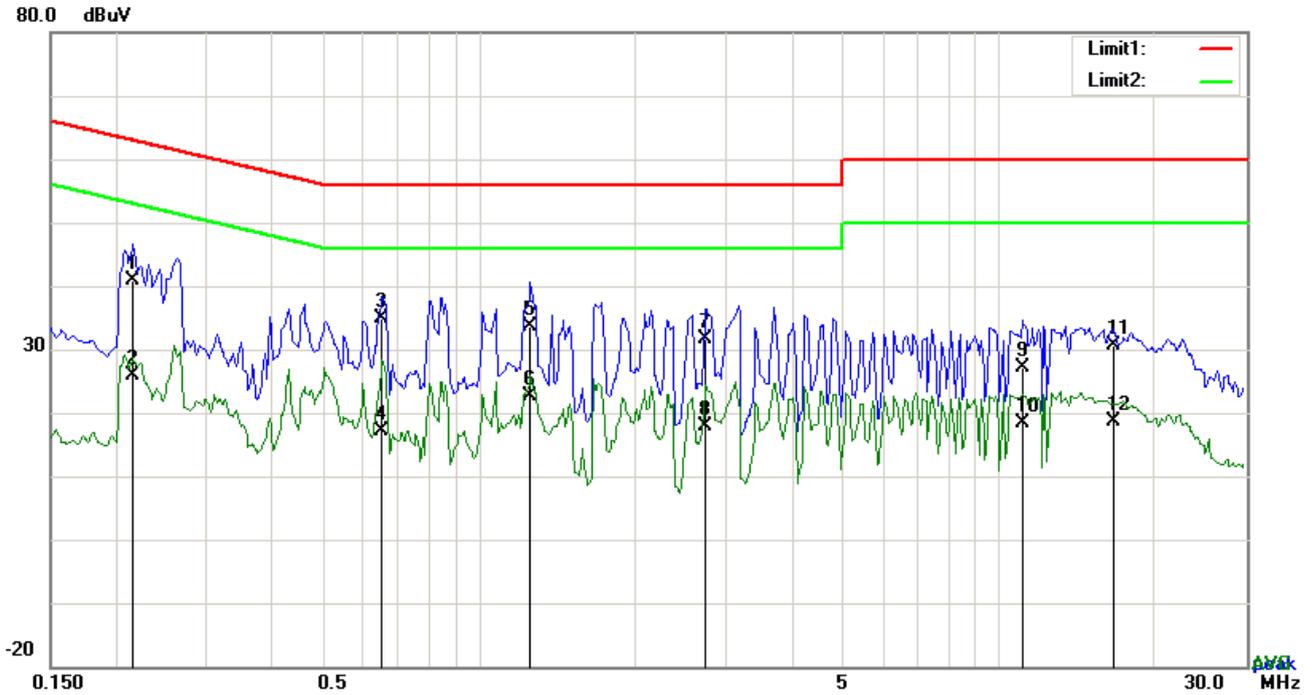


Test Data

Phase Line Plot at 240Vac, 60Hz

No.	P/L	Frequency	Reading	Detector	Corrected	Result	Limit	Margin
		(MHz)	(dBuV)		(dB)	(dBuV)	(dBuV)	(dB)
1	L1	0.2163	30.86	QP	10.03	40.89	62.96	-22.07
2	L1	0.2163	15.73	AVG	10.03	25.76	52.96	-27.20
3	L1	0.6531	24.90	QP	10.03	34.93	56.00	-21.07
4	L1	0.6531	7.05	AVG	10.03	17.08	46.00	-28.92
5	L1	1.2576	23.67	QP	10.03	33.70	56.00	-22.30
6	L1	1.2576	12.71	AVG	10.03	22.74	46.00	-23.26
7	L1	2.7318	21.69	QP	10.05	31.74	56.00	-24.26
8	L1	2.7318	7.79	AVG	10.05	17.84	46.00	-28.16
9	L1	11.1120	16.95	QP	10.17	27.12	60.00	-32.88
10	L1	11.1120	8.19	AVG	10.17	18.36	50.00	-31.64
11	L1	16.7046	20.50	QP	10.25	30.75	60.00	-29.25
12	L1	16.7046	8.44	AVG	10.25	18.69	50.00	-31.31

Test Mode:	Bluetooth Mode
-------------------	-----------------------

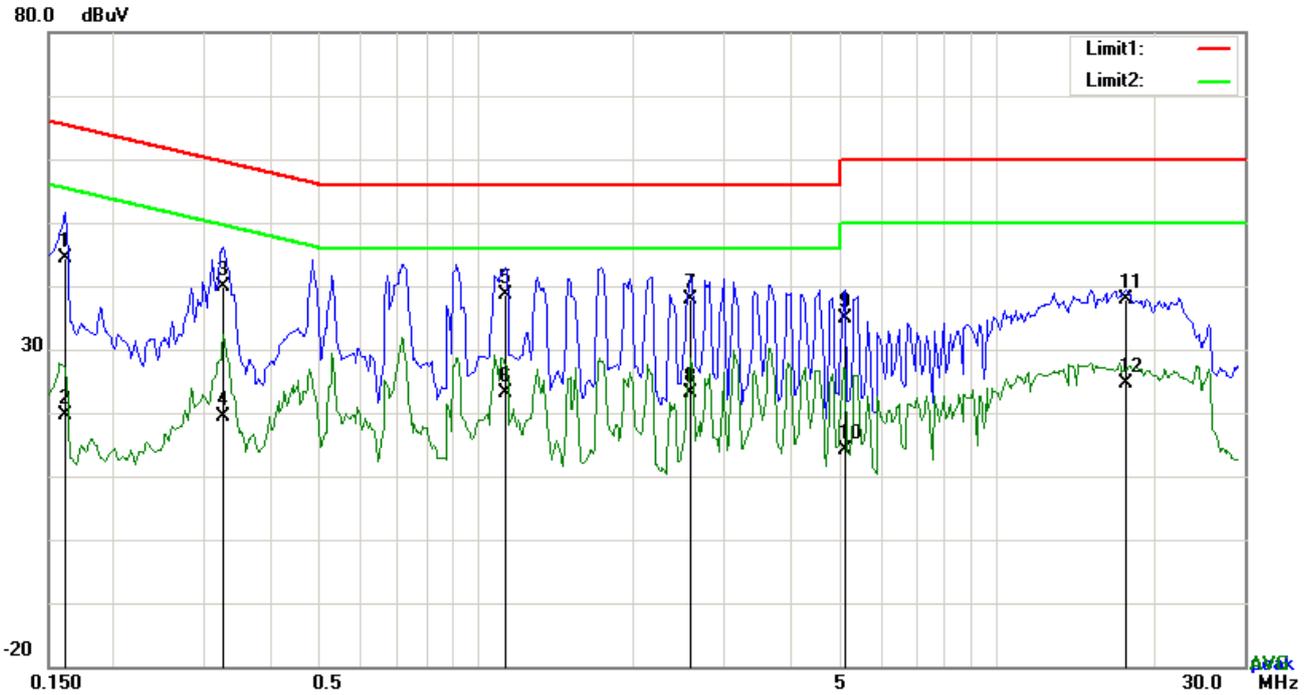

Test Data

Phase Neutral Plot at 240Vac, 60Hz


No.	P/L	Frequency (MHz)	Reading (dBuV)	Detector	Corrected (dB)	Result (dBuV)	Limit (dBuV)	Margin (dB)
1	N	0.1617	34.29	QP	10.02	44.31	65.38	-21.07
2	N	0.1617	9.51	AVG	10.02	19.53	55.38	-35.85
3	N	0.3255	29.94	QP	10.02	39.96	59.57	-19.61
4	N	0.3255	9.25	AVG	10.02	19.27	49.57	-30.30
5	N	1.1406	28.61	QP	10.03	38.64	56.00	-17.36
6	N	1.1406	13.15	AVG	10.03	23.18	46.00	-22.82
7	N	2.5797	27.73	QP	10.05	37.78	56.00	-18.22
8	N	2.5797	13.14	AVG	10.05	23.19	46.00	-22.81
9	N	5.1138	24.70	QP	10.07	34.77	60.00	-25.23
10	N	5.1138	4.02	AVG	10.07	14.09	50.00	-35.91
11	N	17.7264	27.56	QP	10.23	37.79	60.00	-22.21
12	N	17.7264	14.38	AVG	10.23	24.61	50.00	-25.39


6.9 Radiated Emissions & Restricted Band

Temperature	26 °C
Relative Humidity	57%
Atmospheric Pressure	1025mbar
Test date :	October 25, 2017
Tested By :	Loren Luo

Requirement(s):

Spec	Item	Requirement	Applicable																
47CFR§15.205, §15.209, §15.247(d)	a)	Except higher limit as specified elsewhere in other section, the emissions from the low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges	<input checked="" type="checkbox"/>																
		<table border="1"> <thead> <tr> <th>Frequency range (MHz)</th> <th>Field Strength ($\mu\text{V}/\text{m}$)</th> </tr> </thead> <tbody> <tr> <td>0.009~0.490</td> <td>2400/F(KHz)</td> </tr> <tr> <td>0.490~1.705</td> <td>24000/F(KHz)</td> </tr> <tr> <td>1.705~30.0</td> <td>30</td> </tr> <tr> <td>30 – 88</td> <td>100</td> </tr> <tr> <td>88 – 216</td> <td>150</td> </tr> <tr> <td>216 960</td> <td>200</td> </tr> <tr> <td>Above 960</td> <td>500</td> </tr> </tbody> </table>		Frequency range (MHz)	Field Strength ($\mu\text{V}/\text{m}$)	0.009~0.490	2400/F(KHz)	0.490~1.705	24000/F(KHz)	1.705~30.0	30	30 – 88	100	88 – 216	150	216 960	200	Above 960	500
		Frequency range (MHz)		Field Strength ($\mu\text{V}/\text{m}$)															
		0.009~0.490		2400/F(KHz)															
		0.490~1.705		24000/F(KHz)															
		1.705~30.0		30															
		30 – 88		100															
		88 – 216		150															
216 960	200																		
Above 960	500																		

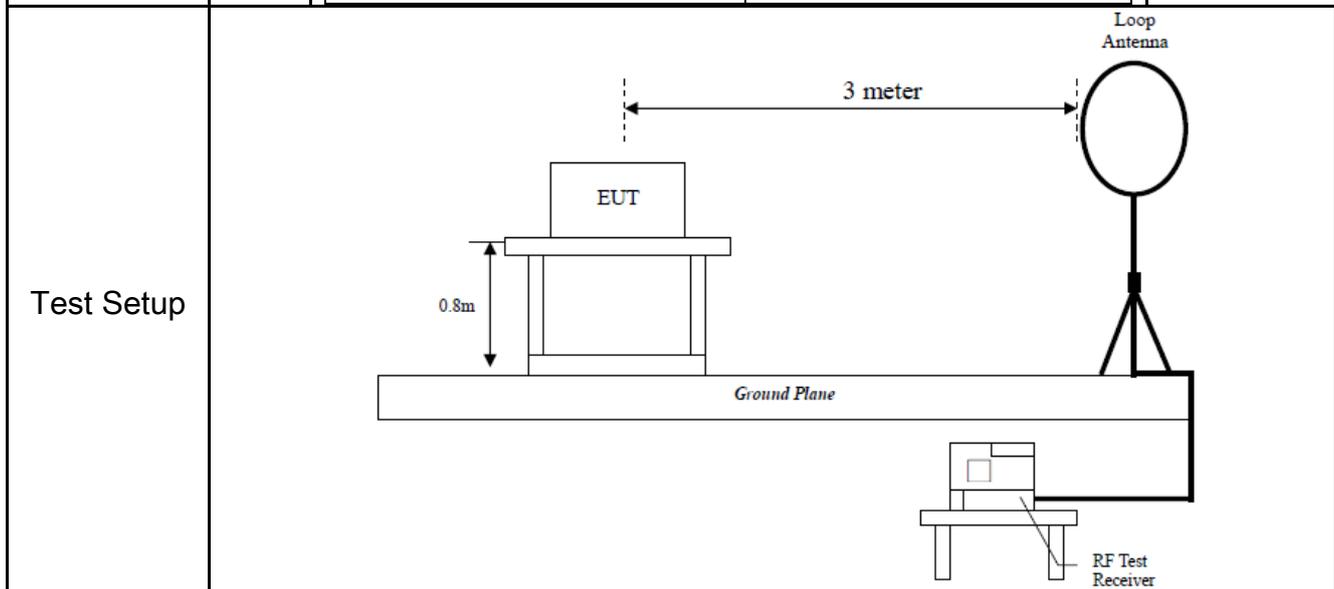

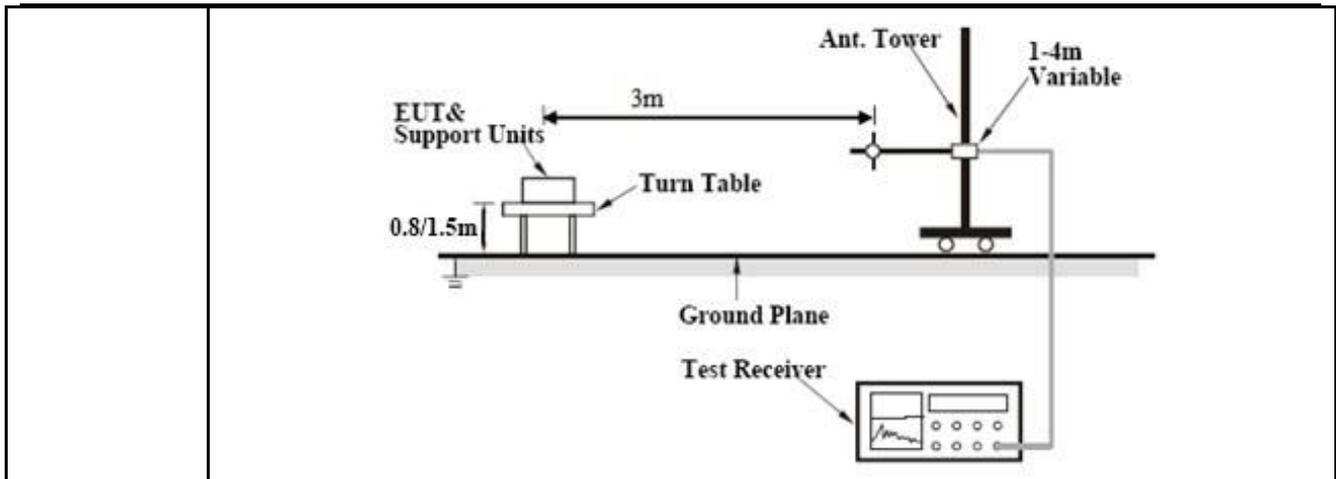

Procedure

- The EUT was switched on and allowed to warm up to its normal operating condition.
- The test was carried out at the selected frequency points obtained from the EUT characterization. Maximization of the emissions, was carried out by rotating the EUT, changing the antenna polarization, and adjusting the antenna height in the following manner:
 - Vertical or horizontal polarization (whichever gave the higher emission level over a full rotation of the EUT) was chosen.
 - The EUT was then rotated to the direction that gave the maximum emission.
 - Finally, the antenna height was adjusted to the height that gave the maximum emission.
- The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120 kHz for Quasi Peak detection at frequency below 1GHz.
- The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and video bandwidth is 3MHz with Peak detection for Peak measurement at frequency above 1GHz.
The resolution bandwidth of test receiver/spectrum analyzer is 1MHz and the video bandwidth is 10Hz with Peak detection for Average Measurement as below at frequency above 1GHz.
- Steps 2 and 3 were repeated for the next frequency point, until all selected frequency points were measured.

Remark

Result Pass Fail

Test Data Yes N/A

Test Plot Yes (See below) N/A

Test Result:

Test Mode:	Transmitting Mode
-------------------	-------------------

Frequency range: 9KHz - 30MHz

Freq. (MHz)	Detection value	Factor (dB/m)	Reading (dBuV/m)	Result (dBuV/m)	Limit@3m (dBuV/m)	Margin (dB)
--	--	--	--	--	--	>20
--	--	--	--	--	--	>20

Note:


The amplitude of spurious emissions which are attenuated by more than 20dB below the permissible value has no need to be reported.

Distance extrapolation factor = $40 \log (\text{specific distance}/\text{test distance})$ (dB);

Limit line = specific limits(dBuv) + distance extrapolation factor.

Test Mode:	Bluetooth Mode
-------------------	-----------------------

30MHz -1GHz

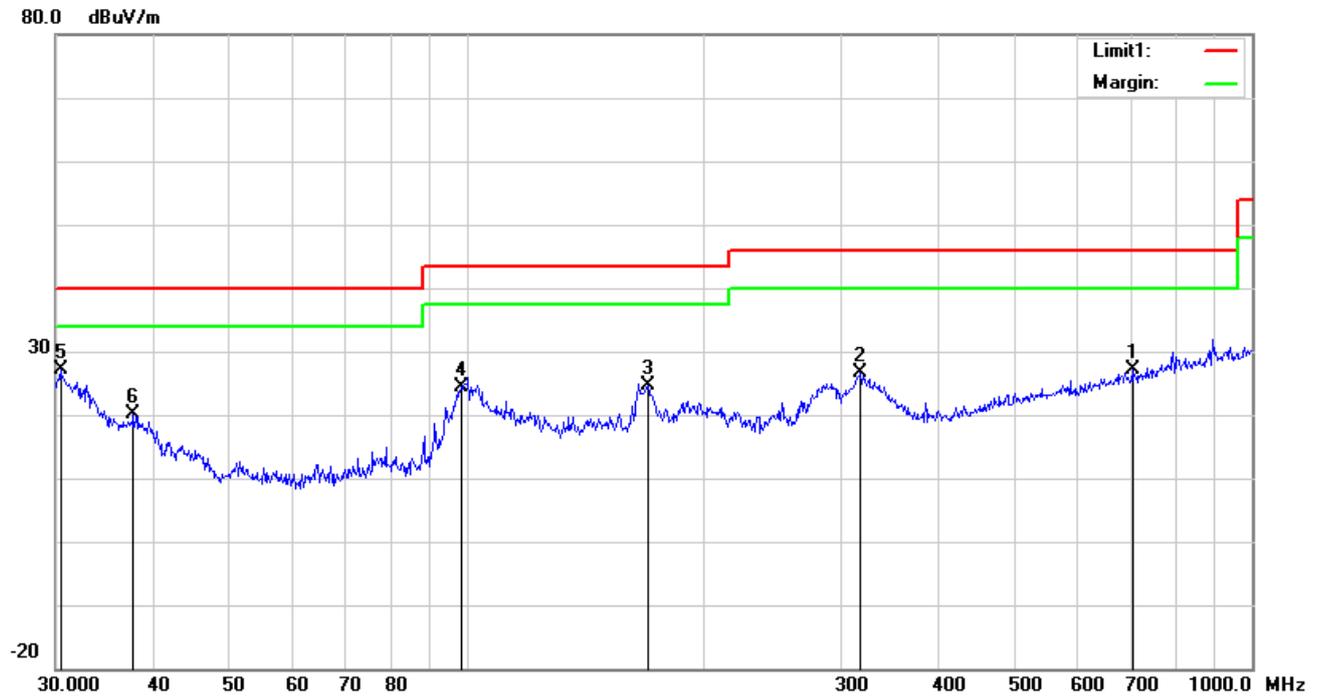


Test Data

Horizontal Polarity Plot @3m

No.	P/L	Frequency (MHz)	Reading (dBuV/m)	Detect or	Ant_F (dB/m)	PA_G (dB)	Cab_L (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degr ee ()
1	H	704.2261	25.69	peak	20.25	21.35	2.57	27.16	46.00	-18.84	100	253
2	H	317.7011	32.92	peak	13.97	22.24	1.88	26.53	46.00	-19.47	100	323
3	H	170.1948	33.65	peak	11.78	22.26	1.36	24.53	43.50	-18.97	100	168
4	H	98.4866	35.52	peak	10.04	22.32	1.08	24.32	43.50	-19.18	100	232
5	H	30.4238	27.67	peak	21.07	22.28	0.63	27.09	40.00	-12.91	100	138
6	H	37.6798	26.06	peak	15.59	22.27	0.78	20.16	40.00	-19.84	100	197

30MHz -1GHz

80.0 dBuV/m

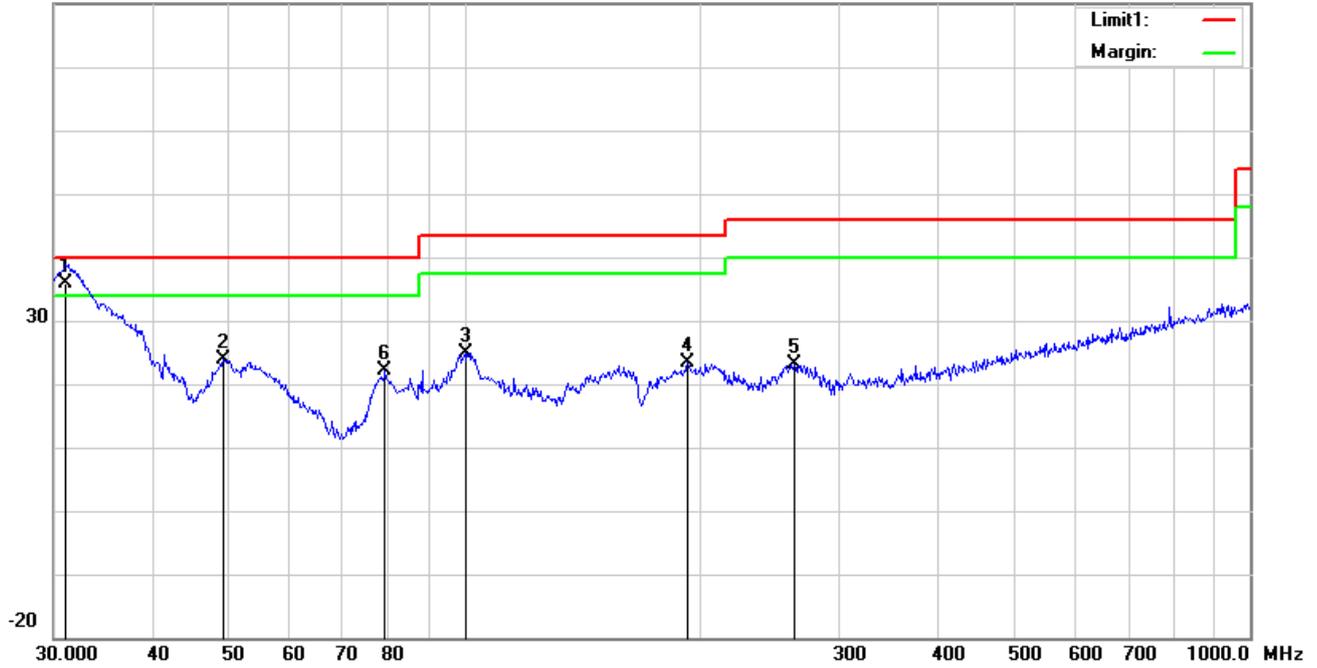

Test Data

Vertical Polarity Plot @3m

No.	P/L	Frequency (MHz)	Reading (dBuV/m)	Detect or	Ant_F (dB/m)	PA_G (dB)	Cab_L (dB)	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Height (cm)	Degr ee ()
1	V	31.0706	36.97	QP	20.58	22.27	0.65	35.93	40.00	-4.07	100	332
2	V	49.3594	36.84	peak	8.68	22.37	0.79	23.94	40.00	-16.06	100	34
3	V	100.2286	35.55	peak	10.44	22.32	1.12	24.79	43.50	-18.71	100	56
4	V	192.4186	32.50	peak	11.68	22.33	1.54	23.39	43.50	-20.11	100	333
5	V	262.8955	31.65	peak	11.97	22.29	1.72	23.05	46.00	-22.95	100	358
6	V	79.2426	35.77	peak	7.62	22.42	1.04	22.01	40.00	-17.99	100	250

Above 1GHz

Test Mode:	Transmitting Mode
-------------------	--------------------------

Low Channel: 8-DPSK Mode (Worst Case) (2402 MHz)

Frequency (MHz)	S.A. Reading (dBμV)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
4804	39.72	AV	V	33.39	7.22	48.46	31.87	54	-22.13
4804	39.43	AV	H	33.39	7.22	48.46	31.58	54	-22.42
4804	49.32	PK	V	33.39	7.22	48.46	41.47	74	-32.53
4804	45.36	PK	H	33.39	7.22	48.46	37.51	74	-36.49
7614	24.82	AV	V	37.61	7.61	48.21	21.83	54	-32.17
7614	25.44	AV	H	37.61	7.61	48.21	22.45	54	-31.55
7614	40.12	PK	V	37.61	7.61	48.21	37.13	74	-36.87
7614	42.79	PK	H	37.61	7.61	48.21	39.8	74	-34.2

Middle Channel: 8-DPSK Mode (Worst Case) (2441 MHz)

Frequency (MHz)	S.A. Reading (dBμV)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dBμV/m)	Limit (dBμV/m)	Margin (dB)
4882	38.49	AV	V	33.62	7.53	48.36	31.28	54	-22.72
4882	39.56	AV	H	33.62	7.53	48.36	32.35	54	-21.65
4882	49.18	PK	V	33.62	7.53	48.36	41.97	74	-32.03
4882	45.79	PK	H	33.62	7.53	48.36	38.58	74	-35.42
9025	24.59	AV	V	37.88	9.16	48.55	23.08	54	-30.92
9025	25.88	AV	H	37.88	9.16	48.55	24.37	54	-29.63
9025	40.04	PK	V	37.88	9.16	48.55	38.53	74	-35.47
9025	41.95	PK	H	37.88	9.16	48.55	40.44	74	-33.56

High Channel: $\pi/4$ DQPSK Mode (Worst Case) (2480 MHz)

Frequency (MHz)	S.A. Reading (dB μ V)	Detector (PK/AV)	Polarity (H/V)	Ant. Factor (dB/m)	Cable Loss (dB)	Pre-Amp. Gain (dB)	Cord. Amp. (dB μ V/m)	Limit (dB μ V/m)	Margin (dB)
4960	40.1	AV	V	33.89	7.86	48.31	33.54	54	-20.46
4960	39.37	AV	H	33.89	7.86	48.31	32.81	54	-21.19
4960	47.89	PK	V	33.89	7.86	48.31	41.33	74	-32.67
4960	46.36	PK	H	33.89	7.86	48.31	39.8	74	-34.2
17779	23.64	AV	V	43.21	19.44	44.4	41.89	54	-12.11
17779	23.97	AV	H	43.21	19.44	44.4	42.22	54	-11.78
17779	39.42	PK	V	43.21	19.44	44.4	57.67	74	-16.33
17779	41.78	PK	H	43.21	19.44	44.4	60.03	74	-13.97

Note:

- 1, The testing has been conformed to $10 \times 2480\text{MHz} = 24,800\text{MHz}$
- 2, All other emissions more than 30 dB below the limit
- 3, X-Axis, Y-Axis and Z-Axis were investigated. The results above show only the worst case.
- 4, The radiated spurious test above 18GHz is subcontracted to SIEMIC (Nanjing-China) Laboratories. and found 30dB below the limit at least.

Annex A. TEST INSTRUMENT

Instrument	Model	Serial #	Cal Date	Cal Due	In use
AC Line Conducted					
EMI test receiver	ESCS30	8471241027	09/15/2017	09/14/2018	<input checked="" type="checkbox"/>
Line Impedance	LI-125A	191106	09/23/2017	09/22/2018	<input checked="" type="checkbox"/>
Line Impedance	LI-125A	191107	09/23/2017	09/22/2018	<input checked="" type="checkbox"/>
ISN	ISN T800	34373	09/23/2017	09/22/2018	<input type="checkbox"/>
Transient Limiter	LIT-153	531118	08/30/2017	08/29/2018	<input checked="" type="checkbox"/>
RF conducted test					
Agilent ESA-E SERIES	E4407B	MY45108319	09/15/2017	09/14/2018	<input checked="" type="checkbox"/>
Power Splitter	1#	1#	08/30/2017	08/29/2018	<input checked="" type="checkbox"/>
DC Power Supply	E3640A	MY40004013	09/15/2017	09/14/2018	<input checked="" type="checkbox"/>
Radiated Emissions					
EMI test receiver	ESL6	100262	09/15/2017	09/14/2018	<input checked="" type="checkbox"/>
Positioning Controller	UC3000	MF780208282	11/17/2017	11/16/2018	<input checked="" type="checkbox"/>
OPT 010 AMPLIFIER (0.1-1300MHz)	8447E	2727A02430	08/30/2017	08/29/2018	<input checked="" type="checkbox"/>
Horn Antenna	BBHA9170	3145226D1	09/27/2017	09/26/2018	<input checked="" type="checkbox"/>
Microwave Preamplifier (1 ~ 26.5GHz)	8449B	3008A02402	03/23/2017	03/22/2018	<input checked="" type="checkbox"/>
Active Antenna (9kHz-30MHz)	AL-130	121031	10/12/2017	10/11/2018	<input checked="" type="checkbox"/>
Bilog Antenna (30MHz~6GHz)	JB6	A110712	09/19/2017	09/18/2018	<input checked="" type="checkbox"/>
Double Ridge Horn Antenna (1 ~18GHz)	AH-118	71283	09/22/2017	09/21/2018	<input checked="" type="checkbox"/>
Universal Radio Communication Tester	CMU200	121393	09/23/2017	09/22/2018	<input checked="" type="checkbox"/>

Annex B. EUT And Test Setup Photographs

Annex B.i. Photograph: EUT External Photo

Whole Package View



Adapter - Label View



EUT - Front View




EUT - Rear View




EUT - Top View




EUT - Bottom View

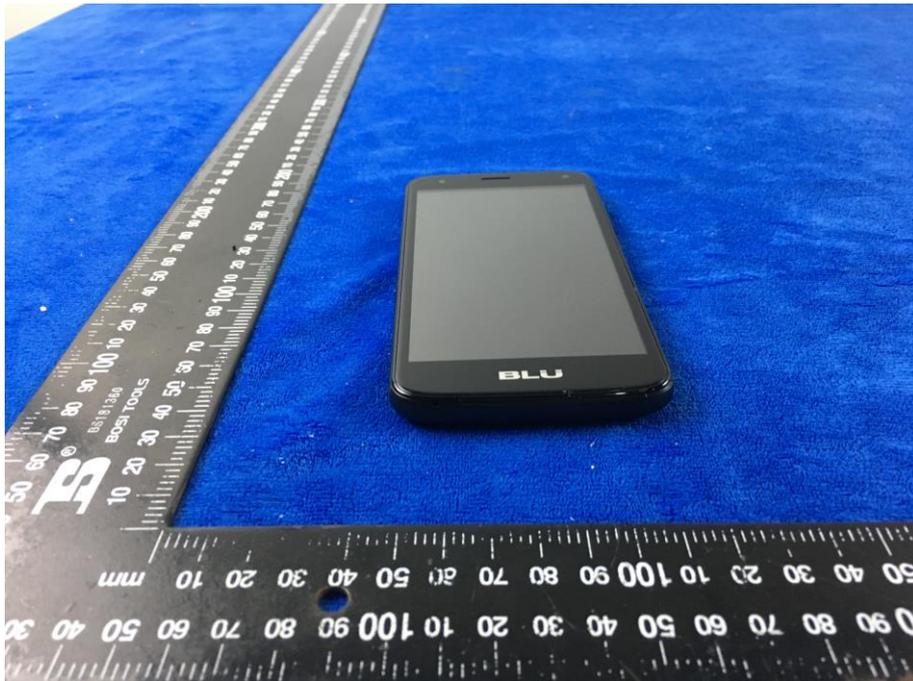

EUT - Left View

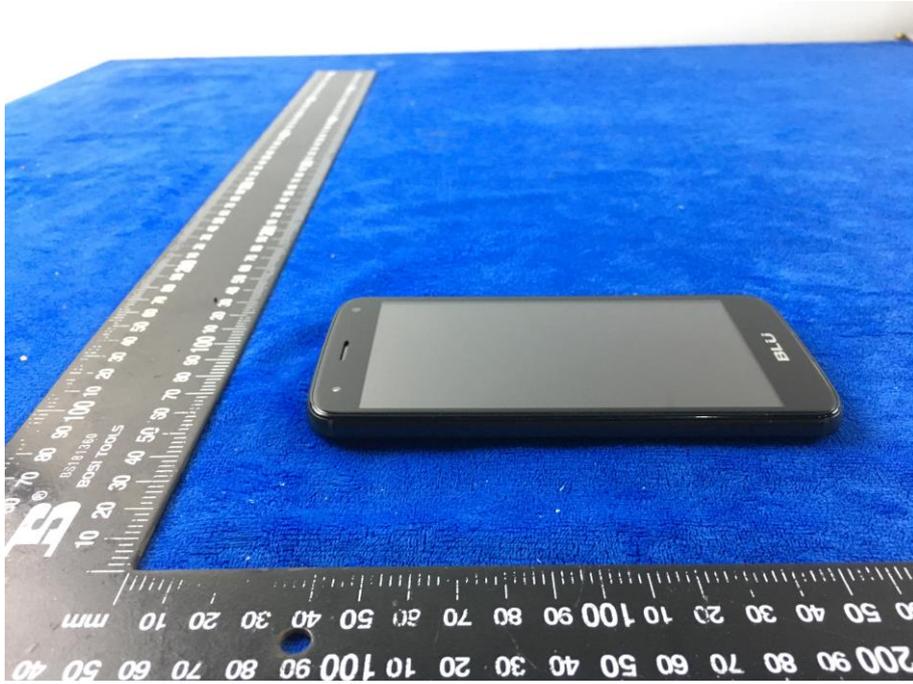

EUT - Right View

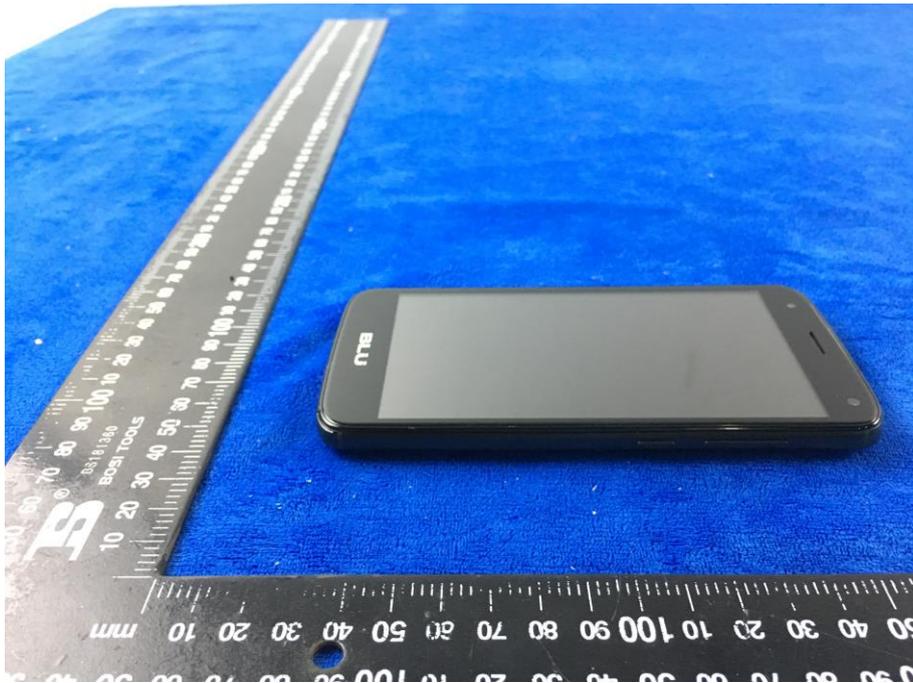

Annex B.ii. Photograph: EUT Internal Photo

Cover Off - Top View 1



Cover Off - Top View 2




Battery - Front View




Battery - Rear View




Mainboard with Shielding – Front View

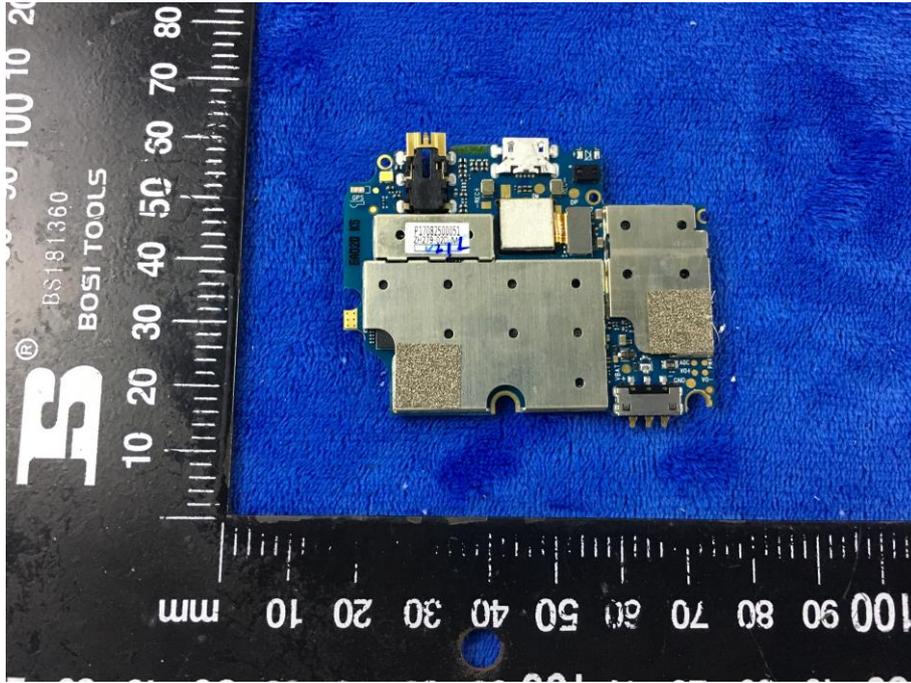


Mainboard with Shielding – Rear View

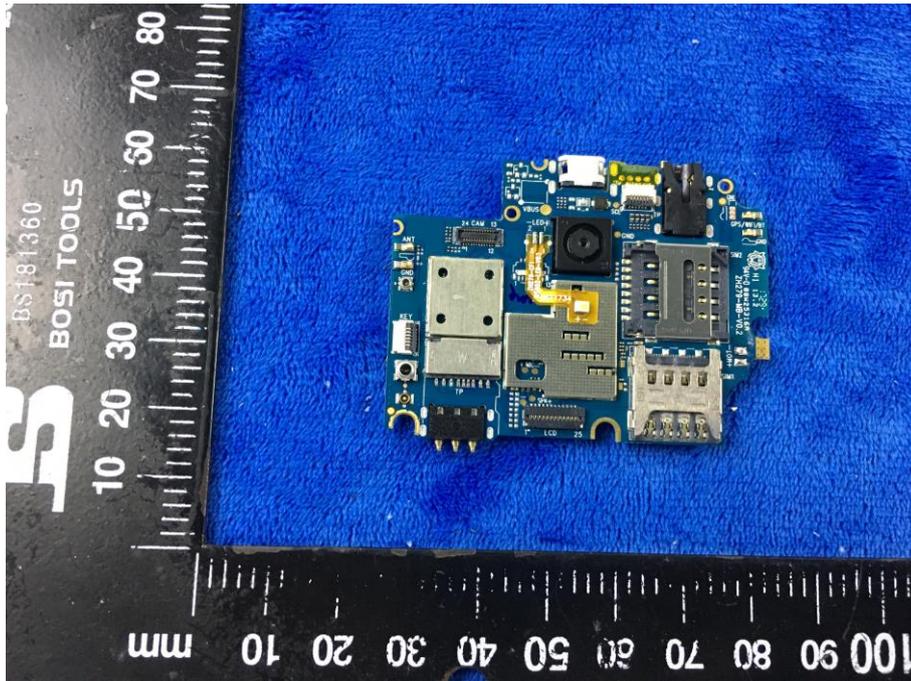


Mainboard without Shielding – Front View

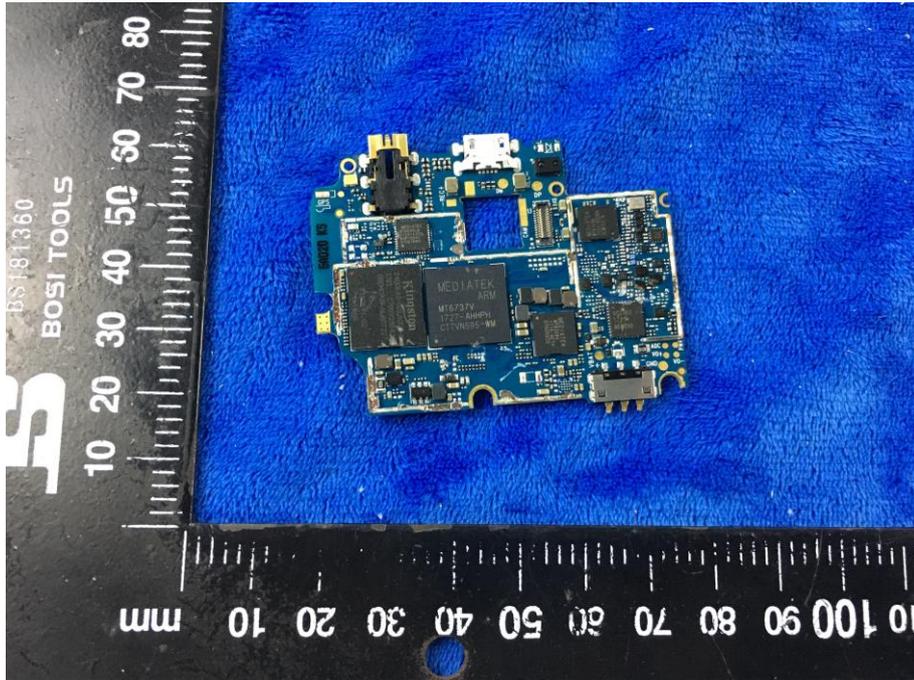


Mainboard without Shielding – Rear View

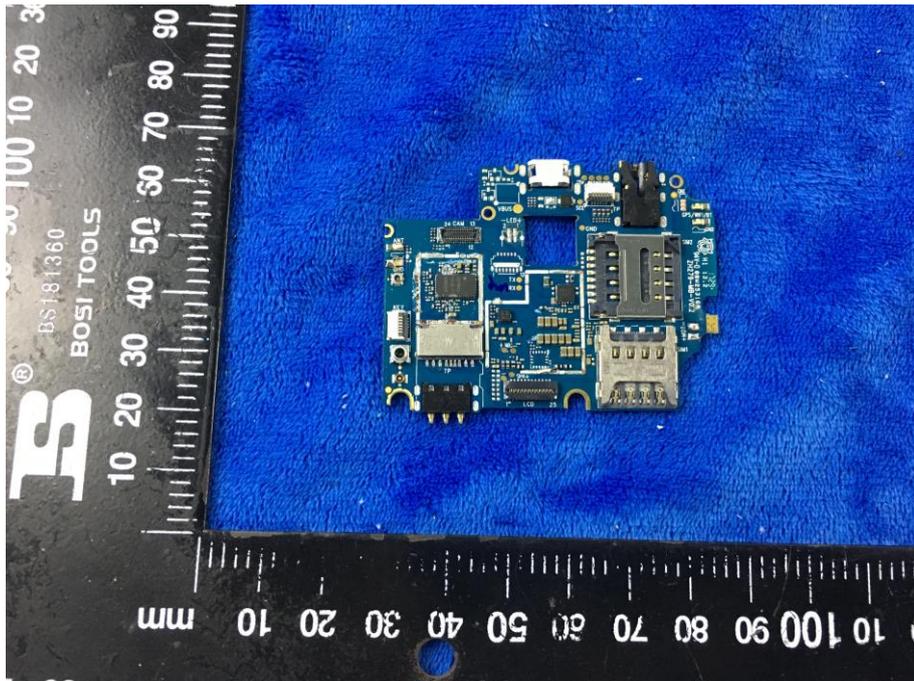

Connected Mainboard – Front View

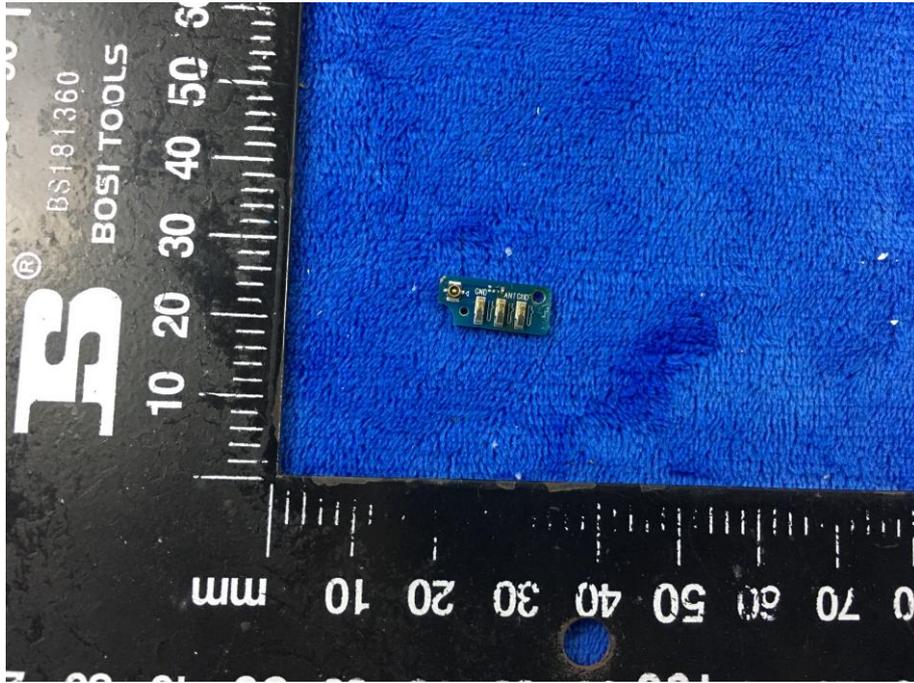

Connected Mainboard – Rear View

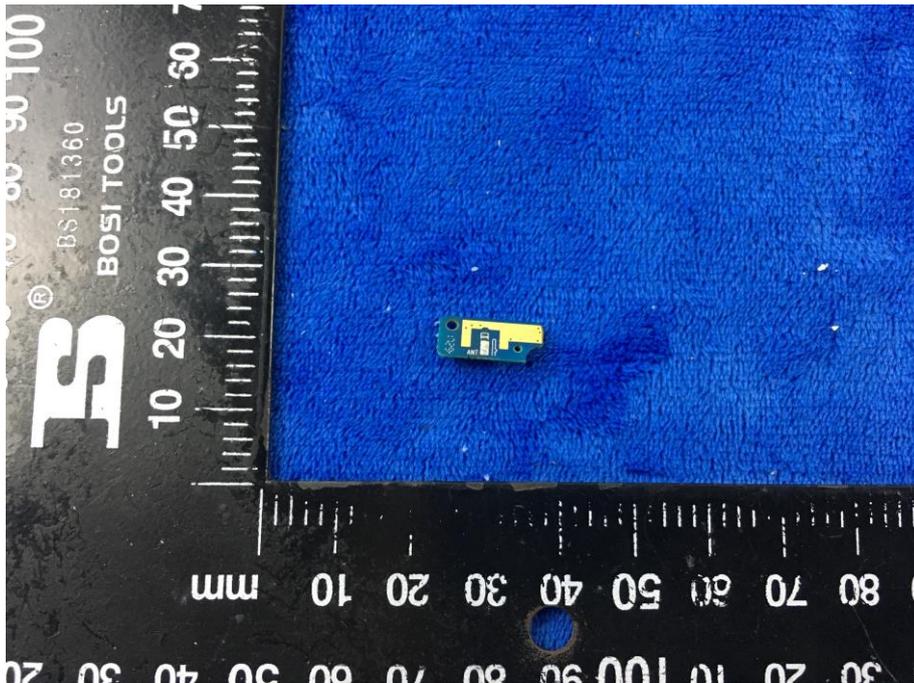

LCD – Front View



LCD – Rear View




GSM/PCS/UMTS-FDD/LTE - Antenna View



WIFI/BT/BLE/GPS - Antenna View



RXD- Antenna View

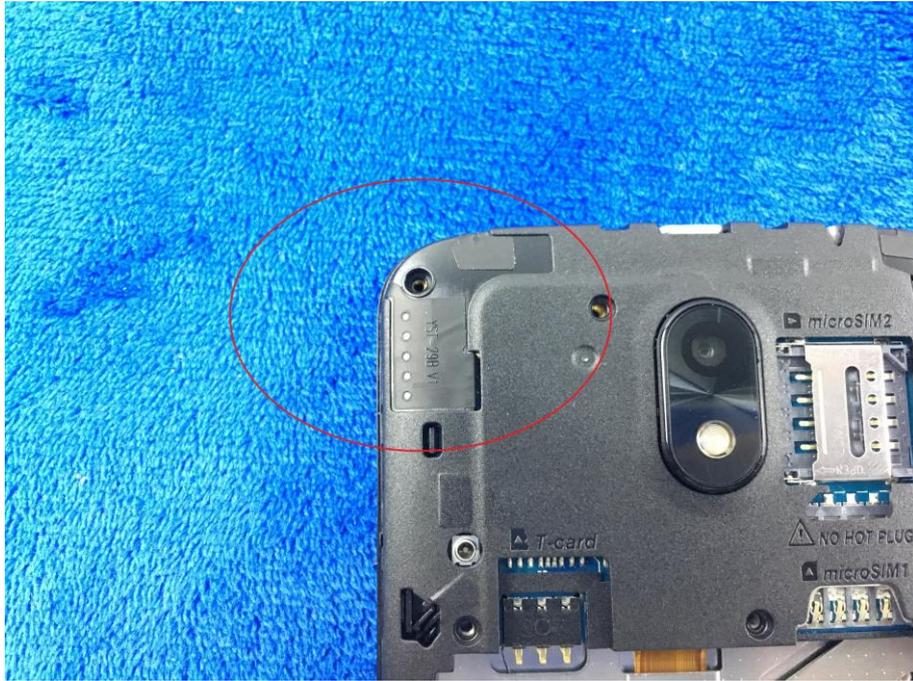


Annex B.iii. Photograph: Test Setup Photo




Conducted Emissions Test Setup Front View



Conducted Emissions Test Setup Side View

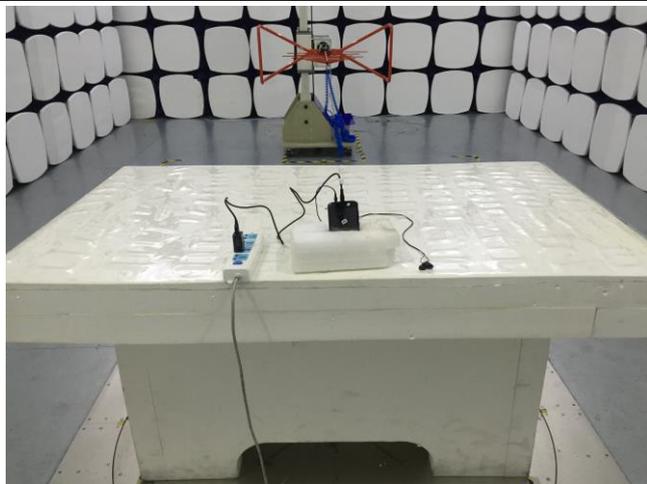

Radiated Spurious Emissions Test Setup Below 1GHz

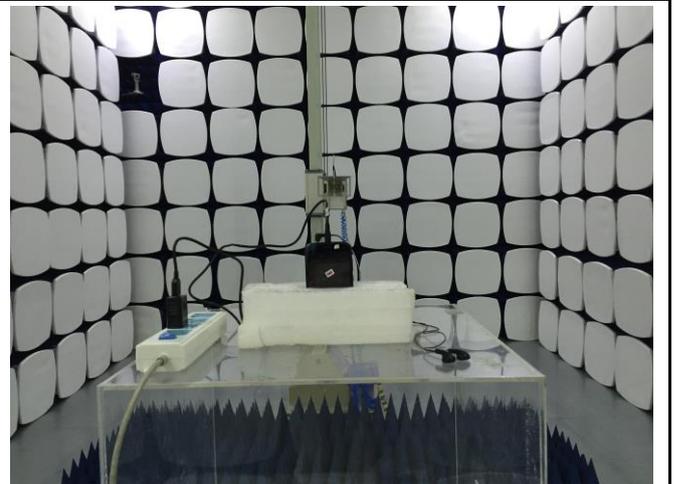


Radiated Spurious Emissions Test Setup Above
1GHz


Annex C. TEST SETUP AND SUPPORTING EQUIPMENT

Annex C.ii. TEST SET UP BLOCK


Block Configuration Diagram for AC Line Conducted Emissions

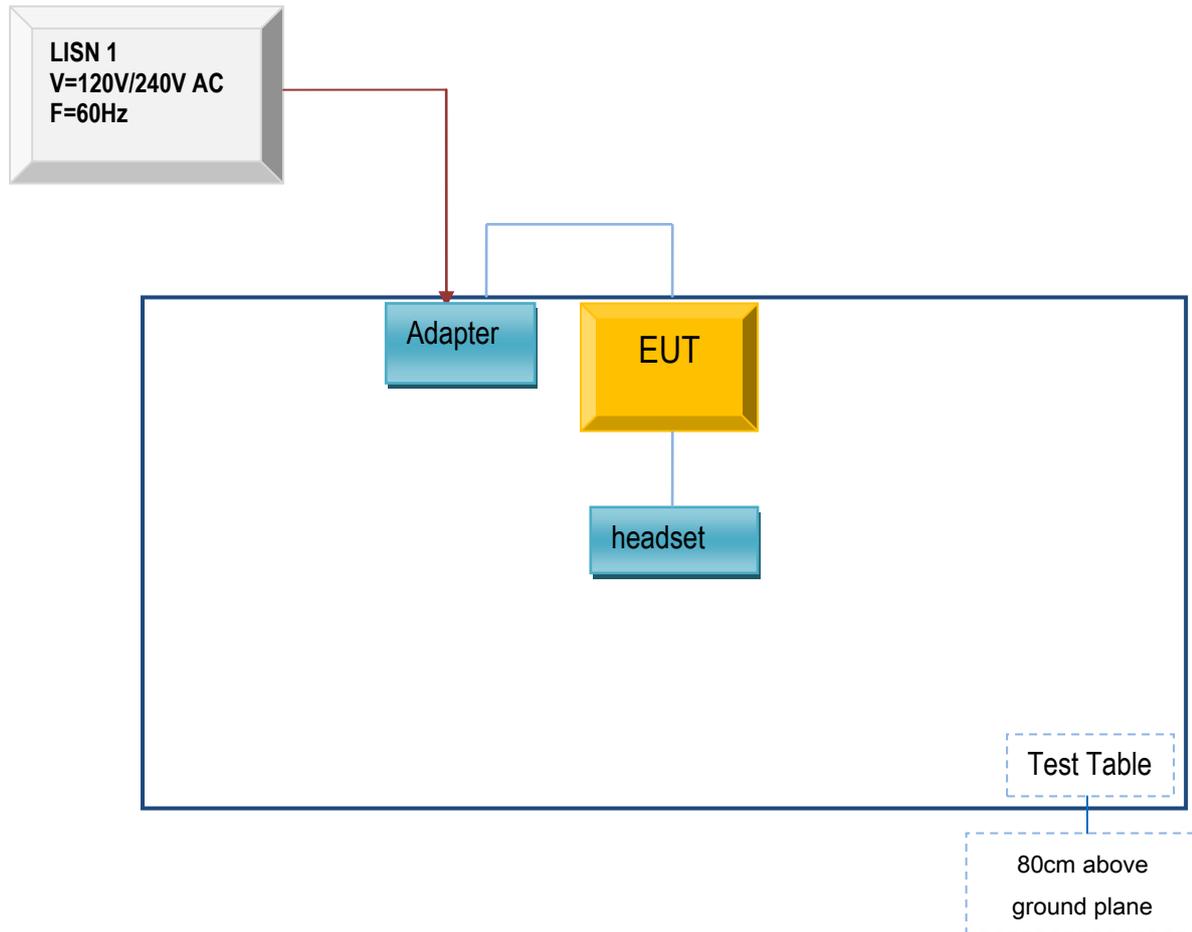

Block Configuration Diagram for Radiated Emissions (Below 1GHz) .

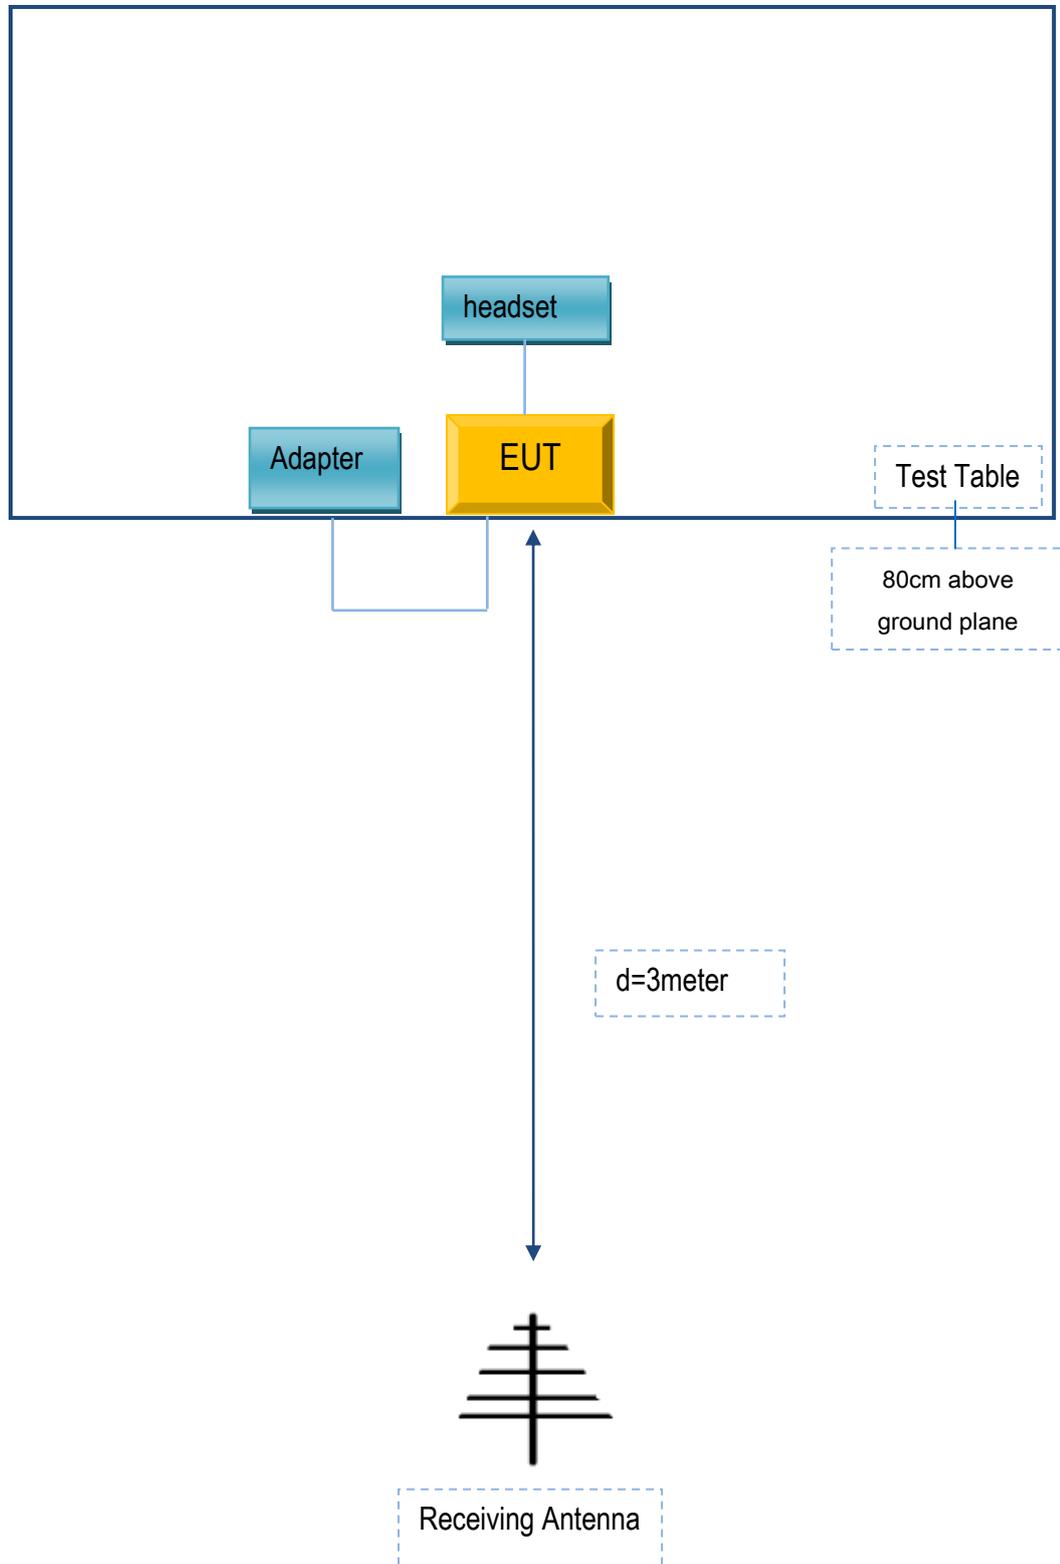

Block Configuration Diagram for Radiated Emissions (Above 1GHz) .

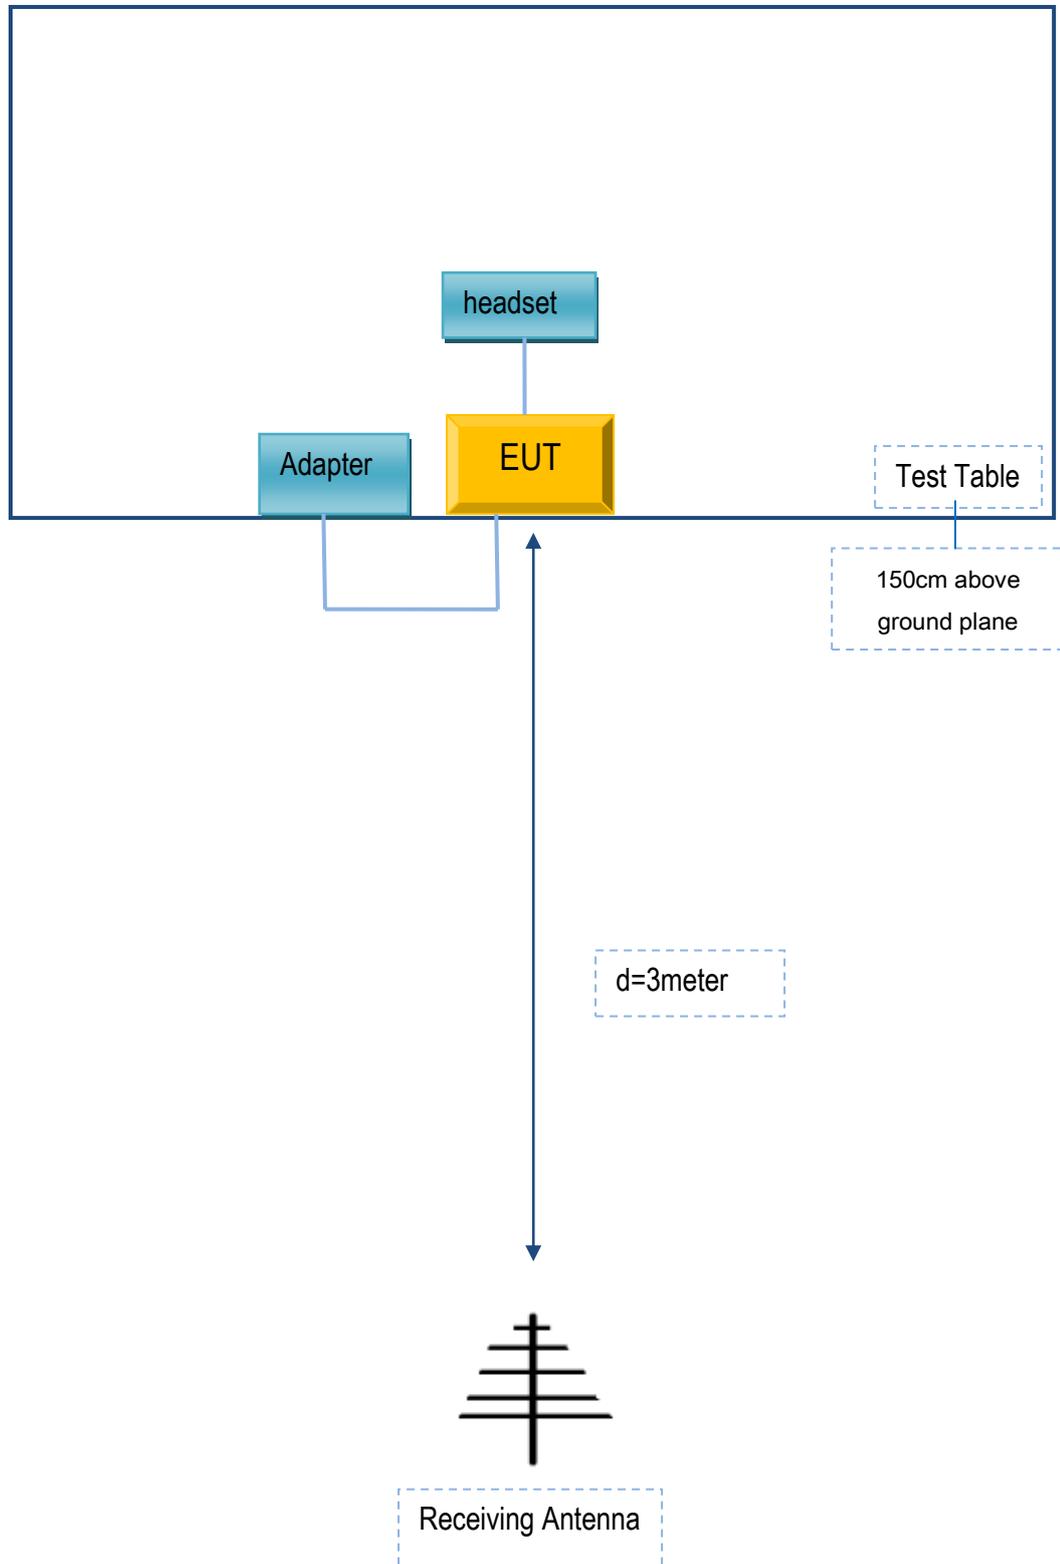

Annex C. ii. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

Supporting Equipment:

Manufacturer	Equipment Description	Model	Serial No
BLU Products, Inc.	Adapter	US-WW-1002	N/A
SAMSUNG	headset	HS330	N/A

Supporting Cable:

Cable type	Shield Type	Ferrite Core	Length	Serial No
USB Cable	Un-shielding	No	0.8m	N/A

Test Report	17070763-FCC-R2
Page	67 of 68

Annex D. User Manual / Block Diagram / Schematics / Partlist

Please see the attachment

Test Report	17070763-FCC-R2
Page	68 of 68

Annex E. DECLARATION OF SIMILARITY

N/A