



FCC PART 15B, CLASS B TEST REPORT

For

BLU Products, Inc.

10814 NW 33rd St # 100 Doral, FL 33172, Doral, Florida, United States

FCC ID: YHLBLUC6L20

Report Type: Original Report	Product Type: Mobile Phone
Report Number: RSZ200611012-00A	
Report Date: 2020-07-20	
Reviewed By: RF Engineer	Nancy Wang 
Prepared By: Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China Tel: +86-755-33320018 Fax: +86-755-33320008 www.baclcorp.com.cn	

Note: This report must not be used by the customer to claim product certification, approval, or endorsement by A2LA* or any agency of the Federal Government. This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk “★”.

BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk ‘*’. Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

TABLE OF CONTENTS

GENERAL INFORMATION.....	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
OBJECTIVE	3
RELATED SUBMITTAL(S)/GRANT(S).....	3
TEST METHODOLOGY	3
MEASUREMENT UNCERTAINTY.....	4
TEST FACILITY	4
SYSTEM TEST CONFIGURATION.....	5
DESCRIPTION OF TEST CONFIGURATION	5
EUT EXERCISE SOFTWARE	5
SPECIAL ACCESSORIES.....	5
EQUIPMENT MODIFICATIONS	5
SUPPORT EQUIPMENT LIST AND DETAILS	5
EXTERNAL I/O CABLE.....	5
BLOCK DIAGRAM OF TEST SETUP	6
SUMMARY OF TEST RESULTS	7
TEST EQUIPMENT LIST	8
FCC §15.107 – AC LINE CONDUCTED EMISSIONS.....	9
APPLICABLE STANDARD	9
EUT SETUP	9
EMI TEST RECEIVER SETUP.....	9
TEST PROCEDURE	10
CORRECTED FACTOR & MARGIN CALCULATION	10
TEST DATA	10
FCC §15.109 - RADIATED SPURIOUS EMISSIONS	15
APPLICABLE STANDARD	15
EUT SETUP	15
EMI TEST RECEIVER SETUP.....	16
TEST PROCEDURE	16
CORRECTED AMPLITUDE & MARGIN CALCULATION	16
TEST DATA	16

GENERAL INFORMATION

Product Description for Equipment under Test (EUT)

Product	Mobile Phone
Tested Model	C6L 2020
Multiple Model	J7L
Model Differences	Refer to the DOS letter
Voltage Range	DC 3.8V from battery or DC 5V from adapter
Highest operating frequency	2690MHz
Date of Test	2020-06-17 to 2020-06-19
Sample serial number	RSZ200611012-EM-S1(Assigned by BACL, Shenzhen)
Received date	2020-06-11
Sample/EUT Status	Good condition
Adapter information	Model: US-WW-1006 Input: AC 100-240V, 50/60Hz, 0.15A Output: DC 5.0V, 1000mA

Objective

This test report is prepared on behalf of BLU Products, Inc. in accordance with Part 2-Subpart J, Part 15-Subparts A, B of the Federal Communication Commissions rules.

The objective of the manufacturer is to determine the compliance of the EUT with FCC Part 15 B.

Related Submittal(s)/Grant(s)

FCC Part 15.247 DSS, FCC Part 15.247 DTS and Part 22H /24E/27 PCE submissions with FCC ID: YHLBLUC6L20.

Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on CISPR 16-4-2:2011, the expanded combined standard uncertainty of test at Bay Area Compliance Laboratories Corp. (Shenzhen) is shown as below. And the uncertainty will be taken into consideration for the test data recorded in the report

Parameter		uncertainty
Conducted Emissions		$\pm 1.95\text{dB}$
Radiated Emissions	Below 1GHz	$\pm 4.75\text{dB}$
	Above 1GHz	$\pm 4.88\text{dB}$

Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.

Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 342867, the FCC Designation No.: CN1221.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062B.

SYSTEM TEST CONFIGURATION

Description of Test Configuration

The system was configured for testing in a manufacturer testing fashion.

EUT operation mode: Downloading (data transfer with computer)

EUT Exercise Software

“BurnIn test v5.3” exercise software was used.

Special Accessories

No special accessory.

Equipment Modifications

No modification was made to the EUT tested.

Support Equipment List and Details

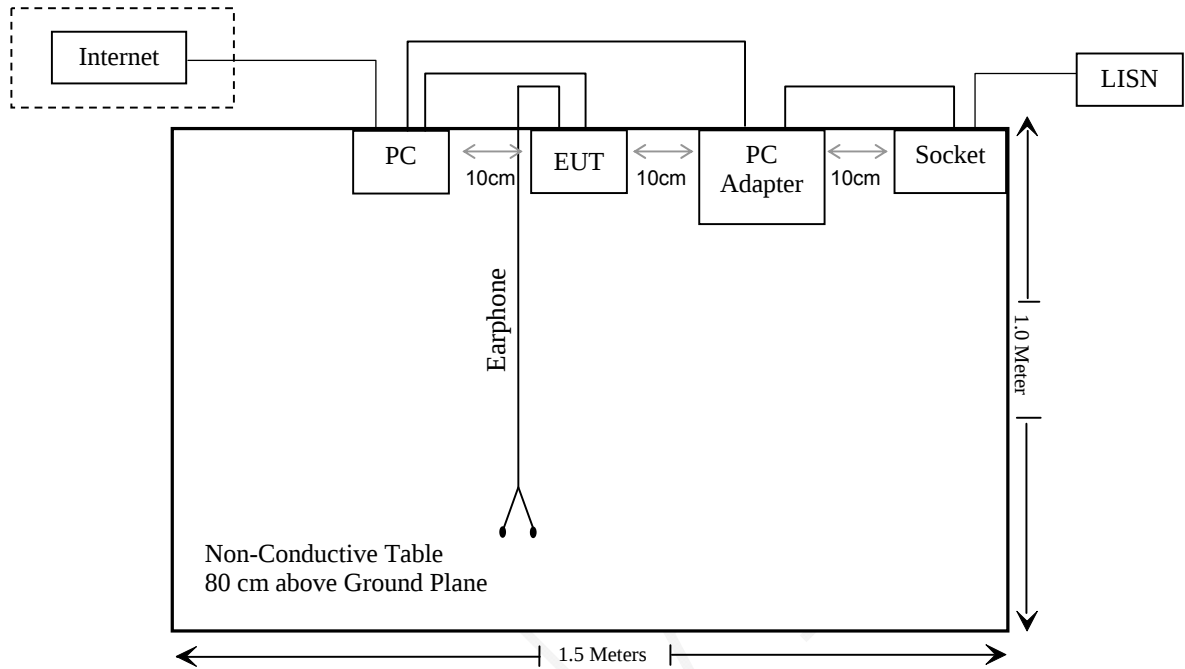
Manufacturer	Description	Model	Serial Number
Toshiba	Laptop	PA3839U-1MPC	00190-046-442-226

External I/O Cable

Cable Description	Length (m)	From/Port	To
Un-shielding Detachable USB Cable	1.0	EUT	Laptop

Block Diagram of Test Setup

For conducted emission:



SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Results
§15.107	AC Line Conducted Emissions	Compliance
§15.109	Radiated Spurious Emissions	Compliance

TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
AC Line Conducted Emission Test					
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2019/7/9	2020/7/8
Rohde & Schwarz	LISN	ENV216	101613	2020/1/22	2021/1/21
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2019/11/29	2020/11/28
Unknown	CE Cable	CE Cable	UF A210B-1-0720-504504	2019/11/29	2020/11/28
Rohde & Schwarz	CE Test software	EMC 32	V8.53.0	NCR	NCR
Radiated Emission Test					
R&S	EMI Test Receiver	ESR3	102455	2019/7/9	2020/7/8
Sonoma instrument	Pre-amplifier	310 N	186238	2020/4/20	2021/4/20
Sunol Sciences	Broadband Antenna	JB1	A040904-1	2017/12/22	2020/12/21
Unknown	Cable 2	RF Cable 2	F-03-EM197	2019/11/29	2020/11/28
Unknown	Cable	Chamber Cable 1	F-03-EM236	2019/11/29	2020/11/28
Rohde & Schwarz	Auto test software	EMC 32	V9.10	NCR	NCR
Rohde & Schwarz	Spectrum Analyzer	FSV40-N	102259	2019/7/22	2020/07/21
COM-POWER	Pre-amplifier	PA-122	181919	2019/11/29	2020/11/28
Sunol Sciences	Horn Antenna	DRH-118	A052604	2017/12/22	2020/12/21
Insulted Wire Inc.	RF Cable	SPS-2503-3150	02222010	2019/11/29	2020/11/28
Unknown	RF Cable	W1101-EQ1 OUT	F-19-EM005	2019/11/29	2020/11/28

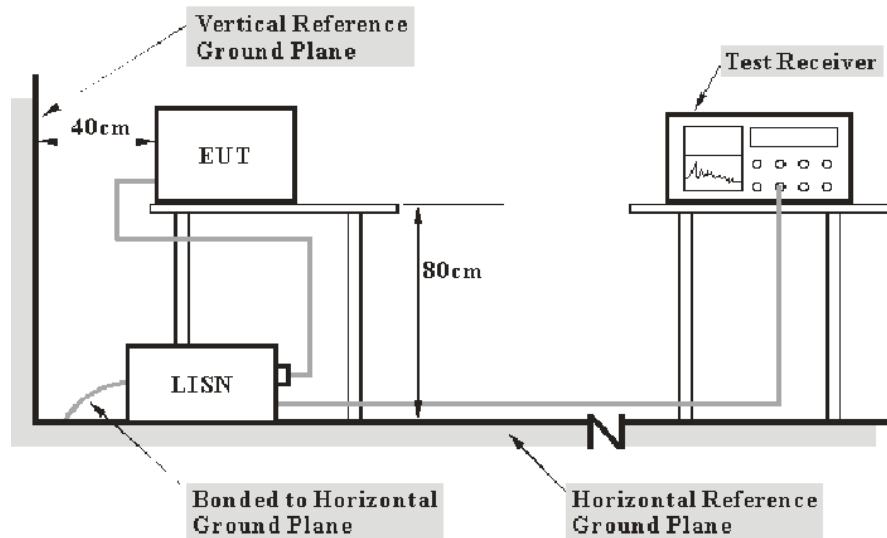
* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

FCC §15.107 – AC LINE CONDUCTED EMISSIONS

Applicable Standard

According to FCC §15.107

EUT Setup



Note: 1. Support units were connected to second LISN.
2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with per ANSI C63.4-2014. The related limit was specified in FCC Part 15.107 Class B.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

Test Procedure

During the conducted emission test, the host PC was connected to the first LISN and the other relevant equipments were connected to the second LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN/ISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Correction Factor} = \text{LISN VDF} + \text{Cable Loss} + \text{Transient Limiter Attenuation}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

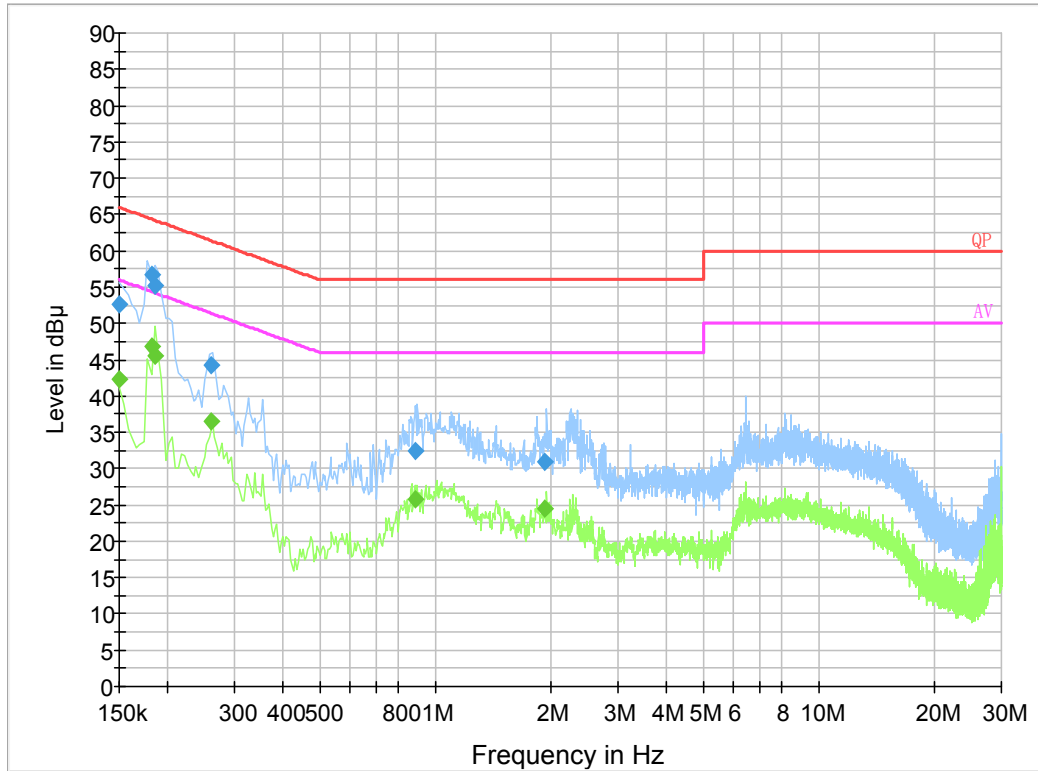
Test Data

Environmental Conditions

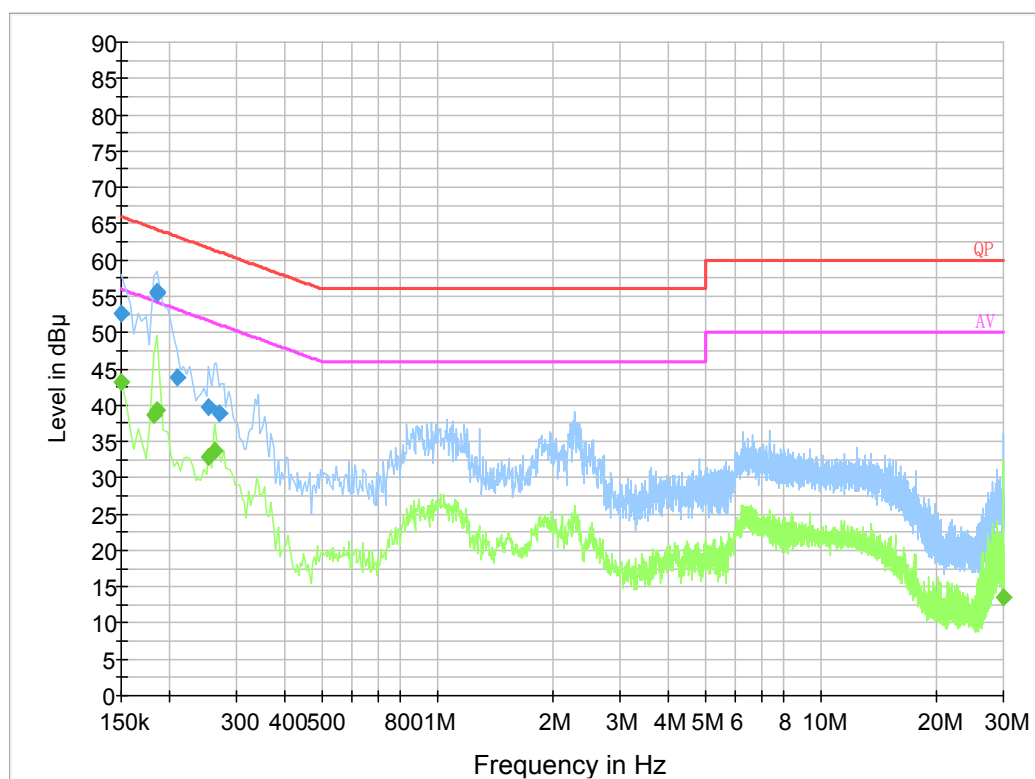
Temperature:	25 °C
Relative Humidity:	65 %
ATM Pressure:	101.0 kPa

The testing was performed by Haiguo Li on 2020-06-19.

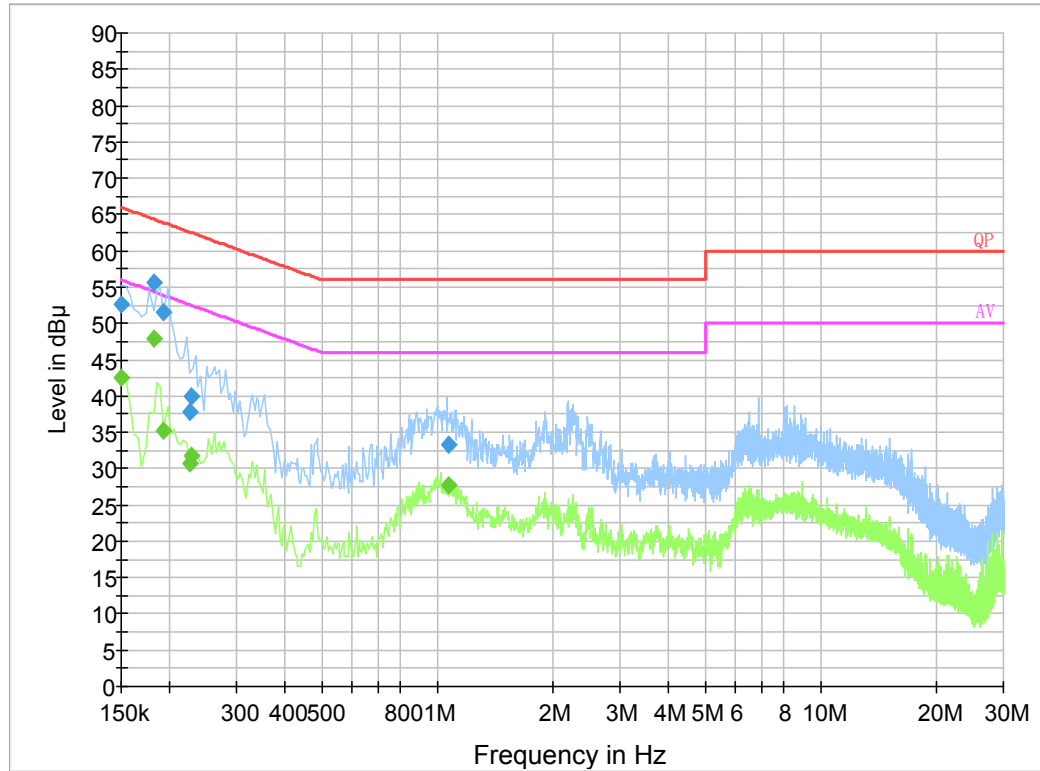
EUT Operation Mode: Downloading

Model: C6L 2020**AC 120V/60 Hz, Line**

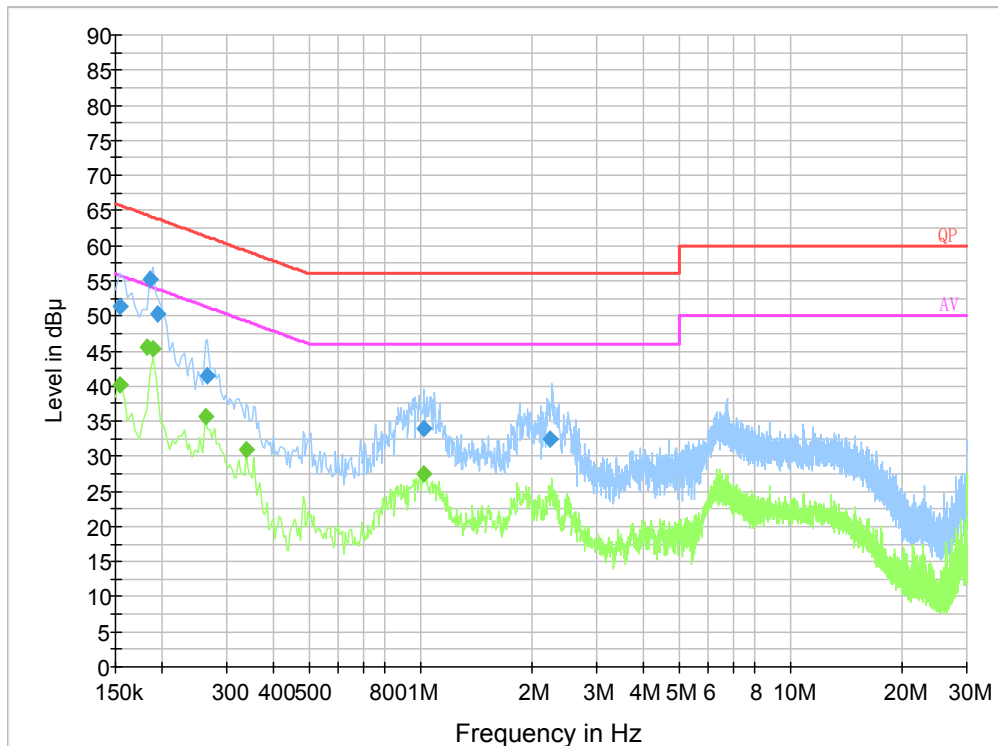
Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.150000	52.5	19.8	66.0	13.5	QP
0.182500	56.6	19.8	64.4	7.8	QP
0.185500	55.1	19.8	64.2	9.1	QP
0.261500	44.2	19.8	61.4	17.2	QP
0.888530	32.4	19.8	56.0	23.6	QP
1.928630	30.9	19.9	56.0	25.1	QP
0.150000	42.3	19.8	56.0	13.7	Ave.
0.182500	46.8	19.8	54.4	7.6	Ave.
0.185500	45.6	19.8	54.2	8.6	Ave.
0.261500	36.6	19.8	51.4	14.8	Ave.
0.888530	25.7	19.8	46.0	20.3	Ave.
1.928630	24.5	19.9	46.0	21.5	Ave.

AC 120V/60 Hz, Neutral

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.150000	52.6	19.8	66.0	13.4	QP
0.185500	55.4	19.8	64.2	8.8	QP
0.186500	55.7	19.8	64.2	8.5	QP
0.209500	43.9	19.8	63.2	19.3	QP
0.253500	39.8	19.8	61.6	21.8	QP
0.270500	38.9	19.7	61.1	22.2	QP
0.150000	43.1	19.8	56.0	12.9	Ave.
0.182000	38.6	19.8	54.4	15.8	Ave.
0.186000	39.3	19.8	54.2	14.9	Ave.
0.254000	32.8	19.8	51.6	18.8	Ave.
0.262000	33.8	19.8	51.4	17.6	Ave.
29.978000	13.6	20.1	50.0	36.4	Ave.

Model: J7L**AC 120V/60 Hz, Line**

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.150000	52.6	19.8	66.0	13.4	QP
0.182500	55.6	19.8	64.4	8.8	QP
0.193500	51.5	19.8	63.9	12.4	QP
0.225500	37.9	19.8	62.6	24.7	QP
0.229500	39.9	19.8	62.5	22.6	QP
1.074070	33.3	19.9	56.0	22.7	QP
0.150000	42.4	19.8	56.0	13.6	Ave.
0.182500	47.8	19.8	54.4	6.6	Ave.
0.193500	35.3	19.8	53.9	18.6	Ave.
0.225500	30.7	19.8	52.6	21.9	Ave.
0.229500	31.9	19.8	52.5	20.6	Ave.
1.074070	27.7	19.9	46.0	18.3	Ave.

AC 120V/60 Hz, Neutral

Frequency (MHz)	Corrected Amplitude (dBμV)	Correction Factor (dB)	Limit (dBμV)	Margin (dB)	Detector (PK/Ave./QP)
0.154000	51.4	19.8	65.8	14.4	QP
0.185500	55.3	19.8	64.2	8.9	QP
0.194500	50.2	19.8	63.8	13.6	QP
0.265500	41.5	19.7	61.3	19.8	QP
1.022670	34.0	19.8	56.0	22.0	QP
2.239890	32.5	19.8	56.0	23.5	QP
0.154000	40.1	19.8	55.8	15.7	Ave.
0.182000	45.5	19.8	54.4	8.9	Ave.
0.190000	45.2	19.8	54.0	8.8	Ave.
0.262000	35.7	19.8	51.4	15.7	Ave.
0.338000	31.0	19.8	49.3	18.3	Ave.
1.022000	27.6	19.8	46.0	18.4	Ave.

Note:

- 1) Correction Factor = LISN VDF (Voltage Division Factor) + Cable Loss + Transient Limiter Attenuation
- 2) Corrected Amplitude = Reading + Correction Factor
- 3) Margin = Limit – Corrected Amplitude

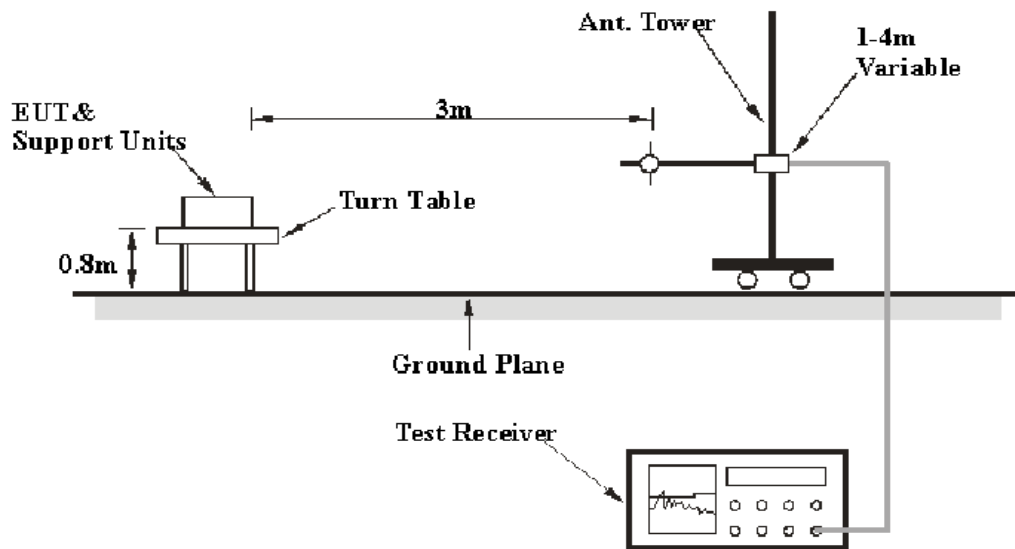
FCC §15.109 - RADIATED SPURIOUS EMISSIONS

Applicable Standard

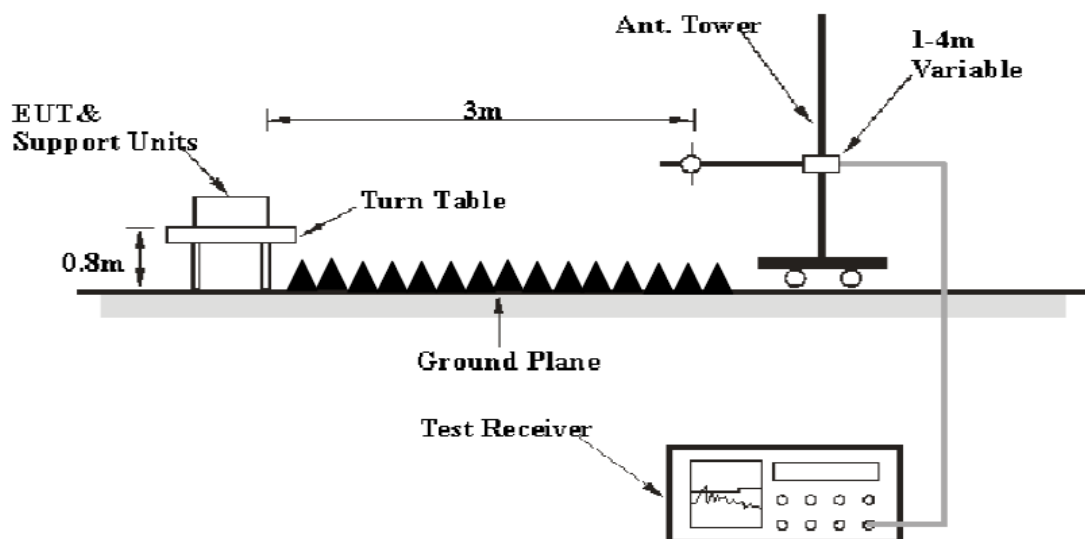
FCC §15.109

EUT Setup

Below 1GHz:



Above 1GHz:



The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.4-2014. The specification used was the FCC Part 15.109 Class B limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

EMI Test Receiver Setup

The system was investigated from 30 MHz to 13.5 GHz.

During the radiated emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	Ave.

Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All data was recorded in the Quasi-peak detector mode from 30 MHz to 1 GHz and PK and average detector modes for frequencies above 1 GHz.

Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

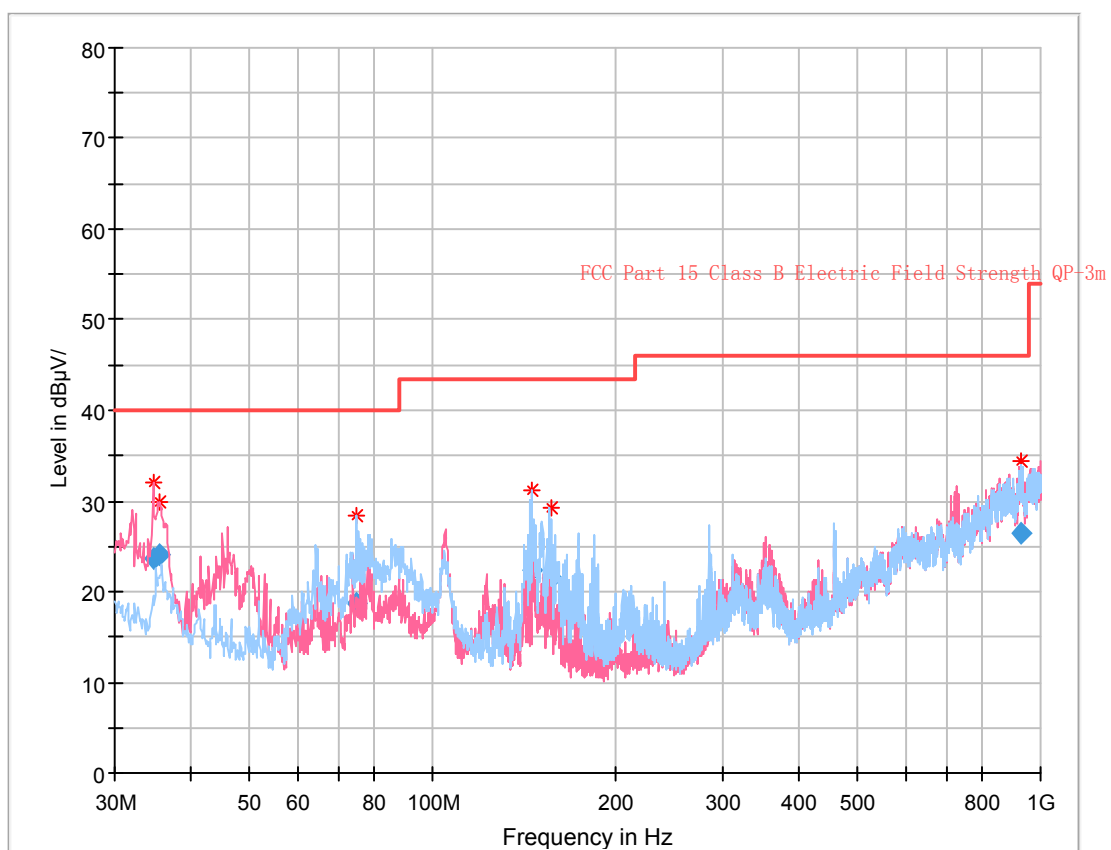
Test Data

Environmental Conditions

Temperature:	24~26 °C
Relative Humidity:	50~60 %
ATM Pressure:	101.0 kPa

The testing was performed by Holland Yang on 2020-06-18 for below 1GHz and Leven Gan on 2020-06-17 for above 1GHz.

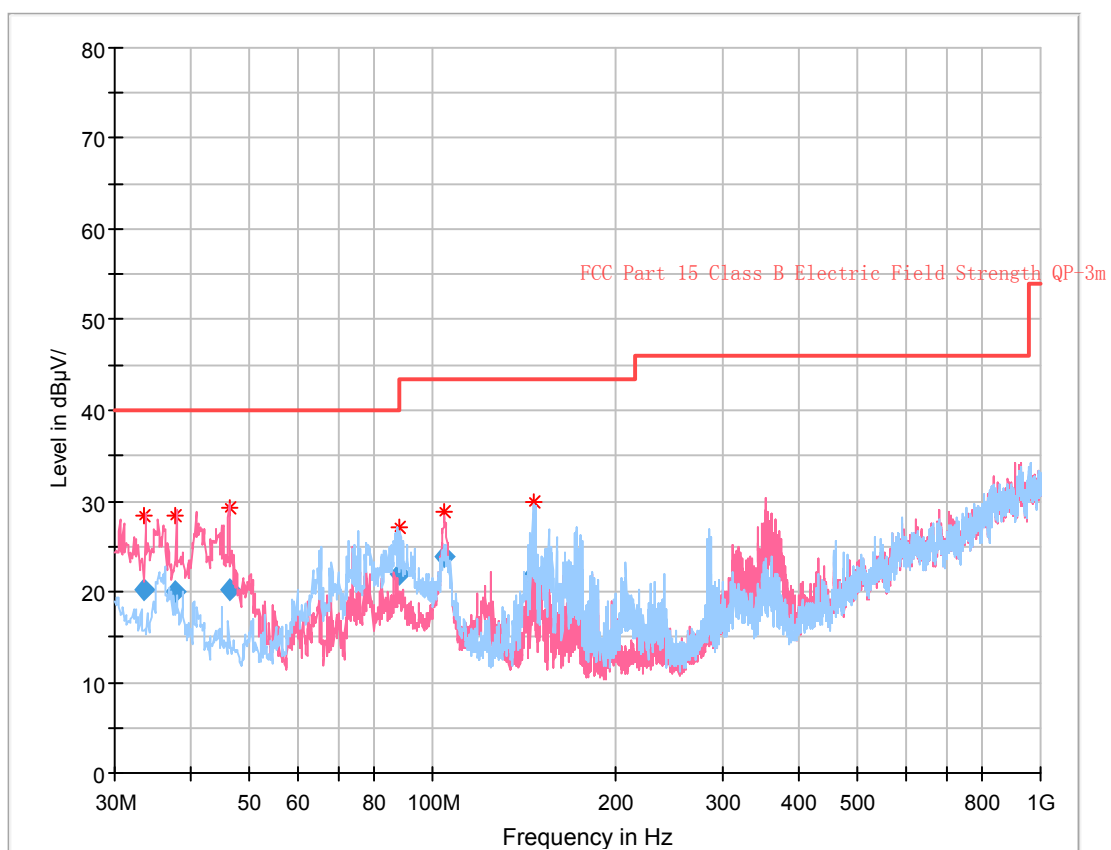
EUT Operation Mode: Downloading

Model: C6L 2020**30 MHz – 1 GHz:**

Frequency (MHz)	Corrected Amplitude (dBμV/m)	Antenna height (cm)	Antenna Polarity	Turntable position (degree)	Correction Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
34.877000	23.72	114.0	V	249.0	-10.4	40.00	16.28
35.473375	24.06	110.0	V	258.0	-10.8	40.00	15.94
75.207625	18.76	342.0	H	277.0	-20.3	40.00	21.24
145.568500	22.39	176.0	H	58.0	-14.2	43.50	21.11
156.330500	21.51	199.0	H	38.0	-14.4	43.50	21.99
931.682875	26.38	392.0	H	250.0	4.8	46.00	19.62

1 GHz – 13.5 GHz:

Frequency (MHz)	Measurement		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dB μ V/m)	FCC Part 15B	
	Reading (dB μ V)	PK/QP/Ave.		Height (m)	Polar (H / V)			Limit (dB μ V/m)	Margin (dB)
1444.51	43.55	PK	185	1.8	H	-3.12	40.43	74	33.57
1444.51	28.12	Ave.	185	1.8	H	-3.12	25.00	54	29.00
1444.51	42.98	PK	331	1.4	V	-3.12	39.86	74	34.14
1444.51	27.94	Ave.	331	1.4	V	-3.12	24.82	54	29.18
1982.64	42.58	PK	88	2.0	H	-1.29	41.29	74	32.71
1982.64	27.78	Ave.	88	2.0	H	-1.29	26.49	54	27.51
1982.64	42.64	PK	161	2.3	V	-1.29	41.35	74	32.65
1982.64	27.81	Ave.	161	2.3	V	-1.29	26.52	54	27.48

Model: J7L**30 MHz – 1 GHz:**

Frequency (MHz)	Corrected Amplitude (dBμV/m)	Antenna height (cm)	Antenna Polarity	Turntable position (degree)	Correction Factor (dB/m)	Limit (dBμV/m)	Margin (dB)
33.479750	20.23	101.0	V	241.0	-9.7	40.00	19.77
37.853625	20.02	101.0	V	114.0	-12.4	40.00	19.98
46.397500	20.16	106.0	V	13.0	-17.9	40.00	19.84
88.084625	21.96	400.0	H	252.0	-19.2	43.50	21.54
104.792250	23.94	128.0	V	266.0	-16.4	43.50	19.56
146.766125	21.85	187.0	H	50.0	-14.2	43.50	21.65

1 GHz – 13.5 GHz:

Frequency (MHz)	Measurement		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dB μ V/m)	FCC Part 15B	
	Reading (dB μ V)	PK/QP/Ave.		Height (m)	Polar (H / V)			Limit (dB μ V/m)	Margin (dB)
1148.64	42.68	PK	208	1.5	H	-5.33	37.35	74	36.65
1148.64	27.84	Ave.	208	1.5	H	-5.33	22.51	54	31.49
1148.64	42.41	PK	49	2.2	V	-5.33	37.08	74	36.92
1148.64	27.79	Ave.	49	2.2	V	-5.33	22.46	54	31.54
1776.82	43.26	PK	341	1.5	H	-2.05	41.21	74	32.79
1776.82	27.94	Ave.	341	1.5	H	-2.05	25.89	54	28.11
1776.82	43.67	PK	324	1.5	V	-2.05	41.62	74	32.38
1776.82	28.06	Ave.	324	1.5	V	-2.05	26.01	54	27.99

Note:

- 1) Correction Factor=Antenna factor (RX) + cable loss – amplifier factor
- 2) Corrected Amplitude = Correction Factor + Reading
- 3) Margin = Limit - Corrected Amplitude

******* END OF REPORT *******