

FCC TEST REPORT

Product Name: Smart Phone

Trade Mark: BLU

Model No.: C6L

Report Number: 2312268657RFM-2

Test Standards: FCC 47 CFR Part 22
FCC 47 CFR Part 24
FCC 47 CFR Part 27

FCC ID: YHLBLUC6LW

Test Result: PASS

Date of Issue: February 1, 2024

Prepared for:

BLU Products, Inc.

8600 NW 36th Street, Suite #300 | Miami, FL 33166

Prepared by:

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

TEL: +86-755-2823 0888

FAX: +86-755-2823 0886

Prepared by:

David Chen

David Chen
Senior Project Engineer

Reviewed by:

Henry Lu

Henry Lu
Team Leader

Approved by:

Robben Chen

Robben Chen
Assistant Manager

Date:

February 1, 2024

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCC4G-V1.1

Version

Version No.	Date	Description
V1.0	February 1, 2024	Original

**Shenzhen UnionTrust Quality and Technology Co., Ltd.**

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com<http://www.uttlab.com>

UTTR-RF-FCC4G-V1.1

CONTENTS

1. GENERAL INFORMATION	5
1.1 CLIENT INFORMATION	5
1.2 EUT INFORMATION	5
1.2.1 GENERAL DESCRIPTION OF EUT	5
1.2.2 DESCRIPTION OF ACCESSORIES	5
1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD	6
1.4 DESCRIPTION OF SUPPORT UNITS	9
1.5 TEST LOCATION	9
1.6 TEST FACILITY	9
1.7 DEVIATION FROM STANDARDS	9
1.8 ABNORMALITIES FROM STANDARD CONDITIONS	9
1.9 OTHER INFORMATION REQUESTED BY THE CUSTOMER	10
1.10 MEASUREMENT UNCERTAINTY	10
2. TEST SUMMARY	11
3. EQUIPMENT LIST	14
4. TEST CONFIGURATION	15
4.1 ENVIRONMENTAL CONDITIONS FOR TESTING	15
4.2 TEST SETUP	16
4.2.1 FOR RADIATED EMISSIONS TEST SETUP	16
4.2.2 FOR CONDUCTED RF TEST SETUP	17
4.3 TEST CHANNELS	18
4.4 SYSTEM TEST CONFIGURATION	20
4.5 PRE-SCAN	21
5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION	23
5.1 REFERENCE DOCUMENTS FOR TESTING	23
5.2 CONDUCTED OUTPUT POWER	23
5.2.1 LTE BAND 2	24
5.2.2 LTE BAND 4	25
5.2.3 LTE BAND 5	26
5.2.4 LTE BAND 7	27
5.2.5 LTE BAND 17	28
5.2.6 LTE BAND 38	29
5.3 ERP OR EIRP	30
5.3.1 LTE BAND 2	31
5.3.2 LTE BAND 4	32
5.3.3 LTE BAND 5	33
5.3.4 LTE BAND 7	33
5.3.5 LTE BAND 17	34
5.3.6 LTE BAND 38	34
5.4 PEAK-TO-AVERAGE RATIO	35
5.5 99%&26dB BANDWIDTH	36
5.6 BAND EDGE AT ANTENNA TERMINALS	37
5.7 SPURIOUS EMISSIONS AT ANTENNA TERMINALS	38
5.8 FIELD STRENGTH OF SPURIOUS RADIATION	39
5.8.1 LTE BAND 2	40
5.8.2 LTE BAND 4	41
5.8.3 LTE BAND 5	42
5.8.4 LTE BAND 7	43
5.8.5 LTE BAND 17	44
5.8.6 LTE BAND 38	45
5.9 FREQUENCY STABILITY	46
APPENDIX A RF TEST DATA	50

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCC4G-V1.1

A.1	LTE BAND 2	50
A.2	LTE BAND 4	75
A.3	LTE BAND 5	100
A.4	LTE BAND 7	117
A.5	LTE BAND 17	134
A.6	LTE BAND 38	143
APPENDIX 1 PHOTOS OF TEST SETUP		157
APPENDIX 2 PHOTOS OF EUT CONSTRUCTIONAL DETAILS		157



1. GENERAL INFORMATION

1.1 CLIENT INFORMATION

Applicant:	BLU Products, Inc.
Address of Applicant:	8600 NW 36th Street, Suite #300 Miami, FL 33166
Manufacturer:	BLU Products, Inc.
Address of Manufacturer:	8600 NW 36th Street, Suite #300 Miami, FL 33166

1.2 EUT INFORMATION

1.2.1 General Description of EUT

Product Name:	Smart Phone		
Model No.:	C6L		
Trade Mark:	BLU		
DUT Stage:	Identical Prototype		
EUT Supports Function: (Provided by the customer)	GSM Bands:	GSM850/PCS 1900	
	UTRA Bands:	WCDMA Band II/ Band IV/ Band V	
	E-UTRA Bands:	FDD Band 2/ Band 4/ Band 5/ Band 7/ Band 17 TDD Band 38	
	2.4 GHz ISM Band:	IEEE 802.11b/g/n	
		Bluetooth V4.2	
	RNSS Band:	1559 MHz to 1610 MHz	GPS/ BDS/ GLONASS
	BSR:	VHF Band II	FM
Software Version:	BLU_X0030_V13.0.G.01.01_GENERIC_23-08-2023_1252 (Provided by the customer)		
Hardware Version:	FS170-76G (Provided by the customer)		
Sample Received Date:	December 26, 2023		
Sample Tested Date:	December 26, 2023 to January 19, 2024		
Remark:	The above EUT's information was provided by customer. Please refer to the specifications or user's manual for more detailed description.		

1.2.2 Description of Accessories

Adapter	
Model No.:	US-AR-1001
Input:	100-240 V~50/60 Hz 0.2 A
Output:	5.0 V \equiv 1000 mA

Battery	
Model No.:	C775855300L
Battery Type:	Lithium-ion Battery
Rated Voltage:	3.8 Vdc
Limited Charge Voltage:	4.35 Vdc
Rated Capacity:	3000 mAh

Cable	
Connector:	USB Cable
Cable Type:	Unshielded without ferrite
Length:	0.5 Meter

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCC4G-V1.1

1.3 PRODUCT SPECIFICATION SUBJECTIVE TO THIS STANDARD

Support Networks:	Single Carrier: LTE Band 2/4/5/7/17/38	
Type of Modulation:	QPSK, 16QAM	
Antenna Type: (Provided by the customer)	PIFA Antenna	
Antenna Gain: (Provided by the customer)	LTE Band 2:	-1.25 dBi
	LTE Band 4:	-0.77 dBi
	LTE Band 5:	-3.65 dBi
	LTE Band 7:	2.51 dBi
	LTE Band 17:	-4.68 dBi
	LTE Band 38:	2.51 dBi
Sample No.:	Radiated: S202312262546-ZJA02/6	
	Conducted: S202312262546-ZJA05/6	
Normal Test Voltage:	3.8 Vdc	
Extreme Test Voltage:	3.4 to 4.35Vdc	
Extreme Test Temperature:	-30 °C to +50 °C	

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCC4G-V1.1

Summary of Results:									
Bands	BW	Modulation	Frequency Range	Max RF Output Power (dBm)		ERP/EIRP	99% BW	Emission Designator	
	(MHz)		(MHz)	Conducted (Average)	ERP/EIRP (Average)	(W)	(MHz)		
2	1.4	QPSK	1850.7-1909.3	23.29	22.04	0.1600	1.0792	1M08G7D	
		16QAM		22.91	21.66	0.1466	1.0813	1M08W7D	
	3	QPSK	1851.5-1908.5	23.17	21.92	0.1556	2.6852	2M69G7D	
		16QAM		22.60	21.35	0.1365	2.6870	2M69W7D	
	5	QPSK	1852.5-1907.5	23.34	22.09	0.1618	4.4566	4M46G7D	
		16QAM		22.18	20.93	0.1239	4.4616	4M46W7D	
	10	QPSK	1855.0-1905.0	23.26	22.01	0.1589	8.9543	8M95G7D	
		16QAM		22.51	21.26	0.1337	8.9372	8M94W7D	
	15	QPSK	1857.5-1902.5	23.28	22.03	0.1596	13.422	13M4G7D	
		16QAM		22.45	21.20	0.1318	13.400	13M4W7D	
	20	QPSK	1860.0-1900.0	23.38	22.13	0.1633	17.917	17M9G7D	
		16QAM		22.25	21.00	0.1259	17.888	17M9W7D	
	4	1.4	QPSK	1710.7-1754.3	23.39	22.62	0.1828	1.0814	1M08G7D
			16QAM		22.40	21.63	0.1455	1.0805	1M08W7D
3		QPSK	1711.5-1753.5	23.32	22.55	0.1799	2.6886	2M69G7D	
		16QAM		22.72	21.95	0.1567	2.6841	2M68W7D	
5		QPSK	1712.5-1752.5	23.37	22.60	0.1820	4.4650	4M47G7D	
		16QAM		22.24	21.47	0.1403	4.4602	4M46W7D	
10		QPSK	1715-1750	23.37	22.60	0.1820	8.9466	8M95G7D	
		16QAM		22.75	21.98	0.1578	8.9411	8M94W7D	
15		QPSK	1717.5-1747.5	23.34	22.57	0.1807	13.409	13M4G7D	
		16QAM		22.60	21.83	0.1524	13.414	13M4W7D	
20		QPSK	1720-1745	23.41	22.64	0.1837	17.873	17M9G7D	
		16QAM		22.27	21.50	0.1413	17.928	17M9W7D	
5		1.4	QPSK	824.7-848.3	22.96	17.16	0.0520	1.0802	1M08G7D
			16QAM		22.63	16.83	0.0482	1.0821	1M08W7D
	3	QPSK	825.5-847.5	22.90	17.10	0.0513	2.694	2M69G7D	
		16QAM		22.45	16.65	0.0462	2.689	2M69W7D	
	5	QPSK	826.5-846.5	23.05	17.25	0.0531	4.4609	4M46G7D	
		16QAM		22.12	16.32	0.0429	4.4617	4M46W7D	
	10	QPSK	829-844	23.23	17.43	0.0553	8.9512	8M95G7D	
		16QAM		22.25	16.45	0.0442	8.9324	8M93W7D	

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCC4G-V1.1

Bands	BW	Modulation	Frequency Range	Max RF Output Power (dBm)		ERP/EIRP (W)	99% BW (MHz)	Emission Designator
	(MHz)		(MHz)	Conducted (Average)	ERP/EIRP (Average)			
7	5	QPSK	2502.5-2567.5	23.65	26.16	0.4130	4.4627	4M46G7D
		16QAM		22.57	25.08	0.3221	4.4648	4M46W7D
	10	QPSK	2505-2565	23.65	26.16	0.4130	8.9401	8M94G7D
		16QAM		22.78	25.29	0.3381	8.9503	8M95W7D
	15	QPSK	2507.5-2562.5	23.48	25.99	0.3972	13.407	13M4G7D
		16QAM		22.94	25.45	0.3508	13.421	13M4W7D
20	QPSK	2510-2560	23.69	26.20	0.4169	17.880	17M9G7D	
	16QAM		22.98	25.49	0.3540	17.900	17M9W7D	
17	5	QPSK	706.5-713.5	22.74	15.91	0.0390	4.4647	4M46G7D
		16QAM		22.03	15.20	0.0331	4.4581	4M46W7D
	10	QPSK	709-711	22.94	16.11	0.0408	8.9327	8M93G7D
		16QAM		21.97	15.14	0.0327	8.9325	8M93W7D
38	5	QPSK	2572.5-2617.5	23.76	24.12	0.2582	4.4661	4M47G7D
		16QAM		22.83	23.19	0.2084	4.4527	4M45W7D
	10	QPSK	2575-2615	23.71	24.07	0.2553	8.9598	8M96G7D
		16QAM		23.15	23.51	0.2244	8.9560	8M96W7D
	15	QPSK	2577.5-2612.5	23.73	24.09	0.2564	13.408	13M4G7D
		16QAM		23.08	23.44	0.2208	13.420	13M4W7D
20	QPSK	2580-2610	23.87	24.23	0.2649	17.894	17M9G7D	
	16QAM		23.26	23.62	0.2301	17.910	17M9W7D	

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCC4G-V1.1

1.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested with associated equipment below.

1) Support Equipment

Description	Manufacturer	Model No.	Serial Number	Supplied by
--	--	--	--	--

2) Support Cable

Cable No.	Description	Connector	Length	Supplied by
1	Antenna Cable	SMA	0.1 Meter	UnionTrust

1.5 TEST LOCATION

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China 518109

Telephone: +86 (0) 755 2823 0888

Fax: +86 (0) 755 2823 0886

1.6 TEST FACILITY

The test facility is recognized, certified, or accredited by the following organizations:

CNAS-Lab Code: L9069

The measuring equipment utilized to perform the tests documented in this report has been calibrated once a year or in accordance with the manufacturer's recommendations, and is traceable under the ISO/IEC 17025 to international or national standards. Equipment has been calibrated by accredited calibration laboratories.

A2LA-Lab Certificate No.: 4312.01

Shenzhen UnionTrust Quality and Technology Co., Ltd. has been accredited by A2LA for technical competence in the field of electrical testing, and proved to be in compliance with ISO/IEC 17025 General Requirements for the Competence of Testing and Calibration Laboratories and any additional program requirements in the identified field of testing.

ISED Wireless Device Testing Laboratories

CAB identifier: CN0032

FCC Accredited Lab.

Designation Number: CN1194

Test Firm Registration Number: 259480

1.7 DEVIATION FROM STANDARDS

None.

1.8 ABNORMALITIES FROM STANDARD CONDITIONS

None.

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCC4G-V1.1

1.9 OTHER INFORMATION REQUESTED BY THE CUSTOMER

None.

1.10 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the Product as specified in CISPR 16-4-2. This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

No.	Item	Measurement Uncertainty
1	Conducted Output Power	±0.7 dB
2	99%&26dB Bandwidth	±1.86 %
3	Emission Mask	±2.7 dBm
4	Spurious emissions at antenna terminals	±2.7 dBm
5	Field strength of spurious radiation	30 MHz-1 GHz: ±4.9 dB 1 GHz-18 GHz: ±4.8 dB 18 GHz-40 GHz: ±5.1 dB
6	Frequency stability	±6.5 x 10 ⁻⁸
7	Humidity	±3.9 %
8	Temperature	±0.62 °C
9	DC Voltages	±0.68 %

2. TEST SUMMARY

FCC 47 CFR Part 24 Test Cases (Band 2)			
Test Item	Test Requirement	Test Method	Result
Equivalent Isotropic Radiated Power (EIRP)	FCC 47 CFR Part 2.1046(a) & FCC 47 CFR Part 24.232(c)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Conducted Output Power	FCC 47 CFR Part 2.1046(a) & FCC 47 CFR Part 24.232(c)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Peak-to-average ratio	FCC 47 CFR Part 24.232(d)	KDB 971168 D01v03r01	PASS
99%&26dB Bandwidth	FCC 47 CFR Part 2.1049(h) & FCC 47 CFR Part 24.238(b)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Band Edge at antenna terminals	FCC 47 CFR Part 2.1051 & FCC 47 CFR Part 24.238(a)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Spurious emissions at antenna terminals	FCC 47 CFR Part 2.1051 & FCC 47 CFR Part 24.238(a)(b)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Field strength of spurious radiation	FCC 47 CFR Part 2.1053 & FCC 47 CFR Part 24.238(a)(b)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Frequency stability	FCC 47 CFR Part 2.1055 & FCC 47 CFR Part 24.235	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS

FCC 47 CFR Part 27 Test Cases (LTE Band 4)			
Test Item	Test Requirement	Test Method	Result
Equivalent Isotropic Radiated Power (EIRP)	FCC 47 CFR Part 2.1046(a) & FCC 47 CFR Part 27.50(d)(4)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Conducted Output Power	FCC 47 CFR Part 2.1046(a) & FCC 47 CFR Part 27.50(d)(4)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Peak-to-average ratio	FCC 47 CFR Part 27.50(d)(5)	KDB 971168 D01v03r01	PASS
99%&26dB Bandwidth	FCC 47 CFR Part 2.1049(h) & FCC 47 CFR Part 27.53(h)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Band Edge at antenna terminals	FCC 47 CFR Part 27.53(h)(1)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Spurious emissions at antenna terminals	FCC 47 CFR Part 2.1051 & FCC 47 CFR Part 27.53(h)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Field strength of spurious radiation	FCC 47 CFR Part 2.1053 & FCC 47 CFR Part 27.53(h)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Frequency stability	FCC 47 CFR Part 2.1055 & FCC 47 CFR Part 27.54	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS

FCC 47 CFR Part 22 Test Cases (Band 5)			
Test Item	Test Requirement	Test Method	Result
Effective Radiated Power (ERP)	FCC 47 CFR Part 2.1046(a) & FCC 47 CFR Part 22.913(a)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Conducted Output Power	FCC 47 CFR Part 2.1046(a) & FCC 47 CFR Part 22.913(a)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Peak-to-average ratio	FCC 47 CFR Part 22.913(a)	KDB 971168 D01v03r01	PASS
99%&26dB Bandwidth	FCC 47 CFR Part 2.1049(h)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Band Edge at antenna terminals	FCC 47 CFR Part 2.1051 & FCC 47 CFR Part 22.917(a)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Spurious emissions at antenna terminals	FCC 47 CFR Part 2.1051 & FCC 47 CFR Part 22.917(a)(b)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Field strength of spurious radiation	FCC 47 CFR Part 2.1053 & FCC 47 CFR Part 22.917(a)(b)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Frequency stability	FCC 47 CFR Part 2.1055 & FCC 47 CFR Part 22.355	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS

FCC 47 CFR Part 27 Test Cases (LTE Band 17)			
Test Item	Test Requirement	Test Method	Result
Effective Radiated Power (ERP)	FCC 47 CFR Part 2.1046(a) & FCC 47 CFR Part 27.50(c)(10)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Conducted Output Power	FCC 47 CFR Part 2.1046(a) & FCC 47 CFR Part 27.50(c)(10)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Peak-to-average ratio	FCC 47 CFR Part 27.50(d)(5)	KDB 971168 D01v03r01	PASS
99%&26dB Bandwidth	FCC 47 CFR Part 2.1049(h) & FCC 47 CFR Part 27.53(g)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Band Edge at antenna terminals	FCC 47 CFR Part 27.53(g)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Spurious emissions at antenna terminals	FCC 47 CFR Part 2.1051 & FCC 47 CFR Part 27.53(g)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Field strength of spurious radiation	FCC 47 CFR Part 2.1053 & FCC 47 CFR Part 27.53(g)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Frequency stability	FCC 47 CFR Part 2.1055 & FCC 47 CFR Part 27.54	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCC4G-V1.1

FCC 47 CFR Part 27 Test Cases (LTE Band 7& Band 38)			
Test Item	Test Requirement	Test Method	Result
Equivalent Isotropic Radiated Power (EIRP)	FCC 47 CFR Part 2.1046(a) & FCC 47 CFR Part 27.50(h)(2)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Conducted Output Power	FCC 47 CFR Part 2.1046(a) & FCC 47 CFR Part 27.50(h)(2)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Peak-to-average ratio	FCC 47 CFR Part 27.50(d)(5)	KDB 971168 D01v03r01	PASS
99%&26dB Bandwidth	FCC 47 CFR Part 2.1049(h)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Band Edge at antenna terminals	FCC 47 CFR Part 27.53(m)(4)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Spurious emissions at antenna terminals	FCC 47 CFR Part 2.1051 & FCC 47 CFR Part 27.53(m)(4)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Field strength of spurious radiation	FCC 47 CFR Part 2.1053 & FCC 47 CFR Part 27.53(m)(4)	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS
Frequency stability	FCC 47 CFR Part 2.1055 & FCC 47 CFR Part 27.54	ANSI C63.26-2015 & KDB 971168 D01v03r01	PASS

Disclaimer and Explanations:

The declared of product specification and data (e.g. antenna gain, RF specification, etc) for EUT presented in the report are provided by the customer, and the customer takes all the responsibilities for the accuracy of product specification.

3. EQUIPMENT LIST

Radiated Emission Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
<input checked="" type="checkbox"/>	3m SAC	ETS-LINDGREN	3M	Euroshiedpn-CT001270-1317	22-Jan-2021	21-Jan-2024
<input checked="" type="checkbox"/>	Receiver	R&S	ESIB26	100114	27-Oct-2023	26-Oct-2024
<input checked="" type="checkbox"/>	Broadband Antenna	ETS-LINDGREN	3142E	00201566	30-Oct-2023	29-Oct-2024
<input checked="" type="checkbox"/>	6dB Attenuator	Talent	RA6A5-N-18	18103001	30-Oct-2023	29-Oct-2024
<input checked="" type="checkbox"/>	Preamplifier	HP	8447F	2805A02960	31-Oct-2023	30-Oct-2024
<input checked="" type="checkbox"/>	Double-Ridged Waveguide Horn Antenna (Pre-amplifier)	ETS-LINDGREN	3117-PA	00201541	16-Apr-2023	15-Apr-2025
<input checked="" type="checkbox"/>	Double-Ridged Waveguide Horn Antenna (Pre-amplifier)	ETS-LINDGREN	00118385	00201874	31-Oct-2023	30-Oct-2024
<input checked="" type="checkbox"/>	Double-Ridged Waveguide Horn Antenna (Pre-amplifier)	ETS-LINDGREN	3116C-PA	00202652	30-Oct-2023	29-Oct-2024
<input checked="" type="checkbox"/>	Pre-amplifier	ETS-LINDGREN	00118384	00202652	30-Oct-2023	29-Oct-2024
<input checked="" type="checkbox"/>	Multi device Controller	ETS-LINDGREN	7006-001	00160105	N/A	N/A
<input checked="" type="checkbox"/>	Test Software	Audix	e3	Software Version: 9.160323		

RF Conducted Test Equipment List						
Used	Equipment	Manufacturer	Model No.	Serial Number	Cal. date	Cal. Due date
<input checked="" type="checkbox"/>	EXA Signal Analyzer	KEYSIGHT	N9010B	MY62060155	19-Apr-2023	18-Apr-2024
<input checked="" type="checkbox"/>	Spectrum Analyzer	R&S	FSV40-N	101653	14-Apr-2023	13-Apr-2024
<input checked="" type="checkbox"/>	DC Source	KIKUSUI	PWR400L	LK003024	N/A	N/A
<input checked="" type="checkbox"/>	Digital multimeter	FLUKE	15B+	30701460WS15	31-Oct-2023	30-Oct-2024
<input checked="" type="checkbox"/>	Temp & Humidity chamber	Votisch	VT4002	58566133290020	14-Apr-2023	13-Apr-2024
<input checked="" type="checkbox"/>	Wideband Radio Communication Tester	R&S	CMW500	119583	14-Apr-2023	13-Apr-2024
<input checked="" type="checkbox"/>	Wideband Radio Communication Tester	R&S	CMW500	120932	14-Apr-2023	13-Apr-2024

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCC4G-V1.1

4. TEST CONFIGURATION

4.1 ENVIRONMENTAL CONDITIONS FOR TESTING


Test Environment	Selected Values During Tests		
Test Condition	Ambient		
	Temperature (°C)	Voltage (V)	Relative Humidity (%)
TN/VN	+15 to +35	3.8	20 to 75
TL/VL	-30	3.4	20 to 75
TH/VL	+50	3.4	20 to 75
TL/VH	-30	4.35	20 to 75
TH/VH	+50	4.35	20 to 75

Remark:


- 1) The EUT just work in such extreme temperature of -30 °C to +50 °C and the extreme voltage of 3.4 V to 4.35 V, so here the EUT is tested in the temperature of -30 °C to +50 °C and the voltage of 3.4 V to 4.35 V.
- 2) VN: Normal Voltage; TN: Normal Temperature;
 TL: Low Extreme Test Temperature; TH: High Extreme Test Temperature;
 VL: Low Extreme Test Voltage; VH: High Extreme Test Voltage.

4.2 TEST SETUP

4.2.1 For Radiated Emissions test setup

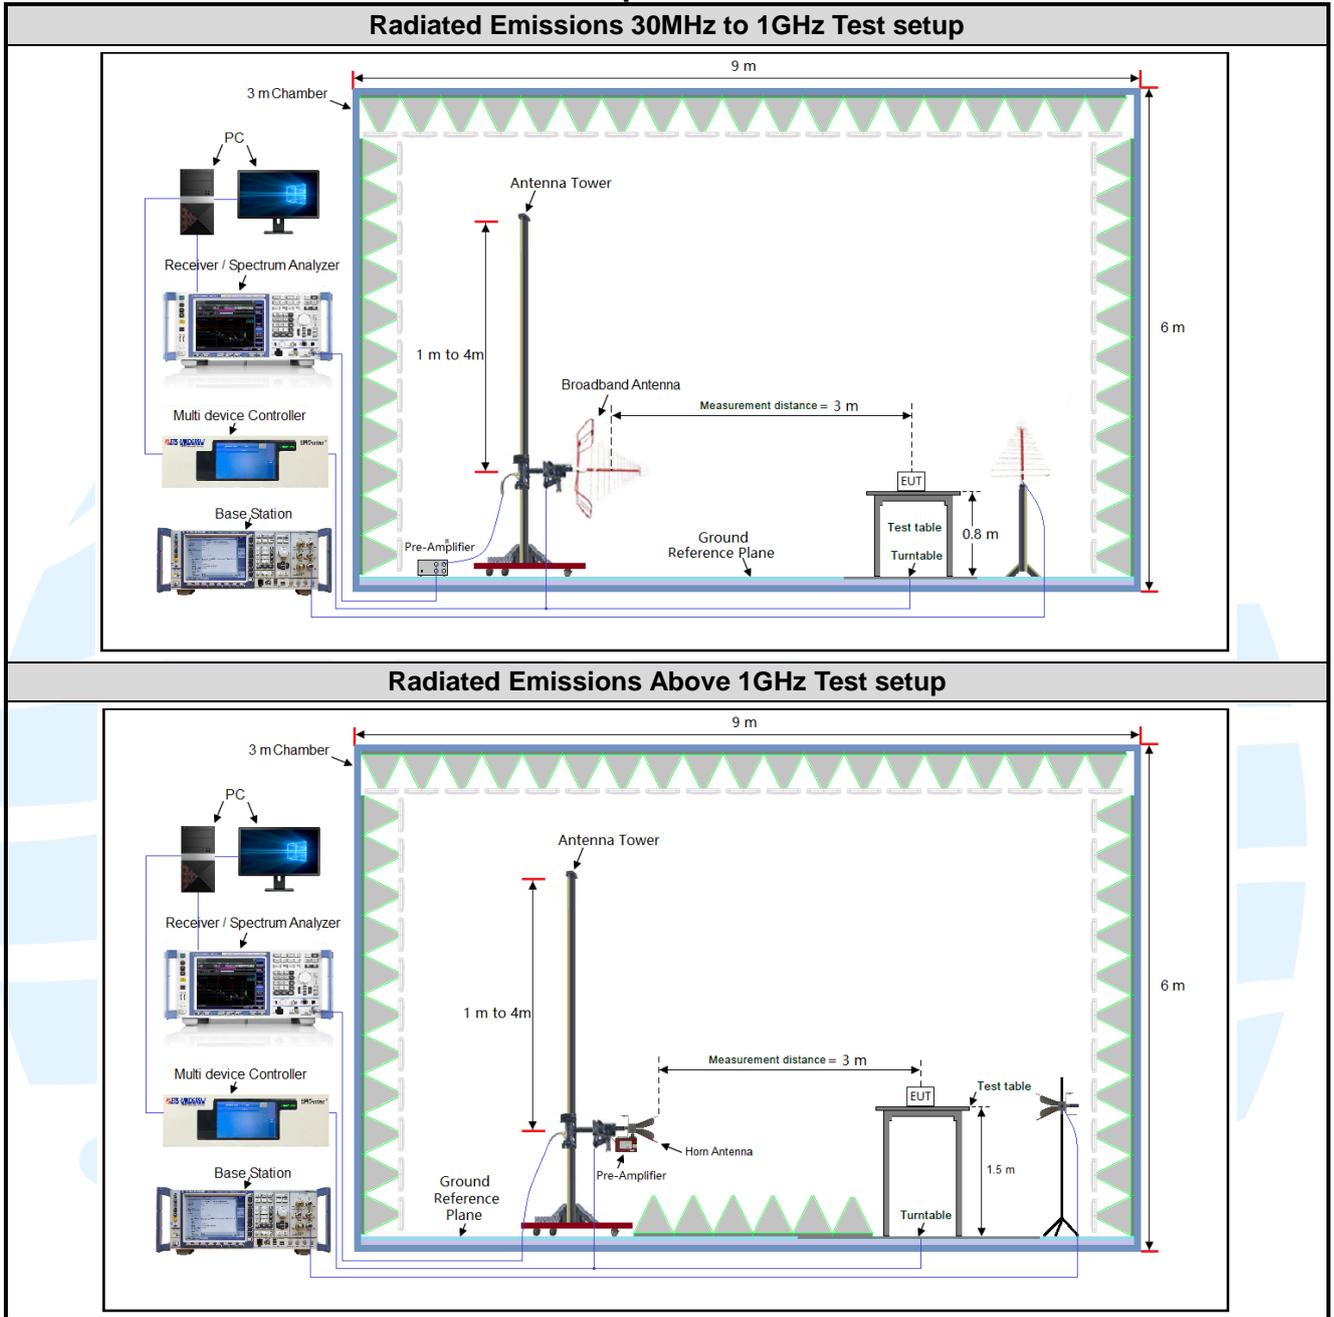

4.2.2 For Conducted RF test setup

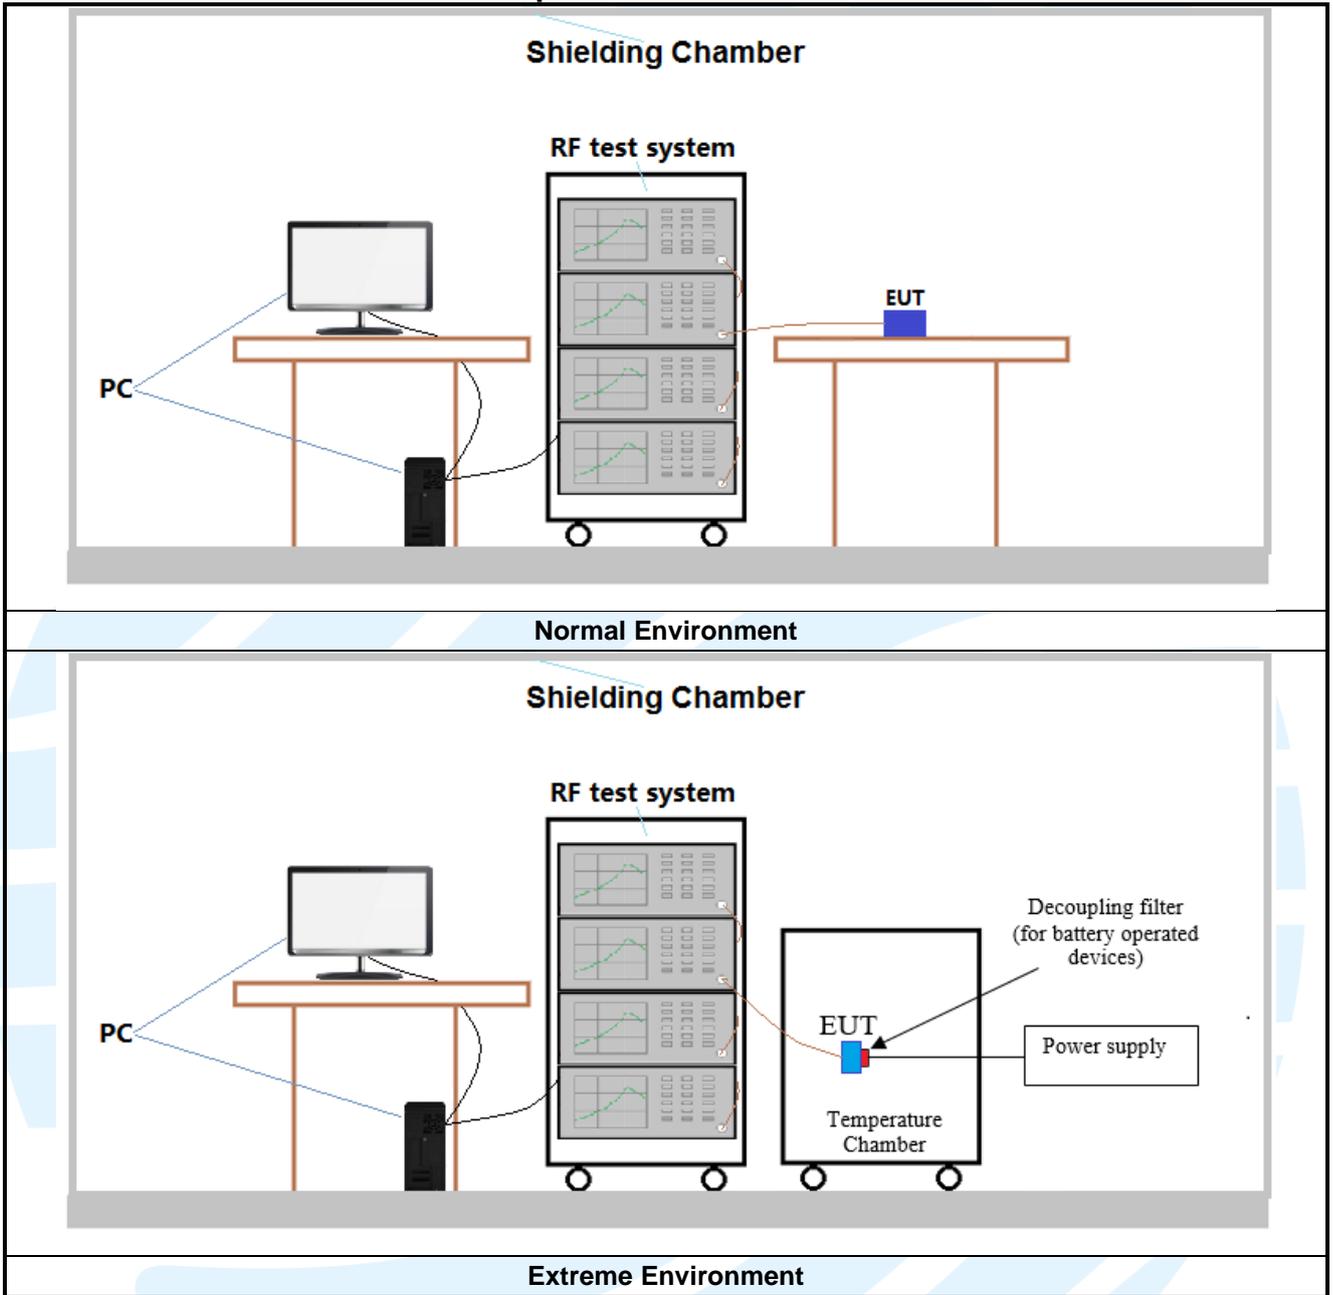

4.3 TEST CHANNELS

Band	Test Frequency ID	Bandwidth (MHz)	Number [UL]	Frequency of Uplink (MHz)	
LTE Band 2 TX: 1850-1910MHz	Low Range	1.4	18607	1850.7	
		3	18615	1851.5	
		5	18625	1852.5	
		10	18650	1855	
		15	18675	1857.5	
		20	18700	1860	
	Middle Range	1.4/3/5/10/15/20	18900	1880	
	High Range	1.4	19193	1909.3	
		3	19185	1908.5	
		5	19175	1907.5	
		10	19150	1905	
		15	19125	1902.5	
		20	19100	1900	
LTE Band 4 TX: 1710-1755MHz	Low Range	1.4	19957	1710.7	
		3	19965	1711.5	
		5	19975	1712.5	
		10	20000	1715	
		15	20025	1717.5	
		20	20050	1720	
	Middle Range	1.4/3/5/10/ 15/20	20175	1732.5	
	High Range	1.4	20393	1754.3	
		3	20385	1753.5	
		5	20375	1752.5	
		10	20350	1750	
		15	20325	1747.5	
		20	20300	1745	
LTE band 5 TX: 824–849MHz	Low Range	1.4	20407	824.7	
		3	20415	825.5	
		5	20425	826.5	
		10	20450	829	
	Middle Range	1.4/3/5/10	20525	836.5	
	High Range	1.4	20643	848.3	
		3	20635	847.5	
		5	20625	846.5	
		10	20600	844	
		LTE Band 7 TX: 2500-2570MHz	Low Range	5	20775
10				20800	2505
15	20825			2507.5	
20	20850			2510	
Middle Range	5/10/15/20		21100	2535	
High Range	5		21425	2567.5	
	10		21400	2565	
	15	21375	2562.5		

		20	21350	2560
LTE Band 17 TX:704-716MHz	Low Range	5	23755	706.5
		10	23780	709
	Middle Range	5/10	23790	710
	High Range	5	23825	713.5
		10	23800	711
LTE Band 38 TX: 2570-2620MHz	Low Range	5	37775	2572.5
		10	37800	2575
		15	37825	2577.5
		20	37850	2580
	Middle Range	5/10/ 15/20	38000	2595
	High Range	5	38225	2617.5
		10	38200	2615
		15	38175	2612.5
		20	38150	2610



Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCC4G-V1.1

4.4 SYSTEM TEST CONFIGURATION

For emissions testing, the equipment under test (EUT) setup to transmit continuously to simplify the measurement methodology. Care was taken to ensure proper power supply voltages during testing. During testing, radiated emission were performed with the EUT set to transmit at the channel with highest output power as worst-case scenario. It was powered by a 3.8Vdc battery. Only the worst case data were recorded in this test report.

Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, data rates, X/Y/Z axis, and antenna ports.

All readings are extrapolated back to the equivalent three meter reading using inverse scaling with distance. Analyzer resolution is 100 kHz or greater for frequencies below 1000MHz. The resolution is 1 MHz or greater for frequencies above 1000MHz. The spurious emissions more than 20 dB below the permissible value are not reported.

Radiated emission measurement were performed from the lowest radio frequency signal generated in the device which is greater than 9 kHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower.

4.5 PRE-SCAN

Pre-scan all bandwidth and RB, find worse case mode are chosen to the report, the LTE worse case mode applicability and tested channel detail as below:

Item	Band	Bandwidth(MHz)						Modulation			RB			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	64QAM	1	Half	Full	L	M	H
Conducted output power	2	☒	☒	☒	☒	☒	☒	☒	☒	☐	☒	☒	☒	☒	☒	☒
	4	☒	☒	☒	☒	☒	☒	☒	☒	☐	☒	☒	☒	☒	☒	☒
	5	☒	☒	☒	☒	--	--	☒	☒	☐	☒	☒	☒	☒	☒	☒
	7	-	-	☒	☒	☒	☒	☒	☒	☐	☒	☒	☒	☒	☒	☒
	17	-	-	☒	☒	-	-	☒	☒	☐	☒	☒	☒	☒	☒	☒
	38	-	-	☒	☒	☒	☒	☒	☒	☐	☐	☐	☒	☒	☒	☒
99%&26dB Bandwidth	2	☒	☒	☒	☒	☒	☒	☒	☒	☐	☐	☐	☒	☒	☒	☒
	4	☒	☒	☒	☒	☒	☒	☒	☒	☐	☐	☐	☒	☒	☒	☒
	5	☒	☒	☒	☒	--	--	☒	☒	☐	☐	☐	☒	☒	☒	☒
	7	-	-	☒	☒	☒	☒	☒	☒	☐	☐	☐	☒	☒	☒	☒
	17	-	-	☒	☒	-	-	☒	☒	☐	☐	☐	☒	☒	☒	☒
	38	-	-	☒	☒	☒	☒	☒	☒	☐	☐	☐	☒	☒	☒	☒
peak-to-average ratio	2	☒	☒	☒	☒	☒	☒	☒	☒	☐	☐	☐	☒	☐	☒	☐
	4	☒	☒	☒	☒	☒	☒	☒	☒	☐	☐	☐	☒	☐	☒	☐
	5	☒	☒	☒	☒	--	--	☒	☒	☐	☐	☐	☒	☐	☒	☐
	7	-	-	☒	☒	☒	☒	☒	☒	☐	☐	☐	☒	☐	☒	☐
	17	-	-	☒	☒	-	-	☒	☒	☐	☐	☐	☒	☐	☒	☐
	38	-	-	☒	☒	☒	☒	☒	☒	☐	☐	☐	☒	☒	☒	☒

Item	Band	Bandwidth(MHz)						Modulation			RB			Test Channel		
		1.4	3	5	10	15	20	QPSK	16QAM	64QAM	1	Half	Full	L	M	H
Band Edge at antenna terminals	2	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>							
	4	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>							
	5	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	--	--	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
	7	-	-	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>					
	17	-	-	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	-	-	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>
	38	-	-	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>					
Spurious emissions at antenna terminals	2	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>							
	4	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>							
	5	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	--	--	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
	7	-	-	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>					
	17	-	-	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	-	-	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
	38	-	-	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>					
Field strength of spurious radiation	2	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>				
	4	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>				
	5	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	--	--	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
	7	-	-	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
	17	-	-	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	-	-	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	38	-	-	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>
Frequency stability	2	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>				
	4	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>				
	5	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	--	--	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	7	-	-	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	17	-	-	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	-	-	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
	38	-	-	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>	<input checked="" type="checkbox"/>	<input type="checkbox"/>
Remark: The mark "☒" means is chosen for testing; The mark "☐" means is not chosen for testing; The mark "-" means is not supported bandwidth																

5. RADIO TECHNICAL REQUIREMENTS SPECIFICATION

5.1 REFERENCE DOCUMENTS FOR TESTING

No.	Identity	Document Title
1	FCC 47 CFR Part 2	Frequency allocations and radio treaty matters; general rules and regulations
2	FCC 47 CFR Part 22	Public Mobile Services
3	FCC 47 CFR Part 27	Miscellaneous Wireless Communications Services
4	FCC 47 CFR Part 24	Personal Communications Services
5	ANSI C63.26-2015	American National Standard for Compliance Testing of Transmitters Used in Licensed Radio Services
6	KDB 971168 D01	KDB 971168 D01 Power Meas License Digital Systems v03r01

5.2 CONDUCTED OUTPUT POWER

Test Requirement: FCC 47 CFR Part 2.1046(a)
LTE Band 2: FCC 47 CFR Part 24.232(c)
LTE Band 4: FCC 47 CFR Part 27.50(d)(4)
LTE Band 5: FCC 47 CFR Part 22.913(a)
LTE Band 7 & Band 38: FCC 47 CFR Part 27.50(h)(2)
LTE Band 17: FCC 47 CFR Part 27.50(c)(10)

Test Method: KDB 971168 D01v03r01 & ANSI C63.26-2015

Limit:

FCC 47 CFR Part 22.913(a):

The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

FCC 47 CFR Part 24.232(c):

Mobile and portable stations are limited to 2 watts EIRP.

FCC 47 CFR Part 27.50(d)(4):

Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP.

FCC 47 CFR Part 27.50(c)(10):

Portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP.

FCC 47 CFR Part 27.50(h)(2):

Mobile and other user stations. Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

Test Procedure:

The EUT was set up for the maximum power with CMW500, and LTE link data modulation and link up with simulator. Set the EUT to transmit under low, middle and high channel and record the power level shown on simulator.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

Test Setup: Refer to section 4.2.2 for details.

Instruments Used: Refer to section 3 for details

Test Mode: Link mode

Test Results: Pass

5.2.1 LTE Band 2

			Conducted Power(dBm)					
Modulation			QPSK			16QAM		
Band	Bandwidth	RB	18607	18900	19193	18607	18900	19193
	(MHz)		1850.7	1880	1909.3	1850.7	1880	1909.3
2	1.4	1@0	23.20	22.98	23.20	22.84	22.13	21.51
		1@3	23.07	22.95	23.14	22.89	22.11	21.54
		1@5	23.20	22.98	23.19	22.91	22.09	21.55
		3@0	23.23	23.19	23.28	22.06	22.22	22.31
		3@1	23.28	23.15	23.18	22.34	22.08	22.26
		3@3	23.29	23.19	23.16	22.05	22.34	22.27
		6@0	22.25	22.19	22.25	20.77	20.86	20.89
Band	Bandwidth	RB	18615	18900	19185	18615	18900	19185
	(MHz)		1851.5	1880	1908.5	1851.5	1880	1908.5
2	3	1@0	23.13	23.03	23.15	22.48	22.23	22.56
		1@8	23.17	23.04	23.15	22.45	22.18	22.60
		1@14	23.10	23.05	23.12	22.42	22.15	22.53
		8@0	22.19	22.09	22.18	21.08	20.72	20.95
		8@4	22.22	22.05	22.24	20.77	20.87	20.81
		8@7	22.17	22.11	22.21	21.09	20.77	21.04
		15@0	22.20	22.12	22.30	20.90	20.73	20.82
Band	Bandwidth	RB	18625	18900	19175	18625	18900	19175
	(MHz)		1852.5	1880	1907.5	1852.5	1880	1907.5
2	5	1@0	23.34	23.27	23.17	21.90	22.06	21.70
		1@12	23.14	23.07	23.13	21.83	22.16	22.18
		1@24	23.18	23.07	23.22	21.88	22.05	21.77
		12@0	22.16	22.20	22.16	20.78	20.71	20.73
		12@7	22.06	22.20	22.18	20.69	20.77	20.65
		12@13	22.15	22.23	22.25	20.61	20.78	20.65
		25@0	22.16	22.24	22.28	20.85	20.63	20.86
Band	Bandwidth	RB	18650	18900	19150	18650	18900	19150
	(MHz)		1855	1880	1905	1855	1880	1905
2	10	1@0	23.03	23.07	23.26	22.07	22.44	22.29
		1@25	22.97	23.05	23.26	22.01	22.41	22.30
		1@49	22.95	23.16	23.26	21.98	22.51	22.33
		25@0	22.08	22.19	22.19	20.81	20.74	20.89
		25@12	22.15	22.12	22.17	20.88	20.76	20.84
		25@25	22.24	22.07	22.13	20.86	20.74	20.85
		50@0	22.14	22.12	22.25	20.79	20.76	20.81
Band	Bandwidth	RB	18675	18900	19125	18675	18900	19125
	(MHz)		1857.5	1880	1902.5	1857.5	1880	1902.5
2	15	1@0	23.21	23.28	23.27	22.44	22.30	22.33
		1@37	23.04	23.23	23.25	22.45	22.26	22.24
		1@74	23.01	23.23	23.23	22.40	22.35	22.29
		36@0	22.07	22.20	22.08	20.88	20.89	20.69
		36@20	22.22	22.13	22.23	20.69	20.91	20.75
		36@39	22.06	22.17	22.15	20.80	20.92	20.79
		75@0	22.06	22.12	22.17	20.77	20.84	20.83
Band	Bandwidth	RB	18700	18900	19100	18700	18900	19100
	(MHz)		1860	1880	1900	1860	1880	1900
2	20	1@0	23.30	23.01	23.08	22.21	22.25	22.15
		1@49	23.25	23.11	23.05	22.10	22.15	22.11
		1@99	23.33	23.38	23.30	22.16	22.25	22.13
		50@0	22.02	22.04	22.31	20.75	20.73	20.73
		50@24	22.00	22.15	22.13	20.77	20.72	20.69
		50@50	22.06	22.22	22.24	20.84	20.70	20.76
		100@0	22.09	22.25	22.10	20.68	20.76	20.84

5.2.2 LTE Band 4

			Conducted Power(dBm)					
Modulation			QPSK			16QAM		
Band	Bandwidth	RB	19957	20175	20393	19957	20175	20393
	(MHz)		1710.7	1732.5	1754.3	1710.7	1732.5	1754.3
4	1.4	1@0	23.15	23.16	23.39	22.14	22.30	21.80
		1@3	23.01	23.13	23.31	22.19	22.24	21.84
		1@5	23.08	23.13	23.39	22.13	22.40	21.88
		3@0	23.21	23.15	23.18	22.06	22.34	22.12
		3@1	23.31	23.12	23.22	22.40	22.23	22.22
		3@3	23.16	23.14	23.17	22.04	22.34	22.12
		6@0	22.19	22.27	22.26	20.84	20.92	21.05
Band	Bandwidth	RB	19965	20175	20385	19965	20175	20385
	(MHz)		1711.5	1732.5	1753.5	1711.5	1732.5	1753.5
4	3	1@0	23.10	23.17	23.32	22.72	22.32	21.77
		1@8	23.04	23.31	23.19	22.43	22.25	22.15
		1@14	23.14	23.15	23.32	22.65	22.28	21.87
		8@0	22.22	22.17	22.22	21.04	20.89	21.07
		8@4	22.22	22.23	22.28	20.73	20.87	20.90
		8@7	22.20	22.17	22.14	21.02	20.79	21.07
		15@0	22.16	22.18	22.12	20.83	20.85	20.78
Band	Bandwidth	RB	19975	20175	20375	19975	20175	20375
	(MHz)		1712.5	1732.5	1752.5	1712.5	1732.5	1752.5
4	5	1@0	23.28	23.33	23.35	21.58	22.12	21.59
		1@12	23.13	22.99	23.12	21.27	22.21	22.24
		1@24	23.31	23.37	23.26	21.44	22.15	21.66
		12@0	22.17	22.16	22.32	20.82	20.85	20.79
		12@7	22.17	22.22	22.22	20.77	20.78	20.85
		12@13	22.15	22.17	22.23	20.75	20.81	20.66
		25@0	22.23	22.19	22.18	20.84	20.61	20.89
Band	Bandwidth	RB	20000	20175	20350	20000	20175	20350
	(MHz)		1715	1732.5	1750	1715	1732.5	1750
4	10	1@0	23.09	23.28	23.11	22.74	22.33	21.64
		1@25	23.05	23.28	23.16	22.75	22.32	21.71
		1@49	23.13	23.37	23.17	22.73	22.34	21.63
		25@0	22.14	22.15	22.18	20.92	20.93	20.90
		25@12	22.31	22.21	22.16	20.71	20.80	20.83
		25@25	22.09	22.22	22.16	20.88	20.93	20.86
		50@0	22.18	22.19	22.24	20.82	20.92	20.72
Band	Bandwidth	RB	20025	20175	20325	20025	20175	20325
	(MHz)		1717.5	1732.5	1747.5	1717.5	1732.5	1747.5
4	15	1@0	23.03	23.33	23.34	22.50	22.37	22.60
		1@37	23.11	23.29	23.31	22.50	22.29	22.57
		1@74	23.14	23.28	23.30	22.51	22.26	22.58
		36@0	22.25	22.18	22.24	20.83	20.92	20.82
		36@20	22.19	22.16	22.17	20.80	21.00	20.81
		36@39	22.21	22.29	22.25	20.94	20.88	20.79
		75@0	22.16	22.11	22.30	20.80	20.81	20.86
Band	Bandwidth	RB	20050	20175	20300	20050	20175	20300
	(MHz)		1720	1732.5	1745	1720	1732.5	1745
4	20	1@0	23.09	23.27	23.18	22.19	22.27	22.10
		1@49	23.13	23.29	23.17	22.11	22.22	22.10
		1@99	23.32	23.41	23.23	22.15	22.17	22.09
		50@0	22.22	22.24	22.23	20.73	20.82	20.75
		50@24	22.32	22.27	22.12	20.85	20.85	20.79
		50@50	22.14	22.21	22.35	20.74	20.87	20.79
		100@0	22.21	22.22	22.19	20.95	20.69	20.71

5.2.3 LTE Band 5

			Conducted Power(dBm)					
Modulation			QPSK			16QAM		
Band	Bandwidth (MHz)	RB	20407	20525	20643	20407	20525	20643
			824.7	836.5	848.3	824.7	836.5	848.3
5	1.4	1@0	22.86	22.86	22.80	22.06	22.63	21.58
		1@3	22.77	22.94	22.82	21.85	22.02	21.29
		1@5	22.78	22.80	22.84	22.19	22.53	21.54
		3@0	22.85	22.95	22.87	21.77	21.82	21.67
		3@1	22.96	22.84	22.92	22.00	21.82	21.77
		3@3	22.84	22.85	22.96	22.08	21.67	21.95
		6@0	21.88	21.94	21.91	20.21	20.53	20.43
Band	Bandwidth (MHz)	RB	20415	20525	20635	20415	20525	20635
			825.5	836.5	847.5	825.5	836.5	847.5
5	3	1@0	22.80	22.85	22.74	22.45	22.08	21.46
		1@8	22.81	22.79	22.80	22.39	22.00	21.50
		1@14	22.75	22.83	22.90	22.41	22.05	21.46
		8@0	21.93	21.87	21.87	20.50	20.29	20.48
		8@4	21.83	21.85	21.83	20.05	20.54	20.30
		8@7	22.02	21.85	21.95	21.14	20.41	20.49
		15@0	21.88	21.92	21.87	20.24	20.45	20.29
Band	Bandwidth (MHz)	RB	20425	20525	20625	20425	20525	20625
			826.5	836.5	846.5	826.5	836.5	846.5
5	5	1@0	22.86	22.91	23.05	22.11	21.90	21.93
		1@12	22.86	22.88	23.00	22.06	21.93	21.80
		1@24	22.92	22.94	23.05	22.03	22.12	21.91
		12@0	22.02	21.99	22.05	20.47	20.40	20.50
		12@7	22.05	22.00	22.04	20.89	20.49	20.41
		12@13	22.01	21.97	22.01	20.86	20.62	20.50
		25@0	21.95	22.06	22.01	20.92	20.58	20.54
Band	Bandwidth (MHz)	RB	20450	20525	20600	20450	20525	20600
			829	836.5	844	829	836.5	844
5	10	1@0	23.23	23.07	23.06	21.30	22.18	22.25
		1@25	23.10	23.04	23.13	21.23	22.19	22.05
		1@49	23.08	23.13	23.12	21.17	22.16	22.12
		25@0	22.00	22.02	22.00	21.01	20.39	20.62
		25@12	22.03	22.02	22.02	20.99	20.56	20.91
		25@25	21.96	22.18	22.05	20.65	20.69	20.55
		50@0	21.93	21.98	21.99	20.84	20.53	20.95

5.2.4 LTE Band 7

			Conducted Power(dBm)					
Modulation			QPSK			16QAM		
Band	Bandwidth	RB	20775	21100	21425	20775	21100	21425
	(MHz)		2502.5	2535	2567.5	2502.5	2535	2567.5
7	5	1@0	23.41	23.60	23.55	22.11	22.38	22.43
		1@12	23.41	23.64	23.56	22.14	22.37	22.47
		1@24	23.40	23.65	23.64	22.13	22.35	22.57
		12@0	22.47	22.61	22.56	21.13	21.16	21.05
		12@7	22.44	22.53	22.60	20.98	21.23	20.98
		12@13	22.49	22.46	22.55	21.00	21.25	21.06
		25@0	22.50	22.56	22.48	21.12	21.12	21.21
Band	Bandwidth	RB	20800	21100	21400	20800	21100	21400
	(MHz)		2505	2535	2565	2505	2535	2565
7	10	1@0	23.43	23.57	23.49	22.01	22.62	22.63
		1@25	23.31	23.59	23.48	21.94	22.69	22.78
		1@49	23.29	23.65	23.49	21.98	22.67	22.69
		25@0	22.54	22.60	22.57	21.02	21.22	21.24
		25@12	22.51	22.58	22.45	20.95	21.18	21.21
		25@25	22.44	22.53	22.57	21.08	21.25	21.31
		50@0	22.44	22.58	22.55	21.07	21.17	21.12
Band	Bandwidth	RB	20825	21100	21375	20825	21100	21375
	(MHz)		2507.5	2535	2562.5	2507.5	2535	2562.5
7	15	1@0	23.37	23.43	23.44	22.72	22.83	22.91
		1@37	23.19	23.43	23.37	22.73	22.80	22.86
		1@74	23.29	23.45	23.48	22.71	22.83	22.94
		36@0	22.39	22.43	22.57	21.14	21.22	21.08
		36@20	22.52	22.57	22.42	21.02	21.18	21.05
		36@39	22.49	22.49	22.58	21.19	21.27	21.19
		75@0	22.49	22.46	22.47	21.21	21.04	21.15
Band	Bandwidth	RB	20850	21100	21350	20850	21100	21350
	(MHz)		2510	2535	2560	2510	2535	2560
7	20	1@0	23.69	23.59	23.42	22.13	22.70	22.98
		1@49	23.62	23.66	23.47	22.17	22.68	22.95
		1@99	23.66	23.63	23.33	22.07	22.67	22.91
		50@0	22.52	22.58	22.57	21.14	21.07	21.14
		50@24	22.45	22.45	22.49	21.06	21.14	21.07
		50@50	22.39	22.59	22.54	21.11	21.13	21.09
		100@0	22.55	22.45	22.44	21.03	20.92	21.12

5.2.5 LTE Band 17

			Conducted Power(dBm)					
Modulation			QPSK			16QAM		
Band	Bandwidth	RB	23755	23790	23825	23755	23790	23825
	(MHz)		706.5	710	713.5	706.5	710	713.5
17	5	1@0	22.69	22.62	22.73	22.03	21.51	21.74
		1@12	22.74	22.57	22.74	21.92	21.46	21.67
		1@24	22.67	22.61	22.64	21.89	21.64	21.73
		12@0	21.78	21.66	22.04	20.80	20.09	20.35
		12@7	21.79	21.72	21.92	20.78	20.90	20.36
		12@13	21.70	21.68	21.94	20.79	21.03	20.40
		25@0	21.80	21.72	21.99	20.98	20.11	20.47
Band	Bandwidth	RB	23780	23790	23800	23780	23790	23800
	(MHz)		709	710	711	709	710	711
17	10	1@0	22.93	22.90	22.92	21.33	21.72	21.97
		1@25	22.93	22.86	22.91	21.33	21.74	21.94
		1@49	22.89	22.84	22.94	21.45	21.85	21.91
		25@0	21.70	21.71	21.76	21.03	20.87	20.25
		25@12	21.65	21.69	21.64	20.16	20.07	20.88
		25@25	21.63	21.88	21.80	20.98	20.24	20.22
		50@0	21.77	21.77	21.67	20.09	19.98	20.89

5.2.6 LTE Band 38

			Conducted Power(dBm)					
Modulation			QPSK			16QAM		
Band	Bandwidth	RB	37775	38000	38225	37775	38000	38225
	(MHz)		2572.5	2595	2617.5	2572.5	2595	2617.5
38	5	1@0	23.72	23.49	23.47	22.74	22.34	22.58
		1@12	23.76	23.65	23.50	22.83	22.32	22.57
		1@24	23.76	23.63	23.49	22.82	22.36	22.62
		12@0	22.68	22.65	22.57	21.12	21.15	21.10
		12@7	22.68	22.57	22.63	21.17	21.18	21.15
		12@13	22.74	22.59	22.59	21.20	21.11	21.09
		25@0	22.71	22.55	22.59	21.21	21.25	21.03
Band	Bandwidth	RB	37800	38000	38200	37800	38000	38200
	(MHz)		2575	2595	2615	2575	2595	2615
38	10	1@0	23.58	23.68	23.49	22.78	22.89	22.63
		1@25	23.71	23.65	23.43	22.75	23.15	22.72
		1@49	23.64	23.59	23.50	22.76	23.13	22.77
		25@0	22.58	22.61	22.56	21.10	21.32	21.26
		25@12	22.67	22.56	22.60	21.21	21.20	21.22
		25@25	22.71	22.64	22.70	21.17	21.20	21.33
		50@0	22.65	22.54	22.56	21.29	21.18	21.21
Band	Bandwidth	RB	37825	38000	38175	37825	38000	38175
	(MHz)		2577.5	2595	2612.5	2577.5	2595	2612.5
38	15	1@0	23.58	23.61	23.31	22.42	22.78	22.64
		1@37	23.64	23.73	23.36	22.48	23.08	22.58
		1@74	23.61	23.63	23.27	22.36	22.71	22.62
		36@0	22.53	22.59	22.53	21.18	21.35	21.22
		36@20	22.60	22.60	22.61	21.13	21.26	21.09
		36@39	22.69	22.50	22.63	21.07	21.21	21.13
		75@0	22.60	22.61	22.59	21.25	21.10	21.23
Band	Bandwidth	RB	37850	38000	38150	37850	38000	38150
	(MHz)		2580	2595	2610	2580	2595	2610
38	20	1@0	23.84	23.57	23.59	22.61	23.18	22.50
		1@49	23.87	23.65	23.68	22.51	23.26	22.45
		1@99	23.81	23.67	23.57	22.47	23.11	22.47
		50@0	22.62	22.62	22.52	21.29	21.43	21.33
		50@24	22.62	22.63	22.63	21.32	21.34	21.11
		50@50	22.75	22.62	22.53	21.29	21.37	21.20
		100@0	22.57	22.53	22.59	21.25	21.19	21.15

5.3 ERP OR EIRP

Test Requirement: FCC 47 CFR Part 2.1046(a)
LTE Band 2: FCC 47 CFR Part 24.232(c)
LTE Band 4: FCC 47 CFR Part 27.50(d)(4)
LTE Band 5: FCC 47 CFR Part 22.913(a)
LTE Band 7 & Band 38: FCC 47 CFR Part 27.50(h)(2)
LTE Band 17: FCC 47 CFR Part 27.50(c)(10)

Test Method: KDB 971168 D01v03r01 Section 5.6 & ANSI C63.26-2015

Limit:

FCC 47 CFR Part 22.913(a):

The ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 Watts.

FCC 47 CFR Part 24.232(c):

Mobile and portable stations are limited to 2 watts EIRP.

FCC 47 CFR Part 27.50(d)(4):

Fixed, mobile, and portable (hand-held) stations operating in the 1710-1755 MHz band and mobile and portable stations operating in the 1695-1710 MHz and 1755-1780 MHz bands are limited to 1 watt EIRP.

FCC 47 CFR Part 27.50(c)(10):

Portable stations (hand-held devices) in the 600 MHz uplink band and the 698-746 MHz band, and fixed and mobile stations in the 600 MHz uplink band are limited to 3 watts ERP.

FCC 47 CFR Part 27.50(h)(2):

Mobile and other user stations. Mobile stations are limited to 2.0 watts EIRP. All user stations are limited to 2.0 watts transmitter output power.

Test Procedure:

According to KDB 412172 D01 Power Approach,

- **ERP or EIRP = $P_T + G_T - L_c$**
- **ERP = EIRP - 2.15**

where

- **P_T** = transmitter output power, expressed in dBW, dBm, or PSD;
- **G_T** = gain of the transmitting antenna, in dBd (ERP) or dBi (EIRP);
- **L_c** = **signal attenuation in the connecting cable between the transmitter and antenna, in dB.**

Test Setup: Refer to section 4.2.1 for details.

Instruments Used: Refer to section 3 for details

Test Mode: Link mode

Test Results: Pass

Test Data: See table below

Note: The maximum ERP/EIRP is calculated from max output power and antenna gain, the antenna gain provided by the customer, and the customer takes all the responsibilities for the accuracy of antenna gain.

5.3.1 LTE Band 2

Channel	Maximum EIRP (dBm)			Maximum EIRP (W)			Result
	QPSK	16QAM	Limit (dBm)	QPSK	16QAM	Limit (W)	
Channel Bandwidth: 1.4MHz							
Lowest	22.04	21.66	33.01	0.1600	0.1466	2	Pass
Middle	21.94	21.09	33.01	0.1563	0.1285	2	Pass
Highest	22.03	21.06	33.01	0.1596	0.1276	2	Pass
Channel Bandwidth: 3MHz							
Lowest	21.92	21.23	33.01	0.1556	0.1327	2	Pass
Middle	21.80	20.98	33.01	0.1514	0.1253	2	Pass
Highest	21.90	21.35	33.01	0.1549	0.1365	2	Pass
Channel Bandwidth: 5MHz							
Lowest	22.09	20.65	33.01	0.1618	0.1161	2	Pass
Middle	22.02	20.91	33.01	0.1592	0.1233	2	Pass
Highest	21.97	20.93	33.01	0.1574	0.1239	2	Pass
Channel Bandwidth: 10MHz							
Lowest	21.78	20.82	33.01	0.1507	0.1208	2	Pass
Middle	21.91	21.26	33.01	0.1552	0.1337	2	Pass
Highest	22.01	21.08	33.01	0.1589	0.1282	2	Pass
Channel Bandwidth: 15MHz							
Lowest	21.96	21.20	33.01	0.1570	0.1318	2	Pass
Middle	22.03	21.10	33.01	0.1596	0.1288	2	Pass
Highest	22.02	21.08	33.01	0.1592	0.1282	2	Pass
Channel Bandwidth: 20MHz							
Lowest	22.08	20.96	33.01	0.1614	0.1247	2	Pass
Middle	22.13	21.00	33.01	0.1633	0.1259	2	Pass
Highest	22.05	20.90	33.01	0.1603	0.1230	2	Pass

5.3.2 LTE Band 4

Channel	Maximum EIRP (dBm)			Maximum EIRP (W)			Result
	QPSK	16QAM	Limit (dBm)	QPSK	16QAM	Limit (W)	
Channel Bandwidth: 1.4MHz							
Lowest	22.54	21.63	30.00	0.1795	0.1455	1	Pass
Middle	22.39	21.63	30.00	0.1734	0.1455	1	Pass
Highest	22.62	21.45	30.00	0.1828	0.1396	1	Pass
Channel Bandwidth: 3MHz							
Lowest	22.37	21.95	30.00	0.1726	0.1567	1	Pass
Middle	22.54	21.55	30.00	0.1795	0.1429	1	Pass
Highest	22.55	21.38	30.00	0.1799	0.1374	1	Pass
Channel Bandwidth: 5MHz							
Lowest	22.54	20.81	30.00	0.1795	0.1205	1	Pass
Middle	22.60	21.44	30.00	0.1820	0.1393	1	Pass
Highest	22.58	21.47	30.00	0.1811	0.1403	1	Pass
Channel Bandwidth: 10MHz							
Lowest	22.36	21.98	30.00	0.1722	0.1578	1	Pass
Middle	22.60	21.57	30.00	0.1820	0.1435	1	Pass
Highest	22.40	20.94	30.00	0.1738	0.1242	1	Pass
Channel Bandwidth: 15MHz							
Lowest	22.37	21.74	30.00	0.1726	0.1493	1	Pass
Middle	22.56	21.60	30.00	0.1803	0.1445	1	Pass
Highest	22.57	21.83	30.00	0.1807	0.1524	1	Pass
Channel Bandwidth: 20MHz							
Lowest	22.55	21.42	30.00	0.1799	0.1387	1	Pass
Middle	22.64	21.50	30.00	0.1837	0.1413	1	Pass
Highest	22.46	21.33	30.00	0.1762	0.1358	1	Pass

5.3.3 LTE Band 5

Channel	Maximum EIRP (dBm)			Maximum EIRP (W)			Result
	QPSK	16QAM	Limit (dBm)	QPSK	16QAM	Limit (W)	
Channel Bandwidth: 1.4MHz							
Lowest	17.16	16.39	38.45	0.0520	0.0436	7	Pass
Middle	17.15	16.83	38.45	0.0519	0.0482	7	Pass
Highest	17.16	16.15	38.45	0.0520	0.0412	7	Pass
Channel Bandwidth: 3MHz							
Lowest	17.01	16.65	38.45	0.0502	0.0462	7	Pass
Middle	17.05	16.28	38.45	0.0507	0.0425	7	Pass
Highest	17.10	15.70	38.45	0.0513	0.0372	7	Pass
Channel Bandwidth: 5MHz							
Lowest	17.12	16.31	38.45	0.0515	0.0428	7	Pass
Middle	17.14	16.32	38.45	0.0518	0.0429	7	Pass
Highest	17.25	16.13	38.45	0.0531	0.0410	7	Pass
Channel Bandwidth: 10MHz							
Lowest	17.43	15.50	38.45	0.0553	0.0355	7	Pass
Middle	17.33	16.39	38.45	0.0541	0.0436	7	Pass
Highest	17.33	16.45	38.45	0.0541	0.0442	7	Pass

5.3.4 LTE Band 7

Channel	Maximum EIRP (dBm)			Maximum EIRP (W)			Result
	QPSK	16QAM	Limit (dBm)	QPSK	16QAM	Limit (W)	
Channel Bandwidth: 5MHz							
Lowest	25.92	24.65	33.01	0.3908	0.2917	2	Pass
Middle	26.16	24.89	33.01	0.4130	0.3083	2	Pass
Highest	26.15	25.08	33.01	0.4121	0.3221	2	Pass
Channel Bandwidth: 10MHz							
Lowest	25.94	24.52	33.01	0.3926	0.2831	2	Pass
Middle	26.16	25.20	33.01	0.4130	0.3311	2	Pass
Highest	26.00	25.29	33.01	0.3981	0.3381	2	Pass
Channel Bandwidth: 15MHz							
Lowest	25.88	25.24	33.01	0.3873	0.3342	2	Pass
Middle	25.96	25.34	33.01	0.3945	0.3420	2	Pass
Highest	25.99	25.45	33.01	0.3972	0.3508	2	Pass
Channel Bandwidth: 20MHz							
Lowest	26.20	24.68	33.01	0.4169	0.2938	2	Pass
Middle	26.17	25.21	33.01	0.4140	0.3319	2	Pass
Highest	25.98	25.49	33.01	0.3963	0.3540	2	Pass

5.3.5 LTE Band 17

Channel	Maximum EIRP (dBm)			Maximum EIRP (W)			Result
	QPSK	16QAM	Limit (dBm)	QPSK	16QAM	Limit (W)	
Channel Bandwidth: 5MHz							
Lowest	15.91	15.20	34.77	0.0390	0.0331	3	Pass
Middle	15.79	14.81	34.77	0.0379	0.0303	3	Pass
Highest	15.91	14.91	34.77	0.0390	0.0310	3	Pass
Channel Bandwidth: 10MHz							
Lowest	16.10	14.62	34.77	0.0407	0.0290	3	Pass
Middle	16.07	15.02	34.77	0.0405	0.0318	3	Pass
Highest	16.11	15.14	34.77	0.0408	0.0327	3	Pass

5.3.6 LTE Band 38

Channel	Maximum EIRP (dBm)			Maximum EIRP (W)			Result
	QPSK	16QAM	Limit (dBm)	QPSK	16QAM	Limit (W)	
Channel Bandwidth: 5MHz							
Lowest	24.12	23.19	38.45	0.2582	0.2084	2	Pass
Middle	24.01	22.72	38.45	0.2518	0.1871	2	Pass
Highest	23.86	22.98	38.45	0.2432	0.1986	2	Pass
Channel Bandwidth: 10MHz							
Lowest	24.07	23.14	38.45	0.2553	0.2061	2	Pass
Middle	24.04	23.51	38.45	0.2535	0.2244	2	Pass
Highest	23.86	23.13	38.45	0.2432	0.2056	2	Pass
Channel Bandwidth: 15MHz							
Lowest	24.00	22.84	38.45	0.2512	0.1923	2	Pass
Middle	24.09	23.44	38.45	0.2564	0.2208	2	Pass
Highest	23.72	23.00	38.45	0.2355	0.1995	2	Pass
Channel Bandwidth: 20MHz							
Lowest	24.23	22.97	38.45	0.2649	0.1982	2	Pass
Middle	24.03	23.62	38.45	0.2529	0.2301	2	Pass
Highest	24.04	22.86	38.45	0.2535	0.1932	2	Pass

5.4 PEAK-TO-AVERAGE RATIO

Test Requirement: LTE Band 2: FCC 47 CFR Part 24.232(d)
LTE Band 4 : FCC 47 CFR Part 27.50(d)(5)
LTE Band 5: FCC 47 CFR Part 22.913(a)
LTE Band 7 & Band 38: FCC 47 CFR Part 27.50(d)(5)
LTE Band 17: FCC 47 CFR Part 27.50(d)(5)

Test Method: KDB 971168 D01v03r01 Section 5.7

Limit: In measuring transmissions in this band using an average power technique, the peak-to-average ratio (PAR) of the transmission may not exceed 13 dB

Test Procedure:

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer.

- a) Set resolution/measurement bandwidth \geq signal's occupied bandwidth
- b) Set the number of counts to a value that stabilizes the measured CCDF curve
- c) Record the maximum PAPR level associated with a probability of 0.1 %

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

Test Setup: Refer to section 4.2.2 for details.

Instruments Used: Refer to section 3 for details

Test Mode: Link mode

Test Results: Pass

Test Data: Please refer to Appendix A

5.5 99%&26DB BANDWIDTH

Test Requirement: FCC 47 CFR Part 2.1049(h)

Test Method: ANSI C63.26-2015 & KDB 971168 D01v03r01 Section 4

Limit: No Limit, for reporting purposes only.

Test Procedure:

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer. The occupied bandwidth was measured with the spectrum analyzer at the low, middle and high channel in each band. The 99% and -26dB bandwidths was also measured and recorded.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

Test Setup: Refer to section 4.2.2 for details.

Instruments Used: Refer to section 3 for details

Test Mode: Link mode

Test Results: Pass

Test Data: Please refer to Appendix A

5.6 BAND EDGE AT ANTENNA TERMINALS

Test Requirement: LTE Band 2: FCC 47 CFR Part 24.238(a)
LTE Band 4: FCC 47 CFR Part 27.53(h)(1)
LTE Band 5: FCC 47 CFR Part 22.917(a)
LTE Band 7 & Band 38: FCC 47 CFR Part 27.53(m)(4)
LTE Band 17: FCC 47 CFR Part 27.53(g)

Test Method: ANSI C63.26-2015 & KDB 971168 D01v03r01

Limit:

FCC 47 CFR Part 24.238(a), 27.53(h)(1), 22.917(a):

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13 dBm.

FCC 47 CFR Part 27.53(g):

For operations in the 600 MHz band and the 698-746 MHz band, the power of any emission outside a licensee's frequency band(s) of operation shall be attenuated below the transmitter power (P) within the licensed band(s) of operation, measured in watts, by at least $43 + 10 \log(P)$ dB. Compliance with this provision is based on the use of measurement instrumentation employing a resolution bandwidth of 100 kilohertz or greater. However, in the 100 kilohertz bands immediately outside and adjacent to a licensee's frequency block, a resolution bandwidth of at least 30 kHz may be employed.

FCC 47 CFR Part 27.53(m)(4):

For mobile digital stations, the attenuation factor shall be not less than $40 + 10 \log(P)$ dB on all frequencies between the channel edge and 5 megahertz from the channel edge, $43 + 10 \log(P)$ dB on all frequencies between 5 megahertz and X megahertz from the channel edge, and $55 + 10 \log(P)$ dB on all frequencies more than X megahertz from the channel edge, where X is the greater of 6 megahertz or the actual emission bandwidth as defined in paragraph (m)(6) of this section. In addition, the attenuation factor shall not be less than $43 + 10 \log(P)$ dB on all frequencies between 2490.5 MHz and 2496 MHz and $55 + 10 \log(P)$ dB at or below 2490.5 MHz. Mobile Satellite Service licensees operating on frequencies below 2495 MHz may also submit a documented interference complaint against BRS licensees operating on channel BRS Channel 1 on the same terms and conditions as adjacent channel BRS or EBS licensees.

Test Procedure:

The transmitter output was connected to a calibrated coaxial cable and coupler, the other end of which was connected to a spectrum analyzer.

For each band edge measurement:

- 1) Set the spectrum analyzer span to include the block edge frequency.
- 2) Set a marker to point the corresponding band edge frequency in each test case.
- 3) Set display line at -13 dBm
- 4) Set resolution bandwidth to at least 1% of emission bandwidth.
- 5) Set spectrum analyzer with RMS detector.
- 6) Record the max trace plot into the test report

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

Test Setup: Refer to section 4.2.2 for details.

Instruments Used: Refer to section 3 for details

Test Mode: Link mode

Test Results: Pass

Test Data: Please refer to Appendix A

5.7 SPURIOUS EMISSIONS AT ANTENNA TERMINALS

Test Requirement: LTE Band 2: FCC 47 CFR Part 24.238(a)
LTE Band 4: FCC 47 CFR Part 27.53(h)
LTE Band 5: FCC 47 CFR Part 22.917(a)
LTE Band 7 & Band 38: FCC 47 CFR Part 27.53(m)(4)
LTE Band 17: FCC 47 CFR Part 27.53(g)

Test Method: ANSI C63.26-2015 & KDB 971168 D01v03r01

Limit:

FCC 47 CFR Part 24.238(a), 27.53(h)(1), 22.917(a), 27.53(g):

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13 dBm.

FCC 47 CFR Part 27.53(m)(4):

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $55 + 10 \log(P)$ dB. The emission limit equal to -25 dBm.

Test Procedure:

The EUT makes a phone call to the communication simulator. All measurements were done at low, middle and high operational frequency range. b. Measuring frequency range is from 30 MHz to the tenth harmonic of the highest fundamental frequency or to 40 GHz, whichever is lower. Set RBW & VBW to 100 kHz for the measurement below 1 GHz, and 1 MHz for the measurement above 1 GHz.

Note: The cable loss and attenuator loss were offset into measure device as an amplitude offset.

Test Setup: Refer to section 4.2.2 for details.

Instruments Used: Refer to section 3 for details

Test Mode: Link mode

Test Results: Pass

Test Data: Please refer to Appendix A

5.8 FIELD STRENGTH OF SPURIOUS RADIATION

Test Requirement: LTE Band 2: FCC 47 CFR Part 24.238(a)
 LTE Band 4: FCC 47 CFR Part 27.53(h)
 LTE Band 5: FCC 47 CFR Part 22.917(a)
 LTE Band 7 & Band 38: FCC 47 CFR Part 27.53(m)(4)
 LTE Band 17: FCC 47 CFR Part 27.53(g)

Test Method: ANSI C63.26-2015 & KDB 971168 D01v03r01

Receiver Setup:

Frequency	Detector	RBW	VBW	Remark
0.009 MHz-30 MHz	Peak	10 kHz	30 KHz	Peak
30 MHz-1 GHz	Quasi-peak	100 kHz	300 KHz	Peak
Above 1 GHz	Peak	1 MHz	3 MHz	Peak

Limits:

FCC 47 CFR Part 24.238(a), 27.53(h)(1), 22.917(a), 27.53(g):

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $43 + 10 \log(P)$ dB. The emission limit equal to -13 dBm.

FCC 47 CFR Part 27.53(m)(4):

The power of any emission outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least $55 + 10 \log(P)$ dB. The emission limit equal to -25 dBm.

Test Setup: Refer to section 4.2.1 for details.

Test Procedures: KDB 971168 D01v03r01 Section 7

Equipment Used: Refer to section 3 for details.

Test Result: Pass

The worst measurement data as follows:

5.8.1 LTE Band 2

LTE Band 2_ 20 MHz_ QPSK							
No.	Frequency (MHz)	SA Reading (dBm)	Correction factor (dB/m)	EIRP Result (dBm)	Limit (dBm)	Margin (dB)	Ant. Pol.
Lowest Channel							
1	754.963	-80.49	12.07	-68.42	-13.00	-55.42	Horizontal
2	804.252	-80.78	12.90	-67.88	-13.00	-54.88	Horizontal
3	925.613	-80.72	14.71	-66.01	-13.00	-53.01	Horizontal
4	3720.000	-68.41	8.67	-59.74	-13.00	-46.74	Horizontal
5	5580.000	-71.03	12.08	-58.95	-13.00	-45.95	Horizontal
6	698.804	-81.81	12.02	-69.79	-13.00	-56.79	Vertical
7	804.252	-81.12	12.90	-68.22	-13.00	-55.22	Vertical
8	925.613	-81.90	14.71	-67.19	-13.00	-54.19	Vertical
9	3720.000	-62.55	8.67	-53.88	-13.00	-40.88	Vertical
10	5580.000	-71.94	12.08	-59.86	-13.00	-46.86	Vertical
Middle Channel							
1	679.435	-81.06	11.30	-69.76	-13.00	-56.76	Horizontal
2	798.620	-81.35	12.97	-68.38	-13.00	-55.38	Horizontal
3	932.141	-81.82	14.85	-66.97	-13.00	-53.97	Horizontal
4	3760.000	-66.95	8.78	-58.17	-13.00	-45.17	Horizontal
5	5640.000	-71.27	12.00	-59.27	-13.00	-46.27	Horizontal
6	655.977	-80.02	11.11	-68.91	-13.00	-55.91	Vertical
7	798.620	-80.77	12.97	-67.80	-13.00	-54.80	Vertical
8	938.714	-81.82	14.71	-67.11	-13.00	-54.11	Vertical
9	3760.000	-67.33	8.78	-58.55	-13.00	-45.55	Vertical
10	5640.000	-70.80	12.00	-58.80	-13.00	-45.80	Vertical
Highest Channel							
1	698.804	-81.58	12.02	-69.56	-13.00	-56.56	Horizontal
2	798.620	-81.28	12.97	-68.31	-13.00	-55.31	Horizontal
3	906.304	-82.24	14.40	-67.84	-13.00	-54.84	Horizontal
4	3800.000	-67.59	8.89	-58.70	-13.00	-45.70	Horizontal
5	5700.000	-68.04	11.93	-56.11	-13.00	-43.11	Horizontal
6	708.694	-81.28	11.65	-69.63	-13.00	-56.63	Vertical
7	765.648	-81.50	12.40	-69.10	-13.00	-56.10	Vertical
8	887.398	-81.90	13.86	-68.04	-13.00	-55.04	Vertical
9	3800.000	-64.62	8.89	-55.73	-13.00	-42.73	Vertical
10	5700.000	-72.67	11.93	-60.74	-13.00	-47.74	Vertical

5.8.2 LTE Band 4

LTE Band 4_ 20 MHz_ QPSK							
No.	Frequency (MHz)	SA Reading (dBm)	Correction factor (dB/m)	EIRP Result (dBm)	Limit (dBm)	Margin (dB)	Ant. Pol.
Lowest Channel							
1	698.804	-80.49	12.02	-68.47	-13.00	-55.47	Horizontal
2	723.793	-80.29	11.55	-68.74	-13.00	-55.74	Horizontal
3	992.997	-80.91	14.84	-66.07	-13.00	-53.07	Horizontal
4	3440.000	-66.38	7.60	-58.78	-13.00	-45.78	Horizontal
5	5160.000	-67.60	10.81	-56.79	-13.00	-43.79	Horizontal
6	821.387	-80.90	12.66	-68.24	-13.00	-55.24	Vertical
7	868.886	-80.91	13.69	-67.22	-13.00	-54.22	Vertical
8	972.283	-80.69	14.58	-66.11	-13.00	-53.11	Vertical
9	3440.000	-68.22	7.60	-60.62	-13.00	-47.62	Vertical
10	5160.000	-67.63	10.81	-56.82	-13.00	-43.82	Vertical
Middle Channel							
1	804.252	-80.69	12.90	-67.79	-13.00	-54.79	Horizontal
2	868.886	-80.98	13.69	-67.29	-13.00	-54.29	Horizontal
3	1000.000	-81.20	14.99	-66.21	-13.00	-53.21	Horizontal
4	3465.000	-66.28	7.74	-58.54	-13.00	-45.54	Horizontal
5	5197.500	-66.69	10.91	-55.78	-13.00	-42.78	Horizontal
6	776.485	-80.83	12.71	-68.12	-13.00	-55.12	Vertical
7	804.252	-80.69	12.90	-67.79	-13.00	-54.79	Vertical
8	945.334	-81.27	14.42	-66.85	-13.00	-53.85	Vertical
9	3465.000	-67.21	7.74	-59.47	-13.00	-46.47	Vertical
10	5197.500	-66.48	10.91	-55.57	-13.00	-42.57	Vertical
Highest Channel							
1	693.910	-80.21	11.86	-68.35	-13.00	-55.35	Horizontal
2	912.695	-81.50	14.39	-67.11	-13.00	-54.11	Horizontal
3	945.334	-81.27	14.42	-66.85	-13.00	-53.85	Horizontal
4	3490.000	-66.95	7.89	-59.06	-13.00	-46.06	Horizontal
5	5235.000	-68.76	11.06	-57.70	-13.00	-44.70	Horizontal
6	703.731	-79.89	11.90	-67.99	-13.00	-54.99	Vertical
7	833.013	-79.40	13.10	-66.30	-13.00	-53.30	Vertical
8	992.997	-79.46	14.84	-64.62	-13.00	-51.62	Vertical
9	3490.000	-67.42	7.89	-59.53	-13.00	-46.53	Vertical
10	5235.000	-68.81	11.06	-57.75	-13.00	-44.75	Vertical

5.8.3 LTE Band 5

LTE Band 5_ 10 MHz_ QPSK							
No.	Frequency (MHz)	SA Reading (dBm)	Correction factor (dB/m)	EIRP Result (dBm)	Limit (dBm)	Margin (dB)	Ant. Pol.
Lowest Channel							
1	546.437	-89.40	37.31	-52.09	-13.00	-39.09	Horizontal
2	651.383	-88.03	39.87	-48.16	-13.00	-35.16	Horizontal
3	958.714	-87.55	42.87	-44.68	-13.00	-31.68	Horizontal
4	1658.000	-54.84	0.08	-54.76	-13.00	-41.76	Horizontal
5	3316.000	-59.62	6.91	-52.71	-13.00	-39.71	Horizontal
6	628.894	-88.27	39.35	-48.92	-13.00	-35.92	Vertical
7	760.287	-87.69	41.09	-46.60	-13.00	-33.60	Vertical
8	979.139	-87.16	43.21	-43.95	-13.00	-30.95	Vertical
9	1658.000	-53.06	0.08	-52.98	-13.00	-39.98	Vertical
10	3316.000	-60.80	6.91	-53.89	-13.00	-40.89	Vertical
Middle Channel							
1	698.804	-88.88	40.84	-48.04	-13.00	-35.04	Horizontal
2	760.287	-88.58	41.09	-47.49	-13.00	-34.49	Horizontal
3	986.044	-88.26	43.06	-45.20	-13.00	-32.20	Horizontal
4	1673.000	-55.03	0.15	-54.88	-13.00	-41.88	Horizontal
5	3346.000	-58.88	7.07	-51.81	-13.00	-38.81	Horizontal
6	655.977	-88.92	39.94	-48.98	-13.00	-35.98	Vertical
7	793.028	-88.79	41.79	-47.00	-13.00	-34.00	Vertical
8	932.141	-87.84	43.32	-44.52	-13.00	-31.52	Vertical
9	1673.000	-54.23	0.15	-54.08	-13.00	-41.08	Vertical
10	3346.000	-59.49	7.07	-52.42	-13.00	-39.42	Vertical
Highest Channel							
1	651.383	-89.36	39.87	-49.49	-13.00	-36.49	Horizontal
2	793.028	-88.44	41.79	-46.65	-13.00	-33.65	Horizontal
3	919.132	-87.82	43.02	-44.80	-13.00	-31.80	Horizontal
4	1688.000	-57.57	0.22	-57.35	-13.00	-44.35	Horizontal
5	2532.000	-61.03	4.24	-56.79	-13.00	-43.79	Horizontal
6	728.897	-88.59	40.34	-48.25	-13.00	-35.25	Vertical
7	798.620	-89.04	41.76	-47.28	-13.00	-34.28	Vertical
8	958.714	-86.48	42.87	-43.61	-13.00	-30.61	Vertical
9	1688.000	-55.90	0.22	-55.68	-13.00	-42.68	Vertical
10	2532.000	-59.83	4.24	-55.59	-13.00	-42.59	Vertical

5.8.4 LTE Band 7

LTE Band 7_ 20 MHz_ QPSK							
No.	Frequency (MHz)	SA Reading (dBm)	Correction factor (dB/m)	EIRP Result (dBm)	Limit (dBm)	Margin (dB)	Ant. Pol.
Lowest Channel							
1	698.804	-81.58	12.02	-69.56	-25.00	-44.56	Horizontal
2	893.656	-81.06	14.14	-66.92	-25.00	-41.92	Horizontal
3	912.695	-81.34	14.39	-66.95	-25.00	-41.95	Horizontal
4	5020.000	-62.15	10.46	-51.69	-25.00	-26.69	Horizontal
5	12550.000	-60.89	21.17	-39.72	-25.00	-14.72	Horizontal
6	693.910	-80.76	11.86	-68.90	-25.00	-43.90	Vertical
7	793.028	-80.50	13.00	-67.50	-25.00	-42.50	Vertical
8	925.613	-81.81	14.71	-67.10	-25.00	-42.10	Vertical
9	5020.000	-58.31	10.46	-47.85	-25.00	-22.85	Vertical
10	12550.000	-58.43	21.17	-37.26	-25.00	-12.26	Vertical
Middle Channel							
1	739.214	-79.64	11.80	-67.84	-25.00	-42.84	Horizontal
2	793.028	-80.70	13.00	-67.70	-25.00	-42.70	Horizontal
3	925.613	-80.55	14.71	-65.84	-25.00	-40.84	Horizontal
4	5070.000	-59.80	10.59	-49.21	-25.00	-24.21	Horizontal
5	12675.000	-63.13	21.65	-41.48	-25.00	-16.48	Horizontal
6	693.910	-81.57	11.86	-69.71	-25.00	-44.71	Vertical
7	781.961	-81.28	12.77	-68.51	-25.00	-43.51	Vertical
8	986.044	-81.74	14.72	-67.02	-25.00	-42.02	Vertical
9	5070.000	-59.16	10.59	-48.57	-25.00	-23.57	Vertical
10	12675.000	-63.49	21.65	-41.84	-25.00	-16.84	Vertical
Highest Channel							
1	698.804	-81.35	12.02	-69.33	-25.00	-44.33	Horizontal
2	868.886	-81.82	13.69	-68.13	-25.00	-43.13	Horizontal
3	979.139	-81.20	14.85	-66.35	-25.00	-41.35	Horizontal
4	5120.000	-60.91	10.71	-50.20	-25.00	-25.20	Horizontal
5	12800.000	-62.80	22.12	-40.68	-25.00	-15.68	Horizontal
6	689.051	-80.77	11.59	-69.18	-25.00	-44.18	Vertical
7	771.047	-80.83	12.54	-68.29	-25.00	-43.29	Vertical
8	938.714	-81.66	14.71	-66.95	-25.00	-41.95	Vertical
9	5120.000	-59.07	10.71	-48.36	-25.00	-23.36	Vertical
10	12800.000	-61.90	22.12	-39.78	-25.00	-14.78	Vertical

5.8.5 LTE Band 17

LTE Band 17_ 10 MHz_ QPSK							
No.	Frequency	SA Reading	Correction factor	EIRP Result	Limit	Margin	Ant. Pol.
	(MHz)	(dBm)	(dB/m)	(dBm)	(dBm)	(dB)	
Lowest Channel							
1	607.181	-89.84	38.93	-50.91	-13.00	-37.91	Horizontal
2	875.013	-88.83	42.62	-46.21	-13.00	-33.21	Horizontal
3	979.139	-86.68	43.21	-43.47	-13.00	-30.47	Horizontal
4	1418.000	-55.30	-0.74	-56.04	-13.00	-43.04	Horizontal
5	3545.000	-46.69	8.08	-38.61	-13.00	-25.61	Horizontal
6	637.795	-88.89	39.41	-49.48	-13.00	-36.48	Vertical
7	844.803	-88.69	41.85	-46.84	-13.00	-33.84	Vertical
8	945.334	-87.40	42.86	-44.54	-13.00	-31.54	Vertical
9	1418.000	-52.96	-0.74	-53.70	-13.00	-40.70	Vertical
10	3545.000	-39.21	8.08	-31.13	-13.00	-18.13	Vertical
Middle Channel							
1	646.822	-88.25	39.75	-48.50	-13.00	-35.50	Horizontal
2	793.028	-88.05	41.79	-46.26	-13.00	-33.26	Horizontal
3	992.997	-88.09	43.17	-44.92	-13.00	-31.92	Horizontal
4	1420.000	-54.76	-0.73	-55.49	-13.00	-42.49	Horizontal
5	3550.000	-46.98	8.11	-38.87	-13.00	-25.87	Horizontal
6	651.383	-89.04	39.87	-49.17	-13.00	-36.17	Vertical
7	906.304	-87.37	42.93	-44.44	-13.00	-31.44	Vertical
8	992.997	-88.83	43.17	-45.66	-13.00	-32.66	Vertical
9	1420.000	-52.32	-0.73	-53.05	-13.00	-40.05	Vertical
10	3550.000	-39.79	8.11	-31.68	-13.00	-18.68	Vertical
Highest Channel							
1	611.462	-89.97	38.93	-51.04	-13.00	-38.04	Horizontal
2	809.924	-88.33	41.48	-46.85	-13.00	-33.85	Horizontal
3	952.000	-87.60	42.93	-44.67	-13.00	-31.67	Horizontal
4	1422.000	-55.04	-0.73	-55.77	-13.00	-42.77	Horizontal
5	3555.000	-46.07	8.12	-37.95	-13.00	-24.95	Horizontal
6	642.292	-89.10	39.59	-49.51	-13.00	-36.51	Vertical
7	833.013	-87.90	41.81	-46.09	-13.00	-33.09	Vertical
8	958.714	-86.95	42.87	-44.08	-13.00	-31.08	Vertical
9	1422.000	-51.55	-0.73	-52.28	-13.00	-39.28	Vertical
10	3555.000	-38.10	8.12	-29.98	-13.00	-16.98	Vertical

5.8.6 LTE Band 38

LTE Band 38_ 20 MHz_ QPSK							
No.	Frequency (MHz)	SA Reading (dBm)	Correction factor (dB/m)	EIRP Result (dBm)	Limit (dBm)	Margin (dB)	Ant. Pol.
Lowest Channel							
1	693.910	-81.34	11.86	-69.48	-25.00	-44.48	Horizontal
2	827.179	-81.14	12.79	-68.35	-25.00	-43.35	Horizontal
3	881.184	-81.05	13.65	-67.40	-25.00	-42.40	Horizontal
4	5160.000	-68.75	10.81	-57.94	-25.00	-32.94	Horizontal
5	7740.000	-71.48	14.63	-56.85	-25.00	-31.85	Horizontal
6	798.620	-81.74	12.97	-68.77	-25.00	-43.77	Vertical
7	833.013	-81.43	13.10	-68.33	-25.00	-43.33	Vertical
8	938.714	-81.82	14.71	-67.11	-25.00	-42.11	Vertical
9	5160.000	-68.44	10.81	-57.63	-25.00	-32.63	Vertical
10	7740.000	-71.45	14.63	-56.82	-25.00	-31.82	Vertical
Middle Channel							
1	868.886	-81.13	13.69	-67.44	-25.00	-42.44	Horizontal
2	919.132	-80.70	14.52	-66.18	-25.00	-41.18	Horizontal
3	992.997	-81.81	14.84	-66.97	-25.00	-41.97	Horizontal
4	5190.000	-67.18	10.88	-56.30	-25.00	-31.30	Horizontal
5	7785.000	-71.24	14.72	-56.52	-25.00	-31.52	Horizontal
6	793.028	-81.74	13.00	-68.74	-25.00	-43.74	Vertical
7	899.958	-81.82	14.32	-67.50	-25.00	-42.50	Vertical
8	932.141	-81.35	14.85	-66.50	-25.00	-41.50	Vertical
9	5190.000	-66.71	10.88	-55.83	-25.00	-30.83	Vertical
10	7785.000	-70.76	14.72	-56.04	-25.00	-31.04	Vertical
Highest Channel							
1	693.910	-80.97	11.86	-69.11	-25.00	-44.11	Horizontal
2	838.887	-81.42	13.08	-68.34	-25.00	-43.34	Horizontal
3	925.613	-81.89	14.71	-67.18	-25.00	-42.18	Horizontal
4	5220.000	-68.33	11.00	-57.33	-25.00	-32.33	Horizontal
5	7830.000	-70.01	14.81	-55.20	-25.00	-30.20	Horizontal
6	660.602	-79.96	10.77	-69.19	-25.00	-44.19	Vertical
7	804.252	-80.83	12.90	-67.93	-25.00	-42.93	Vertical
8	912.695	-81.19	14.39	-66.80	-25.00	-41.80	Vertical
9	5220.000	-68.95	11.00	-57.95	-25.00	-32.95	Vertical
10	7830.000	-70.82	14.81	-56.01	-25.00	-31.01	Vertical

Remark:

1. Correct Factor = Antenna Factor + Cable Loss - Amplifier Gain, the value was added to Original Receiver Reading by the software automatically.
2. Result = Reading + Correct Factor.
3. Margin = Result – Limit

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCC4G-V1.1

5.9 FREQUENCY STABILITY

Test Requirement: FCC 47 CFR Part 2.1055 &
 FCC 47 CFR Part 22.355 &
 FCC 47 CFR Part 24.235 &
 FCC 47 CFR Part 27.54

Test Method: ANSI C63.26-2015 & KDB 971168 D01v03r01

Limits:
FCC 47 CFR Part 22.355, FCC 47 CFR Par 90.213
 The carrier frequency shall not depart from the reference frequency in excess of ± 2.5 ppm for mobile stations.

FCC 47 CFR Part 24.235, FCC 47 CFR Part 27.54
 The frequency stability shall be sufficient to ensure that the fundamental emission stays within the authorized frequency block.

Test Setup: Refer to section 4.2.2 for details.

Test Procedures:

- 1) Use CMW 500 with Frequency Error measurement capability.
 - a) Temp. = -30° to $+50^{\circ}$ Ca
 - b) Voltage =low voltage, 3.4 Vdc, Normal, 3.8 Vdc and High voltage, 4.35 Vdc.

2) Frequency Stability vs Temperature:

The EUT is place inside a temperature chamber. The temperature is set to 20° C and allowed to stabilize. After sufficient soak time, the transmitting frequency error is measured. The temperature is increased by 10 degrees, allowed to stabilize and soak, and then the measurement is repeated. This is repeated until $+50^{\circ}$ C is reached.

3) Frequency Stability vs Voltage:

The peak frequency error is recorded (worst-case).

Equipment Used: Refer to section 3 for details.

Test Result: Pass

Modulation	Channel/ Frequency (MHz)	Voltage (Vdc)	Temperature ($^{\circ}$ C)	Deviation (Hz)	Deviation (ppm)	Limit (ppm)	Result
LTE Band 2 / 20MHz / Full RB							
QPSK	18900 / 1880.0	VL	TN	-8.81	-0.0047	Note 1	Pass
		VN		-7.21	-0.0038		Pass
		VH		-10.82	-0.0058		Pass
		VN	50	-10.72	-0.0057		Pass
			40	-11.14	-0.0059		Pass
			30	-12.43	-0.0066		Pass
			20	-7.21	-0.0038		Pass
			10	-13.93	-0.0074		Pass
			0	-10.15	-0.0054		Pass
			-10	-14.59	-0.0078		Pass
			-20	-12.93	-0.0069		Pass
			-30	-10.84	-0.0058		Pass

Modulation	Channel/ Frequency	Voltage	Temperature	Deviation	Deviation	Limit	Pass/ Fail
	(MHz)	(Vdc)	(°C)	(Hz)	(ppm)	(ppm)	
LTE Band 4 / 20MHz / Full RB							
QPSK	20175 / 1732.5	VL	TN	12.35	0.0071	Note 1	Pass
		VN		11.84	0.0068		Pass
		VH		8.13	0.0047		Pass
		VN	50	14.76	0.0085		Pass
			40	11.74	0.0068		Pass
			30	10.63	0.0061		Pass
			20	11.84	0.0068		Pass
			10	13.82	0.0080		Pass
			0	14.77	0.0085		Pass
			-10	12.97	0.0075		Pass
			-20	13.56	0.0078		Pass
			-30	9.72	0.0056		Pass

Modulation	Channel/ Frequency	Voltage	Temperature	Deviation	Deviation	Limit	Pass/ Fail
	(MHz)	(Vdc)	(°C)	(Hz)	(ppm)	(ppm)	
LTE Band 5 / 10MHz / Full RB							
QPSK	20525 / 836.5	VL	TN	6.17	0.0074	± 2.5	Pass
		VN		5.24	0.0063	± 2.5	Pass
		VH		7.33	0.0088	± 2.5	Pass
		VN	50	3.52	0.0042	± 2.5	Pass
			40	5.85	0.0070	± 2.5	Pass
			30	7.18	0.0086	± 2.5	Pass
			20	5.24	0.0063	± 2.5	Pass
			10	7.76	0.0093	± 2.5	Pass
			0	6.53	0.0078	± 2.5	Pass
			-10	5.38	0.0064	± 2.5	Pass
			-20	6.26	0.0075	± 2.5	Pass
			-30	5.75	0.0069	± 2.5	Pass

Modulation	Channel/ Frequency	Voltage	Temperature	Deviation	Deviation	Limit	Pass/ Fail
	(MHz)	(Vdc)	(°C)	(Hz)	(ppm)	(ppm)	
LTE Band 7 / 20MHz / Full RB							
QPSK	21100 / 2535	VL	TN	10.17	0.0040	N/A	Pass
		VN		8.14	0.0032		Pass
		VH		11.25	0.0044		Pass
		VN	50	11.93	0.0047		Pass
			40	9.82	0.0039		Pass
			30	10.33	0.0041		Pass
			20	8.14	0.0032		Pass
			10	14.08	0.0056		Pass
			0	13.64	0.0054		Pass
			-10	12.91	0.0051		Pass
			-20	13.24	0.0052		Pass
			-30	14.94	0.0059		Pass

Modulation	Channel/ Frequency	Voltage	Temperature	Deviation	Deviation	Limit	Pass/ Fail
	(MHz)	(Vdc)	(°C)	(Hz)	(ppm)	(ppm)	
LTE Band 17 / 10MHz / Full RB							
QPSK	23790 / 710	VL	TN	-11.23	-0.0158	Note 1	Pass
		VN		-7.67	-0.0108		Pass
		VH		-9.09	-0.0128		Pass
		VN	50	-11.31	-0.0159		Pass
			40	-9.82	-0.0138		Pass
			30	-10.41	-0.0147		Pass
			20	-7.67	-0.0108		Pass
			10	-6.55	-0.0092		Pass
			0	-8.48	-0.0119		Pass
			-10	-6.41	-0.0090		Pass
			-20	-9.65	-0.0136		Pass
			-30	-8.89	-0.0125		Pass

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCC4G-V1.1

Modulation	Channel/ Frequency	Voltage	Temperature	Deviation	Deviation	Limit	Pass/ Fail
	(MHz)	(Vdc)	(°C)	(Hz)	(ppm)	(ppm)	
LTE Band 38/ 20MHz / Full RB							
QPSK	37850 / 2580	VL	TN	10.52	0.0041	Note 1	Pass
		VN		8.83	0.0034		Pass
		VH		9.39	0.0036		Pass
		VN	50	5.42	0.0021		Pass
			40	9.93	0.0038		Pass
			30	7.28	0.0028		Pass
			20	8.83	0.0034		Pass
			10	6.72	0.0026		Pass
			0	8.97	0.0035		Pass
			-10	7.35	0.0028		Pass
			-20	8.78	0.0034		Pass
			-30	9.44	0.0036		Pass

Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCC4G-V1.1

APPENDIX A RF TEST DATA

A.1 LTE BAND 2

Peak to Average Ratio


Band	Bandwidth (MHz)	Channel	Freq (MHz)	Modulation	RB	Result (dB)	Limit (dB)	Verdict
2	20.0	18700	1860.0	QPSK	100@0	5.47	13	PASS
2	20.0	18700	1860.0	16QAM	100@0	6.23	13	PASS
2	20.0	18900	1880.0	QPSK	100@0	5.50	13	PASS
2	20.0	18900	1880.0	16QAM	100@0	6.26	13	PASS
2	20.0	19100	1900.0	QPSK	100@0	5.31	13	PASS
2	20.0	19100	1900.0	16QAM	100@0	6.12	13	PASS
2	15.0	18675	1857.5	QPSK	75@0	5.33	13	PASS
2	15.0	18675	1857.5	16QAM	75@0	6.09	13	PASS
2	15.0	18900	1880.0	QPSK	75@0	5.32	13	PASS
2	15.0	18900	1880.0	16QAM	75@0	6.12	13	PASS
2	15.0	19125	1902.5	QPSK	75@0	5.18	13	PASS
2	15.0	19125	1902.5	16QAM	75@0	6.01	13	PASS
2	10.0	18650	1865.0	QPSK	50@0	5.50	13	PASS
2	10.0	18650	1855.0	16QAM	50@0	6.23	13	PASS
2	10.0	18900	1880.0	QPSK	50@0	5.46	13	PASS
2	10.0	18900	1880.0	16QAM	50@0	6.23	13	PASS
2	10.0	19150	1905.0	QPSK	50@0	5.35	13	PASS
2	10.0	19150	1905.0	16QAM	50@0	6.17	13	PASS
2	5.0	18625	1852.5	QPSK	25@0	5.48	13	PASS
2	5.0	18625	1852.5	16QAM	25@0	6.20	13	PASS
2	5.0	18900	1880.0	QPSK	25@0	5.43	13	PASS
2	5.0	18900	1880.0	16QAM	25@0	6.20	13	PASS
2	5.0	19175	1907.5	QPSK	25@0	5.31	13	PASS
2	5.0	19175	1907.5	16QAM	25@0	6.10	13	PASS
2	3.0	18615	1851.5	QPSK	15@0	5.48	13	PASS
2	3.0	18615	1851.5	16QAM	15@0	6.29	13	PASS
2	3.0	18900	1880.0	QPSK	15@0	5.37	13	PASS
2	3.0	18900	1880.0	16QAM	15@0	6.25	13	PASS
2	3.0	19185	1908.5	QPSK	15@0	5.30	13	PASS
2	3.0	19185	1908.5	16QAM	15@0	6.10	13	PASS
2	1.4	18607	1850.7	QPSK	6@0	5.39	13	PASS
2	1.4	18607	1850.7	16QAM	6@0	6.16	13	PASS
2	1.4	18900	1880.0	QPSK	6@0	5.38	13	PASS
2	1.4	18900	1880.0	16QAM	6@0	6.24	13	PASS
2	1.4	19193	1909.3	QPSK	6@0	5.16	13	PASS
2	1.4	19193	1909.3	16QAM	6@0	6.00	13	PASS

Test Graphs


B2_20M_QPSK_100@0_CH_18700




B2_20M_16QAM_100@0_CH_18700

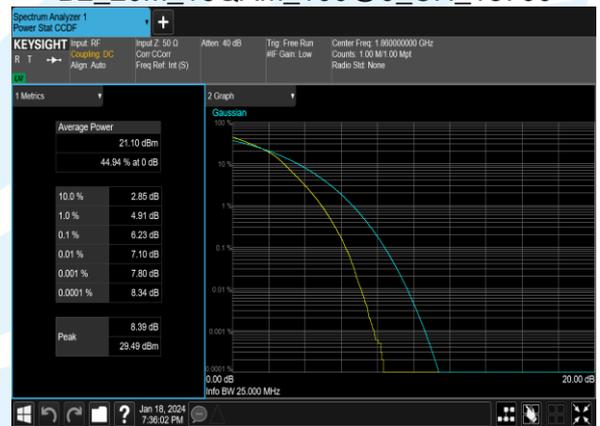


B2_20M_QPSK_100@0_CH_18900

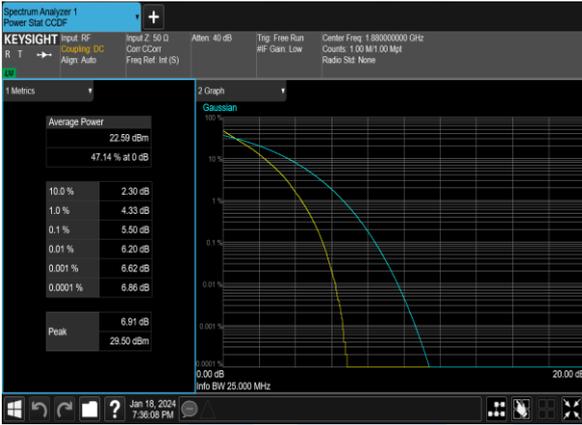


B2_20M_16QAM_100@0_CH_18900

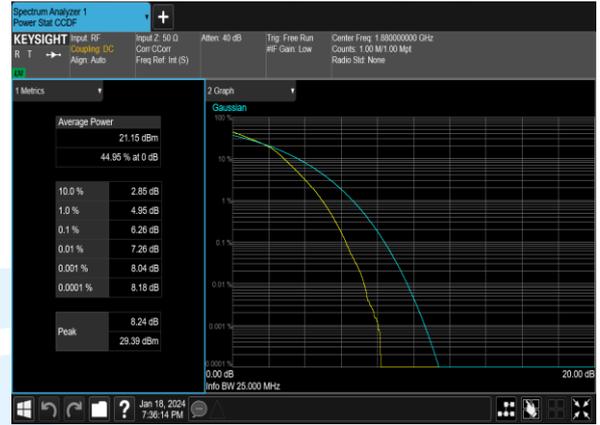

B2_20M_QPSK_100@0_CH_19100

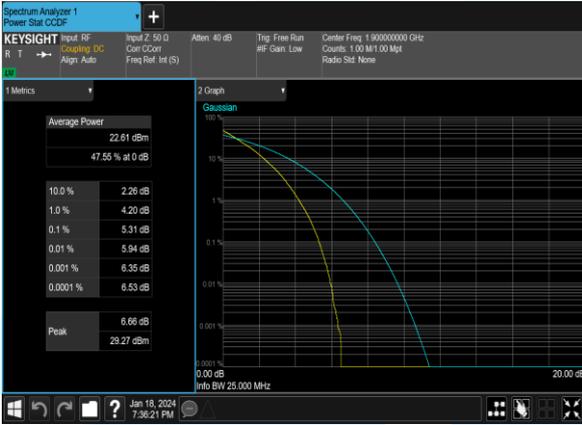


B2_20M_16QAM_100@0_CH_19100

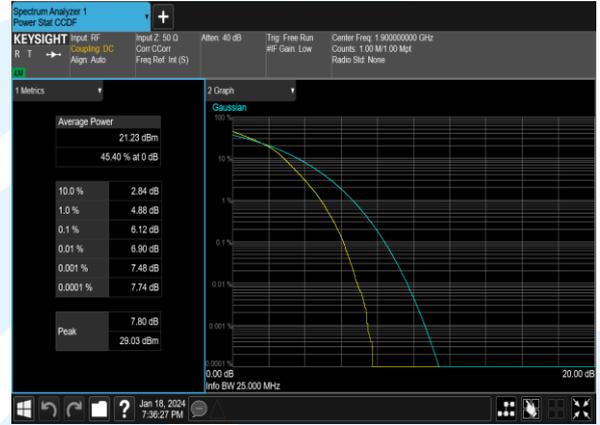


B2_15M_QPSK_75@0_CH_18675



B2_15M_16QAM_75@0_CH_18675

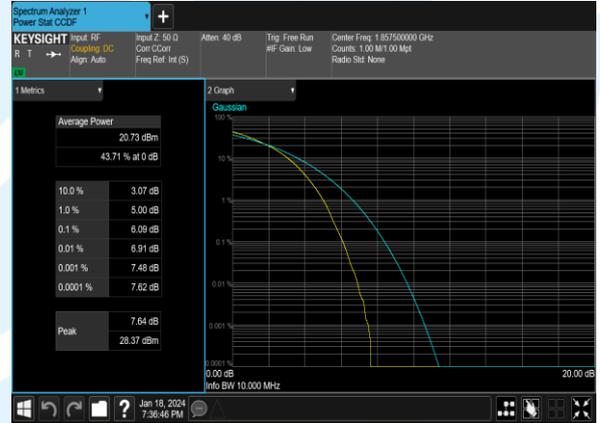

B2_15M_QPSK_75@0_CH_18900

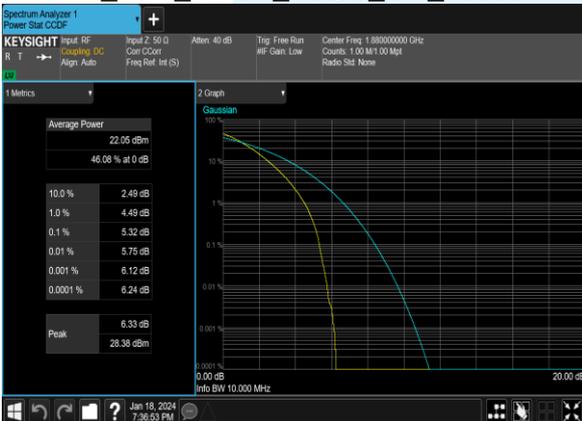

B2_15M_16QAM_75@0_CH_18900



B2_15M_QPSK_75@0_CH_19125



B2_15M_16QAM_75@0_CH_19125



B2_10M_QPSK_50@0_CH_18650



B2_10M_16QAM_50@0_CH_18650




B2_10M_QPSK_50@0_CH_18900



B2_10M_16QAM_50@0_CH_18900



B2_10M_QPSK_50@0_CH_19150

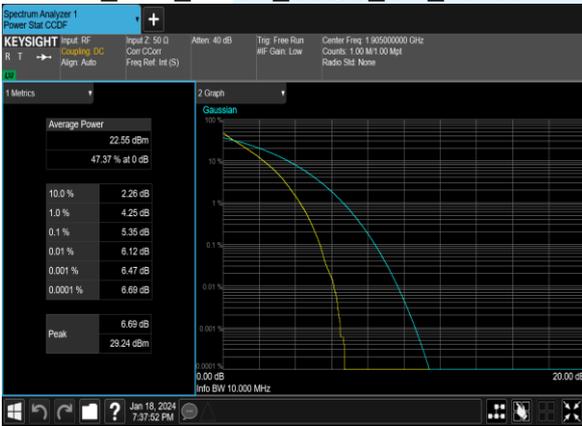

B2_10M_16QAM_50@0_CH_19150



B2_5M_QPSK_25@0_CH_18625



B2_5M_16QAM_25@0_CH_18625




B2_5M_QPSK_25@0_CH_18900



B2_5M_16QAM_25@0_CH_18900




B2_5M_QPSK_25@0_CH_19175

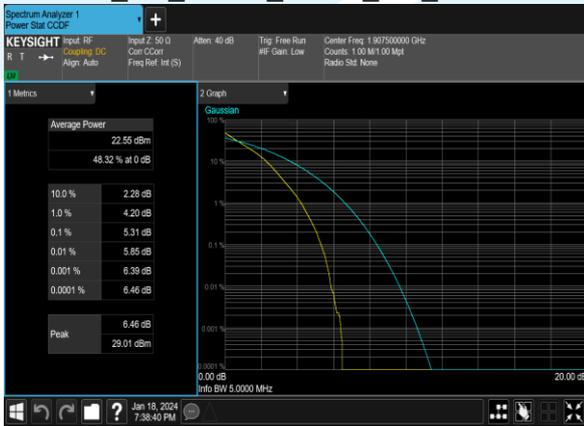

B2_5M_16QAM_25@0_CH_19175



B2_3M_QPSK_15@0_CH_18615

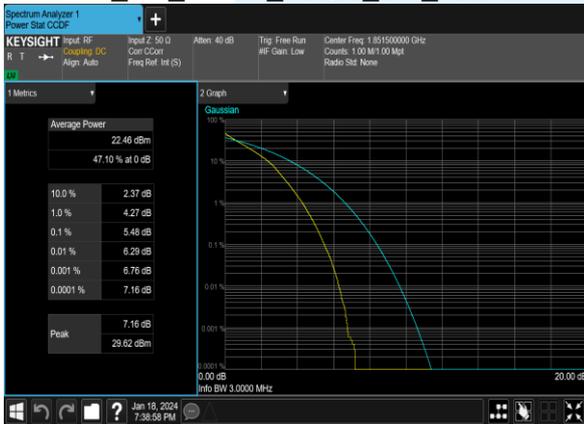

B2_3M_16QAM_15@0_CH_18615



B2_3M_QPSK_15@0_CH_18900



B2_3M_16QAM_15@0_CH_18900



B2_3M_QPSK_15@0_CH_19185



B2_3M_16QAM_15@0_CH_19185




B2_1.4M_QPSK_6@0_CH_18607



B2_1.4M_16QAM_6@0_CH_18607



B2_1.4M_QPSK_6@0_CH_18900

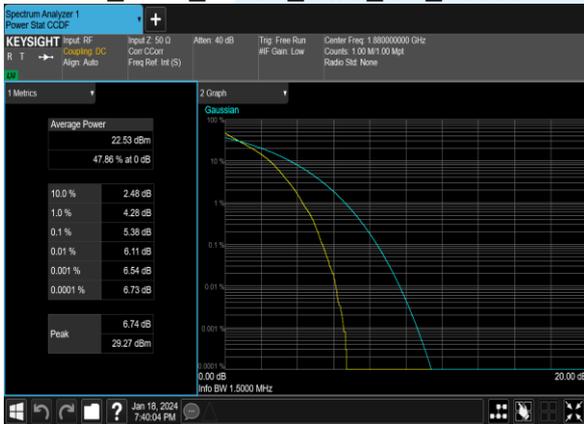

B2_1.4M_16QAM_6@0_CH_18900



B2_1.4M_QPSK_6@0_CH_19193



B2_1.4M_16QAM_6@0_CH_19193



Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888

Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>


UTTR-RF-FCC4G-V1.1

Occupied Bandwidth

Band	Bandwidth (MHz)	Channel	Freq (MHz)	Modulation	RB	OBW (MHz)	26dB BW (MHz)
2	20.0	18700	1860.0	QPSK	100@0	17.858	19.24
2	20.0	18700	1860.0	16QAM	100@0	17.888	19.17
2	20.0	18900	1880.0	QPSK	100@0	17.917	19.18
2	20.0	18900	1880.0	16QAM	100@0	17.877	18.99
2	20.0	19100	1900.0	QPSK	100@0	17.858	19.26
2	20.0	19100	1900.0	16QAM	100@0	17.862	19.09
2	15.0	18675	1857.5	QPSK	75@0	13.422	14.54
2	15.0	18675	1857.5	16QAM	75@0	13.400	14.41
2	15.0	18900	1880.0	QPSK	75@0	13.397	14.36
2	15.0	18900	1880.0	16QAM	75@0	13.387	14.51
2	15.0	19125	1902.5	QPSK	75@0	13.401	14.39
2	15.0	19125	1902.5	16QAM	75@0	13.387	14.43
2	10.0	18650	1855.0	QPSK	50@0	8.9394	9.629
2	10.0	18650	1855.0	16QAM	50@0	8.9350	9.598
2	10.0	18900	1880.0	QPSK	50@0	8.9323	9.612
2	10.0	18900	1880.0	16QAM	50@0	8.9197	9.641
2	10.0	19150	1905.0	QPSK	50@0	8.9543	9.632
2	10.0	19150	1905.0	16QAM	50@0	8.9372	9.723
2	5.0	18625	1852.5	QPSK	25@0	4.4506	4.884
2	5.0	18625	1852.5	16QAM	25@0	4.4604	4.779
2	5.0	18900	1880.0	QPSK	25@0	4.4510	4.854
2	5.0	18900	1880.0	16QAM	25@0	4.4616	4.883
2	5.0	19175	1907.5	QPSK	25@0	4.4566	4.859
2	5.0	19175	1907.5	16QAM	25@0	4.4539	4.887
2	3.0	18615	1851.5	QPSK	15@0	2.6852	2.959
2	3.0	18615	1851.5	16QAM	15@0	2.6839	2.954
2	3.0	18900	1880.0	QPSK	15@0	2.6835	2.952
2	3.0	18900	1880.0	16QAM	15@0	2.6870	2.955
2	3.0	19185	1908.5	QPSK	15@0	2.6810	2.971
2	3.0	19185	1908.5	16QAM	15@0	2.6813	2.987
2	1.4	18607	1850.7	QPSK	6@0	1.0779	1.218
2	1.4	18607	1850.7	16QAM	6@0	1.0808	1.229
2	1.4	18900	1880.0	QPSK	6@0	1.0792	1.217
2	1.4	18900	1880.0	16QAM	6@0	1.0770	1.219
2	1.4	19193	1909.3	QPSK	6@0	1.0771	1.227
2	1.4	19193	1909.3	16QAM	6@0	1.0813	1.222

Test Graphs

B2_20M_QPSK_100@0_CH_18700

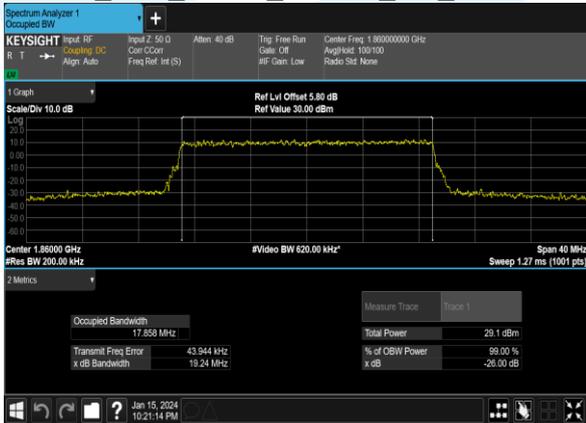

B2_20M_16QAM_100@0_CH_18700



Shenzhen UnionTrust Quality and Technology Co., Ltd.

Address: Unit D/E of 9/F and 16/F, Block A, Building 6, Baoneng science and technology park, Longhua district, Shenzhen, China

Tel: +86-755-28230888


Fax: +86-755-28230886

E-mail: info@uttlab.com

<http://www.uttlab.com>

UTTR-RF-FCC4G-V1.1

B2_20M_QPSK_100@0_CH_18900

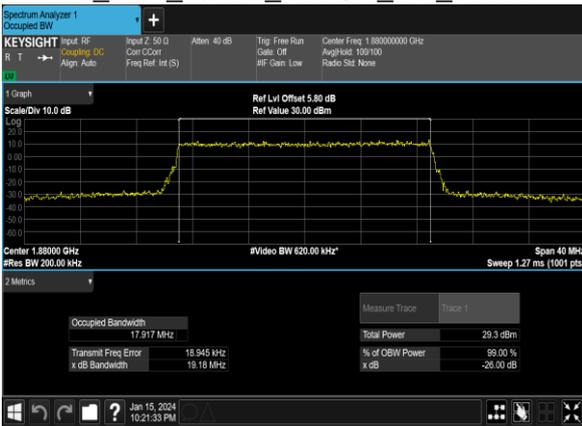

B2_20M_16QAM_100@0_CH_18900



B2_20M_QPSK_100@0_CH_19100



B2_20M_16QAM_100@0_CH_19100



B2_15M_QPSK_75@0_CH_18675



B2_15M_16QAM_75@0_CH_18675



B2_15M_QPSK_75@0_CH_18900



B2_15M_16QAM_75@0_CH_18900



B2_15M_QPSK_75@0_CH_19125



B2_15M_16QAM_75@0_CH_19125



B2_10M_QPSK_50@0_CH_18650



B2_10M_16QAM_50@0_CH_18650




B2_10M_QPSK_50@0_CH_18900




B2_10M_16QAM_50@0_CH_18900




B2_10M_QPSK_50@0_CH_19150

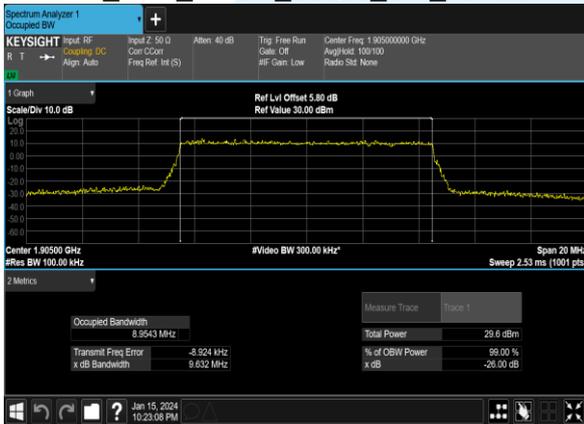

B2_10M_16QAM_50@0_CH_19150

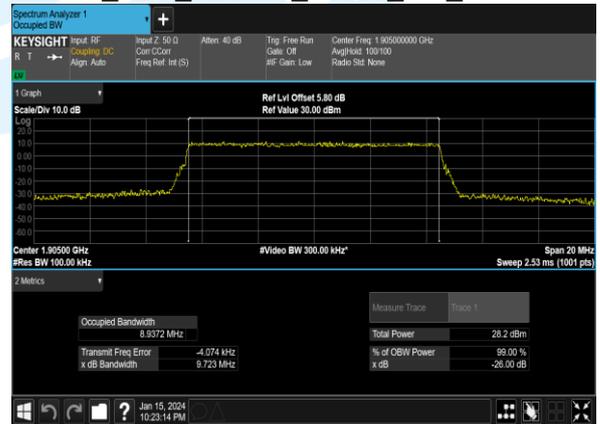

B2_5M_QPSK_25@0_CH_18625

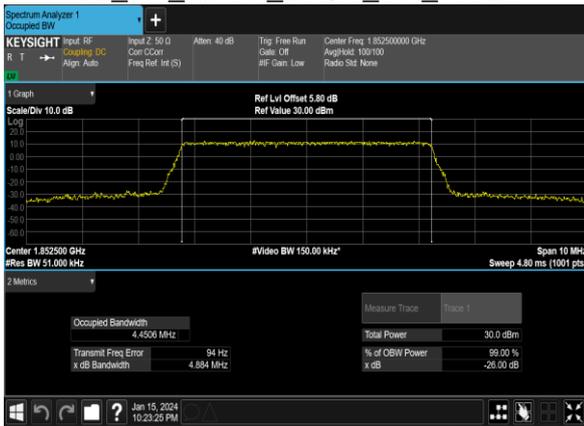

B2_5M_16QAM_25@0_CH_18625



B2_5M_QPSK_25@0_CH_18900



B2_5M_16QAM_25@0_CH_18900



B2_5M_QPSK_25@0_CH_19175



B2_5M_16QAM_25@0_CH_19175



B2_3M_QPSK_15@0_CH_18615



B2_3M_16QAM_15@0_CH_18615

