

FCC TEST REPORT (BLUETOOTH EDR)

REPORT NO.: RF120628C18-2

MODEL NO.: Click Plus

FCC ID: YHLBLUCLICKPUS

RECEIVED: Jun. 28, 2012

TESTED: Jun. 29 ~ Jul. 13, 2012

ISSUED: Jul. 16, 2012

APPLICANT: CT Asia

ADDRESS: Unit 01, 15/F, Seaview Centre, 139-141 Hoi bun

road, Kwun Tong, Kowloon, Hongkong

ISSUED BY: Bureau Veritas Consumer Products Services (H.K.)

Ltd., Taoyuan Branch

LAB ADDRESS: No. 47, 14th Ling, Chia Pau Vil., Lin Kou Dist., New

Taipei City, Taiwan (R.O.C)

TEST LOCATION: No. 19, Hwa Ya 2nd Rd, Wen Hwa Tsuen, Kwei

Shan Hsiang, Taoyuan Hsien 333, Taiwan, R.O.C.

This report should not be used by the client to claim product certification, approval, or endorsement by TAF or any government agencies.





This report is for your exclusive use. Any copying or replication of this report to or for any other person or entity, or use of our name or trademark, is permitted only with our prior written permission. This report sets forth our findings solely with respect to the test samples identified herein. The results set forth in this report are not indicative or representative of the quality or characteristics of the lot from which a test sample was taken or any similar or identical product unless specifically and expressly noted. Our report includes all of the tests requested by you and the results thereof based upon the information that you provided to us. You have 60 days from date of issuance of this report to notify us of any material error or omission caused by our negligence, provided, however, that such notice shall be in writing and shall specifically address the issue you wish to raise. A failure to raise such issue within the prescribed time shall constitute your unqualified acceptance of the completeness of this report, the tests conducted and the correctness of the report contents. Unless specific mention, the uncertainty of measurement has been explicitly taken into account to declare the compliance or non-compliance to the specification



Table of Contents

RELE	ASE CONTROL RECORD	4
1.	CERTIFICATION	
2.	SUMMARY OF TEST RESULTS	6
2.1	MEASUREMENT UNCERTAINTY	6
3.	GENERAL INFORMATION	
3.1	GENERAL DESCRIPTION OF EUT	7
3.2	DESCRIPTION OF TEST MODES	8
3.2.1	TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL	9
3.3	GENERAL DESCRIPTION OF APPLIED STANDARDS	11
3.4	DESCRIPTION OF SUPPORT UNITS	11
3.4.1	CONFIGURATION OF SYSTEM UNDER TEST	11
4.	TEST TYPES AND RESULTS	12
4.1	RADIATED EMISSION AND BANDEDGE MEASUREMENT	12
4.1.1	LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT	12
4.1.2	TEST INSTRUMENTS	13
4.1.3	TEST PROCEDURES	14
4.1.4	DEVIATION FROM TEST STANDARD	
4.1.5	TEST SETUP	
4.1.6	EUT OPERATING CONDITIONS	15
4.1.7	TEST RESULTS	16
4.2	CONDUCTED EMISSION MEASUREMENT	24
4.2.1	LIMITS OF CONDUCTED EMISSION MEASUREMENT	24
4.2.2	TEST INSTRUMENTS	
4.2.3	TEST PROCEDURES	25
4.2.4	DEVIATION FROM TEST STANDARD	25
4.2.5	TEST SETUP	26
4.2.6	EUT OPERATING CONDITIONS	26
4.2.7	TEST RESULTS	27
4.3	NUMBER OF HOPPING FREQUENCY USED	29
4.3.1	LIMIT OF HOPPING FREQUENCY USED	29
4.3.2	TEST SETUP	29
4.3.3	TEST INSTRUMENTS	29
4.3.4	TEST PROCEDURES	
4.3.5	DEVIATION FROM TEST STANDARD	29
4.3.6	TEST RESULTS	29
4.4	DWELL TIME ON EACH CHANNEL	31
4.4.1	LIMIT OF DWELL TIME USED	31
4.4.2	TEST SETUP	31
4.4.3	TEST INSTRUMENTS	31



4.4.5 DEVIATION FROM TEST STANDARD 31 4.4.6 TEST RESULTS 32 4.5 CHANNEL BANDWIDTH 38 4.5.1 LIMITS OF CHANNEL BANDWIDTH 38 4.5.2 TEST SETUP 38 4.5.3 TEST INSTRUMENTS 38 4.5.4 TEST PROCEDURE 38 4.5.5 DEVIATION FROM TEST STANDARD 38 4.5.6 EUT OPERATING CONDITION 38 4.5.7 TEST RESULTS 39 4.6 HOPPING CHANNEL SEPARATION 42 4.6.1 LIMIT OF HOPPING CHANNEL SEPARATION 42 4.6.2 TEST SETUP 42 4.6.3 TEST INSTRUMENTS 42 4.6.4 TEST PROCEDURES 42 4.6.5 DEVIATION FROM TEST STANDARD 42 4.6.6 TEST RESULTS 43 4.7 MAXIMUM OUTPUT POWER 45 4.7.1 LIMITS OF MAXIMUM OUTPUT POWER MEASUREMENT 45 4.7.2 TEST SETUP 45 4.7.3 TEST INSTRUMENTS 45 4.7.4 TEST PROCEDURES <t< th=""><th>4.4.4</th><th>TEST PROCEDURES</th><th>.31</th></t<>	4.4.4	TEST PROCEDURES	.31
4.5. CHANNEL BANDWIDTH	4.4.5	DEVIATION FROM TEST STANDARD	.31
4.5.1 LIMITS OF CHANNEL BANDWIDTH 38 4.5.2 TEST SETUP 38 4.5.3 TEST INSTRUMENTS 38 4.5.4 TEST PROCEDURE 38 4.5.5 DEVIATION FROM TEST STANDARD 38 4.5.6 EUT OPERATING CONDITION 38 4.5.7 TEST RESULTS 39 4.6 HOPPING CHANNEL SEPARATION 42 4.6.1 LIMIT OF HOPPING CHANNEL SEPARATION 42 4.6.2 TEST SETUP 42 4.6.3 TEST INSTRUMENTS 42 4.6.4 TEST PROCEDURES 42 4.6.5 DEVIATION FROM TEST STANDARD 42 4.6.6 TEST RESULTS 43 4.7 MAXIMUM OUTPUT POWER 45 4.7.1 LIMITS OF MAXIMUM OUTPUT POWER MEASUREMENT 45 4.7.2 TEST SETUP 45 4.7.3 TEST INSTRUMENTS 45 4.7.4 TEST PROCEDURES 45 4.7.5 DEVIATION FROM TEST STANDARD 45 4.7.6 EUT OPERATING CONDITION 45 4.7.7 TEST RESULTS	4.4.6	TEST RESULTS	.32
4.5.2 TEST SETUP 38 4.5.3 TEST INSTRUMENTS 38 4.5.4 TEST PROCEDURE 38 4.5.5 DEVIATION FROM TEST STANDARD 38 4.5.6 EUT OPERATING CONDITION 38 4.5.7 TEST RESULTS 39 4.6 HOPPING CHANNEL SEPARATION 42 4.6.1 LIMIT OF HOPPING CHANNEL SEPARATION 42 4.6.2 TEST SETUP 42 4.6.3 TEST INSTRUMENTS 42 4.6.4 TEST PROCEDURES 42 4.6.5 DEVIATION FROM TEST STANDARD 42 4.6.6 TEST RESULTS 43 4.7 MAXIMUM OUTPUT POWER 45 4.7.1 LIMITS OF MAXIMUM OUTPUT POWER MEASUREMENT 45 4.7.2 TEST SETUP 45 4.7.3 TEST INSTRUMENTS 45 4.7.4 TEST PROCEDURES 45 4.7.5 DEVIATION FROM TEST STANDARD 45 4.7.6 EUT OPERATING CONDITION 45 4.7.7 TEST RESULTS 46 4.8.0 CONDUCTED OUT OF BAND EMISSION ME	4.5	CHANNEL BANDWIDTH	.38
4.5.3 TEST INSTRUMENTS 38 4.5.4 TEST PROCEDURE 38 4.5.5 DEVIATION FROM TEST STANDARD 38 4.5.6 EUT OPERATING CONDITION 38 4.5.7 TEST RESULTS 39 4.6 HOPPING CHANNEL SEPARATION 42 4.6.1 LIMIT OF HOPPING CHANNEL SEPARATION 42 4.6.2 TEST SETUP 42 4.6.3 TEST INSTRUMENTS 42 4.6.4 TEST PROCEDURES 42 4.6.5 DEVIATION FROM TEST STANDARD 42 4.6.6 TEST RESULTS 43 4.7 MAXIMUM OUTPUT POWER 45 4.7.1 LIMITS OF MAXIMUM OUTPUT POWER MEASUREMENT 45 4.7.2 TEST SETUP 45 4.7.3 TEST INSTRUMENTS 45 4.7.4 TEST PROCEDURES 45 4.7.5 DEVIATION FROM TEST STANDARD 45 4.7.6 EUT OPERATING CONDITION 45 4.7.7 TEST RESULTS 46 4.8 CONDUCTED OUT OF BAND EMISSION MEASUREMENT 48 4.8.1 LIM	4.5.1	LIMITS OF CHANNEL BANDWIDTH	.38
4.5.4 TEST PROCEDURE 38 4.5.5 DEVIATION FROM TEST STANDARD 38 4.5.6 EUT OPERATING CONDITION 38 4.5.7 TEST RESULTS 39 4.6 HOPPING CHANNEL SEPARATION 42 4.6.1 LIMIT OF HOPPING CHANNEL SEPARATION 42 4.6.2 TEST SETUP 42 4.6.3 TEST INSTRUMENTS 42 4.6.4 TEST PROCEDURES 42 4.6.5 DEVIATION FROM TEST STANDARD 42 4.6.6 TEST RESULTS 43 4.7 MAXIMUM OUTPUT POWER 45 4.7.1 LIMITS OF MAXIMUM OUTPUT POWER MEASUREMENT 45 4.7.2 TEST SETUP 45 4.7.3 TEST INSTRUMENTS 45 4.7.4 TEST PROCEDURES 45 4.7.5 DEVIATION FROM TEST STANDARD 45 4.7.6 EUT OPERATING CONDITION 45 4.7.7 TEST RESULTS 46 4.8.1 LIMITS OF CONDUCTED OUT OF BAND EMISSION MEASUREMENT 48 4.8.2 TEST INSTRUMENTS 48 4.8.3	4.5.2	TEST SETUP	.38
4.5.5 DEVIATION FROM TEST STANDARD 38 4.5.6 EUT OPERATING CONDITION 38 4.5.7 TEST RESULTS 39 4.6 HOPPING CHANNEL SEPARATION 42 4.6.1 LIMIT OF HOPPING CHANNEL SEPARATION 42 4.6.2 TEST SETUP 42 4.6.3 TEST INSTRUMENTS 42 4.6.4 TEST PROCEDURES 42 4.6.5 DEVIATION FROM TEST STANDARD 42 4.6.6 TEST RESULTS 43 4.7 MAXIMUM OUTPUT POWER 45 4.7.1 LIMITS OF MAXIMUM OUTPUT POWER MEASUREMENT 45 4.7.2 TEST SETUP 45 4.7.3 TEST INSTRUMENTS 45 4.7.4 TEST PROCEDURES 45 4.7.5 DEVIATION FROM TEST STANDARD 45 4.7.6 EUT OPERATING CONDITION 45 4.7.7 TEST RESULTS 46 4.8 CONDUCTED OUT OF BAND EMISSION MEASUREMENT 48 4.8.1 LIMITS OF CONDUCTED OUT OF BAND EMISSION MEASUREMENT 48 4.8.2 TEST INSTRUMENTS 48 <	4.5.3	TEST INSTRUMENTS	.38
4.5.6 EUT OPERATING CONDITION 38 4.5.7 TEST RESULTS 39 4.6 HOPPING CHANNEL SEPARATION 42 4.6.1 LIMIT OF HOPPING CHANNEL SEPARATION 42 4.6.2 TEST SETUP 42 4.6.3 TEST INSTRUMENTS 42 4.6.4 TEST PROCEDURES 42 4.6.5 DEVIATION FROM TEST STANDARD 42 4.6.6 TEST RESULTS 43 4.7 MAXIMUM OUTPUT POWER 45 4.7.1 LIMITS OF MAXIMUM OUTPUT POWER MEASUREMENT 45 4.7.2 TEST SETUP 45 4.7.3 TEST INSTRUMENTS 45 4.7.4 TEST PROCEDURES 45 4.7.5 DEVIATION FROM TEST STANDARD 45 4.7.6 EUT OPERATING CONDITION 45 4.8.1 LIMITS OF CONDUCTED OUT OF BAND EMISSION MEASUREMENT 48 4.8.2 TEST INSTRUMENTS 48 4.8.3 TEST PROCEDURE 48 4.8.4 DEVIATION FROM TEST STANDARD 48 4.8.5 EUT OPERATING CONDITION 48 4	4.5.4	TEST PROCEDURE	.38
4.5.7 TEST RESULTS 39 4.6 HOPPING CHANNEL SEPARATION 42 4.6.1 LIMIT OF HOPPING CHANNEL SEPARATION 42 4.6.2 TEST SETUP 42 4.6.3 TEST INSTRUMENTS 42 4.6.4 TEST PROCEDURES 42 4.6.5 DEVIATION FROM TEST STANDARD 42 4.6.6 TEST RESULTS 43 4.7 MAXIMUM OUTPUT POWER 45 4.7.1 LIMITS OF MAXIMUM OUTPUT POWER MEASUREMENT 45 4.7.2 TEST SETUP 45 4.7.3 TEST INSTRUMENTS 45 4.7.4 TEST PROCEDURES 45 4.7.5 DEVIATION FROM TEST STANDARD 45 4.7.6 EUT OPERATING CONDITION 45 4.7.7 TEST RESULTS 46 4.8.1 LIMITS OF CONDUCTED OUT OF BAND EMISSION MEASUREMENT 48 4.8.2 TEST INSTRUMENTS 48 4.8.3 TEST PROCEDURE 48 4.8.4 DEVIATION FROM TEST STANDARD 48 4.8.5 TEST RESULTS 48 4.8.6 TE	4.5.5	DEVIATION FROM TEST STANDARD	.38
4.6 HOPPING CHANNEL SEPARATION 42 4.6.1 LIMIT OF HOPPING CHANNEL SEPARATION 42 4.6.2 TEST SETUP 42 4.6.3 TEST INSTRUMENTS 42 4.6.4 TEST PROCEDURES 42 4.6.5 DEVIATION FROM TEST STANDARD 42 4.6.6 TEST RESULTS 43 4.7 MAXIMUM OUTPUT POWER 45 4.7.1 LIMITS OF MAXIMUM OUTPUT POWER MEASUREMENT 45 4.7.2 TEST SETUP 45 4.7.3 TEST INSTRUMENTS 45 4.7.4 TEST PROCEDURES 45 4.7.5 DEVIATION FROM TEST STANDARD 45 4.7.6 EUT OPERATING CONDITION 45 4.7.7 TEST RESULTS 46 4.8.1 LIMITS OF CONDUCTED OUT OF BAND EMISSION MEASUREMENT 48 4.8.2 TEST INSTRUMENTS 48 4.8.3 TEST PROCEDURE 48 4.8.4 DEVIATION FROM TEST STANDARD 48 4.8.5 EUT OPERATING CONDITION 48 4.8.6 TEST RESULTS 48 5.	4.5.6	EUT OPERATING CONDITION	.38
4.6.1 LIMIT OF HOPPING CHANNEL SEPARATION 42 4.6.2 TEST SETUP 42 4.6.3 TEST INSTRUMENTS 42 4.6.4 TEST PROCEDURES 42 4.6.5 DEVIATION FROM TEST STANDARD 42 4.6.6 TEST RESULTS 43 4.7 MAXIMUM OUTPUT POWER 45 4.7.1 LIMITS OF MAXIMUM OUTPUT POWER MEASUREMENT 45 4.7.2 TEST SETUP 45 4.7.3 TEST INSTRUMENTS 45 4.7.4 TEST PROCEDURES 45 4.7.5 DEVIATION FROM TEST STANDARD 45 4.7.6 EUT OPERATING CONDITION 45 4.7.7 TEST RESULTS 46 4.8 CONDUCTED OUT OF BAND EMISSION MEASUREMENT 48 4.8.1 LIMITS OF CONDUCTED OUT OF BAND EMISSION MEASUREMENT 48 4.8.2 TEST INSTRUMENTS 48 4.8.3 TEST PROCEDURE 48 4.8.4 DEVIATION FROM TEST STANDARD 48 4.8.5 EUT OPERATING CONDITION 48 4.8.6 TEST RESULTS 48	4.5.7		
4.6.2 TEST SETUP 42 4.6.3 TEST INSTRUMENTS 42 4.6.4 TEST PROCEDURES 42 4.6.5 DEVIATION FROM TEST STANDARD 42 4.6.6 TEST RESULTS 43 4.7 MAXIMUM OUTPUT POWER 45 4.7.1 LIMITS OF MAXIMUM OUTPUT POWER MEASUREMENT 45 4.7.2 TEST SETUP 45 4.7.3 TEST INSTRUMENTS 45 4.7.4 TEST PROCEDURES 45 4.7.5 DEVIATION FROM TEST STANDARD 45 4.7.6 EUT OPERATING CONDITION 45 4.7.7 TEST RESULTS 46 4.8 CONDUCTED OUT OF BAND EMISSION MEASUREMENT 48 4.8.1 LIMITS OF CONDUCTED OUT OF BAND EMISSION MEASUREMENT 48 4.8.2 TEST INSTRUMENTS 48 4.8.3 TEST PROCEDURE 48 4.8.4 DEVIATION FROM TEST STANDARD 48 4.8.5 EUT OPERATING CONDITION 48 4.8.6 TEST RESULTS 48 5. PHOTOGRAPHS OF THE TEST CONFIGURATION 52 <	4.6	HOPPING CHANNEL SEPARATION	.42
4.6.3 TEST INSTRUMENTS 42 4.6.4 TEST PROCEDURES 42 4.6.5 DEVIATION FROM TEST STANDARD 42 4.6.6 TEST RESULTS 43 4.7 MAXIMUM OUTPUT POWER 45 4.7.1 LIMITS OF MAXIMUM OUTPUT POWER MEASUREMENT 45 4.7.2 TEST SETUP 45 4.7.3 TEST INSTRUMENTS 45 4.7.4 TEST PROCEDURES 45 4.7.5 DEVIATION FROM TEST STANDARD 45 4.7.6 EUT OPERATING CONDITION 45 4.7.7 TEST RESULTS 46 4.8 CONDUCTED OUT OF BAND EMISSION MEASUREMENT 48 4.8.1 LIMITS OF CONDUCTED OUT OF BAND EMISSION MEASUREMENT 48 4.8.2 TEST INSTRUMENTS 48 4.8.3 TEST PROCEDURE 48 4.8.4 DEVIATION FROM TEST STANDARD 48 4.8.5 EUT OPERATING CONDITION 48 4.8.6 TEST RESULTS 48 5. PHOTOGRAPHS OF THE TEST CONFIGURATION 52 6. INFORMATION ON THE TESTING LABORATORIES 53	4.6.1		
4.6.4 TEST PROCEDURES 42 4.6.5 DEVIATION FROM TEST STANDARD 42 4.6.6 TEST RESULTS 43 4.7 MAXIMUM OUTPUT POWER 45 4.7.1 LIMITS OF MAXIMUM OUTPUT POWER MEASUREMENT 45 4.7.2 TEST SETUP 45 4.7.3 TEST INSTRUMENTS 45 4.7.4 TEST PROCEDURES 45 4.7.5 DEVIATION FROM TEST STANDARD 45 4.7.6 EUT OPERATING CONDITION 45 4.7.7 TEST RESULTS 46 4.8 CONDUCTED OUT OF BAND EMISSION MEASUREMENT 48 4.8.1 LIMITS OF CONDUCTED OUT OF BAND EMISSION MEASUREMENT 48 4.8.2 TEST INSTRUMENTS 48 4.8.3 TEST PROCEDURE 48 4.8.4 DEVIATION FROM TEST STANDARD 48 4.8.5 EUT OPERATING CONDITION 48 4.8.6 TEST RESULTS 48 5. PHOTOGRAPHS OF THE TEST CONFIGURATION 52 6. INFORMATION ON THE TESTING LABORATORIES 53 7. APPENDIX A - MODIFICATIONS RECORDERS FOR EN	4.6.2	TEST SETUP	.42
4.6.5 DEVIATION FROM TEST STANDARD 42 4.6.6 TEST RESULTS 43 4.7 MAXIMUM OUTPUT POWER 45 4.7.1 LIMITS OF MAXIMUM OUTPUT POWER MEASUREMENT 45 4.7.2 TEST SETUP 45 4.7.3 TEST INSTRUMENTS 45 4.7.4 TEST PROCEDURES 45 4.7.5 DEVIATION FROM TEST STANDARD 45 4.7.6 EUT OPERATING CONDITION 45 4.7.7 TEST RESULTS 46 4.8 CONDUCTED OUT OF BAND EMISSION MEASUREMENT 48 4.8.1 LIMITS OF CONDUCTED OUT OF BAND EMISSION MEASUREMENT 48 4.8.2 TEST INSTRUMENTS 48 4.8.3 TEST PROCEDURE 48 4.8.4 DEVIATION FROM TEST STANDARD 48 4.8.5 EUT OPERATING CONDITION 48 4.8.6 TEST RESULTS 48 5. PHOTOGRAPHS OF THE TEST CONFIGURATION 52 6. INFORMATION ON THE TESTING LABORATORIES 53 7. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES	4.6.3	TEST INSTRUMENTS	.42
4.6.6 TEST RESULTS 43 4.7 MAXIMUM OUTPUT POWER 45 4.7.1 LIMITS OF MAXIMUM OUTPUT POWER MEASUREMENT 45 4.7.2 TEST SETUP 45 4.7.3 TEST INSTRUMENTS 45 4.7.4 TEST PROCEDURES 45 4.7.5 DEVIATION FROM TEST STANDARD 45 4.7.6 EUT OPERATING CONDITION 45 4.7.7 TEST RESULTS 46 4.8 CONDUCTED OUT OF BAND EMISSION MEASUREMENT 48 4.8.1 LIMITS OF CONDUCTED OUT OF BAND EMISSION MEASUREMENT 48 4.8.2 TEST INSTRUMENTS 48 4.8.3 TEST PROCEDURE 48 4.8.4 DEVIATION FROM TEST STANDARD 48 4.8.5 EUT OPERATING CONDITION 48 4.8.6 TEST RESULTS 48 5. PHOTOGRAPHS OF THE TEST CONFIGURATION 52 6. INFORMATION ON THE TESTING LABORATORIES 53 7. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES	4.6.4	TEST PROCEDURES	.42
4.7 MAXIMUM OUTPUT POWER .45 4.7.1 LIMITS OF MAXIMUM OUTPUT POWER MEASUREMENT .45 4.7.2 TEST SETUP .45 4.7.3 TEST INSTRUMENTS .45 4.7.4 TEST PROCEDURES .45 4.7.5 DEVIATION FROM TEST STANDARD .45 4.7.6 EUT OPERATING CONDITION .45 4.7.7 TEST RESULTS .46 4.8 CONDUCTED OUT OF BAND EMISSION MEASUREMENT .48 4.8.1 LIMITS OF CONDUCTED OUT OF BAND EMISSION MEASUREMENT .48 4.8.2 TEST INSTRUMENTS .48 4.8.3 TEST PROCEDURE .48 4.8.4 DEVIATION FROM TEST STANDARD .48 4.8.5 EUT OPERATING CONDITION .48 4.8.6 TEST RESULTS .48 5. PHOTOGRAPHS OF THE TEST CONFIGURATION .52 6. INFORMATION ON THE TESTING LABORATORIES .53 7. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES	4.6.5	DEVIATION FROM TEST STANDARD	.42
4.7.1 LIMITS OF MAXIMUM OUTPUT POWER MEASUREMENT .45 4.7.2 TEST SETUP .45 4.7.3 TEST INSTRUMENTS .45 4.7.4 TEST PROCEDURES .45 4.7.5 DEVIATION FROM TEST STANDARD .45 4.7.6 EUT OPERATING CONDITION .45 4.7.7 TEST RESULTS .46 4.8 CONDUCTED OUT OF BAND EMISSION MEASUREMENT .48 4.8.1 LIMITS OF CONDUCTED OUT OF BAND EMISSION MEASUREMENT .48 4.8.2 TEST INSTRUMENTS .48 4.8.3 TEST PROCEDURE .48 4.8.4 DEVIATION FROM TEST STANDARD .48 4.8.5 EUT OPERATING CONDITION .48 4.8.6 TEST RESULTS .48 5. PHOTOGRAPHS OF THE TEST CONFIGURATION .52 6. INFORMATION ON THE TESTING LABORATORIES .53 7. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES	4.6.6		
4.7.2 TEST SETUP	4.7	MAXIMUM OUTPUT POWER	.45
4.7.3 TEST INSTRUMENTS 45 4.7.4 TEST PROCEDURES 45 4.7.5 DEVIATION FROM TEST STANDARD 45 4.7.6 EUT OPERATING CONDITION 45 4.7.7 TEST RESULTS 46 4.8 CONDUCTED OUT OF BAND EMISSION MEASUREMENT 48 4.8.1 LIMITS OF CONDUCTED OUT OF BAND EMISSION MEASUREMENT 48 4.8.2 TEST INSTRUMENTS 48 4.8.3 TEST PROCEDURE 48 4.8.4 DEVIATION FROM TEST STANDARD 48 4.8.5 EUT OPERATING CONDITION 48 4.8.6 TEST RESULTS 48 5. PHOTOGRAPHS OF THE TEST CONFIGURATION 52 6. INFORMATION ON THE TESTING LABORATORIES 53 7. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES	4.7.1	LIMITS OF MAXIMUM OUTPUT POWER MEASUREMENT	.45
4.7.4 TEST PROCEDURES 45 4.7.5 DEVIATION FROM TEST STANDARD 45 4.7.6 EUT OPERATING CONDITION 45 4.7.7 TEST RESULTS 46 4.8 CONDUCTED OUT OF BAND EMISSION MEASUREMENT 48 4.8.1 LIMITS OF CONDUCTED OUT OF BAND EMISSION MEASUREMENT 48 4.8.2 TEST INSTRUMENTS 48 4.8.3 TEST PROCEDURE 48 4.8.4 DEVIATION FROM TEST STANDARD 48 4.8.5 EUT OPERATING CONDITION 48 4.8.6 TEST RESULTS 48 5. PHOTOGRAPHS OF THE TEST CONFIGURATION 52 6. INFORMATION ON THE TESTING LABORATORIES 53 7. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES	4.7.2		
4.7.5DEVIATION FROM TEST STANDARD454.7.6EUT OPERATING CONDITION454.7.7TEST RESULTS464.8CONDUCTED OUT OF BAND EMISSION MEASUREMENT484.8.1LIMITS OF CONDUCTED OUT OF BAND EMISSION MEASUREMENT484.8.2TEST INSTRUMENTS484.8.3TEST PROCEDURE484.8.4DEVIATION FROM TEST STANDARD484.8.5EUT OPERATING CONDITION484.8.6TEST RESULTS485.PHOTOGRAPHS OF THE TEST CONFIGURATION526.INFORMATION ON THE TESTING LABORATORIES537.APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES	4.7.3	TEST INSTRUMENTS	.45
4.7.6EUT OPERATING CONDITION454.7.7TEST RESULTS464.8CONDUCTED OUT OF BAND EMISSION MEASUREMENT484.8.1LIMITS OF CONDUCTED OUT OF BAND EMISSION MEASUREMENT484.8.2TEST INSTRUMENTS484.8.3TEST PROCEDURE484.8.4DEVIATION FROM TEST STANDARD484.8.5EUT OPERATING CONDITION484.8.6TEST RESULTS485PHOTOGRAPHS OF THE TEST CONFIGURATION526INFORMATION ON THE TESTING LABORATORIES537APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES	4.7.4	TEST PROCEDURES	.45
4.7.7TEST RESULTS464.8CONDUCTED OUT OF BAND EMISSION MEASUREMENT484.8.1LIMITS OF CONDUCTED OUT OF BAND EMISSION MEASUREMENT484.8.2TEST INSTRUMENTS484.8.3TEST PROCEDURE484.8.4DEVIATION FROM TEST STANDARD484.8.5EUT OPERATING CONDITION484.8.6TEST RESULTS485PHOTOGRAPHS OF THE TEST CONFIGURATION526INFORMATION ON THE TESTING LABORATORIES537APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES	4.7.5	DEVIATION FROM TEST STANDARD	.45
4.8 CONDUCTED OUT OF BAND EMISSION MEASUREMENT	4.7.6		
4.8.1 LIMITS OF CONDUCTED OUT OF BAND EMISSION MEASUREMENT	4.7.7		
4.8.2TEST INSTRUMENTS484.8.3TEST PROCEDURE484.8.4DEVIATION FROM TEST STANDARD484.8.5EUT OPERATING CONDITION484.8.6TEST RESULTS485PHOTOGRAPHS OF THE TEST CONFIGURATION526INFORMATION ON THE TESTING LABORATORIES537APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES	4.8		
4.8.3TEST PROCEDURE484.8.4DEVIATION FROM TEST STANDARD484.8.5EUT OPERATING CONDITION484.8.6TEST RESULTS485PHOTOGRAPHS OF THE TEST CONFIGURATION526INFORMATION ON THE TESTING LABORATORIES537APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES	4.8.1	LIMITS OF CONDUCTED OUT OF BAND EMISSION MEASUREMENT	.48
4.8.4DEVIATION FROM TEST STANDARD484.8.5EUT OPERATING CONDITION484.8.6TEST RESULTS485.PHOTOGRAPHS OF THE TEST CONFIGURATION526.INFORMATION ON THE TESTING LABORATORIES537.APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES			
 4.8.5 EUT OPERATING CONDITION			
 4.8.6 TEST RESULTS			
 5. PHOTOGRAPHS OF THE TEST CONFIGURATION		EUT OPERATING CONDITION	.48
 6. INFORMATION ON THE TESTING LABORATORIES	4.8.6		
7. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES	5.		
	6.		

3 of 54



RELEASE CONTROL RECORD

ISSUE NO.	REASON FOR CHANGE	DATE ISSUED
RF120628C18-2	Original release	Jul. 16, 2012

Report No.: RF120628C18-2 4 of 54 Report Format Version 5.0.0



1. CERTIFICATION

PRODUCT: GSM mobile

MODEL: Click Plus

BRAND: Blu

APPLICANT: CT Asia

TESTED: Jun. 29 ~ Jul. 13, 2012

TEST SAMPLE: ENGINEERING SAMPLE

STANDARDS: FCC Part 15, Subpart C (Section 15.247)

ANSI C63.10-2009

The above equipment (Model: Click Plus) has been tested by Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, and found compliance with the requirement of the above standards. The test record, data evaluation & Equipment Under Test (EUT) configurations represented herein are true and accurate accounts of the measurements of the sample's EMC characteristics under the conditions specified in this report.

Ivonne Wu / Senior Specialist Jul. 16, 2012 PREPARED BY

Gary Chang / Technical Manager , DATE : Jul. 16, 2012 APPROVED BY



2. SUMMARY OF TEST RESULTS

The EUT has been tested according to the following specifications:

APPLIED STANDARD: FCC Part 15, Subpart C (Bluetooth EDR)						
STANDARD SECTION	TEST TYPE AND LIMIT	RESULT	REMARK			
15.207	AC Power Conducted Emission	PASS	Meet the requirement of limit Minimum passing margin is -9.43dB at 0.15391MHz			
15.247(a)(1) (iii)	Number of Hopping Frequency Used	PASS	Meet the requirement of limit.			
15.247(a)(1) (iii)	Dwell Time on Each Channel	PASS	Meet the requirement of limit.			
15.247(a)(1)	Hopping Channel Separation Spectrum Bandwidth of a Frequency Hopping Sequence Spread Spectrum System	PASS	Meet the requirement of limit.			
15.247(b)	Maximum Peak Output Power	PASS	Meet the requirement of limit.			
15.247(d) Transmitter Radiated Emissions		PASS	Meet the requirement of limit. Minimum passing margin is –5.03dB at 43.23MHz.			
15.247(d)	Band Edge Measurement	PASS	Meet the requirement of limit.			
15.203	Antenna Requirement	PASS	No antenna connector is used.			

NOTE: If The Frequency Hopping System operating in 2400-2483.5MHz band and the output power less than 125mW. The hopping channel carrier frequencies separated by a minimum of 25kHz or two-thirds of the 20dB bandwidth of hopping channel whichever is greater.

2.1 MEASUREMENT UNCERTAINTY

Where relevant, the following measurement uncertainty levels have been estimated for tests performed on the EUT as specified in CISPR 16-4-2:

MEASUREMENT	FREQUENCY	UNCERTAINTY
Conducted emissions	9kHz~30MHz	2.44 dB
	30MHz ~ 200MHz	2.93 dB
Radiated emissions	200MHz ~1000MHz	2.95 dB
Radiated emissions	1GHz ~ 18GHz	2.26 dB
	18GHz ~ 40GHz	1.94 dB

This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.



3. GENERAL INFORMATION

3.1 GENERAL DESCRIPTION OF EUT

EUT	GSM mobile	GSM mobile		
MODEL NO.	Click Plus			
POWER SUPPLY	5.0Vdc (adapter) 3.7Vdc (Li-ion batte	ry)		
MODULATION TYPE	Bluetooth EDR	GFSK, π /4-DQPSK, 8DPSK		
TRANSFER RATE	Bluetooth EDR	1/2/3Mbps		
OPERATING FREQUENCY	2402 ~ 2480MHz			
NUMBER OF CHANNEL	Bluetooth EDR	79		
CHANNEL SPACING	Bluetooth EDR	1MHz		
OUTPUT POWER	Bluetooth EDR	0.0005W		
ANTENNA TYPE	PIFA antenna with	1.6dBi gain		
ANTENNA CONNECTOR	NA			
DATA CABLE	Refer to Note as below			
I/O PORTS	Refer to user's manual			
ACCESSORY DEVICES	Refer to Note as be	low		

NOTE:

1. The EUT contains following accessories.

ITEM	BRAND	MODEL	SPECIFICATION
Adapter	BLU	US300507	Input: 100-240Vac, 150mA Output: 5Vdc, 500mA
Battery	BLU	N5C60T	Rating: 3.7Vdc, 600mAh Type: Li-ion
USB Cable	BLU	NA	0.93m non-shielded cable w/o core
Earphone	BLU	NA	1.29m non-shielded cable w/o core

2. The above EUT information is declared by the manufacturer and for more detailed features description, please refer to the manufacturer's specifications or User's Manual.



3.2 DESCRIPTION OF TEST MODES

For Bluetooth EDR:

79 channels are provided to this EUT:

CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)	CHANNEL	FREQ. (MHz)
0	2402	20	2422	40	2442	60	2462
1	2403	21	2423	41	2443	61	2463
2	2404	22	2424	42	2444	62	2464
3	2405	23	2425	43	2445	63	2465
4	2406	24	2426	44	2446	64	2466
5	2407	25	2427	45	2447	65	2467
6	2408	26	2428	46	2448	66	2468
7	2409	27	2429	47	2449	67	2469
8	2410	28	2430	48	2450	68	2470
9	2411	29	2431	49	2451	69	2471
10	2412	30	2432	50	2452	70	2472
11	2413	31	2433	51	2453	71	2473
12	2414	32	2434	52	2454	72	2474
13	2415	33	2435	53	2455	73	2475
14	2416	34	2436	54	2456	74	2476
15	2417	35	2437	55	2457	75	2477
16	2418	36	2438	56	2458	76	2478
17	2419	37	2439	57	2459	77	2479
18	2420	38	2440	58	2460	78	2480
19	2421	39	2441	59	2461		



3.2.1 TEST MODE APPLICABILITY AND TESTED CHANNEL DETAIL

For Bluetooth EDR:

EUT CONFIGURE		APPLICA	BLE TO		DECORIDATION
MODE	RE≥1G	RE<1G	PLC	APCM	DESCRIPTION
-	√	√	V	\checkmark	-

Where RE≥1G: Radiated Emission above 1GHz PLC: Power Line Conducted Emission RE<1G: Radiated Emission below 1GHz APCM: Antenna Port Conducted Measurement

NOTE: 1. For Radiated emission test, pre-tested GFSK, π /4-DQPSK, 8DPSK modulation type and found GFSK was the worse, therefore chosen for the final test and presented in the test report.

2. The EUT had been pre-tested on the positioned of each 3 axis. The worst case was found when positioned on **Y-plane.**

RADIATED EMISSION TEST (ABOVE 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, antenna ports (if EUT with antenna diversity architecture) and packet type.
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	PACKET TYPE
-	0 to 78	0, 39, 78	GFSK	DH5

RADIATED EMISSION TEST (BELOW 1 GHz):

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, antenna ports (if EUT with antenna diversity architecture) and packet type.
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	PACKET TYPE
-	0 to 78	0	GFSK	DH5

POWER LINE CONDUCTED EMISSION TEST:

- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, antenna ports (if EUT with antenna diversity architecture), and packet types.
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	PACKET TYPE
-	0 to 78	0	GFSK	DH5



ANTENNA PORT CONDUCTED MEASUREMENT:

- This item includes all test value of each mode, but only includes spectrum plot of worst value of each mode.
- Pre-Scan has been conducted to determine the worst-case mode from all possible combinations between available modulations, antenna ports (if EUT with antenna diversity architecture), and packet types.
- Following channel(s) was (were) selected for the final test as listed below.

EUT CONFIGURE MODE	AVAILABLE CHANNEL	TESTED CHANNEL	MODULATION TYPE	PACKET TYPE
-	0 to 78	0, 39, 78	GFSK	DH5
-	0 to 78	0, 39, 78	π /4-DQPSK	DH5
-	0 to 78	0, 39, 78	8DPSK	DH5

TEST CONDITION:

APPLICABLE TO	ENVIRONMENTAL CONDITIONS	INPUT POWER	TESTED BY
RE≥1G	25deg. C, 65%RH	120Vac, 60Hz	Kay Wu
RE<1G	25deg. C, 65%RH	120Vac, 60Hz	Kay Wu
PLC	22deg. C, 55%RH	120Vac, 60Hz	Skys Huang
APCM	25deg. C, 65%RH	120Vac, 60Hz	Phoenix Chen



3.3 GENERAL DESCRIPTION OF APPLIED STANDARDS

The EUT is a RF Product. According to the specifications of the manufacturer, it must comply with the requirements of the following standards:


FCC Part 15, Subpart C (15.247) ANSI C63.10-2009

All test items have been performed and recorded as per the above standards.

3.4 DESCRIPTION OF SUPPORT UNITS

The EUT has been tested as an independent unit together with other necessary accessories or support units.

3.4.1 CONFIGURATION OF SYSTEM UNDER TEST

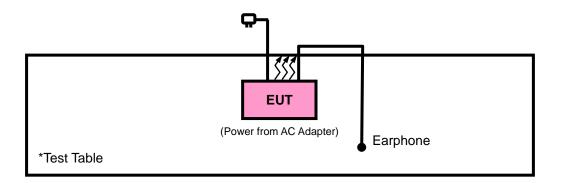



4. TEST TYPES AND RESULTS

4.1 RADIATED EMISSION AND BANDEDGE MEASUREMENT

4.1.1 LIMITS OF RADIATED EMISSION AND BANDEDGE MEASUREMENT

Radiated emissions which fall in the restricted bands must comply with the radiated emission limits specified as below table. Other emissions shall be at least 20dB below the highest level of the desired power:

FREQUENCIES (MHz)	FIELD STRENGTH (microvolts/meter)	MEASUREMENT DISTANCE (meters)
0.009 ~ 0.490	2400/F(kHz)	300
0.490 ~ 1.705	24000/F(kHz)	30
1.705 ~ 30.0	30	30
30 ~ 88	100	3
88 ~ 216	150	3
216 ~ 960	200	3
Above 960	500	3

- 1. The lower limit shall apply at the transition frequencies.
- 2. Emission level $(dBuV/m) = 20 \log Emission level (uV/m)$.
- 3. For frequencies above 1000MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits, specified above by more than 20dB under any condition of modulation.



4.1.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver Agilent	N9038A	MY51210203	Dec. 22, 2011	Dec. 21, 2012
Spectrum Analyzer ROHDE & SCHWARZ	FSU43	101261	Dec. 21, 2011	Dec. 20, 2012
BILOG Antenna SCHWARZBECK	VULB9168	9168-472	Dec. 20, 2011	Dec. 19, 2012
HORN Antenna SCHWARZBECK	BBHA 9120 D	9120D-969	Dec. 20, 2011	Dec. 19, 2012
HORN Antenna SCHWARZBECK	BBHA 9170	9170-480	Dec. 20, 2011	Dec. 19, 2012
Loop Antenna	HFH2-Z2	100070	Jan. 31, 2012	Jan. 30, 2014
Preamplifier EMCI	EMC 012645	980115	Dec. 30, 2011	Dec. 29, 2012
Preamplifier EMCI	EMC 330H	980112	Dec. 30, 2011	Dec. 29, 2012
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	309219/4	Oct. 21, 2011	Oct. 20, 2012
RF signal cable HUBER+SUHNNER	SUCOFLEX 104	250130/4	Jan. 02, 2012	Jan. 01, 2013
RF signal cable Worken	RG-213	NA	Jan. 02, 2012	Jan. 01, 2013
Software	E3 6.120103	NA	NA	NA
Antenna Tower MF	MFA-440H	NA	NA	NA
Turn Table MF	MFT-201SS	NA	NA	NA
Antenna Tower &Turn Table Controller MF	MF-7802	NA	NA	NA
Mini-Circuits Power Splitter	ZN2PD-9G	NA	May 25, 2012	May 24, 2013
JFW 20dB attenuation	50HF-020-SMA	NA	NA	NA o io 12 montho

- **NOTE:** 1. The calibration interval of the above test instruments except loop antenna is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.
 - 2. The calibration interval of loop antenna is 24 months and the calibrations are traceable to NML/ROC and NIST/USA.
 - 3. The test was performed in HwaYa Chamber 9.
 - 4. The horn antenna and HP preamplifier (model: 8449B) are used only for the measurement of emission frequency above 1GHz if tested.
 - 5. The FCC Site Registration No. is 460141.
 - 6. The IC Site Registration No. is IC 7450F-4.



4.1.3 TEST PROCEDURES

- a. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter semi-anechoic chamber. The table was rotated 360 degrees to determine the position of the highest radiation.
- b. The EUT was set 3 meters away from the interference-receiving antenna, which was mounted on the top of a variable-height antenna tower.
- c. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarizations of the antenna are set to make the measurement.
- d. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the rotatable table was turned from 0 degrees to 360 degrees to find the maximum reading.
- e. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode.
- f. If the emission level of the EUT in peak mode was lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

NOTE:


- 1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 120kHz for Quasi-peak detection at frequency below 1GHz.
- 2. The resolution bandwidth of test receiver/spectrum analyzer is 1 MHz and video bandwidth is 3MHz for Peak detection at frequency above 1GHz.
- 3. All modes of operation were investigated and the worst-case emissions are reported.

4.1.4 DEVIATION FROM TEST STANDARD

No deviation.



4.1.5 TEST SETUP

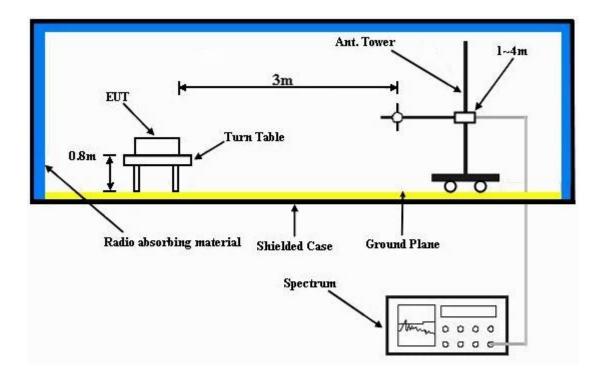

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.1.6 EUT OPERATING CONDITIONS

- a. Placed the EUT on a testing table.
- b. Use the software to control the EUT under transmission condition continuously at specific channel frequency.




4.1.7 TEST RESULTS

ABOVE 1GHz WORST-CASE DATA: GFSK



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

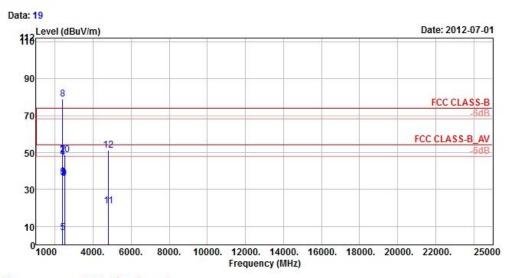

Site : 966 Chamber 5


Condition : FCC CLASS-B 3m ANT_18G~40G_HF HORIZONTAL

Brand/Model: Click Plus Remark : BT TX CH00 Tested by : Kay Wu Temprature : 25°C Humidity : 65% Plane : Y Date : DH5

			Read	Limit	0ver	Antenna	Cable	Preamp	A/Pos	T/Pos	
	Freq	Level	Level	Line	Limit	Factor	Loss	Factor			Remark
17	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m	dB	dB	cm	deg	
1	2390.00	35.82	41.21	54.00	-18.18	27.26	4.87	37.52	106	47	Average
2	2390.00	48.60	53.99	74.00	-25.40	27.26	4.87	37.52	106	47	Peak
3	2398.00	36.39	41.78	54.00	-17.61	27.26	4.87	37.52	106	47	Average
4	2398.00	47.08	52.47	74.00	-26.92	27.26	4.87	37.52	106	47	Peak
5	2400.00	6.57	11.96	54.00	-47.43	27.26	4.87	37.52	106	47	Average
6	2400.00	36.67	42.06	74.00	-37.33	27.26	4.87	37.52	106	47	Peak
7 av	2402.00	48.65	54.04			27.26	4.87	37.52	106	47	Average
8 pp	2402.00	78.75	84.14			27.26	4.87	37.52	106	47	Peak
9	2485.50	35.80	40.70	54.00	-18.20	27.50	4.92	37.32	106	47	Average
10	2485.50	48.80	53.70	74.00	-25.20	27.50	4.92	37.32	106	47	Peak
11	4804.00	21.06	35.09	54.00	-32.94	31.38	7.69	53.10	100	141	Average
12	4804.00	51.16	65.19	74.00	-22.84	31.38	7.69	53.10	100	141	Peak





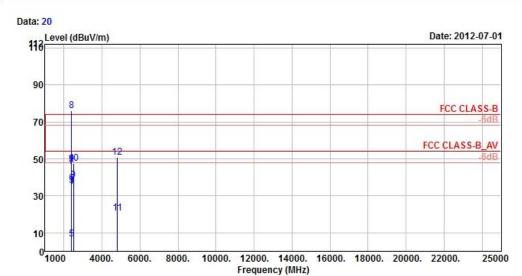

Site : 966 Chamber 5


Condition : FCC CLASS-B 3m ANT_18G~40G_HF VERTICAL

Brand/Model: Click Plus Remark : BT TX CH00 Tested by : Kay Wu Temprature : 25°C Humidity : 65% Plane : Y Date : DH5

			Read	Limit		Antenna		Preamp	A/Pos	T/Pos	
	Freq	Level	Level	Line	Limit	Factor	Loss	Factor			Remark
¥.	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m	dB	dB	cm	deg	i.
1	2390.00	35.00	40.39	54.00	-19.00	27.26	4.87	37.52	118	90	Average
2	2390.00	46.97	52.36	74.00	-27.03	27.26	4.87	37.52	118	90	Peak
3	2398.00	35.34	40.73	54.00	-18.66	27.26	4.87	37.52	118	90	Average
4	2398.00	47.40	52.79	74.00	-26.60	27.26	4.87	37.52	118	90	Peak
5	2400.00	6.54	11.93	54.00	-47.46	27.26	4.87	37.52	118	90	Average
6	2400.00	36.64	42.03	74.00	-37.36	27.26	4.87	37.52	118	90	Peak
7 av	2402.00	45.86	51.25			27.26	4.87	37.52	118	90	Average
8 pp	2402.00	75.96	81.35			27.26	4.87	37.52	118	90	Peak
9	2485.50	38.43	43.33	54.00	-15.57	27.50	4.92	37.32	118	90	Average
10	2485.50	47.46	52.36	74.00	-26.54	27.50	4.92	37.32	118	90	Peak
11	4804.00	20.72	34.75	54.00	-33.28	31.38	7.69	53.10	100	224	Average
12	4804.00	50.82	64.85	74.00	-23.18	31.38	7.69	53.10	100	224	Peak





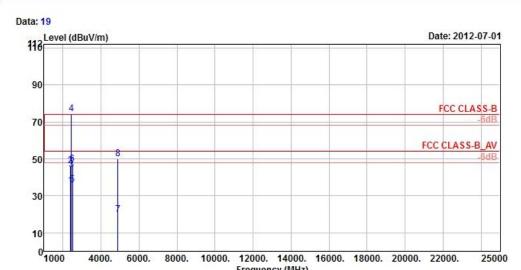

Frequency (MHz)

Site : 966 Chamber 5


Condition : FCC CLASS-B 3m ANT 18G~40G HF HORIZONTAL

Brand/Model: Click Plus Remark : BT TX CH39 Tested by : Kay Wu Temprature : 25℃ Humidity : 65% Plane : Y Date : DH5

	Freq	Level	Read Level	Limit Line		Antenna Factor		Preamp Factor	A/Pos	T/Pos	Remark
13	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m	dB	dB	cm	deg	
1	2390.00	35.42	40.81	54.00	-18.58	27.26	4.87	37.52	106	46	Average
2	2390.00	46.49	51.88	74.00	-27.51	27.26	4.87	37.52	106	46	Peak
3 av	2441.00	44.19	49.27			27.40	4.91	37.39	106	46	Average
4 pp	2441.00	74.29	79.37			27.40	4.91	37.39	106	46	Peak
5	2485.50	35.94	40.84	54.00	-18.06	27.50	4.92	37.32	106	46	Average
6	2485.50	47.02	51.92	74.00	-26.98	27.50	4.92	37.32	106	46	Peak
7	4882.00	19.72	33.52	54.00	-34.28	31.53	7.72	53.05	100	153	Average
8	4882.00	49.82	63.62	74.00	-24.18	31.53	7.72	53.05	100		Peak





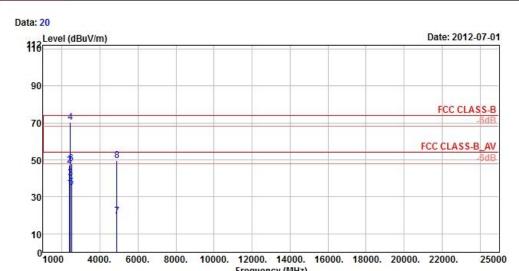

Frequency (MHz)

Site : 966 Chamber 5


Condition : FCC CLASS-B 3m ANT 18G~40G HF VERTICAL

Brand/Model: Click Plus Remark : BT TX CH39 Tested by : Kay Wu Temprature : 25℃ Humidity : 65% Plane : Y Date : DH5

	Freq	Level	Read Level	Limit Line		Antenna Factor		Preamp Factor	A/Pos	T/Pos	Remark
U.	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m	dB	dB	Cm	deg	
1	2390.00	34.76	40.15	54.00	-19.24	27.26	4.87	37.52	100	91	Average
2	2390.00	47.05	52.44	74.00	-26.95	27.26	4.87	37.52	100	91	Peak
3 av	2441.00	40.04	45.12			27.40	4.91	37.39	100	91	Average
4 pp	2441.00	70.14	75.22			27.40	4.91	37.39	100	91	Peak
5	2485.50	35.16	40.06	54.00	-18.84	27.50	4.92	37.32	100	91	Average
6	2485.50	47.78	52.68	74.00	-26.22	27.50	4.92	37.32	100	91	Peak
7	4882.00	19.47	33.27	54.00	-34.53	31.53	7.72	53.05	100	241	Average
8	4882.00	49.57	63.37	74.00	-24.43	31.53	7.72	53.05	100		Peak





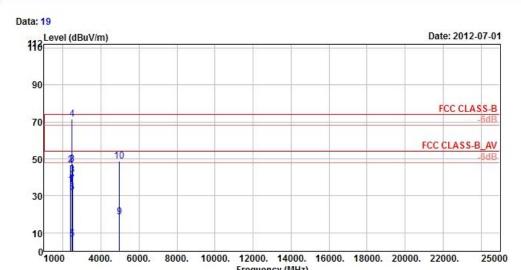

Frequency (MHz)

Site : 966 Chamber 5


Condition : FCC CLASS-B 3m ANT 18G~40G HF HORIZONTAL

Brand/Model: Click Plus Remark : BT TX CH78 Tested by : Kay Wu Temprature : 25℃ Humidity : 65% Plane : Y Date : DH5

		0.00000	Read	Limit		Antenna		Preamp	A/Pos	T/Pos	
	Freq	Level	Level	Line	Limit	Factor	Loss	Factor			Remark
10.	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m	dB	dB	cm	deg	ila.
1	2390.00	35.78	41.17	54.00	-18.22	27.26	4.87	37.52	103	47	Average
2	2390.00	46.59	51.98	74.00	-27.41	27.26	4.87	37.52	103	47	Peak
3 av	2480.00	41.48	46.38			27.50	4.92	37.32	103	47	Average
4 pp	2480.00	71.58	76.48			27.50	4.92	37.32	103	47	Peak
5	2483.50	6.61	11.51	54.00	-47.39	27.50	4.92	37.32	103	47	Average
6	2483.50	31.71	36.61	74.00	-42.29	27.50	4.92	37.32	103	47	Peak
7	2485.50	36.16	41.06	54.00	-17.84	27.50	4.92	37.32	103	47	Average
8	2485.50	46.94	51.84	74.00	-27.06	27.50	4.92	37.32	103	47	Peak
9	4960.00	18.74	32.34	54.00	-35.26	31.72	7.72	53.04	150	169	Average
10	4960.00	48.84	62.44	74.00	-25.16	31.72	7.72	53.04	150	169	Peak





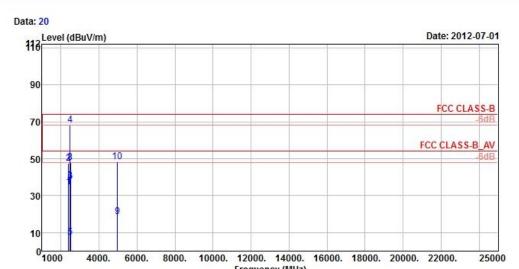

Frequency (MHz)

Site : 966 Chamber 5

Condition : FCC CLASS-B 3m ANT_18G~40G_HF VERTICAL

Brand/Model: Click Plus Remark : BT TX CH78 Tested by : Kay Wu Temprature : 25°C Humidity : 65% Plane : Y Date : DH5


			Read	Limit	Over	Antenna	Cable	Preamp	A/Pos	T/Pos	
	Freq	Level	Level	Line	Limit	Factor	Loss	Factor			Remark
· -	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m	dB	dB	cm	deg	il.
1	2390.00	34.52	39.91	54.00	-19.48	27.26	4.87	37.52	115	90	Average
2	2390.00	47.33	52.72	74.00	-26.67	27.26	4.87	37.52	115	90	Peak
3 av	2480.00	38.15	43.05			27.50	4.92	37.32	115	90	Average
4 pp	2480.00	68.25	73.15			27.50	4.92	37.32	115	90	Peak
5	2483.50	7.36	12.26	54.00	-46.64	27.50	4.92	37.32	115	90	Average
6	2483.50	37.46	42.36	74.00	-36.54	27.50	4.92	37.32	115	90	Peak
7	2485.50	34.96	39.86	54.00	-19.04	27.50	4.92	37.32	115	90	Average
8	2485.50	48.09	52.99	74.00	-25.91	27.50	4.92	37.32	115	90	Peak
9	4960.00	18.45	32.05	54.00	-35.55	31.72	7.72	53.04	120	134	Average
10	4960.00	48.55	62.15	74.00	-25.45	31.72	7.72	53.04	120	134	Peak



BELOW 1GHz DATA



Bureau Veritas Consumer Products Services Ltd., Taoyuan Branch

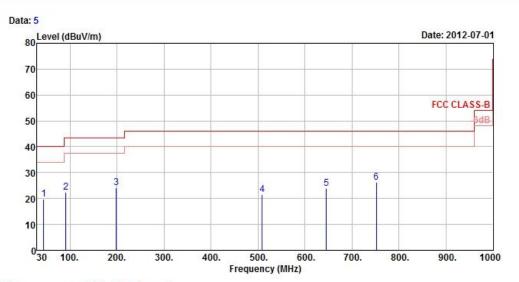

Site : 966 Chamber 5

Condition : FCC CLASS-B 3m ANT_30M~1G_LF HORIZONTAL


Brand/Model: Click Plus Remark : BT TX Tested by : Kay Wu Temprature : 25°C Humidity : 65%

Plane

		Freq	Level				Antenna Factor		Preamp	17.57	T/Pos	Remark
	-	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m	dB	dB	cm	deg	
1		44.04	19.70	36.51	40.00	-20.30	13.59	0.71	31.11	100	220	Peak
2		91.02	22.41	44.96	43.50	-21.09	8.38	1.03	31.96	100	135	Peak
3	рр	198.21	24.10	44.77	43.50	-19.40	9.50	1.58	31.75	100	284	Peak
4		509.30	21.55	32.80	46.00	-24.45	17.53	2.81	31.59	100	145	Peak
5		645.10	23.78	32.46	46.00	-22.22	20.15	3.23	32.06	100	251	Peak
6		752.20	26.41	32.61	46.00	-19.59	21.56	3.58	31.34	100	63	Peak





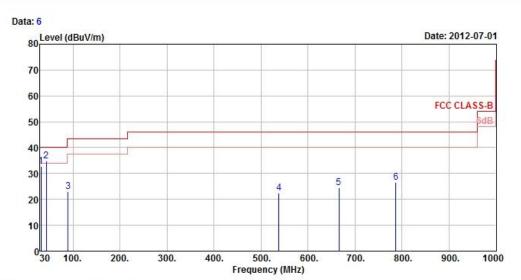

Site : 966 Chamber 5

Condition : FCC CLASS-B 3m ANT_30M~1G_LF VERTICAL

Brand/Model: Click Plus Remark : BT TX Tested by : Kay Wu Temprature : 25°℃

Humidity : 65% Plane :

	Freq	Level				Antenna Factor			A/Pos	T/Pos	Remark
-	MHz	dBuV/m	dBuV	dBuV/m	dB	dB/m	dB	dB	cm	deg	35
1	31.62	32.75	50.98	40.00	-7.25	12.30	0.58	31.11	100	247	Peak
2 pp	43.23	34.97	51.78	40.00	-5.03	13.59	0.71	31.11	100	184	Peak
3	89.40	22.88	45.49	43.50	-20.62	8.28	1.02	31.91	100	337	Peak
4	538.00	22.42	33.04	46.00	-23.58	18.19	2.91	31.72	100	174	Peak
5	666.10	24.45	32.60	46.00	-21.55	20.41	3.30	31.86	100	196	Peak
6	786.50	26.45	32.16	46.00	-19.55	22.04	3.66	31.41	100	157	Peak



4.2 CONDUCTED EMISSION MEASUREMENT

4.2.1 LIMITS OF CONDUCTED EMISSION MEASUREMENT

FREQUENCY OF EMISSION (MHz)	CONDUCTED LIMIT (dBµV)		
	Quasi-peak	Average	
0.15 ~ 0.5	66 to 56	56 to 46	
0.5 ~ 5	56	46	
5 ~ 30	60	50	

NOTE: 1. The lower limit shall apply at the transition frequencies.

- 2. The limit decreases in line with the logarithm of the frequency in the range of 0.15 to 0.50 MHz.
- 3. All emanations from a class A/B digital device or system, including any network of conductors and apparatus connected thereto, shall not exceed the level of field strengths specified above.

4.2.2 TEST INSTRUMENTS

DESCRIPTION & MANUFACTURER	MODEL NO.	SERIAL NO.	DATE OF CALIBRATION	DUE DATE OF CALIBRATION
Test Receiver ROHDE & SCHWARZ	ESCS30	100291	Nov. 23, 2011	Nov. 22, 2012
RF signal cable Woken	5D-FB	Cable-HYC01-01	Dec. 22, 2011	Dec. 21, 2012
LISN ROHDE & SCHWARZ (Peripheral)	ESH3-Z5	100312	Jul. 02, 2012	Jul. 01, 2013
LISN ROHDE & SCHWARZ (EUT)	ESH3-Z5	835239/001	Feb. 07, 2012	Feb. 06, 2013
Software ADT	BV ADT_Cond_ V7.3.7.3	NA	NA	NA

NOTE: 1. The calibration interval of the above test instruments is 12 months and the calibrations are traceable to NML/ROC and NIST/USA.

- 2. The test was performed in HwaYa Shielded Room 1.
- 3. The VCCI Site Registration No. is C-2040.



4.2.3 TEST PROCEDURES

- a. The EUT was placed 0.4 meters from the conducting wall of the shielded room with EUT being connected to the power mains through a line impedance stabilization network (LISN). Other support units were connected to the power mains through another LISN. The two LISNs provide 50 ohm/ 50uH of coupling impedance for the measuring instrument.
- b. Both lines of the power mains connected to the EUT were checked for maximum conducted interference.
- c. The frequency range from 150kHz to 30MHz was searched. Emission levels under (Limit 20dB) was not recorded.


NOTE: All modes of operation were investigated and the worst-case emissions are reported.

4.2.4 DEVIATION FROM TEST STANDARD

No deviation.



4.2.5 TEST SETUP

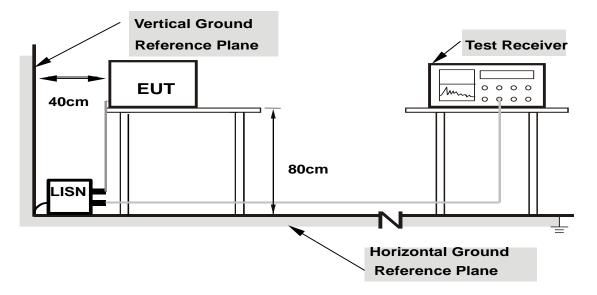

Note: 1.Support units were connected to second LISN.

2.Both of LISNs (AMN) are 80 cm from EUT and at least 80 from other units and other metal planes

For the actual test configuration, please refer to the attached file (Test Setup Photo).

4.2.6 EUT OPERATING CONDITIONS

Same as 4.1.6.



4.2.7 TEST RESULTS


CONDUCTED WORST CASE DATA: GFSK

PHASE	Line 1	6dB BANDWIDTH	9kHz
FIIAGE	LINE	OUD BANDWIDTH	JKI IZ

	Freq.	Corr.	Reading Value Emission Level		Limit		Margin			
No		Factor	[dB	(uV)]	[dB ((uV)]	[dB	(uV)]	(d	B)
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15781	0.15	53.33	37.85	53.48	38.00	65.58	55.58	-12.10	-17.58
2	0.20859	0.23	47.61	32.43	47.84	32.66	63.26	53.26	-15.42	-20.60
3	0.25938	0.21	44.16	30.07	44.37	30.28	61.45	51.45	-17.08	-21.17
4	1.91797	0.24	34.81	22.34	35.05	22.58	56.00	46.00	-20.95	-23.42
5	3.05469	0.29	20.85	6.72	21.14	7.01	56.00	46.00	-34.86	-38.99
6	4.83203	0.37	19.70	7.61	20.07	7.98	56.00	46.00	-35.93	-38.02

REMARKS:

- 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
- 2. The emission levels of other frequencies were very low against the limit.
- 3. Margin value = Emission level Limit value
- 4. Correction factor = Insertion loss + Cable loss
- 5. Emission Level = Correction Factor + Reading Value.

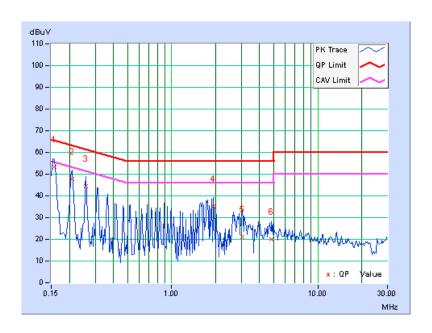




DUACE	Line 2		9kHz
PHASE	Line 2	6dB BANDWIDTH	9KHZ

	Freq.	Corr.	Reading Value E		Emission Level		Limit		Margin	
No		Factor	[dB	(uV)]	[dB	(uV)]	[dB ((uV)]	(d	B)
	[MHz]	(dB)	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.	Q.P.	AV.
1	0.15391	0.24	56.12	40.27	56.36	40.51	65.79	55.79	-9.43	-15.28
2	0.20859	0.31	49.34	33.59	49.65	33.90	63.26	53.26	-13.61	-19.36
3	0.25938	0.29	43.98	29.41	44.27	29.70	61.45	51.45	-17.18	-21.75
4	1.80859	0.33	27.86	15.68	28.19	16.01	56.00	46.00	-27.81	-29.99
5	2.99609	0.39	15.94	-1.54	16.33	-1.15	56.00	46.00	-39.67	-47.15
6	7.97656	0.58	15.03	0.99	15.61	1.57	60.00	50.00	-44.39	-48.43

REMARKS:

- 1. Q.P. and AV. are abbreviations of quasi-peak and average individually.
- 2. The emission levels of other frequencies were very low against the limit.
- 3. Margin value = Emission level Limit value
- 4. Correction factor = Insertion loss + Cable loss
- 5. Emission Level = Correction Factor + Reading Value.

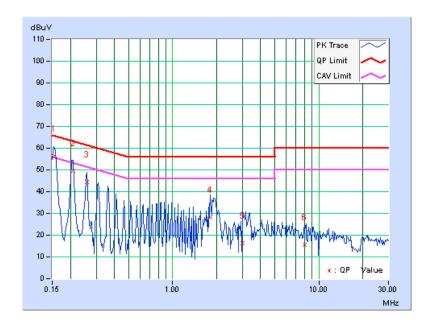




4.3 NUMBER OF HOPPING FREQUENCY USED

4.3.1 LIMIT OF HOPPING FREQUENCY USED

At least 15 channels frequencies, and should be equally spaced.

4.3.2 TEST SETUP



4.3.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

4.3.4 TEST PROCEDURES

- a. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- c. Set the SA on MaxHold Mode, and then keep the EUT in hopping mode. Record all the signals from each channel until each one has been recorded.
- d. Set the SA on View mode and then plot the result on SA screen.
- e. Repeat above procedures until all frequencies measured were complete.

4.3.5 DEVIATION FROM TEST STANDARD


No deviation.


4.3.6 TEST RESULTS

There are 79 hopping frequencies in the hopping mode. Please refer to next two pages for the test result. On the plots, it shows that the hopping frequencies are equally spaced.



GFSK

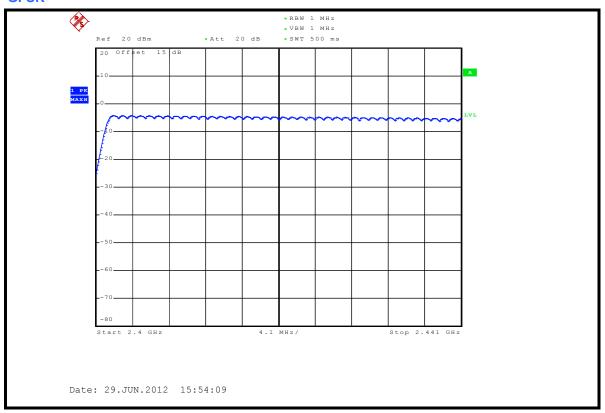

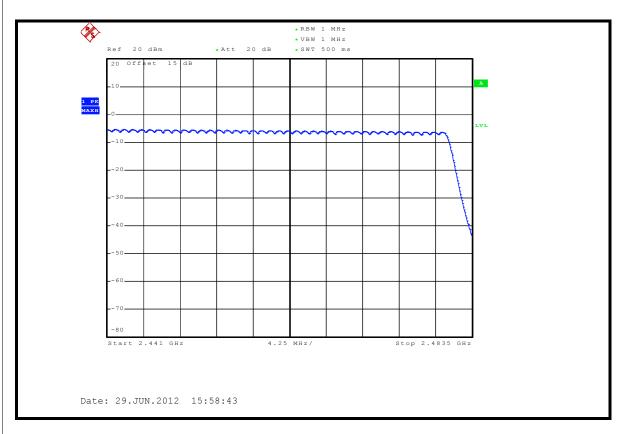




4.4 DWELL TIME ON EACH CHANNEL

4.4.1 LIMIT OF DWELL TIME USED

The average time of occupancy on any channel shall not be greater than 0.4 seconds within a period of 0.4 seconds multiplied by the number of hopping channels employed.

4.4.2 TEST SETUP



4.4.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

4.4.4 TEST PROCEDURES

- a. Check the calibration of the measuring instrument (SA) using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect its antenna terminal to measurement via a low loss cable. Then set it to any one measured frequency within its operating range and make sure the instrument is operated in its linear range.
- c. Adjust the center frequency of SA on any frequency be measured and set SA to zero span mode. And then, set RBW and VBW of spectrum analyzer to proper value.
- d. Measure the time duration of one transmission on the measured frequency. And then plot the result with time difference of this time duration.
- e. Repeat above procedures until all different time-slot modes have been completed.

4.4.5 DEVIATION FROM TEST STANDARD

No deviation.




4.4.6 TEST RESULTS

GFSK

Mode	Average Hopping Channel	Package Transfer Time (usec)	Result (sec)	Limit (sec)
DH1	8.20	396.00	0.10	0.4
DH3	4.90	1692.00	0.26	0.4
DH5	2.90	2942.00	0.27	0.4

- Dwell Time=79(channels) x 0.4(s) x average hopping channel x package transfer time
 79 channels come from the Hopping Channel number
- 3. Average Hopping Channel = hops/sweep time
- 4. t: Package Transfer Time(us)
- 5. Test plots of the transmitting time slot are shown on next page.



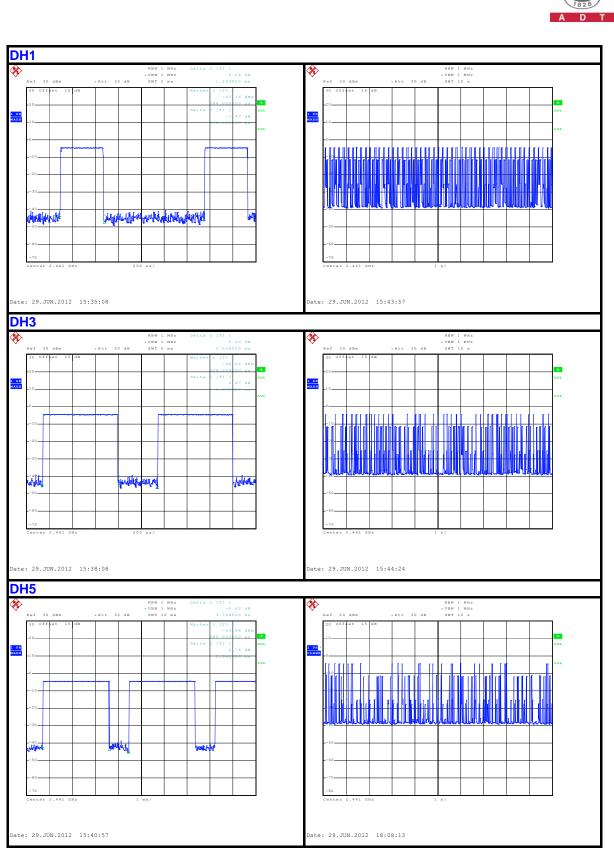




π/4-DQPSK

Mode	Average Hopping Channel	Package Transfer Time (usec)	Result (sec)	Limit (sec)
DH1	8.80	408.00	0.11	0.4
DH3	4.60	1672.00	0.24	0.4
DH5	3.00	2962.00	0.28	0.4

- Dwell Time=79(channels) x 0.4(s) x average hopping channel x package transfer time
 79 channels come from the Hopping Channel number
 Average Hopping Channel = hops/sweep time
 t: Package Transfer Time(us)

- 5. Test plots of the transmitting time slot are shown on next page.



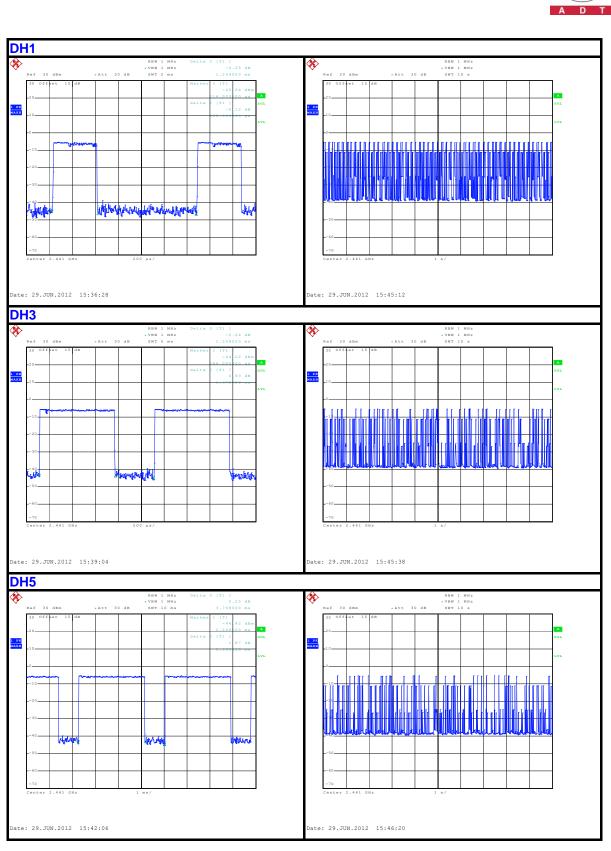




8DPSK

Mode	Average Hopping Channel	Package Transfer Time (usec)	Result (sec)	Limit (sec)
DH1	9.30	392.00	0.12	0.4
DH3	5.00	1662.00	0.26	0.4
DH5	2.90	2942.00	0.27	0.4

- Dwell Time=79(channels) x 0.4(s) x average hopping channel x package transfer time
 79 channels come from the Hopping Channel number
 Average Hopping Channel = hops/sweep time

- 4. t: Package Transfer Time(us)
- 5. Test plots of the transmitting time slot are shown on next page.



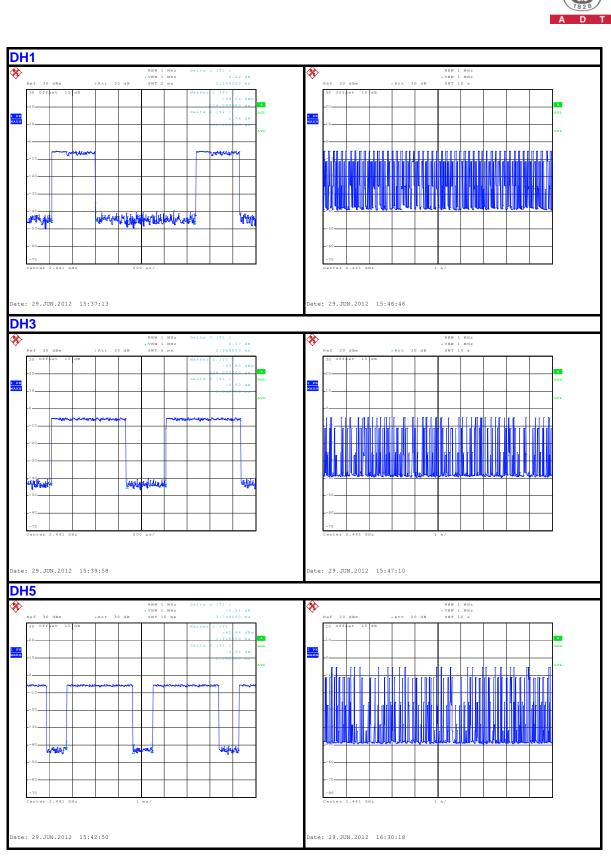




4.5 CHANNEL BANDWIDTH

4.5.1 LIMITS OF CHANNEL BANDWIDTH

For frequency hopping system operating in the 2400-2483.5MHz, If the 20dB bandwidth of hopping channel is greater than 25kHz, two-thirds 20dBbandwidth of hopping channel shell be a minimum limit for the hopping channel separation.

4.5.2 TEST SETUP



4.5.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

4.5.4 TEST PROCEDURE

- a. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c. Measure the frequency difference of two frequencies that were attenuated 20dB from the reference level. Record the frequency difference as the emission bandwidth.
- d. Repeat above procedures until all frequencies measured were complete.

4.5.5 DEVIATION FROM TEST STANDARD

No deviation.

4.5.6 EUT OPERATING CONDITION

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.




4.5.7 TEST RESULTS

GFSK

CHANNEL	CHANNEL FREQUENCY (MHz) 20dB BANDWIDTH (MHz	
0	2402	0.968
39	2441	0.972
78	2480	0.968

CH 39

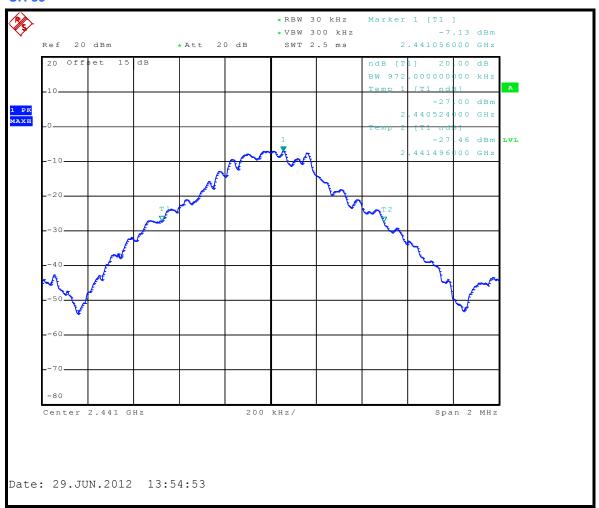




π/4-DQPSK

CHANNEL	CHANNEL FREQUENCY (MHz) 20dB BANDWIDTH (MHz	
0	2402	1.280
39	2441	1.288
78	2480	1.280

CH 39

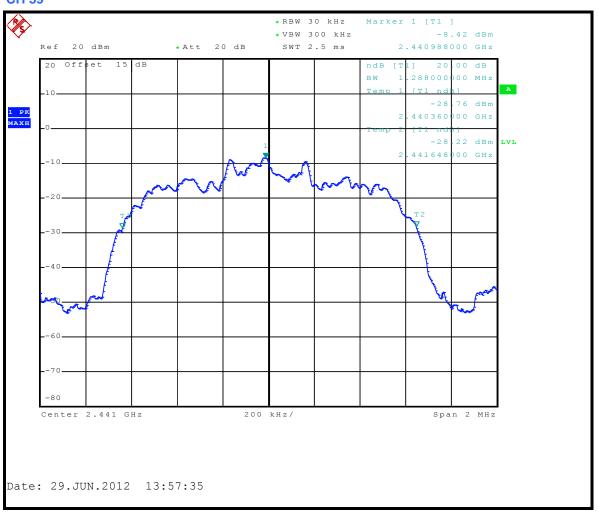




8DPSK

CHANNEL	CHANNEL FREQUENCY (MHz) 20dB BANDWIDTH (MH	
0	2402	1.296
39	2441	1.292
78	2480	1.292

CH 0

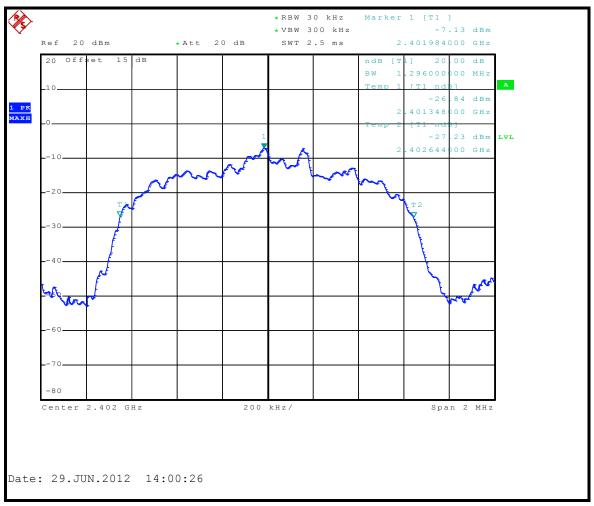




4.6 HOPPING CHANNEL SEPARATION

4.6.1 LIMIT OF HOPPING CHANNEL SEPARATION

At least 25kHz or two-third of 20dB hopping channel bandwidth (whichever is greater).

4.6.2 TEST SETUP



4.6.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

4.6.4 TEST PROCEDURES

- 1. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- 2. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range.
- 3. By using the MaxHold function record the separation of two adjacent channels.
- 4. Measure the frequency difference of these two adjacent channels by SA MARK function. And then plot the result on SA screen.
- 5. Repeat above procedures until all frequencies measured were complete.

4.6.5 DEVIATION FROM TEST STANDARD

No deviation.



Report Format Version 5.0.0

4.6.6 TEST RESULTS

GFSK

CHANNEL	FREQUENCY (MHz)	ADJACENT CHANNEL SEPARATION (MHz)	20dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
0	2402	1.002	0.968	0.645	PASS
39	2441	1.002	0.972	0.648	PASS
78	2480	1.002	0.968	0.645	PASS

π/4-DQPSK


CHANNEL	FREQUENCY (MHz)	ADJACENT CHANNEL SEPARATION (MHz)	20dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
0	2402	1.002	1.280	0.853	PASS
39	2441	1.002	1.288	0.859	PASS
78	2480	1.002	1.280	0.853	PASS

8DPSK

CHANNEL	FREQUENCY (MHz)	ADJACENT CHANNEL SEPARATION (MHz)	20dB BANDWIDTH (MHz)	MINIMUM LIMIT (MHz)	PASS / FAIL
0	2402	1.002	1.296	0.864	PASS
39	2441	1.002	1.292	0.861	PASS
78	2480	1.002	1.292	0.861	PASS

NOTE: The minimum limit is two-third 20dB bandwidth.



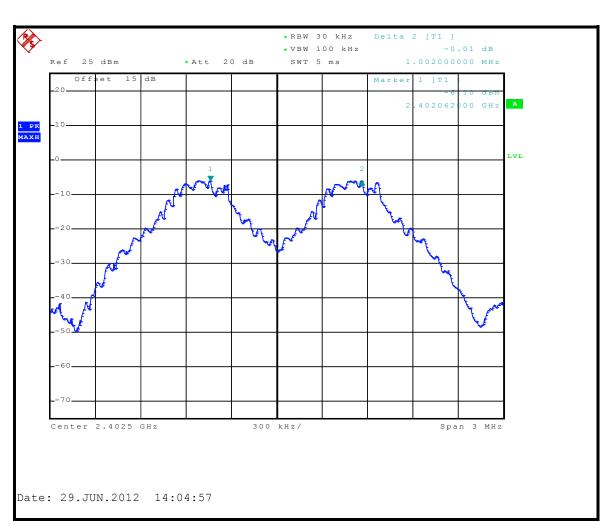




4.7 MAXIMUM OUTPUT POWER

4.7.1 LIMITS OF MAXIMUM OUTPUT POWER MEASUREMENT

The Maximum Output Power Measurement is 125mW.

4.7.2 TEST SETUP



4.7.3 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

4.7.4 TEST PROCEDURES

- a. Check the calibration of the measuring instrument using either an internal calibrator or a known signal from an external generator.
- b. Turn on the EUT and connect it to measurement instrument. Then set it to any one convenient frequency within its operating range. Set a reference level on the measuring instrument equal to the highest peak value.
- c. The center frequency of the spectrum analyzer is set to the fundamental frequency and using 3MHz RBW and 10 MHz VBW.
- d. Measure the captured power within the band and recording the plot.
- e. Repeat above procedures until all frequencies required were complete.

4.7.5 DEVIATION FROM TEST STANDARD

No deviation.

4.7.6 EUT OPERATING CONDITION

The software provided by client enabled the EUT to transmit and receive data at lowest, middle and highest channel frequencies individually.



4.7.7 TEST RESULTS

GFSK

CHANNEL	CHANNEL FREQUENCY (MHz)	OUTPUT POWER (W)	OUTPUT POWER (dBm)	POWER LIMIT (mW)	PASS/FAIL
0	2402	0.0005	-3.21	125	PASS
39	2441	0.0004	-4.31	125	PASS
78	2480	0.0003	-5.27	125	PASS

$\pi/4$ -DQPSK

CHANNEL	CHANNEL FREQUENCY (MHz)	OUTPUT POWER (W)	OUTPUT POWER (dBm)	POWER LIMIT (mW)	PASS/FAIL
0	2402	0.0004	-3.54	125	PASS
39	2441	0.0003	-4.62	125	PASS
78	2480	0.0003	-5.55	125	PASS

8DPSK

CHANNEL	CHANNEL FREQUENCY (MHz)	OUTPUT POWER (W)	OUTPUT POWER (dBm)	POWER LIMIT (mW)	PASS/FAIL
0	2402	0.0005	-3.30	125	PASS
39	2441	0.0004	-4.34	125	PASS
78	2480	0.0003	-5.29	125	PASS



GFSK CH 0



Report No.: RF120628C18-2



4.8 CONDUCTED OUT OF BAND EMISSION MEASUREMENT

4.8.1 LIMITS OF CONDUCTED OUT OF BAND EMISSION MEASUREMENT

Below –20dB of the highest emission level of operating band (in 100KHz RBW).

4.8.2 TEST INSTRUMENTS

Refer to section 4.1.2 to get information of above instrument.

4.8.3 TEST PROCEDURE

- 1. Set RBW = 100 kHz.
- 2. Set VBW =300 kHz.
- 3. Set span to encompass the spectrum to be examined
- 4. Detector = peak.
- 5. Trace Mode = max hold.
- 6. Sweep = auto couple.

4.8.4 DEVIATION FROM TEST STANDARD

No deviation.

4.8.5 EUT OPERATING CONDITION

The software provided by client enabled the EUT to transmit continuously.


4.8.6 TEST RESULTS

The spectrum plots are attached on the following images. D1 line indicates the highest level, D2 line indicates the 20dB offset below D1. It shows compliance with the requirement.

48 of 54




GFSK

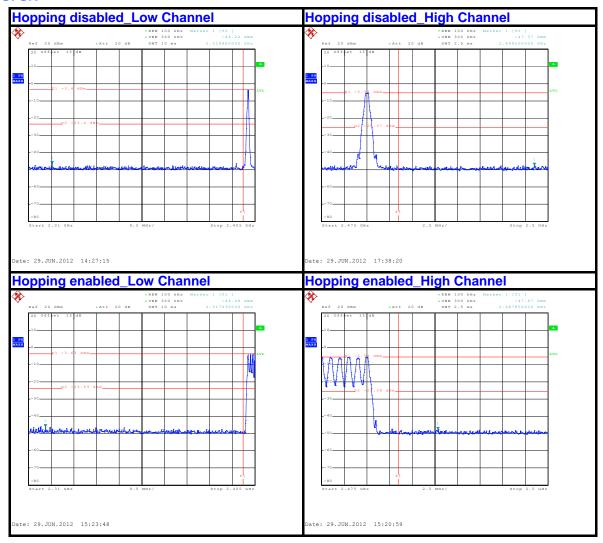




$\pi/4$ -DQPSK

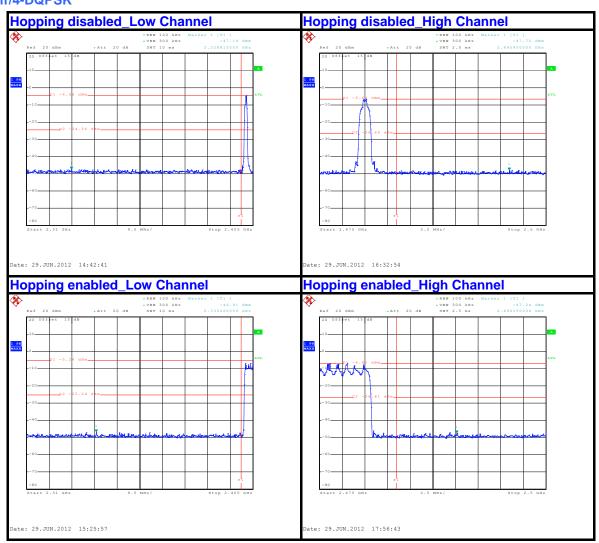



8DPSK

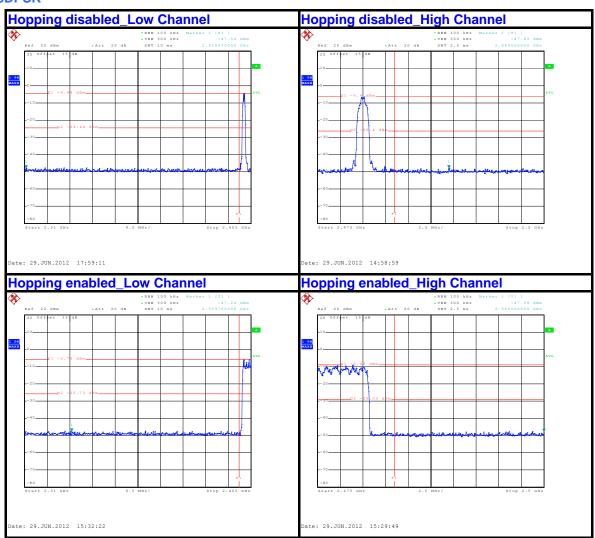



5. PHOTOGRAPHS OF THE TEST CONFIGURATION
Please refer to the attached file (Test Setup Photo).



6. INFORMATION ON THE TESTING LABORATORIES

We, Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch, were founded in 1988 to provide our best service in EMC, Radio, Telecom and Safety consultation. Our laboratories are accredited and approved according to ISO/IEC 17025.

If you have any comments, please feel free to contact us at the following:

Linko EMC/RF Lab:Hsin Chu EMC/RF Lab:Tel: 886-2-26052180Tel: 886-3-5935343Fax: 886-2-26051924Fax: 886-3-5935342

Hwa Ya EMC/RF/Safety Telecom Lab:

Tel: 886-3-3183232 Fax: 886-3-3185050

Email: service.adt@tw.bureauveritas.com

Web Site: www.adt.com.tw

The address and road map of all our labs can be found in our web site also.



7. APPENDIX A - MODIFICATIONS RECORDERS FOR ENGINEERING CHANGES TO THE EUT BY THE LAB

No modifications were made to the EUT by the lab during the test.

--- END ---