FCC 47 CFR PART 15 SUBPART C TEST REPORT

For

Applicant: CT Asia

Unit 01, 15/F, Seaview Centre,139-141 Hoi bun road,

Kwun Tong, Kowloon, Hong Kong

Product Name: GSM Mobile Phone

Model Name: DECO

Brand Name: BLU

FCC ID: YHLBLUDECO

Report No.: STS120215F2

Date of Issue: February. 27, 2012

Issued by: MOST Technology Service Co., Ltd.

Address: No.5, 2nd Langshan Road, North District, Hi-tech Industrial Park,

Nanshan, Shenzhen, Guangdong, China

Tel: 86-755-2795 8522

Fax: 86-755-2795 8022

The report consists 41 pages in total. It may be duplicated completely for legal use with the approval of the applicant. It should not be reproduced except in full, without the written approval of our laboratory. The client should not use it to claim product endorsement by MOST. The test results in the report only apply to the tested sample. The test report shall be invalid without all the signatures of testing engineers, reviewer and approver.

TABLE OF CONTENTS

1. VERIFICATION OF CONFORMITY	3
2. GENERAL INFORMATION	4
2.1 Product Information	4
2.2 OBJECTIVE	5
2.3 TEST STANDARDS AND RESULTS	5
2.4 ENVIRONMENTAL CONDITIONS	5
3. TEST FACILITY	6
3.1TEST FACILITY	6
3.2 GENERAL TEST PROCEDURES	6
3.3 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS	7
4. SETUP OF EQUIPMENT UNDER TEST	8
4.1 SUPPORT EQUIPMENT	8
4.2 TEST EQUIPMENT LIST	9
5. 47 CFR Part 15C 15.249 Requirements	10
5.1 SPURIOUS EMISSION TEST	10
5.2 BAND EDGE	20
5.3 LINE CONDUCTED EMISSION TEST	23
APPENDIX 1	27
PHOTOGRAPHS OF TEST SETUP	27
APPENDIX 2	31
PHOTOGRAPHS OF EUT	31

1. VERIFICATION OF CONFORMITY

Equipment Under Test: GSM Mobile Phone

Brand Name: BLU

Model Number: DECO

Series Model Name: N/A

Series Model Difference

description:

N/A

FCC ID: YHLBLUDECO

Applicant: CT Asia

Unit 01, 15/F, Seaview Centre, 139-141 Hoi bun road, Kwun Tong,

Kowloon, Hong Kong

Manufacturer: Zechin communication Co.,Ltd

Unit 804,8th Floor Desay Tech Building Gaoxin Road South, Nanshan District

Shenzhen, China

Technical Standards: 47 CFR Part 15 Subpart C

File Number: STS120215F2

Date of test: February. 22 ~ February. 27, 2012

Deviation: None

Condition of Test Sample: Normal

Test Result: PASS

The above equipment was tested by MOST for compliance with the requirements set forth in FCC rules and the Technical Standards mentioned above. This said equipment in the configuration described in this report shows the maximum emission levels emanating from equipment and the level of the immunity endurance of the equipment are within the compliance requirements.

The test results of this report relate only to the tested sample identified in this report.

Tested by (+ signature):

Zhang Ling February. 27, 2012

Review by (+ signature):

July Wen February. 27, 2012

Approved by (+ signature):

Terry Yang February. 27, 2012

2. GENERAL INFORMATION

2.1 Product Information

Product	GSM Mobile Phone
Trade Name	BLU
Model Number	DECO
Series Number:	N/A
Description of Differences:	N/A
Power Supply	DC 5V by AC/DC adapter 100-240V~50/60Hz DC 3.7V by battery
Frequency Range	2402MHz -2480MHz
Modulation Type	FHSS
Antenna Type:	Internal Fixed
Channel Spacing:	1MHz
Channel Number	79(CH Low: 2402MHz, CH Mid: 2441MHz, CH High: 2480MHz)
Temperature Range	-20°C ~ 50°C

NOTE:

1. Please refer to Appendix I for the photographs of the EUT. For a more detailed features description about the EUT, please refer to User's Manual.

2.2 OBJECTIVE

The objective of the report is to perform tests according to 47 CFR Part 15 Subpart C for the EUT FCC ID Certification:

No.	Identity	Document Title
1	47 CFR Part 15 (10-1-05 Edition)	Radio Frequency Devices

2.3 TEST STANDARDS AND RESULTS

Test items and the results are as bellow:

No.	Section	Description	Result	Date of Test
1	15.249(a)	Spurious Emission	PASS	February. 25, 2012
2	15.249(a)	Band Edge	PASS	February. 22, 2012
3	15.207	Power Line Conducted Emission Test	PASS	February. 24, 2012

Note: 1. The test result judgment is decided by the limit of measurement standard

2. The information of measurement uncertainty is available upon the customer's request.

2.4 ENVIRONMENTAL CONDITIONS

During the measurement the environmental conditions were within the listed ranges:

- Temperature: 15-35°C - Humidity: 30-60 %

- Atmospheric pressure: 86-106 kPa

3. TEST FACILITY 3.1TEST FACILITY

Test Site: Most Technology Service Co., Itd

Location: No.5, Langshan 2nd Rd., North Hi-Tech Industrial park, Nanshan, Shenzhen,

Guangdong, China

Description: There is one 3m semi-anechoic an area test sites and two line conducted labs for final

test. The Open Area Test Sites and the Line Conducted labs are constructed and calibrated to meet the FCC requirements in documents ANSI C63.4:2009 and CISPR

16 requirements.

The FCC Registration Number is 490827.

The IC Registration Number is 46405-7103.

The CNAS Registration Number is CNAS L3573.

Site Filing: The site description is on file with the Federal Communications

Commission, 7435 Oakland Mills Road, Columbia, MD 21046.

Instrument Tolerance: All measuring equipment is in accord with ANSI C63.4:2009 and CISPR 16

requirements that meet industry regulatory agency and accreditation agency

requirement.

Ground Plane: Two conductive reference ground planes were used during the Line Conducted

Emission, one in vertical and the other in horizontal. The dimensions of these ground planes are as below. The vertical ground plane was placed distancing 40 cm to the rear of the wooden test table on where the EUT and the support equipment were placed during test. The horizontal ground plane projected 50 cm beyond the footprint of the EUT system and distanced 80 cm to the wooden test table. For Radiated Emission Test, one horizontal conductive ground plane extended at least 1m beyond the periphery of the EUT and the largest measuring antenna, and covered the entire

area between the EUT and the antenna.

3.2 GENERAL TEST PROCEDURES

EUT Function and Test Mode

The EUT has been tested under normal operating (TX) and standby (RX) condition.

The field strength of radiation emission was measured in the following position: EUT stand-up position (Y axis), lie-down position (X, Z axis).

The following data show only with the worst case setup.

The worst case of Y axis was reported.

Based on client request, all normal using modes of the normal function were tested but only the worst test data of the worst mode is reported by this report.

Conducted Emissions

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 13.1.4.1 of ANSI C63.4:2009, Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using CISPR Quasi-peak and average detector modes.

Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 13.1.4.1 of ANSI C63.4:2009.

3.3 FCC PART 15.205 RESTRICTED BANDS OF OPERATIONS

(a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	MHz	MHz	GHz	
0.090 - 0.110 10.495 - 0.505 2.1735 - 2.1905 4.125 - 4.128 4.17725 - 4.17775 4.20725 - 4.20775 6.215 - 6.218 6.26775 - 6.26825 6.31175 - 6.31225 8.291 - 8.294 8.362 - 8.366 8.37625 - 8.38675 8.41425 - 8.41475 12.29 - 12.293	16.42 - 16.423 16.69475 - 16.69525 16.80425 - 16.80475 25.5 - 25.67 37.5 - 38.25 73 - 74.6 74.8 - 75.2 108 - 121.94 123 - 138 149.9 - 150.05 156.52475 - 156.52525 156.7 - 156.9 162.0125 - 167.17 167.72 - 173.2	399.9 - 410 608 - 614 960 - 1240 1300 - 1427 1435 - 1626.5 1645.5 - 1646.5 1660 - 1710 1718.8 - 1722.2 2200 - 2300 2310 - 2390 2483.5 - 2500 2655 - 2900 3260 - 3267 3332 - 3339	4.5 - 5.15 5.35 - 5.46 7.25 - 7.75 8.025 - 8.5 9.0 - 9.2 9.3 - 9.5 10.6 - 12.7 13.25 - 13.4 14.47 - 14.5 15.35 - 16.2 17.7 - 21.4 22.01 - 23.12 23.6 - 24.0 31.2 - 31.8	
12.53 - 12.533 12.51975 - 12.52025 12.57675 - 12.57725 13.36 - 13.41	240 - 285 322 - 335.4	3345.8 - 3358 3600 - 4400	36.43 - 36.5 (²)	

¹ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

(b) Except as provided in paragraphs (d) and (e), the field strength of emissions appearing within these frequency bands shall not exceed the limits shown in Section 15.209. At frequencies equal to or less than 1000 MHz, compliance with the limits in Section 15.209 shall be demonstrated using measurement instrumentation employing a CISPR quasi-peak detector. Above 1000 MHz, compliance with the emission limits in Section 15.209 shall be demonstrated based on the average value of the measured emissions. The provisions in Section 15.35 apply to these measurements.

² Above 38.6

4. SETUP OF EQUIPMENT UNDER TEST

4.1 SUPPORT EQUIPMENT

Device Type	Brand	Model	Series No.	Data Cable	Power Cord	
N/A	N/A	N/A	N/A	N/A	N/A	

Remark:

All the equipment/cables were placed in the worst-case configuration to maximize the emission during the test. Grounding was established in accordance with the manufacturer's requirements and conditions for the intended use.

FCC ID: YHLBLUDECO

4.2 TEST EQUIPMENT LIST

Instrumentation: The following list contains equipment used at Most for testing. The equipment conforms to the CISPR 16-1 / ANSI C63.2 Specifications for Electromagnetic Interference and Field Strength Instrumentation from 10 kHz to 1.0 GHz or above.

No.	Equipment	Manufacturer	Model No.	S/N	Calculator due date
1	Test Receiver	Rohde & Schwarz	ESCI	100492	2012/03/14
2	L.I.S.N.	Rohde & Schwarz	ENV216	100093	2012/03/14
3	Coaxial Switch	Anritsu Corp	MP59B	6200283933	2012/03/14
4	Terminator	Hubersuhner	50Ω	No.1	2012/03/14
5	RF Cable	SchwarzBeck	N/A	No.1	2012/03/14
6	Test Receiver	Rohde & Schwarz	ESPI	101202	2012/03/14
7	Bilog Antenna	SCHWARZBECK	BBHA9120D	D69250	2012/03/14
8	Cable	Resenberger	N/A	NO.1	2012/03/14
9	Cable	SchwarzBeck	N/A	NO.2	2012/03/14
10	Cable	SchwarzBeck	N/A	NO.3	2012/03/14
11	DC Power Filter	DuoJi	DL2 30B	N/A	2012/03/14
12	Single Phase Power Line Filter	DuoJi	FNF 202B30	N/A	2012/03/14
13	3 Phase Power Line Filter	nase Power Line Filter DuoJi FNF 402B30		N/A	2012/03/14
14	Test Receiver	Rohde & Schwarz	ESCI	100492	2012/03/14
15	Absorbing Clamp	Luthi	MDS21	3635	2012/03/14
16	Coaxial Switch	Anritsu Corp	MP59B	6200283933	2012/03/14
17	AC Power Source	Kikusui	AC40MA	LM003232	2012/03/14
18	Test Analyzer	Kikusui	KHA1000	LM003720	2012/03/14
19	Line Impendence Network	Kikusui	LIN40MA- PCR-L	LM002352	2012/03/14
20	ESD Tester	ESD Tester Kikusui KES4021		LM003537	2012/03/14
21	EMCPRO System	EMCPRO System EM Test UCS-500-M4		V0648102026	2012/03/14
22	Signal Generator	IFR	2032	203002/100	2012/03/14
23	Amplifier	A&R	150W1000	301584	2012/03/14
24	CDN	FCC	FCC-801-M2-25	47	2012/03/14
25	CDN	FCC	FCC-801-M3-25	107	2012/03/14
26	EM Injection Clamp	FCC	F-203I-23mm	403	2012/03/14
27	RF Cable	MIYAZAKI	N/A	No.1/No.2	2012/03/14
28	Universal Radio Communication Tester	ROHDE&SCHWARZ	CMU200	0304789	2012/03/14
29	Telecommunication Antenna	European Antennas	PSA 75301R/170	0304213	2012/03/14
30	Telecommunication Test Equipment	R&S	CMU200	N/A	2012/03/14
31	Loop Antenna	SCHWARZBECK	BBHA9120D	D69250	2012/03/14

NOTE: Equipments listed above have been calibrated and are in the period of validation.

5. 47 CFR Part 15C 15.249 Requirements 5.1 SPURIOUS EMISSION TEST

5.1.1 REQUIREMENT

FCC ID: YHLBLUDECO

According to FCC section 15.249(a):

Except as provided in paragraph (a) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental Frequency (MHz)	Field Strength of Fundamental (mV/m)	Field Strength of Harmonics (μV/m)
902-928	50	500
2400-2483.5	50	500
5725-5875	50	500
24000-24250	250	2500

According to FCC section 15.209 (a) , except as provided elsewhere in this subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Frequency (MHz)	Field Strength (μV/m)	Measurement Distance (m)	
1.705 - 30.0	30	30	
30 - 88	100	3	
88 - 216	150	3	
216 - 960	200	3	
Above 960	500	3	


Remark: Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 MHz, 76-88 MHz, 174-216 MHz or 470-806 MHz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

In the above emission table, the tighter limit applies at the band edges.


Frequency (MHz)	Field Strength (μV/m)	Measurement Distance (m)
30 - 88	100	3
88 - 216	150	3
216 - 960	200	3
Above 960	500	3

5.1.2 TEST DESCRIPTION


TEST SETUP:

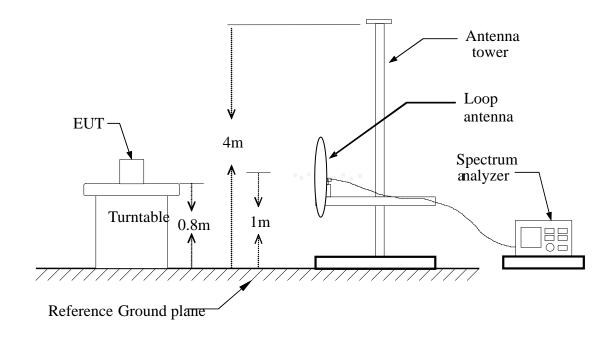

Blow 1GHz:

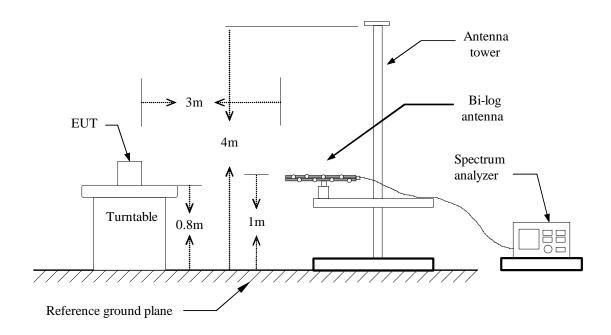

Above 1GHz:

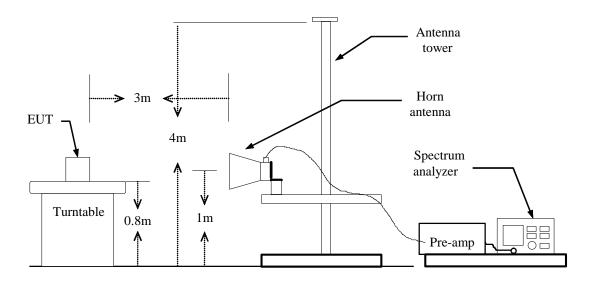

5.1.3 TEST DESCRIPTION

- 1. The EUT is placed on a turntable, which is 0.8m above ground plane.
- 2. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level.
- 3. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emissions.
- 4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.
- 5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.
- 6. Set the spectrum analyzer in the following setting as:

Below 1GHz: RBW=100 kHz / VBW=300 kHz / Sweep=AUTO

Above 1GHz:(a) PEAK: RBW=VBW=1MHz / Sweep=AUTO

(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO

7. Repeat above procedures until the measurements for all frequencies are complete.

Preliminary Radiated Emission Test						
Frequency Range Investigated		9KHz to 26 GHz				
Mode of operation	Date	Data#	Worst Mode			
Bluetooth Mode	2012-02-25	DECO (5, 6)				
Camera Mode	2012-02-25	DECO (3, 4)				
Call Mode	2012-02-25	DECO (1, 2)				
MP3 Mode	2012-02-25	DECO (9, 10)				
USB Mode	2012-02-25	DECO (7,8)				

Note: All the test modes were tested, but only the worst test data was listed on the following description.

5.1.4 TEST RESULT

Form 9 KHz to 30MHz:


Frequency (MHz)	Ant.Pol H/V	Peak Reading			al Fs	Peak Limit	AV Limit	AV Margin	
(101112)	7 ,, 0	(dBuv)	(dBuv)	(dB)	Peak (dBuv/m)	AV (dBuv/m)	(dBuv/m)	(dBuv/m)	(dB)
Н					,				>20
		T	T		T	T		T	
V									>20

-Note: No test data was detected in below 30MHz.



Address:No.5,Langshan 2nd Rd., North Hi-Tech Industrial park Guangdong ,China

Tel: 0755-86170306 Fax: 0755-86170310

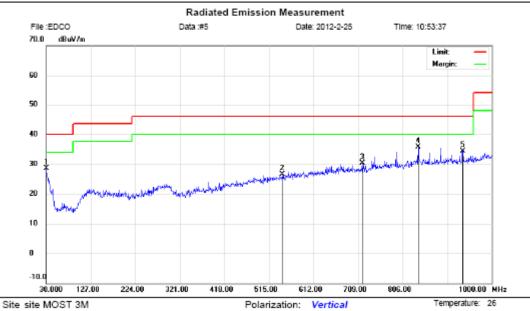

Power: AC 120V/60Hz

Limit: FCC Part15 B 3M Radiation

EUT: GSM Mobile Phone

M/N: EDCO Mode: bluetooth Note:

Distance:

Humidity:

61 %

No.	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		Antenna Height	Table Degree	
		MHz	dBuV	dΒ	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		30.0000	3.64	24.80	28.44	40.00	-11.56	peak			
2		544.1000	4.22	22.28	26.50	46.00	-19.50	peak			
3		718.7000	5.64	24.69	30.33	46.00	-15.67	peak			
4	*	839.9500	8.66	27.10	35.76	46.00	-10.24	peak			
5		936.9500	6.82	27.48	34.30	46.00	-11.70	peak			

^{*:}Maximum data x:Over limit !:over margin

Humidity:


Distance:

61 %



Address:No.5,Langshan 2nd Rd., North Hi-Tech Industrial park Guangdong ,China

Tel: 0755-86170306 Fax: 0755-86170310

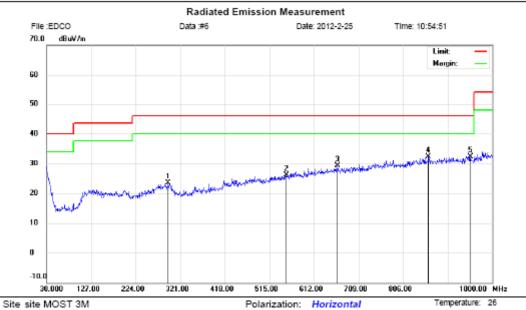

Power: AC 120V/60Hz

Limit: FCC Part15 B 3M Radiation

EUT: GSM Mobile Phone

M/N: EDCO Mode: bluetooth

Note:

No.	Mi	k.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over		Antenna Height		
			MHz	dBuV	dΒ	dBuV/m	dBuV/m	dB	Detector	cm	degree	Comment
1		294	4.8100	4.20	19.30	23.50	46.00	-22.50	peak			
2		55	1.8600	3.59	22.57	26.16	46.00	-19.84	peak			
3		663	3.4100	4.99	24.27	29.26	46.00	-16.74	peak			
4	×	86	1.2900	5.32	27.01	32.33	46.00	-13.67	peak			
5		952	2.4700	4.36	27.97	32.33	46.00	-13.67	peak			

^{*:}Maximum data x:Over limit !:over margin

Above 1 GHz

FCC ID: YHLBLUDECO

Operation Mode: CH Low Test Date: February. 25, 2012

Temperature: 20°C **Tested by:** Habby Guo

Humidity: 70 % RH **Polarity:** Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading	AV Reading	Ant. / CL CF	Actual Fs		Peak Limit	AV Limit	AV Margin
		(dBuV)	(dBuV)	(dB)	Peak	AV	(dBuV/m)	(dBuV/m)	(dB)
					(dBuV/m)	(dBuV/m)			
2402.00	Н	94.52	62.45	9.08	103.60	71.53	114.00	94.00	-22.47
1612.50	Н	58.28	32.02	6.02	64.30	38.04	74.00	54.00	-15.96
4815.00	Н	53.21	28.07	17.05	70.26	45.12	74.00	54.00	-8.88
N/A									>20
2402.00	V	96.39	66.31	9.08	105.47	75.39	114.00	94.00	-18.61
1612.50	V	57.60	28.41	6.02	63.62	34.43	74.00	54.00	-19.57
4815.00	٧	54.57	26.93	17.05	71.62	43.98	74.00	54.00	-10.02
N/A									>20

Notes:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4. Spectrum setting:
 - a. Peak Setting 1GHz 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = auto.
 - b. AV Setting 1GH z- 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = auto

Operation Mode: CH Mid Test Date: February. 25, 2012

Temperature: 20°C **Tested by:** Habby Guo

Humidity: 70 % RH **Polarity:** Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading	AV Reading	Ant. / CL CF	Actual Fs		Peak Limit	AV Limit	AV Margin
		(dBuV)	(dBuV)	(dB)	Peak	AV	(dBuV/m)	(dBuV/m)	(dB)
					(dBuV/m)	(dBuV/m)			
2441.00	Н	98.20	68.21	9.31	107.51	77.52	114.00	94.00	-16.48
1630.00	Н	59.52	33.04	6.25	65.77	39.29	74.00	54.00	-14.71
4885.00	Н	54.22	28.51	17.34	71.56	45.85	74.00	54.00	-8.15
N/A									>20
2441.00	V	96.46	65.97	9.31	105.77	75.28	114.00	94.00	-18.72
1630.00	٧	57.87	32.47	6.25	64.12	38.72	74.00	54.00	-15.28
4885.00	٧	54.09	29.76	17.34	71.43	47.10	74.00	54.00	-6.90
N/A									>20

Notes:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4. Spectrum setting:
 - a. Peak Setting 1GHz 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = auto.
 - b. AV Setting 1GH z- 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = auto.

Operation Mode: CH High Test Date: February. 25, 2012

Temperature:20°CTested by:Habby GuoHumidity:70 % RHPolarity:Ver. / Hor.

Freq. (MHz)	Ant. Pol H/V	Peak Reading	AV Reading	Ant. / CL CF	Actual Fs		Peak Limit	AV Limit	AV Margin
		(dBuV)	(dBuV)	(dB)	Peak	AV	(dBuV/m)	(dBuV/m)	(dB)
					(dBuV/m)	(dBuV/m)			
2480.00	Н	94.72	67.39	9.47	104.19	76.86	114.00	94.00	-17.14
		'							
1647.50	Н	56.38	31.43	6.52	62.90	37.95	74.00	54.00	-16.05
4955.00	Н	52.86	29.07	17.65	70.51	46.72	74.00	54.00	-7.28
N/A									>20
2480.00	V	96.03	65.19	9.47	105.50	74.66	114.00	94.00	-19.34
1647.50	٧	54.47	30.53	6.52	60.99	37.05	74.00	54.00	-16.95
4955.00	٧	51.27	28.80	17.65	68.92	46.45	74.00	54.00	-7.55
N/A									>20

Notes:

- 1. Measuring frequencies from 1 GHz to the 10th harmonic of highest fundamental frequency.
- 2. Measurements above show only up to 6 maximum emissions noted, or would be lesser if no specific emissions from the EUT are recorded (ie: margin>20dB from the applicable limit) and considered that's already beyond the background noise floor.
- 3. Radiated emissions measured in frequency above 1000MHz were made with an instrument using Peak detector mode and average detector mode of the emission shown in Actual FS column.
- 4. Spectrum setting:
 - a. Peak Setting 1GHz 26GHz, RBW = 1MHz, VBW = 1MHz, Sweep time = auto.
 - b. AV Setting 1GH z- 26GHz, RBW = 1MHz, VBW = 10Hz, Sweep time = *auto*.


5.2 BAND EDGE

5.2.1 REQUIREMENT

FCC ID: YHLBLUDECO

According to FCC section 15.249 (a), in any 1 00kHz bandwidth outside the frequency band in which the spread spectrum or digit ally modulated intentional radiator is operating, the radio fre quency power that is produced by the intentional radiator shall be at least 20dB below t hat in the 100kHz band width within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

5.2.2 TEST DESCRIPTION

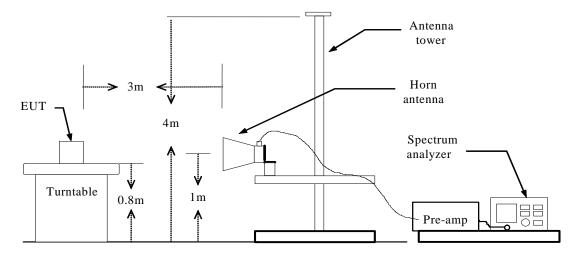


5.2.3TEST RESULT

The EUT operates at hopping-off test mode. The I owest and highest channels are tested to verify the band edge emissions.


				Test Result Highest Emission (dBuv/m)					
Test	Mode	Channel Marked Frequency	Limit (dBuv/m)	Ver	tical	Horizontal			
		, ,		Peak	Average	Peak	Average		
	Low	2390MHz		49.21	37.93	48.46	36.22		
Dluotooth	Channel	2400MHz	74(Peak)	56.03	40.19	55.36	39.90		
Bluetooth	High	2483.5MHz	54(Average)	51.24	37.96	52.09	36.44		
	Channel	2500MHz		49.52	36.47	48.85	35.10		

FCC ID: YHLBLUDECO


Test Plot:

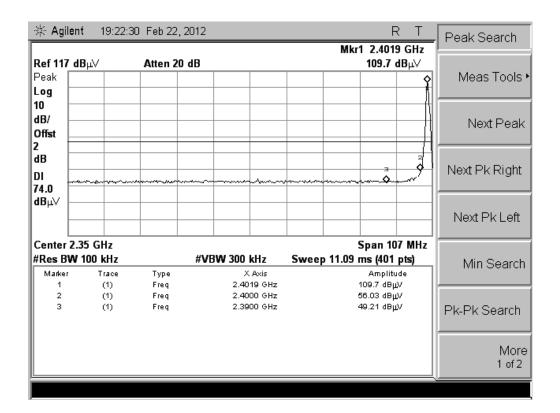


(CH Low, Vertical)

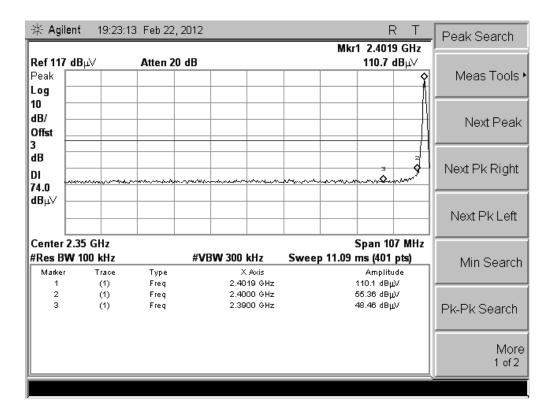

(CH Low, Horizontal)

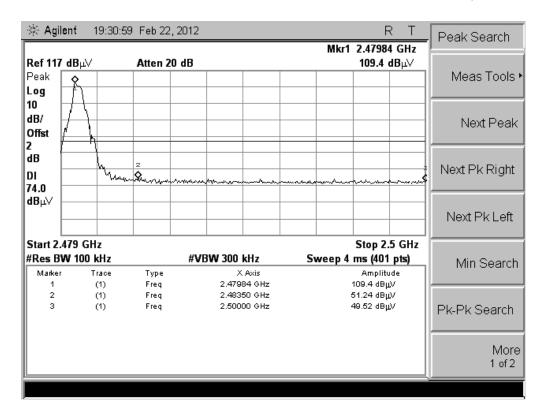

(CH High, Vertical)

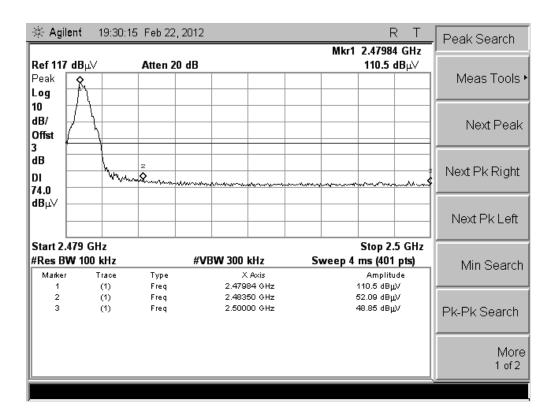

(CH High, Horizontal)


5.3 LINE CONDUCTED EMISSION TEST

5.3.1. LIMITS OF LINE CONDUCTED EMISSION TEST

Fraguency	Maximum RF	Maximum RF Line Voltage					
Frequency	Q.P.(dBuV)	Average(dBuV)					
150kHz-500kHz	66-56	56-46					
500kHz-5MHz	56	46					
5MHz-30MHz	60	50					

^{**}Note: 1. the lower limit shall apply at the transition frequency.

5.3.2. BLOCK DIAGRAM OF TEST SETUP

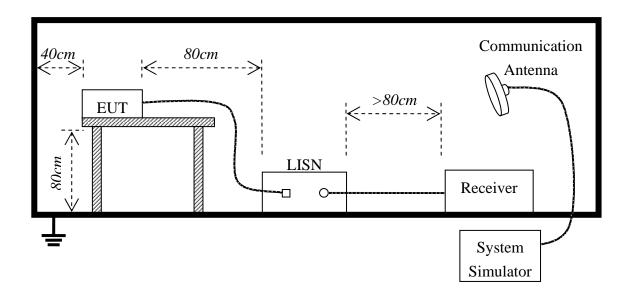

^{2.} The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz

5.3.3. PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST

- The equipment was set up as per the test configuration to simulate typical actual usage per the user 's manual. When the EUT is a tabletop system, a wooden table with a height of 0.8 meters is used and is placed on the ground plane as per FCC Part 15 (see Test Facility for the dimensions of the ground plane used). When the EUT is floor-standing equipment, it is placed on the ground plane which has a 3-12 mm non-conductive covering to insulate the EUT from the ground plane.
- 2) Support equipment, if needed, was placed as per FCC Part 15.
- 3) All I/O cables were positioned to simulate typical actual usage as per FCC Part 15.
- 4) The EUT received DC 5V power by AC/DC adapter which through a Line Impedance Stabilization Network (LISN) which supplied power source and was grounded to the ground plane.
- 5) All support equipments received power from a second LISN supplying power of AC 120V/60Hz, if any.
- 6) The EUT test program was started. Emissions were measured on each current car rying line of the EUT using a spectrum Analyzer / Rece iver connected to the LISN power ing the EUT. The LISN has two monitoring points: Line 1 (Hot Side) and Line 2 (Neutral Side). Two scans were taken: one with Li ne 1 connected to Analyzer / Receiver and Line 2 connected to a 50 ohm load; the second scan had Line 1 connected to a 50 ohm load and Line 2 connected to the Analyzer / Receiver.
- 7) Analyzer / Receiver scanned from 150 kHz to 30 MHz for emissions in each of the test modes.
- 8) During the above scans, the emissions were maximized by cable manipulation.
- 9) The following test mode(s) were scanned during the preliminary test:

PRELIMINA	PRELIMINARY PROCEDURE OF LINE CONDUCTED EMISSION TEST										
Frequency Range Investigated		9KHz to 26 GHz									
Mode of operation	Date	Data#	Worst Mode								
Bluetooth Mode	2012-02-23	DECO (10, 11)									
Camera Mode	2012-02-23	DECO (4, 5)									
Call Mode	2012-02-23	DECO (6, 7)									
Mp3 Mode	2012-02-23	DECO (2, 3)									
USB Mode	2012-02-23	DECO (8, 9)									

Then, the EUT configuration and cable configuration of the above highest emission level were recorded for reference of final testing.

5.3.4. FINAL PROCEDURE OF LINE CONDUCTED EMISSION TEST

EUT and support equipment was set up on the test bench as per step 9 of the preliminary test. A scan was taken on both power lines, Line 1 and Line 2, recording at least the six highest emissions. Emission frequency and amplitude were recorded into a computer in which correction factors were used to calculate the emission level and compare reading to the applicable limit. If EUT emission level was less –2dB to the A.V. limit in Peak mode, then the emission signal was re-checked using Q.P and Average detector.


The test data of the worst case condition(s) was reported on the Summary Data page.

5.3.5. TEST RESULT OF LINE CONDUCTED EMISSION TEST



Address:No.5,Langshan 2nd Rd., North Hi-Tech Industrial park Guangdong ,China

Tel: 0755-86170306 Fax: 0755-86170310

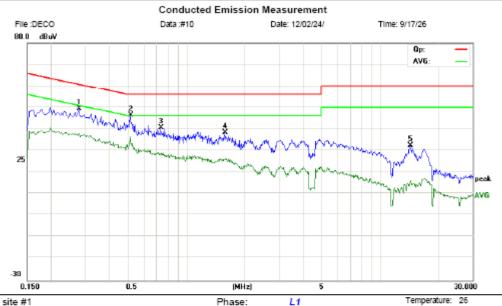

Power: AC 120V/60Hz

Humidity: 60 %

Site site #1

Limit: FCC Part15 B Class B QP

EUT: GSM Mobile Phone

M/N: DECO Mode: bluetooth

Note:


No. Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over			
	MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment	
1	0.2780	37.96	11.48	49.44	60.88	-11.44	peak		
2 ×	0.5140	36.31	10.00	46.31	56.00	-9.69	peak		
3	0.7340	30.46	10.00	40.46	56.00	-15.54	peak		
4	1.5740	28.86	9.43	38.29	56.00	-17.71	peak		
5	14.2620	23.41	9.00	32.41	60.00	-27.59	peak		

^{*:}Maximum data x:Over limit !:over margin



Address:No.5,Langshan 2nd Rd., North Hi-Tech Industrial park Guangdong ,China

Tel: 0755-86170306 Fax: 0755-86170310

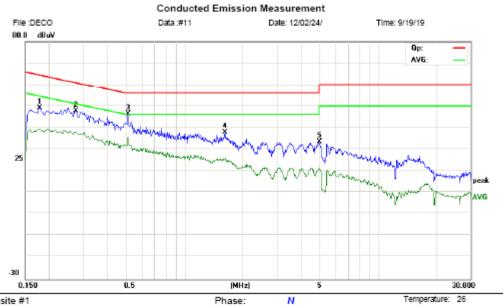

Power: AC 120V/60Hz

Humidity: 60 %

Site site #1

Limit: FCC Part15 B Class B QP

EUT: GSM Mobile Phone

M/N: DECO Mode: bluetooth

Note:

No. N	Mk.	Freq.	Reading Level	Correct Factor	Measure- ment	Limit	Over			
		MHz	dBuV	dB	dBuV	dBuV	dB	Detector	Comment	
1		0.1787	38.48	10.72	49.20	64.55	-15.35	peak		
2		0.2744	36.30	11.50	47.80	60.98	-13.18	peak		
3 '	×	0.5100	36.44	10.00	46.44	56.00	-9.56	peak		
4		1.6180	28.32	9.38	37.70	56.00	-18.30	peak		
5		4.9420	21.48	11.94	33.42	56.00	-22.58	peak		

^{*:}Maximum data x:Over limit !:over margin


APPENDIX 1 PHOTOGRAPHS OF TEST SETUP


CE TEST SETUP





RE TEST SETUP

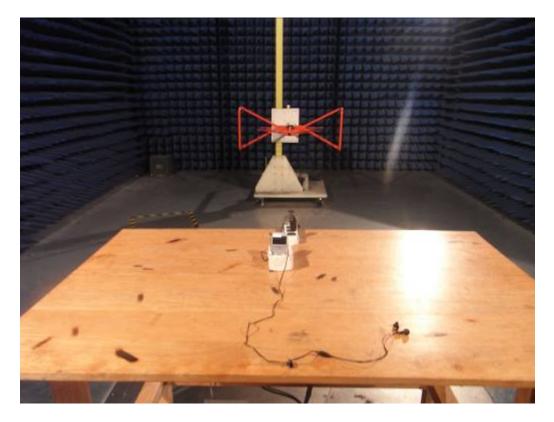

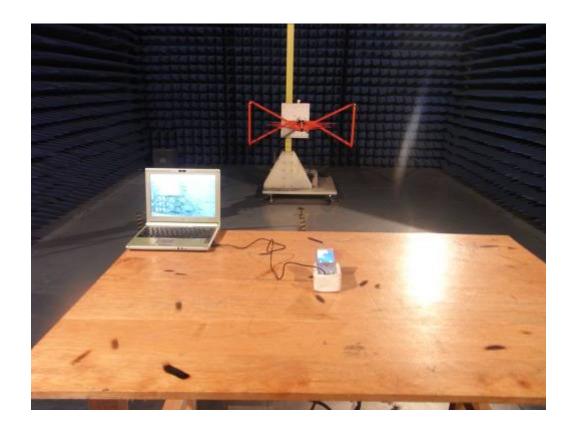







APPENDIX 2 PHOTOGRAPHS OF EUT

FCC ID: YHLBLUDECO

FRONT VIEW OF SAMPLE



BACK VIEW OF SAMPLE



LEFT VIEW OF SAMPLE



RIGHT VIEW OF SAMPLE



UP VIEW OF SAMPLE



DOWN VIEW OF SAMPLE

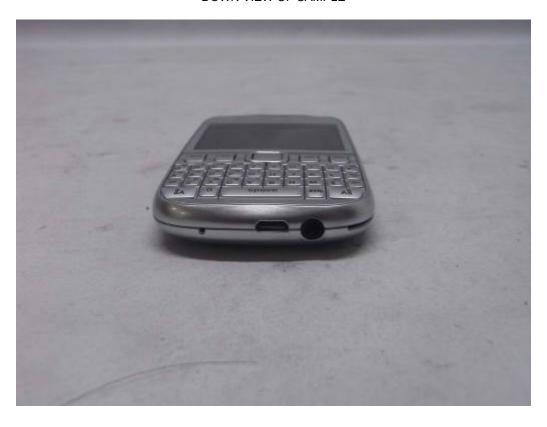


PHOTO OF POWER SUPPLY



PHOTO OF HEADPHONE



PHOTO OF USB




PHOTO OF BATTERY




PHOTO OF THE ENTIRE SAMPLE



INTERNAL PHOTO OF POWER SUPPLY - 1

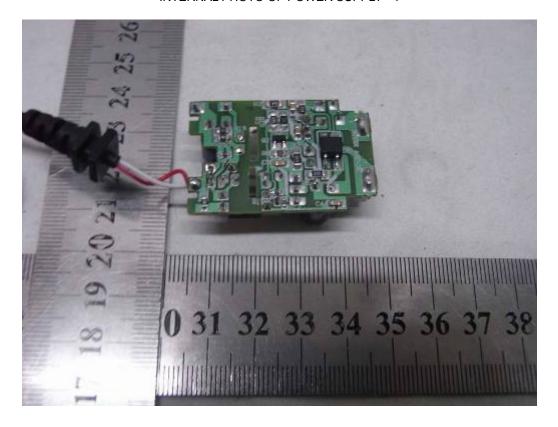

INTERNAL PHOTO OF POWER SUPPLY - 2

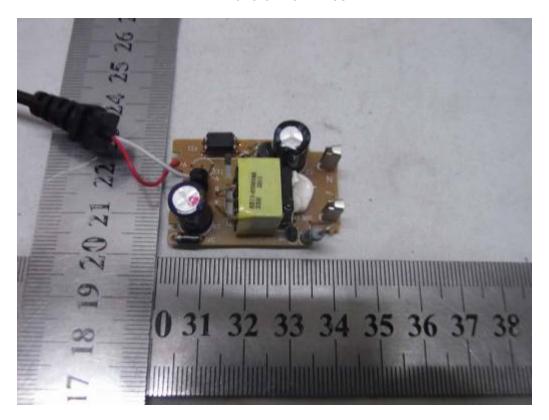

INTERNAL PHOTO OF SAMPLE - 1



INTERNAL PHOTO OF SAMPLE -2



INTERNAL PHOTO OF SAMPLE - 3




INTERNAL PHOTO OF SAMPLE - 4




INTERNAL PHOTO OF SAMPLE - 5



INTERNAL PHOTO OF SAMPLE - 6

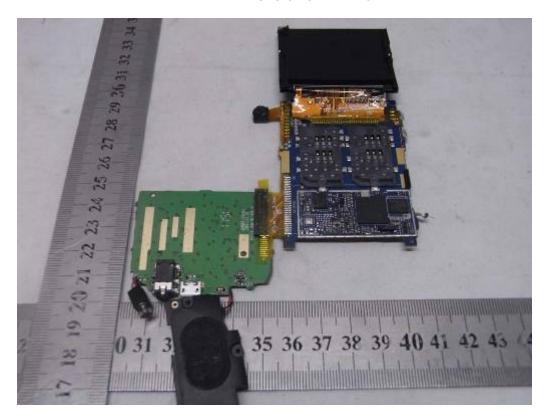

INTERNAL PHOTO OF SAMPLE - 7

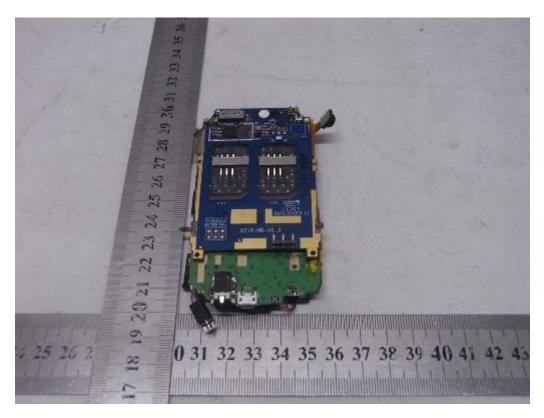

-----END OF REPORT-----