FCC SAR Test Report

APPLICANT : BLU Products, Inc.

EQUIPMENT: Smartphone

BRAND NAME : BLU

MODEL NAME : GRAND 5.5 HD
MARKETING NAME : GRAND 5.5 HD

FCC ID : YHLBLUGRAND55HD

STANDARD : FCC 47 CFR Part 2 (2.1093)

ANSI/IEEE C95.1-1992

IEEE 1528-2013

We, SPORTON INTERNATIONAL (SHENZHEN) INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and had been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (SHENZHEN) INC., the test report shall not be reproduced except in full.

Prepared by: Mark Qu / Manager

Mark Qu

Approved by: Jones Tsai / Manager

lac-MRA



Report No. : FA640702

SPORTON INTERNATIONAL (SHENZHEN) INC.

1F & 2F, Building A, Morning Business Center, No. 4003 ShiGu Rd., Xili Town, Nanshan District, Shenzhen, Guangdong, P. R. China

TEL: 86-755-8637-9589/ FAX: 86-755-8637-9595

FCC ID : YHLBLUGRAND55HD

Issued Date : May 20, 2016
Page 1 of 45 Form version. : 151208

Table of Contents

1. Statement of Compliance	4
2. Administration Data	
3. Guidance Standard	
4. Equipment Under Test (EUT) Information	
4.1 General Information	
5. RF Exposure Limits	
5.1 Uncontrolled Environment	
5.2 Controlled Environment	
6. Specific Absorption Rate (SAR)	8
6.1 Introduction	8
6.2 SAR Definition	
7. System Description and Setup	
7.1 E-Field Probe	10
7.2 Data Acquisition Electronics (DAE)	10
7.3 Phantom	
7.4 Device Holder	
8. Measurement Procedures	
8.1 Spatial Peak SAR Evaluation	13
8.2 Power Reference Measurement	
8.3 Area Scan	
8.4 Zoom Scan	
8.5 Volume Scan Procedures	
8.6 Power Drift Monitoring	15
9. Test Equipment List	16
10. System Verification	
10.1 Tissue Verification	17
10.2 System Performance Check Results	18
11. RF Exposure Positions	19
11.1 Ear and handset reference point	
11.2 Definition of the cheek position	
11.3 Definition of the tilt position	
11.4 Body Worn Accessory	
11.5 Wireless Router	22
12. Conducted RF Output Power (Unit: dBm)	23
13. Bluetooth Exclusions Applied	
14. Antenna Location	
15. SAR Test Results	
15.1 Head SAR	
15.2 Hotspot SAR	
15.3 Body Worn Accessory SAR	37
16. Simultaneous Transmission Analysis	39
16.1 Head Exposure Conditions	40
16.2 Hotspot Exposure Conditions	41
16.3 Body-Worn Accessory Exposure Conditions	42
17. Uncertainty Assessment	
18. References	45
Appendix A. Plots of System Performance Check	
Appendix B. Plots of High SAR Measurement	
Appendix C. DASY Calibration Certificate	
Appendix D. Test Setup Photos	

TEL: 86-755-8637-9589/ FAX: 86-755-8637-9595

FCC ID: YHLBLUGRAND55HD

Revision History

Report No.: FA640702

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FA640702	Rev. 01	Initial issue of report	May 20, 2016

TEL: 86-755-8637-9589/ FAX: 86-755-8637-9595

Issued Date: May 20, 2016 Form version. : 151208 FCC ID: YHLBLUGRAND55HD Page 3 of 45

1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for BLU Products, Inc., Smartphone, GRAND 5.5 HD are as follows.

Report No. : FA640702

			Higl	nest 1g SAR Sumr	nary	l limbaat
Equipment Class			Head (Separation 0mm)	Body-worn (Separation 10mm)	Hotspot (Separation 10mm)	Highest Simultaneous Transmission 1g SAR (W/kg)
				1g SAR (W/kg)		ig SAR (Wing)
	GSM	GSM850	0.35	0.57	0.57	
	GSIVI	GSM1900	0.37	0.72	0.72	
Licensed		Band V	0.19	0.30	0.30	0.79
	WCDMA	Band IV	0.39	0.51	0.51	
		Band II	0.36	0.62	0.62	
DTS	WLAN	2.4GHz WLAN	0.36	<0.10	<0.10	0.79
Date of Testing:			Apr. 11, 2016	~ Apr. 13, 2016		

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2013 and FCC KDB publications.

TEL: 86-755-8637-9589/ FAX: 86-755-8637-9595

Issued Date: May 20, 2016 FCC ID: YHLBLUGRAND55HD Form version.: 151208 Page 4 of 45

2. Administration Data

Testing Laboratory		
Test Site	SPORTON INTERNATIONAL (SHENZHEN) INC.	
Test Site Location	1F & 2F,Building A, Morning Business Center, No. 4003 ShiGu Rd., Xili Town, Nanshan District, Shenzhen, Guangdong, P. R. China	
	TEL: +86-755-8637-9589	
	FAX: +86-755-8637-9595	

Report No. : FA640702

Applicant		
Company Name	BLU Products, Inc.	
Address	10814 NW 33rd St # 100 Doral, FL 33172	

Manufacturer	
Company Name	BLU Products, Inc.
Address	10814 NW 33rd St # 100 Doral, FL 33172

3. Guidance Standard

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- · IEEE 1528-2013
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r04
- FCC KDB 865664 D02 SAR Reporting v01r02
- FCC KDB 447498 D01 General RF Exposure Guidance v06
- FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r03
- FCC KDB 248227 D01 802.11 Wi-Fi SAR v02r02
- FCC KDB 941225 D01 3G SAR Procedures v03r01
- FCC KDB 941225 D06 Hotspot Mode SAR v02r01

4. Equipment Under Test (EUT) Information

4.1 General Information

Product Feature & Specification		
Equipment Name	Smartphone	
Brand Name	BLU	
Model Name	GRAND 5.5 HD	
Marketing Name	GRAND 5.5 HD	
FCC ID	YHLBLUGRAND55HD	
IMEI Code	SIM1: 353919028107153 SIM2: 353919028157158	
Wireless Technology and Frequency Range	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz WCDMA Band IV: 1712.4 MHz ~ 1752.6 MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz Bluetooth: 2402 MHz ~ 2480 MHz	
Mode	 GSM/GPRS/EGPRS RMC/AMR 12.2Kbps HSDPA HSUPA HSPA+ (16QAM uplink is not supported) 802.11b/g/n HT20/HT40 Bluetooth v3.0+EDR, Bluetooth v4.0 LE 	
HW Version	V1.0	
SW Version	BLU_3750_V01_GENERIC	
	Class B – EUT cannot support Packet Switched and Circuit Switched Network	
mode	simultaneously but can automatically switch between Packet and Circuit Switched Network.	
EUT Stage	Pre-Production	
Romark:		

Report No.: FA640702

Remark:

- 1. This device supports GRPS / EGPRS mode up to multi-slot class 12.
- 2. This device 2.4GHz WLAN supports Hotspot operation.
- 3. This device supported VoIP in GPRS, EGPRS and WCDMA (e.g. 3rd party VoIP).
- 4. This device does not support DTM operation.
- 5. There are two SIM cards for EUT and supports dual SIM dual Standby. The WWAN radio transmission will be enabled by either one SIM at a time (Single active). After pre-scan two SIM cards power, we found test result of the SIM1 was the worse, so we chose dual SIM1 card to perform all tests.

5. RF Exposure Limits

5.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

Report No.: FA640702

5.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

^{1.} Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

Form version.: 151208 Page 7 of 45

6. Specific Absorption Rate (SAR)

6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

Report No.: FA640702

6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (p). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$


Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

TEL: 86-755-8637-9589/ FAX: 86-755-8637-9595

Issued Date: May 20, 2016 Form version.: 151208 FCC ID: YHLBLUGRAND55HD Page 8 of 45

7. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

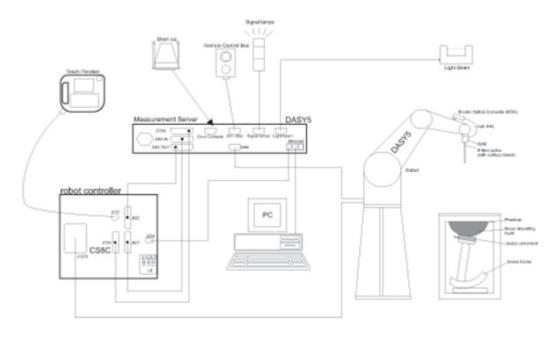

Report No. : FA640702

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing,
 AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps,
 etc.
- The phantom, the device holder and other accessories according to the targeted measurement.

7.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

<EX3DV4 Probe>

Construction	Symmetric design with triangular core	
	Built-in shielding against static charges	100
	PEEK enclosure material (resistant to organic	
	solvents, e.g., DGBE)	
Frequency	10 MHz – >6 GHz	
	Linearity: ±0.2 dB (30 MHz – 6 GHz)	
Directivity	±0.3 dB in TSL (rotation around probe axis)	
	±0.5 dB in TSL (rotation normal to probe axis)	
Dynamic Range	10 μW/g – >100 mW/g	
	Linearity: ±0.2 dB (noise: typically <1 μW/g)	
Dimensions	Overall length: 337 mm (tip: 20 mm)	- 4
	Tip diameter: 2.5 mm (body: 12 mm)	4
	Typical distance from probe tip to dipole centers: 1	MA
	mm	



Report No. : FA640702

7.2 <u>Data Acquisition Electronics (DAE)</u>

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.

The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Fig 5.1 Photo of DAE

TEL: 86-755-8637-9589/ FAX: 86-755-8637-9595

Issued Date: May 20, 2016 Form version.: 151208 FCC ID: YHLBLUGRAND55HD Page 10 of 45

7.3 Phantom

<SAM Twin Phantom>

2 ± 0.2 mm;	
Center ear point: 6 ± 0.2 mm	juli and the same of the same
Approx. 25 liters	
Length: 1000 mm; Width: 500 mm; Height:	-
adjustable feet	S
Left Hand, Right Hand, Flat Phantom	
	Center ear point: 6 ± 0.2 mm Approx. 25 liters Length: 1000 mm; Width: 500 mm; Height: adjustable feet

Report No. : FA640702

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

<ELI Phantom>

2 ± 0.2 mm (sagging: <1%)	
Approx. 30 liters	
Major ellipse axis: 600 mm Minor axis: 400 mm	
	Approx. 30 liters Major ellipse axis: 600 mm

The ELI phantom is intended for compliance testing of handheld and body-mounted wireless devices in the frequency range of 30 MHz to 6 GHz. ELI4 is fully compatible with standard and all known tissue simulating liquids.

SPORTON INTERNATIONAL (SHENZHEN) INC.

7.4 Device Holder

<Mounting Device for Hand-Held Transmitter>

In combination with the Twin SAM V5.0/V5.0c or ELI phantoms, the Mounting Device for Hand-Held Transmitters enables rotation of the mounted transmitter device to specified spherical coordinates. At the heads, the rotation axis is at the ear opening. Transmitter devices can be easily and accurately positioned according to IEC 62209-1, IEEE 1528, FCC, or other specifications. The device holder can be locked for positioning at different phantom sections (left head, right head, flat). And upgrade kit to Mounting Device to enable easy mounting of wider devices like big smart-phones, e-books, small tablets, etc. It holds devices with width up to 140 mm.





Report No. : FA640702

Mounting Device for Hand-Held Transmitters

Mounting Device Adaptor for Wide-Phones

<Mounting Device for Laptops and other Body-Worn Transmitters>

The extension is lightweight and made of POM, acrylic glass and foam. It fits easily on the upper part of the mounting device in place of the phone positioned. The extension is fully compatible with the SAM Twin and ELI phantoms.



Mounting Device for Laptops

TEL: 86-755-8637-9589/ FAX: 86-755-8637-9595

Issued Date: May 20, 2016 Form version.: 151208 FCC ID: YHLBLUGRAND55HD Page 12 of 45

8. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

(a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.

Report No.: FA640702

- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

8.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values form the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

 SPORTON INTERNATIONAL (SHENZHEN) INC.

 TEL: 86-755-8637-9589/ FAX: 86-755-8637-9595
 Issued Date: May 20, 2016

FCC ID : YHLBLUGRAND55HD Page 13 of 45 Form version. : 151208

8.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

Report No.: FA640702

8.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0 is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz			
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5 \text{ mm}$			
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°			
	\leq 2 GHz: \leq 15 mm 2 – 3 GHz: \leq 12 mm	$3 - 4 \text{ GHz:} \le 12 \text{ mm}$ $4 - 6 \text{ GHz:} \le 10 \text{ mm}$			
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be \leq the corresponding x or y dimension of the test device with at least one measurement point on the test device.				

SPORTON INTERNATIONAL (SHENZHEN) INC.

8.4 Zoom Scan

Zoom scans are used assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube shoes base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Report No.: FA640702

Zoom scan parameters extracted from FCC KDB 865664 D01v01r04 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum zoom scan s	spatial reso	lution: Δx _{Zoom} , Δy _{Zoom}	\leq 2 GHz: \leq 8 mm 2 – 3 GHz: \leq 5 mm [*]	$3 - 4 \text{ GHz: } \le 5 \text{ mm}^*$ $4 - 6 \text{ GHz: } \le 4 \text{ mm}^*$
	uniform	grid: $\Delta z_{Zoom}(n)$	≤ 5 mm	$3 - 4 \text{ GHz: } \le 4 \text{ mm}$ $4 - 5 \text{ GHz: } \le 3 \text{ mm}$ $5 - 6 \text{ GHz: } \le 2 \text{ mm}$
Maximum zoom scan spatial resolution, normal to phantom surface	graded	Δz _{Zoom} (1): between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
	grid $\Delta z_{Zoom}(n>1)$: between subsequent points		≤ 1.5·∆z	Zoom(n-1)
Minimum zoom scan volume	X V 7		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm

Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.

8.5 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

8.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

TEL: 86-755-8637-9589/ FAX: 86-755-8637-9595 Issued Date: May 20, 2016

Form version.: 151208 FCC ID: YHLBLUGRAND55HD Page 15 of 45

When zoom scan is required and the <u>reported</u> SAR from the area scan based 1-g SAR estimation procedures of KDB 447498 is $\leq 1.4 \text{ W/kg}, \leq 8 \text{ mm}, \leq 7 \text{ mm}$ and $\leq 5 \text{ mm}$ zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.

9. Test Equipment List

		- "-	0 : 111 .	Calib	ration	
Manufacturer	Name of Equipment	Type/Model	Serial Number	Last Cal.	Due Date	
SPEAG	835MHz System Validation Kit	D835V2	4d162	Nov. 24, 2015	Nov. 23, 2016	
SPEAG	1750MHz System Validation Kit	D1750V2	1137	Apr. 28, 2015	Apr. 27, 2016	
SPEAG	1900MHz System Validation Kit	D1900V2	5d182	Nov. 23, 2015	Nov. 22, 2016	
SPEAG	2450MHz System Validation Kit	D2450V2	924	Feb. 24, 2016	Feb. 23, 2017	
SPEAG	Data Acquisition Electronics	DAE4	1338	Nov. 23, 2015	Nov. 22, 2016	
SPEAG	Dosimetric E-Field Probe	EX3DV4	3935	Nov. 27, 2015	Nov. 26, 2016	
SPEAG	SAM Twin Phantom	SAM V5.0	1795	NCR	NCR	
SPEAG	Phone Positioner	N/A	N/A	NCR	NCR	
Agilent	Wireless Communication Test Set	E5515C	MY50267224	Aug. 07, 2015	Aug. 06, 2016	
Agilent	Network Analyzer	E5071C	MY46523671	Dec. 31, 2015	Dec. 30, 2016	
Speag	Dielectric Assessment KIT	DAK-3.5	1071	Nov. 24, 2015	Nov. 23, 2016	
Agilent	Signal Generator	N5181A	MY50145381	Jan. 12, 2016	Jan. 11, 2017	
Anritsu	Power Senor	MA2411B	1306099	Jan. 12, 2016	Jan. 11, 2017	
Anritsu	Power Meter	ML2495A	1349001	Jan. 12, 2016	Jan. 11, 2017	
Anritsu	Power Sensor	MA2411B	1207253	Jan. 12, 2016	Jan. 11, 2017	
Anritsu	Power Meter	ML2495A	1218010	Jan. 12, 2016	Jan. 11, 2017	
R&S	Spectrum Analyzer	FSP7	101634	Aug. 07, 2015	Aug. 06, 2016	
ARRA	Power Divider	A3200-2	N/A	No	te 1	
PASTERNACK	Dual Directional Coupler	PE2214-10	N/A	No	te 1	
Agilent	Dual Directional Coupler	778D	50422	No	te 1	
AR	Amplifier	5S1G4	333096	Note 1		
mini-circuits	Amplifier	ZVE-3W-83+	162601250	Note 1		
MCL	Attenuation1	BW-S10W5	N/A	Note 1		
Weinschel	Attenuation2	3M-20	N/A	Note 1		
Zhongjilianhe	Attenuation3	MVE2214-03	N/A	Note 1		

Report No. : FA640702

General Note:

Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589/ FAX: 86-755-8637-9595

Issued Date: May 20, 2016 FCC ID: YHLBLUGRAND55HD Page 16 of 45 Form version.: 151208

10. System Verification

10.1 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target

Report No. : FA640702

tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (εr)			
	For Head										
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5			
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0			
2450	55.0	0	0	0	0	45.0	1.80	39.2			
				For Body							
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2			
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3			
2450	68.6	0	0	0	0	31.4	1.95	52.7			

<Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ε _r)	Conductivity Target (σ)	Permittivity Target (ε _r)	Delta (σ) (%)	Delta (ε _r) (%)	Limit (%)	Date
835	Head	22.9	0.897	41.605	0.90	41.50	-0.33	0.25	±5	Apr. 13, 2016
1750	Head	22.7	1.378	41.340	1.37	40.10	0.58	3.09	±5	Apr. 12, 2016
1900	Head	22.6	1.417	40.994	1.40	40.00	1.21	2.49	±5	Apr. 12, 2016
2450	Head	22.8	1.878	40.464	1.80	39.20	4.33	3.22	±5	Apr. 13, 2016
835	Body	22.5	1.000	54.086	0.97	55.20	3.09	-2.02	±5	Apr. 11, 2016
1750	Body	22.8	1.529	52.044	1.49	53.40	2.62	-2.54	±5	Apr. 12, 2016
1900	Body	22.7	1.531	54.671	1.52	53.30	0.72	2.57	±5	Apr. 12, 2016
2450	Body	22.9	1.949	51.667	1.95	52.70	-0.05	-1.96	±5	Apr. 13, 2016


TEL: 86-755-8637-9589/ FAX: 86-755-8637-9595

Issued Date: May 20, 2016 FCC ID: YHLBLUGRAND55HD Page 17 of 45 Form version.: 151208

10.2 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured 1g SAR (W/kg)	Targeted 1g SAR (W/kg)	Normalized 1g SAR (W/kg)	Deviation (%)
Apr. 13, 2016	835	Head	250	D835V2- 4d162	EX3DV4 - SN3935	DAE4 Sn1338	2.36	9.14	9.44	3.28
Apr. 12, 2016	1750	Head	250	D1750V2- 1137	EX3DV4 - SN3935	DAE4 Sn1338	8.63	36.20	34.52	-4.64
Apr. 12, 2016	1900	Head	250	D1900V2- 5d182	EX3DV4 - SN3935	DAE4 Sn1338	9.63	39.60	38.52	-2.73
Apr. 13, 2016	2450	Head	250	D2450V2- 924	EX3DV4 - SN3935	DAE4 Sn1338	13.60	52.50	54.4	3.62
Apr. 11, 2016	835	Body	250	D835V2- 4d162	EX3DV4 - SN3935	DAE4 Sn1338	2.41	9.51	9.64	1.37
Apr. 12, 2016	1750	Body	250	D1750V2- 1137	EX3DV4 - SN3935	DAE4 Sn1338	9.17	36.90	36.68	-0.60
Apr. 12, 2016	1900	Body	250	D1900V2- 5d182	EX3DV4 - SN3935	DAE4 Sn1338	9.87	40.60	39.48	-2.76
Apr. 13, 2016	2450	Body	250	D2450V2- 924	EX3DV4 - SN3935	DAE4 Sn1338	13.00	51.40	52	1.17

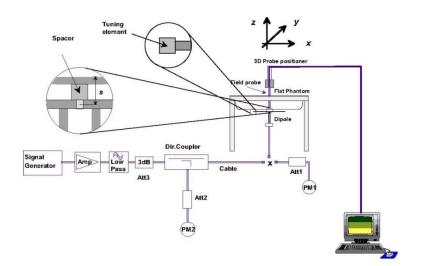



Report No. : FA640702

Fig 8.3.1 System Performance Check Setup

Fig 8.3.2 Setup Photo

TEL: 86-755-8637-9589/ FAX: 86-755-8637-9595

Issued Date: May 20, 2016 Page 18 of 45 FCC ID: YHLBLUGRAND55HD Form version.: 151208

11. RF Exposure Positions

11.1 Ear and handset reference point

Figure 9.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled "M," the left ear reference point (ERP) is marked "LE," and the right ERP is marked "RE." Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 9.1.2 The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 9.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 9.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.



Fig 9.1.1 Front, back, and side views of SAM twin phantom





Fig 9.1.2 Close-up side view of phantom showing the ear region.



Report No. : FA640702

Fig 9.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations

TEL: 86-755-8637-9589/ FAX: 86-755-8637-9595 Issued Date: May 20, 2016 Form version.: 151208

Page 19 of 45 FCC ID: YHLBLUGRAND55HD

11.2 Definition of the cheek position

- Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
- Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width wt of the handset at the level of the acoustic output (point A in Figure 9.2.1 and Figure 9.2.2), and the midpoint of the width wb of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 9.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 9.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
- Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 9.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
- Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
- While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
- Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line. 6.
- While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 9.2.3. The actual rotation angles should be documented in the test report.





Fig 9.2.1 Handset vertical and horizontal reference lines—"fixed case



Report No.: FA640702

Fig 9.2.2 Handset vertical and horizontal reference lines-"clam-shell case"








Fig 9.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

SPORTON INTERNATIONAL (SHENZHEN) INC. TEL: 86-755-8637-9589/ FAX: 86-755-8637-9595 Issued Date: May 20, 2016 Form version. : 151208

FCC ID: YHLBLUGRAND55HD

11.3 Definition of the tilt position

 Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.

Report No.: FA640702

- 2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15°.
- 3. Rotate the handset around the horizontal line by 15°.
- 4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 9.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point

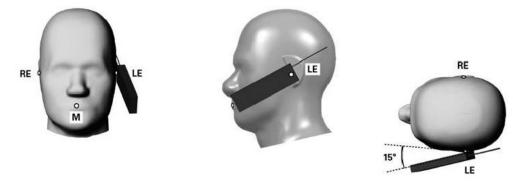


Fig 9.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.

11.4 Body Worn Accessory

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 9.4). Per KDB648474 D04v01r03, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v06 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is < 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a handset attached to the handset.

Report No. : FA640702

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-chip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

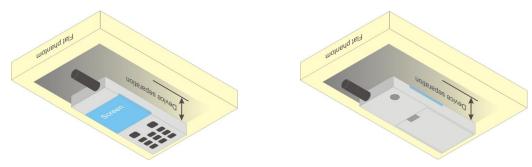


Fig 9.4 Body Worn Position

11.5 Wireless Router

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC KDB Publication 941225 D06 v02r01 where SAR test considerations for handsets (L x W \ge 9 cm x 5 cm) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined form general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v06 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

12. Conducted RF Output Power (Unit: dBm)

<GSM Conducted Power>

 Per KDB 447498 D01v06, the maximum output power channel is used for SAR testing and for further SAR test reduction.

Report No. : FA640702

- 2. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS (4Tx slots) for GSM850/GSM1900 is considered as the primary mode.
- 3. Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is ≤ ¼ dB higher than the primary mode, SAR measurement is not required for the secondary mode

GSM850	Burst Av	erage Pow	er (dBm)	Tune-up	Frame-A	verage Pow	er (dBm)	Tune-up
TX Channel	128	189	251	Limit	128	189	251	Limit
Frequency (MHz)	824.2	836.4	848.8	(dBm)	824.2	836.4	848.8	(dBm)
GSM 1 Tx slot	<mark>32.85</mark>	32.81	32.76	33.00	23.85	23.81	23.76	24.00
GPRS 1 Tx slot	32.82	32.79	32.71	33.00	23.82	23.79	23.71	24.00
GPRS 2 Tx slots	32.07	32.05	31.98	32.50	26.07	26.05	25.98	26.50
GPRS 3 Tx slots	30.31	30.28	30.23	30.50	26.05	26.02	25.97	26.24
GPRS 4 Tx slots	29.23	29.19	29.15	29.50	<mark>26.23</mark>	26.19	26.15	26.50
EDGE 1 Tx slot	27.52	27.50	27.50	28.00	18.52	18.50	18.50	19.00
EDGE 2 Tx slots	26.46	26.50	26.48	27.00	20.46	20.50	20.48	21.00
EDGE 3 Tx slots	24.43	24.51	24.47	26.00	20.17	20.25	20.21	21.74
EDGE 4 Tx slots	23.26	23.34	23.29	25.00	20.26	20.34	20.29	22.00

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB
Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB
Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB
Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

GSM1900	Burst Ave	erage Pow	er (dBm)	Tune-up	Tune-up Frame-Average Po			Tune-up
TX Channel	512	661	810	Limit	512	661	810	Limit
Frequency (MHz)	1850.2	1880	1909.8	(dBm)	1850.2	1880	1909.8	(dBm)
GSM 1 Tx slot	29.69	<mark>29.72</mark>	29.70	30.50	20.69	20.72	20.70	21.50
GPRS 1 Tx slot	29.67	29.69	29.68	30.50	20.67	20.69	20.68	21.50
GPRS 2 Tx slots	28.94	28.95	28.88	29.50	22.94	22.95	22.88	23.50
GPRS 3 Tx slots	27.18	27.22	27.21	27.50	22.92	22.96	22.95	23.24
GPRS 4 Tx slots	26.05	26.13	26.12	26.50	23.05	<mark>23.13</mark>	23.12	23.50
EDGE 1 Tx slot	26.21	26.38	26.51	27.00	17.21	17.38	17.51	18.00
EDGE 2 Tx slots	25.19	25.43	25.56	26.00	19.19	19.43	19.56	20.00
EDGE 3 Tx slots	23.02	23.25	23.41	24.00	18.76	18.99	19.15	19.74
EDGE 4 Tx slots	21.82	22.00	22.17	23.00	18.82	19.00	19.17	20.00

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

SPORTON INTERNATIONAL (SHENZHEN) INC.TEL: 86-755-8637-9589/ FAX: 86-755-8637-9595

<WCDMA Conducted Power>

- 1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
- 2. The procedures in KDB 941225 D01v03r01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.

Report No.: FA640702

A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- The RF path losses were compensated into the measurements.
- A call was established between EUT and Base Station with following setting:
 - Set Gain Factors (β_c and β_d) and parameters were set according to each
 - Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - Set RMC 12.2Kbps + HSDPA mode.
 - Set Cell Power = -86 dBm
 - Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - Set CQI Repetition Factor to 2 Χ.
 - Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	βο	βd	β _d (SF)	βс/βа	βнs (Note1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

- Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$. Note 1:
- For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Note 2: Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, \triangle ACK and \triangle NACK = 30/15 with β_{hs} = 30/15 * β_c , and \triangle CQI = 24/15 with $\beta_{hs} = 24/15 * \beta_c$.
- CM = 1 for β_o/β_d =12/15, β_{hs}/β_c =24/15. For all other combinations of DPDCH, DPCCH and HS-Note 3: DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.
- Note 4: For subtest 2 the β_d/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to β_c = 11/15 and β_d = 15/15

Setup Configuration

FCC ID: YHLBLUGRAND55HD Page 24 of 45

SPORTON INTERNATIONAL (SHENZHEN) INC.

HSUPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting *:
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121

Report No.: FA640702

- iii. Set Cell Power = -86 dBm
- iv. Set Channel Type = 12.2k + HSPA
- v. Set UE Target Power
- vi. Power Ctrl Mode= Alternating bits
- vii. Set and observe the E-TFCI
- viii. Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub- test	βс	βa	β _d (SF)	βc/βd	βнs (Note1)	βес	β _{ed} (Note 5) (Note 6)	β _{ed} (SF)	β _{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 6)	E- TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/2 25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β _{ed} 1: 47/15 β _{ed} 2: 47/15	4 4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 (Note 4)	15/15 (Note 4)	64	15/15 (Note 4)	30/15	24/15	134/15	4	1	1.0	0.0	21	81

- Note 1: Δ_{ACK} , Δ_{NACK} and Δ_{CQI} = 30/15 with β_{hs} = 30/15 * β_c .
- Note 2: CM = 1 for β_0/β_d =12/15, β_{1s}/β_c =24/15. For all other combinations of DPDCH, DPCCH, HS- DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.
- Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to β_c = 10/15 and β_d = 15/15.
- Note 4: For subtest 5 the β_d/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to β_c = 14/15 and β_d = 15/15.
- Note 5: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.
- Note 6: β_{ed} can not be set directly, it is set by Absolute Grant Value.

Setup Configuration

 SPORTON INTERNATIONAL (SHENZHEN) INC.

 TEL: 86-755-8637-9589/ FAX: 86-755-8637-9595
 Issued Date: May 20, 2016

 FCC ID: YHLBLUGRAND55HD
 Page 25 of 45
 Form version.: 151208



<WCDMA Conducted Power>

General Note:

1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".

Report No. : FA640702

2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. If the maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA is ≤ ¼ dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA.

	Band	WC	DMA Bar	nd II		WC	DMA Ban	d IV		WC	DMA Bar	nd V	
TX	Channel	9262	9400	9538	Tune-up Limit	1312	1413	1513	Tune-up Limit	4132	4182	4233	Tune-up Limit
Rx	Channel	9662	9800	9938	(dBm)	1537	1638	1738	(dBm)	4357	4407	4458	(dBm)
Frequency (MHz)		1852.4	1880	1907.6	(3.2)	1712.4	1732.6	1752.6		826.4	836.4	846.6	
3GPP Rel 99	AMR 12.2Kbps	22.59	22.61	22.41	23.00	22.69	22.67	22.65	23.50	22.49	22.59	22.55	23.00
3GPP Rel 99	RMC 12.2Kbps	22.61	<mark>22.62</mark>	22.43	23.00	<mark>22.71</mark>	22.70	22.66	23.50	22.50	22.61	22.57	23.00
3GPP Rel 6	HSDPA Subtest-1	21.38	21.26	21.08	21.50	21.35	21.49	21.54	22.00	21.16	21.46	21.36	22.00
3GPP Rel 6	HSDPA Subtest-2	21.35	21.23	21.08	21.50	21.33	21.43	21.51	22.00	21.29	21.44	21.33	22.00
3GPP Rel 6	HSDPA Subtest-3	20.88	20.77	20.61	21.00	20.85	20.90	21.07	21.50	20.69	20.96	20.87	21.50
3GPP Rel 6	HSDPA Subtest-4	20.84	20.75	20.55	21.00	20.88	20.93	21.05	21.50	20.64	20.96	20.87	21.50
3GPP Rel 6	HSUPA Subtest-1	19.37	19.30	19.06	19.50	19.35	19.49	19.55	20.00	19.26	19.50	19.44	20.00
3GPP Rel 6	HSUPA Subtest-2	19.30	19.24	19.07	19.50	19.31	19.49	19.53	20.00	19.19	19.53	19.44	20.00
3GPP Rel 6	HSUPA Subtest-3	20.35	20.30	20.11	20.50	20.30	20.46	20.52	21.00	20.27	20.50	20.42	21.00
3GPP Rel 6	HSUPA Subtest-4	18.79	18.79	18.55	19.50	18.82	18.95	19.02	20.00	18.47	18.97	18.94	20.00
3GPP Rel 6	HSUPA Subtest-5	21.40	21.30	21.10	21.50	21.40	21.50	21.60	22.00	21.30	21.50	21.40	22.00



<WLAN Conducted Power>

General Note:

1. Per KDB 248227 D01v02r02, SAR test reduction is determined according to 802.11 transmission mode configurations and certain exposure conditions with multiple test positions. In the 2.4 GHz band, separate SAR procedures are applied to DSSS and OFDM configurations to simplify DSSS test requirements. For OFDM, in both 2.4 and 5 GHz bands, an initial test configuration must be determined for each standalone and aggregated frequency band, according to the transmission mode configuration with the highest maximum output power specified for production units to perform SAR measurements. If the same highest maximum output power applies to different combinations of channel bandwidths, modulations and data rates, additional procedures are applied to determine which test configurations require SAR measurement. When applicable, an initial test position may be applied to reduce the number of SAR measurements required for next to the ear, UMPC mini-tablet or hotspot mode configurations with multiple test positions.

Report No. : FA640702

- 2. For 2.4 GHz 802.11b DSSS, either the initial test position procedure for multiple exposure test positions or the DSSS procedure for fixed exposure position is applied; these are mutually exclusive. For 2.4 GHz and 5 GHz OFDM configurations, the initial test configuration is applied to measure SAR using either the initial test position procedure for multiple exposure test position configurations or the initial test configuration procedures for fixed exposure test conditions. Based on the reported SAR of the measured configurations and maximum output power of the transmission mode configurations that are not included in the initial test configuration, the subsequent test configuration and initial test position procedures are applied to determine if SAR measurements are required for the remaining OFDM transmission configurations. In general, the number of test channels that require SAR measurement is minimized based on maximum output power measured for the test sample(s).
- 3. For OFDM transmission configurations in the 2.4 GHz and 5 GHz bands, When the same maximum power is specified for multiple transmission modes in a frequency band, the largest channel bandwidth, lowest order modulation, lowest data rate and lowest order 802.11a/g/n/ac mode is used for SAR measurement, on the highest measured output power channel for each frequency band.
- 4. DSSS and OFDM configurations are considered separately according to the required SAR procedures. SAR is measured in the initial test position using the 802.11 transmission mode configuration required by the DSSS procedure or initial test configuration and subsequent test configuration(s) according to the OFDM procedures.18 The initial test position procedure is described in the following:
 - a. When the reported SAR of the initial test position is ≤ 0.4 W/kg, further SAR measurement is not required for the other test positions in that exposure configuration and 802.11 transmission mode combinations within the frequency band or aggregated band.
 - b. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
 - c. For all positions/configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions/configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.

 SPORTON INTERNATIONAL (SHENZHEN) INC.

 TEL: 86-755-8637-9589/ FAX: 86-755-8637-9595
 Issued Date: May 20, 2016

FCC ID : YHLBLUGRAND55HD Page 27 of 45 Form version. : 151208



<2.4GHz WLAN>

	Mode	Channel	Frequency (MHz)	Data Rate	Average power (dBm)	Tune-Up Limit	Duty Cycle %	
		CH 1	2412		<mark>15.39</mark>	15.50		
	802.11b	CH 6	2437	1Mbps	14.62	15.00	100.00	
		CH 11	2462		14.65	15.00		
		CH 1	2412		14.28	14.50		
2.4GHz WLAN	802.11g	CH 6	2437	6Mbps	13.60	14.00	97.91	
		CH 11	2462		13.63	14.00		
		CH 1	2412		12.49	13.00		
	802.11n-HT20	CH 6	2437	MCS0	12.14	12.50	97.32	
		CH 11	2462		11.76	12.00		
		CH 3	2422		10.58	11.00		
	802.11n-HT40	CH 6	2437	MCS0	9.81	10.00	94.77	
		CH 9	2452		10.25	10.50		

Report No.: FA640702

TEL: 86-755-8637-9589/ FAX: 86-755-8637-9595

Issued Date: May 20, 2016 Form version. : 151208 FCC ID: YHLBLUGRAND55HD Page 28 of 45

13. Bluetooth Exclusions Applied

	/lode Band	Average power(dBm)									
IV	noue banu	Bluetooth v3.0+EDR	Bluetooth v4.0 LE								
2.40	GHz Bluetooth	5.5	-2.0								

Note:

1. Per KDB 447498 D01v06, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:

[(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)] $\cdot [\sqrt{f(GHz)}] \le 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR

Report No. : FA640702

- f(GHz) is the RF channel transmit frequency in GHz
- · Power and distance are rounded to the nearest mW and mm before calculation
 - The result is rounded to one decimal place for comparison

Bluetooth Max Power (dBm)	Separation Distance (mm)	Frequency (GHz)	exclusion thresholds
5.5	10	2.48	0.6

Note:


Per KDB 447498 D01v06, when the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion. The test exclusion threshold is 0.6 which is <= 3, SAR testing is not required.

 SPORTON INTERNATIONAL (SHENZHEN) INC.

 TEL: 86-755-8637-9589/ FAX: 86-755-8637-9595
 Issued Date: May 20, 2016

FCC ID : YHLBLUGRAND55HD Page 29 of 45 Form version. : 151208

14. Antenna Location

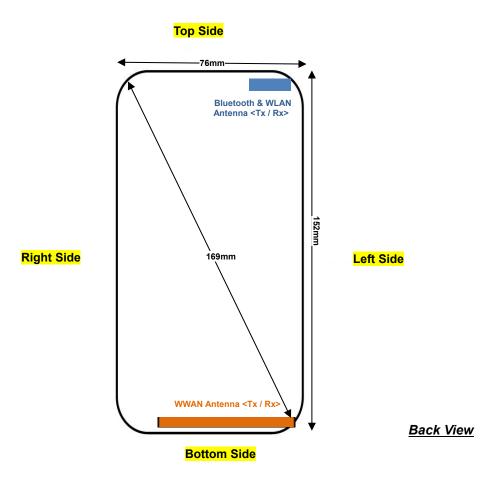

Report No.: FA640702

Distance of the Antenna to the EUT surface/edge															
Antennas	Antennas Back Front Top Side Bottom Side Right Side Left Side														
WWAN Main	WWAN Main ≤ 25mm ≤ 25mm 142mm ≤ 25mm ≤ 25mm ≤ 25mm														
BT&WLAN	≤ 25mm	≤ 25mm	BT&WLAN ≤ 25mm ≤ 25mm 145mm 57mm ≤ 25mm												

	Positions for SAR tests; Hotspot mode													
Antennas	Antennas Back Front Top Side Bottom Side Right Side Left Side													
WWAN Main	WWAN Main Yes Yes No Yes Yes Yes													
BT&WLAN Yes Yes No No Yes														

General Note:

Referring to KDB 941225 D06 v02r01, when the overall device length and width are ≥ 9cm*5cm, the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge

TEL: 86-755-8637-9589/ FAX: 86-755-8637-9595

Issued Date: May 20, 2016 FCC ID: YHLBLUGRAND55HD Page 30 of 45 Form version. : 151208

15. SAR Test Results

General Note:

- 1. Per KDB 447498 D01v06, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.

Report No. : FA640702

- b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
- c. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)*Tune-up Scaling Factor
- d. For WLAN: Reported SAR(W/kg)= Measured SAR(W/kg)* Duty Cycle scaling factor * Tune-up scaling factor
- 2. Per KDB 447498 D01v06, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
 - · ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
 - ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
 - \cdot ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
- Per KDB 865664 D01v01r04, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥0.8W/kg.
- 4. Per KDB 648474 D04v01r03, when the reported SAR for a body-worn accessory measured without a headset connected to the handset is ≤ 1.2 W/kg, SAR testing with a headset connected to the handset is not required.
- 5. Per KDB648474 D04v01r03, for smart phones with a display diagonal dimension > 15.0 cm or an overall diagonal dimension > 16.0 cm, when hotspot mode applies, 10-g extremity SAR is required only for the surfaces and edges with hotspot mode 1-g reported SAR > 1.2 W/kg, however, when power reduction applies to hotspot mode the measured SAR must be scaled to the maximum output power, including tolerance, allowed for phablet modes to compare with the 1.2 W/kg SAR test reduction threshold. All hotspot reported SAR are all less than 1.2W/kg, so no need to evaluate the extremity SAR.

GSM Note:

- 1. Per KDB 941225 D01v03r01, for SAR test reduction for GSM / GPRS / EDGE modes is determined by the source-based time-averaged output power including tune-up tolerance. The mode with highest specified time-averaged output power should be tested for SAR compliance in the applicable exposure conditions. For modes with the same specified maximum output power and tolerance, the higher number time-slot configuration should be tested. Therefore, the GPRS (4Tx slots) for GSM850/GSM1900 is considered as the primary mode.
- Other configurations of GSM / GPRS / EDGE are considered as secondary modes. The 3G SAR test reduction procedure is applied, when the maximum output power and tune-up tolerance specified for production units in a secondary mode is ≤ ¼ dB higher than the primary mode, SAR measurement is not required for the secondary mode.

UMTS Note:

- 1. Per KDB 941225 D01v03r01, for SAR testing is measured using a 12.2 kbps RMC with TPC bits configured to all "1's".
- 2. Per KDB 941225 D01v03r01, RMC 12.2kbps setting is used to evaluate SAR. If the maximum output power and tune-up tolerance specified for production units in HSDPA / HSUPA is ≤ 1/4 dB higher than RMC 12.2Kbps or when the highest reported SAR of the RMC12.2Kbps is scaled by the ratio of specified maximum output power and tune-up tolerance of HSDPA / HSUPA to RMC12.2Kbps and the adjusted SAR is ≤ 1.2 W/kg, SAR measurement is not required for HSDPA / HSUPA.

WLAN Note:

- 1. Per KDB 248227 D01v02r02, for 2.4GHz 802.11g/n SAR testing is not required when the highest reported SAR for DSSS is adjusted by the ratio of OFDM to DSSS specified maximum output power and the adjusted SAR is ≤ 1.2 W/kg.
- 2. When the reported SAR of the test position is > 0.4 W/kg, SAR is repeated for the 802.11 transmission mode configuration tested in the initial test position to measure the subsequent next closet/smallest test separation distance and maximum coupling test position on the highest maximum output power channel, until the report SAR is ≤ 0.8 W/kg or all required test position are tested.
- 3. For all positions / configurations, when the reported SAR is > 0.8 W/kg, SAR is measured for these test positions / configurations on the subsequent next highest measured output power channel(s) until the reported SAR is ≤ 1.2 W/kg or all required channels are tested.
- During SAR testing the WLAN transmission was verified using a spectrum analyzer.

SPORTON INTERNATIONAL (SHENZHEN) INC.TEL: 86-755-8637-9589/ FAX: 86-755-8637-9595



15.1 <u>Head SAR</u>

<GSM SAR>

Plot No.	Band	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS(4 Tx slots)	Right Cheek	128	824.2	29.23	29.50	1.064	0.09	0.278	0.296
	GSM850	GPRS(4 Tx slots)	Right Tilted	128	824.2	29.23	29.50	1.064	0.04	0.144	0.153
	GSM850	GPRS(4 Tx slots)	Left Cheek	128	824.2	29.23	29.50	1.064	0.09	0.241	0.256
	GSM850	GPRS(4 Tx slots)	Left Tilted	128	824.2	29.23	29.50	1.064	0.05	0.141	0.150
	GSM850	GPRS(4 Tx slots)	Right Cheek	189	836.4	29.19	29.50	1.074	0.08	0.292	0.314
01	GSM850	GPRS(4 Tx slots)	Right Cheek	251	848.8	29.15	29.50	1.084	0.04	0.326	<mark>0.353</mark>
	GSM1900	GPRS(4 Tx slots)	Right Cheek	661	1880	26.13	26.50	1.089	0.01	0.189	0.206
	GSM1900	GPRS(4 Tx slots)	Right Tilted	661	1880	26.13	26.50	1.089	0.03	0.127	0.138
02	GSM1900	GPRS(4 Tx slots)	Left Cheek	661	1880	26.13	26.50	1.089	0.05	0.343	0.374
	GSM1900	GPRS(4 Tx slots)	Left Tilted	661	1880	26.13	26.50	1.089	0.01	0.142	0.155
	GSM1900	GPRS(4 Tx slots)	Left Cheek	512	1850.2	26.05	26.50	1.109	0.03	0.310	0.344
	GSM1900	GPRS(4 Tx slots)	Left Cheek	810	1909.8	26.12	26.50	1.091	0.05	0.292	0.319

Report No.: FA640702

TEL: 86-755-8637-9589/ FAX: 86-755-8637-9595

Issued Date: May 20, 2016 Form version. : 151208 FCC ID: YHLBLUGRAND55HD Page 32 of 45



<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA Band V	RMC 12.2Kbps	Right Cheek	4182	836.4	22.61	23.00	1.094	0.04	0.158	0.173
	WCDMA Band V	RMC 12.2Kbps	Right Tilted	4182	836.4	22.61	23.00	1.094	0.02	0.080	0.088
	WCDMA Band V	RMC 12.2Kbps	Left Cheek	4182	836.4	22.61	23.00	1.094	0.14	0.141	0.154
	WCDMA Band V	RMC 12.2Kbps	Left Tilted	4182	836.4	22.61	23.00	1.094	0.07	0.079	0.086
	WCDMA Band V	RMC 12.2Kbps	Right Cheek	4132	826.4	22.50	23.00	1.122	0.04	0.141	0.158
03	WCDMA Band V	RMC 12.2Kbps	Right Cheek	4233	846.6	22.57	23.00	1.104	0.06	0.174	<mark>0.192</mark>
	WCDMA Band IV	RMC 12.2Kbps	Right Cheek	1312	1712.4	22.71	23.50	1.199	0.05	0.114	0.137
	WCDMA Band IV	RMC 12.2Kbps	Right Tilted	1312	1712.4	22.71	23.50	1.199	0.05	0.106	0.127
	WCDMA Band IV	RMC 12.2Kbps	Left Cheek	1312	1712.4	22.71	23.50	1.199	0.09	0.271	0.325
	WCDMA Band IV	RMC 12.2Kbps	Left Tilted	1312	1712.4	22.71	23.50	1.199	0.02	0.091	0.109
	WCDMA Band IV	RMC 12.2Kbps	Left Cheek	1413	1732.6	22.70	23.50	1.202	0.03	0.288	0.346
04	WCDMA Band IV	RMC 12.2Kbps	Left Cheek	1513	1752.6	22.66	23.50	1.213	0.01	0.321	<mark>0.389</mark>
	WCDMA Band II	RMC 12.2Kbps	Right Cheek	9400	1880	22.62	23.00	1.091	0.05	0.168	0.183
	WCDMA Band II	RMC 12.2Kbps	Right Tilted	9400	1880	22.62	23.00	1.091	0.11	0.110	0.120
	WCDMA Band II	RMC 12.2Kbps	Left Cheek	9400	1880	22.62	23.00	1.091	0.02	0.315	0.344
	WCDMA Band II	RMC 12.2Kbps	Left Tilted	9400	1880	22.62	23.00	1.091	0.07	0.127	0.139
05	WCDMA Band II	RMC 12.2Kbps	Left Cheek	9262	1852.4	22.61	23.00	1.094	0.03	0.326	0.357
	WCDMA Band II	RMC 12.2Kbps	Left Cheek	9538	1907.6	22.43	23.00	1.140	0.02	0.283	0.323

Report No.: FA640702

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
06	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	1	2412	15.39	15.50	1.026	100	1.000	-0.06	0.355	<mark>0.364</mark>
	WLAN2.4GHz	802.11b 1Mbps	Right Tilted	1	2412	15.39	15.50	1.026	100	1.000	0.03	0.344	0.353
	WLAN2.4GHz	802.11b 1Mbps	Left Cheek	1	2412	15.39	15.50	1.026	100	1.000	0.03	0.127	0.130
	WLAN2.4GHz	802.11b 1Mbps	Left Tilted	1	2412	15.39	15.50	1.026	100	1.000	0.05	0.111	0.114
	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	6	2437	14.62	15.00	1.091	100	1.000	0.05	0.223	0.243
	WLAN2.4GHz	802.11b 1Mbps	Right Cheek	11	2462	14.65	15.00	1.084	100	1.000	0.04	0.134	0.145

TEL: 86-755-8637-9589/ FAX: 86-755-8637-9595

Issued Date: May 20, 2016 Form version. : 151208 FCC ID: YHLBLUGRAND55HD Page 33 of 45



15.2 Hotspot SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS(4 Tx slots)	Front	10	128	824.2	29.23	29.50	1.064	-0.01	0.294	0.313
	GSM850	GPRS(4 Tx slots)	Back	10	128	824.2	29.23	29.50	1.064	0.03	0.459	0.488
	GSM850	GPRS(4 Tx slots)	Left Side	10	128	824.2	29.23	29.50	1.064	0.01	0.312	0.332
	GSM850	GPRS(4 Tx slots)	Right Side	10	128	824.2	29.23	29.50	1.064	0.07	0.397	0.422
	GSM850	GPRS(4 Tx slots)	Bottom Side	10	128	824.2	29.23	29.50	1.064	-0.03	0.120	0.128
	GSM850	GPRS(4 Tx slots)	Back	10	189	836.4	29.19	29.50	1.074	0.04	0.484	0.520
07	GSM850	GPRS(4 Tx slots)	Back	10	251	848.8	29.15	29.50	1.084	0.02	0.524	<mark>0.568</mark>
	GSM1900	GPRS(4 Tx slots)	Front	10	661	1880	26.13	26.50	1.089	0.1	0.534	0.581
08	GSM1900	GPRS(4 Tx slots)	Back	10	661	1880	26.13	26.50	1.089	0.02	0.659	<mark>0.718</mark>
	GSM1900	GPRS(4 Tx slots)	Left Side	10	661	1880	26.13	26.50	1.089	-0.06	0.568	0.619
	GSM1900	GPRS(4 Tx slots)	Right Side	10	661	1880	26.13	26.50	1.089	-0.07	0.213	0.232
	GSM1900	GPRS(4 Tx slots)	Bottom Side	10	661	1880	26.13	26.50	1.089	0.03	0.585	0.637
	GSM1900	GPRS(4 Tx slots)	Back	10	512	1850.2	26.05	26.50	1.109	0.01	0.574	0.637
	GSM1900	GPRS(4 Tx slots)	Back	10	810	1909.8	26.12	26.50	1.091	-0.12	0.540	0.589

Report No. : FA640702

TEL: 86-755-8637-9589/ FAX: 86-755-8637-9595

Issued Date: May 20, 2016 Form version. : 151208 FCC ID: YHLBLUGRAND55HD Page 34 of 45



SPORTON LAB. FCC SAR Test Report

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA Band V	RMC 12.2Kbps	Front	10	4182	836.4	22.61	23.00	1.094	-0.06	0.148	0.162
	WCDMA Band V	RMC 12.2Kbps	Back	10	4182	836.4	22.61	23.00	1.094	0.09	0.255	0.279
	WCDMA Band V	RMC 12.2Kbps	Left Side	10	4182	836.4	22.61	23.00	1.094	-0.02	0.153	0.167
	WCDMA Band V	RMC 12.2Kbps	Right Side	10	4182	836.4	22.61	23.00	1.094	0.01	0.219	0.240
	WCDMA Band V	RMC 12.2Kbps	Bottom Side	10	4182	836.4	22.61	23.00	1.094	-0.05	0.087	0.095
	WCDMA Band V	RMC 12.2Kbps	Back	10	4132	826.4	22.50	23.00	1.122	-0.07	0.229	0.257
09	WCDMA Band V	RMC 12.2Kbps	Back	10	4233	846.6	22.57	23.00	1.104	0.06	0.272	0.300
	WCDMA Band IV	RMC 12.2Kbps	Front	10	1312	1712.4	22.71	23.50	1.199	0.03	0.313	0.375
	WCDMA Band IV	RMC 12.2Kbps	Back	10	1312	1712.4	22.71	23.50	1.199	0.07	0.416	0.499
	WCDMA Band IV	RMC 12.2Kbps	Left Side	10	1312	1712.4	22.71	23.50	1.199	0.14	0.289	0.347
	WCDMA Band IV	RMC 12.2Kbps	Right Side	10	1312	1712.4	22.71	23.50	1.199	0.06	0.080	0.096
	WCDMA Band IV	RMC 12.2Kbps	Bottom Side	10	1312	1712.4	22.71	23.50	1.199	0.01	0.235	0.282
	WCDMA Band IV	RMC 12.2Kbps	Back	10	1413	1732.6	22.70	23.50	1.202	0.06	0.353	0.424
10	WCDMA Band IV	RMC 12.2Kbps	Back	10	1513	1752.6	22.66	23.50	1.213	0.09	0.421	<mark>0.511</mark>
	WCDMA Band II	RMC 12.2Kbps	Front	10	9400	1880	22.62	23.00	1.091	-0.02	0.462	0.504
11	WCDMA Band II	RMC 12.2Kbps	Back	10	9400	1880	22.62	23.00	1.091	-0.08	0.569	<mark>0.621</mark>
	WCDMA Band II	RMC 12.2Kbps	Left Side	10	9400	1880	22.62	23.00	1.091	-0.04	0.496	0.541
	WCDMA Band II	RMC 12.2Kbps	Right Side	10	9400	1880	22.62	23.00	1.091	-0.01	0.182	0.199
	WCDMA Band II	RMC 12.2Kbps	Bottom Side	10	9400	1880	22.62	23.00	1.091	-0.01	0.549	0.599
	WCDMA Band II	RMC 12.2Kbps	Back	10	9262	1852.4	22.61	23.00	1.094	0.02	0.532	0.582
	WCDMA Band II	RMC 12.2Kbps	Back	10	9538	1907.6	22.43	23.00	1.140	-0.04	0.538	0.613

Report No.: FA640702

TEL: 86-755-8637-9589/ FAX: 86-755-8637-9595

Issued Date: May 20, 2016 Form version. : 151208 FCC ID: YHLBLUGRAND55HD Page 35 of 45



<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	10	1	2412	15.39	15.50	1.026	100	1.000	-0.03	0.055	0.056
12	WLAN2.4GHz	802.11b 1Mbps	Back	10	1	2412	15.39	15.50	1.026	100	1.000	-0.05	0.072	0.074
	WLAN2.4GHz	802.11b 1Mbps	Left Side	10	1	2412	15.39	15.50	1.026	100	1.000	0.06	0.036	0.037
	WLAN2.4GHz	802.11b 1Mbps	Top Side	10	1	2412	15.39	15.50	1.026	100	1.000	0.03	0.058	0.059
	WLAN2.4GHz	802.11b 1Mbps	Back	10	6	2437	14.62	15.00	1.091	100	1.000	-0.05	0.037	0.040
	WLAN2.4GHz	802.11b 1Mbps	Back	10	11	2462	14.65	15.00	1.084	100	1.000	0.09	0.020	0.022

Issued Date : May 20, 2016 Form version. : 151208

Report No.: FA640702



15.3 Body Worn Accessory SAR

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS(4 Tx slots)	Front	10	128	824.2	29.23	29.50	1.064	-0.01	0.294	0.313
	GSM850	GPRS(4 Tx slots)	Back	10	128	824.2	29.23	29.50	1.064	0.03	0.459	0.488
	GSM850	GPRS(4 Tx slots)	Back	10	189	836.4	29.19	29.50	1.074	0.04	0.484	0.520
07	GSM850	GPRS(4 Tx slots)	Back	10	251	848.8	29.15	29.50	1.084	0.02	0.524	<mark>0.568</mark>
	GSM1900	GPRS(4 Tx slots)	Front	10	661	1880	26.13	26.50	1.089	0.1	0.534	0.581
08	GSM1900	GPRS(4 Tx slots)	Back	10	661	1880	26.13	26.50	1.089	0.02	0.659	<mark>0.718</mark>
	GSM1900	GPRS(4 Tx slots)	Back	10	512	1850.2	26.05	26.50	1.109	0.01	0.574	0.637
	GSM1900	GPRS(4 Tx slots)	Back	10	810	1909.8	26.12	26.50	1.091	-0.12	0.540	0.589

Report No. : FA640702

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA Band V	RMC 12.2Kbps	Front	10	4182	836.4	22.61	23.00	1.094	-0.06	0.148	0.162
	WCDMA Band V	RMC 12.2Kbps	Back	10	4182	836.4	22.61	23.00	1.094	0.09	0.255	0.279
	WCDMA Band V	RMC 12.2Kbps	Back	10	4132	826.4	22.50	23.00	1.122	-0.07	0.229	0.257
09	WCDMA Band V	RMC 12.2Kbps	Back	10	4233	846.6	22.57	23.00	1.104	0.06	0.272	<mark>0.300</mark>
	WCDMA Band IV	RMC 12.2Kbps	Front	10	1312	1712.4	22.71	23.50	1.199	0.03	0.313	0.375
	WCDMA Band IV	RMC 12.2Kbps	Back	10	1312	1712.4	22.71	23.50	1.199	0.07	0.416	0.499
	WCDMA Band IV	RMC 12.2Kbps	Back	10	1413	1732.6	22.70	23.50	1.202	0.06	0.353	0.424
10	WCDMA Band IV	RMC 12.2Kbps	Back	10	1513	1752.6	22.66	23.50	1.213	0.09	0.421	<mark>0.511</mark>
	WCDMA Band II	RMC 12.2Kbps	Front	10	9400	1880	22.62	23.00	1.091	-0.02	0.462	0.504
11	WCDMA Band II	RMC 12.2Kbps	Back	10	9400	1880	22.62	23.00	1.091	-0.08	0.569	0.621
	WCDMA Band II	RMC 12.2Kbps	Back	10	9262	1852.4	22.61	23.00	1.094	0.02	0.532	0.582
	WCDMA Band II	RMC 12.2Kbps	Back	10	9538	1907.6	22.43	23.00	1.140	-0.04	0.538	0.613

TEL: 86-755-8637-9589/ FAX: 86-755-8637-9595

Issued Date: May 20, 2016 Form version. : 151208 FCC ID: YHLBLUGRAND55HD Page 37 of 45



<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (mm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle %	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b 1Mbps	Front	10	1	2412	15.39	15.50	1.026	100	1.000	-0.03	0.055	0.056
12	WLAN2.4GHz	802.11b 1Mbps	Back	10	1	2412	15.39	15.50	1.026	100	1.000	-0.05	0.072	<mark>0.074</mark>
	WLAN2.4GHz	802.11b 1Mbps	Back	10	6	2437	14.62	15.00	1.091	100	1.000	-0.05	0.037	0.040
	WLAN2.4GHz	802.11b 1Mbps	Back	10	11	2462	14.65	15.00	1.084	100	1.000	0.09	0.020	0.022

Report No.: FA640702

16. Simultaneous Transmission Analysis

NO.	Circultana and Transmission Confirmations	Р	ortable Handse	et	- Note	
NO.	Simultaneous Transmission Configurations	Head	Body-worn	Hotspot	Note	
1.	GSM Voice + WLAN2.4GHz	Yes	Yes			
2.	GPRS/EDGE + WLAN2.4GHz	Yes	Yes	Yes	Hotspot	
3.	WCDMA + WLAN2.4GHz	Yes	Yes	Yes	Hotspot	
4.	GSM Voice + Bluetooth		Yes			
5.	GPRS/EDGE + Bluetooth		Yes		WWAN VoIP	
6.	WCDMA+ Bluetooth		Yes		WWAN VoIP	

Report No. : FA640702

General Note:

- 1. This device supported VoIP in GPRS, EGPRS and WCDMA (e.g. 3rd party VoIP).
- 2. EUT will choose either GSM or WCDMA according to the network signal condition; therefore, they will not operate simultaneously at any moment.
- 3. WLAN and Bluetooth share the same antenna, and cannot transmit simultaneously.
- 4. This device 2.4GHz WLAN supports Hotspot operation.
- 5. The Scaled SAR summation is calculated based on the same configuration and test position.
- 6. Per KDB 447498 D01v06, simultaneous transmission SAR is compliant if,
 - i) Scalar SAR summation < 1.6W/kg.
 - ii) SPLSR = $(SAR_1 + SAR_2)^{1.5} / (min. separation distance, mm)$, and the peak separation distance is determined from the square root of $[(x_1-x_2)^2 + (y_1-y_2)^2 + (z_1-z_2)^2]$, where (x_1, y_1, z_1) and (x_2, y_2, z_2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
 - iii) If SPLSR ≤ 0.04, simultaneously transmission SAR measurement is not necessary.
 - iv) Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.
- 7. For simultaneous transmission analysis, Bluetooth SAR is estimated per KDB 447498 D01v06 based on the formula below.
 - i) (max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)]·[$\sqrt{f(GHz)/x}$] W/kg for test separation distances \leq 50 mm; where x = 7.5 for 1-g SAR, and x = 18.75 for 10-g SAR.
 - ii) When the minimum separation distance is < 5mm, the distance is used 5mm to determine SAR test exclusion.
 - iii) 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is > 50 mm.

Bluetooth	Exposure Position	Body worn		
Max Power	Test separation	10 mm		
5.5 dBm	Estimated SAR (W/kg)	0.084 W/kg		

 SPORTON INTERNATIONAL (SHENZHEN) INC.

 TEL: 86-755-8637-9589/ FAX: 86-755-8637-9595
 Issued Date: May 20, 2016

FCC ID: YHLBLUGRAND55HD Page 39 of 45 Form version.: 151208

16.1 <u>Head Exposure Conditions</u>

			1	2		
WWA	AN Band	Exposure Position	WWAN	2.4GHz WLAN	1+2 Summed	
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	
		Right Cheek	0.353	0.364	0.72	
	GSM850	Right Tilted	0.153	0.353	0.51	
	GSIVIOOU	Left Cheek	0.256	0.130	0.39	
GSM		Left Tilted	0.150	0.114	0.26	
GSW	GSM1900	Right Cheek	0.206	0.364	0.57	
		Right Tilted	0.138	0.353	0.49	
		Left Cheek	k 0.374 0.1		0.50	
		Left Tilted	0.155	0.114	0.27	
		Right Cheek	0.192	0.364	0.56	
	Band V	Right Tilted	0.088	0.353	0.44	
		Left Cheek	0.154	0.130	0.28	
		Left Tilted	0.086	0.114	0.20	
		Right Cheek	0.137	0.364	0.50	
WCDMA	Dand IV	Right Tilted	0.127	0.353	0.48	
WCDIMA	Band IV	Left Cheek	0.389	0.130	0.52	
		Left Tilted	0.109	0.114	0.22	
		Right Cheek	0.183	0.364	0.55	
	Dand II	Right Tilted	0.120	0.353	0.47	
	Band II	Left Cheek	0.357	0.130	0.49	
		Left Tilted	0.139	0.114	0.25	

Report No.: FA640702

TEL: 86-755-8637-9589/ FAX: 86-755-8637-9595

Issued Date: May 20, 2016 Form version. : 151208 FCC ID: YHLBLUGRAND55HD Page 40 of 45

16.2 Hotspot Exposure Conditions

			1	2		
WWA	N Band	Exposure Position	WWAN	2.4GHz WLAN	1+2 Summed	
			1g SAR (W/kg)	1g SAR (W/kg)	1g SAR (W/kg)	
		Front	0.313	0.056	0.37	
		Back	0.568	0.074	0.64	
	GSM850	Left side	0.332	0.037	0.37	
	CONICOU	Right side	0.422		0.42	
		Top side		0.059	0.06	
GSM		Bottom side	0.128		0.13	
OSIVI		Front	0.581	0.056	0.64	
		Back	0.718	0.074	<mark>0.79</mark>	
	GSM1900	Left side	0.619	0.037	0.66	
	GSM1900	Right side	0.232		0.23	
		Top side		0.059	0.06	
		Bottom side	0.637		0.64	
		Front	0.162	0.056	0.22	
		Back	0.300	0.074	0.37	
	Band V	Left side	0.167	0.037	0.20	
	Dallu V	Right side	0.240		0.24	
		Top side		0.059	0.06	
		Bottom side	0.095		0.10	
		Front	0.375	0.056	0.43	
		Back	0.511	0.074	0.59	
MCDMA	Dand IV	Left side	0.347	0.037	0.38	
WCDMA	Band IV	Right side	0.096		0.10	
		Top side		0.059	0.06	
		Bottom side	0.282		0.28	
		Front	0.504	0.056	0.56	
		Back	0.621	0.074	0.70	
	Day d II	Left side	0.541	0.037	0.58	
	Band II	Right side	0.199		0.20	
		Top side		0.059	0.06	
		Bottom side	0.599		0.60	

Report No. : FA640702

TEL: 86-755-8637-9589/ FAX: 86-755-8637-9595

Issued Date: May 20, 2016 Form version. : 151208 FCC ID: YHLBLUGRAND55HD Page 41 of 45



16.3 <u>Body-Worn Accessory Exposure Conditions</u>

			1	2	3		1+3
WWA	WWAN Band		WWAN	2.4GHz WLAN	Bluetooth	1+2 Summed	Summed 1g SAR
			1g SAR (W/kg)	1g SAR (W/kg)	Estimated 1g SAR (W/kg)	1g SAR (W/kg)	(W/kg)
	GSM850	Front	0.313	0.056	0.084	0.37	0.40
GSM	GSIVIOSU	Back	0.568	0.074	0.084	0.64	0.65
GSIVI	GSM1900	Front	0.581	0.056	0.084	0.64	0.67
		Back	0.718	0.074	0.084	0.79	0.80
	Band V	Front	0.162	0.056	0.084	0.22	0.25
		Back	0.300	0.074	0.084	0.37	0.38
WCDMA	Band IV	Front	0.375	0.056	0.084	0.43	0.46
WCDMA	Dallu IV	Back	0.511	0.074	0.084	0.59	0.60
	Donal II	Front	0.504	0.056	0.084	0.56	0.59
	Band II	Back	0.621	0.074	0.084	0.70	0.71

Test Engineer: Luke Lu

TEL : 86-755-8637-9589/ FAX : 86-755-8637-9595
FCC ID : YHLBLUGRAND55HD Page 42 of 45

Issued Date : May 20, 2016 Form version. : 151208

Report No. : FA640702

17. Uncertainty Assessment

The component of uncertainly may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainly by the statistical analysis of a series of observations is termed a Type An evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

Report No.: FA640702

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience, and knowledge of the behavior and properties of relevant materials and instruments, manufacture's specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in table below.

Uncertainty Distributions	Normal	Rectangular	Triangular	U-Shape
Multi-plying Factor ^(a)	1/k ^(b)	1/√3	1/√6	1/√2

- (a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity
- (b) κ is the coverage factor

Table 17.1. Standard Uncertainty for Assumed Distribution

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual "root-sum-squares" (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is shown in the following tables.

TEL: 86-755-8637-9589/ FAX: 86-755-8637-9595 Issued Date: May 20, 2016 FCC ID: YHLBLUGRAND55HD Page 43 of 45 Form version.: 151208

Error Description	Uncertainty Value (±%)	Probability	Divisor	(Ci) 1g	(Ci) 10g	Standard Uncertainty (1g) (±%)	Standard Uncertainty (10g) (±%)
Measurement System							
Probe Calibration	6.0	N	1	1	1	6.0	6.0
Axial Isotropy	4.7	R	1.732	0.7	0.7	1.9	1.9
Hemispherical Isotropy	9.6	R	1.732	0.7	0.7	3.9	3.9
Boundary Effects	1.0	R	1.732	1	1	0.6	0.6
Linearity	4.7	R	1.732	1	1	2.7	2.7
System Detection Limits	1.0	R	1.732	1	1	0.6	0.6
Modulation Response	3.2	R	1.732	1	1	1.8	1.8
Readout Electronics	0.3	N	1	1	1	0.3	0.3
Response Time	0.0	R	1.732	1	1	0.0	0.0
Integration Time	2.6	R	1.732	1	1	1.5	1.5
RF Ambient Noise	3.0	R	1.732	1	1	1.7	1.7
RF Ambient Reflections	3.0	R	1.732	1	1	1.7	1.7
Probe Positioner	0.4	R	1.732	1	1	0.2	0.2
Probe Positioning	2.9	R	1.732	1	1	1.7	1.7
Max. SAR Eval.	2.0	R	1.732	1	1	1.2	1.2
Test Sample Related							
Device Positioning	3.0	N	1	1	1	3.0	3.0
Device Holder	3.6	N	1	1	1	3.6	3.6
Power Drift	5.0	R	1.732	1	1	2.9	2.9
Power Scaling	0.0	R	1.732	1	1	0.0	0.0
Phantom and Setup							
Phantom Uncertainty	6.1	R	1.732	1	1	3.5	3.5
SAR correction	0.0	R	1.732	1	0.84	0.0	0.0
Liquid Conductivity Repeatability	0.2	N	1	0.78	0.71	0.1	0.1
Liquid Conductivity (target)	5.0	R	1.732	0.78	0.71	2.3	2.0
Liquid Conductivity (mea.)	2.5	R	1.732	0.78	0.71	1.1	1.0
Temp. unc Conductivity	3.4	R	1.732	0.78	0.71	1.5	1.4
Liquid Permittivity Repeatability	0.15	N	1	0.23	0.26	0.0	0.0
Liquid Permittivity (target)	5.0	R	1.732	0.23	0.26	0.7	0.8
Liquid Permittivity (mea.)	2.5	R	1.732	0.23	0.26	0.3	0.4
Temp. unc Permittivity	0.83	R	1.732	0.23	0.26	0.1	0.1
Cor	mbined Std. Un	certainty				11.4%	11.4%
Co	verage Factor	for 95 %				K=2	K=2
Exp	anded STD Un	certainty				22.9%	22.7%

Report No. : FA640702

Table 17.2. Uncertainty Budget for frequency range 300 MHz to 3 GHz

TEL: 86-755-8637-9589/ FAX: 86-755-8637-9595

Issued Date: May 20, 2016 Form version. : 151208 FCC ID: YHLBLUGRAND55HD Page 44 of 45

18. References

[1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"

Report No. : FA640702

- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2013, "IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", Sep 2013
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v02r02, "SAR Guidance for IEEE 802.11 (WiFi) Transmitters", Oct 2015.
- [6] FCC KDB 447498 D01 v06, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Oct 2015
- [7] FCC KDB 648474 D04 v01r03, "SAR Evaluation Considerations for Wireless Handsets", Oct 2015.
- [8] FCC KDB 941225 D01 v03r01, "3G SAR MEAUREMENT PROCEDURES", Oct 2015
- [9] FCC KDB 941225 D06 v02r01, "SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities", Oct 2015.
- [10] FCC KDB 865664 D01 v01r04, "SAR Measurement Requirements for 100 MHz to 6 GHz", Aug 2015.
- [11] FCC KDB 865664 D02 v01r02, "RF Exposure Compliance Reporting and Documentation Considerations" Oct 2015.

Appendix A. Plots of System Performance Check

Report No.: FA640702

The plots are shown as follows.

SPORTON INTERNATIONAL (SHENZHEN) INC.

#System Check_Head_835MHz_160413

DUT: D835V2-SN:4d162

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1 Medium: HSL_835_160413 Medium parameters used: f = 835 MHz; σ = 0.897 S/m; ϵ_r = 41.605; ρ = 1000 kg/m³

Date: 2016.4.13

Ambient Temperature: 23.5 $^{\circ}$ C; Liquid Temperature: 22.9 $^{\circ}$ C


DASY5 Configuration:

- Probe: EX3DV4 SN3935; ConvF(10.15, 10.15, 10.15); Calibrated: 2015.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2015.11.23
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 3.09 W/kg

Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 60.14 V/m; Power Drift = -0.03 dB Peak SAR (extrapolated) = 3.43 W/kg SAR(1 g) = 2.36 W/kg; SAR(10 g) = 1.56 W/kg

Maximum value of SAR (measured) = 2.97 W/kg

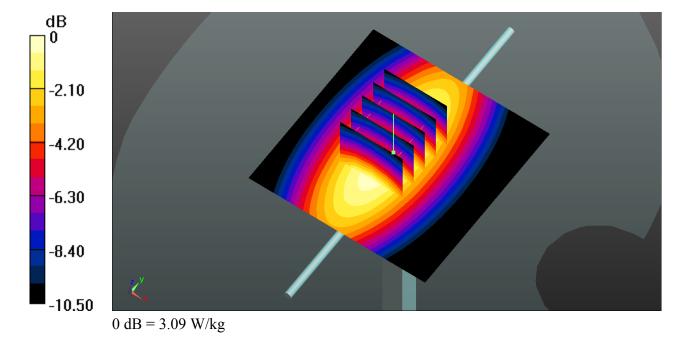

System Check_Head_1750MHz_160412

DUT: D1750V2-SN:1137

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1 Medium: HSL_1800_160412 Medium parameters used: f = 1750 MHz; $\sigma = 1.378$ S/m; $\epsilon_r = 41.34$; $\rho = 1000$ kg/m³

Date: 2016.4.12

Ambient Temperature: 23.5 $^{\circ}$ C; **Liquid Temperature**: 22.7 $^{\circ}$ C


DASY5 Configuration:

- Probe: EX3DV4 SN3935; ConvF(8.69, 8.69, 8.69); Calibrated: 2015.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2015.11.23
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 12.4 W/kg

Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 97.32 V/m; Power Drift = -0.02 dB Peak SAR (extrapolated) = 15.3 W/kg SAR(1 g) = 8.63 W/kg; SAR(10 g) = 4.65 W/kg

Maximum value of SAR (measured) = 12.2 W/kg

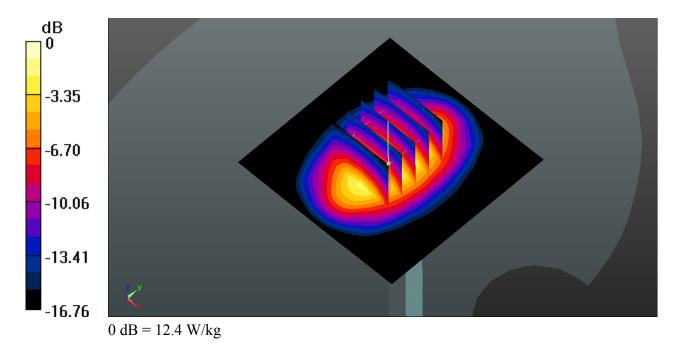

#System Check_Head_1900MHz_160412

DUT: D1900V2-SN:5d182

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1 Medium: HSL_1900_160412 Medium parameters used: f = 1900 MHz; $\sigma = 1.417$ S/m; $\epsilon_r = 40.994$; $\rho = 1000$ kg/m³

Date: 2016.4.12

Ambient Temperature: 23.5 $^{\circ}$ C; Liquid Temperature: 22.6 $^{\circ}$ C


DASY5 Configuration:

- Probe: EX3DV4 SN3935; ConvF(8.37, 8.37, 8.37); Calibrated: 2015.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2015.11.23
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 14.0 W/kg

Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 99.99 V/m; Power Drift = 0.02 dB Peak SAR (extrapolated) = 17.7 W/kg SAR(1 g) = 9.63 W/kg; SAR(10 g) = 5 W/kg

Maximum value of SAR (measured) = 13.8 W/kg

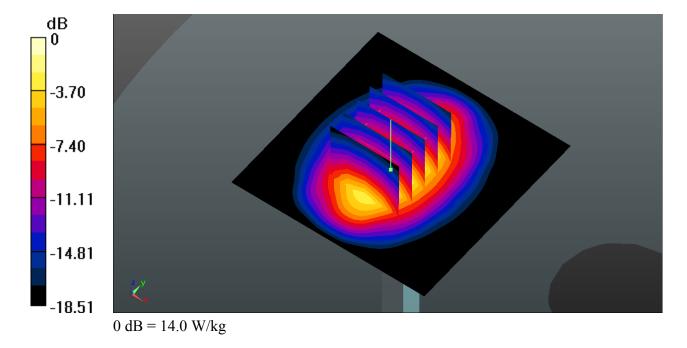

#System Check_Head_2450MHz_160413

DUT: D2450V2-SN:924

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1 Medium: HSL_2450_160413 Medium parameters used: f = 2450 MHz; σ = 1.878 S/m; ϵ_r = 40.464; ρ = 1000 kg/m³

Date: 2016.4.13


Ambient Temperature: 23.2 $^{\circ}$ C; Liquid Temperature: 22.8 $^{\circ}$ C

DASY5 Configuration:

- Probe: EX3DV4 SN3935; ConvF(7.49, 7.49, 7.49); Calibrated: 2015.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2015.11.23
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (81x81x1): Interpolated grid: dx=12mm, dy=12mm Maximum value of SAR (interpolated) = 20.2 W/kg

Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 90.83 V/m; Power Drift = 0.04 dB Peak SAR (extrapolated) = 26.7 W/kg SAR(1 g) = 13.6 W/kg; SAR(10 g) = 6.46 W/kg Maximum value of SAR (measured) = 20.3 W/kg

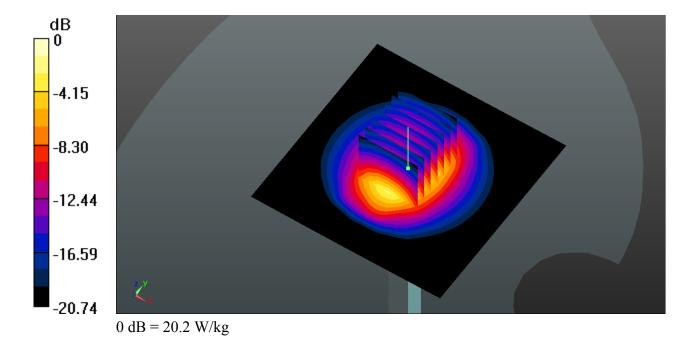

#System Check_Body_835MHz_160411

DUT: D835V2-SN:4d162

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1 Medium: MSL_835_160411 Medium parameters used: f = 835 MHz; $\sigma = 1$ S/m; $\epsilon_r = 54.086$; $\rho = 1$

Date: 2016.4.11

 1000 kg/m^3

Ambient Temperature: 23.3 $^{\circ}$ C; Liquid Temperature: 22.5 $^{\circ}$ C


DASY5 Configuration:

- Probe: EX3DV4 SN3935; ConvF(10.3, 10.3, 10.3); Calibrated: 2015.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2015.11.23
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 3.03 W/kg

Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 56.43 V/m; Power Drift = -0.03 dB Peak SAR (extrapolated) = 3.49 W/kg

SAR(1 g) = 2.41 W/kg; SAR(10 g) = 1.6 W/kgMaximum value of SAR (measured) = 3.02 W/kg

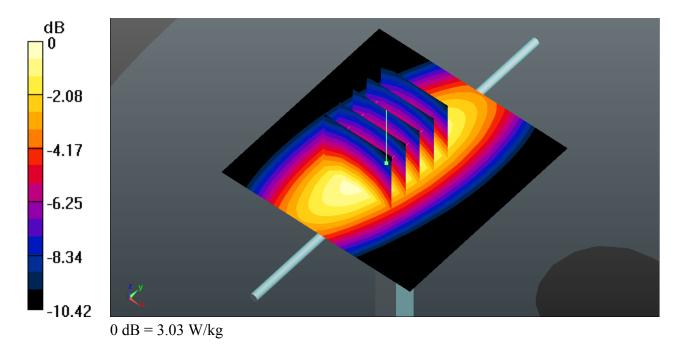

#System Check_Body_1750MHz_160412

DUT: D1750V2-SN:1137

Communication System: UID 0, CW; Frequency: 1750 MHz; Duty Cycle: 1:1 Medium: MSL_1800_160412 Medium parameters used: f = 1750 MHz; $\sigma = 1.529$ S/m; $\epsilon_r = 52.044$; $\rho = 1000$ kg/m³

Date: 2016.4.12

Ambient Temperature: 23.4 $^{\circ}$ C; Liquid Temperature: 22.8 $^{\circ}$ C


DASY5 Configuration:

- Probe: EX3DV4 SN3935; ConvF(8.24, 8.24, 8.24); Calibrated: 2015.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2015.11.23
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 13.2 W/kg

Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 94.03 V/m; Power Drift = -0.03 dB Peak SAR (extrapolated) = 16.1 W/kg SAR(1 g) = 9.17 W/kg; SAR(10 g) = 4.91 W/kg

Maximum value of SAR (measured) = 12.9 W/kg

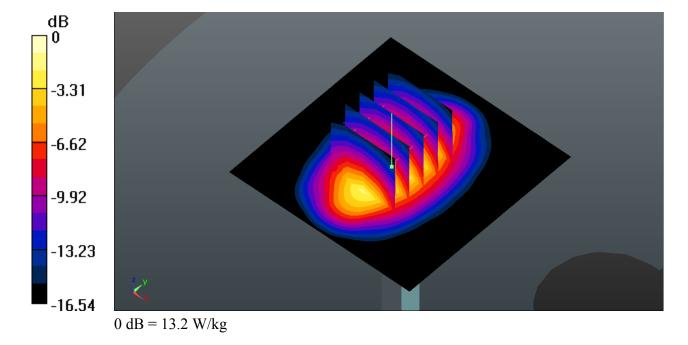

#System Check_Body_1900MHz_160412

DUT: D1900V2-SN:5d182

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1 Medium: MSL_1900_160412 Medium parameters used: f = 1900 MHz; $\sigma = 1.531$ S/m; $\epsilon_r = 54.671$; $\rho = 1000$ kg/m³

Date: 2016.4.12

Ambient Temperature: 23.4 $^{\circ}$ C; Liquid Temperature: 22.7 $^{\circ}$ C


DASY5 Configuration:

- Probe: EX3DV4 SN3935; ConvF(7.99, 7.99, 7.99); Calibrated: 2015.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2015.11.23
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 14.4 W/kg

Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 86.32 V/m; Power Drift = -0.09 dB Peak SAR (extrapolated) = 17.9 W/kg SAR(1 g) = 9.87 W/kg; SAR(10 g) = 5.09 W/kg

Maximum value of SAR (measured) = 14.2 W/kg

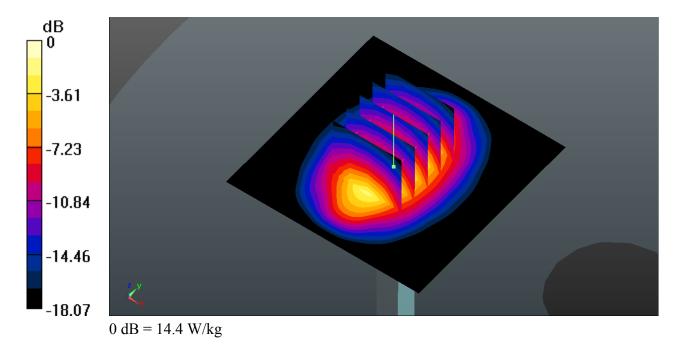

#System Check_Body_2450MHz_160413

DUT: D2450V2-SN:924

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1 Medium: MSL_2450_160413 Medium parameters used: f = 2450 MHz; $\sigma = 1.949$ S/m; $\epsilon_r = 51.667$; $\rho = 1000$ kg/m³

Date: 2016.4.13

Ambient Temperature: 23.2 °C ; **Liquid Temperature**: 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 SN3935; ConvF(7.55, 7.55, 7.55); Calibrated: 2015.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2015.11.23
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Pin=250mW/Area Scan (81x81x1): Interpolated grid: dx=12mm, dy=12mm Maximum value of SAR (interpolated) = 19.3 W/kg

Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 86.70 V/m; Power Drift = 0.17 dB Peak SAR (extrapolated) = 25.6 W/kg SAR(1 g) = 13 W/kg; SAR(10 g) = 6.19 W/kg

Maximum value of SAR (measured) = 19.5 W/kg

-4.10 -8.21 -16.42 -20.52 0 dB = 19.3 W/kg

Appendix B. Plots of High SAR Measurement

Report No.: FA640702

The plots are shown as follows.

SPORTON INTERNATIONAL (SHENZHEN) INC.

01_GSM850_GPRS(4 Tx slots)_Right Cheek_Ch251

Communication System: UID 0, GPRS/EDGE12 (0); Frequency: 848.8 MHz; Duty Cycle: 1:2.08 Medium: HSL_835_160413 Medium parameters used: f = 848.8 MHz; $\sigma = 0.905$ S/m; $\epsilon_r = 41.32$; $\rho = 1000$ kg/m³

Date: 2016.4.13


Ambient Temperature: 23.5 $^{\circ}$ C; Liquid Temperature: 22.9 $^{\circ}$ C

DASY5 Configuration:

- Probe: EX3DV4 SN3935; ConvF(10.15, 10.15, 10.15); Calibrated: 2015.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2015.11.23
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch251/Area Scan (71x121x1): Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 0.369 W/kg

Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 1.662 V/m; Power Drift = 0.04 dB Peak SAR (extrapolated) = 0.392 W/kg SAR(1 g) = 0.326 W/kg; SAR(10 g) = 0.256 W/kg Maximum value of SAR (measured) = 0.366 W/kg

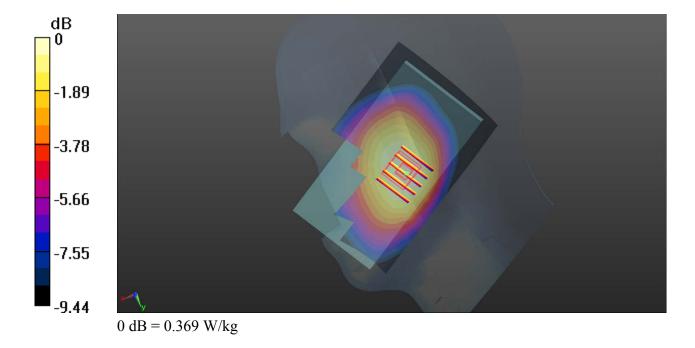

Communication System: UID 0, GPRS/EDGE12 (0); Frequency: 1880 MHz; Duty Cycle: 1:2.08 Medium: HSL_1900_160412 Medium parameters used: f = 1880 MHz; $\sigma = 1.392$ S/m; $\epsilon_r = 41.101$; $\rho = 1000$ kg/m³

Date: 2016.4.12


Ambient Temperature: 23.5 $^{\circ}$ C; Liquid Temperature: 22.6 $^{\circ}$ C

DASY5 Configuration:

- Probe: EX3DV4 SN3935; ConvF(8.37, 8.37, 8.37); Calibrated: 2015.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2015.11.23
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch661/Area Scan (71x121x1): Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 0.447 W/kg

Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 0 V/m; Power Drift = 0.05 dB Peak SAR (extrapolated) = 0.522 W/kg SAR(1 g) = 0.343 W/kg; SAR(10 g) = 0.216 W/kg Maximum value of SAR (measured) = 0.435 W/kg

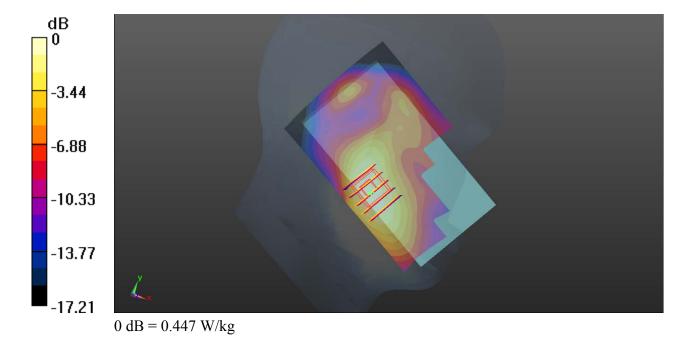

Communication System: UID 0, UMTS (0); Frequency: 846.6 MHz; Duty Cycle: 1:1 Medium: HSL_835_160413 Medium parameters used: f = 846.6 MHz; σ = 0.904 S/m; ϵ_r = 41.367; ρ = 1000 kg/m3

Date: 2016.4.13


Ambient Temperature: 23.5 $^{\circ}$ C; Liquid Temperature: 22.9 $^{\circ}$ C

DASY5 Configuration:

- Probe: EX3DV4 SN3935; ConvF(10.15, 10.15, 10.15); Calibrated: 2015.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2015.11.23
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch4233/Area Scan (71x121x1): Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 0.197 W/kg

Ch4233/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 1.089 V/m; Power Drift = 0.06 dB Peak SAR (extrapolated) = 0.208 W/kg SAR(1 g) = 0.174 W/kg; SAR(10 g) = 0.136 W/kg Maximum value of SAR (measured) = 0.194 W/kg

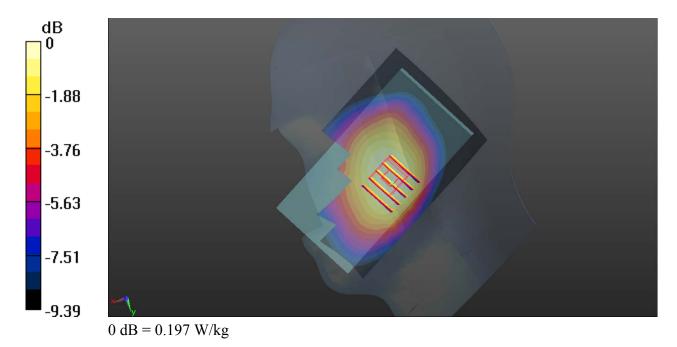

Communication System: UID 0, UMTS (0); Frequency: 1752.6 MHz; Duty Cycle: 1:1 Medium: HSL_1800_160412 Medium parameters used: f = 1752.6 MHz; $\sigma = 1.382$ S/m; $\varepsilon_r = 41.323$; $\rho = 1000$ kg/m3

Date: 2016.4.12


Ambient Temperature: 23.5 $^{\circ}$ C; **Liquid Temperature**: 22.7 $^{\circ}$ C

DASY5 Configuration:

- Probe: EX3DV4 SN3935; ConvF(8.69, 8.69, 8.69); Calibrated: 2015.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2015.11.23
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch1513/Area Scan (71x121x1): Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 0.407 W/kg

Ch1513/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 0.3510 V/m; Power Drift = 0.01 dB Peak SAR (extrapolated) = 0.472 W/kg SAR(1 g) = 0.321 W/kg; SAR(10 g) = 0.206 W/kg Maximum value of SAR (measured) = 0.403 W/kg

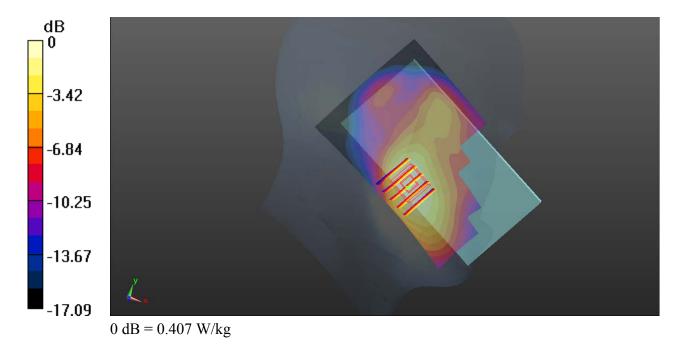

Communication System: UID 0, UMTS (0); Frequency: 1852.4 MHz; Duty Cycle: 1:1 Medium: HSL_1900_160412 Medium parameters used: f = 1852.4 MHz; $\sigma = 1.365$ S/m; $\epsilon_r = 41.225$; $\rho = 1000$ kg/m³

Date: 2016.4.12


Ambient Temperature: 23.5 $^{\circ}$ C; Liquid Temperature: 22.6 $^{\circ}$ C

DASY5 Configuration:

- Probe: EX3DV4 SN3935; ConvF(8.37, 8.37, 8.37); Calibrated: 2015.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2015.11.23
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch9262/Area Scan (71x121x1): Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 0.415 W/kg

Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 0.2610 V/m; Power Drift = 0.03 dB Peak SAR (extrapolated) = 0.495 W/kg SAR(1 g) = 0.326 W/kg; SAR(10 g) = 0.205 W/kg Maximum value of SAR (measured) = 0.413 W/kg

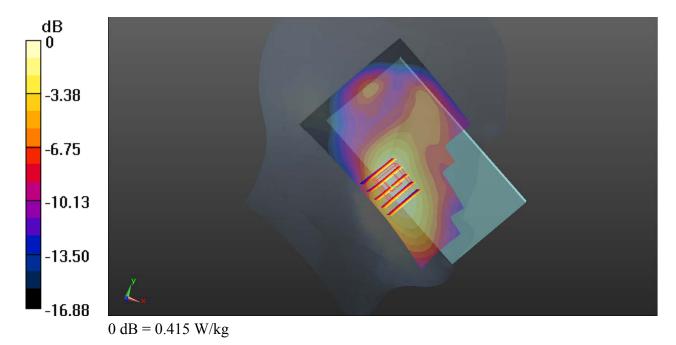

Communication System: UID 0, WIFI (0); Frequency: 2412 MHz; Duty Cycle: 1:1 Medium: HSL_2450_160413 Medium parameters used: f = 2412 MHz; σ = 1.834 S/m; ϵ_r = 40.615;

Date: 2016.4.13

 $\rho = 1000 \text{ kg/m}^3$


Ambient Temperature: 23.2 °C; Liquid Temperature: 22.8 °C

DASY5 Configuration:

- Probe: EX3DV4 SN3935; ConvF(7.49, 7.49, 7.49); Calibrated: 2015.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2015.11.23
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch1/Area Scan (91x151x1): Interpolated grid: dx=12mm, dy=12mm Maximum value of SAR (interpolated) = 0.661 W/kg

Ch1/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 0.9860 V/m; Power Drift = -0.06 dB Peak SAR (extrapolated) = 0.801 W/kg SAR(1 g) = 0.355 W/kg; SAR(10 g) = 0.152 W/kg Maximum value of SAR (measured) = 0.547 W/kg

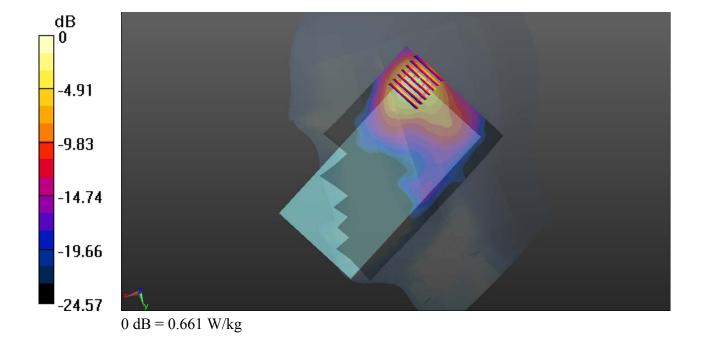

07_GSM850_GPRS(4 Tx slots)_Back_10mm_Ch251

Communication System: UID 0, GPRS/EDGE12 (0); Frequency: 848.8 MHz; Duty Cycle: 1:2.08 Medium: MSL_835_160411 Medium parameters used: f = 848.8 MHz; $\sigma = 1.018$ S/m; $\epsilon_r = 53.954$; $\rho = 1000$ kg/m3

Date: 2016.4.11


Ambient Temperature: 23.3 $^{\circ}$ C; **Liquid Temperature**: 22.5 $^{\circ}$ C

DASY5 Configuration:

- Probe: EX3DV4 SN3935; ConvF(10.3, 10.3, 10.3); Calibrated: 2015.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2015.11.23
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch251/Area Scan (71x121x1): Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 0.611 W/kg

Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 3.020 V/m; Power Drift = 0.02 dB Peak SAR (extrapolated) = 0.665 W/kg SAR(1 g) = 0.524 W/kg; SAR(10 g) = 0.399 W/kg Maximum value of SAR (measured) = 0.608 W/kg

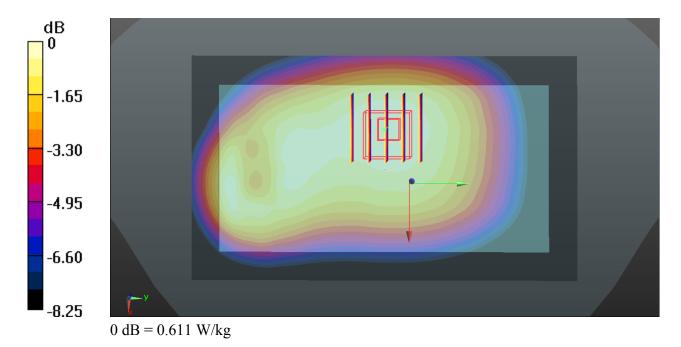

08_GSM1900_GPRS(4 Tx slots)_Back_10mm_Ch661

Communication System: UID 0, GPRS/EDGE12 (0); Frequency: 1880 MHz; Duty Cycle: 1:2.08 Medium: MSL_1900_160412 Medium parameters used: f = 1880 MHz; $\sigma = 1.509$ S/m; $\epsilon_r = 54.703$; $\rho = 1000$ kg/m³

Date: 2016.4.12


Ambient Temperature: 23.4 $^{\circ}$ C; Liquid Temperature: 22.7 $^{\circ}$ C

DASY5 Configuration:

- Probe: EX3DV4 SN3935; ConvF(7.99, 7.99, 7.99); Calibrated: 2015.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2015.11.23
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch661/Area Scan (71x121x1): Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 0.887 W/kg

Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 2.440 V/m; Power Drift = 0.02 dB Peak SAR (extrapolated) = 1.17 W/kg SAR(1 g) = 0.659 W/kg; SAR(10 g) = 0.373 W/kg Maximum value of SAR (measured) = 0.849 W/kg

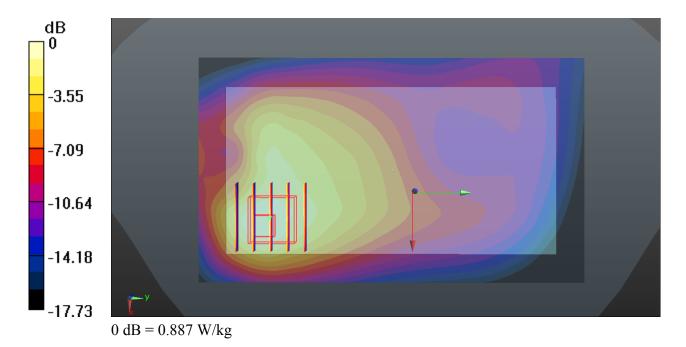

Communication System: UID 0, UMTS (0); Frequency: 846.6 MHz; Duty Cycle: 1:1 Medium: MSL_835_160411 Medium parameters used: f = 846.6 MHz; $\sigma = 1.015$ S/m; $\epsilon_r = 53.97$; $\rho = 1000$ kg/m³

Date: 2016.4.11


Ambient Temperature: 23.3 $^{\circ}$ C; Liquid Temperature: 22.5 $^{\circ}$ C

DASY5 Configuration:

- Probe: EX3DV4 SN3935; ConvF(10.3, 10.3, 10.3); Calibrated: 2015.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2015.11.23
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch4233/Area Scan (71x121x1): Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 0.321 W/kg

Ch4233/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 2.141 V/m; Power Drift = 0.06 dB Peak SAR (extrapolated) = 0.345 W/kg SAR(1 g) = 0.272 W/kg; SAR(10 g) = 0.208 W/kg Maximum value of SAR (measured) = 0.313 W/kg

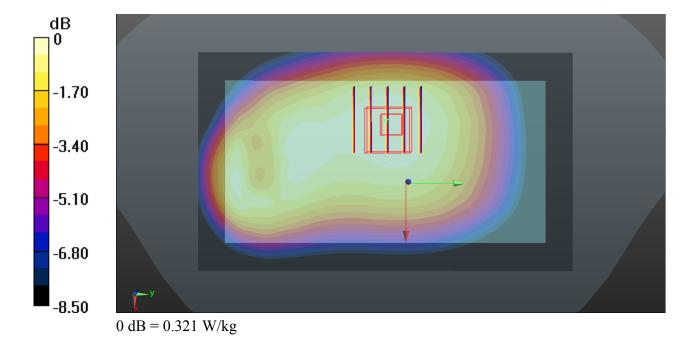

10_WCDMA Band IV_RMC 12.2Kbps_Back_10mm_Ch1513

Communication System: UID 0, UMTS (0); Frequency: 1752.6 MHz; Duty Cycle: 1:1 Medium: MSL_1800_160412 Medium parameters used: f = 1752.6 MHz; $\sigma = 1.533$ S/m; $\epsilon_r = 52.035$; $\rho = 1000$ kg/m3

Date: 2016.4.12


Ambient Temperature: 23.4 $^{\circ}$ C; **Liquid Temperature**: 22.8 $^{\circ}$ C

DASY5 Configuration:

- Probe: EX3DV4 SN3935; ConvF(8.24, 8.24, 8.24); Calibrated: 2015.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2015.11.23
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch1513/Area Scan (71x121x1): Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 0.593 W/kg

Ch1513/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 2.305 V/m; Power Drift = 0.09 dB Peak SAR (extrapolated) = 0.718 W/kg SAR(1 g) = 0.421 W/kg; SAR(10 g) = 0.250 W/kg Maximum value of SAR (measured) = 0.532 W/kg

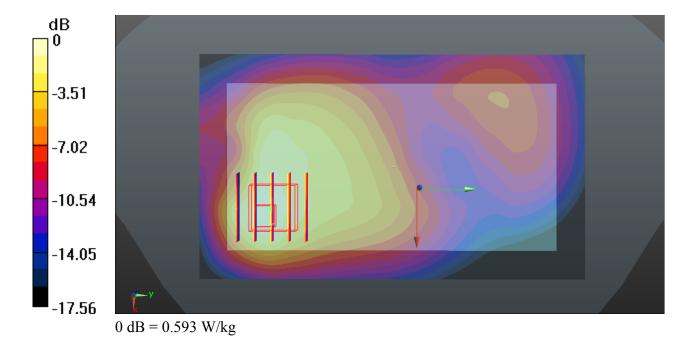

Communication System: UID 0, UMTS (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: MSL_1900_160412 Medium parameters used: f = 1880 MHz; $\sigma = 1.509$ S/m; $\epsilon_r = 54.703$;

Date: 2016.4.12

 $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 23.4 °C ; **Liquid Temperature**: 22.7 °C

DASY5 Configuration:

- Probe: EX3DV4 SN3935; ConvF(7.99, 7.99, 7.99); Calibrated: 2015.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2015.11.23
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch9400/Area Scan (71x121x1): Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 0.789 W/kg


Ch9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.830 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 1.04 W/kg

SAR(1 g) = 0.569 W/kg; SAR(10 g) = 0.320 W/kg

Maximum value of SAR (measured) = 0.736 W/kg

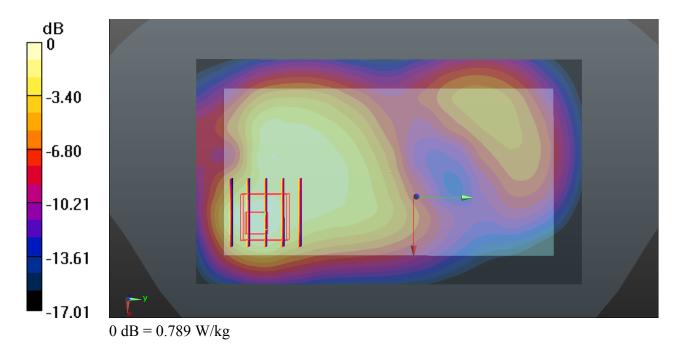

Communication System: UID 0, WIFI (0); Frequency: 2412 MHz; Duty Cycle: 1:1 Medium: MSL_2450_160413 Medium parameters used: f = 2412 MHz; $\sigma = 1.899$ S/m; $\epsilon_r = 51.803$; $\rho = 1000$ kg/m³

Date: 2016.4.13

Ambient Temperature: 23.2 °C ; **Liquid Temperature**: 22.9 °C

DASY5 Configuration:

- Probe: EX3DV4 SN3935; ConvF(7.55, 7.55, 7.55); Calibrated: 2015.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1338; Calibrated: 2015.11.23
- Phantom: SAM (Front) with CRP v5.0; Type: QD000P40CD; Serial: TP:1795
- Measurement SW: DASY52, Version 52.8 (8); SEMCAD X Version 14.6.10 (7331)

Ch1/Area Scan (91x151x1): Interpolated grid: dx=12mm, dy=12mm Maximum value of SAR (interpolated) = 0.0995 W/kg

Ch1/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 0.6850 V/m; Power Drift = -0.05 dB Peak SAR (extrapolated) = 0.124 W/kg SAR(1 g) = 0.072 W/kg; SAR(10 g) = 0.041 W/kg Maximum value of SAR (measured) = 0.0973 W/kg

