



# FCC PART 15B, CLASS B TEST REPORT

For

# **BLU Products, Inc.**

10814 NW 33rd St # 100 Doral, FL 33172, United States

FCC ID: YHLBLUGRANDM3

Report Type:

Original Report

Report Number:

Report Date:

Reviewed By:

Prepared By:

Bay Area Compliance Laboratories Corp. (Shenzhen) 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China Tel: +86-755-33320018

**Note**: This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP\* or any agency of the Federal Government. \* This report may contain data that are not covered by the NVLAP accreditation and are marked with an asterisk "\*"

Fax: +86-755-33320008 www.baclcorp.com.cn

# **TABLE OF CONTENTS**

GENERAL INFORMATION	3
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	3
Objective	
RELATED SUBMITTAL(S)/GRANT(S)	
TEST METHODOLOGY	3
MEASUREMENT UNCERTAINTY	
TEST FACILITY	4
SYSTEM TEST CONFIGURATION	5
DESCRIPTION OF TEST CONFIGURATION	5
EUT Exercise Software	5
SPECIAL ACCESSORIES	
EQUIPMENT MODIFICATIONS	5
SUPPORT EQUIPMENT LIST AND DETAILS	
External I/O Cable	6
BLOCK DIAGRAM OF TEST SETUP	6
SUMMARY OF TEST RESULTS	7
TEST EQUIPMENT LIST	8
FCC §15.107 – AC LINE CONDUCTED EMISSIONS	8
TEST EQUIPMENT LIST	9 9
FCC §15.107 – AC LINE CONDUCTED EMISSIONS	
TEST EQUIPMENT LIST	
TEST EQUIPMENT LIST	
FCC §15.107 – AC LINE CONDUCTED EMISSIONS  APPLICABLE STANDARD  EUT SETUP  EMI TEST RECEIVER SETUP  TEST PROCEDURE  CORRECTED FACTOR & MARGIN CALCULATION  TEST RESULTS SUMMARY	
TEST EQUIPMENT LIST	
FCC §15.107 – AC LINE CONDUCTED EMISSIONS  APPLICABLE STANDARD  EUT SETUP  EMI TEST RECEIVER SETUP  TEST PROCEDURE  CORRECTED FACTOR & MARGIN CALCULATION  TEST RESULTS SUMMARY  TEST DATA	
FCC §15.107 – AC LINE CONDUCTED EMISSIONS  APPLICABLE STANDARD  EUT SETUP  EMI TEST RECEIVER SETUP  TEST PROCEDURE  CORRECTED FACTOR & MARGIN CALCULATION  TEST RESULTS SUMMARY  TEST DATA	
FCC §15.107 – AC LINE CONDUCTED EMISSIONS  APPLICABLE STANDARD  EUT SETUP  EMI TEST RECEIVER SETUP  TEST PROCEDURE  CORRECTED FACTOR & MARGIN CALCULATION  TEST RESULTS SUMMARY  TEST DATA  FCC §15.109 - RADIATED SPURIOUS EMISSIONS	
FCC §15.107 – AC LINE CONDUCTED EMISSIONS  APPLICABLE STANDARD  EUT SETUP  EMI TEST RECEIVER SETUP  TEST PROCEDURE  CORRECTED FACTOR & MARGIN CALCULATION  TEST RESULTS SUMMARY  TEST DATA  FCC §15.109 - RADIATED SPURIOUS EMISSIONS  APPLICABLE STANDARD	
FCC §15.107 – AC LINE CONDUCTED EMISSIONS  APPLICABLE STANDARD  EUT SETUP  EMI TEST RECEIVER SETUP  TEST PROCEDURE  CORRECTED FACTOR & MARGIN CALCULATION  TEST RESULTS SUMMARY  TEST DATA  FCC §15.109 - RADIATED SPURIOUS EMISSIONS  APPLICABLE STANDARD  EUT SETUP  EMI TEST RECEIVER SETUP  TEST PROCEDURE	
FCC §15.107 – AC LINE CONDUCTED EMISSIONS  APPLICABLE STANDARD  EUT SETUP  EMI TEST RECEIVER SETUP  TEST PROCEDURE  CORRECTED FACTOR & MARGIN CALCULATION  TEST RESULTS SUMMARY  TEST DATA  FCC §15.109 - RADIATED SPURIOUS EMISSIONS  APPLICABLE STANDARD  EUT SETUP  EMI TEST RECEIVER SETUP  TEST PROCEDURE  CORRECTED AMPLITUDE & MARGIN CALCULATION	
EUT SETUP  EMI TEST RECEIVER SETUP  TEST PROCEDURE  CORRECTED FACTOR & MARGIN CALCULATION  TEST RESULTS SUMMARY  TEST DATA  FCC §15.109 - RADIATED SPURIOUS EMISSIONS  APPLICABLE STANDARD  EUT SETUP  EMI TEST RECEIVER SETUP  TEST PROCEDURE	

Report No.: RSZ180206001-00A

### **GENERAL INFORMATION**

# **Product Description for Equipment under Test (EUT)**

The *BLU Products, Inc.*'s product, model number: GRAND M3 (*FCC ID: YHLBLUGRANDM3*) or the "EUT" in this report was a *Smart Phone*, which was measured approximately:  $15.0 \text{ cm } (L) \times 8.0 \text{ cm } (W) \times 0.8 \text{ cm } (H)$ , rated with input voltage: DC 3.8 V battery or DC 5V from adapter. The highest operating frequency is 2690 MHz.

Report No.: RSZ180206001-00A

Adapter Information: Model: US-BB-1000

Input: AC 100-240V, 50/60Hz, 0.2A

Output: DC 5V, 1A

#### **Objective**

This test report is prepared on behalf of *BLU Products, Inc.* in accordance with Part 2-Subpart J, Part 15-Subparts A, B of the Federal Communication Commissions rules.

The objective of the manufacturer is to determine the compliance of the EUT with FCC Part 15 B.

## Related Submittal(s)/Grant(s)

FCC Part 15.247 DSS, Part 15.247 DTS and Part 22H/24E/27 PCE submissions with FCC ID: YHLBLUGRANDM3.

#### **Test Methodology**

All measurements contained in this report were conducted with ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

#### **Measurement Uncertainty**

Parameter		uncertainty
Conducted Emissions		±1.95dB
Emissions,	Below 1GHz	±4.75dB
radiated	Above 1GHz	±4.88dB

FCC Part 15B, Class B Page 3 of 18

<sup>\*</sup>All measurement and test data in this report was gathered from production sample serial number: 1800136 (Assigned by BACL, Shenzhen). The EUT supplied by the applicant was received on 2018-01-09.

# **Test Facility**

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China.

Report No.: RSZ180206001-00A

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 382179, the FCC Designation No.: CN5001.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062B.

FCC Part 15B, Class B Page 4 of 18

# **SYSTEM TEST CONFIGURATION**

#### **Description of Test Configuration**

The system was configured for testing in a manufacturer testing fashion.

EUT operation mode: Downloading (data transfer with computer)

#### **EUT Exercise Software**

"b53016\_go\_public\_V01\_Indian" exercise software was used.

# **Special Accessories**

No special accessory.

# **Equipment Modifications**

No modification was made to the EUT tested.

# **Support Equipment List and Details**

Manufacturer	Description	Model	Serial Number
DELL	PC	VOSTRO 220S	127BP2X
DELL	LCD Monitor	E178WFPC	CN-OWY564-64180-7C4-2SQH
DELL	Keyboard	L100	CNORH656658907BL05DC
DELL	Mouse	MOC5UO	G1900NKD
SAST	Modem	AEM-2100	0293
Kingston	Micro SD card	1 GB	N/A
PHILIPS	Earphone	SBCHP250	N/A

Report No.: RSZ180206001-00A


FCC Part 15B, Class B Page 5 of 18

# **External I/O Cable**

Cable Description	Length (m)	From/Port	То
Un-Shielding Detachable USB Cable	1.5	Host PC	Mouse
Shielding Detachable Serial Cable	1.2	Host PC	Modem
Shielding Detachable K/B Cable	1.5	Host PC	Keyboard
Shielding Detachable VGA Cable	1.5	Host PC	LCD Monitor
Un-Shielding Detachable USB Cable	1.0	EUT	Host PC
Un-shielding Detachable Earphone Cable	1.2	EUT	Earphone

Report No.: RSZ180206001-00A

# **Block Diagram of Test Setup**

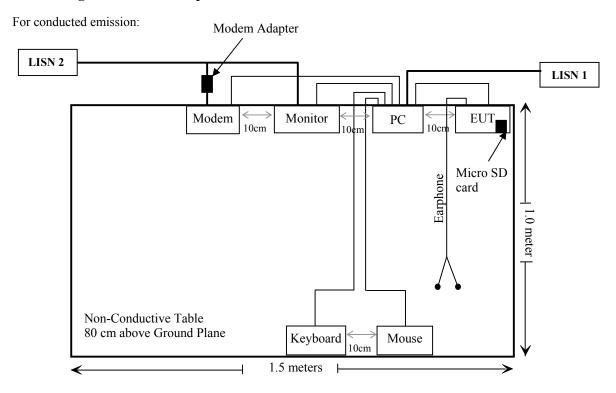

FCC Part 15B, Class B Page 6 of 18

# SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Results
§15.107	AC Line Conducted Emissions	Compliance
§15.109	Radiated Spurious Emissions	Compliance

Report No.: RSZ180206001-00A

FCC Part 15B, Class B Page 7 of 18

# TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
	AC Liı	ne Conducted En	nission Test		
Rohde & Schwarz	EMI Test Receiver	ESCS30	100176	2017-08-04	2018-08-04
Rohde & Schwarz	LISN	ENV216	3560.6650.12- 101613-Yb	2017-12-21	2018-12-21
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2017-11-29	2018-05-21
Rohde & Schwarz	CE Test software	EMC 32	V8.53.0	NCR	NCR
N/A	Conducted Emission Cable	N/A	UF A210B-1- 0720-504504	2017-11-12	2018-05-12
	R	Radiated Emission	n Test		
Sunol Sciences	Horn Antenna	DRH-118	A052604	2017-12-22	2020-12-21
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2017-04-24	2018-04-24
Sunol Sciences	Bi-log Antenna	JB1	A040904-2	2017-12-17	2020-12-16
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2017-05-21	2018-05-21
НР	Amplifier	HP8447E	1937A01046	2017-11-19	2018-05-21
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2017-01-11	2018-01-11
Ducommun technologies	RF Cable	UFA210A-1- 4724-30050U	MFR64369 223410-001	2017-11-19	2018-05-21
Ducommun technologies	RF Cable	104PEA	218124002	2017-11-19	2018-05-21
Ducommun technologies	RF Cable	RG-214	1	2017-11-19	2018-05-21
Ducommun technologies	RF Cable	RG-214	2	2017-11-22	2018-05-22

Report No.: RSZ180206001-00A

FCC Part 15B, Class B Page 8 of 18


<sup>\*</sup> **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

# FCC §15.107 – AC LINE CONDUCTED EMISSIONS

#### **Applicable Standard**

According to FCC §15.107

#### **EUT Setup**

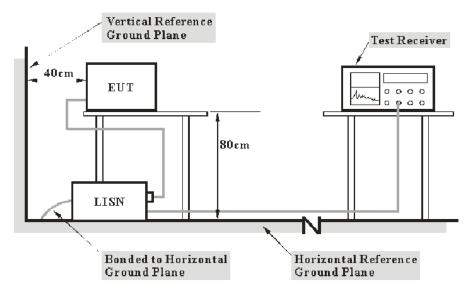

Report No.: RSZ180206001-00A

Note: 1. Support units were connected to second LISN.

2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with per ANSI C63.4-2014. The related limit was specified in FCC Part 15.107 Class B.

The spacing between the peripherals was 10 cm.

#### **EMI Test Receiver Setup**

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

#### **Test Procedure**

During the conducted emission test, the host PC was connected to the first LISN and the other relevant equipments were connected to the second LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

FCC Part 15B, Class B Page 9 of 18

#### **Corrected Factor & Margin Calculation**

The Corrected factor is calculated by adding LISN/ISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

Report No.: RSZ180206001-00A

Correction Factor = LISN VDF + Cable Loss + Transient Limiter Attenuation

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

Margin = Limit – Corrected Amplitude

#### **Test Results Summary**

According to the recorded data in following table, the EUT complied with the FCC Part 15.107,

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level is in compliance with the limit if

$$L_{\rm m} + U_{(L{\rm m})} \leq L_{\rm lim} + U_{\rm cispr}$$

In BACL.,  $U_{(Lm)}$  is less than  $U_{cispr}$ , if  $L_m$  is less than  $L_{lim}$ , it implies that the EUT complies with the limit.

#### **Test Data**

#### **Environmental Conditions**


Temperature:	25 ℃
Relative Humidity:	52 %
ATM Pressure:	101.0 kPa

The testing was performed by Tracy Hu on 2018-02-24.

FCC Part 15B, Class B Page 10 of 18

EUT Operation Mode: Downloading

# AC 120V/60 Hz, Line

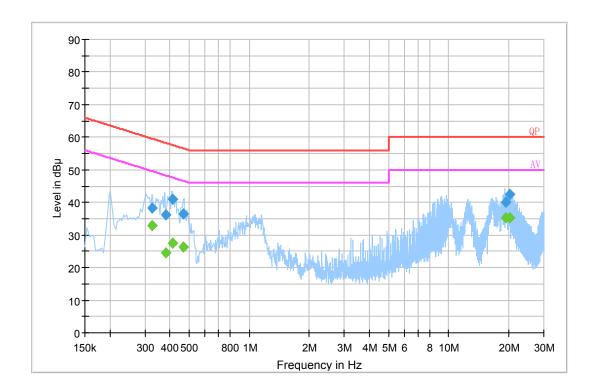


Report No.: RSZ180206001-00A

Frequency (MHz)	Corrected Amplitude (dBµV)	Correction Factor (dB)	Limit (dBµV)	Margin (dB)	Detector (PK/Ave./QP)
0.325110	38.2	20.2	59.6	21.4	QP
0.383670	36.2	20.2	58.2	22.0	QP
0.411790	40.9	20.2	57.6	16.7	QP
0.466950	36.5	20.2	56.6	20.1	QP
19.299290	40.0	20.2	60.0	20.0	QP
20.207290	42.3	20.2	60.0	17.7	QP
0.325110	32.9	20.2	49.6	16.7	Ave.
0.383670	24.6	20.2	48.2	23.6	Ave.
0.411790	27.4	20.2	47.6	20.2	Ave.
0.466950	26.4	20.2	46.6	20.2	Ave.
19.299290	35.4	20.2	50.0	14.6	Ave.
20.207290	35.2	20.2	50.0	14.8	Ave.

FCC Part 15B, Class B Page 11 of 18

# AC 120V/60 Hz, Neutral

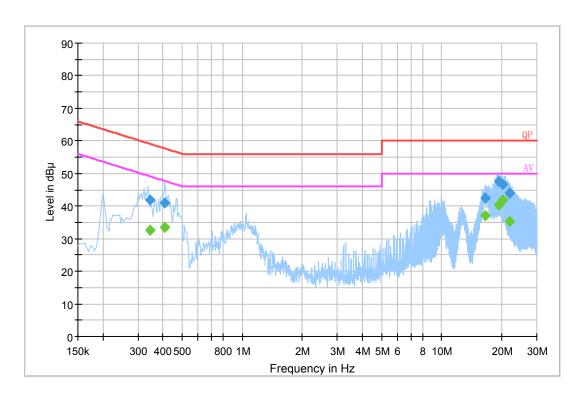

Report No.: RSZ180206001-00A

Frequency (MHz)	Corrected Amplitude (dBµV)	Correction Factor (dB)	Limit (dBµV)	Margin (dB)	Detector (PK/Ave./QP)
0.343070	41.9	20.2	59.1	17.2	QP
0.407850	40.8	20.2	57.7	16.9	QP
16.594710	42.5	20.1	60.0	17.5	QP
19.302910	47.5	20.2	60.0	12.5	QP
20.209350	46.7	20.2	60.0	13.3	QP
21.813230	44.1	20.1	60.0	15.9	QP
0.343070	32.5	20.2	49.1	16.6	Ave.
0.407850	33.4	20.2	47.7	14.3	Ave.
16.594710	37.0	20.1	50.0	13.0	Ave.
19.302910	40.5	20.2	50.0	9.5	Ave.
20.209350	41.8	20.2	50.0	8.2	Ave.
21.813230	35.2	20.1	50.0	14.8	Ave.

#### **Note:**

- 1) Correction Factor =LISN VDF (Voltage Division Factor) + Cable Loss + Transient Limiter Attenuation
- 2) Corrected Amplitude = Reading + Correction Factor 3) Margin = Limit Corrected Amplitude

FCC Part 15B, Class B Page 12 of 18


# FCC §15.109 - RADIATED SPURIOUS EMISSIONS

### **Applicable Standard**

FCC §15.109


#### **EUT Setup**

**Below 1GHz:** 

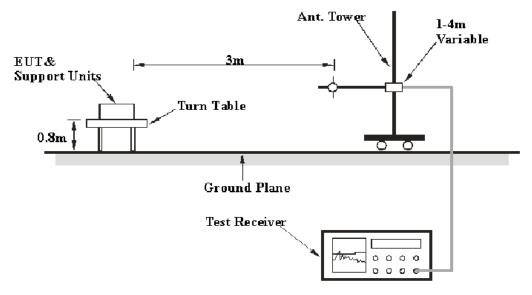

Report No.: RSZ180206001-00A

#### **Above 1GHz:**

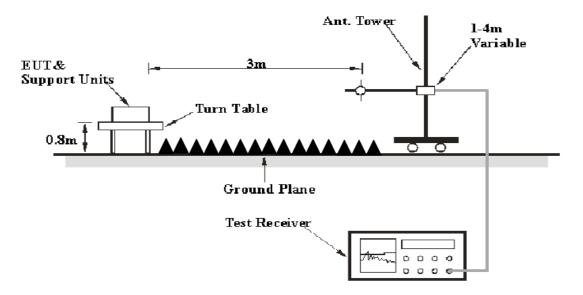

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.4-2014. The specification used was the FCC Part 15.109 Class B limits.

FCC Part 15B, Class B Page 13 of 18

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

Report No.: RSZ180206001-00A

The spacing between the peripherals was 10 cm.

#### **EMI Test Receiver Setup**

The system was investigated from 30 MHz to 13.5 GHz.

During the radiated emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurment
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
Above I GHZ	1MHz	10 Hz	/	Ave.

#### **Test Procedure**

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All data was recorded in the Quasi-peak detector mode from 30 MHz to 1 GHz and PK and average detector modes for frequencies above 1 GHz.

#### **Corrected Amplitude & Margin Calculation**

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

Corrected Amplitude = Meter Reading + Antenna Factor + Cable Loss - Amplifier Gain

The "Margin" column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

Margin = Limit – Corrected Amplitude

#### **Test Results Summary**

According to the data in the following table, the EUT complied with the FCC §15.109 Class B,

Refer to CISPR16-4-2:2011 and CISPR 16-4-1:2009, the measured level is in compliance with the limit if

$$L_{\rm m} + U_{\rm (Lm)} \leq L_{\rm lim} + U_{\rm cispr}$$

In BACL,  $U_{(Lm)}$  is less than  $U_{cispr}$ , if  $L_m$  is less than  $L_{lim}$ , it implies that the EUT complies with the limit.

FCC Part 15B, Class B Page 14 of 18

#### **Test Data**


#### **Environmental Conditions**

Temperature:	24 ℃
Relative Humidity:	50 %
ATM Pressure:	100.0 kPa

The testing was performed by Tracy Hu on 2018-01-10.

EUT Operation Mode: Downloading

#### 30 MHz~1 GHz:

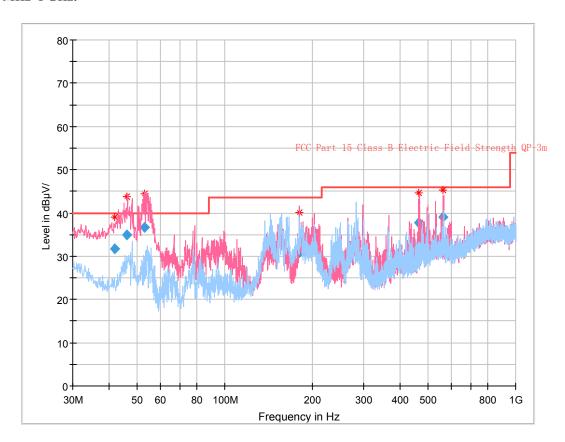

Report No.: RSZ180206001-00A

Frequency (MHz)	Corrected Amplitude (dBµV/m)	Antenna height (cm)	Antenna Polarity	Turntable position (degree)	Correction Factor (dB/m)	Limit (dBµV/m)	Margin (dB)
41.910875	31.69	106.0	V	298.0	-7.5	40.00	8.31
46.014875	34.93	116.0	V	175.0	-10.1	40.00	5.07
52.901875	36.70	154.0	V	77.0	-11.2	40.00	3.30
180.540125	30.91	101.0	V	241.0	-5.5	43.50	12.59
465.505250	37.76	107.0	V	169.0	1.1	46.00	8.24
564.066625	39.13	107.0	V	185.0	4.5	46.00	6.87

FCC Part 15B, Class B Page 15 of 18

1 GHz – 13.5 GHz:


Frequency (MHz)	Receiver		Turntable	Rx Antenna			Corrected	FCC Part 15B	
	Reading (dBµV)		Degree	Height	Polar (H / V)	(dB/m)	Amplitude (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1976.95	50.22	PK	317	2.0	Н	-0.99	49.23	74	24.77
1976.95	31.21	Ave.	220	2.0	Н	-0.99	30.22	54	23.78
2315.21	49.36	PK	294	2.0	Н	-0.74	48.62	74	25.38
2315.21	31.09	Ave.	294	2.0	Н	-0.74	30.35	54	23.65
1350.70	46.34	PK	96	1.0	Н	-7.89	38.45	74	35.55
1350.70	31.54	Ave.	96	1.0	Н	-7.89	23.65	54	30.35
2218.37	48.67	PK	217	1.3	Н	-0.97	47.70	74	26.30
2218.37	31.18	Ave.	217	1.3	Н	-0.97	30.21	54	23.79

Report No.: RSZ180206001-00A

#### Note:

- 1) Correction Factor=Antenna factor (RX) + cable loss amplifier factor
- 2) Corrected Amplitude = Correction Factor + Reading
- 3) Margin = Limit Corrected Amplitude


#### Pre-scan and worst case for Horizontal as below

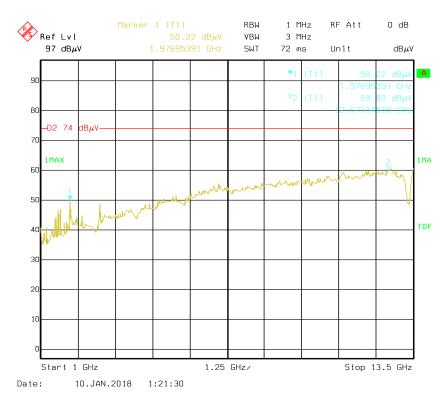


FCC Part 15B, Class B Page 16 of 18

#### Pre-scan and worst case for Vertical as below

Report No.: RSZ180206001-00A

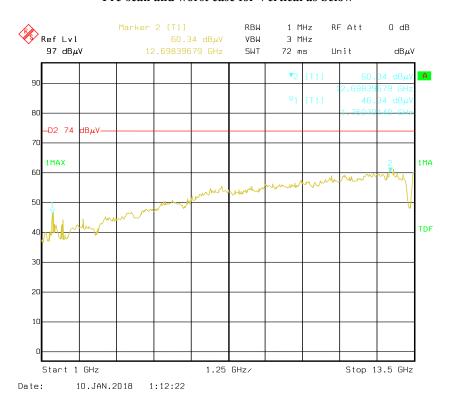


#### Horizontal

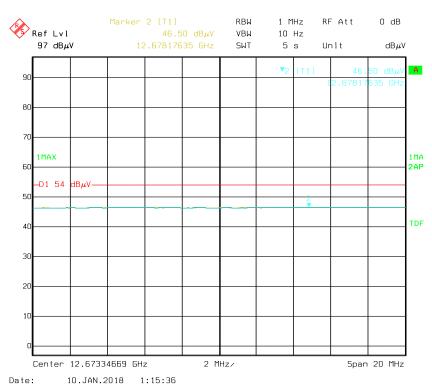

FCC Part 15B, Class B Page 17 of 18

#### Vertical

Report No.: RSZ180206001-00A

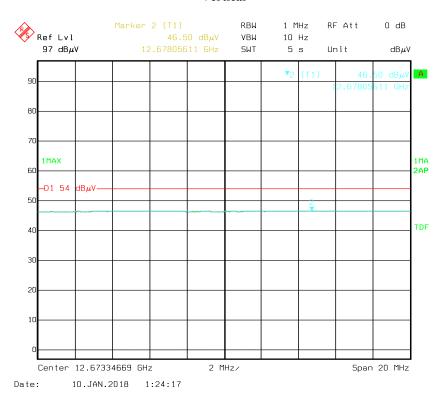

\*\*\*\*\* END OF REPORT \*\*\*\*\*

FCC Part 15B, Class B Page 18 of 18