



# FCC PART 15B, CLASS B TEST REPORT

For

## BLU Products, Inc.

10814 NW 33rd St # 100 Doral, FL 33172, Doral, Florida, United States

**FCC ID: YHLBLUJ9L**

<b>Report Type:</b> Original Report		<b>Product Type:</b> Mobile Phone	
<b>Test Engineer:</b>	Haiguo Li Harris He Kilroy Deng Alan He <i>Haiguo Li Harris He Kilroy Deng Alan He</i>		
<b>Report Number:</b>	RSZ210401012-00A		
<b>Report Date:</b>	2021-04-25		
<b>Reviewed By:</b>	Jacob Kong RF Engineer	<i>Jacob Kong</i>	
<b>Prepared By:</b>	Bay Area Compliance Laboratories Corp. (Shenzhen) 5F(B-West) ,6F,7F,the 3rd Phase of Wan Li Industrial Building D,Shihua Rd, FuTian Free Trade Zone, Shenzhen, China Tel: +86-755-33320018 Fax: +86-755-33320008 <a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a>		

**Note:** This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "★".

BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with an asterisk '\*'. Customer model name, addresses, names, trademarks etc. are not considered data.

This report cannot be reproduced except in full, without prior written approval of the Company. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested. This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

## TABLE OF CONTENTS

<b>GENERAL INFORMATION</b> .....	<b>3</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
OBJECTIVE .....	3
TEST METHODOLOGY .....	3
MEASUREMENT UNCERTAINTY.....	4
TEST FACILITY .....	4
<b>SYSTEM TEST CONFIGURATION</b> .....	<b>5</b>
DESCRIPTION OF TEST CONFIGURATION .....	5
EUT EXERCISE SOFTWARE .....	5
SPECIAL ACCESSORIES.....	5
EQUIPMENT MODIFICATIONS .....	5
SUPPORT EQUIPMENT LIST AND DETAILS .....	5
EXTERNAL I/O CABLE.....	5
BLOCK DIAGRAM OF TEST SETUP .....	6
<b>SUMMARY OF TEST RESULTS</b> .....	<b>7</b>
<b>EQUIPMENT LIST</b> .....	<b>8</b>
<b>FCC §15.107 – AC LINE CONDUCTED EMISSIONS</b> .....	<b>9</b>
APPLICABLE STANDARD .....	9
EUT SETUP .....	9
EMI TEST RECEIVER SETUP.....	9
TEST PROCEDURE .....	9
CORRECTED FACTOR & MARGIN CALCULATION .....	10
TEST DATA .....	10
<b>FCC §15.109 - RADIATED SPURIOUS EMISSIONS</b> .....	<b>15</b>
APPLICABLE STANDARD .....	15
EUT SETUP .....	15
EMI TEST RECEIVER SETUP.....	16
TEST PROCEDURE .....	16
CORRECTED AMPLITUDE & MARGIN CALCULATION .....	16
TEST DATA .....	16

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

Product	Mobile Phone
Tested Model	J9L
Voltage Range	Powered: DC 3.7V by internal rechargeable Li-ion battery Recharged: DC 5.0V by adapter
Highest operating frequency	2690MHz
Date of Test	2021-04-02 to 2021-04-21
Sample number	RSZ210401012-EM-S1(Assigned by BACL, Shenzhen)
Received date	2021-04-01
Sample/EUT Status	Good condition
Adapter information	Model: US-AR-1000 Input: AC 100-240V, 50/60Hz, 0.2A Output: DC 5.0V, 1000mA

### Objective

This test report is in accordance with Part 2-Subpart J, Part 15-Subparts A, B of the Federal Communication Commissions rules.

The objective of the manufacturer is to determine the compliance of the EUT with FCC Part 15 B.

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2014, American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the range of 9 kHz to 40 GHz.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

## Measurement Uncertainty

All measurements involve certain levels of uncertainties, especially in field of EMC. The factors contributing to uncertainties are spectrum analyzer, cable loss, antenna factor calibration, antenna directivity, antenna factor variation with height, antenna phase center variation, antenna factor frequency interpolation, measurement distance variation, site imperfections, mismatch (average), and system repeatability.

Based on CISPR 16-4-2:2011, the expanded combined standard uncertainty of test at Bay Area Compliance Laboratories Corp. (Shenzhen) is shown as below. And the uncertainty will be taken into consideration for the test data recorded in the report

Parameter		uncertainty
Conducted Emissions		±1.95dB
Radiated Emissions	Below 1GHz	±4.75dB
	Above 1GHz	±4.88dB

*Note: The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval. Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty.*

## Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 5F(B-West) ,6F,7F,the 3rd Phase of Wan Li Industrial Building D,Shihua Rd, FuTian Free Trade Zone, Shenzhen, China.

The test site has been approved by the FCC under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No.: 342867, the FCC Designation No.: CN1221.

The test site has been registered with ISED Canada under ISED Canada Registration Number 3062B.

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

The system was configured for testing in a manufacturer testing fashion.

EUT operaton mode 1: Charging & Playing

EUT operation mode 2: Downloading (data transfer with computer)

### EUT Exercise Software

“BurnIntest.exe” software was used.

### Special Accessories

No special accessory.

### Equipment Modifications

No modification was made to the EUT tested.

### Support Equipment List and Details


Manufacturer	Description	Model	Serial Number
BULL	Socket	GN-212	A37209315081183
DELL	PC	Latitude E5430	JG3NLV1
DELL	Adapter	PA-10	PA-10
Sandisk	TF card	Unknown	TF card

### External I/O Cable


Cable Description	Length (m)	From/Port	To
Unshielded Un-detachable AC cable	1.0	Socket	LISN
Unshielded Un-detachable DC cable	1.0	Adapter 1	EUT
Unshielded Un-detachable earphone cable	1.2	EUT	Earphone
Shielded Detachable USB cable	1.0	PC	EUT
Unshielded Detachable RJ45 cable	5.0	PC	Internet

### Block Diagram of Test Setup

EUT Operation Mode: Charging & Playing

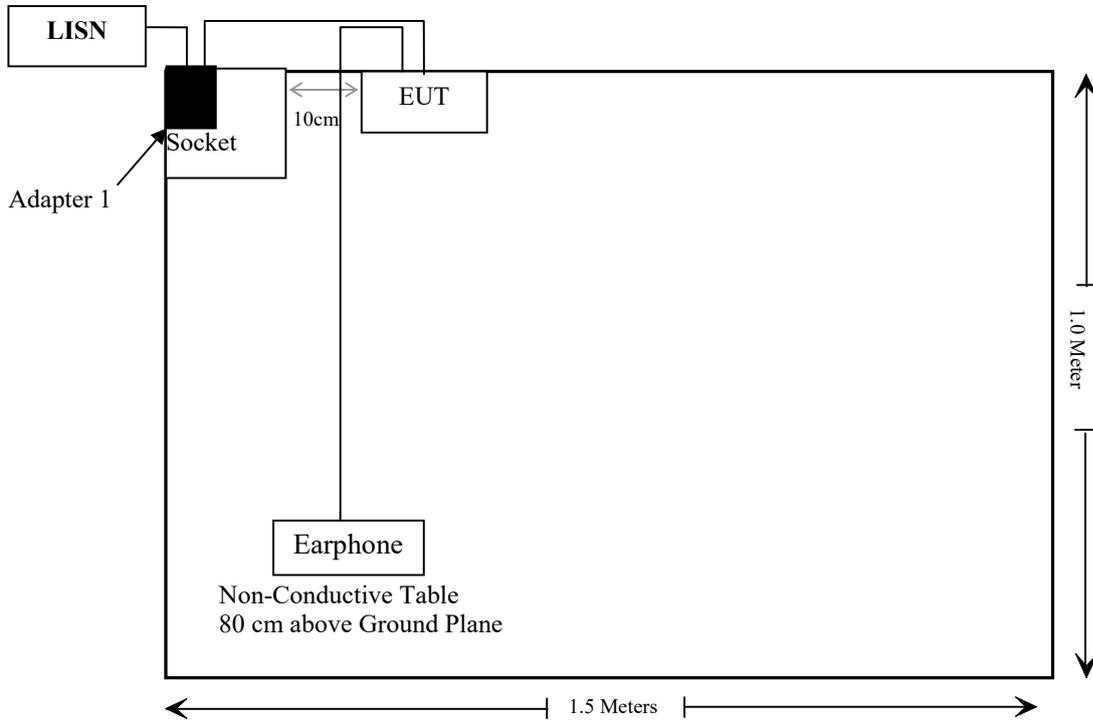

EUT Operation Mode: Downloading

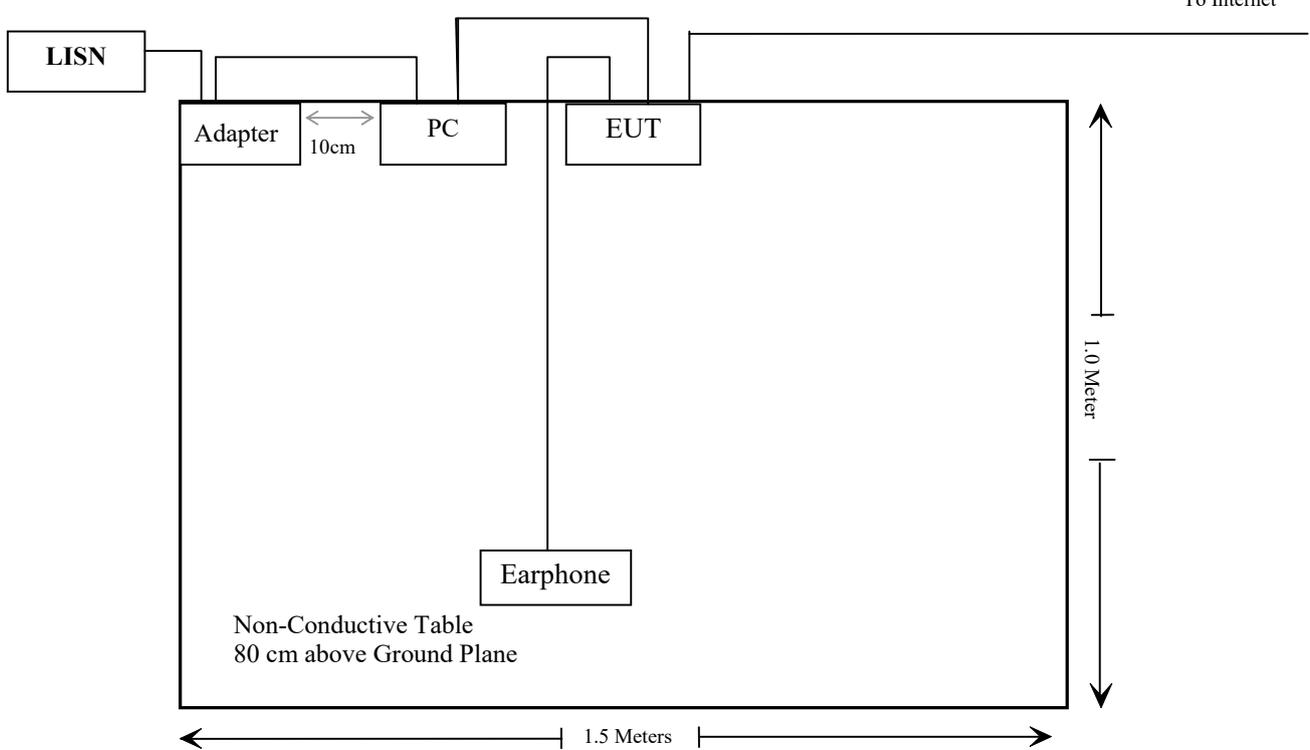

---

## **SUMMARY OF TEST RESULTS**

---

<b>FCC Rules</b>	<b>Description of Test</b>	<b>Results</b>
§15.107	AC Line Conducted Emissions	Compliance
§15.109	Radiated Spurious Emissions	Compliance

**EQUIPMENT LIST**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
<b>AC Line Conducted Emission Test</b>					
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2020/08/04	2021/08/03
Rohde & Schwarz	LISN	ENV216	101613	2020/08/04	2021/08/03
Rohde & Schwarz	Transient Limiter	ESH3Z2	DE25985	2020/11/29	2021/11/28
Unknown	CE Cable	CE Cable	UF A210B-1-0720-504504	2020/11/29	2021/11/28
Rohde & Schwarz	CE Test software	EMC 32	V8.53.0	NCR	NCR
<b>Radiated Emission Test</b>					
R&S	EMI Test Receiver	ESR3	102455	2020/08/04	2021/08/03
Sonoma instrument	Pre-amplifier	310 N	186238	2020/08/04	2021/08/03
Sunol Sciences	Broadband Antenna	JB1	A040904-2	2020/12/22	2023/12/21
Unknown	Cable 2	RF Cable 2	F-03-EM197	2020/11/29	2021/11/28
Unknown	Cable	Chamber Cable 1	F-03-EM236	2020/11/29	2021/11/28
Unknown	Cable	Chamber Cable 4	EC-007	2020/11/29	2021/11/28
Rohde & Schwarz	Auto test software	EMC 32	V9.10	NCR	NCR
Yijia	Temperature & Humidity Meter	TA218B	E0938	2020/09/30	2021/09/29
Rohde & Schwarz	Spectrum Analyzer	FSV40-N	102259	2020/08/04	2021/08/03
COM-POWER	Pre-amplifier	PA-122	181919	2020/11/29	2021/11/28
Insulated Wire Inc.	RF Cable	SPS-2503-3150	02222010	2020/11/29	2021/11/28
Unknown	RF Cable	W1101-EQ1 OUT	F-19-EM005	2020/11/29	2021/11/28
Unknown	Signal Cable	RG-214	2	2020/11/29	2021/11/28


\* **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

## FCC §15.107 – AC LINE CONDUCTED EMISSIONS

### Applicable Standard

According to FCC §15.107

### EUT Setup

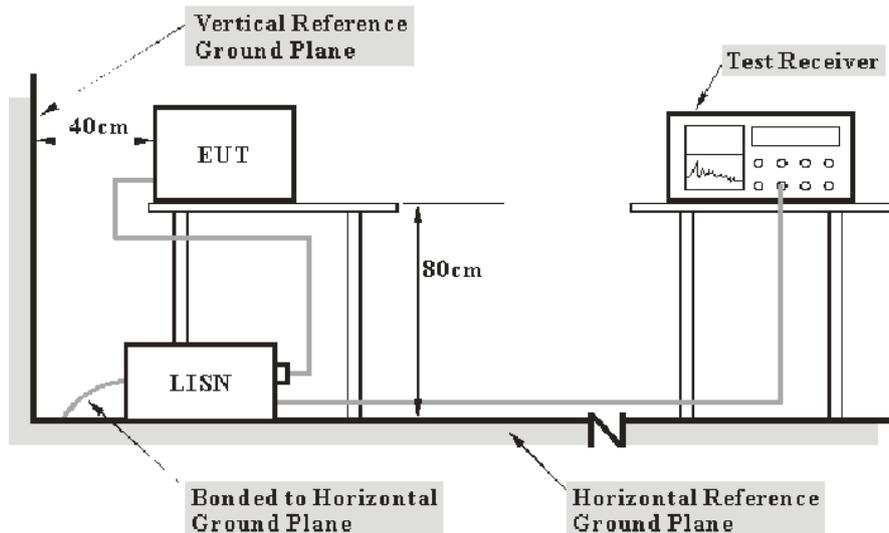

- Note: 1. Support units were connected to second LISN.  
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The measurement procedure of EUT setup is according with per ANSI C63.4-2014. The related limit was specified in FCC Part 15.107.

The spacing between the peripherals was 10 cm.

### EMI Test Receiver Setup

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

### Test Procedure

During the conducted emission test, the device was connected to the first LISN and the other relevant equipments were connected to the second LISN.

Maximizing procedure was performed on the six (6) highest emissions of the EUT.

All data was recorded in the Quasi-peak and average detection mode.

## Corrected Factor & Margin Calculation

The Corrected factor is calculated by adding LISN/ISN VDF (Voltage Division Factor), Cable Loss and Transient Limiter Attenuation. The basic equation is as follows:

$$\text{Correction Factor} = \text{LISN VDF} + \text{Cable Loss} + \text{Transient Limiter Attenuation}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

## Test Data


### Environmental Conditions

<b>Temperature:</b>	25 °C
<b>Relative Humidity:</b>	65 %
<b>ATM Pressure:</b>	101.0 kPa

*The testing was performed by Haiguo Li from 2021-04-02 to 2021-04-21.*

EUT Operation Mode: Charging & Playing

AC 120V/60 Hz, Line

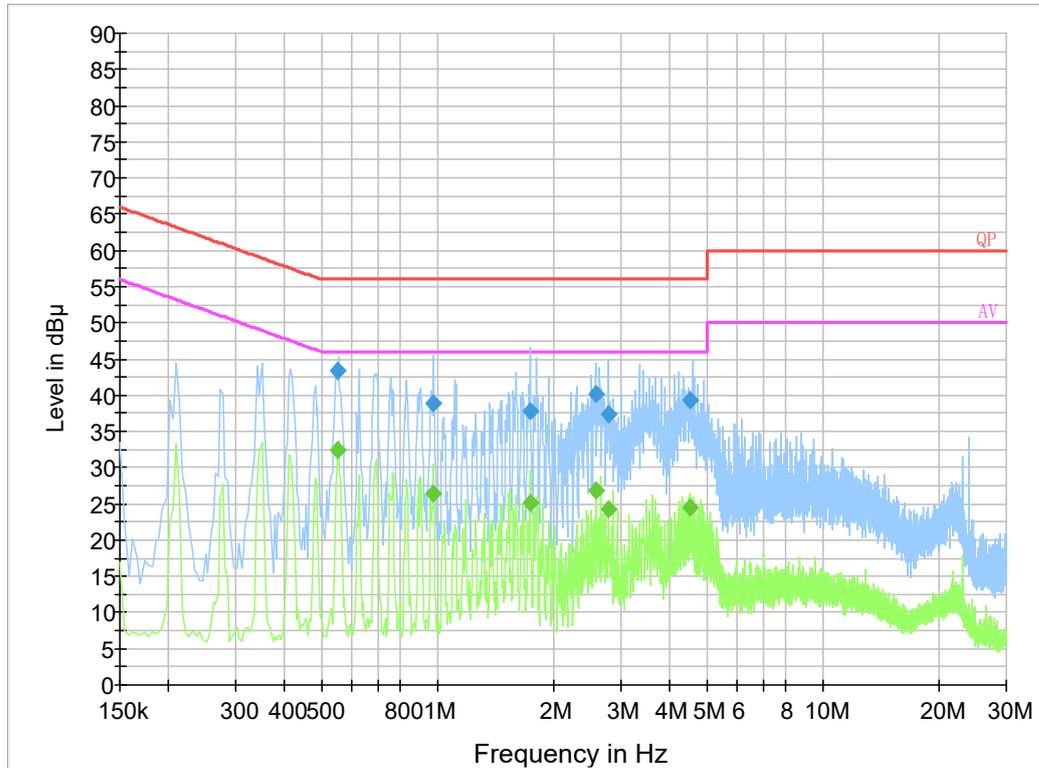


Final Result 1

Frequency (MHz)	QuasiPeak (dB µV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB µV)
0.549690	43.4	9.000	L1	19.8	12.6	56.0
0.971330	38.8	9.000	L1	19.9	17.2	56.0
1.735870	37.8	9.000	L1	19.9	18.2	56.0
2.579390	40.1	9.000	L1	19.8	15.9	56.0
2.788270	37.3	9.000	L1	19.9	18.7	56.0
4.533090	39.4	9.000	L1	19.9	16.6	56.0

Final Result 2

Frequency (MHz)	Average (dB µV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB µV)
0.549690	32.4	9.000	L1	19.8	13.6	46.0
0.971330	26.4	9.000	L1	19.9	19.6	46.0
1.735870	25.1	9.000	L1	19.9	20.9	46.0
2.579390	26.8	9.000	L1	19.8	19.2	46.0
2.788270	24.2	9.000	L1	19.9	21.8	46.0
4.533090	24.5	9.000	L1	19.9	21.5	46.0

**AC 120V/60 Hz, Neutral:**

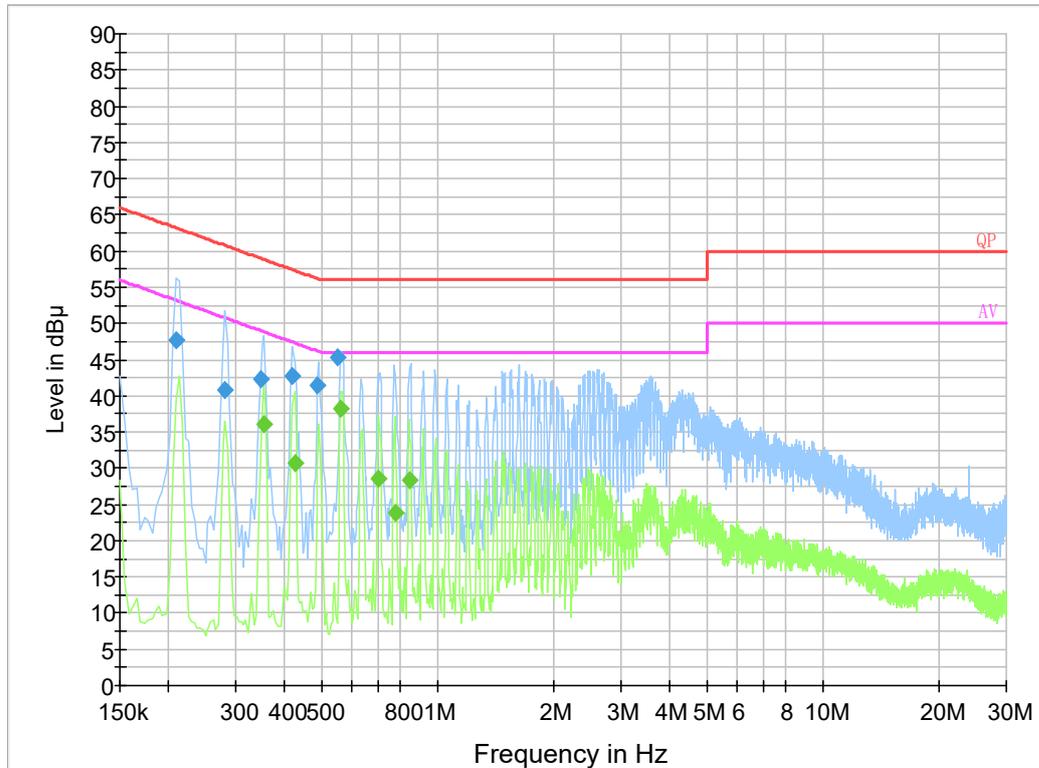

**Final Result 1**


Frequency (MHz)	QuasiPeak (dB µ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB µ V)
0.209500	47.6	9.000	N	19.8	15.6	63.2
0.281500	40.9	9.000	N	19.7	19.9	60.8
0.348690	42.4	9.000	N	19.9	16.6	59.0
0.419670	42.7	9.000	N	19.8	14.8	57.5
0.486590	41.5	9.000	N	19.8	14.7	56.2
0.553570	45.4	9.000	N	19.8	10.6	56.0

**Final Result 2**

Frequency (MHz)	Average (dB µ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB µ V)
0.354000	36.2	9.000	N	19.9	12.7	48.9
0.426000	30.7	9.000	N	19.8	16.6	47.3
0.562000	38.2	9.000	N	19.8	7.8	46.0
0.706000	28.5	9.000	N	19.8	17.5	46.0
0.778000	23.9	9.000	N	19.8	22.1	46.0
0.846000	28.3	9.000	N	19.8	17.7	46.0

EUT Operation Mode: Downloading

AC 120V/60 Hz, Line

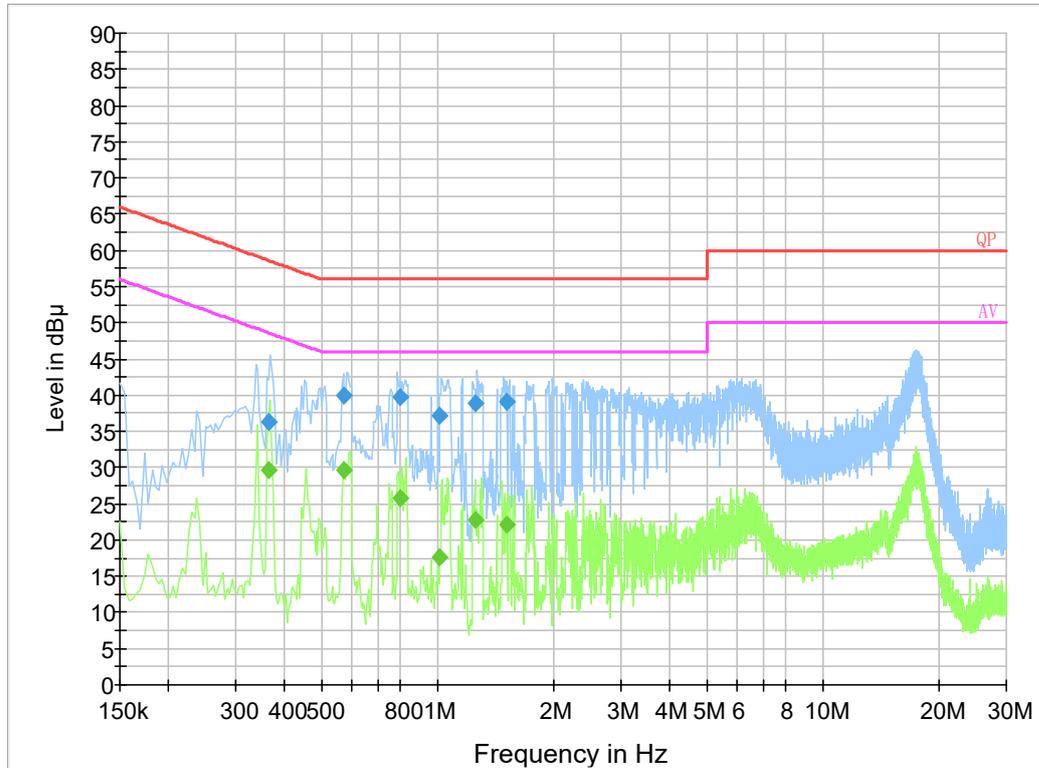


**Final Result 1**

Frequency (MHz)	QuasiPeak (dB µ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB µ V)
0.364450	36.3	9.000	L1	19.9	22.3	58.6
0.573270	39.9	9.000	L1	19.8	16.1	56.0
0.798150	39.7	9.000	L1	19.8	16.3	56.0
1.010910	37.1	9.000	L1	19.9	18.9	56.0
1.258950	38.9	9.000	L1	19.8	17.1	56.0
1.507710	39.2	9.000	L1	19.8	16.8	56.0

**Final Result 2**

Frequency (MHz)	Average (dB µ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB µ V)
0.364450	29.7	9.000	L1	19.9	18.9	48.6
0.573270	29.7	9.000	L1	19.8	16.3	46.0
0.798150	25.7	9.000	L1	19.8	20.3	46.0
1.010910	17.7	9.000	L1	19.9	28.3	46.0
1.258950	22.8	9.000	L1	19.8	23.2	46.0
1.507710	22.2	9.000	L1	19.8	23.8	46.0

**AC 120V/60 Hz, Neutral:**

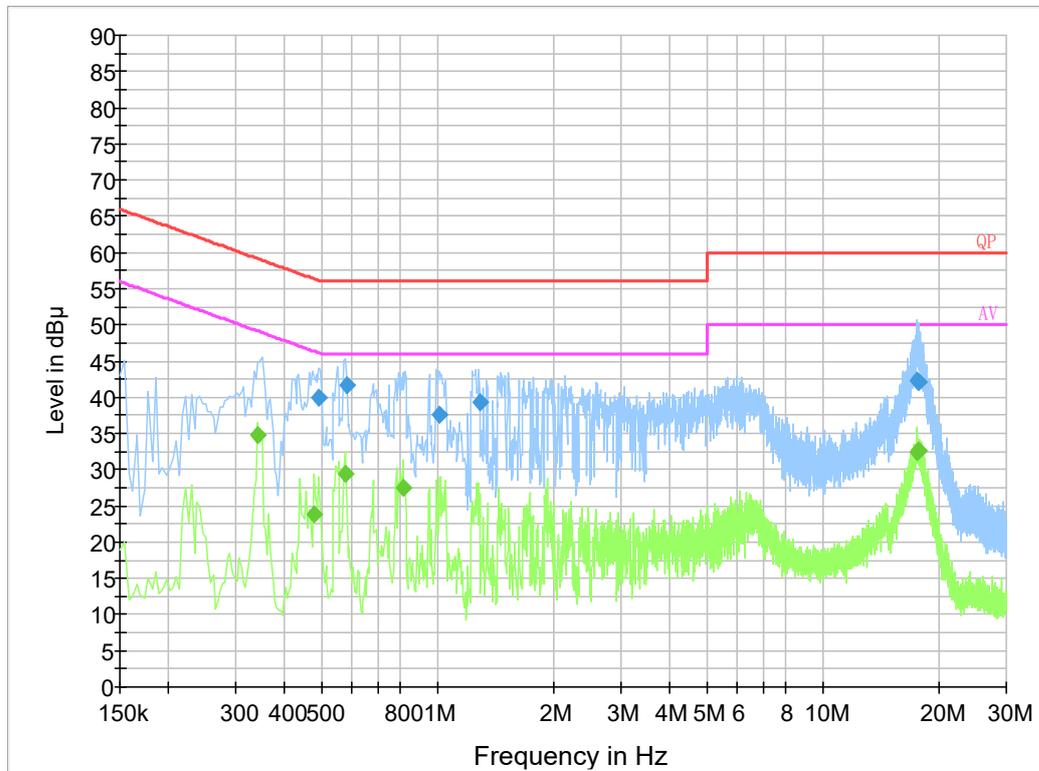

**Final Result 1**

Frequency (MHz)	QuasiPeak (dB µ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB µ V)
0.494590	39.9	9.000	N	19.8	16.2	56.1
0.581330	41.6	9.000	N	19.8	14.4	56.0
1.011030	37.7	9.000	N	19.8	18.3	56.0
1.290770	39.4	9.000	N	19.8	16.6	56.0
17.526510	42.3	9.000	N	20.2	17.7	60.0
17.783870	42.0	9.000	N	20.2	18.0	60.0

**Final Result 2**

Frequency (MHz)	Average (dB µ V)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dB µ V)
0.342000	34.8	9.000	N	19.8	14.4	49.2
0.478000	23.7	9.000	N	19.8	22.7	46.4
0.578000	29.3	9.000	N	19.8	16.7	46.0
0.814000	27.6	9.000	N	19.8	18.4	46.0
17.566000	32.5	9.000	N	20.2	17.5	50.0
17.682000	32.6	9.000	N	20.2	17.4	50.0


## FCC §15.109 - RADIATED SPURIOUS EMISSIONS

### Applicable Standard


FCC §15.109

### EUT Setup

Below 1GHz:

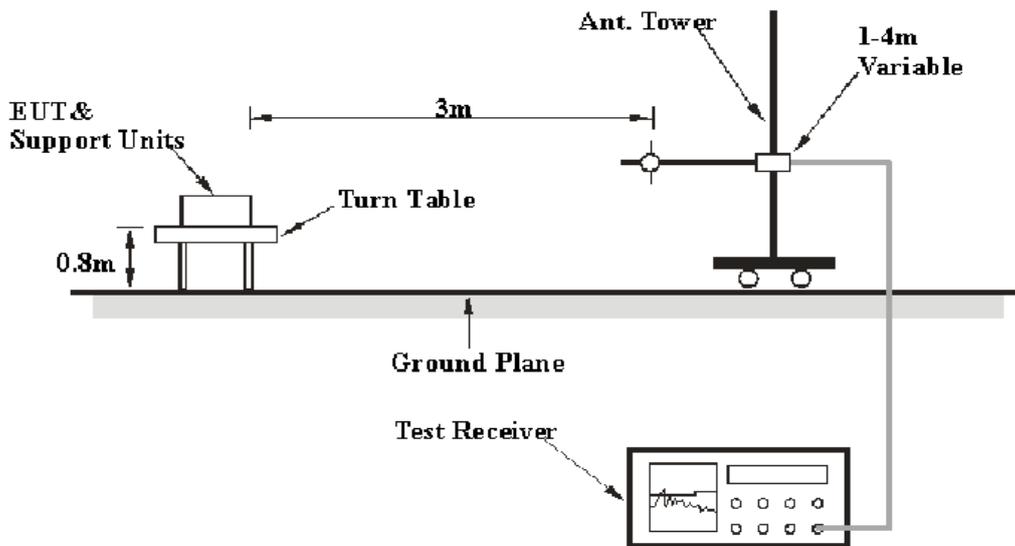

Above 1GHz:

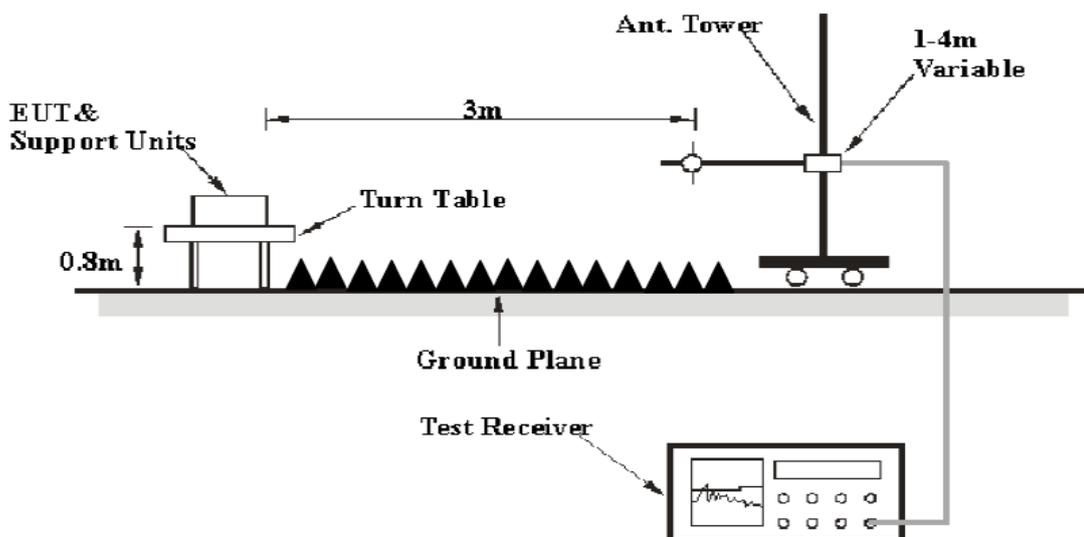

The radiated emission tests were performed in the 3 meters chamber test site, using the setup accordance with the ANSI C63.4-2014. The specification used was the FCC Part 15.109 limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The spacing between the peripherals was 10 cm.

### EMI Test Receiver Setup

During the radiated emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	100 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1MHz	3 MHz	/	PK
	1MHz	10 Hz	/	Ave.

### Test Procedure

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

All data was recorded in the Quasi-peak detector mode from 30 MHz to 1 GHz and PK and average detector modes for frequencies above 1 GHz.

### Corrected Amplitude & Margin Calculation

The Corrected Amplitude is calculated by adding the Antenna Factor and Cable Loss, and subtracting the Amplifier Gain from the Meter Reading. The basic equation is as follows:

$$\text{Corrected Amplitude} = \text{Meter Reading} + \text{Antenna Factor} + \text{Cable Loss} - \text{Amplifier Gain}$$

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Corrected Amplitude}$$

### Test Data


#### Environmental Conditions

<b>Temperature:</b>	23.4~25 °C
<b>Relative Humidity:</b>	52~55 %
<b>ATM Pressure:</b>	101.0~101.3 kPa

*The testing was performed by Harris He and Kilroy Deng from 2021-04-11 to 2021-04-21 for below 1GHz and Alan He on 2021-04-12 for above 1GHz.*

EUT Operation Mode: Charging & Playing

30 MHz~1 GHz:

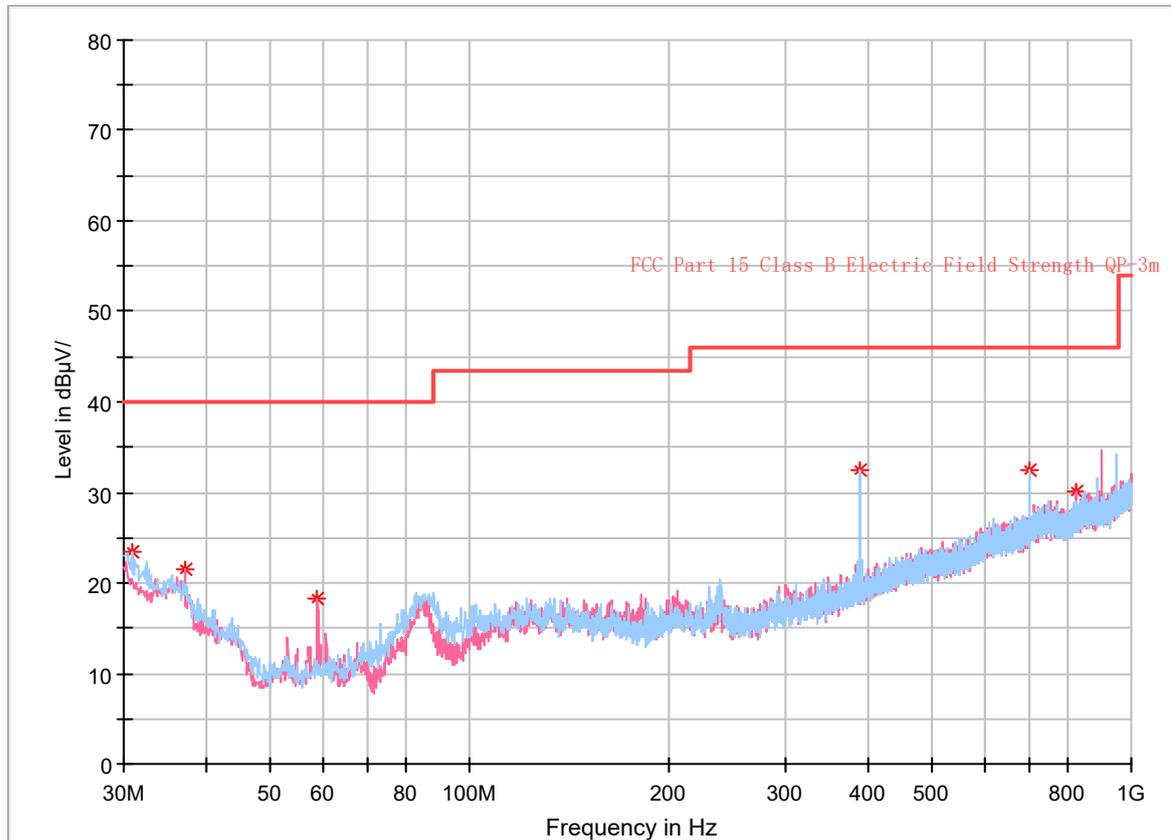

**Critical\_Freqs**


Frequency (MHz)	MaxPeak (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
30.848750	23.46	40.00	16.54	200.0	H	0.0	-4.2
37.153750	21.48	40.00	18.52	400.0	V	134.0	-8.7
58.857500	18.34	40.00	21.66	200.0	V	219.0	-16.5
389.991250	32.53	46.00	13.47	100.0	H	290.0	-7.6
703.180000	32.50	46.00	13.50	300.0	H	228.0	-1.4
827.946250	30.10	46.00	15.90	200.0	V	324.0	-0.1

**1-13.5 GHz:**

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBuV/m)	FCC Part 15B	
	Reading (dBμV)	PK/QP/Ave.		Height (m)	Polar (H / V)			Limit (dBuV/m)	Margin (dB)
1255.86	43.36	PK	324	1.9	H	-4.61	38.75	74	35.25
1255.86	28.34	Ave.	324	1.9	H	-4.61	23.73	54	30.27
1255.86	43.52	PK	355	2.0	V	-4.61	38.91	74	35.09
1255.86	28.11	Ave.	355	2.0	V	-4.61	23.50	54	30.50
2025.95	44.01	PK	153	1.1	H	-1.29	42.72	74	31.28
2025.95	28.32	Ave.	153	1.1	H	-1.29	27.03	54	26.97
2025.95	43.87	PK	5	1.4	V	-1.29	42.58	74	31.42
2025.95	43.36	PK	324	1.9	V	-4.61	38.75	74	35.25

EUT Operation Mode: Downloading

30 MHz~1 GHz:

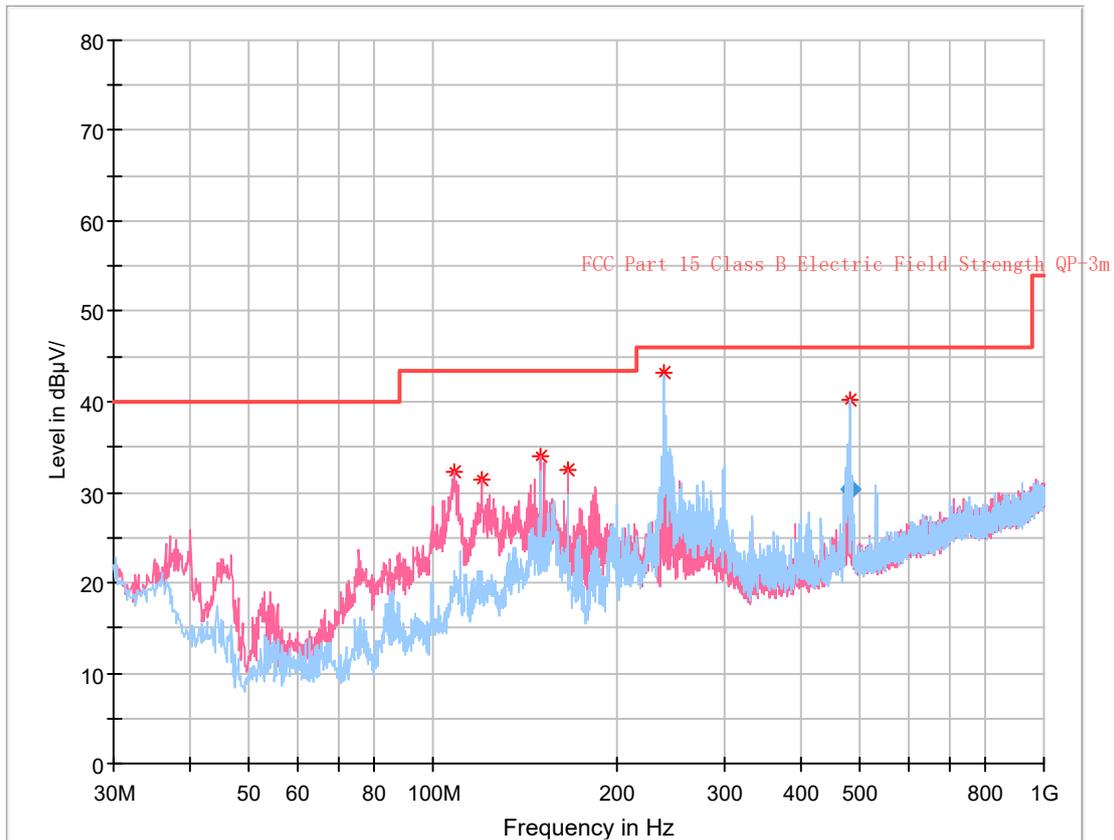

### Final Result

Frequency (MHz)	QuasiPeak (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
239.573375	26.28	46.00	19.72	212.0	H	230.0	-11.7
480.324250	30.33	46.00	15.67	257.0	H	66.0	-5.3

### Critical Freqs

Frequency (MHz)	MaxPeak (dB µ V/m)	Limit (dB µ V/m)	Margin (dB)	Height (cm)	Pol	Azimuth (deg)	Corr. (dB)
108.448750	32.18	43.50	11.32	100.0	V	272.0	-11.5
119.967500	31.34	43.50	12.16	100.0	V	324.0	-10.4
150.037500	34.03	43.50	9.47	100.0	V	128.0	-11.4
166.042500	32.53	43.50	10.97	100.0	V	148.0	-12.0

Note: QP measurement not performed when the Peak value is more than 6dB lower than limit.

**1-13.5GHz:**

Frequency (MHz)	Receiver		Turntable Degree	Rx Antenna		Corrected Factor (dB/m)	Corrected Amplitude (dBuV/m)	FCC Part 15B	
	Reading (dBμV)	PK/QP/Ave.		Height (m)	Polar (H / V)			Limit (dBuV/m)	Margin (dB)
1394.40	46.76	PK	215	1.0	H	-3.32	43.44	74	30.56
1394.40	28.34	Ave.	215	1.0	H	-3.32	25.02	54	28.98
1394.40	51.24	PK	300	1.6	V	-3.32	47.92	74	26.08
1394.40	29.02	Ave.	300	1.6	V	-3.32	25.70	54	28.30
1597.00	45.36	PK	262	2.3	H	-2.71	42.65	74	31.35
1597.00	28.11	Ave.	262	2.3	H	-2.71	25.40	54	28.60
1597.00	47.32	PK	7	1.5	V	-2.71	44.61	74	29.39
1597.00	28.67	Ave.	7	1.5	V	-2.71	25.96	54	28.04

**\*\*\*\*\* END OF REPORT \*\*\*\*\***