



FCC PART 15B  
TEST REPORT

For

**BLU Products, Inc.**

10814 NW 33rd St # 100 Doral, FL 33172,USA

**FCC ID: YHLBLUM7L**

<b>Report Type:</b> Original Report	<b>Product Type:</b> Smart Phone
<b>Test Engineer:</b> Barry Yang, Leo Long, Felix Wang	<i>Felix Wang Barry Yang Leo Long</i>
<b>Report Number:</b>	RSZ201123008-00C
<b>Report Date:</b>	2021-01-04
<b>Reviewed By:</b> Ivan Cao Assistant Manager	<i>Ivan Cao</i>
<b>Test Laboratory:</b>	Bay Area Compliance Laboratories Corp. (Dongguan) No.12, Pulong East 1 <sup>st</sup> Road, Tangxia Town, Dongguan, Guangdong, China Tel: +86-769-86858888 Fax: +86-769-86858891 <a href="http://www.baclcorp.com.cn">www.baclcorp.com.cn</a>

## TABLE OF CONTENTS

<b>General Information.....</b>	<b>3</b>
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT).....	3
OBJECTIVE .....	3
RELATED SUBMITTAL(S)/GRANT(S).....	3
TEST METHODOLOGY .....	3
MEASUREMENT UNCERTAINTY.....	4
TEST FACILITY .....	4
DECLARATIONS.....	4
<b>System Test Configuration.....</b>	<b>5</b>
DESCRIPTION OF TEST CONFIGURATION .....	5
EUT EXERCISE SOFTWARE .....	5
SUPPORT EQUIPMENT LIST AND DETAILS .....	5
SUPPORT CABLE LIST AND DETAILS .....	5
BLOCK DIAGRAM OF TEST SETUP .....	6
TEST EQUIPMENT LIST.....	7
ENVIRONMENTAL CONDITIONS.....	7
<b>Summary of Test Results.....</b>	<b>8</b>
<b>FCC Part 15B §15.107 – Conducted emissions .....</b>	<b>9</b>
EUT SETUP .....	9
EMI TEST RECEIVER SETUP.....	9
TEST PROCEDURE .....	10
CORRECTED AMPLITUDE & MARGIN CALCULATION .....	10
TEST DATA .....	10
<b>FCC Part 15B §15.109 – Radiated emissions .....</b>	<b>13</b>
EUT SETUP .....	13
EMI TEST RECEIVER SETUP.....	14
TEST PROCEDURE .....	14
CORRECTED AMPLITUDE & MARGIN CALCULATION .....	14
TEST DATA .....	14

## GENERAL INFORMATION

### Product Description for Equipment under Test (EUT)

<b>EUT Name:</b>		Smart Phone
<b>EUT Model:</b>		M7L
<b>Highest Operation Frequency:</b>		2690 MHz
<b>Rated Input Voltage:</b>		DC 3.7 V from battery or DC 5V from adapter
<b>Adapter 1# Information</b>	<b>Model:</b>	US-CR-1000
	<b>Input:</b>	100-240Vac 50/60Hz 0.2A
	<b>Output:</b>	5.0Vdc 1000mA
<b>Adapter 2# Information</b>	<b>Model:</b>	US-TZ-1000
	<b>Input:</b>	100-240Vac 50/60Hz 0.2A
	<b>Output:</b>	5.0Vdc 1000mA
<b>Serial Number:</b>		RSZ201123008-RF-S1
<b>EUT Received Date:</b>		2020.11.23
<b>EUT Received Status:</b>		Good

### Objective

This report is prepared on behalf of **BLU Products, Inc.** in accordance with FCC Part 15B Part 2, Part J, and Part 15, Subpart A and B of the Federal Communications Commission's rules.

The objective is to determine the compliance of EUT with: FCC Part 15B.

### Related Submittal(s)/Grant(s)

FCC Part 22H, 24E,27 PCE submissions with FCC ID: YHLBLUM7L

FCC Part 15C DSS,DTS submissions with FCC ID: YHLBLUM7L

### Test Methodology

All measurements contained in this report were conducted with ANSI C63.4-2014 American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.

## Measurement Uncertainty

Parameter	Measurement Uncertainty
Unwanted Emissions, radiated	30M~200MHz: 4.58 dB for Horizontal, 4.59 dB for Vertical 200M~1GHz: 4.83 dB for Horizontal, 5.85 dB for Vertical 1G~6GHz: 4.45 dB, 6G~13GHz: 5.23 dB
Temperature	±1°C
Humidity	±5%
AC Power Lines Conducted Emission	3.12 dB (150 kHz to 30 MHz)

*Note: Otherwise required by the applicant or Product Regulations, Decision Rule in this report did not consider the uncertainty. The extended uncertainty given in this report is obtained by combining the standard uncertainty times the coverage factor K with the 95% confidence interval.*

## Test Facility

The Test site used by Bay Area Compliance Laboratories Corp. (Dongguan) to collect test data is located on the No.12, Pulong East 1<sup>st</sup> Road, Tangxia Town, Dongguan, Guangdong, China.

The lab has been recognized as the FCC accredited lab under the KDB 974614 D01 and is listed in the FCC Public Access Link (PAL) database, FCC Registration No. : 897218, the FCC Designation No. : CN1220.

The lab has been recognized by Innovation, Science and Economic Development Canada to test to Canadian radio equipment requirements, the CAB identifier: CN0022.

## Declarations

BACL is not responsible for the authenticity of any test data provided by the applicant. Data included from the applicant that may affect test results are marked with a triangle symbol “▲”. Customer model name, addresses, names, trademarks etc. are not considered data.

Unless otherwise stated the results shown in this test report refer only to the sample(s) tested.

This report cannot be reproduced except in full, without prior written approval of the Company.

This report is valid only with a valid digital signature. The digital signature may be available only under the Adobe software above version 7.0.

This report may contain data that are not covered by the accreditation scope and shall be marked with an asterisk “★”.

## SYSTEM TEST CONFIGURATION

### Description of Test Configuration

The system was configured for testing in Downloading mode.

### Equipment Modifications

No modification was made to the EUT.

### EUT Exercise Software

The software "Winthrax.exe" was used during test.


### Support Equipment List and Details

Manufacturer	Description	Model	Serial Number
ThinkPad	Laptop	E450	PF-0MR8KV 16/08
DELL	Laptop	PP11L	QDS-BRCM1017
TOTO Link	Router	LR1200	190924004S1
DELL	Mouse	MO56UOA	F0Y02P7Y
DELL	Keyboard	L100	CNORH656658907BL05DC
Zioncom	Router	A3700R	200622002S1

### Support Cable List and Details

Cable Description	Shielding Type	Ferrite Core	Length (m)	From Port	To
USB Cable	No	No	1.5	USB Port of Laptop	Keyboard
USB Cable	No	No	1.5	USB Port of Laptop	Mouse
RJ45 Cable	No	No	10	Router	Laptop
USB Cable	No	No	1.2	USB Port of Laptop	EUT
Earphone Cable	No	No	1.15	EUT	Earphone

### Block Diagram of Test Setup

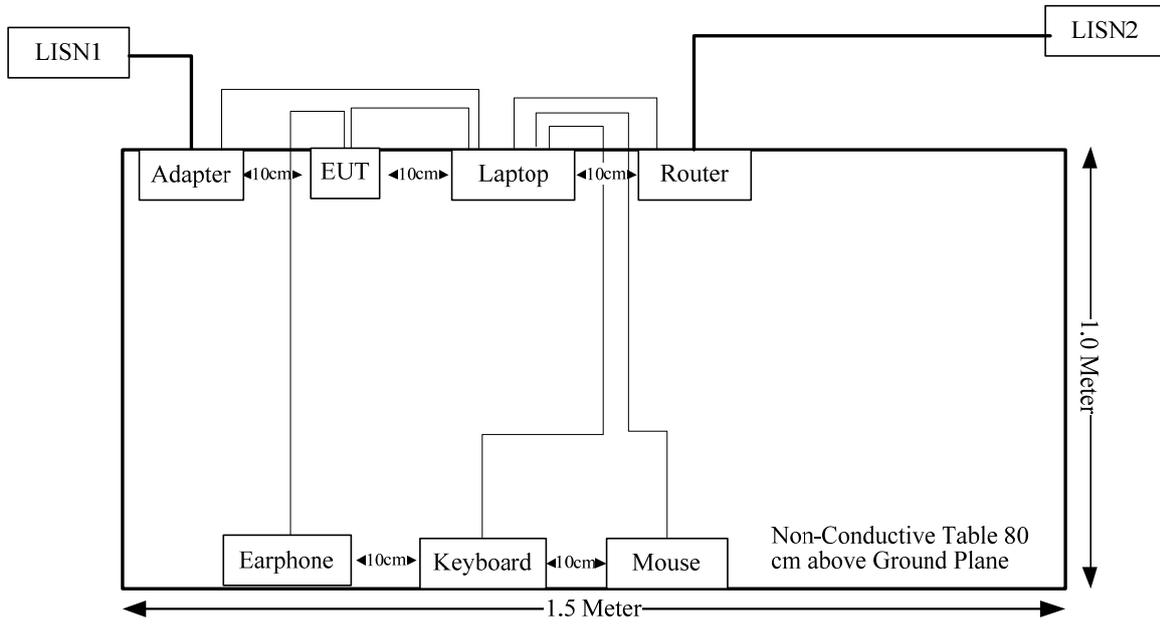

**Test Equipment List**

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date
<b>Conducted emissions</b>					
R&S	LISN	ENV 216	101614	2020-09-12	2021-09-12
R&S	EMI Test Receiver	ESCI	101121	2020-07-07	2021-07-07
MICRO-COAX	Coaxial Cable	C-NJNJ-50	C-0200-01	2020-09-05	2021-09-05
R&S	Test Software	EMC32	Version 9.10.00	N/A	N/A
<b>Radiated emissions Below 1GHz</b>					
Sunol Sciences	Antenna	JB3	A060611-2	2020-08-25	2023-08-25
R&S	EMI Test Receiver	ESCI	100224	2020-09-12	2021-09-12
Unknown	Coaxial Cable	C-NJNJ-50	C-1000-01	2020-09-05	2021-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0400-02	2020-09-05	2021-09-05
Unknown	Coaxial Cable	C-NJNJ-50	C-0530-01	2020-09-24	2021-09-24
Sonoma	Amplifier	310N	185914	2020-10-13	2021-10-13
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A
<b>Radiated emissions Above 1GHz</b>					
ETS-Lindgren	Horn Antenna	3115	000 527 35	2018-10-12	2021-10-12
Agilent	Spectrum Analyzer	E4440A	SG43360054	2020-07-07	2021-07-07
Unknown	Coaxial Cable	C-SJSJ-50	C-0800-01	2020-09-05	2021-09-05
Mini-Circuit	Amplifier	ZVA-213-S+	54201245	2020-09-05	2021-09-05
Farad	Test Software	EZ-EMC	V1.1.4.2	N/A	N/A

\* Statement of Traceability: Bay Area Compliance Laboratories Corp. (Dongguan) attests that all calibrations have been performed, traceable to National Primary Standards and International System of Units (SI).

**Environmental Conditions**

Test Item:	Conducted emissions	Radiated emissions (Below 1GHz)	Radiated emissions (Above 1GHz)
Temperature:	23.5°C	27.4 °C	24.1°C
Relative Humidity:	64%	41%	40%
ATM Pressure:	101.0kPa	101.7kPa	101.1kPa
Tester:	Barry Yang	Leo Long	Felix Wang
Test Date:	2020-12-11	2020-12-12	2020-12-14

---

## SUMMARY OF TEST RESULTS


---

### FCC Part 15B

Clause	Description of Test	Test Result
§15.107	Conducted emissions	Compliance
§15.109	Radiated emissions	Compliance

**FCC PART 15B §15.107 – CONDUCTED EMISSIONS**

**EUT Setup**

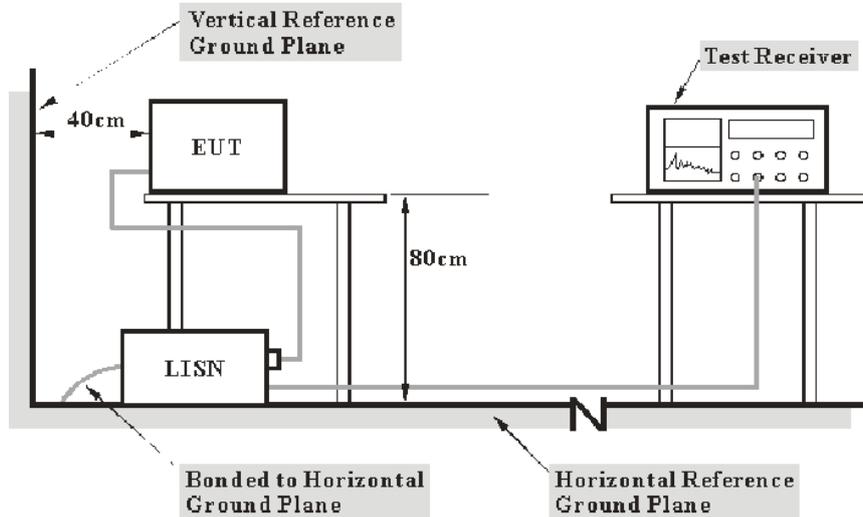

- Note: 1. Support units were connected to second LISN.  
 2. Both of LISNs (AMN) 80 cm from EUT and at the least 80 cm from other units and other metal planes support units.

The setup of EUT is according with per ANSI C63.4-2014 measurement procedure. The specification used was with the FCC Part 15 B Class B limits.

The external I/O cables were draped along the test table and formed a bundle 30 to 40 cm long in the middle.

The adapter was connected to the main LISN with a 120 V/60 Hz AC power source.

**EMI Test Receiver Setup**

The EMI test receiver was set to investigate the spectrum from 150 kHz to 30 MHz.

During the conducted emission test, the EMI test receiver was set with the following configurations:

Frequency Range	IF B/W
150 kHz – 30 MHz	9 kHz

## Test Procedure

During the conducted emission test, the adapter or EUT was connected to the first LISN.

The frequency and amplitude of the six highest ac power-line conducted emissions relative to the limit, measured over all the current-carrying conductors of the EUT power cords, and the operating frequency or frequency to which the EUT is tuned (if appropriate), should be reported, unless such emissions are more than 20 dB below the limit. AC power-line conducted emissions measurements are to be separately carried out only on each of the phase (“hot”) line(s) and (if used) on the neutral line(s), but not on the ground [protective earth] line(s). If less than six emission frequencies are within 20 dB of the limit, then the noise level of the measuring instrument at representative frequencies should be reported. The specific conductor of the power-line cord for each of the reported emissions should be identified. Measure the six highest emissions with respect to the limit on each current-carrying conductor of each power cord associated with the EUT (but not the power cords of associated or peripheral equipment that are part of the test configuration). Then, report the six highest emissions with respect to the limit from among all the measurements identifying the frequency and specific current-carrying conductor identified with the emission. The six highest emissions should be reported for each of the current-carrying conductors, or the six highest emissions may be reported over all the current-carrying conductors.

## Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result (QuasiPeak or Average) = Meter Reading + Corr.

Note:

Corr. = Cable loss + Factor of coupling device

The “**Margin**” column of the following data tables indicates the degree of compliance within the applicable limit. For example, a margin of 7dB means the emission is 7dB below the limit. The equation for margin calculation is as follows:

Margin = Limit – Result


## Test Data

**Test mode: Downloading**

**Test Result: Compliance, Please refer to following table and plots:**

Please refer to following table and plots:


Port: L  
 Test Mode: Downloading  
 Power Source: AC 120V/60Hz

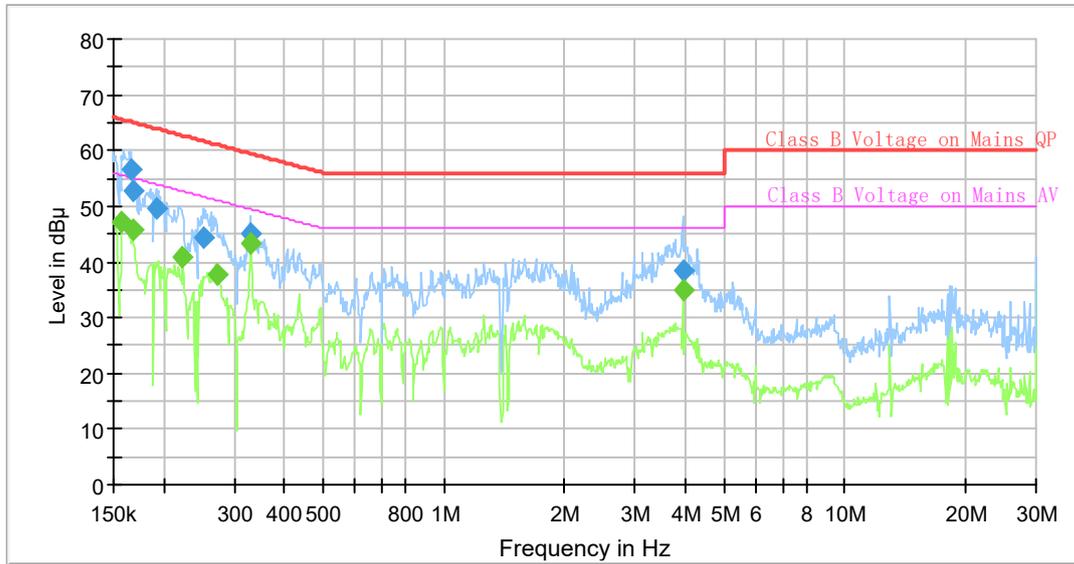

### Final Result

Frequency (MHz)	QuasiPeak (dBµV)	Average (dBµV)	Limit (dBµV)	Margin (dB)	Bandwidth (kHz)	Line	Corr. (dB)
0.157671	---	47.33	55.59	8.26	9.000	L1	9.6
0.165734	56.64	---	65.17	8.53	9.000	L1	9.6
0.167396	---	45.79	55.09	9.30	9.000	L1	9.6
0.167396	52.87	---	65.09	12.22	9.000	L1	9.6
0.191526	49.71	---	63.97	14.26	9.000	L1	9.6
0.223551	---	40.81	52.69	11.88	9.000	L1	9.6
0.250724	44.30	---	61.73	17.43	9.000	L1	9.6
0.271552	---	37.72	51.07	13.35	9.000	L1	9.6
0.329860	45.23	---	59.45	14.22	9.000	L1	9.6
0.329860	---	43.40	49.45	6.05	9.000	L1	9.6
3.953919	---	34.97	46.00	11.03	9.000	L1	9.7
3.953919	38.48	---	56.00	17.52	9.000	L1	9.7

Port: N  
 Test Mode: Downloading  
 Power Source: AC 120V/60Hz

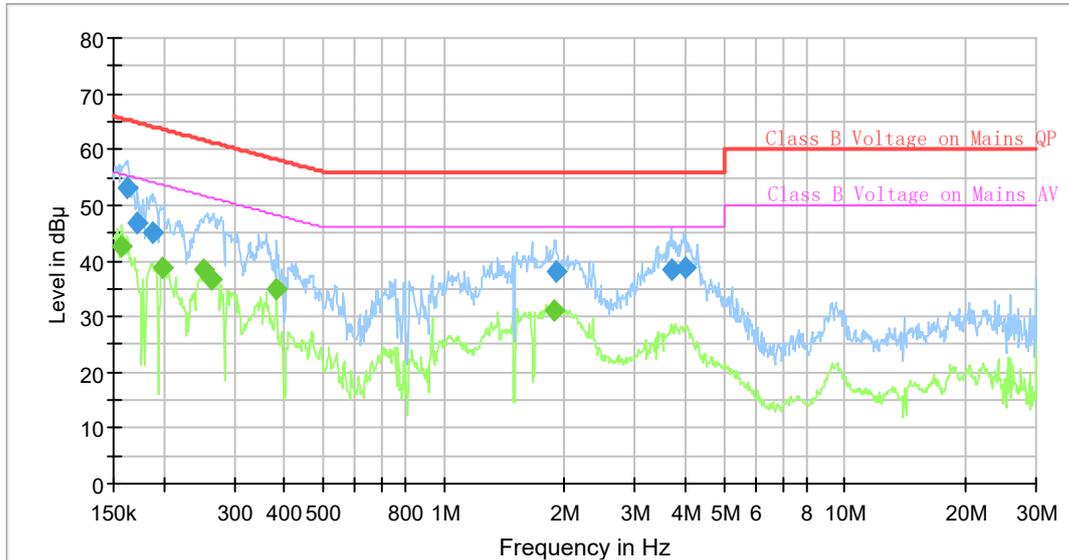


**Final Result**

Frequency (MHz)	QuasiPeak (dBμV)	Average (dBμV)	Limit (dBμV)	Margin (dB)	Bandwidth (kHz)	Line	Corr. (dB)
0.157671	---	42.55	55.59	13.04	9.000	N	9.6
0.162461	53.08	---	65.34	12.26	9.000	N	9.6
0.171623	46.94	---	64.88	17.94	9.000	N	9.6
0.186809	45.22	---	64.18	18.96	9.000	N	9.6
0.198331	---	38.95	53.68	14.73	9.000	N	9.6
0.251977	---	38.48	51.69	13.21	9.000	N	9.6
0.262235	---	36.63	51.36	14.73	9.000	N	9.6
0.383099	---	34.96	48.21	13.25	9.000	N	9.6
1.889951	---	31.16	46.00	14.84	9.000	N	9.6
1.899401	38.06	---	56.00	17.94	9.000	N	9.6
3.687253	38.37	---	56.00	17.63	9.000	N	9.6
4.013525	38.75	---	56.00	17.25	9.000	N	9.6


**FCC PART 15B §15.109 – RADIATED EMISSIONS**

**EUT Setup**

Below 1GHz:

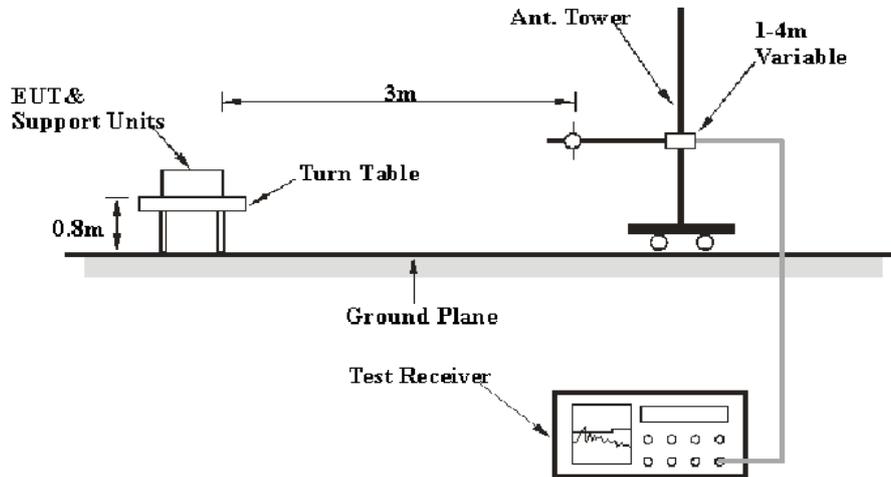

Above 1GHz:

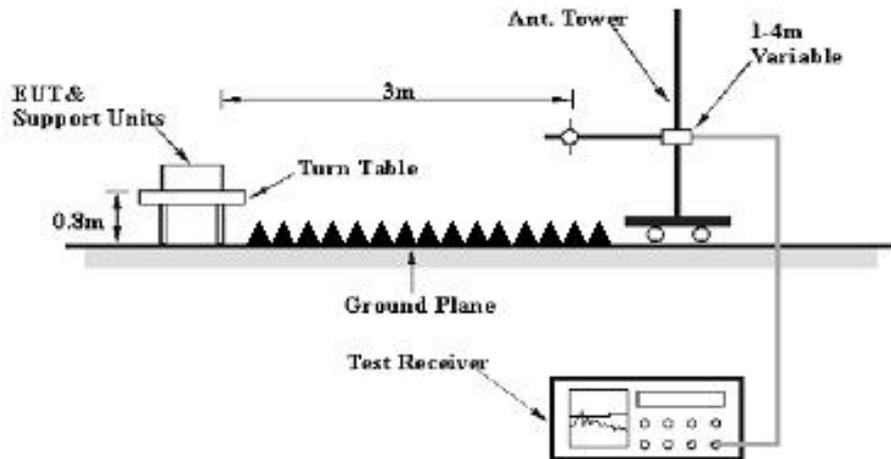

The radiated emission tests were performed at the 3 meters distance, above 1GHz were performed at the 3 meters, using the setup accordance with the ANSI C63.4-2014. The specification used was the FCC Part 15.109 Class B limits.

## EMI Test Receiver Setup

The system was investigated from 30 MHz to 13.5 GHz.

During the radiated emission test, the EMI test receiver was set with the following configurations:

Frequency Range	RBW	Video B/W	IF B/W	Measurement
30 MHz – 1000 MHz	120 kHz	300 kHz	120 kHz	QP
Above 1 GHz	1 MHz	3 MHz	/	Peak
	1 MHz	Reduced video bandwidth	/	AVG

## Test Procedure

During the radiated emissions, the adapter was connected to the first AC floor outlet.

Maximizing procedure was performed on the highest emissions to ensure that the EUT complied with all installation combinations.

The data was recorded in the Quasi-peak detection mode for below 1 GHz, peak and average detection mode above 1 GHz.

## Corrected Amplitude & Margin Calculation

The basic equation is as follows:

Result = Meter Reading + Corrected

Corrected = Antenna Factor + Cable Loss - Amplifier Gain

The “**Margin**” column of the following data tables indicates the degree of compliance with the applicable limit. For example, a margin of 7 dB means the emission is 7 dB below the limit. The equation for margin calculation is as follows:

$$\text{Margin} = \text{Limit} - \text{Result}$$


## Test Data

*Please refer to following table and plots:*

Please refer to following table and plots:

**Condition:** FCC Part 15B Class B  
**Model:** M7L  
**Test Mode:** Downloading


**Polarization:** Horizontal  
**Power:** AC 120V/60Hz  
**Distance:** 3m

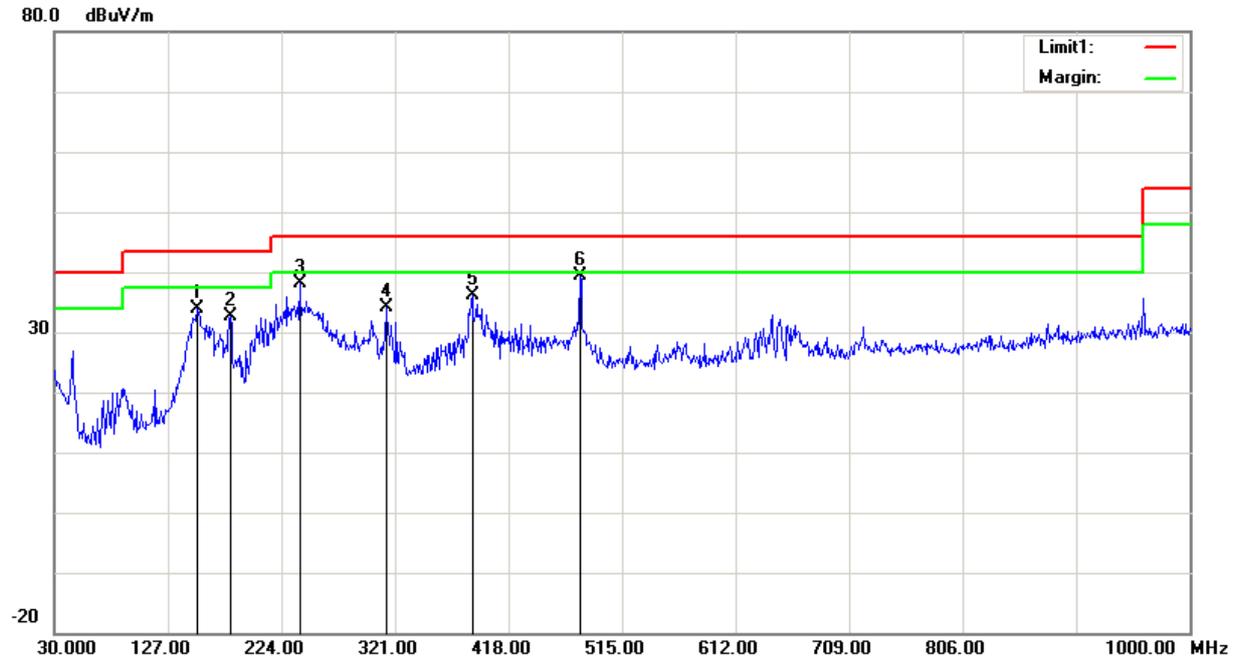

No.	Frequency (MHz)	Reading (dBuV/m)	Detector	Corrected dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	152.2200	43.06	peak	-9.26	33.80	43.50	9.70
2	180.3500	42.49	peak	-9.83	32.66	43.50	10.84
3	239.5200	48.16	peak	-10.05	38.11	46.00	7.89
4	313.2400	41.09	peak	-7.01	34.08	46.00	11.92
5	386.9600	41.80	peak	-5.66	36.14	46.00	9.86
6	479.1100	43.27	peak	-3.81	39.46	46.00	6.54

**Condition:** FCC Part 15B Class B  
**Model:** M7L  
**Test Mode:** Downloading


**Polarization:** Vertical  
**Power:** AC 120V/60Hz  
**Distance:** 3m

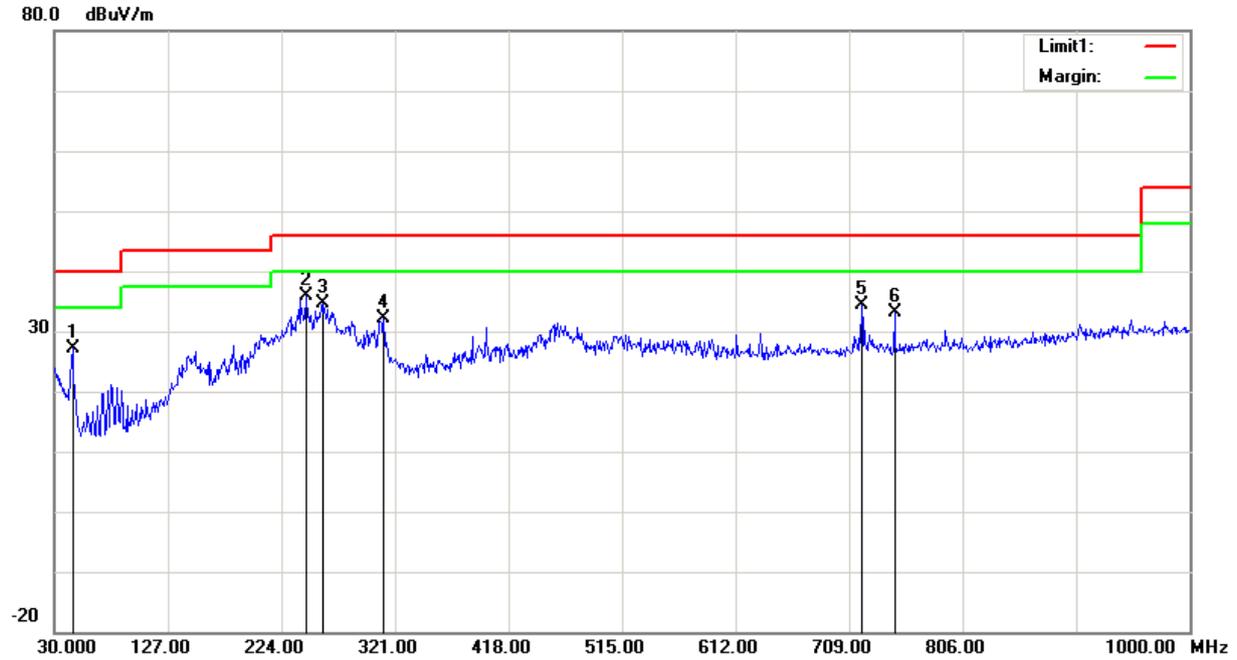

No.	Frequency (MHz)	Reading (dBuV/m)	Detector	Corrected dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	45.5200	40.21	peak	-13.12	27.09	40.00	12.91
2	245.3400	45.84	peak	-9.88	35.96	46.00	10.04
3	258.9200	43.85	peak	-9.33	34.52	46.00	11.48
4	311.3000	39.18	peak	-6.98	32.20	46.00	13.80
5	719.6700	33.90	peak	0.42	34.32	46.00	11.68
6	747.8000	32.56	peak	0.57	33.13	46.00	12.87

**Condition:** FCC Part 15B Class B Peak  
**Model:** M7L  
**Test Mode:** Downloading

**Polarization:** Horizontal  
**Power:** AC 120V/60Hz  
**Distance:** 3m

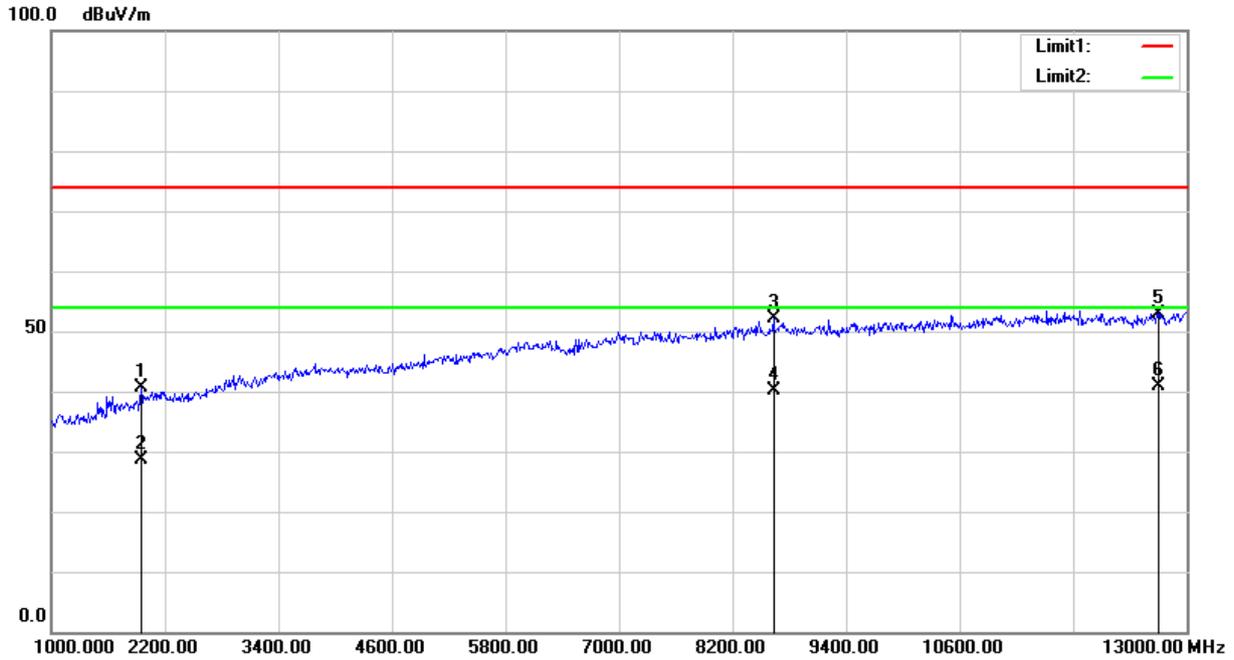


No.	Frequency (MHz)	Reading (dBuV/m)	Detector	Corrected dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	1948.000	37.74	peak	2.98	40.72	74.00	33.28
2	1948.000	25.65	AVG	2.98	28.63	54.00	25.37
3	8638.000	35.44	peak	16.73	52.17	74.00	21.83
4	8638.000	23.31	AVG	16.73	40.04	54.00	13.96
5	12700.000	32.01	peak	20.96	52.97	74.00	21.03
6	12700.000	20.03	AVG	20.96	40.99	54.00	13.01

No emission was detected in the range of 13-13.5GHz

**Condition:** FCC Part 15B Class B  
**Model:** M7L  
**Test Mode:** Downloading

**Polarization:** Vertical  
**Power:** AC 120V/60Hz  
**Distance:** 3m

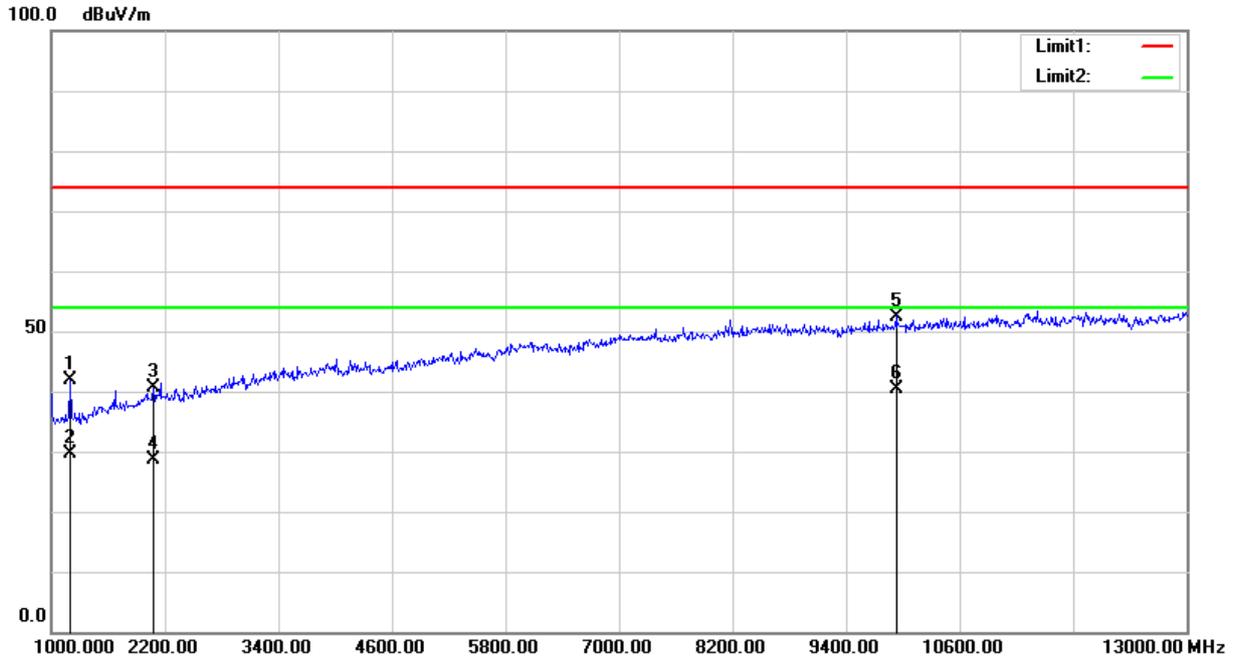

No.	Frequency (MHz)	Reading (dBuV/m)	Detector	Corrected dB/m	Result (dBuV/m)	Limit (dBuV/m)	Margin (dB)
1	1204.000	42.19	peak	-0.34	41.85	74.00	32.15
2	1204.000	30.09	AVG	-0.34	29.75	54.00	24.25
3	2086.000	36.86	peak	3.80	40.66	74.00	33.34
4	2086.000	24.75	AVG	3.80	28.55	54.00	25.45
5	9928.000	33.85	peak	18.65	52.50	74.00	21.50
6	9928.000	21.73	AVG	18.65	40.38	54.00	13.62

No emission was detected in the range of 13-13.5GHz

\*\*\*\*\*END OF REPORT\*\*\*\*\*