

APPLICANT : CT Asia

EQUIPMENT: Quad-band /GPRS/ GSM Mobile Phone

BRAND NAME : BLU

MODEL NAME : Samba TV , Samba W FCC ID : YHLBLUSAMBATV

STANDARD : FCC 47 CFR Part 2 (2.1093)

ANSI/IEEE C95.1-1992

IEEE 1528-2003

FCC OET Bulletin 65 Supplement C (Edition 01-01)

The product was completely tested on Jun. 26, 2013. We, SPORTON INTERNATIONAL (SHENZHEN) INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (SHENZHEN) INC., the test report shall not be reproduced except in full.

Reviewed by: Eric Huang / Deputy Manager

Erle huans

Approved by: Jones Tsai / Manager

lac-MRA



Report No. : FA360409

SPORTON INTERNATIONAL (SHENZHEN) INC.

No. 101, Complex Building C, Guanlong Village, Xili Town, Nanshan District, Shenzhen, Guangdong, P.R.C.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUSAMBATV Page Number : 1 of 39
Report Issued Date : Jul. 03, 2013

Report Version : Rev. 01

Table of Contents

1. Statement of Compliance	
2. Administration Data	
2.1 Testing Laboratory	
2.2 Applicant	5
2.3 Manufacturer	5
2.4 Application Details	5
3. General Information	
3.1 Description of Equipment Under Test (EUT)	
3.2 Maximum RF output power among production units	
3.3 Applied Standard	8
3.4 Device Category and SAR Limits	8
3.5 Test Conditions	
4. Specific Absorption Rate (SAR)	
4.1 Introduction	a
4.2 SAR Definition	
5. SAR Measurement System	
5.1 E-Field Probe	10 11
5.1 E-Field Frobe	
5.3 Robot	
5.4 Measurement Server	
5.5 Phantom	
5.6 Device Holder	
5.7 Data Storage and Evaluation	
5.8 Test Equipment List	
6. Tissue Simulating Liquids	
7. System Verification Procedures	
7.1 Purpose of System Performance check	
7.2 System Setup	18
7.3 SAR System Verification Results	
8. EUT Testing Position	20
8.1 Define two imaginary lines on the handset	20
8.2 Cheek Position	
8.3 Tilted Position	
8.4 Body Worn Position	
9. Measurement Procedures	23
9.1 Spatial Peak SAR Evaluation	23
9.2 Power Reference Measurement	24
9.3 Area & Zoom Scan Procedures	24
9.4 Volume Scan Procedures	
9.5 SAR Averaged Methods	25
9.6 Power Drift Monitoring	
10. Conducted RF Output Power (Unit: dBm)	26
11. DUT Antenna Location	
12. SAR Test Results	
12.1 Test Records for Head SAR Test	30
12.2 Test Records for Body Worn SAR Test	
12.3 Highest SAR Plot	
13. Simultaneous Transmission Analysis	
13.1 Head Exposure Conditions	
13.2 Body-Worn Exposure Conditions	
14. Uncertainty Assessment	
15. References	
Appendix A. Plots of System Performance Check	33
Appendix A. Plots of SAR Measurement	
Appendix C. DASY Calibration Certificate	
Appendix D. Test Setup Photos	

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUSAMBATV Page Number : 2 of 39
Report Issued Date : Jul. 03, 2013
Report Version : Rev. 01



Revision History

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FA360409	Rev. 01	Initial issue of report	Jul. 03, 2013

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUSAMBATV Page Number : 3 of 39
Report Issued Date : Jul. 03, 2013
Report Version : Rev. 01

1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for CT Asia, DUT: Quad-band /GPRS/ GSM Mobile Phone, Brand Name: BLU, Model Name: Samba TV, Samba W, are as follows.

<Highest SAR Summary>

Exposure Position	Frequency Band	Reported 1g-SAR (W/kg)	Equipment Class	Highest Reported 1g-SAR (W/kg)	
	GSM850	1850 0.87 PCE 0.8		0.87	
Head	GSM1900	0.27	FOE	0.07	
	WLAN 2.4GHz Band	0.02	DTS	0.02	
Do do	GSM850	1.03	PCE	1.02	
Body-worn (1.5cm Gap)	GSM1900	0.24	FUE	1.03	
(1.5cm Gap)	WLAN 2.4GHz Band	0.01	DTS	0.01	

<Highest Simultaneous transmission SAR>

Frequency Band	Equipment Class	Exposure Position	Highest Reported Simultaneous Transmission 1g-SAR (W/kg)
GSM850	PCE		
WLAN 2.4GHz Band	DTS	Body-worn	1.05
2.4GHz Bluetooth	DSS		

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2003 and FCC OET Bulletin 65 Supplement C (Edition 01-01).

SPORTON INTERNATIONAL (SHENZHEN) INC.

FAX: 86-755-8637-9595 FCC ID: YHLBLUSAMBATV

TEL: 86-755-8637-9589

Page Number : 4 of 39
Report Issued Date : Jul. 03, 2013
Report Version : Rev. 01

2. Administration Data

2.1 Testing Laboratory

Test Site	SPORTON INTERNATIONAL (SHENZHEN) INC.		
Test Site Location	No. 101, Complex Building C, Guanlong Village, Xili Town, Nanshan District, Shenzhen, Guangdong, P.R.C. TEL: +86-755-8637-9589 FAX: +86-755-8637-9595		

2.2 Applicant

Company Name	CT Asia
	Unit 01, 15/F, Seaview Centre, 139-141 Hoi bun road, Kwun Tong, Kowloon,
	Hongkong

2.3 Manufacturer

Company Name	Zechin Communications Co., Ltd.		
	Unit804, 8th Floor Desay Tech Building Gaoxin Road South, Nanshan District Shenzhen, China		

2.4 Application Details

Date of Start during the Test	Jun. 22, 2013
Date of End during the Test	Jun. 26, 2013

SPORTON INTERNATIONAL (SHENZHEN) INC.

FAX: 86-755-8637-9595 FCC ID: YHLBLUSAMBATV

TEL: 86-755-8637-9589

Page Number : 5 of 39
Report Issued Date : Jul. 03, 2013
Report Version : Rev. 01



3. General Information

3.1 <u>Description of Equipment Under Test (EUT)</u>

Product Feature & Specification				
EUT	Quad-band /GPRS/ GSM Mobile Phone			
Brand Name	BLU			
Model Name	Samba TV , Samba W			
FCC ID	YHLBLUSAMBATV			
IMEI Code	#1: 355861041339587 #2: 355861041339595			
	GSM850: 824.2 MHz ~ 848.8 MHz			
Frequency Range	GSM1900: 1850.2 MHz ~ 1909.8 MHz			
	WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz Bluetooth: 2402 MHz ~ 2480 MHz			
	• GSM/GPRS			
Mode	• 802.11b/g/n HT20			
	• Bluetooth 3.0			
	WWAN: PIFA Antenna			
Antenna Type WLAN: Monopole Antenna				
	Bluetooth: Monopole Antenna			
HW Version	V0.1			
SW Version	Version:BLU_Q170T_60A_V02_GENERIC			
Transfer Mode Category	Class B – EUT cannot support Packet Switched and Circuit Switched Network simultaneously but can automatically switch between Packet and Circuit Switched Network.			
EUT Stage	Production Unit			
Remark: The above EUT's i for more detailed description	nformation was declared by manufacturer. Please refer to the specifications or user's manual i.			

SPORTON INTERNATIONAL (SHENZHEN) INC. TEL: 86-755-8637-9589

FAX: 86-755-8637-9595 FCC ID: YHLBLUSAMBATV Page Number : 6 of 39
Report Issued Date : Jul. 03, 2013
Report Version : Rev. 01

3.2 Maximum RF output power among production units

Band	GSM850 (Burst Average Power) (dBm)	GSM1900 (Burst Average Power) (dBm)
GSM (GMSK, 1 Tx slot)	33	30
GPRS (GMSK, 1 Tx slot)	33	30
GPRS (GMSK, 2 Tx slots)	32	28.5
GPRS (GMSK, 3 Tx slots)	30	27
GPRS (GMSK, 4 Tx slots)	29	26

Average power (dBm)				
Mode / Band	Mode / Pand			
Wiode / Baild	а	b	g	n-HT20
WLAN 2.4GHz		13	12	12

Bluetooth average power(dBm)				
Mode/Band 1Mbps 2Mbps 3Mbps (GMSK) (π/4-DQPSK) (8-DPSK)				
Bluetooth	-2	-4	-4	

SPORTON INTERNATIONAL (SHENZHEN) INC. TEL: 86-755-8637-9589

FAX: 86-755-8637-9595 FCC ID: YHLBLUSAMBATV Page Number : 7 of 39
Report Issued Date : Jul. 03, 2013
Report Version : Rev. 01



3.3 Applied Standard

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2003
- FCC OET Bulletin 65 Supplement C (Edition 01-01)
- FCC KDB 447498 D01 v05r01
- FCC KDB 648474 D04 v01r01
- FCC KDB 248227 D01 v01r02
- FCC KDB 941225 D03 v01
- FCC KDB 865664 D01 v01

3.4 Device Category and SAR Limits

This device belongs to portable device category because its radiating structure is allowed to be used within 20 centimeters of the body of the user. Limit for General Population/Uncontrolled exposure should be applied for this device, it is 1.6 W/kg as averaged over any 1 gram of tissue.

3.5 Test Conditions

3.5.1 Ambient Condition

Ambient Temperature	20 to 24 ℃
Humidity	< 60 %

3.5.2 Test Configuration

For WWAN SAR testing, the device was controlled by using a base station emulator. Communication between the device and the emulator was established by air link. The distance between the EUT and the antenna of the emulator is larger than 50 cm and the output power radiated from the emulator antenna is at least 30 dB smaller than the output power of EUT.

During WLAN SAR testing EUT is configured with the WLAN continuous TX tool, and the transmission duty factor was monitored on the spectrum analyzer with zero-span setting

For WLAN SAR testing, WLAN engineering testing software installed on the EUT can provide continuous transmitting RF signal.

SPORTON INTERNATIONAL (SHENZHEN) INC. TEL: 86-755-8637-9589

FAX: 86-755-8637-9595 FCC ID: YHLBLUSAMBATV Page Number : 8 of 39
Report Issued Date : Jul. 03, 2013
Report Version : Rev. 01

4. Specific Absorption Rate (SAR)

4.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

Report No. : FA360409

4.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$SAR = C\left(\frac{\delta T}{\delta t}\right)$$

Where: C is the specific heat capacity, δT is the temperature rise and δt is the exposure duration, or related to the electrical field in the tissue by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

Page Number

Report Version

: 9 of 39

: Rev. 01

Report Issued Date: Jul. 03, 2013

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.



5. SAR Measurement System

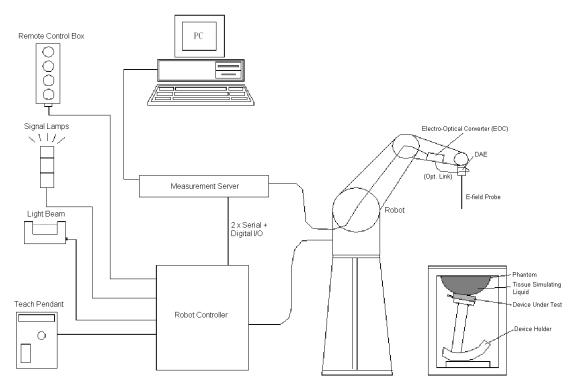


Fig 5.1 SPEAG DASY System Configurations

The DASY system for performance compliance tests is illustrated above graphically. This system consists of the following items:

- A standard high precision 6-axis robot with controller, a teach pendant and software
- A data acquisition electronic (DAE) attached to the robot arm extension
- A dosimetric probe equipped with an optical surface detector system
- > The electro-optical converter (EOC) performs the conversion between optical and electrical signals
- A measurement server performs the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the accuracy of the probe positioning
- A computer operating Windows XP
- DASY software
- > Remove control with teach pendant and additional circuitry for robot safety such as warming lamps, etc.
- The SAM twin phantom
- A device holder
- > Tissue simulating liquid
- Dipole for evaluating the proper functioning of the system

Component details are described in in the following sub-sections.

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUSAMBATV Page Number : 10 of 39 Report Issued Date : Jul. 03, 2013

Report No. : FA360409

Report Version : Rev. 01

5.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

E-Field Probe Specification 5.1.1

<EX3DV4 Probe>

Construction	Symmetrical design with triangular core		
	Built-in shielding against static charges		
	PEEK enclosure material (resistant to organic		100
	solvents, e.g., DGBE)		-
F	,	-	THE PARTY NAMED IN COLUMN TWO IS NOT THE PARTY N
Frequency	10 MHz to 6 GHz; Linearity: ± 0.2 dB		
Directivity	± 0.3 dB in HSL (rotation around probe axis)		T
	± 0.5 dB in tissue material (rotation normal to		
	probe axis)		1
Dynamic Range	10 μW/g to 100 mW/g; Linearity: ± 0.2 dB		1
- , g.	(noise: typically < 1 μW/g)		
Dimensions	Overall length: 330 mm (Tip: 20 mm)		
	Tip diameter: 2.5 mm (Body: 12 mm)		
	Typical distance from probe tip to dipole		
	· · · · · · · · · · · · · · · · · · ·		
	centers: 1 mm		T
		Fig 5.2	Photo of EX3DV4
]	

5.1.2 E-Field Probe Calibration

Each probe needs to be calibrated according to a dosimetric assessment procedure with accuracy better than ± 10%. The spherical isotropy shall be evaluated and within ± 0.25dB. The sensitivity parameters (NormX, NormY, and NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested. The calibration data can be referred to appendix C of this report.

5.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock. The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Report No. : FA360409

Fig 5.3 **Photo of DAE**

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUSAMBATV

: 11 of 39 Page Number Report Issued Date: Jul. 03, 2013 Report Version

: Rev. 01

SPURION LAB.

5.3 <u>Robot</u>

The SPEAG DASY system uses the high precision robots (DASY5: TX90XL) type from Stäubli SA (France). For the 6-axis controller system, the robot controller version (DASY5: CS8c) from Stäubli is used. The Stäubli robot series have many features that are important for our application:

- High precision (repeatability ±0.035 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- > Low ELF interference (the closed metallic construction shields against motor control fields)



Fig 5.4 Photo of DASY5

5.4 Measurement Server

The measurement server is based on a PC/104 CPU board with CPU (DASY5: 400 MHz, Intel Celeron), chipdisk (DASY5: 128 MB), RAM (DASY5: 128 MB). The necessary circuits for communication with the DAE electronic box, as well as the 16 bit AD converter system for optical detection and digital I/O interface are contained on the DASY I/O board, which is directly connected to the PC/104 bus of the CPU board.

The measurement server performs all the real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operations.



Fig 5.5 Photo of Server for DASY5

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUSAMBATV Page Number : 12 of 39
Report Issued Date : Jul. 03, 2013
Report Version : Rev. 01



Report No. : FA360409

5.5 Phantom

<SAM Twin Phantom>

TOAN I WILL HALLON		
Shell Thickness	2 ± 0.2 mm;	9
	Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	THE THE
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	Fig 5.6 Photo of SAM Phantom

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

5.6 <u>Device Holder</u>

<Device Holder for SAM Twin Phantom>

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5 mm distance, a positioning uncertainty of ± 0.5 mm would produce a SAR uncertainty of ± 20 %. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.

The DASY device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation center for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.

The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity $\varepsilon = 3$ and loss tangent $\delta = 0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.



Fig 5.7 **Device Holder**

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUSAMBATV Page Number : 13 of 39 Report Issued Date: Jul. 03, 2013 Report Version : Rev. 01



5.7 Data Storage and Evaluation

5.7.1 Data Storage

The DASY software stores the assessed data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all the necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files. The post-processing software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of erroneous parameter settings. For example, if a measurement has been performed with an incorrect crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be reevaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type (e.g., [V/m], [A/m], [mW/g]). Some of these units are not available in certain situations or give meaningless results, e.g., a SAR-output in a non-lose media, will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

5.7.2 Data Evaluation

Device parameters:

The DASY post-processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters: - Sensitivity Norm_i, a_{i0}, a_{i1}, a_{i2}

 $\begin{array}{lll} \text{- Conversion factor} & \text{ConvF}_i \\ \text{- Diode compression point} & \text{dcp}_i \\ \text{- Frequency} & \text{f} \end{array}$

- Density ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multi-meter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power.

SPORTON INTERNATIONAL (SHENZHEN) INC.

FAX: 86-755-8637-9595 FCC ID: YHLBLUSAMBATV

TEL: 86-755-8637-9589

Page Number : 14 of 39
Report Issued Date : Jul. 03, 2013
Report Version : Rev. 01



The formula for each channel can be given as :

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

Report No. : FA360409

with $V_i =$

 V_i = compensated signal of channel i, (i = x, y, z)

 U_i = input signal of channel i, (i = x, y, z)

cf = crest factor of exciting field (DASY parameter) dcp_i = diode compression point (DASY parameter)

From the compensated input signals, the primary field data for each channel can be evaluated:

E-field Probes : $E_i = \sqrt{\frac{V_i}{Norm_i \cdot ConvF}}$

H-field Probes : $H_i = \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$

with

 V_i = compensated signal of channel i, (i = x, y, z)

Norm_i = sensor sensitivity of channel i, (i = x, y, z), $\mu V/(V/m)^2$ for E-field Probes

ConvF = sensitivity enhancement in solution a_{ij} = sensor sensitivity factors for H-field probes

f = carrier frequency [GHz]

 E_i = electric field strength of channel i in V/m H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$\mathbf{E_{tot}} = \sqrt{\mathbf{E_x^2 + E_y^2 + E_z^2}}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{o \cdot 1000}$$

with

SAR = local specific absorption rate in mW/g

 E_{tot} = total field strength in V/m

 σ = conductivity in [mho/m] or [Siemens/m]

 ρ = equivalent tissue density in g/cm³

Note that the density is set to 1, to account for actual head tissue density rather than the density of the tissue simulating liquid.

Page Number

Report Version

: 15 of 39

: Rev. 01

Report Issued Date: Jul. 03, 2013

5.8 Test Equipment List

Manufacturer	Name of Faviances	Towns (MAssele)	Serial Number	Calib	ration
Manufacturer	Name of Equipment	Type/Model	Seriai Number	Last Cal.	Due Date
SPEAG	835MHz System Validation Kit	D835V2	4d091	Nov. 18, 2011	Nov. 16, 2013
SPEAG	1900MHz System Validation Kit	D1900V2	5d118	Nov. 21, 2011	Nov. 16, 2013
SPEAG	2450MHz System Validation Kit	D2450V2	736	Jul. 25, 2011	Jul. 24, 2013
SPEAG	Data Acquisition Electronics	DAE4	1303	Nov. 22, 2012	Nov. 21, 2013
SPEAG	Dosimetric E-Field Probe	EX3DV4	3819	Nov. 26, 2012	Nov. 25, 2013
SPEAG	SAM Twin Phantom	QD 000 P40 CD	TP-1670	NCR	NCR
SPEAG	SAM Twin Phantom	QD 000 P40 CD	TP-1671	NCR	NCR
SPEAG	Phone Positioner	N/A	N/A	NCR	NCR
Agilent	Base Station	E5515C	MY50267224	Dec. 29, 2012	Dec. 28, 2013
Agilent	ENA Series Network Analyzer	E5071C	MY46106933	Aug. 31, 2012	Aug. 30, 2013
Agilent	Dielectric Probe Kit	85070E	MY44300475	NCR	NCR
AR	Amplifier	551G4	333096	NCR	NCR
Anritsu	Power Meter	ML2495A	1218010	Mar. 28.2013	Mar. 27, 2014
Anritsu	Power Sensor	MA2411B	1207253	Mar. 28.2013	Mar. 27, 2014
ARRA	Power Divider	A3200-2	N/A	NA	NA
MCL	Attenuation	BW-S10W5	N/A	NA	NA
Agilent	Dual Directional Coupler	778D	50422	No	te 4
Woken	Attenuator 1	WK0602-XX	N/A	No	te 4
PE	Attenuator 2	PE7005-10	N/A	No	te 4
PE	Attenuator 3	PE7005-3	N/A	Note 4	
Agilent	Dielectric Probe Kit	85070D	US01440205	Note 5	
AR	Power Amplifier	5S1G4M2	0328767	No	te 6
R&S	Spectrum Analyzer	FSP30	100818	Aug. 22, 2012	Aug. 21, 2013

Report No. : FA360409

Table 5.1 Test Equipment List

Note:

- 1. The calibration certificate of DASY can be referred to appendix C of this report.
- 2. Referring to KDB 865664 D01v01, the dipole calibration interval can be extended to 3 years with justification. The dipoles are also not physically damaged, or repaired during the interval.
- 3. The justification data of dipole D835V2, SN: 4d091, D1900V2, SN: 5d118, D2450V2, SN: 736, can be found in appendix C. The return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration.
- 4. The Insertion Loss calibration of Dual Directional Coupler and Attenuator were characterized via the network analyzer and compensated during system check.
- 5. The dielectric probe kit was calibrated via the network analyzer, with the specified procedure (calibrated in pure water) and calibration kit (standard) short circuit, before the dielectric measurement. The specific procedure and calibration kit are provided by Agilent.
- 6. In system check we need to monitor the level on the power meter, and adjust the power amplifier level to have precise power level to the dipole; the measured SAR will be normalized to 1W input power according to the ratio of 1W to the input power to the dipole. For system check, the calibration of the power amplifier is deemed not critically required for correct measurement; the power meter is critical and we do have calibration for it
- Attenuator 1 insertion loss is calibrated by the network Analyzer, which the calibration is valid, before system
 check.

FCC ID: YHLBLUSAMBATV



Report No. : FA360409

6. Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 6.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 6.2.





Fig 6.1 Photo of Liquid Height for Head SAR

Fig 6.2 Photo of Liquid Height for Body SAR

The following table gives the recipes for tissue simulating liquid.

Frequency	Water	Sugar	Cellulose	Salt	Preventol	DGBE	Conductivity	Permittivity		
(MHz)	(%)	(%)	(%)	(%)	(%)	(%)	(σ)	(ε _r)		
For Head										
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5		
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0		
2450	55.0	0	0	0	0	45.0	1.80	39.2		
				For Body						
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2		
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3		
2450	68.6	0	0	0	0	31.4	1.95	52.7		

Table 6.1 Recipes of Tissue Simulating Liquid

The dielectric parameters of the liquids were verified prior to the SAR evaluation using an Agilent 85070D Dielectric Probe Kit and an Agilent Network Analyzer.

The following table shows the measuring results for simulating liquid.

Frequency (MHz)	Liquid Type	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ε _r)	Conductivity Target (σ)	Permittivity Target (ε _r)	Delta (σ) (%)	Delta (ε _r) (%)	Limit (%)	Date
835	Head	21.6	0.915	41.529	0.9	41.5	1.67	0.07	±10	Jun. 24, 2013
1900	Head	21.5	1.407	39.644	1.4	40	0.50	-0.89	±10	Jun. 22, 2013
2450	Head	21.6	1.823	37.961	1.80	39.2	1.28	-3.16	±10	Jun. 26, 2013
835	Body	21.8	0.977	54.379	0.97	55.2	0.72	-1.49	±10	Jun. 23, 2013
1900	Body	21.4	1.542	54.484	1.52	53.3	1.45	2.22	±10	Jun. 25, 2013
2450	Body	21.3	1.951	53.859	1.95	52.7	0.05	2.20	±10	Jun. 26, 2013

Table 6.2 Measuring Results for Simulating Liquid

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUSAMBATV Page Number : 17 of 39

Report Issued Date : Jul. 03, 2013

Report Version : Rev. 01



Report No. : FA360409

7. System Verification Procedures

Each DASY system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the DASY software, enable the user to conduct the system performance check and system validation. System validation kit includes a dipole, tripod holder to fix it underneath the flat phantom and a corresponding distance holder.

7.1 Purpose of System Performance check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

7.2 System Setup

In the simplified setup for system evaluation, the EUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

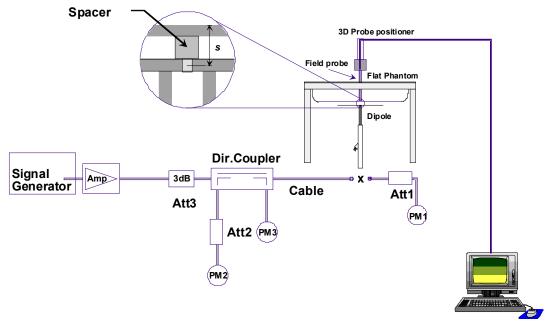


Fig 7.1 System Setup for System Evaluation

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUSAMBATV Page Number : 18 of 39 Report Issued Date: Jul. 03, 2013 Report Version : Rev. 01

- 1. Signal Generator
- 2. Amplifier
- 3. Directional Coupler
- Power Meter
- 5. Calibrated Dipole



Fig 7.2 Photo of Dipole Setup

7.3 SAR System Verification Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Table 7.1 shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Liquid Type	Power fed onto reference dipole (mW)	Target SAR _{1g} (W/kg)	Measured SAR _{1g} (W/kg)	Normalized SAR _{1g} (W/kg)	Deviation (%)
Jun. 24, 2013	835	Head	250	9.4	2.38	9.52	1.28
Jun. 22, 2013	1900	Head	250	40.3	10	40	-0.74
Jun. 26, 2013	2450	Head	250	54.8	13.7	54.8	0.00
Jun. 23, 2013	835	Body	250	9.42	2.26	9.04	-4.03
Jun. 25, 2013	1900	Body	250	41.8	10.4	41.6	-0.48
Jun. 26, 2013	2450	Body	250	52.3	12.9	51.6	-1.34

Table 7.1 Target and Measurement SAR after Normalized

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUSAMBATV Page Number : 19 of 39
Report Issued Date : Jul. 03, 2013
Report Version : Rev. 01



Report No. : FA360409

8. EUT Testing Position

This EUT was tested in six different positions. They are right cheek/right tilted/left cheek/left tilted for Head, Front/Back of the EUT with phantom 1.5 cm gap, as illustrated below, please refer to Appendix D for the test setup photos.

8.1 Define two imaginary lines on the handset

- (a) The vertical centerline passes through two points on the front side of the handset the midpoint of the width w_t of the handset at the level of the acoustic output, and the midpoint of the width w_b of the bottom of the handset.
- (b) The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output. The horizontal line is also tangential to the face of the handset at point A.
- The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset, especially for clamshell handsets, handsets with flip covers, and other irregularly shaped handsets.

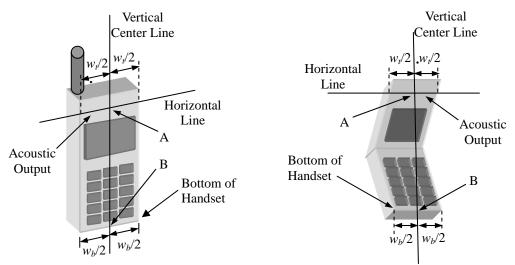


Fig 8.1 Illustration for Handset Vertical and Horizontal Reference Lines

SPORTON INTERNATIONAL (SHENZHEN) INC.


TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUSAMBATV Page Number : 20 of 39
Report Issued Date : Jul. 03, 2013
Report Version : Rev. 01



Report No.: FA360409

8.2 Cheek Position

- (a) To position the device with the vertical center line of the body of the device and the horizontal line crossing the center piece in a plane parallel to the sagittal plane of the phantom. While maintaining the device in this plane, align the vertical center line with the reference plane containing the three ear and mouth reference point (M: Mouth, RE: Right Ear, and LE: Left Ear) and align the center of the ear piece with the line RE-LE.
- (b) To move the device towards the phantom with the ear piece aligned with the line LE-RE until the phone touched the ear. While maintaining the device in the reference plane and maintaining the phone contact with the ear, move the bottom of the phone until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost (see Fig. 8.2).








Fig 8.2 Illustration for Cheek Position

8.3 Tilted Position

- (a) To position the device in the "cheek" position described above.
- (b) While maintaining the device the reference plane described above and pivoting against the ear, moves it outward away from the mouth by an angle of 15 degrees or until contact with the ear is lost (see Fig. 8.3).








Fig 8.3 Illustration for Tilted Position

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUSAMBATV Page Number : 21 of 39
Report Issued Date : Jul. 03, 2013
Report Version : Rev. 01

8.4 Body Worn Position

- (a) To position the device parallel to the phantom surface with either keypad up or down.
- (b) To adjust the device parallel to the flat phantom.
- (c) To adjust the distance between the device surface and the flat phantom to 1.5 cm.

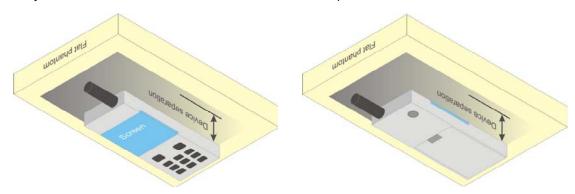


Fig 8.4 Illustration for Body Worn Position

<EUT Setup Photos>

Please refer to Appendix D for the test setup photos.

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUSAMBATV Page Number : 22 of 39
Report Issued Date : Jul. 03, 2013
Report Version : Rev. 01

9. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

(a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.

Report No.: FA360409

- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

9.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values form the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

 SPORTON INTERNATIONAL (SHENZHEN) INC.
 Page Number
 : 23 of 39

 TEL: 86-755-8637-9589
 Report Issued Date
 : Jul. 03, 2013

 FAX: 86-755-8637-9595
 Report Version
 : Rev. 01

FCC ID: YHLBLUSAMBATV



9.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

9.3 Area & Zoom Scan Procedures

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g. Area scan and zoom scan resolution setting follows KDB 865664 D01v01 quoted below.

When the 1-g SAR of the highest peak is within 2 dB of the SAR limit, additional zoom scans are required for other peaks within 2 dB of the highest peak that have not been included in any zoom scan to ensure there is no increase in SAR.

		≤ 3 GHz	> 3 GHz
		5 ± 1 mm	½-8·ln(2) ± 0.5 mm
		30° ± 1°	20° ± 1°
		≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
tial resoluti	on: ∆x _{Area} , ∆y _{Ana}	When the x or y dimension of a measurement plane orientation measurement resolution must be dimension of the test device we point on the test device.	, is smaller than the above, the e≤ the corresponding x or y
atial resolu	tion: Δx_{Zoom} , Δy_{Zoom}	≤ 2 GHz: ≤8 mm 2 - 3 GHz: ≤5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
uniform grid: $\Delta z_{Zoom}(n)$		≤ 5 mm	3 - 4 GHz: ≤ 4 mm 4 - 5 GHz: ≤ 3 mm 5 - 6 GHz: ≤ 2 mm
graded	Δz _{Zoom} (1): between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
grid	Δz _{Zoom} (n>1): between subsequent points	≤ 1.5·Δa	z _{Zoom} (n-1)
x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
	be sensors) from probe a ent location tial resolution uniform g graded grid	graded grid \[\Delta Z_{Zoom}(1): \text{ between } 1^{26} \\ \text{two points closest to phantom surface} \] \[\Delta Z_{Zoom}(n>1): \text{ between subsequent points} \]	tial resolution: Δx_{Area} , Δy_{Area} when the x or y dimension of the test device with point on the test device. Satisfal resolution: Δx_{Area} , Δy_{Area} watial resolution: Δx_{Zoom} , Δy_{Zoom} and $\Delta z_{Zoom}(1)$: between subsequent points $\Delta z_{Zoom}(n>1)$: between subsequent points

Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUSAMBATV Page Number : 24 of 39
Report Issued Date : Jul. 03, 2013
Report Version : Rev. 01

When zoom scan is required and the <u>reported</u> SAR from the area scan based 1-g SAR estimation procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.



9.4 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

9.5 SAR Averaged Methods

In DASY, the interpolation and extrapolation are both based on the modified Quadratic Shepard's method. The interpolation scheme combines a least-square fitted function method and a weighted average method which are the two basic types of computational interpolation and approximation.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5 mm.

9.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

SPORTON INTERNATIONAL (SHENZHEN) INC.

FAX: 86-755-8637-9595 FCC ID: YHLBLUSAMBATV

TEL: 86-755-8637-9589

Page Number : 25 of 39
Report Issued Date : Jul. 03, 2013
Report Version : Rev. 01

10. Conducted RF Output Power (Unit: dBm)

<GSM Conducted Power>

Note:

1. Per KDB 447498 D01v05r01, the maximum output power channel is used for SAR testing and for further SAR test reduction.

Report No. : FA360409

- 2. The EUT do not support DTM function.
- 3. For Head SAR testing, GSM should be evaluated, therefore the EUT was set in GSM Voice for GSM850 and GSM1900 due to its highest frame-average power.
- 4. For Body worn SAR testing, GSM should be evaluated, therefore the EUT was set in GSM Voice for GSM850 and GSM1900 due to its highest frame-average power.

For SIM 1 Card

Band: GSM850	Burst A	verage Powe	er (dBm)	Frame-Average Power (dBm)		
Channel	128	189	251	128	189	251
Frequency (MHz)	824.2	836.4	848.8	824.2	836.4	848.8
GSM (GMSK, 1 Tx slot)	31.80	31.81	<mark>31.83</mark>	22.80	22.81	22.83
GPRS (GMSK, 1 Tx slot) – CS1	31.78	31.79	31.81	22.78	22.79	22.81
GPRS (GMSK, 2 Tx slots) – CS1	31.12	31.12	31.20	25.12	25.12	25.20
GPRS (GMSK, 3 Tx slots) – CS1	29.51	29.47	29.57	25.25	25.21	25.31
GPRS (GMSK, 4 Tx slots) - CS1	28.43	28.36	28.45	25.43	25.36	<mark>25.45</mark>

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB
Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB
Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB
Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

Band: GSM1900	Burst A	Burst Average Power (dBm)			Frame-Average Power (dBm)		
Channel	512	661	810	512	661	810	
Frequency (MHz)	1850.2	1880.0	1909.8	1850.2	1880.0	1909.8	
GSM (GMSK, 1 Tx slot)	28.46	28.59	28.91	19.46	19.59	19.91	
GPRS (GMSK, 1 Tx slot) - CS1	28.45	28.58	28.90	19.45	19.58	19.90	
GPRS (GMSK, 2 Tx slots) – CS1	27.85	27.97	28.33	21.85	21.97	22.33	
GPRS (GMSK, 3 Tx slots) – CS1	26.26	26.38	26.75	22.00	22.12	22.49	
GPRS (GMSK, 4 Tx slots) - CS1	25.14	25.28	25.65	22.14	22.28	<mark>22.65</mark>	

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB
Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB
Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB
Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

 SPORTON INTERNATIONAL (SHENZHEN) INC.
 Page Number
 : 26 of 39

 TEL: 86-755-8637-9589
 Report Issued Date
 : Jul. 03, 2013

 FAX: 86-755-8637-9595
 Report Version
 : Rev. 01

FCC ID: YHLBLUSAMBATV



For SIM 2 Card

Band: GSM850	Burst A	verage Powe	er (dBm)	Frame-Average Power (dBm)		
Channel	128	189	251	128	189	251
Frequency (MHz)	824.2	836.4	848.8	824.2	836.4	848.8
GSM (GMSK, 1 Tx slot)	31.79	31.79	<mark>31.81</mark>	22.79	22.79	22.81
GPRS (GMSK, 1 Tx slot) - CS1	31.78	31.78	31.80	22.78	22.78	22.80
GPRS (GMSK, 2 Tx slots) - CS1	31.11	31.08	31.20	25.11	25.08	25.20
GPRS (GMSK, 3 Tx slots) - CS1	29.50	29.44	29.53	25.24	25.18	25.27
GPRS (GMSK, 4 Tx slots) - CS1	28.38	28.33	28.40	25.38	25.33	<mark>25.40</mark>

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB

Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB

Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

Band: GSM1900	Burst A	verage Pow	er (dBm)	Frame-Average Power (dBm)		
Channel	512	661	810	512	661	810
Frequency (MHz)	1850.2	1880.0	1909.8	1850.2	1880.0	1909.8
GSM (GMSK, 1 Tx slot)	28.45	28.59	<mark>28.91</mark>	19.45	19.59	19.91
GPRS (GMSK, 1 Tx slot) - CS1	28.43	28.57	28.89	19.43	19.57	19.89
GPRS (GMSK, 2 Tx slots) - CS1	27.83	27.95	28.31	21.83	21.95	22.31
GPRS (GMSK, 3 Tx slots) - CS1	26.24	26.36	26.73	21.98	22.10	22.47
GPRS (GMSK, 4 Tx slots) - CS1	25.12	25.26	25.63	22.12	22.26	<mark>22.63</mark>

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB

Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB

Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB

Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUSAMBATV

: 27 of 39 Page Number Report Issued Date: Jul. 03, 2013

Report No.: FA360409

Report Version : Rev. 01

<WLAN 2.4GHz Conducted Power>

	802.11b Average Power (dBm)								
Channel Frequency Data Rate (bps)									
Chamilei	(MHz)	1M	11M						
CH 01	2412	<mark>12.39</mark>	12.32	12.36	12.37				
CH 06	2437	11.43	11.41	11.48	11.53				
CH 11	2462	11.66	11.64	11.67	11.71				

802.11g Average Power (dBm)									
Channel Frequency Data Rate (b						te (bps)			
Channel (MHz) 6M 9M 12M 18M 24M 3							36M	48M	54M
CH 01	2412	10.32	10.30	10.24	10.26	10.25	10.30	10.21	10.29
CH 06	2437	9.44	9.51	9.45	9.51	9.37	9.35	9.52	9.50
CH 11	2462	9.58	9.55	9.59	9.51	9.44	9.49	9.61	9.71

WLAN 2.4GHz 802.11n HT20 Average Power (dBm)									
Channel Frequency MCS Index									
Channel	(MHz)	MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
CH 01	2412	10.34	10.30	10.29	10.31	10.18	10.25	10.20	10.16
CH 06	2437	9.49	9.48	9.39	9.32	9.44	9.57	9.42	9.33
CH 11	2462	9.52	9.51	9.46	9.58	9.53	9.69	9.50	9.40

Note:

- 1. Per KDB 248227 D01 v01r02, choose the highest output power channel to test SAR and determine further SAR exclusion
- For each frequency band, testing at higher data rates and higher order modulations is not required when the 2. maximum average output power for each of these configurations is less than 1/4dB higher than those measured at the lowest data rate
- Per KDB 248227 D01 v01r02, 11g and 11n-HT20 output power is less than 1/4dB higher than 11b mode, thus the 3. SAR can be excluded.

<Bluetooth Conducted Power>

	Bluetooth Average Power (dBm)									
Observat	F(8411-)	Data Rate								
Channel	Frequency (MHz)	DH1	DH3	DH5	2DH1	2DH3	2DH5	3DH1	3DH3	3DH5 -6.77 -8.55 -9.42
CH 00	2402	<mark>-3.35</mark>	-4.17	-3.82	-5.81	-6.87	-6.82	-5.74	-6.69	-6.77
CH 39	2441	-5.62	-5.94	-5.75	-7.37	-8.63	-8.70	-7.45	-8.61	-8.55
CH 78	2480	-5.71	-6.52	-6.63	-8.15	-9.19	-9.48	-7.49	-9.14	-9.42

Note:

1. Per KDB 447498 D01v05r01, the 1-g SAR test exclusion thresholds for 100 MHz to 6 GHz at test separation distances ≤ 50 mm are determined by:

[(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)] $[\sqrt{f}(GHz)] \le 3.0$ for 1-q SAR

- f(GHz) is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison
 - If the test separation distance (antenna-user) is < 5mm, 5mm is used for excluded SAR calculation

Bluetooth Max Power (dBm)	mW	Test Distance (mm)	Frequency (GHz)	exclusion thresholds
-2	0.63	0	2.48	0.20
	0.03	15	2.48	0.07

2. Per KDB 447498 D01v05r01 exclusion thresholds is 0.20 < 3, RF exposure evaluation is not required.

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUSAMBATV Page Number : 28 of 39 Report Issued Date: Jul. 03, 2013 Report Version


: Rev. 01



Report No.: FA360409

11. DUT Antenna Location

Top Side

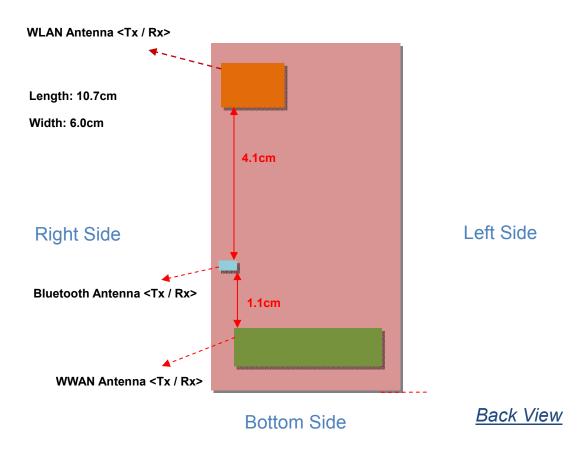

Antennas	Wireless Interface
WWAN Antenna (Tx / Rx)	GSM850
WWWAN Ainteillia (1X / KX)	GSM1900
WLAN Antenna (Tx / Rx)	WLAN 2.4GHz
Bluetooth Antenna <tx rx=""></tx>	Bluetooth

Note:

1. Head/Body-worn mode SAR assessments are required.

2. Per KDB 447498 D01v05, for handsets the *test separation distance* is determined by the smallest distance between the outer surface of the device and the user; which is 0mm for head SAR, 15mm for body-worn SAR.

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUSAMBATV Page Number : 29 of 39
Report Issued Date : Jul. 03, 2013
Report Version : Rev. 01

12. SAR Test Results

Note:

- Per KDB 447498 D01v05r01, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance. Scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.
 - Reported SAR(W/kg)= Measured SAR(W/kg)* Scaling Factor
- 2. Per KDB 447498 D01v05r01, for each exposure position, if the highest output channel reported SAR ≤0.8W/kg, other channels SAR testing is not necessary.

12.1 Test Records for Head SAR Test

<GSM SAR>

Plot No.	Band	Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
9	GSM850	GSM Voice	Right Cheek	251	848.8	31.83	33	1.309	-0.16	0.613	0.803
10	GSM850	GSM Voice	Right Tilted	251	848.8	31.83	33	1.309	-0.12	0.425	0.556
11	GSM850	GSM Voice	Left Cheek	251	848.8	31.83	33	1.309	-0.07	0.666	0.872
12	GSM850	GSM Voice	Left Tilted	251	848.8	31.83	33	1.309	-0.1	0.369	0.483
13	GSM850	GSM Voice	Right Cheek	128	824.2	31.8	33	1.318	-0.14	0.327	0.431
14	GSM850	GSM Voice	Right Cheek	189	836.4	31.81	33	1.315	-0.09	0.493	0.648
15	GSM850	GSM Voice	Left Cheek	128	824.2	31.8	33	1.318	-0.17	0.333	0.439
16	GSM850	GSM Voice	Left Cheek	189	836.4	31.81	33	1.315	-0.16	0.503	0.662
1	GSM1900	GSM Voice	Right Cheek	810	1909.8	28.91	30	1.285	-0.06	0.213	0.274
2	GSM1900	GSM Voice	Right Tilted	810	1909.8	28.91	30	1.285	-0.02	0.137	0.176
3	GSM1900	GSM Voice	Left Cheek	810	1909.8	28.91	30	1.285	-0.03	0.201	0.258
4	GSM1900	GSM Voice	Left Tilted	810	1909.8	28.91	30	1.285	-0.02	0.144	0.185

<WLAN2.4GHz SAR>

Plot No.	Band	Mode	Test Position	Ch.	Freq. (MHz)	Data Rate (bps)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
17	WLAN 2.4GHz	802.11b	Right Cheek	1	2412	1M	12.39	13	1.151	0.01	0.00717	0.008
18	WLAN 2.4GHz	802.11b	Right Tilted	1	2412	1M	12.39	13	1.151	-0.17	0.00977	0.011
19	WLAN 2.4GHz	802.11b	Left Cheek	1	2412	1M	12.39	13	1.151	-0.1	0.017	0.020
20	WLAN 2.4GHz	802.11b	Left Tilted	1	2412	1M	12.39	13	1.151	-0.08	0.017	0.020

SPORTON INTERNATIONAL (SHENZHEN) INC.

FAX: 86-755-8637-9595 FCC ID: YHLBLUSAMBATV

TEL: 86-755-8637-9589

Page Number : 30 of 39
Report Issued Date : Jul. 03, 2013
Report Version : Rev. 01



12.2 Test Records for Body Worn SAR Test

Note:

- 1. Body-worn exposure conditions are intended to voice call operations, therefore GSM voice call mode is selected to be tested.
- 2. Per KDB 648474 D04v01, when the *reported* SAR for a body-worn accessory measured without a headset connected to the handset is ≤ 1.2 W/kg, SAR testing with a headset connected to the handset is not required.

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
5	GSM850	GSM Voice	Front	1.5	251	848.8	31.83	33	1.309	-0.01	0.429	0.562
6	GSM850	GSM Voice	Back	1.5	251	848.8	31.83	33	1.309	-0.08	0.663	0.868
7	GSM850	GSM Voice	Back	1.5	128	824.2	31.8	33	1.318	-0.05	0.678	0.894
8	GSM850	GSM Voice	Back	1.5	189	836.4	31.81	33	1.315	-0.04	0.784	1.031
23	GSM1900	GSM Voice	Front	1.5	810	1909.8	28.91	30	1.285	-0.12	0.091	0.117
24	GSM1900	GSM Voice	Back	1.5	810	1909.8	28.91	30	1.285	-0.14	0.189	0.243

<WLAN2.4GHz SAR>

Plot No.		Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Data Rate (bps)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
21	WLAN 2.4GHz	802.11b	Front	1.5	1	2412	1M	12.39	13	1.151	-0.08	0.00238	0.003
22	WLAN 2.4GHz	802.11b	Back	1.5	1	2412	1M	12.39	13	1.151	-0.06	0.012	0.014

SPORTON INTERNATIONAL (SHENZHEN) INC.

FAX: 86-755-8637-9595 FCC ID: YHLBLUSAMBATV

TEL: 86-755-8637-9589

Page Number : 31 of 39
Report Issued Date : Jul. 03, 2013
Report Version : Rev. 01



12.3 Highest SAR Plot

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 23.06.2013

08 GSM850 GSM Voice Back 1.5cm Ch189

DUT: 360409

Communication System: Generic GSM; Frequency: 836.4 MHz; Duty Cycle: 1:8.3

Medium: MSL_850_130623 Medium parameters used: f = 836.4 MHz; $\sigma = 0.978$ mho/m; $\epsilon_r =$

54.371; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 23.7 °C; Liquid Temperature : 21.8 °C

DASY5 Configuration:

- Probe: EX3DV4 SN3819; ConvF(9.5, 9.5, 9.5); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)


Ch189/Area Scan (61x91x1): Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 0.954 W/kg

Ch189/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 31.258 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.047 mW/g

SAR(1 g) = 0.784 mW/g; SAR(10 g) = 0.561 mW/gMaximum value of SAR (measured) = 0.915 W/kg

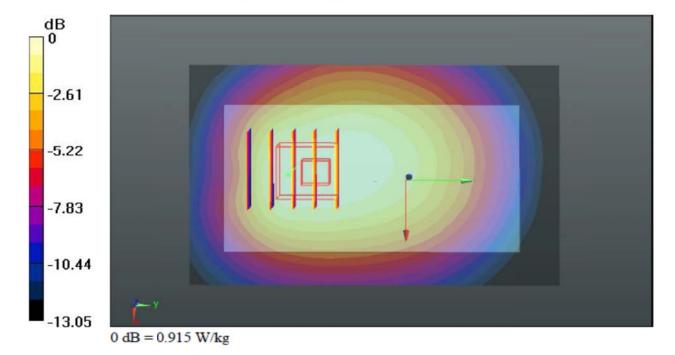

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUSAMBATV Page Number : 32 of 39
Report Issued Date : Jul. 03, 2013
Report Version : Rev. 01

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 22.06.2013

01 GSM1900 GSM Voice Right Cheek Ch810

DUT: 360409

Communication System: Generic GSM; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: HSL_1900_130622 Medium parameters used: f = 1910 MHz; $\sigma = 1.416$ mho/m; $\epsilon_c =$

39.605; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 23.5 °C; Liquid Temperature: 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 SN3819; ConvF(7.84, 7.84, 7.84); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch810/Area Scan (51x91x1): Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 0.274 W/kg


Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.431 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = $0.332 \,\text{mW/g}$

SAR(1 g) = 0.213 mW/g; SAR(10 g) = 0.127 mW/g

Maximum value of SAR (measured) = 0.276 W/kg

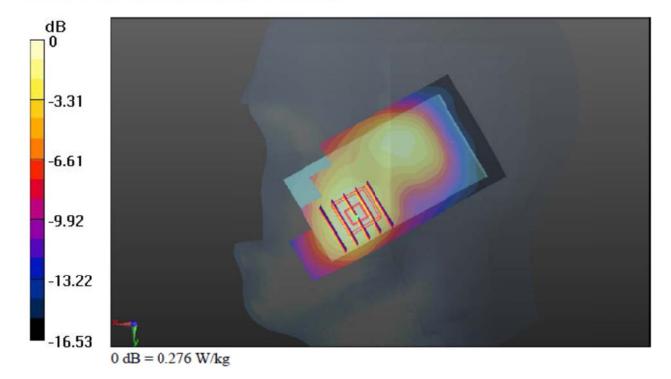

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUSAMBATV Page Number : 33 of 39
Report Issued Date : Jul. 03, 2013
Report Version : Rev. 01

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 26.06.2013

20 WLAN2.4GHz_802.11b_Left Tilted_Ch1

DUT: 360409

Communication System: WIFI; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: HSL_2450_130626 Medium parameters used: f = 2412 MHz; $\sigma = 1.786$ mho/m; $\epsilon_r =$

38.112; $\rho = 1000 \text{ kg/m}^3$


Ambient Temperature : 23.6 °C; Liquid Temperature : 21.6 °C

DASY5 Configuration:

- Probe: EX3DV4 SN3819; ConvF(6.99, 6.99, 6.99); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch1/Area Scan (61x111x1): Interpolated grid: dx=12mm, dy=12mm Maximum value of SAR (interpolated) = 0.0558 W/kg

Ch1/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 5.412 V/m; Power Drift = -0.08 dB Peak SAR (extrapolated) = 0.045 mW/g SAR(1 g) = 0.017 mW/g; SAR(10 g) = 0.00535 mW/g Maximum value of SAR (measured) = 0.0368 W/kg

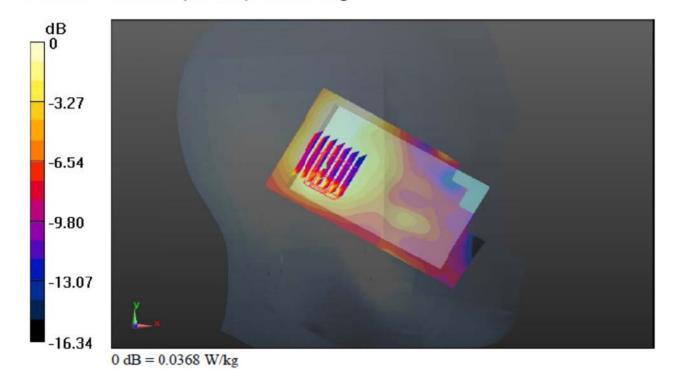

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUSAMBATV Page Number : 34 of 39
Report Issued Date : Jul. 03, 2013
Report Version : Rev. 01

13. Simultaneous Transmission Analysis

NO.	Simultaneous Transmission Configurations	Phone		Note
NO.	Simultaneous Transmission Configurations	Head	Body-worn	Note
1.	GSM(Voice) + WLAN2.4GHz(data)	Yes	Yes	-
2.	GSM(Voice) + Bluetooth(data)	Yes	Yes	-
3.	GSM(Voice) + WLAN2.4GHz(data) + Bluetooth(data)	Yes	Yes	-

Report No. : FA360409

Note:

- For simultaneous transmission at head and body-worn exposure positions, 3 transmitters simultaneous transmission was analyzed to cover 2 transmitters simultaneous transmission compliance.
- 2. The Reported SAR summation is calculated based on the same configuration and test position.
- Per KDB 447498 D01v05r01, simultaneous transmission SAR is compliant if,

 - i) Scalar SAR summation < 1.6W/kg.
 ii) SPLSR = (SAR₁ + SAR₂)^{1.5} / (min. separation distance, mm), and the peak separation distance is determined from the square root of [(x₁-x₂)² + (y₁-y₂)² + (z₁-z₂)²], where (x₁, y₁, z₁) and (x₂, y₂, z₂) are the coordinates of the extrapolated peak SAR locations in the zoom scan
 - If SPLSR ≤ 0.04, simultaneously transmission SAR measurement is not necessary
 - iii) Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg
- For simultaneous transmission analysis, Bluetooth SAR is estimated per KDB 447498 D01v05r01 based on the formula below.
 - i) (max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)]·[√f(GHz)/x] W/kg for test separation distances \leq 50 mm; where x = 7.5 for 1-g SAR, and x = 18.75 for 10-g SAR.
 - ii) 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is > 50 mm.

In this report, 50mm separation is applied to conservatively estimate SAR value for separation distance > 50mm

Maximum Dawer	Exposure Position	Head	Body-worn
Maximum Power	Test separation	0 mm	15 mm
-2 dBm	Estimated SAR (W/kg)	0.026W/kg	0.009W/kg

SPORTON INTERNATIONAL (SHENZHEN) INC. : 35 of 39 Page Number TEL: 86-755-8637-9589 Report Issued Date: Jul. 03, 2013 FAX: 86-755-8637-9595 Report Version : Rev. 01

FCC ID: YHLBLUSAMBATV



13.1 <u>Head Exposure Conditions</u>

	wv	VAN (PCE)	WLAN 2.4GHz Band (DTS)		Bluetooth (DSS)	WWAN		
Position	WWAN Band	Plot No	Max. WWAN SAR (W/kg)	Plot No	Max. WLAN 2.4GHz Band SAR (W/kg)	Estimated Bluetooth SAR (W/kg)	WLAN 2.4GHz Band + Bluetooth (W/kg)	SPLSR ≤ 0.04	Case No
Right Cheek	GSM850	9	0.803	17	0.008	0.026	0.84	-	-
	GSM1900	1	0.274	17	0.008	0.026	0.31	-	-
Right Tilted	GSM850	10	0.556	18	0.011	0.026	0.59	-	-
	GSM1900	2	0.176	18	0.011	0.026	0.21	-	-
Left Cheek	GSM850	11	0.872	19	0.020	0.026	<mark>0.92</mark>	-	-
	GSM1900	3	0.258	19	0.020	0.026	0.30	-	-
Left Tilted	GSM850	12	0.483	20	0.020	0.026	0.53	-	-
	GSM1900	4	0.185	20	0.020	0.026	0.23	-	-

13.2 Body-Worn Exposure Conditions

	WWAN (PCE)			WLAN 2.4GHz Band (DTS)		Bluetooth (DSS)	WWAN		
Position	WWAN Band	Plot No	Max. WWAN SAR (W/kg)	Plot No	Max. WLAN 2.4GHz Band SAR (W/kg)	Estimated Bluetooth SAR (W/kg)		SPLSR ≤ 0.04	Case No
Front	GSM850	5	0.562	21	0.003	0.009	0.57	-	-
	GSM1900	23	0.117	21	0.003	0.009	0.13	-	-
Back	GSM850	8	1.031	22	0.014	0.009	<mark>1.05</mark>	-	-
	GSM1900	24	0.243	22	0.014	0.009	0.27	-	-

Test Engineer: Jeme Li

SPORTON INTERNATIONAL (SHENZHEN) INC.

FAX: 86-755-8637-9595 FCC ID: YHLBLUSAMBATV

TEL: 86-755-8637-9589

Page Number : 36 of 39
Report Issued Date : Jul. 03, 2013
Report Version : Rev. 01

14. Uncertainty Assessment

The component of uncertainly may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainly by the statistical analysis of a series of observations is termed a Type An evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience, and knowledge of the behavior and properties of relevant materials and instruments, manufacture's specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in Table 12.1

Uncertainty Distributions	Normal	Rectangular	Triangular	U-Shape
Multi-plying Factor ^(a)	1/k ^(b)	1/√3	1/√6	1/√2

- (a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity
- (b) κ is the coverage factor

Table 14.1 Standard Uncertainty for Assumed Distribution

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual "root-sum-squares" (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is shown in the following tables.

SPORTON INTERNATIONAL (SHENZHEN) INC.

FAX: 86-755-8637-9595 FCC ID: YHLBLUSAMBATV

TFI: 86-755-8637-9589

Page Number : 37 of 39
Report Issued Date : Jul. 03, 2013
Report Version : Rev. 01

	Uncertainty	Probability		Ci	Ci	Standard	Standard		
Error Description	Value	Distribution	Divisor	(1g)	(10g)	Uncertainty	Uncertainty		
	(±%)					(1g)	(10g)		
Measurement System									
Probe Calibration	6.0	Normal	1	1	1	± 6.0 %	± 6.0 %		
Axial Isotropy	4.7	Rectangular	√3	0.7	0.7	± 1.9 %	± 1.9 %		
Hemispherical Isotropy	9.6	Rectangular	√3	0.7	0.7	± 3.9 %	± 3.9 %		
Boundary Effects	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %		
Linearity	4.7	Rectangular	√3	1	1	± 2.7 %	± 2.7 %		
System Detection Limits	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %		
Readout Electronics	0.3	Normal	1	1	1	± 0.3 %	± 0.3 %		
Response Time	0.8	Rectangular	√3	1	1	± 0.5 %	± 0.5 %		
Integration Time	2.6	Rectangular	√3	1	1	± 1.5 %	± 1.5 %		
RF Ambient Noise	3.0	Rectangular	√3	1	1	± 1.7 %	± 1.7 %		
RF Ambient Reflections	3.0	Rectangular	√3	1	1	± 1.7 %	± 1.7 %		
Probe Positioner	0.4	Rectangular	√3	1	1	± 0.2 %	± 0.2 %		
Probe Positioning	2.9	Rectangular	√3	1	1	± 1.7 %	± 1.7 %		
Max. SAR Eval.	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %		
Test Sample Related									
Device Positioning	2.9	Normal	1	1	1	± 2.9 %	± 2.9 %		
Device Holder	3.6	Normal	1	1	1	± 3.6 %	± 3.6 %		
Power Drift	5.0	Rectangular	√3	1	1	± 2.9 %	± 2.9 %		
Phantom and Setup									
Phantom Uncertainty	4.0	Rectangular	√3	1	1	± 2.3 %	± 2.3 %		
Liquid Conductivity (Target)	5.0	Rectangular	√3	0.64	0.43	± 1.8 %	± 1.2 %		
Liquid Conductivity (Meas.)	2.5	Normal	1	0.64	0.43	± 1.6 %	± 1.1 %		
Liquid Permittivity (Target)	5.0	Rectangular	√3	0.6	0.49	± 1.7 %	± 1.4 %		
Liquid Permittivity (Meas.)	2.5	Normal	1	0.6	0.49	± 1.5 %	± 1.2 %		
Combined Standard Uncertainty						± 11.0 %	± 10.8 %		
Coverage Factor for 95 %					K=2				

Table 14.2 Uncertainty Budget for frequency range 300 MHz to 3 GHz

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUSAMBATV

Expanded Uncertainty

Page Number : 38 of 39
Report Issued Date : Jul. 03, 2013
Report Version : Rev. 01

± 22.0 %

± 21.5 %



FCC SAR Test Report

15. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2003, "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- [4] FCC OET Bulletin 65 (Edition 97-01) Supplement C (Edition 01-01), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields", June 2001
- [5] SPEAG DASY System Handbook
- [6] FCC KDB 248227 D01 v01r02, "SAR Measurement Procedures for 802.11 a/b/g Transmitters", May 2007
- [7] FCC KDB 447498 D01 v05r01, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", May 2013
- [8] FCC KDB 648474 D04 v01r01, "SAR Evaluation Considerations for Wireless Handsets", May 2013
- [9] FCC KDB 941225 D03 v01, "Recommended SAR Test Reduction Procedures for GSM / GPRS / EDGE", December 2008

SPORTON INTERNATIONAL (SHENZHEN) INC.

FAX: 86-755-8637-9595 FCC ID: YHLBLUSAMBATV

TEL: 86-755-8637-9589

Page Number : 39 of 39
Report Issued Date : Jul. 03, 2013
Report Version : Rev. 01



FCC SAR Test Report

Appendix A. Plots of System Performance Check

The plots are shown as follows.

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUSAMBATV Page Number : A1 of A1
Report Issued Date : Jul. 03, 2013
Report Version : Rev. 01

System Check_Head_835MHz_130624

DUT: Dipole 835 MHz

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL_835_130624 Medium parameters used: f = 835 MHz; $\sigma = 0.915$ mho/m; $\epsilon_r = 41.529$; ρ

Date: 24.06.2013

 $= 1000 \text{ kg/m}^3$

Ambient Temperature : 23.6 °C; Liquid Temperature : 21.6 °C

DASY5 Configuration:

- Probe: EX3DV4 SN3819; ConvF(9.56, 9.56, 9.56); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 3.01 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 57.805 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 3.576 mW/g

SAR(1 g) = 2.38 mW/g; SAR(10 g) = 1.55 mW/g

Maximum value of SAR (measured) = 3.02 W/kg

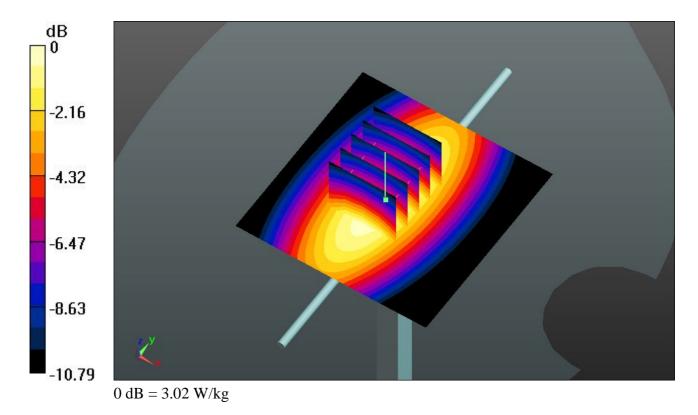

System Check_Head_1900MHz_130622

DUT: Dipole 1900 MHz

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL_1900_130622 Medium parameters used: f = 1900 MHz; $\sigma = 1.407$ mho/m; $\varepsilon_r =$

Date: 22.06.2013

39.644; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 23.5 °C; Liquid Temperature: 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 SN3819; ConvF(7.84, 7.84, 7.84); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 14.5 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 101.9 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 18.638 mW/g

SAR(1 g) = 10 mW/g; SAR(10 g) = 5.15 mW/g

Maximum value of SAR (measured) = 14.0 W/kg

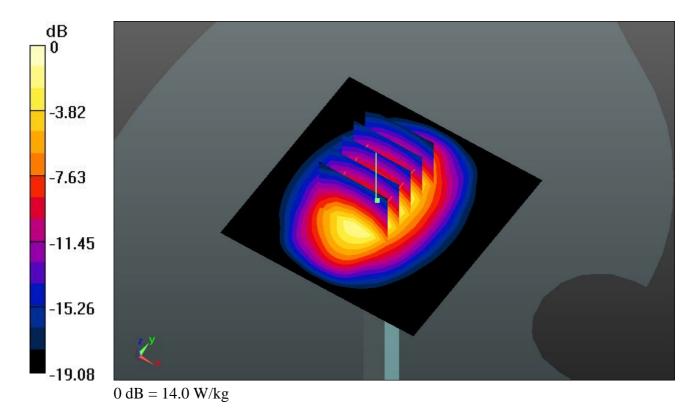

System Check_Head_2450MHz_130626

DUT: Dipole 2450 MHz

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: HSL_2450_130626 Medium parameters used: f = 2450 MHz; $\sigma = 1.823$ mho/m; $\varepsilon_r =$

Date: 26.06.2013

37.961; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 23.6 °C; Liquid Temperature: 21.6 °C

DASY5 Configuration:

- Probe: EX3DV4 SN3819; ConvF(6.99, 6.99, 6.99); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)


Pin=250mW/Area Scan (81x81x1): Interpolated grid: dx=12mm, dy=12mm Maximum value of SAR (interpolated) = 21.3 W/kg

Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 93.205 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 29.309 mW/g

SAR(1 g) = 13.7 mW/g; SAR(10 g) = 6.22 mW/g

Maximum value of SAR (measured) = 21.5 W/kg

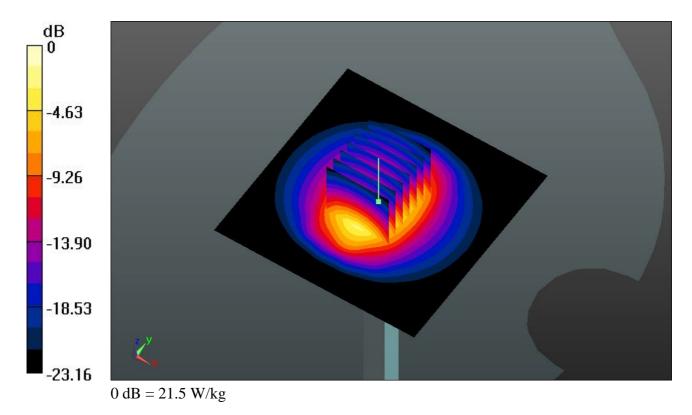

System Check_Body_835MHz_130623

DUT: Dipole 835 MHz

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: MSL_850_130623 Medium parameters used: f = 835 MHz; $\sigma = 0.977$ mho/m; $\varepsilon_r = 54.379$;

Date: 23.06.2013

 $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 23.7 °C; Liquid Temperature : 21.8 °C

DASY5 Configuration:

- Probe: EX3DV4 SN3819; ConvF(9.5, 9.5, 9.5); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 2.43 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 49.854 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 3.317 mW/g

SAR(1 g) = 2.26 mW/g; SAR(10 g) = 1.49 mW/g

Maximum value of SAR (measured) = 2.42 W/kg

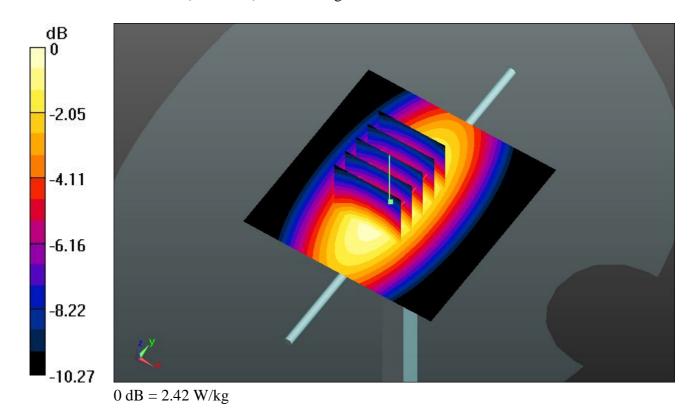

System Check_Body_1900MHz_130625

DUT: Dipole 1900 MHz

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: MSL_1900_130625 Medium parameters used: f = 1900 MHz; $\sigma = 1.542$ mho/m; $\varepsilon_r =$

Date: 25.06.2013

54.484; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 23.1 °C; Liquid Temperature: 21.4 °C

DASY5 Configuration:

- Probe: EX3DV4 SN3819; ConvF(7.67, 7.67, 7.67); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)


Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 14.8 W/kg

Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 86.748 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 18.889 mW/g

SAR(1 g) = 10.4 mW/g; SAR(10 g) = 5.39 mW/g

Maximum value of SAR (measured) = 14.9 W/kg

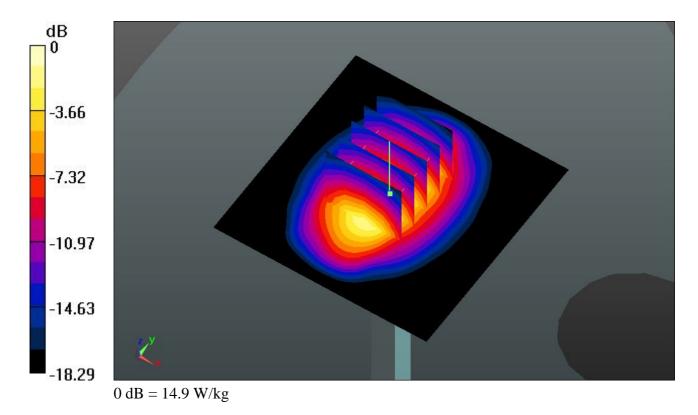

System Check_Body_2450MHz_130626

DUT: Dipole 2450 MHz

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: MSL_2450_130626 Medium parameters used: f = 2450 MHz; $\sigma = 1.951$ mho/m; $\varepsilon_r =$

Date: 26.06.2013

53.859; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 23.1 °C; Liquid Temperature : 21.3 °C

DASY5 Configuration:

- Probe: EX3DV4 SN3819; ConvF(7.21, 7.21, 7.21); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Pin=250mW/Area Scan (81x81x1): Interpolated grid: dx=12mm, dy=12mm Maximum value of SAR (interpolated) = 19.9 W/kg


Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 85.952 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 26.999 mW/g

SAR(1 g) = 12.9 mW/g; SAR(10 g) = 5.94 mW/g

Maximum value of SAR (measured) = 19.8 W/kg

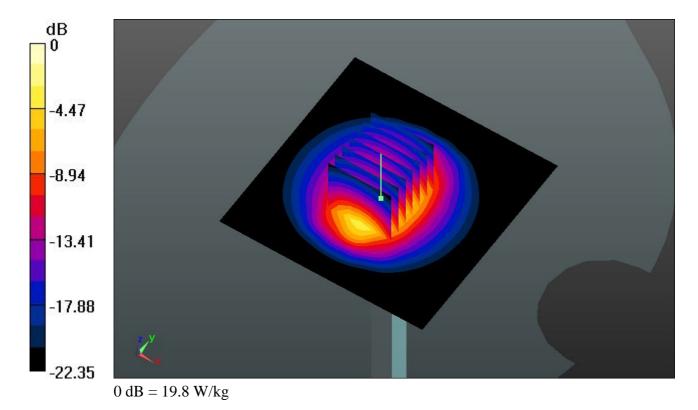



Appendix B. Plots of SAR Measurement

The plots are shown as follows.

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUSAMBATV Page Number : B1 of B1
Report Issued Date : Jul. 03, 2013
Report Version : Rev. 01

09 GSM850 GSM Voice Right Cheek Ch251

DUT: 360409

Communication System: Generic GSM; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: HSL_835_130624 Medium parameters used: f = 849 MHz; $\sigma = 0.927$ mho/m; $\varepsilon_r = 41.382$; ρ

Date: 24.06.2013

 $= 1000 \text{ kg/m}^3$

Ambient Temperature : 23.6 °C; Liquid Temperature : 21.6 °C

DASY5 Configuration:

- Probe: EX3DV4 SN3819; ConvF(9.56, 9.56, 9.56); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch251/Area Scan (51x91x1): Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 0.708 W/kg


Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.177 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.806 mW/g

SAR(1 g) = 0.613 mW/g; SAR(10 g) = 0.447 mW/g

Maximum value of SAR (measured) = 0.726 W/kg

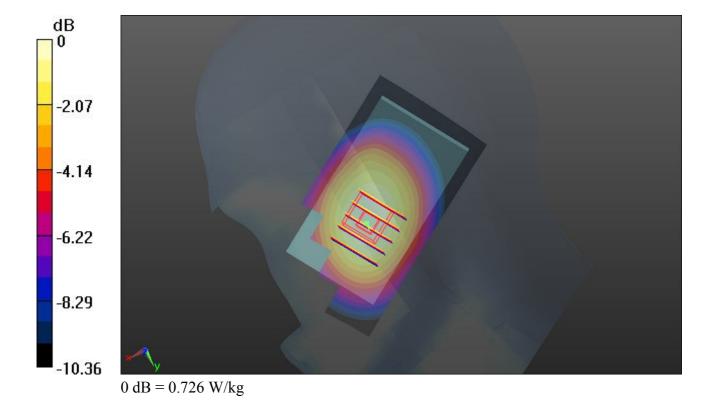

10 GSM850_GSM Voice_Right Tilted_Ch251

DUT: 360409

Communication System: Generic GSM; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: HSL_835_130624 Medium parameters used: f = 849 MHz; $\sigma = 0.927$ mho/m; $\varepsilon_r = 41.382$; ρ

Date: 24.06.2013

 $= 1000 \text{ kg/m}^3$

Ambient Temperature : 23.6 °C; Liquid Temperature : 21.6 °C

DASY5 Configuration:

- Probe: EX3DV4 SN3819; ConvF(9.56, 9.56, 9.56); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)


Ch251/Area Scan (51x91x1): Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 0.491 W/kg

Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 23.516 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.546 mW/g

SAR(1 g) = 0.425 mW/g; SAR(10 g) = 0.316 mW/g

Maximum value of SAR (measured) = 0.490 W/kg

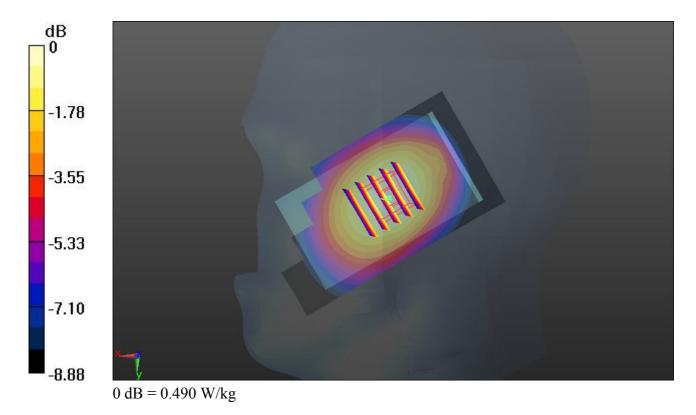

11 GSM850_GSM Voice_Left Cheek_Ch251

DUT: 360409

Communication System: Generic GSM; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: HSL_835_130624 Medium parameters used: f = 849 MHz; $\sigma = 0.927$ mho/m; $\varepsilon_r = 41.382$; ρ

Date: 24.06.2013

 $= 1000 \text{ kg/m}^3$

Ambient Temperature : 23.6 °C; Liquid Temperature : 21.6 °C

DASY5 Configuration:

- Probe: EX3DV4 SN3819; ConvF(9.56, 9.56, 9.56); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)


Ch251/Area Scan (51x91x1): Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 0.764 W/kg

Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 29.233 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.864 mW/g

SAR(1 g) = 0.666 mW/g; SAR(10 g) = 0.488 mW/g

Maximum value of SAR (measured) = 0.778 W/kg

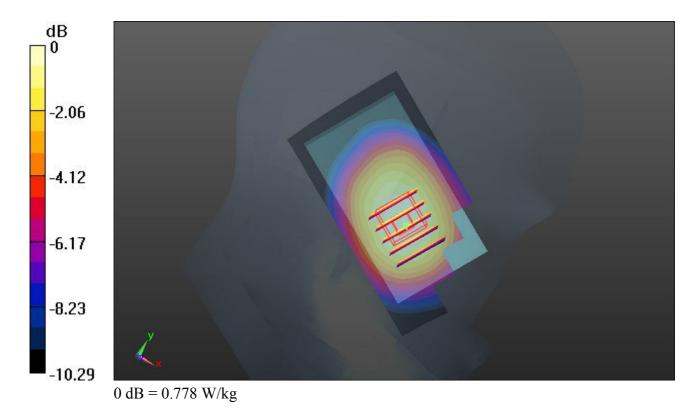

12 GSM850_GSM Voice_Left Tilted_Ch251

DUT: 360409

Communication System: Generic GSM; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: HSL_835_130624 Medium parameters used: f = 849 MHz; $\sigma = 0.927$ mho/m; $\varepsilon_r = 41.382$; ρ

Date: 24.06.2013

 $= 1000 \text{ kg/m}^3$

Ambient Temperature : 23.6 °C; Liquid Temperature : 21.6 °C

DASY5 Configuration:

- Probe: EX3DV4 SN3819; ConvF(9.56, 9.56, 9.56); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)


Ch251/Area Scan (51x91x1): Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 0.430 W/kg

Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 21.546 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.476 mW/g

SAR(1 g) = 0.369 mW/g; SAR(10 g) = 0.275 mW/g

Maximum value of SAR (measured) = 0.429 W/kg

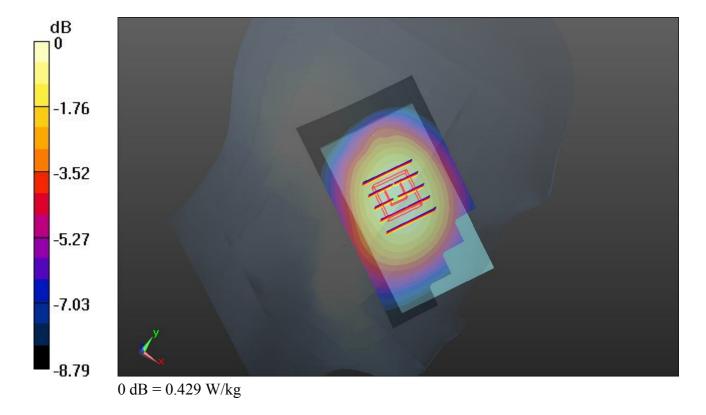

13 GSM850_GSM Voice_Right Cheek_Ch128

DUT: 360409

Communication System: Generic GSM; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium: HSL 835 130624 Medium parameters used: f = 824.2 MHz; $\sigma = 0.906 \text{ mho/m}$; $\varepsilon_r =$

Date: 24.06.2013

41.628; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 23.6 °C; Liquid Temperature : 21.6 °C


DASY5 Configuration:

- Probe: EX3DV4 SN3819; ConvF(9.56, 9.56, 9.56); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch128/Area Scan (51x91x1): Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 0.382 W/kg

Ch128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 21.179 V/m; Power Drift = -0.14 dB Peak SAR (extrapolated) = 0.439 mW/g

SAR(1 g) = 0.327 mW/g; SAR(10 g) = 0.238 mW/gMaximum value of SAR (measured) = 0.392 W/kg

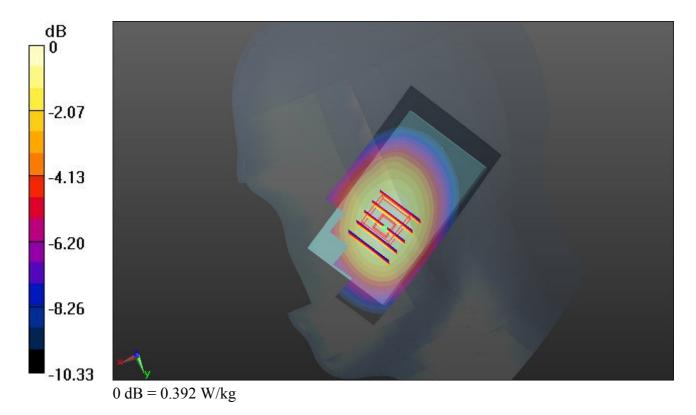

14 GSM850_GSM Voice_Right Cheek_Ch189

DUT: 360409

Communication System: Generic GSM; Frequency: 836.4 MHz; Duty Cycle: 1:8.3

Medium: HSL_835_130624 Medium parameters used: f = 836.5 MHz; $\sigma = 0.917$ mho/m; $\varepsilon_r = 41.516$;

Date: 24.06.2013

 $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 23.6 °C; Liquid Temperature : 21.6 °C

DASY5 Configuration:


- Probe: EX3DV4 SN3819; ConvF(9.56, 9.56, 9.56); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch189/Area Scan (51x91x1): Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 0.565 W/kg

Ch189/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 25.665 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.664 mW/g

SAR(1 g) = 0.493 mW/g; SAR(10 g) = 0.358 mW/gMaximum value of SAR (measured) = 0.595 W/kg

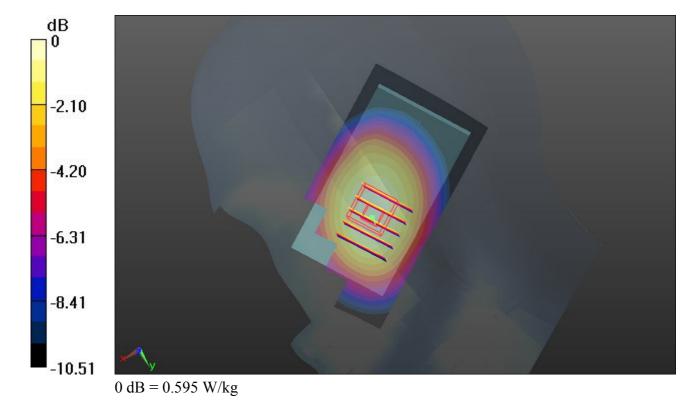

15 GSM850_GSM Voice_Left Cheek_Ch128

DUT: 360409

Communication System: Generic GSM; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium: HSL_835_130624 Medium parameters used: f = 824.2 MHz; $\sigma = 0.906$ mho/m; $\varepsilon_r = 41.628$;

Date: 24.06.2013

 $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 23.6 °C; Liquid Temperature : 21.6 °C

DASY5 Configuration:

- Probe: EX3DV4 SN3819; ConvF(9.56, 9.56, 9.56); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch128/Area Scan (51x91x1): Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 0.384 W/kg


Ch128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.960 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.436 mW/g

SAR(1 g) = 0.333 mW/g; SAR(10 g) = 0.245 mW/g

Maximum value of SAR (measured) = 0.390 W/kg

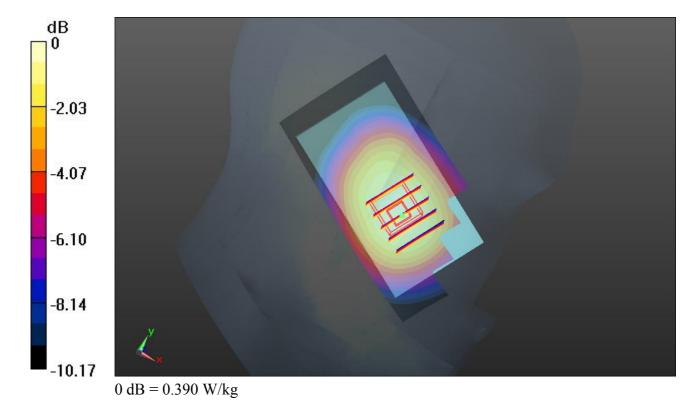

16 GSM850 GSM Voice Left Cheek Ch189

DUT: 360409

Communication System: Generic GSM; Frequency: 836.4 MHz; Duty Cycle: 1:8.3

Medium: HSL_835_130624 Medium parameters used: f = 836.5 MHz; $\sigma = 0.917$ mho/m; $\varepsilon_r = 41.516$;

Date: 24.06.2013

 $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 23.6 °C; Liquid Temperature : 21.6 °C

DASY5 Configuration:

- Probe: EX3DV4 SN3819; ConvF(9.56, 9.56, 9.56); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch189/Area Scan (51x91x1): Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 0.578 W/kg


Ch189/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.632 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.658 mW/g

SAR(1 g) = 0.503 mW/g; SAR(10 g) = 0.369 mW/g

Maximum value of SAR (measured) = 0.589 W/kg

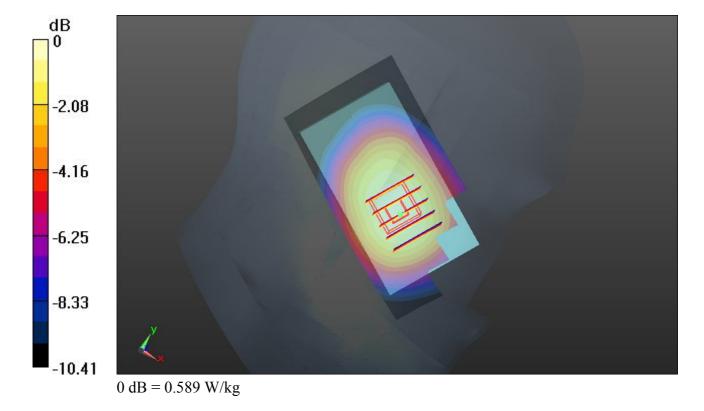

01 GSM1900_GSM Voice_Right Cheek_Ch810

DUT: 360409

Communication System: Generic GSM; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: HSL_1900_130622 Medium parameters used: f = 1910 MHz; $\sigma = 1.416$ mho/m; $\varepsilon_r =$

Date: 22.06.2013

39.605; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 23.5 °C; Liquid Temperature: 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 SN3819; ConvF(7.84, 7.84, 7.84); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch810/Area Scan (51x91x1): Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 0.274 W/kg


Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.431 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.332 mW/g

SAR(1 g) = 0.213 mW/g; SAR(10 g) = 0.127 mW/g

Maximum value of SAR (measured) = 0.276 W/kg

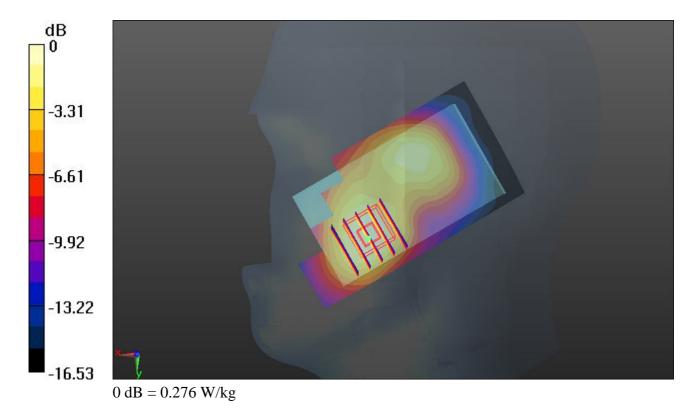

02 GSM1900 GSM Voice Right Tilted Ch810

DUT: 360409

Communication System: Generic GSM; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: HSL_1900_130622 Medium parameters used: f = 1910 MHz; $\sigma = 1.416$ mho/m; $\varepsilon_r =$

Date: 22.06.2013

39.605; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 23.5 °C; Liquid Temperature: 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 SN3819; ConvF(7.84, 7.84, 7.84); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch810/Area Scan (51x91x1): Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 0.192 W/kg


Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.316 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.205 mW/g

SAR(1 g) = 0.137 mW/g; SAR(10 g) = 0.085 mW/g

Maximum value of SAR (measured) = 0.172 W/kg

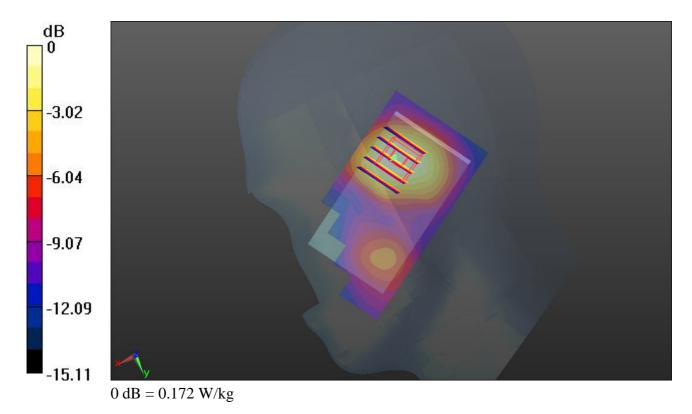

03 GSM1900 GSM Voice Left Cheek Ch810

DUT: 360409

Communication System: Generic GSM; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: HSL_1900_130622 Medium parameters used: f = 1910 MHz; $\sigma = 1.416$ mho/m; $\varepsilon_r =$

Date: 22.06.2013

39.605; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 23.5 °C; Liquid Temperature: 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 SN3819; ConvF(7.84, 7.84, 7.84); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)


Ch810/Area Scan (51x91x1): Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 0.270 W/kg

Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 13.514 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.291 mW/g

SAR(1 g) = 0.201 mW/g; SAR(10 g) = 0.130 mW/g

Maximum value of SAR (measured) = 0.250 W/kg

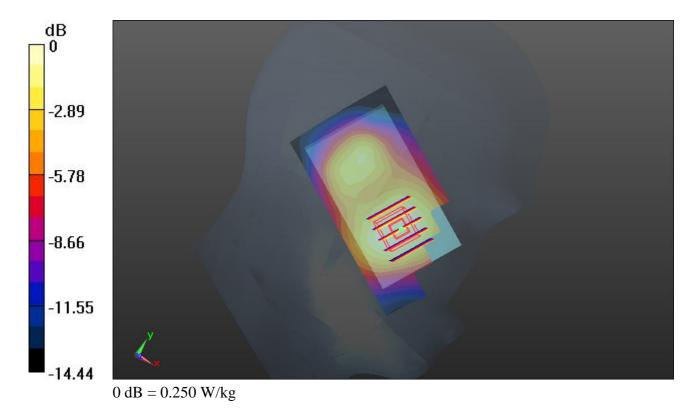

04 GSM1900_GSM Voice_Left Tilted_Ch810

DUT: 360409

Communication System: Generic GSM; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: HSL_1900_130622 Medium parameters used: f = 1910 MHz; $\sigma = 1.416$ mho/m; $\varepsilon_r =$

Date: 22.06.2013

39.605; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 23.5 °C; Liquid Temperature: 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 SN3819; ConvF(7.84, 7.84, 7.84); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)


Ch810/Area Scan (51x91x1): Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 0.194 W/kg

Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 11.481 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.213 mW/g

SAR(1 g) = 0.144 mW/g; SAR(10 g) = 0.091 mW/g

Maximum value of SAR (measured) = 0.179 W/kg

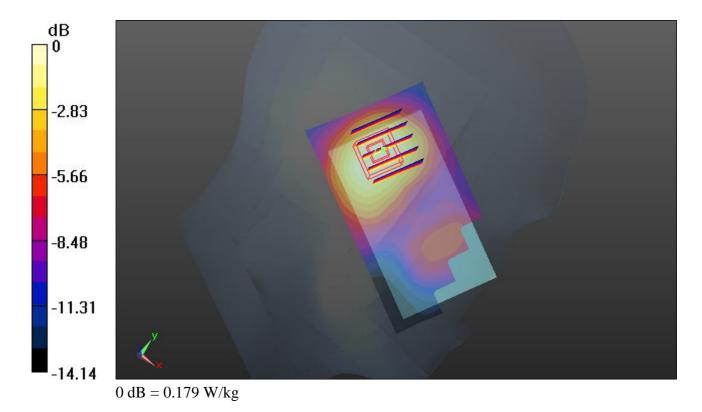

17 WLAN2.4GHz_802.11b_Right Cheek_Ch1

DUT: 360409

Communication System: WIFI; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: HSL 2450 130626 Medium parameters used: f = 2412 MHz; $\sigma = 1.786$ mho/m; $\varepsilon_r =$

Date: 26.06.2013

38.112; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 23.6 °C; Liquid Temperature: 21.6 °C

DASY5 Configuration:

- Probe: EX3DV4 SN3819; ConvF(6.99, 6.99, 6.99); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch1/Area Scan (61x111x1): Interpolated grid: dx=12mm, dy=12mm Maximum value of SAR (interpolated) = 0.0146 W/kg

Ch1/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 1.871 V/m; Power Drift = 0.01 dB Peak SAR (extrapolated) = 0.011 mW/g SAR(1 g) = 0.00717 mW/g; SAR(10 g) = 0.00274 mW/g Maximum value of SAR (measured) = 0.0110 W/kg

-10.00 -20.00 -30.00 -40.00 0 dB = 0.0110 W/kg

18 WLAN2.4GHz 802.11b Right Tilted Ch1

DUT: 360409

Communication System: WIFI; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: HSL 2450 130626 Medium parameters used: f = 2412 MHz; $\sigma = 1.786$ mho/m; $\varepsilon_r =$

Date: 26.06.2013

38.112; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 23.6 °C; Liquid Temperature: 21.6 °C

DASY5 Configuration:

- Probe: EX3DV4 SN3819; ConvF(6.99, 6.99, 6.99); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)


Ch1/Area Scan (61x131x1): Interpolated grid: dx=12mm, dy=12mm Maximum value of SAR (interpolated) = 0.0147 W/kg

Ch1/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 1.684 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 0.026 mW/g

SAR(1 g) = 0.00977 mW/g; SAR(10 g) = 0.00375 mW/g

Maximum value of SAR (measured) = 0.0128 W/kg

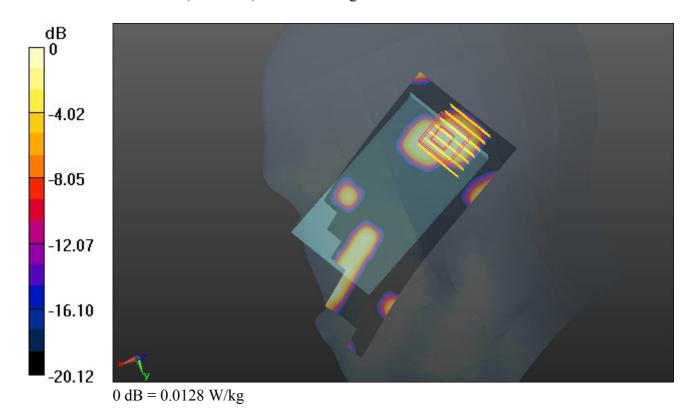

19 WLAN2.4GHz_802.11b_Left Cheek_Ch1

DUT: 360409

Communication System: WIFI; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: HSL_2450_130626 Medium parameters used: f = 2412 MHz; $\sigma = 1.786$ mho/m; $\varepsilon_r =$

Date: 26.06.2013

38.112; $\rho = 1000 \text{ kg/m}^3$


Ambient Temperature: 23.6 °C; Liquid Temperature: 21.6 °C

DASY5 Configuration:

- Probe: EX3DV4 SN3819; ConvF(6.99, 6.99, 6.99); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch1/Area Scan (71x111x1): Interpolated grid: dx=12mm, dy=12mm Maximum value of SAR (interpolated) = 0.0291 W/kg

Ch1/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 3.737 V/m; Power Drift = -0.10 dB Peak SAR (extrapolated) = 0.032 mW/g SAR(1 g) = 0.017 mW/g; SAR(10 g) = 0.00775 mW/g Maximum value of SAR (measured) = 0.0244 W/kg

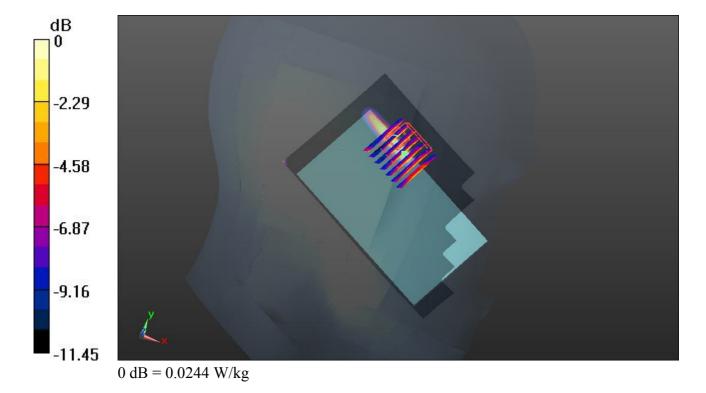

20 WLAN2.4GHz 802.11b Left Tilted Ch1

DUT: 360409

Communication System: WIFI; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: HSL_2450_130626 Medium parameters used: f = 2412 MHz; $\sigma = 1.786$ mho/m; $\varepsilon_r =$

Date: 26.06.2013

38.112; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 23.6 °C; Liquid Temperature: 21.6 °C

DASY5 Configuration:


- Probe: EX3DV4 SN3819; ConvF(6.99, 6.99, 6.99); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch1/Area Scan (61x111x1): Interpolated grid: dx=12mm, dy=12mm Maximum value of SAR (interpolated) = 0.0558 W/kg

Ch1/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 5.412 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.045 mW/g

SAR(1 g) = 0.017 mW/g; SAR(10 g) = 0.00535 mW/gMaximum value of SAR (measured) = 0.0368 W/kg

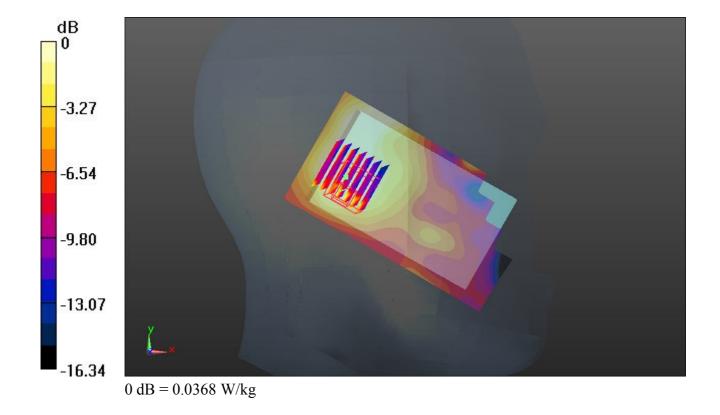

05 GSM850 GSM Voice Front 1.5cm Ch251

DUT: 360409

Communication System: Generic GSM; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: MSL_850_130623 Medium parameters used: f = 849 MHz; $\sigma = 0.989$ mho/m; $\epsilon_r = 54.26$; ρ

Date: 23.06.2013

 $= 1000 \text{ kg/m}^3$

Ambient Temperature : 23.7 °C; Liquid Temperature : 21.8 °C

DASY5 Configuration:

- Probe: EX3DV4 SN3819; ConvF(9.5, 9.5, 9.5); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch251/Area Scan (61x91x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.504 W/kg


Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.944 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.550 mW/g

SAR(1 g) = 0.429 mW/g; SAR(10 g) = 0.316 mW/g

Maximum value of SAR (measured) = 0.500 W/kg

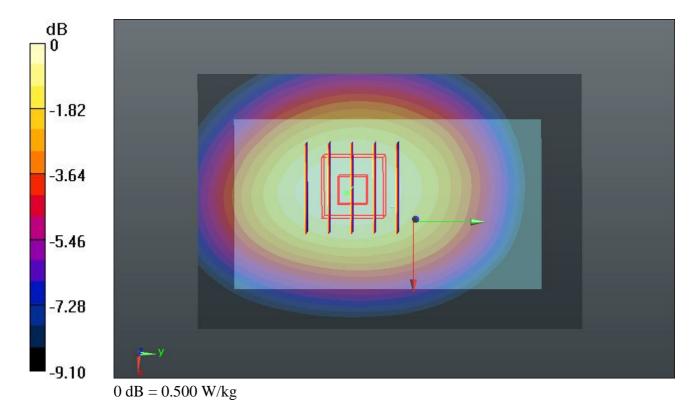

06 GSM850 GSM Voice Back 1.5cm Ch251

DUT: 360409

Communication System: Generic GSM; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: MSL_850_130623 Medium parameters used: f = 849 MHz; $\sigma = 0.989$ mho/m; $\epsilon_r = 54.26$; ρ

Date: 23.06.2013

 $= 1000 \text{ kg/m}^3$

Ambient Temperature : 23.7 °C; Liquid Temperature : 21.8 °C

DASY5 Configuration:

- Probe: EX3DV4 SN3819; ConvF(9.5, 9.5, 9.5); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch251/Area Scan (61x91x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.814 W/kg


Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.679 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.888 mW/g

SAR(1 g) = 0.663 mW/g; SAR(10 g) = 0.473 mW/g

Maximum value of SAR (measured) = 0.774 W/kg

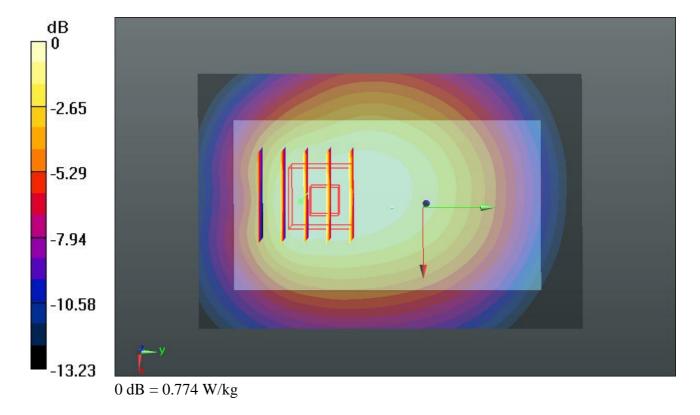

07 GSM850 GSM Voice Back 1.5cm Ch128

DUT: 360409

Communication System: Generic GSM; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium: MSL_850_130623 Medium parameters used: f = 824.2 MHz; $\sigma = 0.967$ mho/m; $\varepsilon_r =$

Date: 23.06.2013

54.462; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 23.7 °C; Liquid Temperature: 21.8 °C

DASY5 Configuration:

- Probe: EX3DV4 SN3819; ConvF(9.5, 9.5, 9.5); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch128/Area Scan (61x91x1): Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 0.836 W/kg


Ch128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.345 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.895 mW/g

SAR(1 g) = 0.678 mW/g; SAR(10 g) = 0.489 mW/g

Maximum value of SAR (measured) = 0.787 W/kg

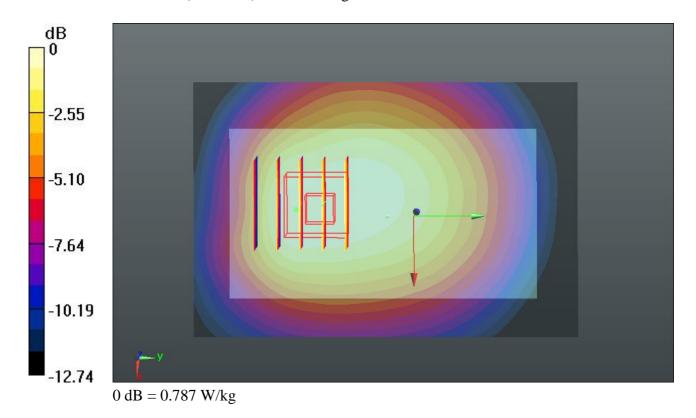

08 GSM850 GSM Voice Back 1.5cm Ch189

DUT: 360409

Communication System: Generic GSM; Frequency: 836.4 MHz; Duty Cycle: 1:8.3

Medium: MSL_850_130623 Medium parameters used: f = 836.4 MHz; $\sigma = 0.978$ mho/m; $\varepsilon_r =$

Date: 23.06.2013

54.371; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 23.7 °C; Liquid Temperature: 21.8 °C

DASY5 Configuration:

- Probe: EX3DV4 SN3819; ConvF(9.5, 9.5, 9.5); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303: Calibrated: 22.11.2012
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch189/Area Scan (61x91x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.954 W/kg


Ch189/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 31.258 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.047 mW/g

SAR(1 g) = 0.784 mW/g; SAR(10 g) = 0.561 mW/g

Maximum value of SAR (measured) = 0.915 W/kg

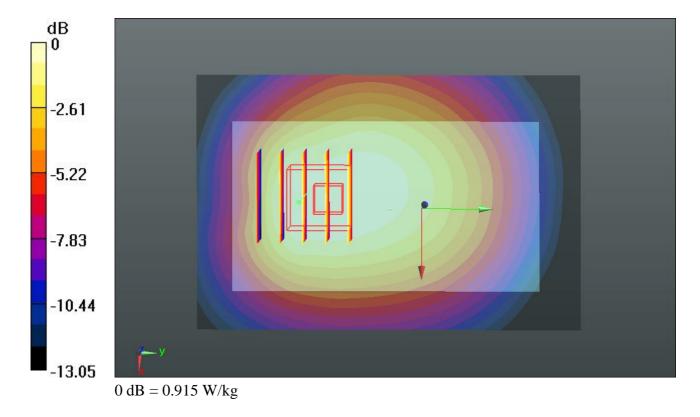

23 GSM1900 GSM Voice Front 1.5cm Ch810

DUT: 360409

Communication System: Generic GSM; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: MSL_1900_130625 Medium parameters used: f = 1910 MHz; $\sigma = 1.551$ mho/m; $\varepsilon_r =$

Date: 25.06.2013

54.465; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 23.1 °C; Liquid Temperature: 21.4 °C

DASY5 Configuration:

- Probe: EX3DV4 SN3819; ConvF(7.67, 7.67, 7.67); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch810/Area Scan (61x91x1): Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 0.122 W/kg


Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.728 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.126 mW/g

SAR(1 g) = 0.091 mW/g; SAR(10 g) = 0.053 mW/g

Maximum value of SAR (measured) = 0.114 W/kg

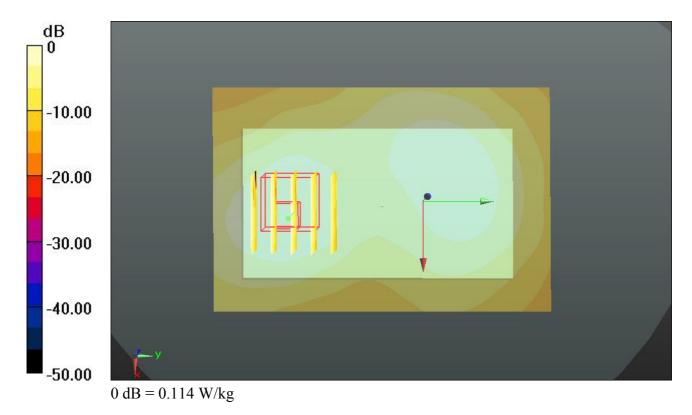

24 GSM1900 GSM Voice Back 1.5cm Ch810

DUT: 360409

Communication System: Generic GSM; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: MSL_1900_130625 Medium parameters used: f = 1910 MHz; $\sigma = 1.551$ mho/m; $\varepsilon_r =$

Date: 25.06.2013

54.465; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 23.1 °C; Liquid Temperature: 21.4 °C

DASY5 Configuration:

- Probe: EX3DV4 SN3819; ConvF(7.67, 7.67, 7.67); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch810/Area Scan (61x91x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.250 W/kg


Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.866 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.303 mW/g

SAR(1 g) = 0.189 mW/g; SAR(10 g) = 0.117 mW/g

Maximum value of SAR (measured) = 0.247 W/kg

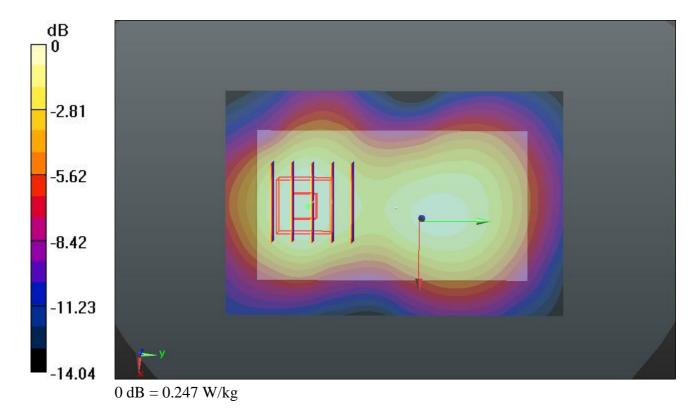

21 WLAN2.4GHz 802.11b Front 1.5cm Ch1

DUT: 360409

Communication System: WIFI; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: MSL_2450_130626 Medium parameters used: f = 2412 MHz; $\sigma = 1.883$ mho/m; $\varepsilon_r =$

Date: 26.06.2013

53.971; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 23.1 °C; Liquid Temperature: 21.3 °C

DASY5 Configuration:

- Probe: EX3DV4 SN3819; ConvF(7.21, 7.21, 7.21); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch1/Area Scan (71x111x1): Interpolated grid: dx=12mm, dy=12mm Maximum value of SAR (interpolated) = 0.0122 W/kg


Ch1/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.348 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.00641 mW/g

SAR(1 g) = 0.00238 mW/g; SAR(10 g) = 0.000892 mW/g

Maximum value of SAR (measured) = 0.00513 W/kg

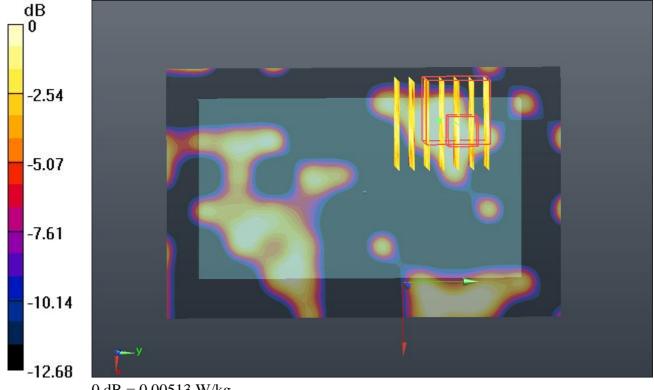

0 dB = 0.00513 W/kg

22 WLAN2.4GHz 802.11b Back 1.5cm Ch1

DUT: 360409

Communication System: WIFI; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: MSL_2450_130626 Medium parameters used: f = 2412 MHz; $\sigma = 1.883$ mho/m; $\epsilon_r =$

Date: 26.06.2013

53.971; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 23.1 °C; Liquid Temperature: 21.3 °C

DASY5 Configuration:

- Probe: EX3DV4 SN3819; ConvF(7.21, 7.21, 7.21); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch1/Area Scan (71x111x1): Interpolated grid: dx=12mm, dy=12mm Maximum value of SAR (interpolated) = 0.0219 W/kg

Ch1/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.157 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.025 mW/g

SAR(1 g) = 0.012 mW/g; SAR(10 g) = 0.00719 mW/g

Maximum value of SAR (measured) = 0.0179 W/kg

