


FCC SAR Test Report

APPLICANT : CT Asia
EQUIPMENT : Mobile phone
BRAND NAME : BLU
MODEL NAME : Studio 5.3S
MARKETING NAME : Studio 5.3S
FCC ID : YHLBLUSTUDIO53S
STANDARD : FCC 47 CFR Part 2 (2.1093)
ANSI/IEEE C95.1-1992
IEEE 1528-2003
FCC OET Bulletin 65 Supplement C (Edition 01-01)

The product was completely tested on Mar. 25, 2013. We, SPORTON INTERNATIONAL (SHENZHEN) INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (SHENZHEN) INC., the test report shall not be reproduced except in full.



Reviewed by: Eric Huang / Vice Manager



Approved by: Jones Tsai / Manager



SPORTON INTERNATIONAL (SHENZHEN) INC.

No. 101, Complex Building C, Guanlong Village, Xili Town, Nanshan District, Shenzhen, Guangdong, P.R.C.

Table of Contents

1. Statement of Compliance	4
2. Administration Data	6
2.1 Testing Laboratory.....	6
2.2 Applicant	6
2.3 Manufacturer	6
2.4 Application Details.....	6
3. General Information	7
3.1 Description of Equipment Under Test (EUT)	7
3.2 Maximum RF output power among production units.....	8
3.3 Product Photos	9
3.4 Applied Standard.....	9
3.5 Device Category and SAR Limits	9
3.6 Test Conditions.....	9
4. Specific Absorption Rate (SAR).....	10
4.1 Introduction	10
4.2 SAR Definition	10
5. SAR Measurement System.....	11
5.1 E-Field Probe	12
5.2 Data Acquisition Electronics (DAE)	12
5.3 Robot	13
5.4 Measurement Server.....	13
5.5 Phantom.....	14
5.6 Device Holder	14
5.7 Data Storage and Evaluation	15
5.8 Test Equipment List.....	17
6. Tissue Simulating Liquids	18
7. SAR System Verification	19
7.1 Purpose of System Performance check	19
7.2 System Setup.....	19
7.3 SAR System Verification Results	20
8. EUT Testing Position	21
8.1 Define two imaginary lines on the handset.....	21
8.2 Cheek Position	22
8.3 Tilted Position.....	22
8.4 Body Worn Position.....	23
9. Measurement Procedures	24
9.1 Spatial Peak SAR Evaluation.....	24
9.2 Power Reference Measurement.....	25
9.3 Area & Zoom Scan Procedures.....	25
9.4 Volume Scan Procedures.....	26
9.5 SAR Averaged Methods.....	26
9.6 Power Drift Monitoring.....	26
10. Conducted RF Output Power (Unit: dBm).....	27
11. Exposure Positions Consideration.....	33
12. SAR Test Results	35
12.1 Test Records for Head SAR Test.....	35
12.2 Test Records for Hotspot SAR Test.....	36
12.3 Test Records for Body-worn SAR Test	38
12.4 Repeated SAR Measurement	39
12.5 Highest SAR Plot	39
12.6 Simultaneous Multi-band Transmission Analysis	45
13. Uncertainty Assessment	50
14. References	52
Appendix A. Plots of System Performance Check	
Appendix B. Plots of SAR Measurement	
Appendix C. DASY Calibration Certificate	
Appendix D. Product Photos	
Appendix E. Test Setup Photos	



Revision History

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FA330701	Rev. 01	Initial issue of report	Mar. 29, 2013

1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **CT Asia, DUT: Mobile phone, Brand Name: BLU, Studio 5.3S, Model Name: Studio 5.3S** are as follows.

<Highest Reported standalone SAR Summary>

Exposure Position	Frequency Band	Highest Reported 1g-SAR (W/kg)	Equipment Class	Highest Reported 1g-SAR (W/kg)
Head	GSM850	0.40	PCE	0.42
	GSM1900	0.16		
	WCDMA Band V	0.42		
	WCDMA Band II	0.40		
	WLAN, 2412 - 2462 MHz	0.59	DTS	0.59
Hotspot (1cm Gap)	GSM850	1.38	PCE	1.38
	GSM1900	1.20		
	WCDMA Band V	0.71		
	WCDMA Band II	1.37		
	WLAN, 2412 - 2462 MHz	0.11	DTS	0.11
Body-worn (1cm Gap)	GSM850	0.94	PCE	1.37
	GSM1900	0.72		
	WCDMA Band V	0.71		
	WCDMA Band II	1.37		
	WLAN, 2412 - 2462 MHz	0.11	DTS	0.11

<Highest Simultaneous transmission SAR>

Frequency Band	Equipment Class	Exposure Position	Highest Reported Simultaneous Transmission 1g-SAR (W/kg)
GSM850	PCE	Hotspot (1cm Gap)	1.46
Bluetooth 2.4GHz	DSS		

Frequency Band	Equipment Class	Exposure Position	Highest Reported Simultaneous Transmission 1g-SAR (W/kg)
GSM850	PCE	Hotspot (1cm Gap)	1.48
WLAN 2.4GHz Band	DTS		

Remark:

The highest simultaneous transmission is scalar summation of reported standalone SAR per FCC KDB 690783 D01 v01r02, and scalar SAR summation of all possible simultaneous transmission scenarios are < 1.6W/kg.

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2003 and FCC OET Bulletin 65 Supplement C (Edition 01-01).

2. Administration Data

2.1 Testing Laboratory

Test Site	SPORTON INTERNATIONAL (SHENZHEN) INC.
Test Site Location	No. 101, Complex Building C, Guanlong Village, Xili Town, Nanshan District, Shenzhen, Guangdong, P.R.C. TEL: +86-755-8637-9589 FAX: +86-755-8637-9595

2.2 Applicant

Company Name	CT Asia
Address	Unit 01, 15/F, Seaview Centre, 139-141 Hoi bun road, Kwun Tong, Kowloon, Hongkong

2.3 Manufacturer

Company Name	Beijing Benywave technology Co., Ltd
Address	NO 55, Jiachuang second road, zhongguancun science Park OPTO-Mechatronicd Industrial Park, Tongzhou District, Beijing, China

2.4 Application Details

Date of Start during the Test	Mar. 22, 2013
Date of End during the Test	Mar. 25, 2013

3. General Information

3.1 Description of Equipment Under Test (EUT)

Product Feature & Specification	
EUT	Mobile phone
Brand Name	BLU
Model Name	Studio 5.3S
Marketing Name	Studio 5.3S
FCC ID	YHLBLUSTUDIO53S
TX Frequency	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz Bluetooth: 2402 MHz ~ 2480 MHz
Antenna Type	WWAN: Fixed Internal Antenna WLAN: Chip Antenna Bluetooth: Chip Antenna
HW Version	P1.1
SW Version	593713_8742_V000005
Uplink Modulations	GSM: GMSK GPRS: GMSK WCDMA (Rel 99): QPSK HSDPA (Rel 5): QPSK HSUPA (Rel 6): QPSK 802.11b: DSSS (DBPSK / DQPSK / CCK) 802.11g/n: OFDM (BPSK / QPSK / 16QAM / 64QAM) Bluetooth BDR (1Mbps) : GFSK Bluetooth EDR (2Mbps) : $\pi/4$ -DQPSK Bluetooth EDR (3Mbps) : 8-DPSK
DUT Category	Class B – EUT cannot support Packet Switched and Circuit Switched Network simultaneously but can automatically switch between Packet and Circuit Switched Network.
Remark: The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.	

3.2 Maximum RF output power among production units

Band	GSM850 (Burst Average Power) (dBm)	GSM1900 (Burst Average Power) (dBm)
GSM (GMSK, 1 Tx slot)	34	31
GPRS (GMSK, 1 Tx slot)	33	30
GPRS (GMSK, 2 Tx slots)	32	29
GPRS (GMSK, 3 Tx slots)	31	28
GPRS (GMSK, 4 Tx slots)	29	26

Mode	WCDMA Band V	WCDMA Band II
	Average power(dBm)	
AMR 12.2k	23	23
RMC 12.2Kbps	24	23.5
HSDPA Subtest-1	23	23.5
HSDPA Subtest-2	23	23
HSDPA Subtest-3	23	23
HSDPA Subtest-4	23	23
HSUPA Subtest-1	22	22
HSUPA Subtest-2	21	21
HSUPA Subtest-3	22	22
HSUPA Subtest-4	21	21
HSUPA Subtest-5	22	23.5

Average power (dBm)				
Mode / Band	IEEE 802.11			
	a	b	g	n-HT20
2.4 GHz WIFI		15	12	11

Bluetooth average power(dBm)			
Mode/Band	1Mbps (GMSK)	2Mbps ($\pi/4$ -DQPSK)	3Mbps (8-DPSK)
2.4 GHz Bluetooth	6	5	5



3.3 Product Photos

Please refer to Appendix D.

3.4 Applied Standard

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2003
- FCC OET Bulletin 65 Supplement C (Edition 01-01)
- FCC KDB 447498 D01 v05
- FCC KDB 648474 D04v01
- FCC KDB 248227 D01 v01r02
- FCC KDB 941225 D01 v02
- FCC KDB 941225 D03 v01
- FCC KDB 941225 D06 v01
- FCC KDB 865664 D01 v01

3.5 Device Category and SAR Limits

This device belongs to portable device category because its radiating structure is allowed to be used within 20 centimeters of the body of the user. Limit for General Population/Uncontrolled exposure should be applied for this device, it is 1.6 W/kg as averaged over any 1 gram of tissue.

3.6 Test Conditions

3.6.1 Ambient Condition

Ambient Temperature	20 to 24 °C
Humidity	< 60 %

3.6.2 Test Configuration

For WWAN SAR testing, the device was controlled by using a base station emulator. Communication between the device and the emulator was established by air link. The distance between the EUT and the antenna of the emulator is larger than 50 cm and the output power radiated from the emulator antenna is at least 30 dB smaller than the output power of EUT.

During WLAN SAR testing EUT is configured with the WLAN continuous TX tool.

For WLAN SAR testing, WLAN engineering testing software installed on the EUT can provide continuous transmitting RF signal.

4. Specific Absorption Rate (SAR)

4.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

4.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$SAR = C \left(\frac{\delta T}{\delta t} \right)$$

Where: C is the specific heat capacity, δT is the temperature rise and δt is the exposure duration, or related to the electrical field in the tissue by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

5. SAR Measurement System

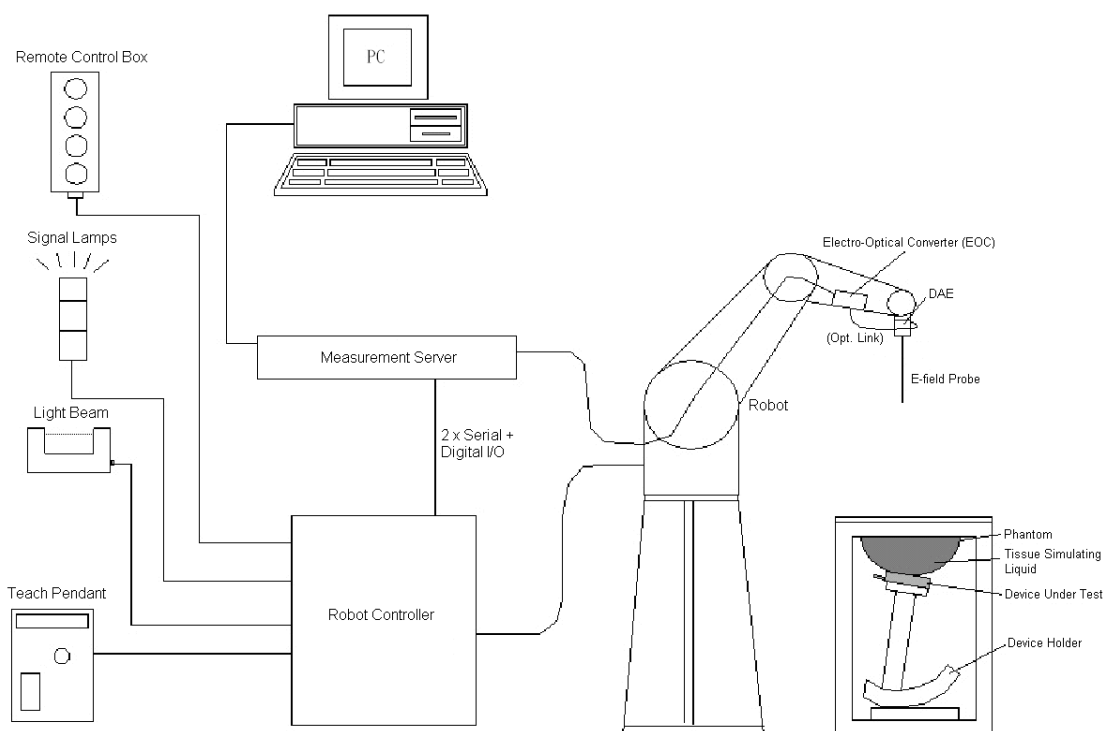


Fig 5.1 SPEAG DASY System Configurations

The DASY system for performance compliance tests is illustrated above graphically. This system consists of the following items:

- A standard high precision 6-axis robot with controller, a teach pendant and software
- A data acquisition electronic (DAE) attached to the robot arm extension
- A dosimetric probe equipped with an optical surface detector system
- The electro-optical converter (EOC) performs the conversion between optical and electrical signals
- A measurement server performs the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the accuracy of the probe positioning
- A computer operating Windows XP
- DASY software
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom
- A device holder
- Tissue simulating liquid
- Dipole for evaluating the proper functioning of the system

Component details are described in in the following sub-sections.

5.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

5.1.1 E-Field Probe Specification

<EX3DV4 Probe>

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)	
Frequency	10 MHz to 6 GHz; Linearity: ± 0.2 dB	
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)	
Dynamic Range	10 μ W/g to 100 mW/g; Linearity: ± 0.2 dB (noise: typically < 1 μ W/g)	
Dimensions	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm	

Fig 5.2 Photo of EX3DV4

5.1.2 E-Field Probe Calibration

Each probe needs to be calibrated according to a dosimetric assessment procedure with accuracy better than $\pm 10\%$. The spherical isotropy shall be evaluated and within ± 0.25 dB. The sensitivity parameters (NormX, NormY, and NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested. The calibration data can be referred to appendix C of this report.

5.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock. The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Fig 5.3 Photo of DAE

5.3 Robot

The SPEAG DASY system uses the high precision robots (DASY5: TX90XL) type from Stäubli SA (France). For the 6-axis controller system, the robot controller version (DASY5: CS8c) from Stäubli is used. The Stäubli robot series have many features that are important for our application:

- High precision (repeatability ± 0.035 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)



Fig 5.4 Photo of DASY5

5.4 Measurement Server

The measurement server is based on a PC/104 CPU board with CPU (DASY5: 400 MHz, Intel Celeron), chipdisk (DASY5: 128 MB), RAM (DASY5: 128 MB). The necessary circuits for communication with the DAE electronic box, as well as the 16 bit AD converter system for optical detection and digital I/O interface are contained on the DASY I/O board, which is directly connected to the PC/104 bus of the CPU board.

The measurement server performs all the real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operations.



Fig 5.5 Photo of Server for DASY5

5.5 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm
Filling Volume	Approx. 25 liters
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet
Measurement Areas	Left Hand, Right Hand, Flat Phantom



Fig 5.6 Photo of SAM Phantom

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

5.6 Device Holder

<Device Holder for SAM Twin Phantom>

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5 mm distance, a positioning uncertainty of ± 0.5 mm would produce a SAR uncertainty of ± 20 %. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.

The DASY device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation center for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.

The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.



Fig 5.7 Device Holder

5.7 Data Storage and Evaluation

5.7.1 Data Storage

The DASY software stores the assessed data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all the necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files. The post-processing software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of erroneous parameter settings. For example, if a measurement has been performed with an incorrect crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be reevaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type (e.g., [V/m], [A/m], [mW/g]). Some of these units are not available in certain situations or give meaningless results, e.g., a SAR-output in a non-lose media, will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

5.7.2 Data Evaluation

The DASY post-processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software :

Probe parameters :	- Sensitivity	Norm _i , a _{i0} , a _{i1} , a _{i2}
	- Conversion factor	ConvF _i
	- Diode compression point	dcp _i
Device parameters :	- Frequency	f
	- Crest factor	cf
Media parameters :	- Conductivity	σ
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multi-meter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power.

The formula for each channel can be given as :

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

with V_i = compensated signal of channel i, (i = x, y, z)
 U_i = input signal of channel i, (i = x, y, z)
 cf = crest factor of exciting field (DASY parameter)
 dcp_i = diode compression point (DASY parameter)

From the compensated input signals, the primary field data for each channel can be evaluated :

$$\text{E-field Probes : } E_i = \sqrt{\frac{V_i}{\text{Norm}_i \cdot \text{ConvF}}}$$

$$\text{H-field Probes : } H_i = \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$$

with V_i = compensated signal of channel i, (i = x, y, z)
 Norm_i = sensor sensitivity of channel i, (i = x, y, z), $\mu\text{V}/(\text{V/m})^2$ for E-field Probes
 ConvF = sensitivity enhancement in solution
 a_{ij} = sensor sensitivity factors for H-field probes
 f = carrier frequency [GHz]
 E_i = electric field strength of channel i in V/m
 H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude) :

$$E_{\text{tot}} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$\text{SAR} = E_{\text{tot}}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

with SAR = local specific absorption rate in mW/g
 E_{tot} = total field strength in V/m
 σ = conductivity in [mho/m] or [Siemens/m]
 ρ = equivalent tissue density in g/cm^3

Note that the density is set to 1, to account for actual head tissue density rather than the density of the tissue simulating liquid.

5.8 Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	835MHz System Validation Kit	D835V2	4d091	Nov. 18, 2011	Nov. 16, 2013
SPEAG	1900MHz System Validation Kit	D1900V2	5d118	Nov. 21, 2011	Nov. 16, 2013
SPEAG	2450MHz System Validation Kit	D2450V2	736	Jul. 25, 2011	Jul. 24, 2013
SPEAG	Data Acquisition Electronics	DAE4	1303	Nov. 22, 2012	Nov. 21, 2013
SPEAG	Dosimetric E-Field Probe	EX3DV4	3819	Nov. 26, 2012	Nov. 25, 2013
SPEAG	SAM Twin Phantom	QD 000 P40 CD	TP-1670	NCR	NCR
SPEAG	SAM Twin Phantom	QD 000 P40 CD	TP-1671	NCR	NCR
Agilent	Base Station	E5515C	MY50267224	Dec. 29, 2012	Dec. 28, 2013
Agilent	ENA Series Network Analyzer	E5071C	MY46111157	Apr. 13, 2012	Apr. 12, 2013
Anritsu	Power Sensor	MA2411B	1207253	May 08, 2012	May 07, 2013
Woken	Attenuator 1	WK0602-XX	N/A	Note 4	
PE	Attenuator 2	PE7005-10	N/A	Note 4	
PE	Attenuator 3	PE7005- 3	N/A	Note 4	
Agilent	Dual Directional Coupler	778D	50422	Note 4	
Agilent	Dielectric Probe Kit	85070D	US01440205	Note 5	
AR	Power Amplifier	5S1G4M2	0328767	Note 6	
R&S	Spectrum Analyzer	FSP30	101400	Jun. 01, 2012	May 31, 2013

Table 5.1 Test Equipment List

Note:

1. The calibration certificate of DASY can be referred to appendix C of this report.
2. Referring to KDB 865664 D01v01, the dipole calibration interval can be extended to 3 years with justification. The dipoles are also not physically damaged, or repaired during the interval.
3. The justification data of dipole D835V2, SN: 4d091; D1900V2, SN: 5d118, D2450V2, SN: 736, can be found in appendix C. The return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration.
4. The Insertion Loss calibration of Dual Directional Coupler and Attenuator were characterized via the network analyzer and compensated during system check.
5. The dielectric probe kit was calibrated via the network analyzer, with the specified procedure (calibrated in pure water) and calibration kit (standard) short circuit, before the dielectric measurement. The specific procedure and calibration kit are provided by Agilent.
6. In system check we need to monitor the level on the power meter, and adjust the power amplifier level to have precise power level to the dipole; the measured SAR will be normalized to 1W input power according to the ratio of 1W to the input power to the dipole. For system check, the calibration of the power amplifier is deemed not critically required for correct measurement; the power meter is critical and we do have calibration for it
7. Attenuator 1 insertion loss is calibrated by the network Analyzer, which the calibration is valid, before system check.

6. Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 6.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 6.2.


Fig 6.1 Photo of Liquid Height for Head SAR

Fig 6.2 Photo of Liquid Height for Body SAR

The following table gives the recipes for tissue simulating liquid.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
For Head								
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
For Body								
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7

Table 6.1 Recipes of Tissue Simulating Liquid

The dielectric parameters of the liquids were verified prior to the SAR evaluation using an Agilent 85070D Dielectric Probe Kit and an Agilent Network Analyzer.

The following table shows the measuring results for simulating liquid.

Freq. (MHz)	Liquid Type	Temp. (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target (σ)	Permittivity Target (ϵ_r)	Delta (σ) (%)	Delta (ϵ_r) (%)	Limit (%)	Date
835	Head	21.2	0.918	41.297	0.90	41.5	2.00	-0.49	±5	Mar. 25, 2013
1900	Head	21.1	1.417	39.706	1.40	40.0	1.21	-0.73	±5	Mar. 25, 2013
2450	Head	21.4	1.856	37.685	1.80	39.2	3.11	-3.86	±5	Mar. 25, 2013
835	Body	21.5	0.977	54.395	0.97	55.2	0.72	-1.46	±5	Mar. 22, 2013
1900	Body	21.8	1.528	54.867	1.52	53.3	0.53	2.94	±5	Mar. 24, 2013
2450	Body	21.5	1.976	54.13	1.95	52.7	1.33	2.71	±5	Mar. 25, 2013

Table 6.2 Measuring Results for Simulating Liquid

7. SAR System Verification

Each DASY system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the DASY software, enable the user to conduct the system performance check and system validation. System validation kit includes a dipole, tripod holder to fix it underneath the flat phantom and a corresponding distance holder.

7.1 Purpose of System Performance check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

7.2 System Setup

In the simplified setup for system evaluation, the EUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

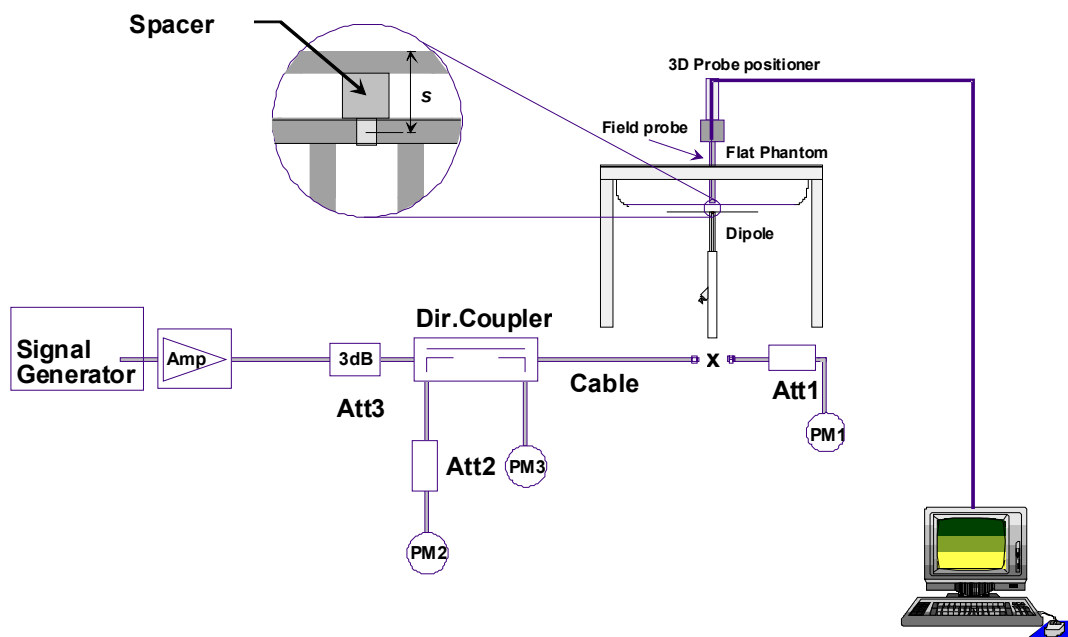


Fig 7.1 System Setup for System Evaluation

1. Signal Generator
2. Amplifier
3. Directional Coupler
4. Power Meter
5. Calibrated Dipole



Fig 7.2 Photo of Dipole Setup

7.3 SAR System Verification Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Table 7.1 shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Liquid Type	Power fed onto reference dipole (mW)	Target SAR (W/kg)	Measured SAR (W/kg)	Normalized SAR (W/kg)	Deviation (%)
Mar. 25, 2013	835	Head	250	9.4	2.49	9.96	5.96
Mar. 25, 2013	1900	Head	250	40.3	9.99	39.96	-0.84
Mar. 25, 2013	2450	Head	250	54.8	14.2	56.8	3.65
Mar. 22, 2013	835	Body	250	9.42	2.51	10.04	6.58
Mar. 24, 2013	1900	Body	250	41.8	10.4	41.6	-0.48
Mar. 25, 2013	2450	Body	250	52.3	13.6	54.4	4.02

Table 7.1 Target and Measurement SAR after Normalized

8. EUT Testing Position

This EUT was tested in ten different positions. They are right cheek, right tilted, left cheek, left tilted, Front of the EUT with phantom 1 cm gap, Back of the EUT with phantom 1 cm gap, Top Side of the EUT with phantom 1 cm gap, Bottom Side of the EUT with phantom 1 cm gap, Right Side of the EUT with phantom 1 cm gap, and Left Side of the EUT with phantom 1 cm gap, as illustrated below.

8.1 Define two imaginary lines on the handset

- The vertical centerline passes through two points on the front side of the handset - the midpoint of the width w_t of the handset at the level of the acoustic output, and the midpoint of the width w_b of the bottom of the handset.
- The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output. The horizontal line is also tangential to the face of the handset at point A.
- The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset, especially for clamshell handsets, handsets with flip covers, and other irregularly shaped handsets.

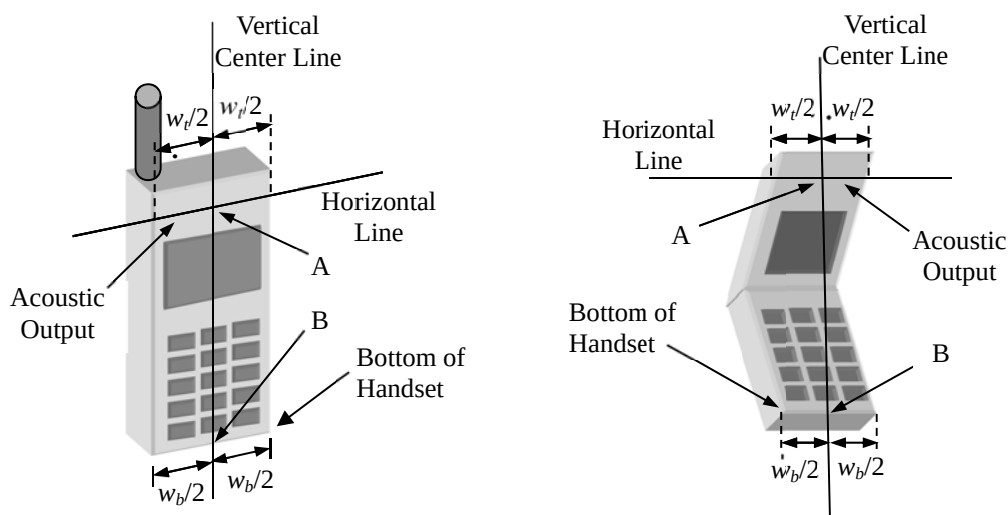


Fig 8.1 Illustration for Handset Vertical and Horizontal Reference Lines

8.2 Cheek Position

- To position the device with the vertical center line of the body of the device and the horizontal line crossing the center piece in a plane parallel to the sagittal plane of the phantom. While maintaining the device in this plane, align the vertical center line with the reference plane containing the three ear and mouth reference point (M: Mouth, RE: Right Ear, and LE: Left Ear) and align the center of the ear piece with the line RE-LE.
- To move the device towards the phantom with the ear piece aligned with the line LE-RE until the phone touched the ear. While maintaining the device in the reference plane and maintaining the phone contact with the ear, move the bottom of the phone until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost (see Fig. 8.2).

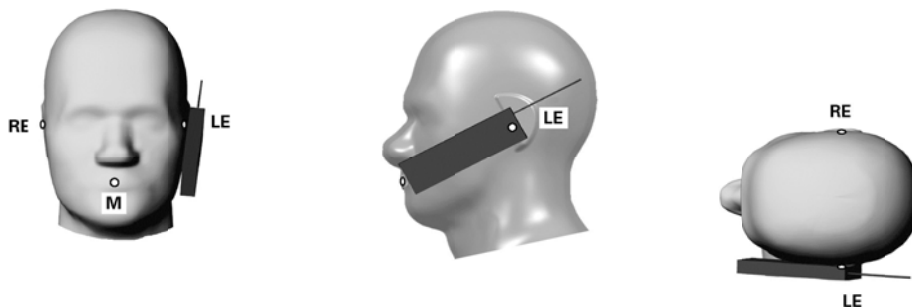


Fig 8.2 Illustration for Cheek Position

8.3 Tilted Position

- To position the device in the “cheek” position described above.
- While maintaining the device the reference plane described above and pivoting against the ear, moves it outward away from the mouth by an angle of 15 degrees or until contact with the ear is lost (see Fig. 8.3).

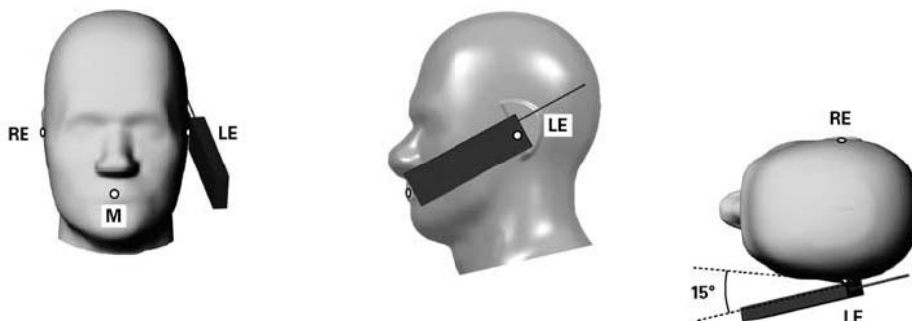


Fig 8.3 Illustration for Tilted Position

8.4 Body Worn Position

- (a) To position the device parallel to the phantom surface with either keypad up or down.
- (b) To adjust the device parallel to the flat phantom.
- (c) To adjust the distance between the device surface and the flat phantom to 1 cm.

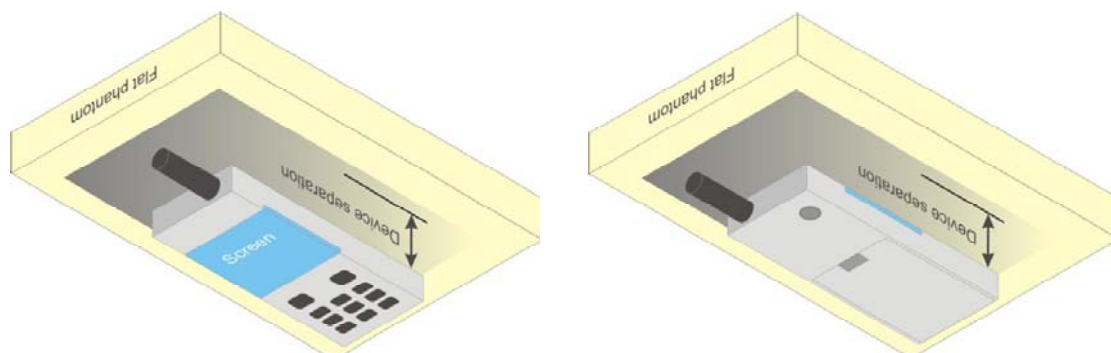


Fig 8.4 Illustration for Body Worn Position

8.5 Hotspot Position

- (a) To position the device parallel to the phantom surface with all sides.
- (b) To adjust the device parallel to the flat phantom.
- (c) To adjust the distance between the device and the flat phantom to 1 cm.

<EUT Setup Photos>

Please refer to Appendix E for the test setup photos.

9. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix E demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

9.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

9.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

9.3 Area & Zoom Scan Procedures

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g. Area scan and zoom scan resolution setting follows KDB 865664 D01v01 quoted below.

For any secondary peaks found in the area scan which are within 2 dB of the maximum peak and are not within this zoom scan, the zoom scan should be repeated

			≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface			5 ± 1 mm	$\frac{1}{2} \delta \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location			$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: Δx_{Area} , Δy_{Area}			≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
			When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be $\leq$ the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: Δx_{Zoom} , Δy_{Zoom}			≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$		≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$	
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.				
* When zoom scan is required and the <u>reported</u> SAR from the area scan based <i>1-g SAR estimation</i> procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.				

9.4 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

9.5 SAR Averaged Methods

In DASY, the interpolation and extrapolation are both based on the modified Quadratic Shepard's method. The interpolation scheme combines a least-square fitted function method and a weighted average method which are the two basic types of computational interpolation and approximation.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5 mm.

9.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

10. Conducted RF Output Power (Unit: dBm)

<GSM Conducted Power>

Note:

1. Per KDB 447498 D01v05, the maximum output power channel is used for SAR testing and for further SAR test reduction.
2. The EUT do not support DTM function.

For SIM Card 1

Band: GSM850	Burst Average Power (dBm)			Frame-Average Power (dBm)		
Channel	128	189	251	128	189	251
Frequency (MHz)	824.2	836.4	848.8	824.2	836.4	848.8
GSM (GMSK, 1 Tx slot)	32.33	32.25	32.16	23.33	23.25	23.16
GPRS (GMSK, 1 Tx slot) – CS1	32.32	32.24	32.14	23.32	23.24	23.14
GPRS (GMSK, 2 Tx slots) – CS1	31.37	31.28	31.21	25.37	25.28	25.21
GPRS (GMSK, 3 Tx slots) – CS1	29.81	29.72	29.65	25.55	25.46	25.39
GPRS (GMSK, 4 Tx slots) – CS1	28.26	28.20	28.12	25.26	25.20	25.12

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.
The calculated method are shown as below:
Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB
Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB
Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB
Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

Band: GSM1900	Burst Average Power (dBm)			Frame-Average Power (dBm)		
Channel	512	661	810	512	661	810
Frequency (MHz)	1850.2	1880.0	1909.8	1850.2	1880.0	1909.8
GSM (GMSK, 1 Tx slot)	28.91	29.27	29.63	19.91	20.27	20.63
GPRS (GMSK, 1 Tx slot) – CS1	28.89	29.26	29.62	19.89	20.26	20.62
GPRS (GMSK, 2 Tx slots) – CS1	28.00	28.14	28.33	22.00	22.14	22.33
GPRS (GMSK, 3 Tx slots) – CS1	26.58	26.73	26.83	22.32	22.47	22.57
GPRS (GMSK, 4 Tx slots) – CS1	25.07	25.24	25.38	22.07	22.24	22.38

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.
The calculated method are shown as below:
Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB
Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB
Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB
Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

For SIM Card 2

Band: GSM850	Burst Average Power (dBm)			Frame-Average Power (dBm)		
Channel	128	189	251	128	189	251
Frequency (MHz)	824.2	836.4	848.8	824.2	836.4	848.8
GSM (GMSK, 1 Tx slot)	32.33	32.24	32.15	23.33	23.24	23.15
GPRS (GMSK, 1 Tx slot) – CS1	32.32	32.24	32.14	23.32	23.24	23.14
GPRS (GMSK, 2 Tx slots) – CS1	31.35	31.27	31.20	25.35	25.27	25.20
GPRS (GMSK, 3 Tx slots) – CS1	29.80	29.70	29.61	25.54	25.44	25.35
GPRS (GMSK, 4 Tx slots) – CS1	28.23	28.15	28.09	25.23	25.15	25.09

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.
The calculated method are shown as below:
Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB
Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB
Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB
Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

Band: GSM1900	Burst Average Power (dBm)			Frame-Average Power (dBm)		
Channel	512	661	810	512	661	810
Frequency (MHz)	1850.2	1880.0	1909.8	1850.2	1880.0	1909.8
GSM (GMSK, 1 Tx slot)	28.91	29.27	29.63	19.91	20.27	20.63
GPRS (GMSK, 1 Tx slot) – CS1	28.89	29.25	29.62	19.89	20.25	20.62
GPRS (GMSK, 2 Tx slots) – CS1	28.00	28.13	28.30	22.00	22.13	22.30
GPRS (GMSK, 3 Tx slots) – CS1	26.58	26.70	26.82	22.32	22.44	22.56
GPRS (GMSK, 4 Tx slots) – CS1	25.06	25.23	25.37	22.06	22.23	22.37

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.
The calculated method are shown as below:
Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB
Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB
Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB
Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

Note:

1. For Head SAR testing, GSM should be evaluated, therefore the EUT was set in GSM Voice for GSM850 and set in GSM Voice for GSM1900 due to its highest frame-average power.
2. For Body worn SAR testing, GSM should be evaluated, therefore the EUT was set in GSM Voice for GSM850 and set in GSM Voice for GSM1900 due to its highest frame-average power.
3. For hotspot mode SAR testing, GPRS should be evaluated, therefore the EUT was set in GPRS (3 Tx slots) for GSM850 and set in GPRS (3 Tx slots) for GSM1900 due to its highest frame-average power.

<WCDMA Conducted Power>

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{hs} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{hs} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Setup Configuration

HSUPA Setup Configuration:

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCI
 - viii. Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (Note 5) (Note 6)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 6)	E-TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/225	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β_{ed1} : 47/15 β_{ed2} : 47/15	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 (Note 4)	15/15 (Note 4)	64	15/15 (Note 4)	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: Δ_{ACK} , Δ_{NACK} and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.

Note 5: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 6: β_{ed} can not be set directly, it is set by Absolute Grant Value.

Setup Configuration

<WCDMA Conducted Power>
Note:

1. Per KDB 941225 D01, RMC 12.2kbps setting is used to evaluate SAR. If AMR 12.2kbps power is < 0.25dB higher than RMC 12.2kbps, SAR tests with AMR 12.2kbps can be excluded.
2. By design, AMR, HSDPA and HSUPA RF power will not be larger than RMC 12.2kbps., detailed information is included in Tune-up Procure exhibit.
3. It is expected by the manufacturer that MPR for some HSDPA and HSUPA subtests may differ from the specification of 3GPP, according to the chipset implementation in this model. The implementation and expected deviation are detailed in tune-up procedure exhibit.

For SIM Card 1

WCDMA Average power (dBm)							
Band		WCDMA Band V			WCDMA Band II		
Channel		4132	4182	4233	9262	9400	9538
Frequency (MHz)		826.4	836.4	846.6	1852.4	1880.0	1907.6
3GPP Rel 99	AMR 12.2K	22.20	22.53	22.37	22.75	22.36	22.62
3GPP Rel 99	RMC 12.2K	22.27	22.57	22.50	22.80	22.41	22.67
3GPP Rel 5	HSDPA Subtest-1	22.09	22.37	22.31	22.59	22.23	22.43
3GPP Rel 5	HSDPA Subtest-2	22.08	22.34	22.35	22.61	22.21	22.41
3GPP Rel 5	HSDPA Subtest-3	22.05	22.31	22.29	22.56	22.24	22.39
3GPP Rel 5	HSDPA Subtest-4	22.04	22.29	22.27	22.59	22.21	22.40
3GPP Rel 6	HSUPA Subtest-1	21.48	21.55	21.52	21.72	21.59	21.55
3GPP Rel 6	HSUPA Subtest-2	20.14	20.29	20.17	20.54	20.04	20.44
3GPP Rel 6	HSUPA Subtest-3	21.05	21.22	21.06	21.10	20.79	21.05
3GPP Rel 6	HSUPA Subtest-4	20.19	20.34	20.19	20.28	20.16	20.26
3GPP Rel 6	HSUPA Subtest-5	21.55	21.74	21.64	21.74	21.61	21.68

MPR (dB)								
3GPP MPR	Subtest		WCDMA Band V			WCDMA Band II		
0	3GPP Rel 5	HSDPA Subtest-1	0.00	0.00	0.00	0.00	0.00	0.00
0	3GPP Rel 5	HSDPA Subtest-2	0.01	0.03	-0.04	-0.02	0.02	0.02
≤ 0.5	3GPP Rel 5	HSDPA Subtest-3	0.04	0.06	0.02	0.03	-0.01	0.04
≤ 0.5	3GPP Rel 5	HSDPA Subtest-4	0.05	0.08	0.04	0.00	0.02	0.03
0	3GPP Rel 6	HSUPA Subtest-1	0.07	0.19	0.12	0.02	0.02	0.13
≤ 2	3GPP Rel 6	HSUPA Subtest-2	1.41	1.45	1.47	1.20	1.57	1.24
≤ 1	3GPP Rel 6	HSUPA Subtest-3	0.50	0.52	0.58	0.64	0.82	0.63
≤ 2	3GPP Rel 6	HSUPA Subtest-4	1.36	1.40	1.45	1.46	1.45	1.42
0	3GPP Rel 6	HSUPA Subtest-5	0.00	0.00	0.00	0.00	0.00	0.00

<WLAN 2.4GHz Conducted Power>

WLAN 2.4G 802.11b Average Power (dBm)					
Channel	Frequency (MHz)	Data Rate (bps)			
		1M	2M	5.5M	11M
CH 01	2412	14.31	14.33	13.46	13.47
CH 06	2437	13.99	13.97	13.12	13.12
CH 11	2462	14.78	14.75	13.89	13.89

WLAN 2.4G 802.11g Average Power (dBm)									
Channel	Frequency (MHz)	Data Rate (bps)							
		6M	9M	12M	18M	24M	36M	48M	54M
CH 01	2412	10.42	10.43	10.43	10.45	10.63	10.64	11.16	11.14
CH 06	2437	10.70	10.71	10.71	10.72	10.42	10.42	10.97	10.92
CH 11	2462	10.99	11.00	11.00	11.02	10.86	10.72	11.13	11.18

WLAN 2.4G 802.11n-HT20 Average Power (dBm)									
Channel	Frequency (MHz)	MCS Index							
		MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
CH 01	2412	10.44	10.38	10.34	10.62	10.61	10.64	9.84	9.81
CH 06	2437	10.13	10.09	10.18	10.31	10.29	10.30	9.40	9.44
CH 11	2462	10.96	10.83	10.91	10.93	10.94	10.93	10.16	10.25


Note:

1. Per KDB 248227 D01 v01r02, choose the highest output power channel to test SAR and determine further SAR exclusion
2. For each frequency band, testing at higher data rates and higher order modulations is not required when the maximum average output power for each of these configurations is less than 1/4dB higher than those measured at the lowest data rate
3. Per KDB 248227 D01 v01r02, 11g and 11n-HT20 output power is less than 1/4dB higher than 11b mode, thus the SAR can be excluded.

<Bluetooth Conducted Power>

Channel	Frequency (MHz)	Average Power (dBm)								
		Data Rate								
		DH1	DH3	DH5	2DH1	2DH3	2DH5	3DH1	3DH3	3DH5
CH 00	2402	4.17	4.02	3.85	3.15	2.45	2.57	3.14	2.83	2.65
CH 39	2441	5.67	5.55	5.39	4.60	4.25	4.14	4.69	4.37	4.18
CH 78	2480	5.63	5.49	5.33	4.55	4.23	4.08	4.65	4.31	4.13

11. Exposure Positions Consideration

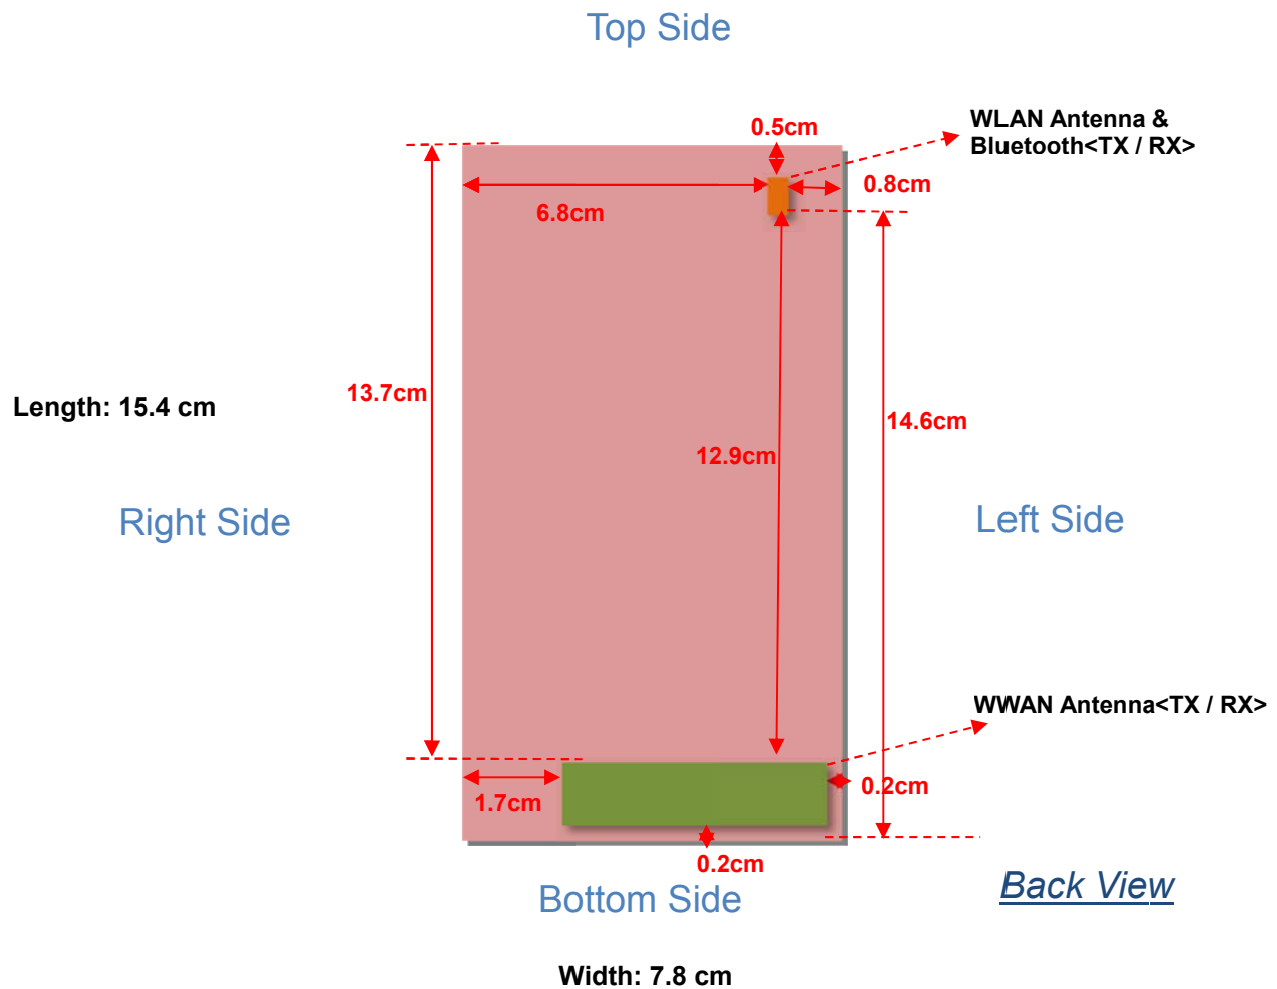

Antennas	Wireless Interface
WWAN Antenna (Tx / Rx)	GSM850 GSM1900 WCDMA Band V WCDMA Band II
Bluetooth & WLAN Antenna (Tx / Rx)	WLAN 2.4GHz Bluetooth

Distance of the Antenna to the EUT surface/edge Test distance: 10 mm						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN	≤ 25mm	≤ 25mm	137mm	≤ 25mm	≤ 25mm	≤ 25mm
Bluetooth & WLAN	≤ 25mm	≤ 25mm	≤ 25mm	146mm	68.mm	≤ 25mm

Positions for SAR tests; Hotspot mode Test distance: 10 mm						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Main	Yes	Yes	NO	Yes	Yes	Yes
Bluetooth & WLAN	Yes	Yes	Yes	NO	NO	Yes

- Head/Body-worn/Hotspot mode SAR assessments are required.
- Referring to KDB 941225 D06 v01, when the overall device length and width are ≥ 9cm*5cm, the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge
- Per KDB 447498 D01v05, for handsets the *test separation distance* is determined by the smallest distance between the outer surface of the device and the user; which is 0mm for head SAR, 10mm for hotspot SAR, 10mm for body-worn SAR.
- If the test separation distance (antenna-user) is < 5mm, 5mm is used for excluded SAR calculation
- For minimum test separation distance ≤ 50mm, Bluetooth standalone SAR test exclusion power threshold is determined by: $[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR. The formula sets the maximum RF power threshold, and the transmitter with RF power equal or less than the power threshold, SAR testing is not required

Exposure Position	Wireless Interface	
	Bluetooth	
	Tune-up Maximum power (dBm)	6
Head	Tune-up Maximum rated power (mW)	3.98
	Antenna to user (mm)	5
	SAR exclusion threshold (mW)	10
	SAR testing required?	NO
Body	Antenna to user (mm)	10
	SAR exclusion threshold (mW)	19
	SAR testing required?	NO

12. SAR Test Results

Note:

- Per KDB 447498 D01v05, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 $\text{Scaling Factor} = \text{tune-up limit power (mW)} / \text{EUT RF power (mW)}$, where tune-up limit is the maximum rated power among all production units.
 $\text{Reported SAR(W/kg)} = \text{Measured SAR(W/kg)} * \text{Scaling Factor}$
- Per KDB 447498 D01v05, for each exposure position, if the highest output channel reported SAR $\leq 0.8\text{W/kg}$, other channels SAR testing are not necessary

12.1 Test Records for Head SAR Test

<GSM SAR>

Plot No.	Band	Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
45	GSM850	GSM Voice	Right Cheek	128	824.2	32.33	34	1.469	-0.04	0.271	0.398
46	GSM850	GSM Voice	Right Tilted	128	824.2	32.33	34	1.469	0.02	0.168	0.247
47	GSM850	GSM Voice	Left Cheek	128	824.2	32.33	34	1.469	-0.01	0.253	0.372
48	GSM850	GSM Voice	Left Tilted	128	824.2	32.33	34	1.469	0.03	0.175	0.257
57	GSM1900	GSM Voice	Right Cheek	810	1909.8	29.63	31	1.371	-0.14	0.074	0.101
58	GSM1900	GSM Voice	Right Tilted	810	1909.8	29.63	31	1.371	0.18	0.053	0.073
59	GSM1900	GSM Voice	Left Cheek	810	1909.8	29.63	31	1.371	0.01	0.118	0.162
60	GSM1900	GSM Voice	Left Tilted	810	1909.8	29.63	31	1.371	0.05	0.056	0.077

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
49	WCDMA V	RMC 12.2K	Right Cheek	4182	836.4	22.57	24	1.390	-0.08	0.302	0.420
50	WCDMA V	RMC 12.2K	Right Tilted	4182	836.4	22.57	24	1.390	-0.07	0.184	0.256
51	WCDMA V	RMC 12.2K	Left Cheek	4182	836.4	22.57	24	1.390	0.09	0.266	0.370
52	WCDMA V	RMC 12.2K	Left Tilted	4182	836.4	22.57	24	1.390	-0.12	0.188	0.261
53	WCDMA II	RMC 12.2K	Right Cheek	9262	1852.4	22.8	23.5	1.175	-0.12	0.222	0.261
54	WCDMA II	RMC 12.2K	Right Tilted	9262	1852.4	22.8	23.5	1.175	0.16	0.178	0.209
55	WCDMA II	RMC 12.2K	Left Cheek	9262	1852.4	22.8	23.5	1.175	-0.01	0.336	0.395
56	WCDMA II	RMC 12.2K	Left Tilted	9262	1852.4	22.8	23.5	1.175	0.15	0.155	0.182

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
61	WLAN2.4GHz	802.11b	Right Cheek	11	2462	14.78	15	1.052	0.01	0.565	0.594
62	WLAN2.4GHz	802.11b	Right Tilted	11	2462	14.78	15	1.052	-0.01	0.391	0.411
63	WLAN2.4GHz	802.11b	Left Cheek	11	2462	14.78	15	1.052	0.02	0.182	0.191
64	WLAN2.4GHz	802.11b	Left Tilted	11	2462	14.78	15	1.052	0.06	0.175	0.184



12.2 Test Records for Hotspot SAR Test

Note: For Hotspot SAR testing, per KDB 941225 D06, for EUT dimension $\geq 9\text{cm} \times 5\text{cm}$, the test distance is 1cm. SAR must be measured for all surfaces and sides with a transmitting antenna located within 2.5cm from that surface or edge.

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
1	GSM850	GPRS (3 Tx slots)	Front	1	128	824.2	29.81	31	1.315	-0.03	0.552	0.726
2	GSM850	GPRS (3 Tx slots)	Back	1	128	824.2	29.81	31	1.315	0.01	0.915	1.203
3	GSM850	GPRS (3 Tx slots)	Left Side	1	128	824.2	29.81	31	1.315	-0.01	0.446	0.587
4	GSM850	GPRS (3 Tx slots)	Right Side	1	128	824.2	29.81	31	1.315	-0.09	0.540	0.710
5	GSM850	GPRS (3 Tx slots)	Bottom Side	1	128	824.2	29.81	31	1.315	-0.12	0.091	0.120
6	GSM850	GPRS (3 Tx slots)	Back	1	189	836.4	29.72	31	1.343	0.01	1.020	1.370
7	GSM850	GPRS (3 Tx slots)	Back	1	251	848.8	29.65	31	1.365	-0.01	1.010	1.378
36	GSM1900	GPRS (3 Tx slots)	Front	1	810	1909.8	26.83	28	1.309	-0.14	0.423	0.554
37	GSM1900	GPRS (3 Tx slots)	Back	1	810	1909.8	26.83	28	1.309	-0.13	0.916	1.199
38	GSM1900	GPRS (3 Tx slots)	Left Side	1	810	1909.8	26.83	28	1.309	0.05	0.163	0.213
39	GSM1900	GPRS (3 Tx slots)	Right Side	1	810	1909.8	26.83	28	1.309	-0.07	0.097	0.127
40	GSM1900	GPRS (3 Tx slots)	Bottom Side	1	810	1909.8	26.83	28	1.309	-0.01	0.564	0.738
41	GSM1900	GPRS (3 Tx slots)	Back	1	512	1850.2	26.58	28	1.387	-0.04	0.809	1.122
42	GSM1900	GPRS (3 Tx slots)	Back	1	661	1880	26.73	28	1.340	0.11	0.886	1.187

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
12	WCDMA V	RMC 12.2K	Front	1	4182	836.4	22.57	24	1.390	-0.13	0.361	0.502
13	WCDMA V	RMC 12.2K	Back	1	4182	836.4	22.57	24	1.390	0.01	0.508	0.706
14	WCDMA V	RMC 12.2K	Left Side	1	4182	836.4	22.57	24	1.390	0.05	0.284	0.395
15	WCDMA V	RMC 12.2K	Right Side	1	4182	836.4	22.57	24	1.390	-0.01	0.387	0.538
16	WCDMA V	RMC 12.2K	Bottom Side	1	4182	836.4	22.57	24	1.390	-0.01	0.077	0.107
17	WCDMA II	RMC 12.2K	Front	1	9262	1852.4	22.8	23.5	1.175	0.13	0.719	0.845
18	WCDMA II	RMC 12.2K	Back	1	9262	1852.4	22.8	23.5	1.175	0.11	1.000	1.175
19	WCDMA II	RMC 12.2K	Left Side	1	9262	1852.4	22.8	23.5	1.175	0.1	0.333	0.391
20	WCDMA II	RMC 12.2K	Right Side	1	9262	1852.4	22.8	23.5	1.175	-0.11	0.171	0.201
21	WCDMA II	RMC 12.2K	Bottom Side	1	9262	1852.4	22.8	23.5	1.175	0.05	0.643	0.755
22	WCDMA II	RMC 12.2K	Front	1	9400	1880	22.41	23.5	1.285	-0.01	0.583	0.749
23	WCDMA II	RMC 12.2K	Front	1	9538	1907.6	22.67	23.5	1.211	-0.05	0.542	0.656
24	WCDMA II	RMC 12.2K	Back	1	9400	1880	22.41	23.5	1.285	-0.01	0.935	1.202
25	WCDMA II	RMC 12.2K	Back	1	9538	1907.6	22.67	23.5	1.211	-0.02	0.994	1.203
29	WCDMA II	HSDPA Subtest 1	Back	1	9262	1852.4	22.59	23.5	1.233	-0.09	1.010	1.245
30	WCDMA II	HSDPA Subtest 1	Back	1	9400	1880	22.23	23.5	1.340	-0.01	0.927	1.242
31	WCDMA II	HSDPA Subtest 1	Back	1	9538	1907.6	22.43	23.5	1.279	-0.02	0.985	1.260
32	WCDMA II	HSUPA Subtest 5	Back	1	9262	1852.4	21.74	23.5	1.500	0.06	0.854	1.281
33	WCDMA II	HSUPA Subtest 5	Back	1	9400	1880	21.61	23.5	1.545	0.11	0.793	1.225
34	WCDMA II	HSUPA Subtest 5	Back	1	9538	1907.6	21.68	23.5	1.521	-0.03	0.899	1.367

Note:

1. Per KDB 941225 D01, RMC 12.2kbps setting is used to evaluate SAR. If HSDPA and HSUPA, output power is < 0.25dB higher than RMC, or reported SAR with RMC 12.2kbps setting is $\leq 1.2\text{W/kg}$, HSDPA and HSUPA SAR evaluation can be excluded.
2. If *Reported* SAR with RMC 12.2kbps setting is $> 1.2\text{W/kg}$, HSDPA subtest-1 and HSUPA subtest-5 SAR is additionally tested at that exposure position.

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
65	WLAN2.4GHz	802.11b	Front	1	11	2462	14.78	15	1.052	0.04	0.100	0.105
66	WLAN2.4GHz	802.11b	Back	1	11	2462	14.78	15	1.052	-0.07	0.097	0.102
67	WLAN2.4GHz	802.11b	Left Side	1	11	2462	14.78	15	1.052	-0.05	0.065	0.068
68	WLAN2.4GHz	802.11b	Top Side	1	11	2462	14.78	15	1.052	0.04	0.070	0.074

12.3 Test Records for Body-worn SAR Test

Note:

1. For Body-worn SAR testing: "V" in the Headset column means the Headset is plugged during SAR testing
2. Body-worn SAR testing was performed at 10mm separation, and this distance is determined by the handset manufacturer that there will be body-worn accessories that users may acquire at the time of equipment certification, to enable users to purchase aftermarket body-worn accessories with the required minimum separation.
3. Per KDB 941225 D06, when the same wireless modes and device transmission configurations are required for testing body-worn accessories and hotspot mode, it is not necessary to test body-worn accessory SAR for the same device orientation if the test separation distance for hotspot mode is more conservative than that used for body-worn accessories. In this report, the worst exposure position is the back exposure position of the device.
4. Body-worn exposure conditions are intended to voice call operations, therefore GSM voice call mode is selected to be tested at the back exposure position.
5. Though per KDB 648474 D04v01, when the reported SAR for a body-worn accessory measured without a headset connected to the handset is ≤ 1.2 W/kg, the SAR testing with a headset connected to the handset is not required, but considered the simultaneous SAR for body-worn, we still perform the WLAN SAR with headset mode.

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Headset	Power Drift (dB)	Measured SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
8	GSM850	GSM Voice	Back	1	189	836.4	32.25	34	1.496	-	0.01	0.609	0.911
9	GSM850	GSM Voice	Back	1	128	824.2	32.33	34	1.469	-	0.01	0.554	0.814
10	GSM850	GSM Voice	Back	1	251	848.8	32.16	34	1.528	-	0.02	0.618	0.944
43	GSM1900	GSM Voice	Back	1	810	1909.8	29.63	31	1.371	-	-0.04	0.527	0.722

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Headset	Power Drift (dB)	Measured SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
12	WCDMA V	RMC 12.2K	Front	1	4182	836.4	22.57	24	1.390	-	-0.13	0.361	0.502
13	WCDMA V	RMC 12.2K	Back	1	4182	836.4	22.57	24	1.390	-	0.01	0.508	0.706
17	WCDMA II	RMC 12.2K	Front	1	9262	1852.4	22.8	23.5	1.175	-	0.13	0.719	0.845
18	WCDMA II	RMC 12.2K	Back	1	9262	1852.4	22.8	23.5	1.175	-	0.11	1.000	1.175
22	WCDMA II	RMC 12.2K	Front	1	9400	1880	22.41	23.5	1.285	-	-0.01	0.583	0.749
23	WCDMA II	RMC 12.2K	Front	1	9538	1907.6	22.67	23.5	1.211	-	-0.05	0.542	0.656
24	WCDMA II	RMC 12.2K	Back	1	9400	1880	22.41	23.5	1.285	-	-0.01	0.935	1.202
25	WCDMA II	RMC 12.2K	Back	1	9538	1907.6	22.67	23.5	1.211	-	-0.02	0.994	1.203
26	WCDMA II	RMC 12.2K	Back	1	9262	1852.4	22.8	23.5	1.175	V	-0.1	1.060	1.245
27	WCDMA II	RMC 12.2K	Back	1	9400	1880	22.41	23.5	1.285	V	-0.01	1.040	1.337
28	WCDMA II	RMC 12.2K	Back	1	9538	1907.6	22.67	23.5	1.211	V	-0.06	0.972	1.177
29	WCDMA II	HSDPA Subtest 1	Back	1	9262	1852.4	22.59	23.5	1.233	-	-0.09	1.010	1.245
30	WCDMA II	HSDPA Subtest 1	Back	1	9400	1880	22.23	23.5	1.340	-	-0.01	0.927	1.242
31	WCDMA II	HSDPA Subtest 1	Back	1	9538	1907.6	22.43	23.5	1.279	-	-0.02	0.985	1.260
32	WCDMA II	HSUPA Subtest 5	Back	1	9262	1852.4	21.74	23.5	1.500	-	0.06	0.854	1.281
33	WCDMA II	HSUPA Subtest 5	Back	1	9400	1880	21.61	23.5	1.545	-	0.11	0.793	1.225
34	WCDMA II	HSUPA Subtest 5	Back	1	9538	1907.6	21.68	23.5	1.521	-	-0.03	0.899	1.367

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Headset	Power Drift (dB)	Measured SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
65	WLAN2.4GHz	802.11b	Front	1	11	2462	14.78	15	1.052	-	0.04	0.100	0.105
66	WLAN2.4GHz	802.11b	Back	1	11	2462	14.78	15	1.052	-	-0.07	0.097	0.102
69	WLAN2.4GHz	802.11b	Back	1	11	2462	14.78	15	1.052	V	-0.16	0.078	0.082

12.4 Repeated SAR Measurement

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Headset	Power Drift (dB)	Measured SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
6	GSM850	GPRS (3 Tx slots)	Back	1	189	836.4	29.72	31	1.343	-	0.01	1.020	1.370
11	GSM850	GPRS (3 Tx slots)	Back	1	189	836.4	29.72	31	1.343	-	0.12	0.969	1.301
37	GSM1900	GPRS (3 Tx slots)	Back	1	810	1909.8	26.83	28	1.309	-	-0.13	0.916	1.199
44	GSM1900	GPRS (3 Tx slots)	Back	1	810	1909.8	26.83	28	1.309	-	0.1	0.843	1.104
26	WCDMA II	RMC 12.2K	Back	1	9262	1852.4	22.8	23.5	1.175	V	-0.1	1.060	1.245
35	WCDMA II	RMC 12.2K	Back	1	9262	1852.4	22.8	23.5	1.175	V	-0.16	1.040	1.222

Note:

1. Per KDB 865664 D01v01, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg
2. Per KDB 865664 D01v01, if the deviation among the repeated measurement is $\leq 20\%$ and the measured SAR < 1.45 W/kg, only one repeated measurement is required.
3. The deviation is the difference in percentage between original and repeated *measured* SAR.
4. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

12.5 Highest SAR Plot

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Headset	Power Drift (dB)	Measured SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
7	GSM850	GPRS (3 Tx slots)	Back	1	251	848.8	29.65	31	1.365	-	-0.01	1.010	1.378
37	GSM1900	GPRS (3 Tx slots)	Back	1	810	1909.8	26.83	28	1.309	-	-0.13	0.916	1.199
13	WCDMA V	RMC 12.2K	Back	1	4182	836.4	22.57	24	1.390	-	0.01	0.508	0.706
34	WCDMA II	HSUPA Subtest 5	Back	1	9538	1907.6	21.68	23.5	1.521	-	-0.03	0.899	1.367
61	WLAN2.4GHz	802.11b	Right Cheek	-	11	2462	14.78	15	1.052	-	0.01	0.565	0.594

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 22.03.2013

07 GSM850_GPRS (3 Tx slots)_Back_1cm_Ch251

DUT: 330701

Communication System: GPRS/EDGE11; Frequency: 848.8 MHz; Duty Cycle: 1:2.7
 Medium: MSL_835_130322 Medium parameters used: $f = 849 \text{ MHz}$; $\sigma = 0.99 \text{ mho/m}$; $\epsilon_r = 54.274$; $\rho = 1000 \text{ kg/m}^3$
 Ambient Temperature : 23.5 °C; Liquid Temperature : 21.5 °C


DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.5, 9.5, 9.5); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch251/Area Scan (71x121x1): Interpolated grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 1.16 W/kg

Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 34.861 V/m; Power Drift = -0.01 dB
 Peak SAR (extrapolated) = 1.271 mW/g
 $\text{SAR}(1 \text{ g}) = 1.010 \text{ mW/g}$; $\text{SAR}(10 \text{ g}) = 0.782 \text{ mW/g}$
 Maximum value of SAR (measured) = 1.15 W/kg

Ch251/Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 34.861 V/m; Power Drift = -0.01 dB
 Peak SAR (extrapolated) = 1.052 mW/g
 $\text{SAR}(1 \text{ g}) = 0.627 \text{ mW/g}$; $\text{SAR}(10 \text{ g}) = 0.361 \text{ mW/g}$
 Maximum value of SAR (measured) = 0.935 W/kg

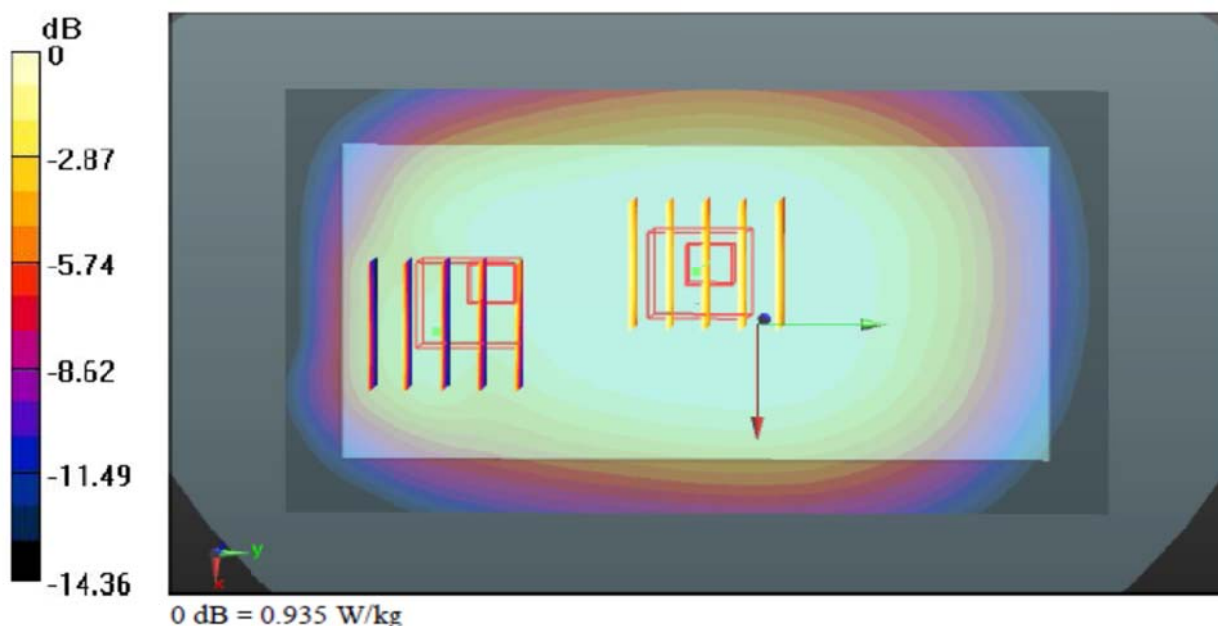

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 24.03.2013

37 GSM1900_GPRS (3 Tx slots)_Back_1cm_Ch810
DUT: 330701

Communication System: GPRS/EDGE11; Frequency: 1909.8 MHz; Duty Cycle: 1:2.7
Medium: MSL_1900_130324 Medium parameters used: $f = 1910 \text{ MHz}$; $\sigma = 1.536 \text{ mho/m}$; $\epsilon_r = 54.849$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : 23.1 °C; Liquid Temperature : 21.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.67, 7.67, 7.67); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch810/Area Scan (71x121x1): Interpolated grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 1.19 W/kg


Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 29.498 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 1.573 mW/g

SAR(1 g) = 0.916 mW/g; SAR(10 g) = 0.491 mW/g

Maximum value of SAR (measured) = 1.27 W/kg

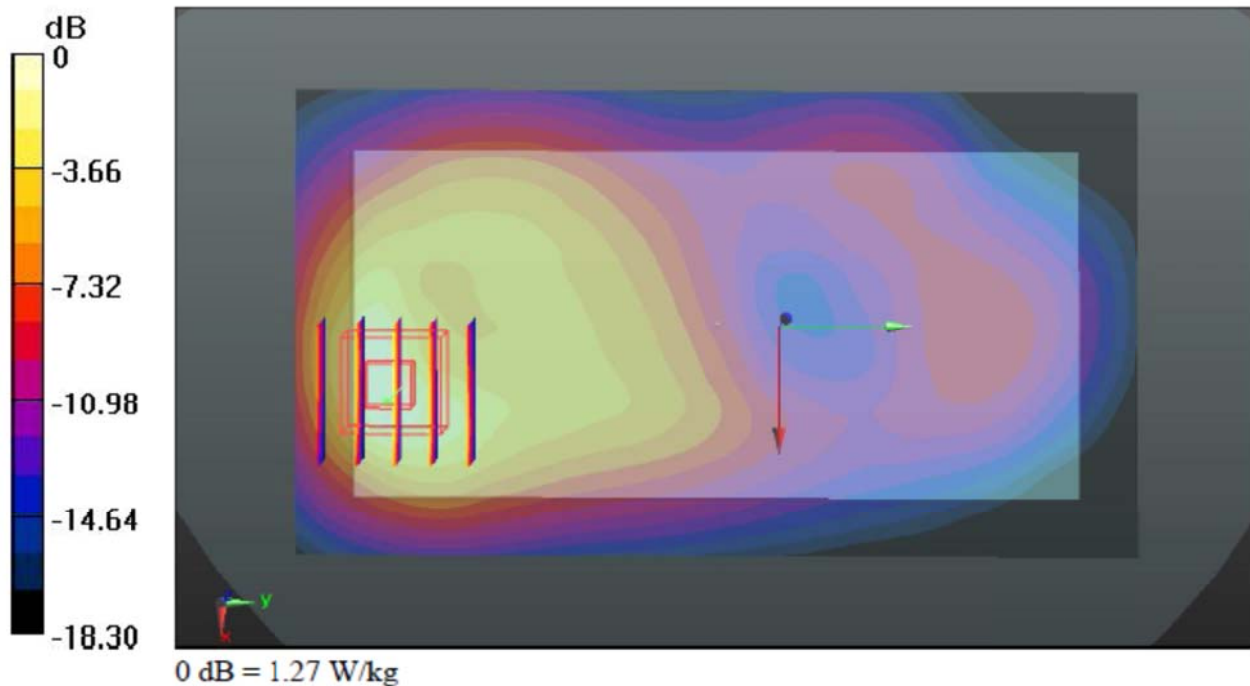

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 22.03.2013

13 WCDMA V_RMC 12.2K_Back_1cm_Ch4182

DUT: 330701

Communication System: UMTS; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: MSL_835_130322 Medium parameters used: $f = 836.4 \text{ MHz}$; $\sigma = 0.978 \text{ mho/m}$; $\epsilon_r = 54.384$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 23.5 °C; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.5, 9.5, 9.5); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch4182/Area Scan (71x121x1): Interpolated grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.599 W/kg

Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 25.086 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.639 mW/g

SAR(1 g) = 0.508 mW/g; SAR(10 g) = 0.398 mW/g

Maximum value of SAR (measured) = 0.582 W/kg


Ch4182/Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 25.086 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.548 mW/g

SAR(1 g) = 0.326 mW/g; SAR(10 g) = 0.196 mW/g

Maximum value of SAR (measured) = 0.485 W/kg

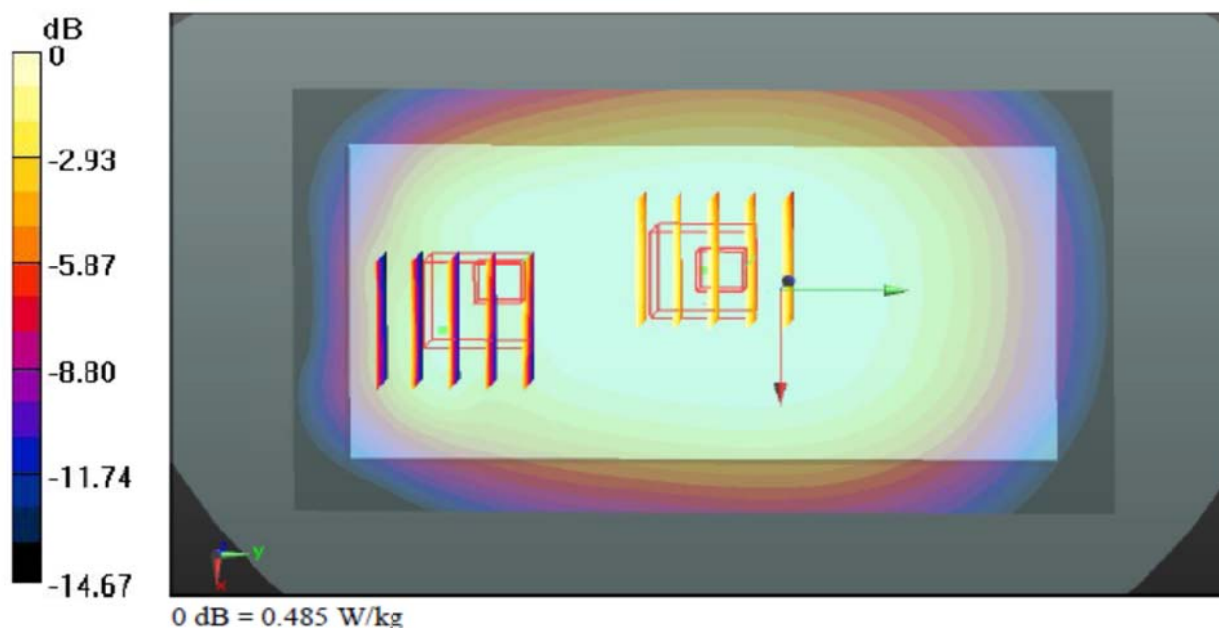

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 24.03.2013

34 WCDMA II_HSUPA Subtest 5_Back_1cm_Ch9538

DUT: 330701

Communication System: UMTS; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: MSL_1900_130324 Medium parameters used: $f = 1908 \text{ MHz}$; $\sigma = 1.535 \text{ mho/m}$; $\epsilon_r =$

54.854; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 23.1 °C; Liquid Temperature : 21.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.67, 7.67, 7.67); Calibrated: 26.11.2012;

- Sensor-Surface: 2mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012

- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671

- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch9538/Area Scan (71x121x1): Interpolated grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 1.22 W/kg


Ch9538/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 29.338 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.546 mW/g

SAR(1 g) = 0.899 mW/g; SAR(10 g) = 0.486 mW/g

Maximum value of SAR (measured) = 1.26 W/kg

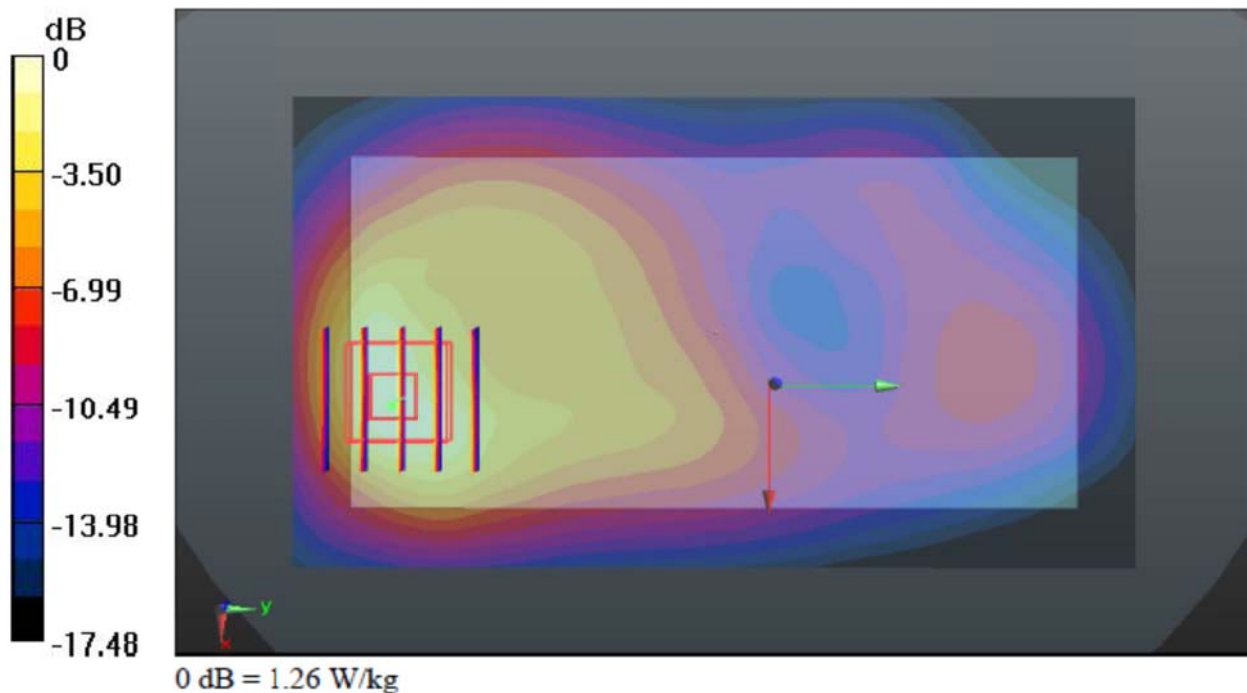

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 25.03.2013

61 WLAN2.4G_802.11b_Right Cheek_Ch11

DUT: 330701

Communication System: WIFI; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: HSL_2450_130325 Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 1.87 \text{ mho/m}$; $\epsilon_r = 37.641$;

$\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 23.4 °C; Liquid Temperature : 21.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(6.99, 6.99, 6.99); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch11/Area Scan (81x151x1): Interpolated grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (interpolated) = 0.799 W/kg


Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 21.781 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.266 mW/g

SAR(1 g) = 0.565 mW/g; SAR(10 g) = 0.252 mW/g

Maximum value of SAR (measured) = 0.863 W/kg

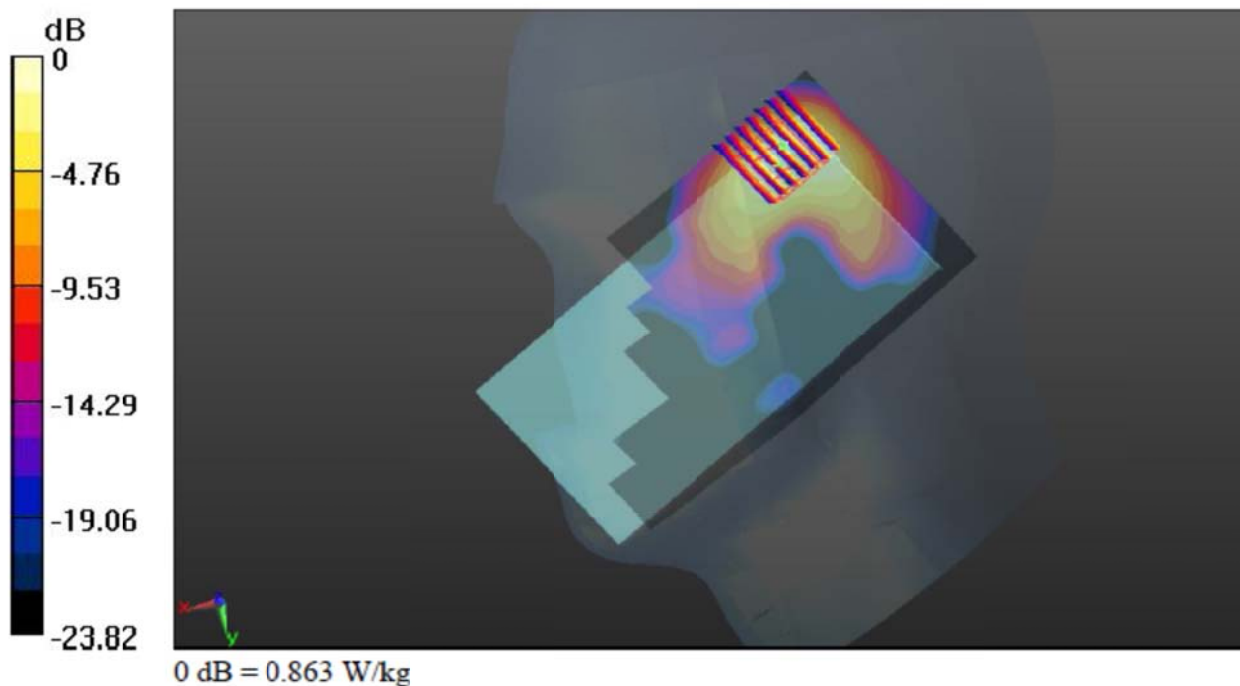

12.6 Simultaneous Multi-band Transmission Analysis

	Position	Applicable Combination
Simultaneous Transmission	Head	GSM/WCDMA (voice) + WLAN 2.4GHz
		GSM/WCDMA (voice) + Bluetooth
	Hotspot	GPRS/WCDMA (data) + WLAN 2.4GHz
		GPRS/WCDMA (data) + Bluetooth
	Body-worn	GSM/WCDMA (voice) + WLAN 2.4GHz
		GSM/WCDMA (voice) + Bluetooth

Note:

- WLAN and Bluetooth share the same antenna, and cannot transmit simultaneously.
- GSM/WCDMA share the same antenna, and cannot transmit simultaneously
- The Reported SAR summation is calculated based on the same configuration and test position.
- Simultaneous transmission analysis for hotspot mode 1cm separation to the body represents the compliance for hand-held and near-body use conditions. Simultaneous transmission of Hotspot mode for head and body-worn conditions was covered under simultaneous transmission analysis of head and body-worn positions, due to the possible WWAN voice call and data transmission SAR was considered in standalone SAR measurement for those exposure positions
- For simultaneous transmission analysis, Bluetooth SAR is estimated per KDB 447498 D01v05 based on the formula below.
 - $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})} / x] \text{ W/kg}$ for test separation distances $\leq 50 \text{ mm}$; where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.
 - 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is $> 50 \text{ mm}$.

Maximum Power	Exposure Position	Head	Hotspot 1cm	Body-worn 1cm
	Test separation	0 mm	10 mm	10 mm
6 dBm	Estimated SAR (W/kg)	0.167W/kg	0.084W/kg	0.084W/kg

- Per KDB 447498 D01v05, simultaneous transmission SAR is compliant if,
 - Scalar SAR summation $< 1.6 \text{ W/kg}$.
 - $\text{SPLSR} = (\text{SAR1} + \text{SAR2}) \cdot 1.5 / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x_1 - x_2)^2 + (y_1 - y_2)^2 + (z_1 - z_2)^2]$, where (x_1, y_1, z_1) and (x_2, y_2, z_2) are the coordinates of the extrapolated peak SAR locations in the zoom scan
If $\text{SPLSR} \leq 0.04$, simultaneously transmission SAR measurement is not necessary
 - Simultaneously transmission SAR measurement, and the reported multi-band SAR $< 1.6 \text{ W/kg}$

<Head SAR>

Position	WWAN-PCE			WLAN 2.4GHz-DTS		WWAN + WLAN SAR (W/kg)	SPLSR ≤ 0.04	Case No.
	WWAN Band	Plot No	Max. WWAN SAR (W/kg)	Plot No	Max. WLAN SAR (W/kg)			
Right Cheek	GSM850	45	0.398	61	0.594	0.99		
	GSM1900	57	0.101	61	0.594	0.70		
	WCDMA Band V	49	0.420	61	0.594	1.01		
	WCDMA Band II	53	0.261	61	0.594	0.86		
Right Tilted	GSM850	46	0.247	62	0.411	0.66		
	GSM1900	58	0.073	62	0.411	0.48		
	WCDMA Band V	50	0.256	62	0.411	0.67		
	WCDMA Band II	54	0.209	62	0.411	0.62		
Left Cheek	GSM850	47	0.372	63	0.191	0.56		
	GSM1900	59	0.162	63	0.191	0.35		
	WCDMA Band V	51	0.370	63	0.191	0.56		
	WCDMA Band II	55	0.395	63	0.191	0.59		
Left Tilted	GSM850	48	0.257	64	0.184	0.44		
	GSM1900	60	0.077	64	0.184	0.26		
	WCDMA Band V	52	0.261	64	0.184	0.45		
	WCDMA Band II	56	0.182	64	0.184	0.37		

	WWAN-PCE			Bluetooth-DSS	WWAN + Bluetooth SAR (W/kg)	SPLSR ≤ 0.04	Case No
Position	WWAN Band	Plot No	Max. WWAN SAR (W/kg)	Estimated SAR (W/kg)			
Right Cheek	GSM850	45	0.398	0.167	0.57		
	GSM1900	57	0.101	0.167	0.27		
	WCDMA Band V	49	0.420	0.167	0.59		
	WCDMA Band II	53	0.261	0.167	0.43		
Right Tilted	GSM850	46	0.247	0.167	0.41		
	GSM1900	58	0.073	0.167	0.24		
	WCDMA Band V	50	0.256	0.167	0.42		
	WCDMA Band II	54	0.209	0.167	0.38		
Left Cheek	GSM850	47	0.372	0.167	0.54		
	GSM1900	59	0.162	0.167	0.33		
	WCDMA Band V	51	0.37	0.167	0.54		
	WCDMA Band II	55	0.395	0.167	0.56		
Left Tilted	GSM850	48	0.257	0.167	0.42		
	GSM1900	60	0.077	0.167	0.24		
	WCDMA Band V	52	0.261	0.167	0.43		
	WCDMA Band II	56	0.182	0.167	0.35		

<Hotspot SAR>

Position	WWAN-PCE			WLAN 2.4GHz-DTS		WWAN + WLAN SAR (W/kg)	SPLSR ≤ 0.04	Case No
	WWAN Band	Plot No	Max. WWAN SAR (W/kg)	Plot No	Max. WLAN SAR (W/kg)			
Front	GSM850	1	0.726	65	0.105	0.83		
	GSM1900	36	0.554	65	0.105	0.66		
	WCDMA Band V	12	0.502	65	0.105	0.61		
	WCDMA Band II	17	0.845	65	0.105	0.95		
Back	GSM850	7	1.378	66	0.102	1.48		
	GSM1900	37	1.199	66	0.102	1.30		
	WCDMA Band V	13	0.706	66	0.102	0.81		
	WCDMA Band II	34	1.367	66	0.102	1.47		
Left Side	GSM850	3	0.587	67	0.068	0.66		
	GSM1900	38	0.213	67	0.068	0.28		
	WCDMA Band V	14	0.395	67	0.068	0.46		
	WCDMA Band II	19	0.391	67	0.068	0.46		
Right Side	GSM850	4	0.710			0.71		
	GSM1900	39	0.127			0.13		
	WCDMA Band V	15	0.538			0.54		
	WCDMA Band II	20	0.201			0.20		
Top Side	GSM850			68	0.074	0.07		
	GSM1900			68	0.074	0.07		
	WCDMA Band V			68	0.074	0.07		
	WCDMA Band II			68	0.074	0.07		
Bottom Side	GSM850	5	0.120			0.12		
	GSM1900	40	0.738			0.74		
	WCDMA Band V	16	0.107			0.11		
	WCDMA Band II	21	0.755			0.76		

Position	WWAN-PCE			Bluetooth-DSS	WWAN + Bluetooth SAR (W/kg)	SPLSR ≤ 0.04	Case No
	WWAN Band	Plot No	Max. WWAN SAR (W/kg)	Estimated SAR (W/kg)			
Front	GSM850	1	0.726	0.084	0.81		
	GSM1900	36	0.554	0.084	0.64		
	WCDMA Band V	12	0.502	0.084	0.59		
	WCDMA Band II	17	0.845	0.084	0.93		
Back	GSM850	7	1.378	0.084	1.46		
	GSM1900	37	1.199	0.084	1.28		
	WCDMA Band V	13	0.706	0.084	0.79		
	WCDMA Band II	34	1.367	0.084	1.45		
Left Side	GSM850	3	0.587	0.084	0.67		
	GSM1900	38	0.213	0.084	0.30		
	WCDMA Band V	14	0.395	0.084	0.48		
	WCDMA Band II	19	0.391	0.084	0.48		
Right Side	GSM850	4	0.71	0.084	0.79		
	GSM1900	39	0.127	0.084	0.21		
	WCDMA Band V	15	0.538	0.084	0.62		
	WCDMA Band II	20	0.201	0.084	0.29		
Top Side	GSM850			0.084	0.08		
	GSM1900			0.084	0.08		
	WCDMA Band V			0.084	0.08		
	WCDMA Band II			0.084	0.08		
Bottom Side	GSM850	5	0.120	0.084	0.20		
	GSM1900	40	0.738	0.084	0.82		
	WCDMA Band V	16	0.107	0.084	0.19		
	WCDMA Band II	21	0.755	0.084	0.84		

<Body-worn SAR>

Position	WWAN-PCE			WLAN 2.4GHz-DTS		WWAN + WLAN SAR (W/kg)	SPLSR ≤ 0.04	Case No
	WWAN Band	Plot No	Max. WWAN SAR (W/kg)	Plot No	Max. WLAN SAR (W/kg)			
Front	GSM850			65	0.105	0.11		
	GSM1900			65	0.105	0.11		
	WCDMA Band V	12	0.502	65	0.105	0.61		
	WCDMA Band II	17	0.845	65	0.105	0.95		
Back	GSM850	10	0.944	66	0.102	1.05		
	GSM1900	43	0.722	66	0.102	0.82		
	WCDMA Band V	13	0.706	66	0.102	0.81		
	WCDMA Band II	34	1.367	66	0.102	1.47		
Back (with Headset)	GSM850			69	0.082	0.08		
	GSM1900			69	0.082	0.08		
	WCDMA Band V			69	0.082	0.08		
	WCDMA Band II	27	1.337	69	0.082	1.42		

Position	WWAN-PCE			Bluetooth-DSS		SPLSR ≤ 0.04	Case No
	WWAN Band	Plot No	Max. WWAN SAR (W/kg)	Estimated SAR (W/kg)	WWAN + Bluetooth SAR (W/kg)		
Front	GSM850			0.084	0.08		
	GSM1900			0.084	0.08		
	WCDMA Band V	12	0.502	0.084	0.59		
	WCDMA Band II	17	0.845	0.084	0.93		
Back	GSM850	10	0.944	0.084	1.03		
	GSM1900	43	0.722	0.084	0.81		
	WCDMA Band V	13	0.706	0.084	0.79		
	WCDMA Band II	34	1.367	0.084	1.45		
Back (with Headset)	GSM850			0.084	0.08		
	GSM1900			0.084	0.08		
	WCDMA Band V			0.084	0.08		
	WCDMA Band II	27	1.337	0.084	1.42		

Test Engineer : Jeme Li and Krin Wu

13. Uncertainty Assessment

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience, and knowledge of the behavior and properties of relevant materials and instruments, manufacture's specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in Table 12.1

Uncertainty Distributions	Normal	Rectangular	Triangular	U-Shape
Multi-plying Factor ^(a)	$1/k^{(b)}$	$1/\sqrt{3}$	$1/\sqrt{6}$	$1/\sqrt{2}$

(a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

(b) k is the coverage factor

Table 12.1 Standard Uncertainty for Assumed Distribution

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual "root-sum-squares" (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is shown in the following tables.

Error Description	Uncertainty	Probability	Divisor	Ci	Ci	Standard	Standard
	Value	Distribution		(1g)	(10g)	Uncertainty	Uncertainty
	(±%)					(1g)	(10g)
Measurement System							
Probe Calibration	6.0	Normal	1	1	1	± 6.0 %	± 6.0 %
Axial Isotropy	4.7	Rectangular	√3	0.7	0.7	± 1.9 %	± 1.9 %
Hemispherical Isotropy	9.6	Rectangular	√3	0.7	0.7	± 3.9 %	± 3.9 %
Boundary Effects	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Linearity	4.7	Rectangular	√3	1	1	± 2.7 %	± 2.7 %
System Detection Limits	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Readout Electronics	0.3	Normal	1	1	1	± 0.3 %	± 0.3 %
Response Time	0.8	Rectangular	√3	1	1	± 0.5 %	± 0.5 %
Integration Time	2.6	Rectangular	√3	1	1	± 1.5 %	± 1.5 %
RF Ambient Noise	3.0	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
RF Ambient Reflections	3.0	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
Probe Positioner	0.4	Rectangular	√3	1	1	± 0.2 %	± 0.2 %
Probe Positioning	2.9	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
Max. SAR Eval.	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Test Sample Related							
Device Positioning	2.9	Normal	1	1	1	± 2.9 %	± 2.9 %
Device Holder	3.6	Normal	1	1	1	± 3.6 %	± 3.6 %
Power Drift	5.0	Rectangular	√3	1	1	± 2.9 %	± 2.9 %
Phantom and Setup							
Phantom Uncertainty	4.0	Rectangular	√3	1	1	± 2.3 %	± 2.3 %
Liquid Conductivity (Target)	5.0	Rectangular	√3	0.64	0.43	± 1.8 %	± 1.2 %
Liquid Conductivity (Meas.)	2.5	Normal	1	0.64	0.43	± 1.6 %	± 1.1 %
Liquid Permittivity (Target)	5.0	Rectangular	√3	0.6	0.49	± 1.7 %	± 1.4 %
Liquid Permittivity (Meas.)	2.5	Normal	1	0.6	0.49	± 1.5 %	± 1.2 %
Combined Standard Uncertainty						± 11.0 %	± 10.8 %
Coverage Factor for 95 %						K=2	
Expanded Uncertainty						± 22.0 %	± 21.5 %

Table 12.2 Uncertainty Budget of DASY for frequency range 300 MHz to 3 GHz from IEEE Std 1528™-2003

14. References

- [1] FCC 47 CFR Part 2 “Frequency Allocations and Radio Treaty Matters; General Rules and Regulations”
- [2] ANSI/IEEE Std. C95.1-1992, “IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz”, September 1992
- [3] IEEE Std. 1528-2003, “Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques”, December 2003
- [4] FCC OET Bulletin 65 (Edition 97-01) Supplement C (Edition 01-01), “Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields”, June 2001
- [5] SPEAG DASY System Handbook
- [6] FCC KDB 248227 D01 v01r02, “SAR Measurement Procedures for 802.11 a/b/g Transmitters”, May 2007
- [7] FCC KDB 447498 D01 v05, “Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies”, October 2012
- [8] FCC KDB 648474 D04 v01, “SAR Evaluation Considerations for Handsets with Multiple Transmitters and Antennas”, October 2012
- [9] FCC KDB 941225 D01 v02, “SAR Measurement Procedures for 3G Devices – CDMA 2000 / Ev-Do / WCDMA / HSDPA / HSPA”, October 2007
- [10] FCC KDB 941225 D03 v01, “Recommended SAR Test Reduction Procedures for GSM / GPRS / EDGE”, December 2008
- [11] FCC KDB 865664 D01 v01, “SAR Measurement Requirements for 100MHz to 6 GHz”, October 2012
- [12] FCC KDB 941225 D06 v01, “SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities”, April 2011



Appendix A. Plots of System Performance Check

The plots are shown as follows.

System Check_Head_835MHz_130325**DUT: D835V2-SN:4d091**

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL_835_130325 Medium parameters used: $f = 835$ MHz; $\sigma = 0.918$ mho/m; $\epsilon_r = 41.297$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 21.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.56, 9.56, 9.56); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 3.17 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 59.796 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 3.757 mW/g

SAR(1 g) = 2.49 mW/g; SAR(10 g) = 1.63 mW/g

Maximum value of SAR (measured) = 3.17 W/kg

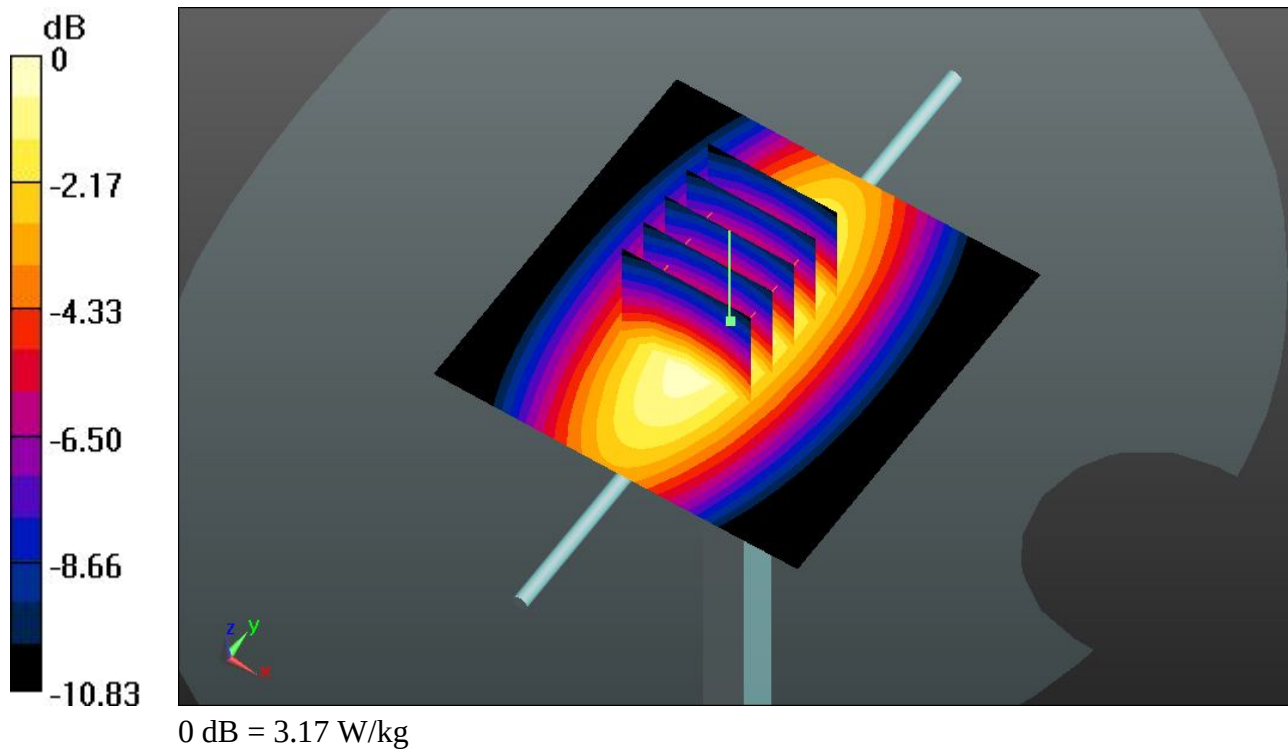

System Check_Head_1900MHz_130325**DUT: D1900V2-SN:5d118**

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL_1900_130325 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.417$ mho/m; $\epsilon_r =$

39.706 ; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 21.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.84, 7.84, 7.84); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 14.4 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 101.6 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 18.625 mW/g

SAR(1 g) = 9.99 mW/g; SAR(10 g) = 5.13 mW/g

Maximum value of SAR (measured) = 14.0 W/kg

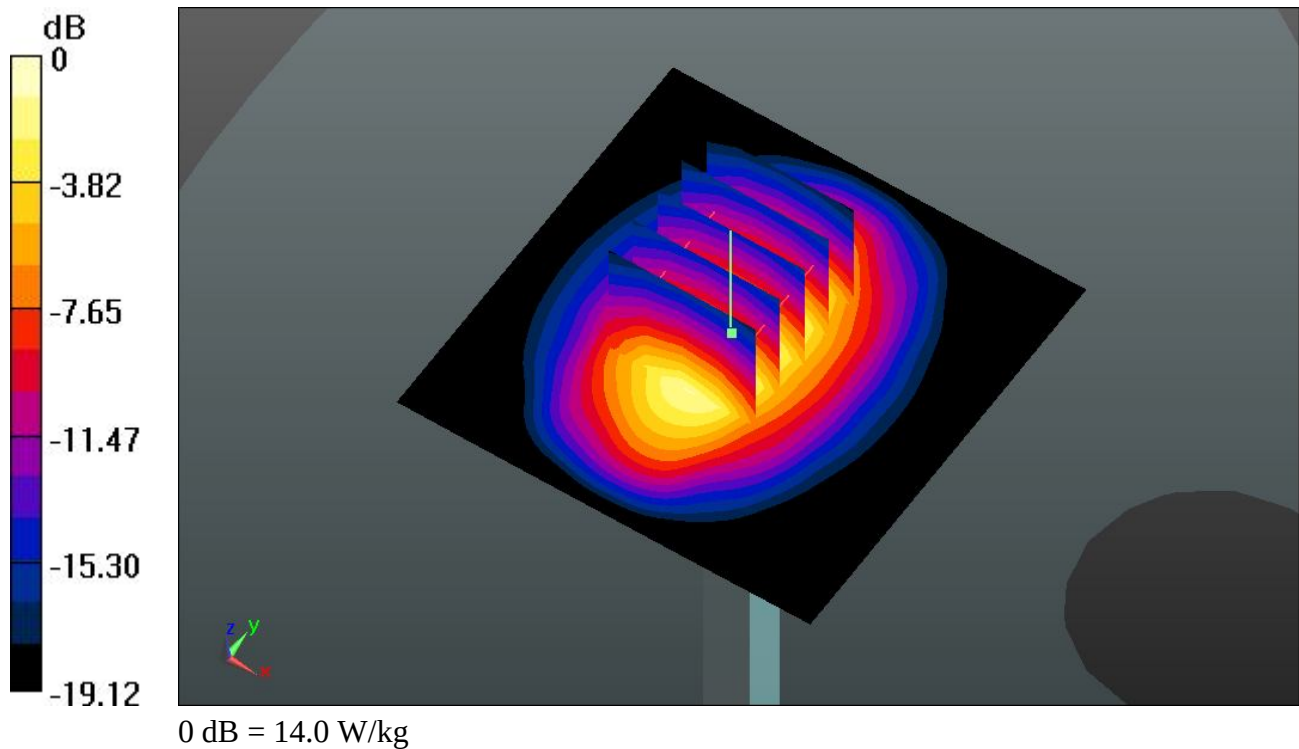

System Check_Head_2450MHz_130325**DUT: D2450V2-SN:736**

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: HSL_2450_130325 Medium parameters used: $f = 2450$ MHz; $\sigma = 1.856$ mho/m; $\epsilon_r =$

37.685; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 21.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(6.99, 6.99, 6.99); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Pin=250mW/Area Scan (81x81x1): Interpolated grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 21.9 W/kg


Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 93.333 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 30.492 mW/g

SAR(1 g) = 14.2 mW/g; SAR(10 g) = 6.46 mW/g

Maximum value of SAR (measured) = 22.2 W/kg

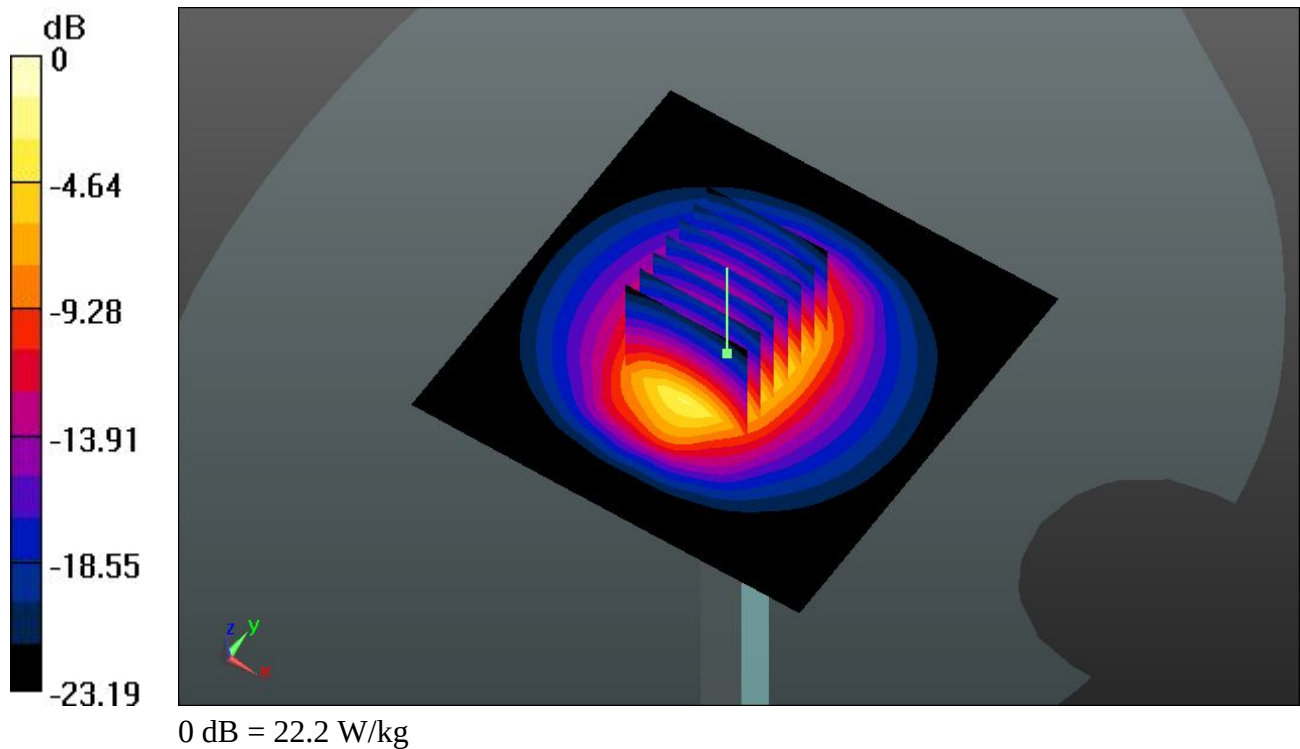

System Check_Body_835MHz_130322**DUT: D835V2-SN:4d091**

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: MSL_835_130322 Medium parameters used: $f = 835$ MHz; $\sigma = 0.977$ mho/m; $\epsilon_r = 54.395$;

$\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.5, 9.5, 9.5); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 2.74 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 52.908 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 3.743 mW/g

SAR(1 g) = 2.51 mW/g; SAR(10 g) = 1.68 mW/g

Maximum value of SAR (measured) = 2.73 W/kg

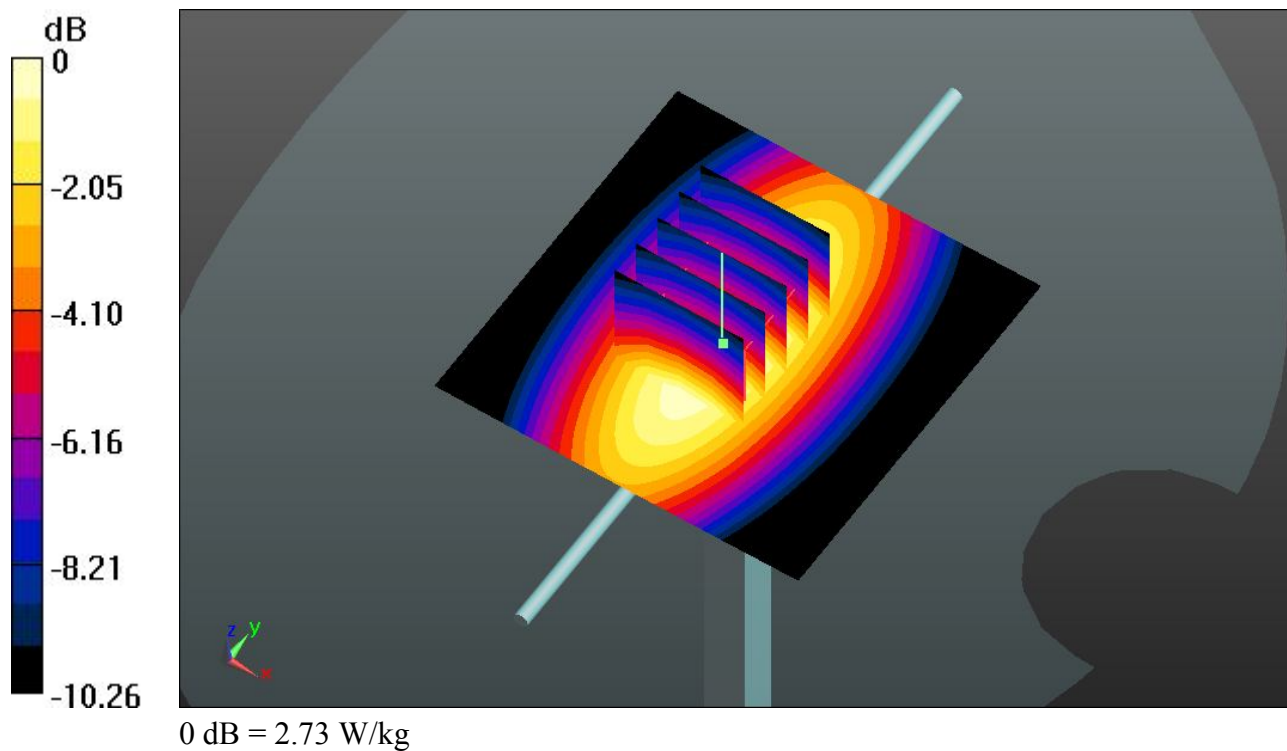

System Check_Body_1900MHz_130324**DUT: D1900V2-SN:5d118**

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: MSL_1900_130324 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.528$ mho/m; $\epsilon_r =$

54.867 ; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C ; Liquid Temperature : 21.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.67, 7.67, 7.67); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 14.8 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 86.965 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 18.801 mW/g

SAR(1 g) = 10.4 mW/g; SAR(10 g) = 5.38 mW/g

Maximum value of SAR (measured) = 14.9 W/kg

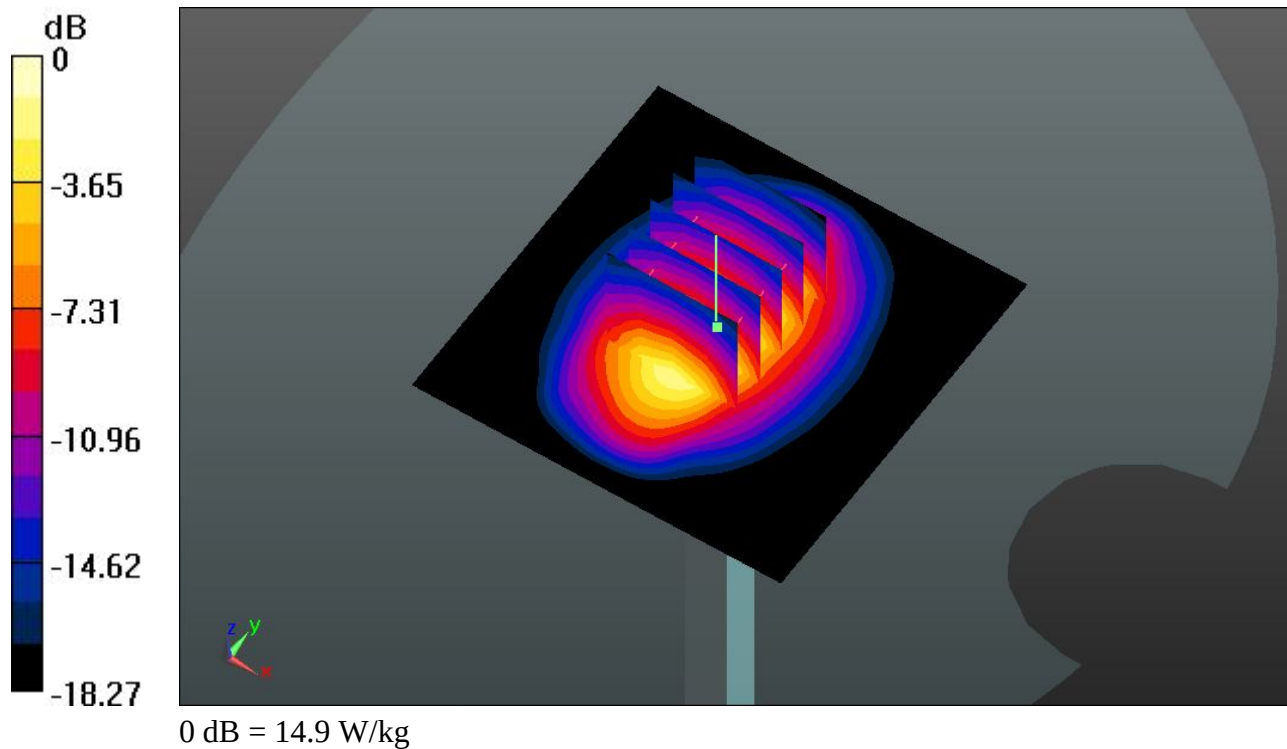

System Check_Body_2450MHz_130325**DUT: D2450V2-SN:736**

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: MSL_2450_130325 Medium parameters used: $f = 2450$ MHz; $\sigma = 1.976$ mho/m; $\epsilon_r = 54.13$;

$\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.21, 7.21, 7.21); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Pin=250mW/Area Scan (81x81x1): Interpolated grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 20.9 W/kg


Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 87.992 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 28.574 mW/g

SAR(1 g) = 13.6 mW/g; SAR(10 g) = 6.22 mW/g

Maximum value of SAR (measured) = 20.9 W/kg

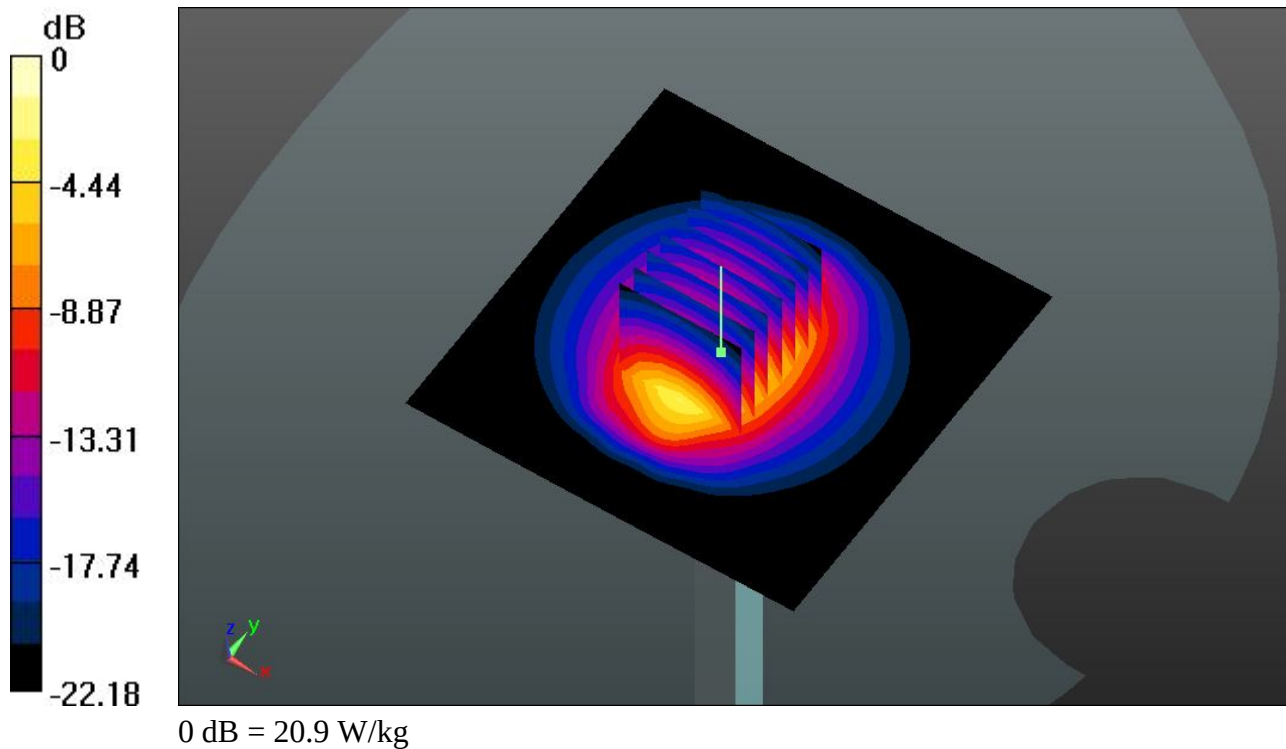



Appendix B. Plots of SAR Measurement

The plots are shown as follows.

45 GSM850_GSM Voice_Right Cheek_Ch128**DUT: 330701**

Communication System: Generic GSM; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium: HSL_835_130325 Medium parameters used: $f = 824.2$ MHz; $\sigma = 0.907$ mho/m; $\epsilon_r = 41.431$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 21.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.56, 9.56, 9.56); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch128/Area Scan (71x121x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.304 W/kg


Ch128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.733 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.335 mW/g

SAR(1 g) = 0.271 mW/g; SAR(10 g) = 0.209 mW/g

Maximum value of SAR (measured) = 0.305 W/kg

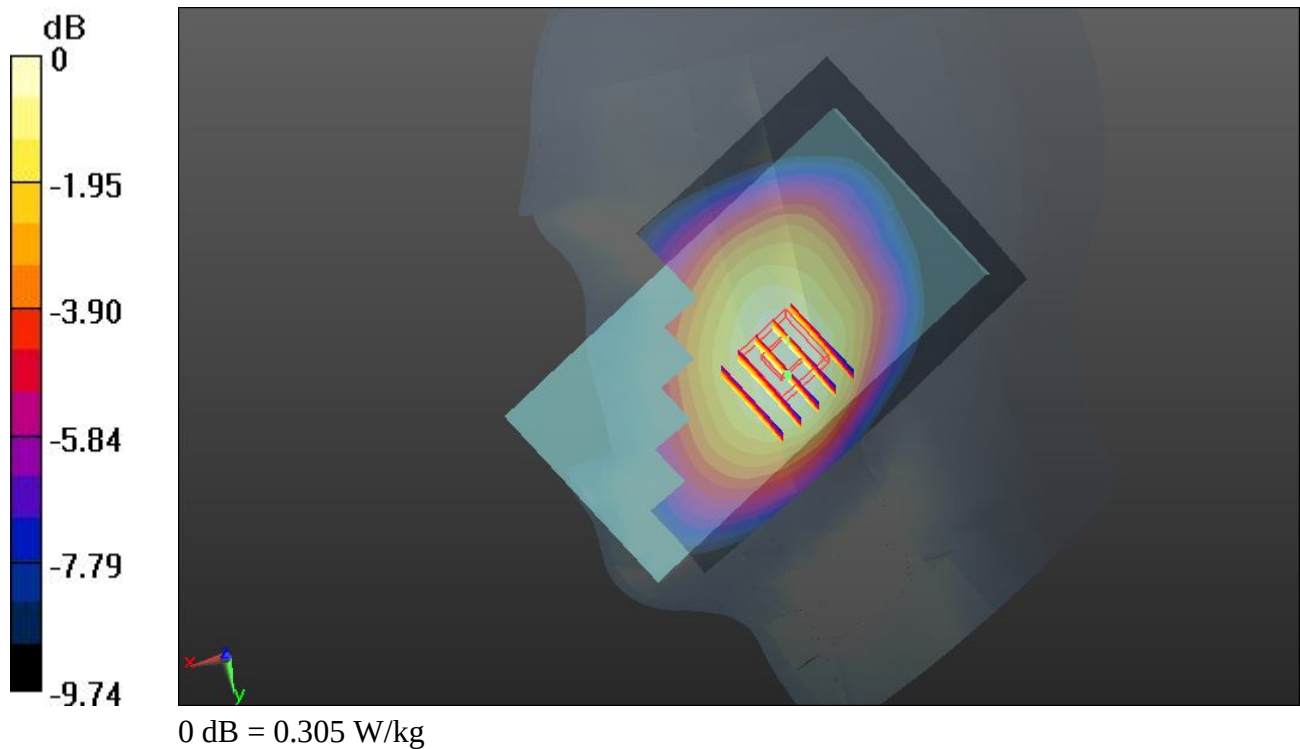

46 GSM850_GSM Voice_Right Tilted_Ch128**DUT: 330701**

Communication System: Generic GSM; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium: HSL_835_130325 Medium parameters used: $f = 824.2$ MHz; $\sigma = 0.907$ mho/m; $\epsilon_r = 41.431$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 21.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.56, 9.56, 9.56); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch128/Area Scan (71x121x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.186 W/kg


Ch128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.677 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.206 mW/g

SAR(1 g) = 0.168 mW/g; SAR(10 g) = 0.132 mW/g

Maximum value of SAR (measured) = 0.189 W/kg

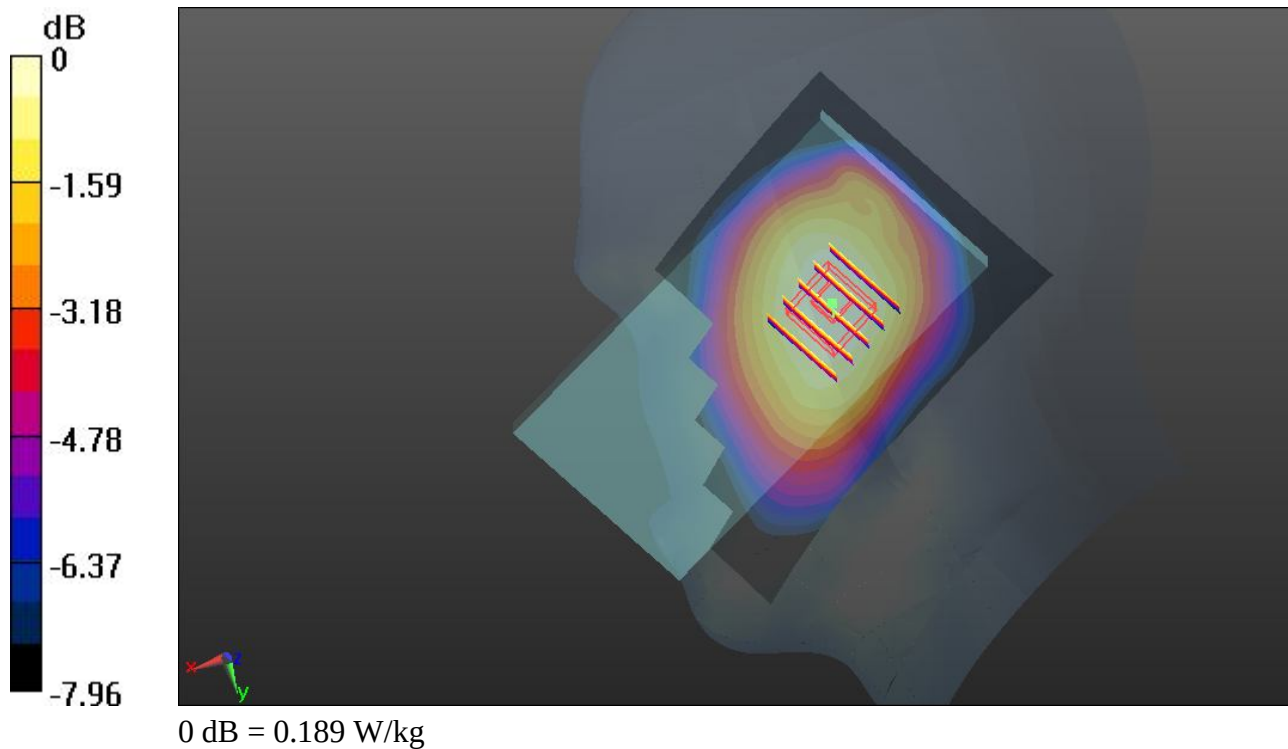

47 GSM850_GSM Voice_Left Cheek_Ch128**DUT: 330701**

Communication System: Generic GSM; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium: HSL_835_130325 Medium parameters used: $f = 824.2$ MHz; $\sigma = 0.907$ mho/m; $\epsilon_r = 41.431$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 21.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.56, 9.56, 9.56); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch128/Area Scan (71x121x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.285 W/kg


Ch128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.155 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.308 mW/g

SAR(1 g) = 0.253 mW/g; SAR(10 g) = 0.199 mW/g

Maximum value of SAR (measured) = 0.286 W/kg

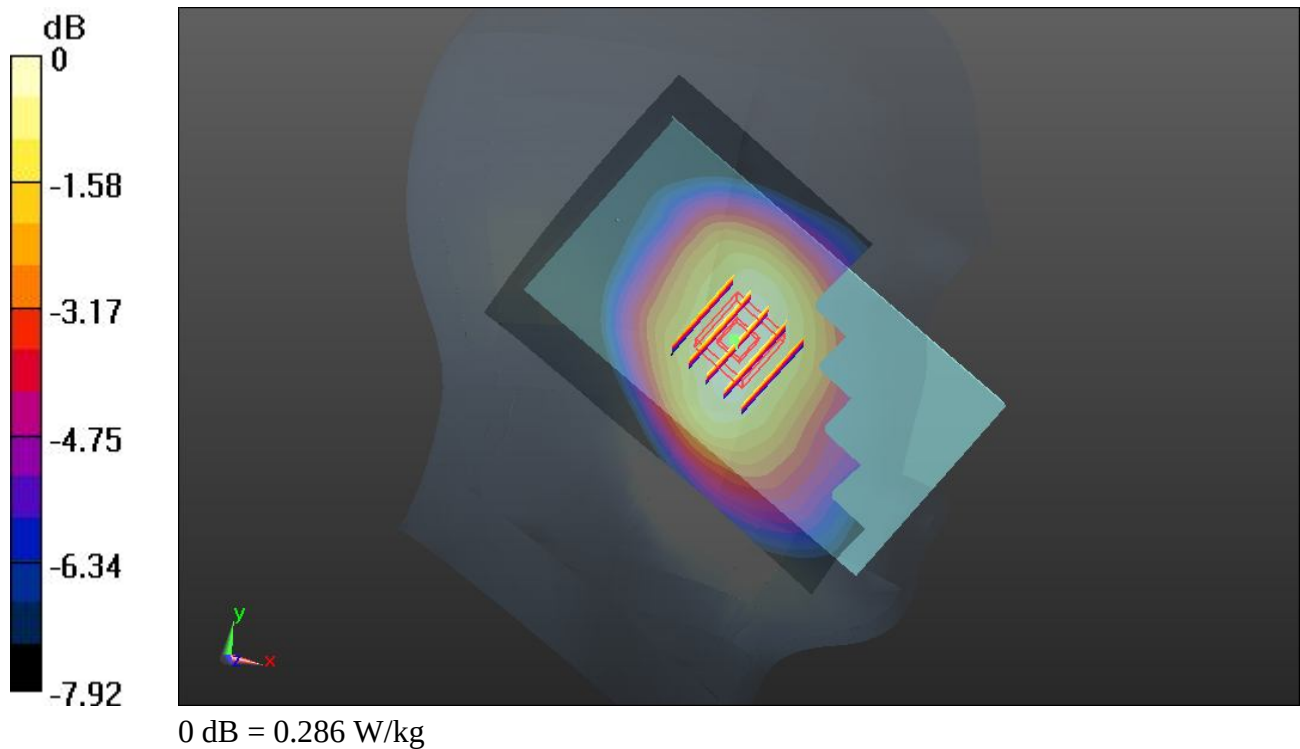

48 GSM850_GSM Voice_Left Tilted_Ch128**DUT: 330701**

Communication System: Generic GSM; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium: HSL_835_130325 Medium parameters used: $f = 824.2$ MHz; $\sigma = 0.907$ mho/m; $\epsilon_r = 41.431$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 21.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.56, 9.56, 9.56); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch128/Area Scan (71x121x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.197 W/kg


Ch128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.084 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.214 mW/g

SAR(1 g) = 0.175 mW/g; SAR(10 g) = 0.136 mW/g

Maximum value of SAR (measured) = 0.197 W/kg

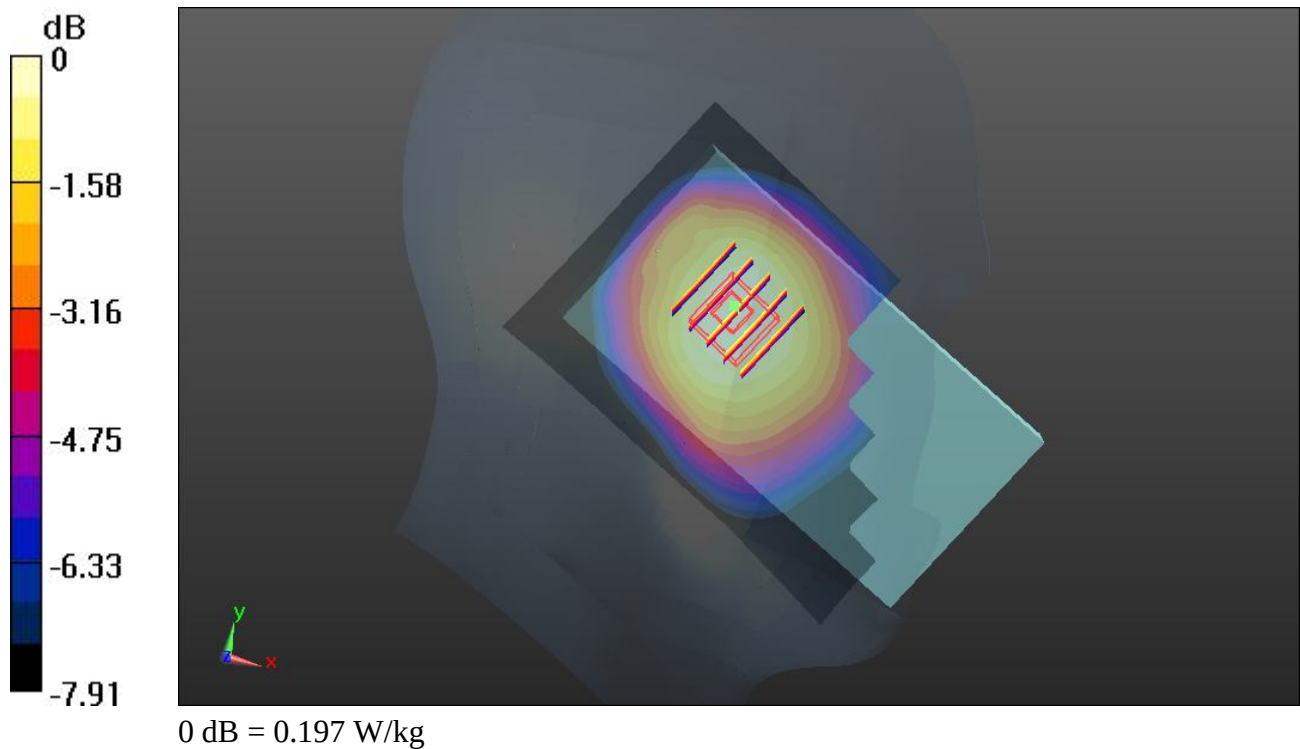

57 GSM1900_GSM Voice_Right Cheek_Ch810**DUT: 330701**

Communication System: Generic GSM; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: HSL_1900_130325 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.426$ mho/m; $\epsilon_r = 39.668$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 21.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.84, 7.84, 7.84); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch810/Area Scan (71x121x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0957 W/kg

Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.209 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.110 mW/g

SAR(1 g) = 0.074 mW/g; SAR(10 g) = 0.045 mW/g

Maximum value of SAR (measured) = 0.0930 W/kg


Ch810/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.209 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.102 mW/g

SAR(1 g) = 0.065 mW/g; SAR(10 g) = 0.041 mW/g

Maximum value of SAR (measured) = 0.0818 W/kg

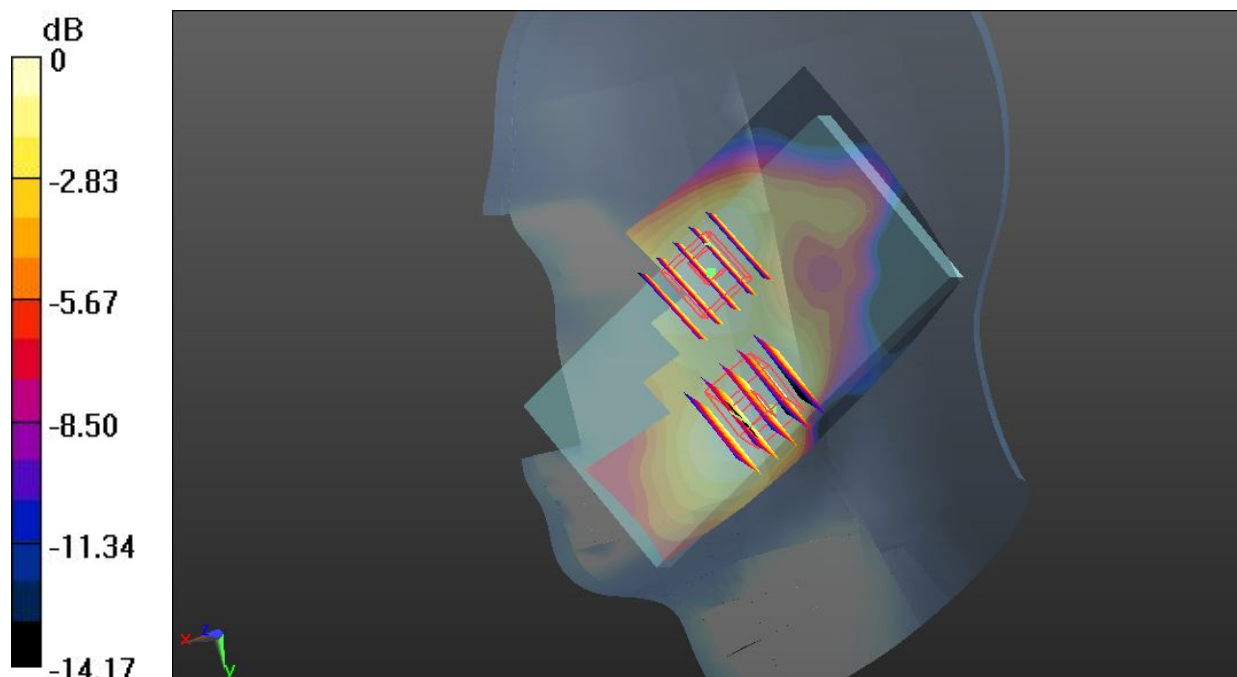

0 dB = 0.0818 W/kg

58 GSM1900_GSM Voice_Right Tilted_Ch810**DUT: 330701**

Communication System: Generic GSM; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: HSL_1900_130325 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.426$ mho/m; $\epsilon_r =$

39.668; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 21.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.84, 7.84, 7.84); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch810/Area Scan (71x121x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0680 W/kg


Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.118 V/m; Power Drift = 0.18 dB

Peak SAR (extrapolated) = 0.087 mW/g

SAR(1 g) = 0.053 mW/g; SAR(10 g) = 0.030 mW/g

Maximum value of SAR (measured) = 0.0703 W/kg

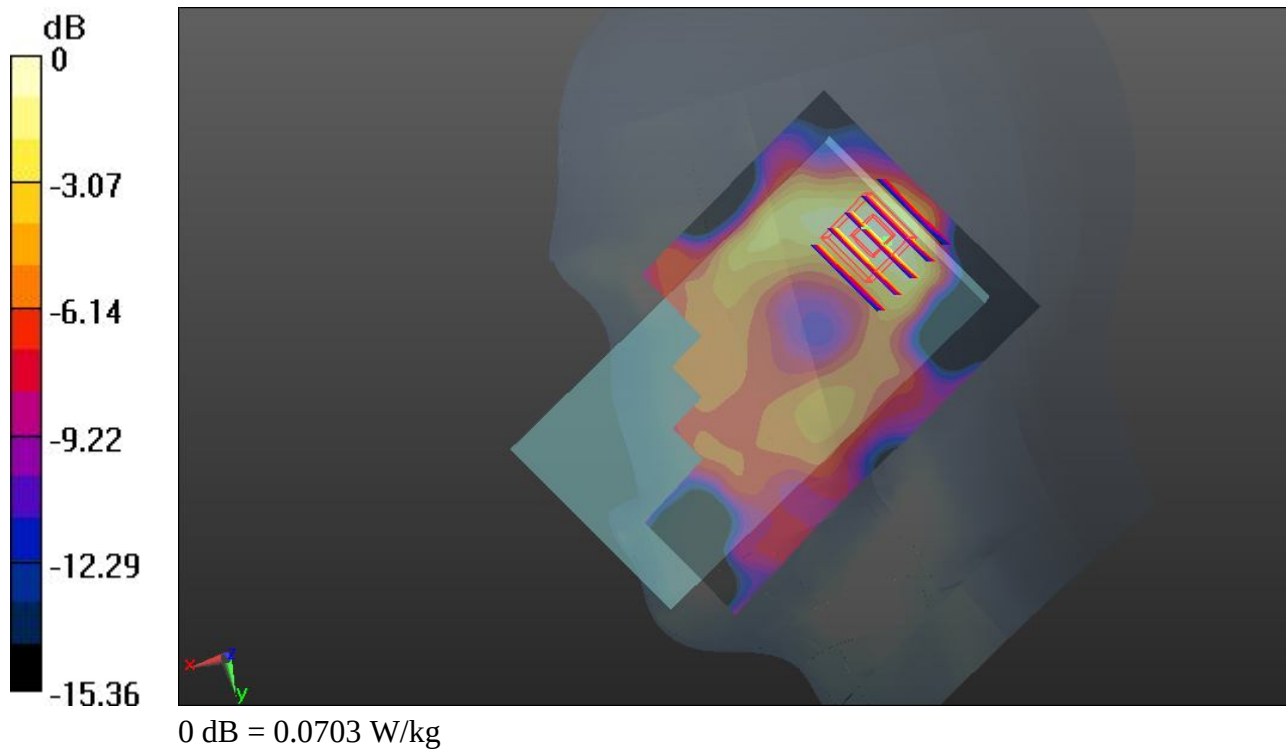

59 GSM1900_GSM Voice_Left Cheek_Ch810**DUT: 330701**

Communication System: Generic GSM; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: HSL_1900_130325 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.426$ mho/m; $\epsilon_r =$

39.668; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 21.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.84, 7.84, 7.84); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch810/Area Scan (71x121x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.155 W/kg


Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.563 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.184 mW/g

SAR(1 g) = 0.118 mW/g; SAR(10 g) = 0.073 mW/g

Maximum value of SAR (measured) = 0.153 W/kg

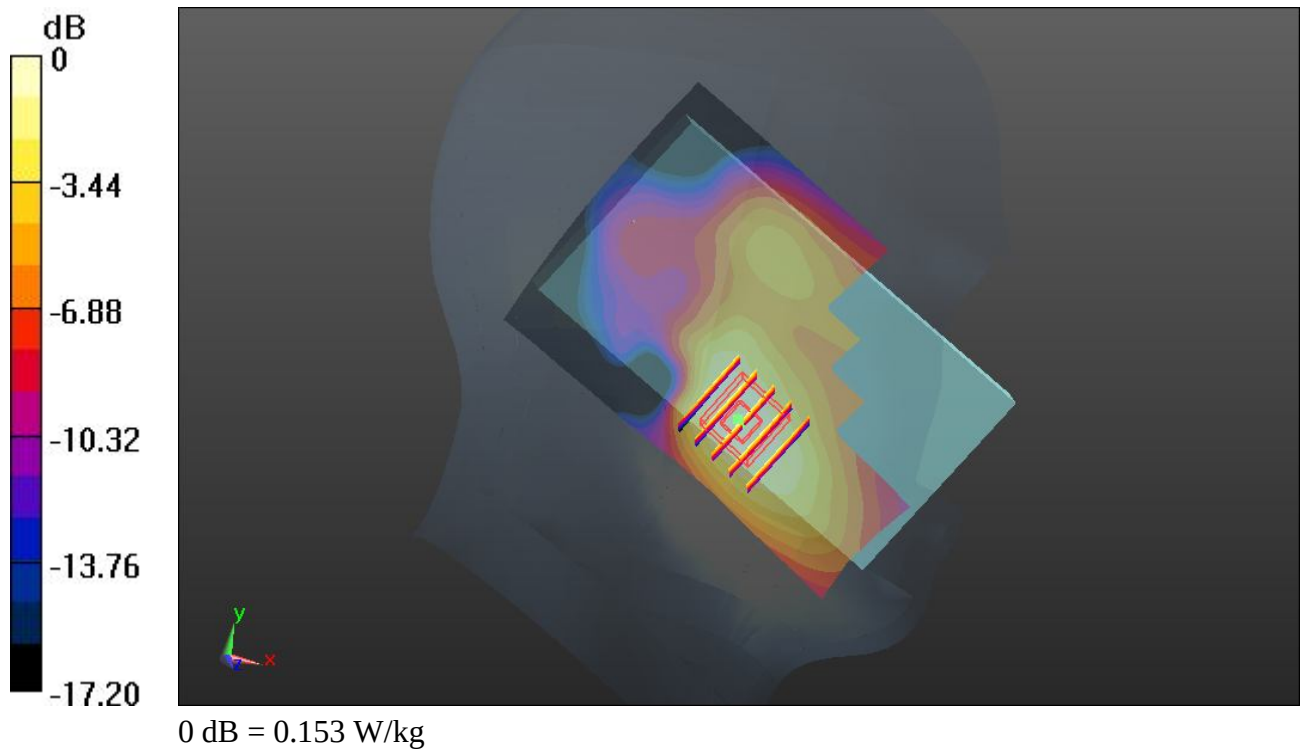

60 GSM1900_GSM Voice_Left Tilted_Ch810**DUT: 330701**

Communication System: Generic GSM; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: HSL_1900_130325 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.426$ mho/m; $\epsilon_r =$

39.668; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 21.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.84, 7.84, 7.84); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch810/Area Scan (71x121x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.109 W/kg


Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 7.368 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.090 mW/g

SAR(1 g) = 0.056 mW/g; SAR(10 g) = 0.032 mW/g

Maximum value of SAR (measured) = 0.0724 W/kg

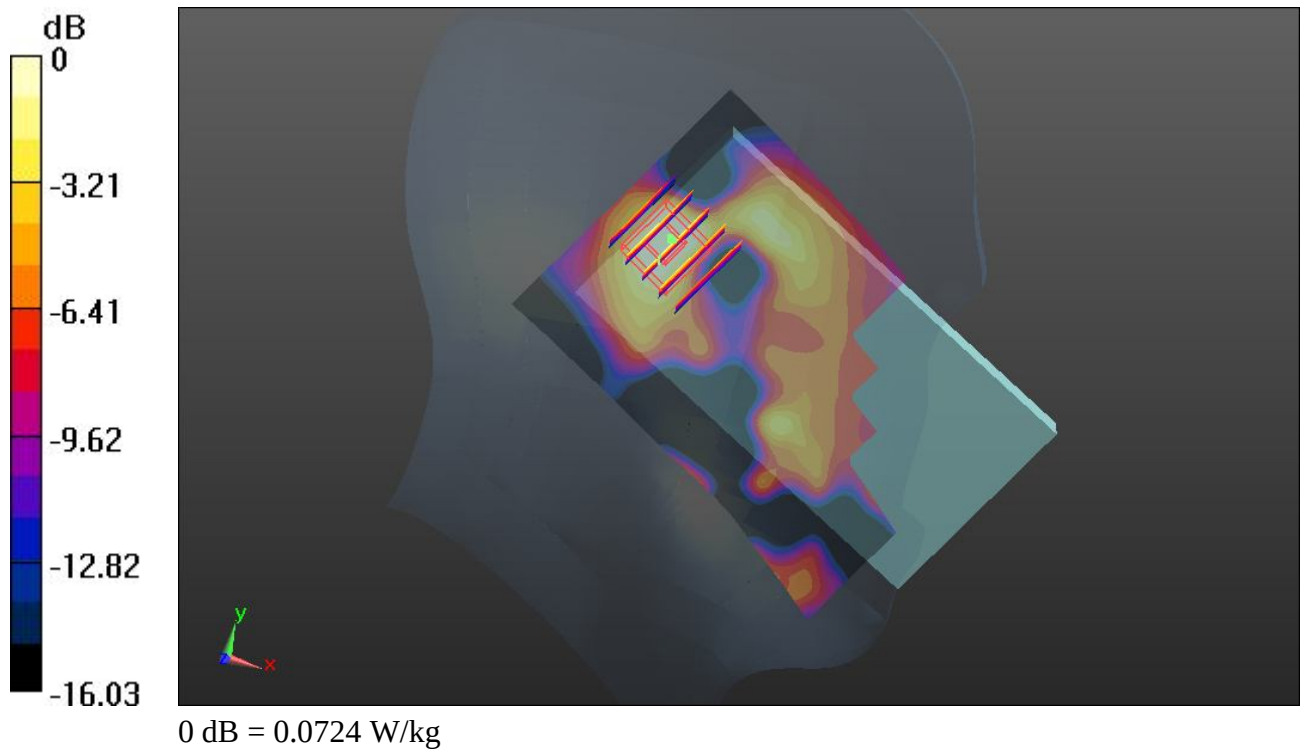

49 WCDMA V_RMC 12.2K_Right Cheek_Ch4182**DUT: 330701**

Communication System: UMTS; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL_835_130325 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.919$ mho/m; $\epsilon_r = 41.281$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 21.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.56, 9.56, 9.56); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch4182/Area Scan (71x121x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.337 W/kg


Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.622 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.376 mW/g

SAR(1 g) = 0.302 mW/g; SAR(10 g) = 0.232 mW/g

Maximum value of SAR (measured) = 0.342 W/kg

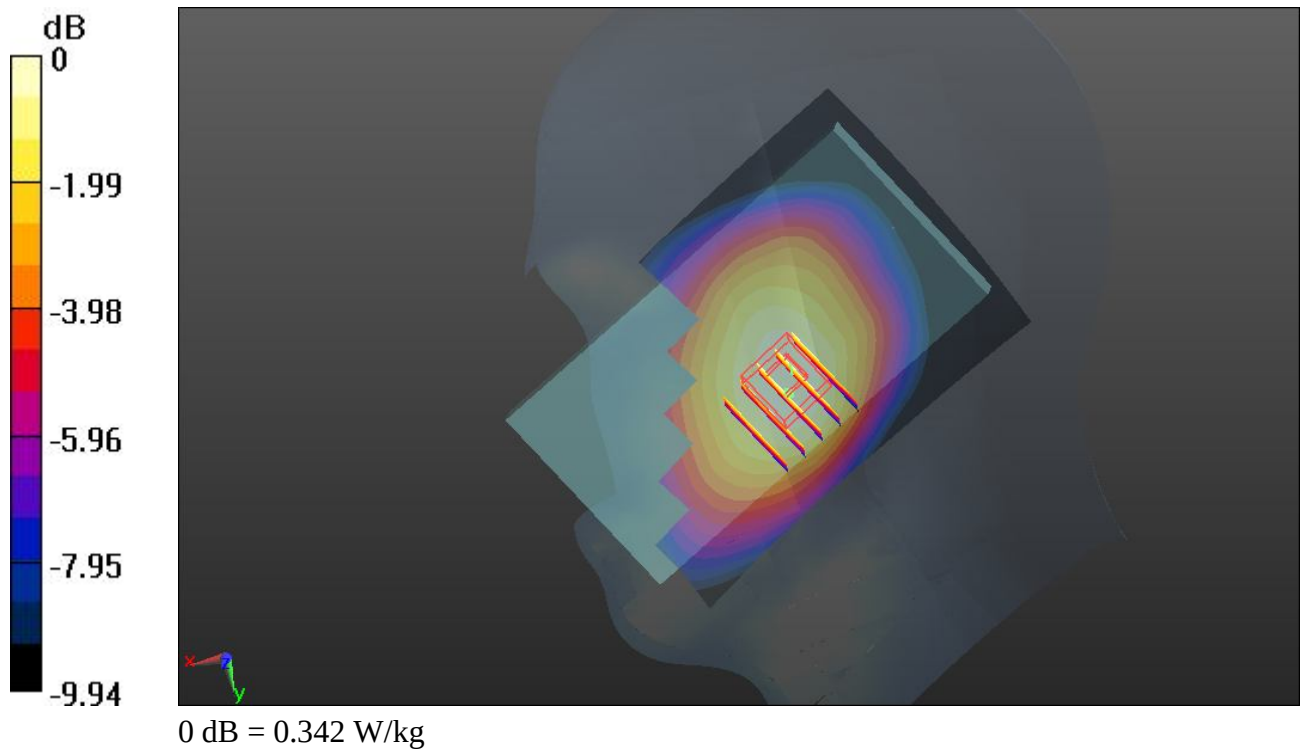

50 WCDMA V_RMC 12.2K_Right Tilted_Ch4182**DUT: 330701**

Communication System: UMTS; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL_835_130325 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.919$ mho/m; $\epsilon_r = 41.281$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 21.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.56, 9.56, 9.56); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch4182/Area Scan (71x121x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.207 W/kg


Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.444 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.227 mW/g

SAR(1 g) = 0.184 mW/g; SAR(10 g) = 0.144 mW/g

Maximum value of SAR (measured) = 0.208 W/kg

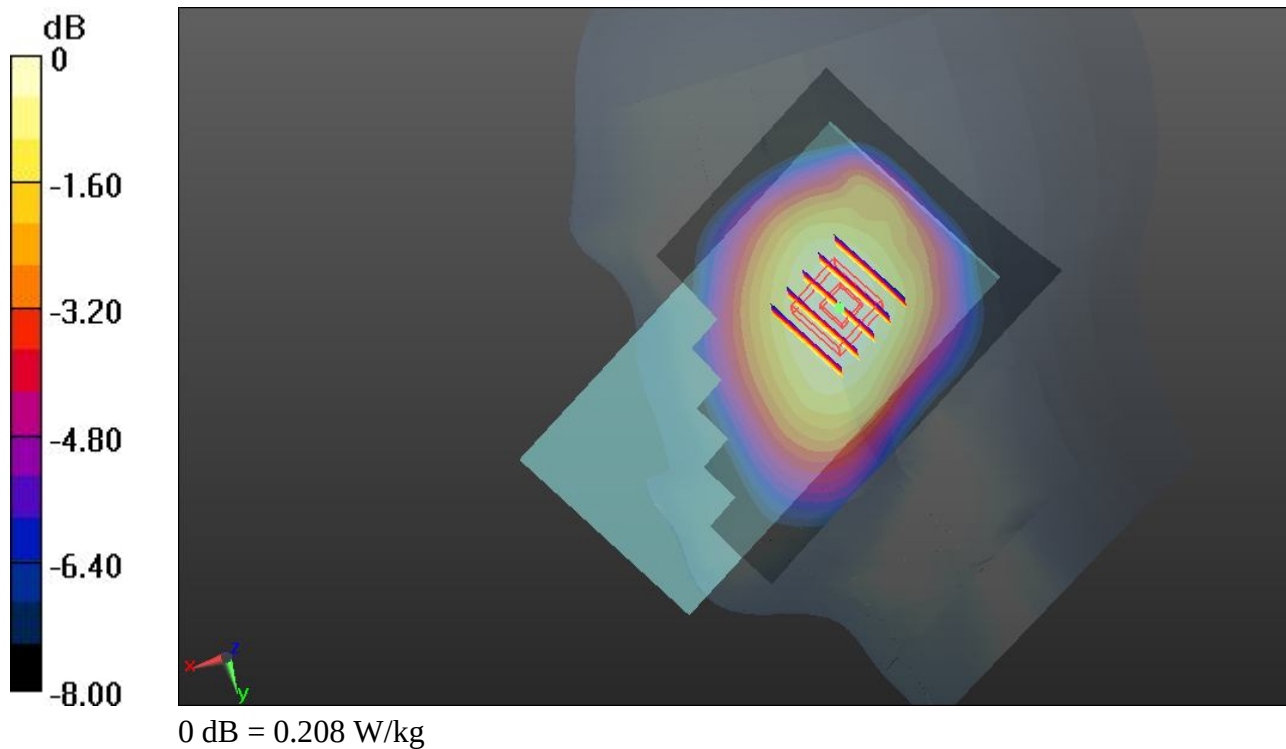

51 WCDMA V_RMC 12.2K_Left Cheek_Ch4182**DUT: 330701**

Communication System: UMTS; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL_835_130325 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.919$ mho/m; $\epsilon_r = 41.281$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 21.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.56, 9.56, 9.56); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch4182/Area Scan (71x121x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.294 W/kg


Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.523 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.328 mW/g

SAR(1 g) = 0.266 mW/g; SAR(10 g) = 0.209 mW/g

Maximum value of SAR (measured) = 0.303 W/kg

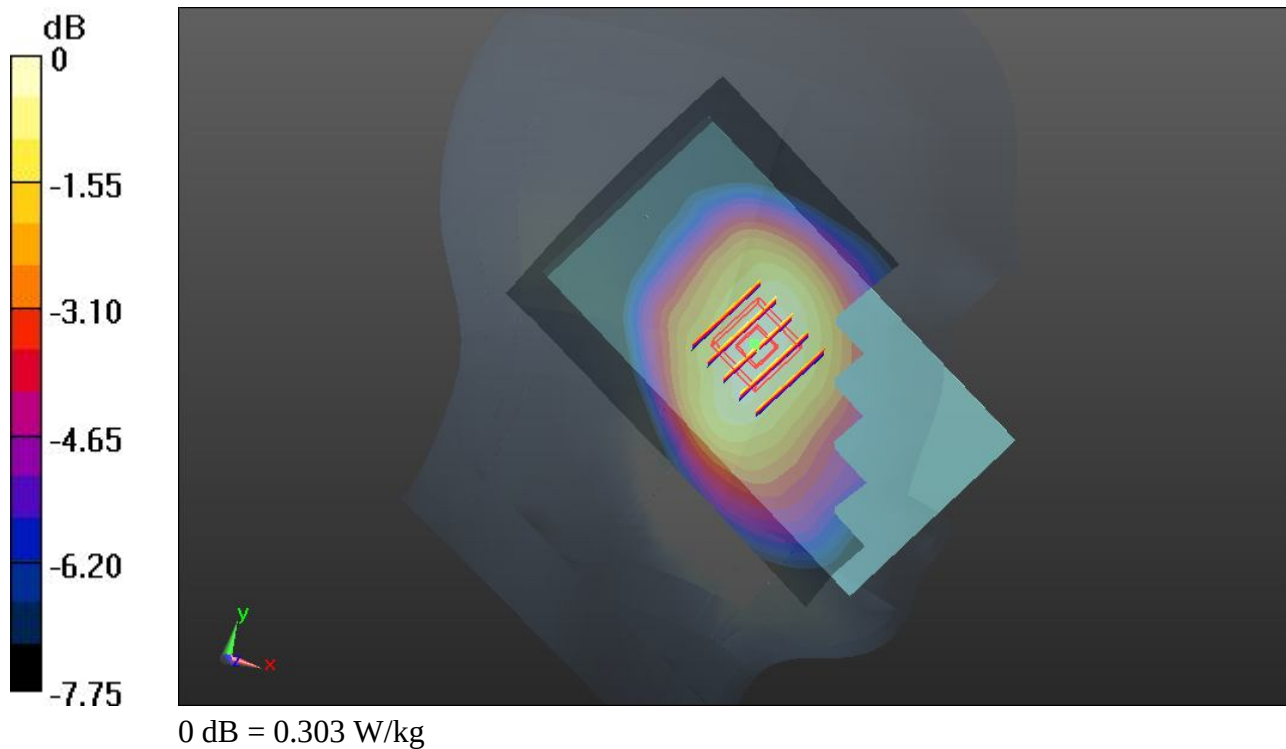

52 WCDMA V_RMC 12.2K_Left Tilted_Ch4182**DUT: 330701**

Communication System: UMTS; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL_835_130325 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.919$ mho/m; $\epsilon_r = 41.281$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 21.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.56, 9.56, 9.56); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch4182/Area Scan (71x121x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.217 W/kg


Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.699 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.233 mW/g

SAR(1 g) = 0.188 mW/g; SAR(10 g) = 0.146 mW/g

Maximum value of SAR (measured) = 0.213 W/kg

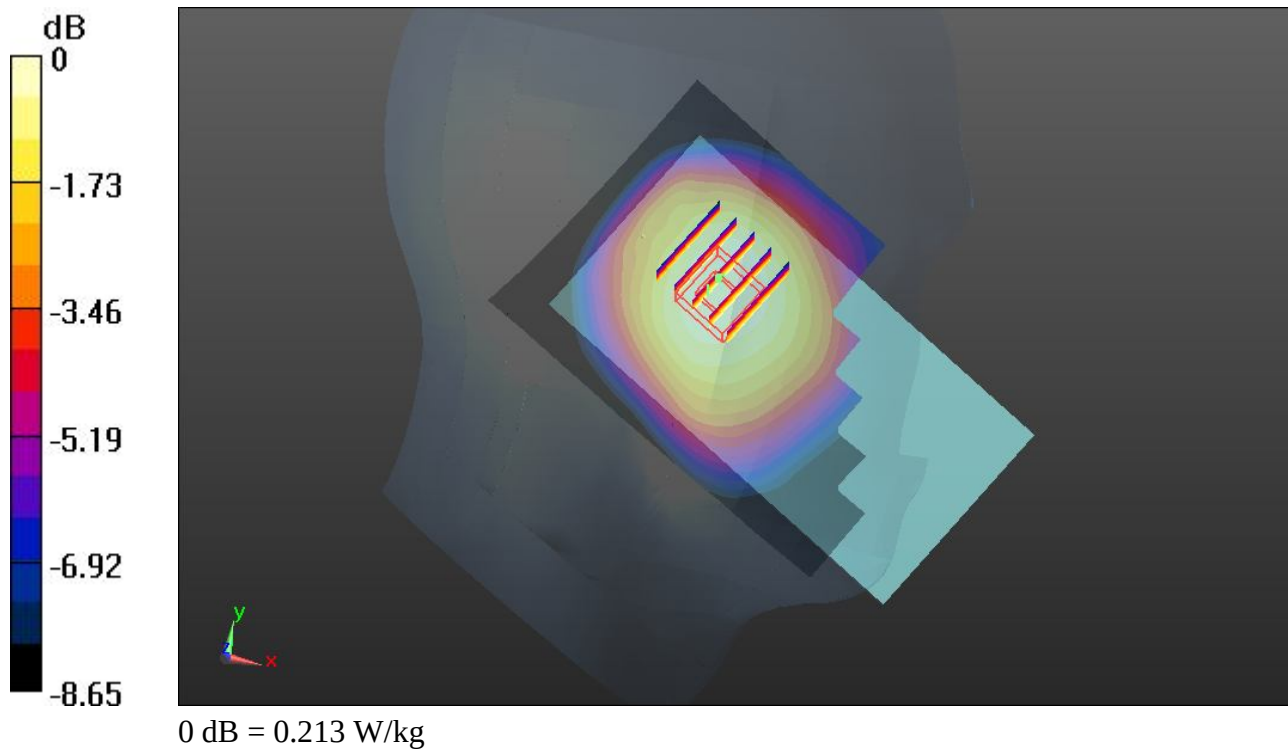

53 WCDMA II_RMC 12.2K_Right Cheek_Ch9262**DUT: 330701**

Communication System: UMTS; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: HSL_1900_130325 Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.373$ mho/m; $\epsilon_r = 39.868$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 21.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.84, 7.84, 7.84); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch9262/Area Scan (71x121x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.277 W/kg

Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.575 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.331 mW/g

SAR(1 g) = 0.222 mW/g; SAR(10 g) = 0.142 mW/g

Maximum value of SAR (measured) = 0.281 W/kg


Ch9262/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.575 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.245 mW/g

SAR(1 g) = 0.163 mW/g; SAR(10 g) = 0.106 mW/g

Maximum value of SAR (measured) = 0.198 W/kg

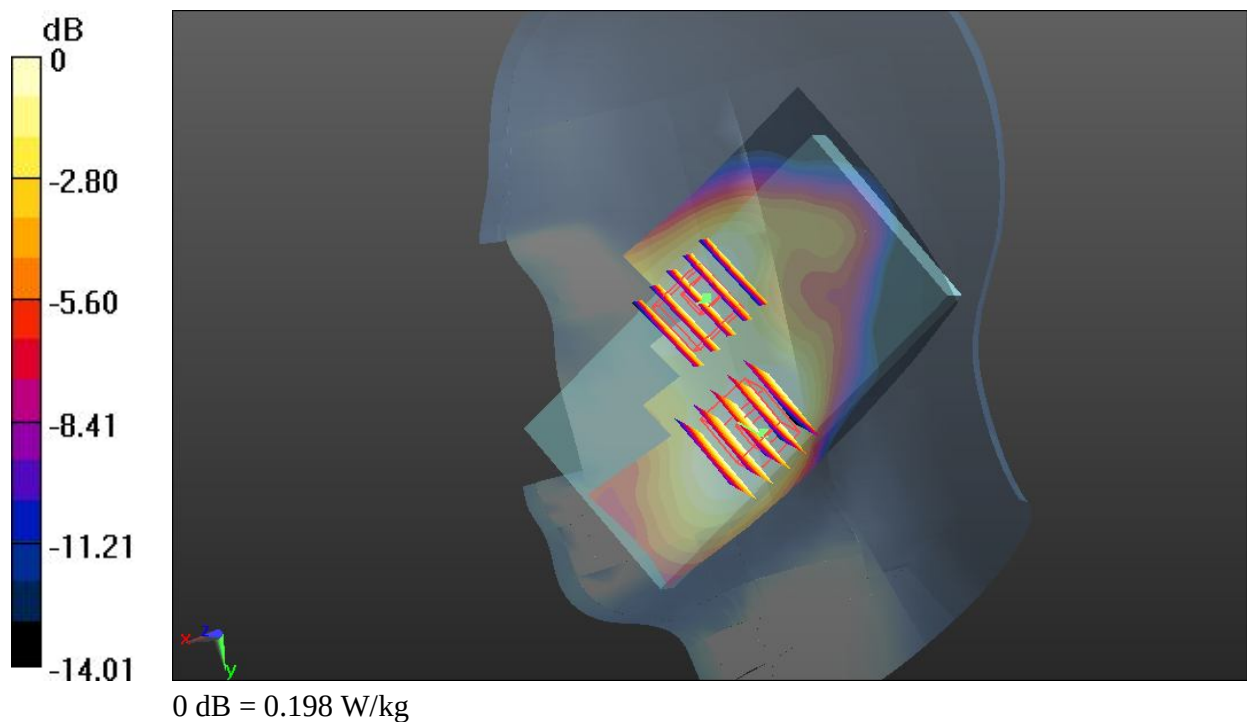

54 WCDMA II_RMC 12.2K_Right Tilted_Ch9262**DUT: 330701**

Communication System: UMTS; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: HSL_1900_130325 Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.373$ mho/m; $\epsilon_r =$ 39.868; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 21.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.84, 7.84, 7.84); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch9262/Area Scan (71x121x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.209 W/kg


Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 13.197 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.284 mW/g

SAR(1 g) = 0.178 mW/g; SAR(10 g) = 0.103 mW/g

Maximum value of SAR (measured) = 0.235 W/kg

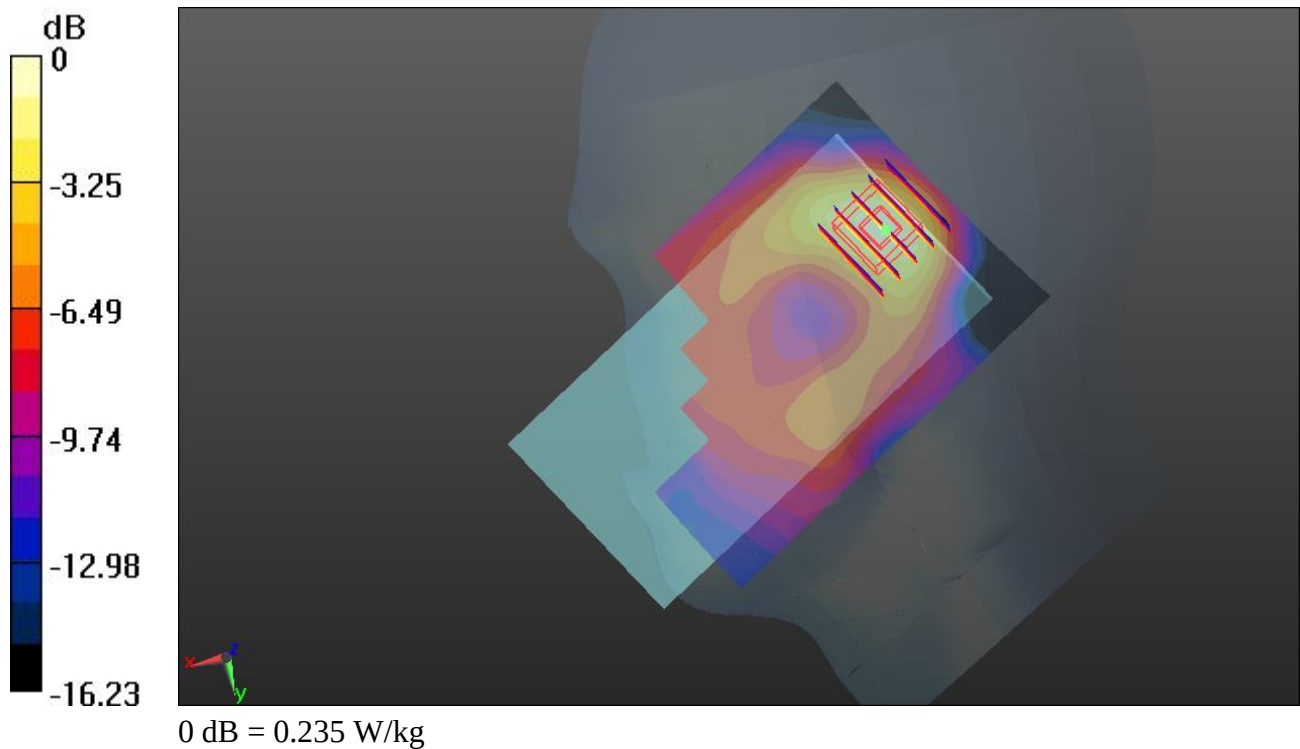

55 WCDMA II_RMC 12.2K_Left Cheek_Ch9262**DUT: 330701**

Communication System: UMTS; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: HSL_1900_130325 Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.373$ mho/m; $\epsilon_r =$ 39.868; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 21.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.84, 7.84, 7.84); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch9262/Area Scan (71x121x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.411 W/kg


Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.229 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.510 mW/g

SAR(1 g) = 0.336 mW/g; SAR(10 g) = 0.211 mW/g

Maximum value of SAR (measured) = 0.425 W/kg

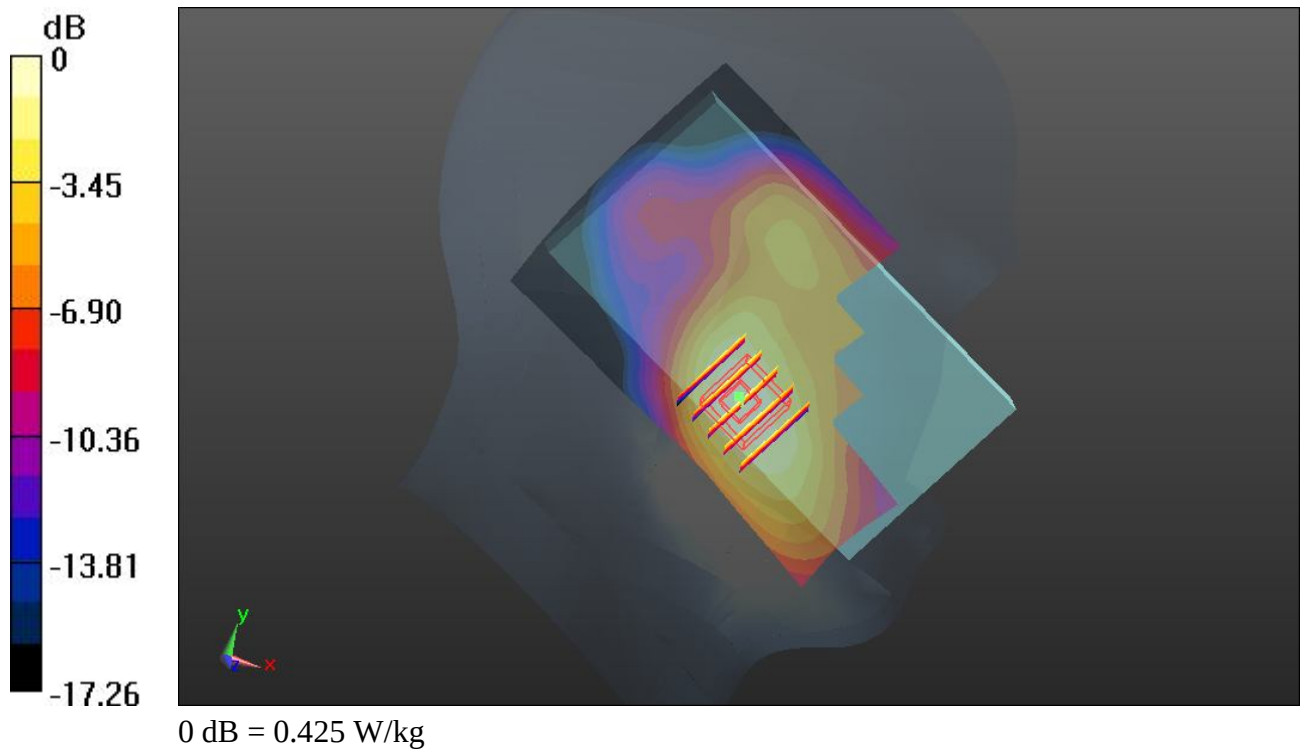

56 WCDMA II_RMC 12.2K_Left Tilted_Ch9262**DUT: 330701**

Communication System: UMTS; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: HSL_1900_130325 Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.373$ mho/m; $\epsilon_r =$

39.868; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 21.1 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.84, 7.84, 7.84); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch9262/Area Scan (71x121x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.196 W/kg


Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.451 V/m; Power Drift = 0.15 dB

Peak SAR (extrapolated) = 0.245 mW/g

SAR(1 g) = 0.155 mW/g; SAR(10 g) = 0.089 mW/g

Maximum value of SAR (measured) = 0.203 W/kg

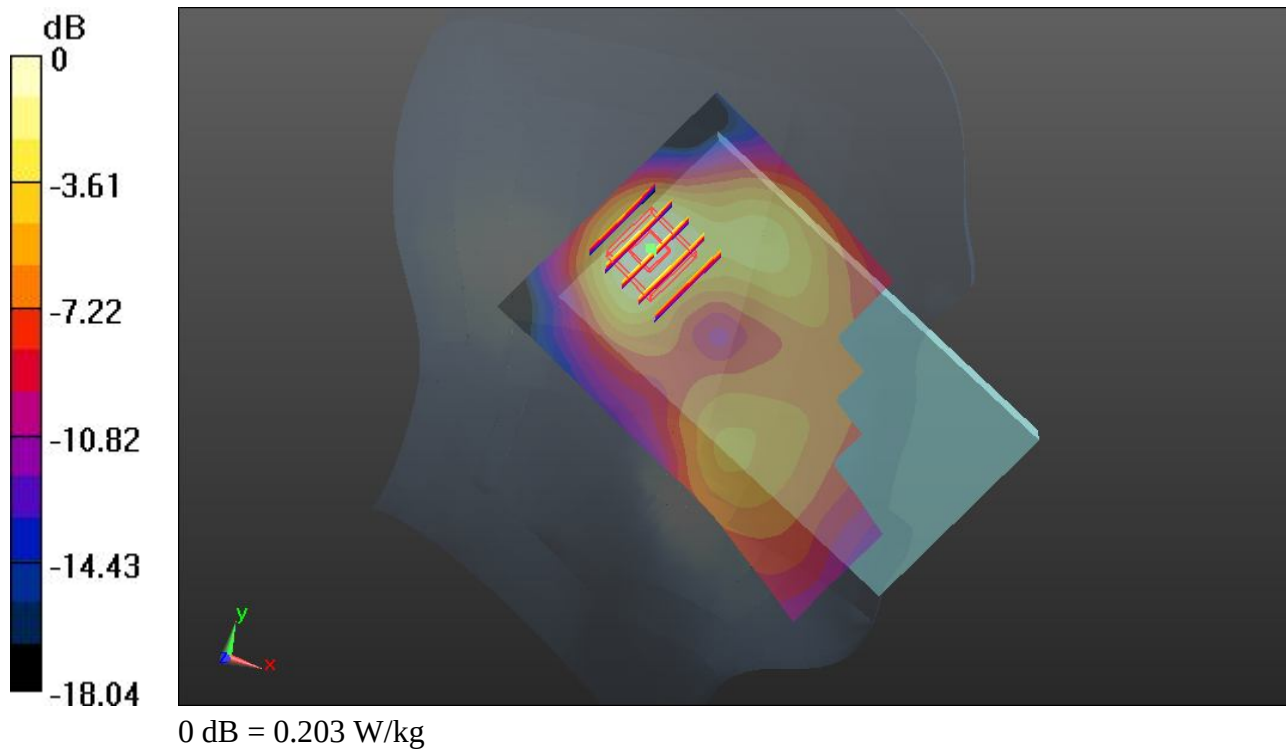

61 WLAN2.4G_802.11b_Right Cheek_Ch11**DUT: 330701**

Communication System: WIFI; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: HSL_2450_130325 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.87$ mho/m; $\epsilon_r = 37.641$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 21.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(6.99, 6.99, 6.99); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch11/Area Scan (81x151x1): Interpolated grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.799 W/kg


Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 21.781 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.266 mW/g

SAR(1 g) = 0.565 mW/g; SAR(10 g) = 0.252 mW/g

Maximum value of SAR (measured) = 0.863 W/kg

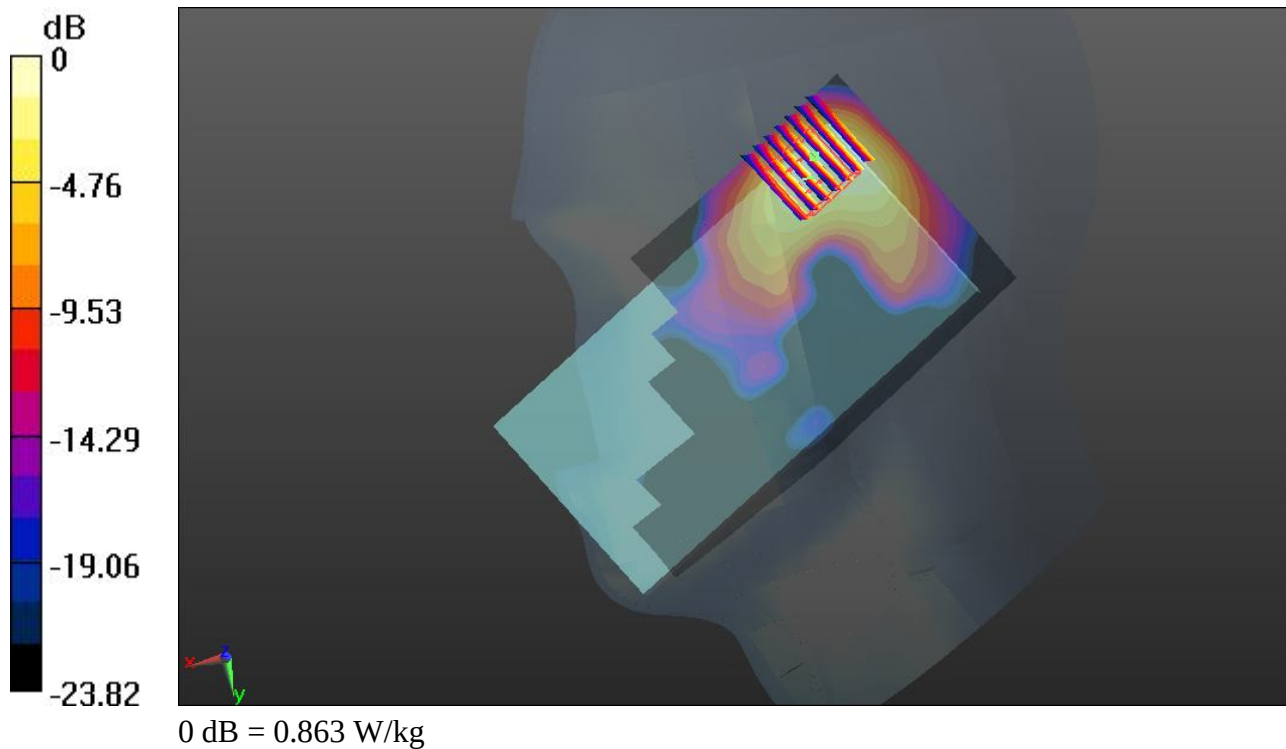

62 WLAN2.4G_802.11b_Right Tilted_Ch11**DUT: 330701**

Communication System: WIFI; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: HSL_2450_130325 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.87$ mho/m; $\epsilon_r = 37.641$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 21.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(6.99, 6.99, 6.99); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch11/Area Scan (81x151x1): Interpolated grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.713 W/kg


Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 17.165 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.022 mW/g

SAR(1 g) = 0.391 mW/g; SAR(10 g) = 0.186 mW/g

Maximum value of SAR (measured) = 0.666 W/kg

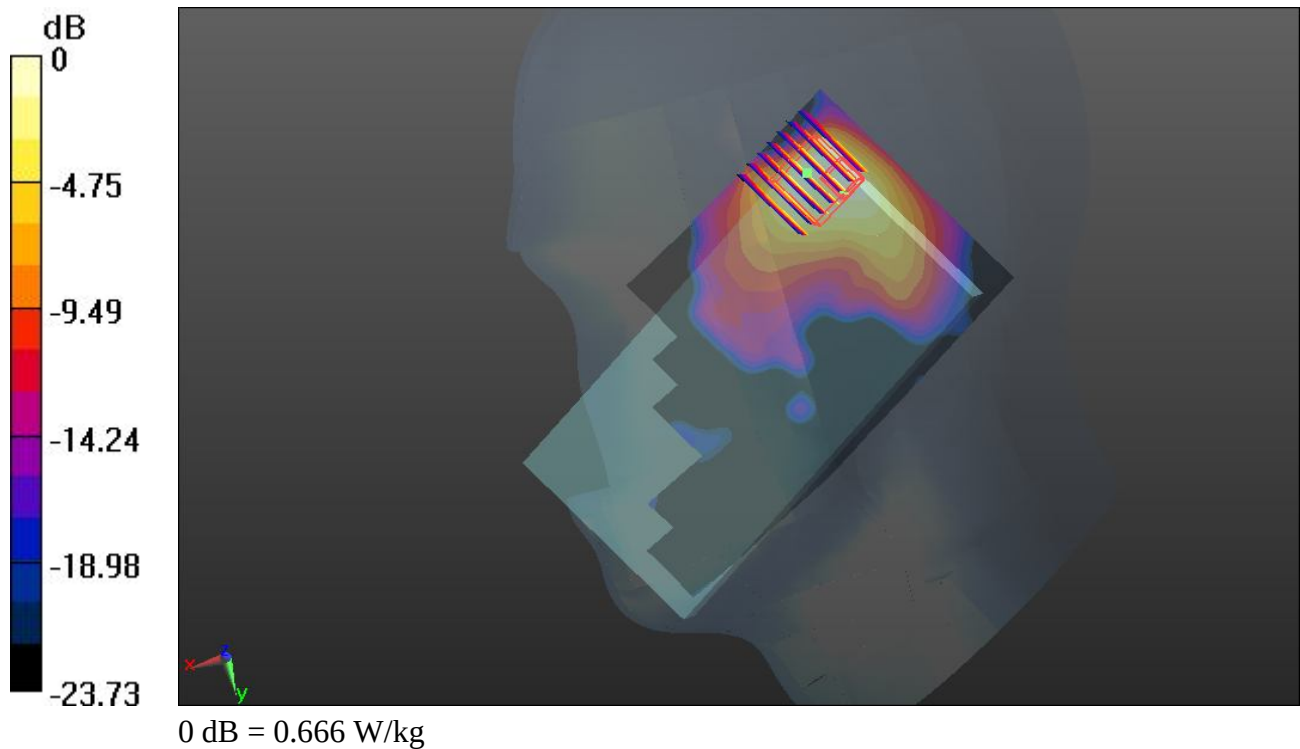

63 WLAN2.4G_802.11b_Left Cheek_Ch11**DUT: 330701**

Communication System: WIFI; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: HSL_2450_130325 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.87$ mho/m; $\epsilon_r = 37.641$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 21.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(6.99, 6.99, 6.99); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch11/Area Scan (81x151x1): Interpolated grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.261 W/kg

Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.664 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.397 mW/g

SAR(1 g) = 0.182 mW/g; SAR(10 g) = 0.084 mW/g

Maximum value of SAR (measured) = 0.282 W/kg


Ch11/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.664 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.353 mW/g

SAR(1 g) = 0.160 mW/g; SAR(10 g) = 0.077 mW/g

Maximum value of SAR (measured) = 0.251 W/kg

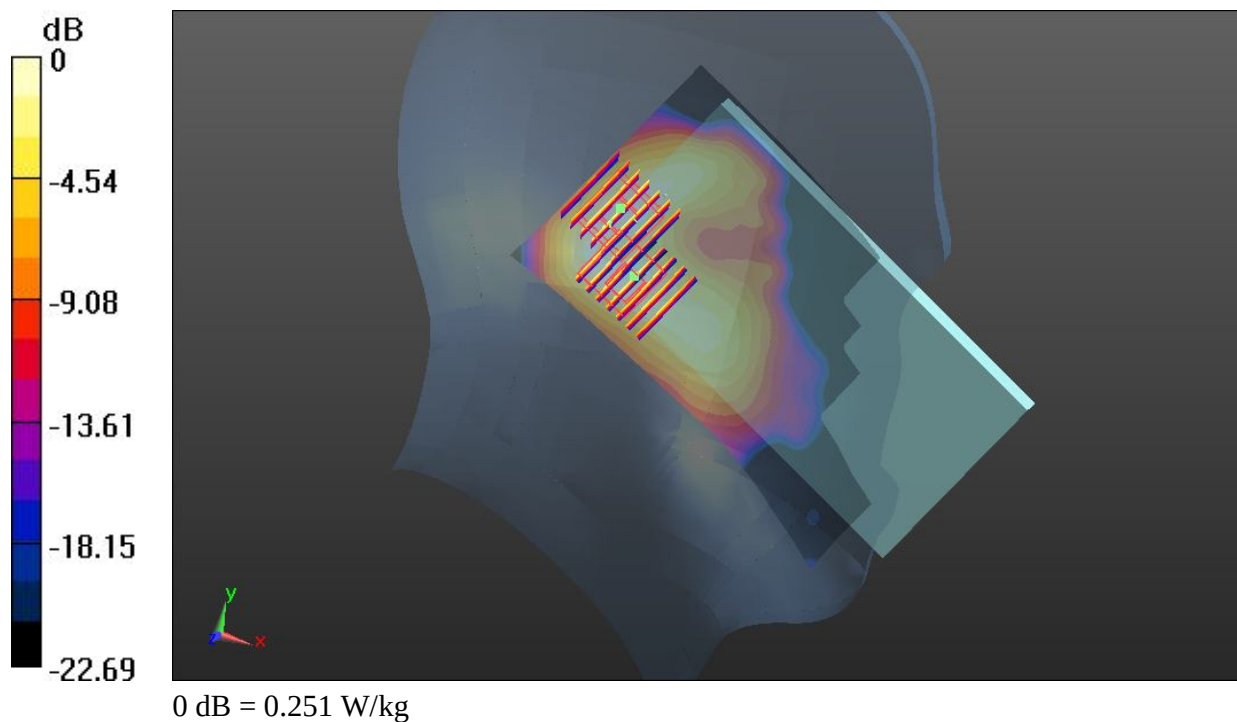

64 WLAN2.4G_802.11b_Left Tilted_Ch11**DUT: 330701**

Communication System: WIFI; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: HSL_2450_130325 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.87$ mho/m; $\epsilon_r = 37.641$; $\rho =$ 1000 kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 21.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(6.99, 6.99, 6.99); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch11/Area Scan (81x151x1): Interpolated grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.251 W/kg

Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.303 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.376 mW/g

SAR(1 g) = 0.175 mW/g; SAR(10 g) = 0.083 mW/g

Maximum value of SAR (measured) = 0.272 W/kg


Ch11/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 12.303 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.379 mW/g

SAR(1 g) = 0.164 mW/g; SAR(10 g) = 0.073 mW/g

Maximum value of SAR (measured) = 0.262 W/kg

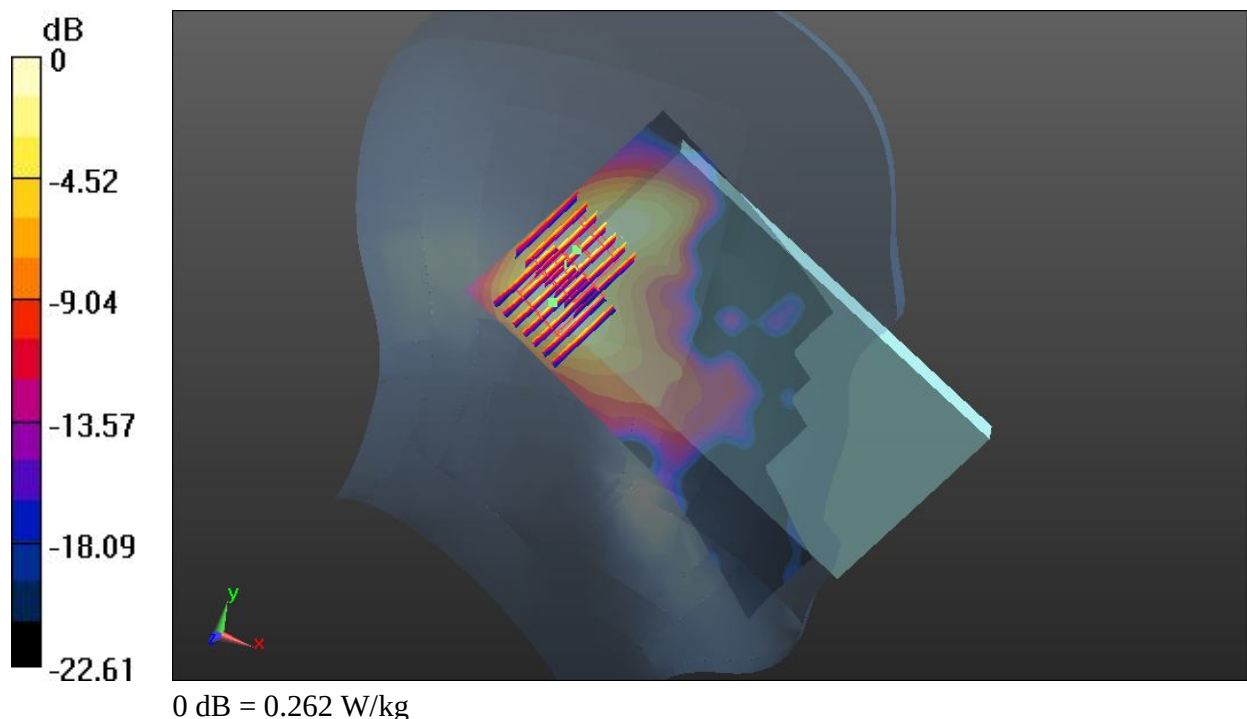

01 GSM850_GPRS (3 Tx slots)_Front_1cm_Ch128**DUT: 330701**

Communication System: GPRS/EDGE11; Frequency: 824.2 MHz; Duty Cycle: 1:2.7

Medium: MSL_835_130322 Medium parameters used: $f = 824.2$ MHz; $\sigma = 0.967$ mho/m; $\epsilon_r = 54.47$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.5, 9.5, 9.5); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch128/Area Scan (71x121x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.635 W/kg


Ch128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.189 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.691 mW/g

SAR(1 g) = 0.552 mW/g; SAR(10 g) = 0.433 mW/g

Maximum value of SAR (measured) = 0.628 W/kg

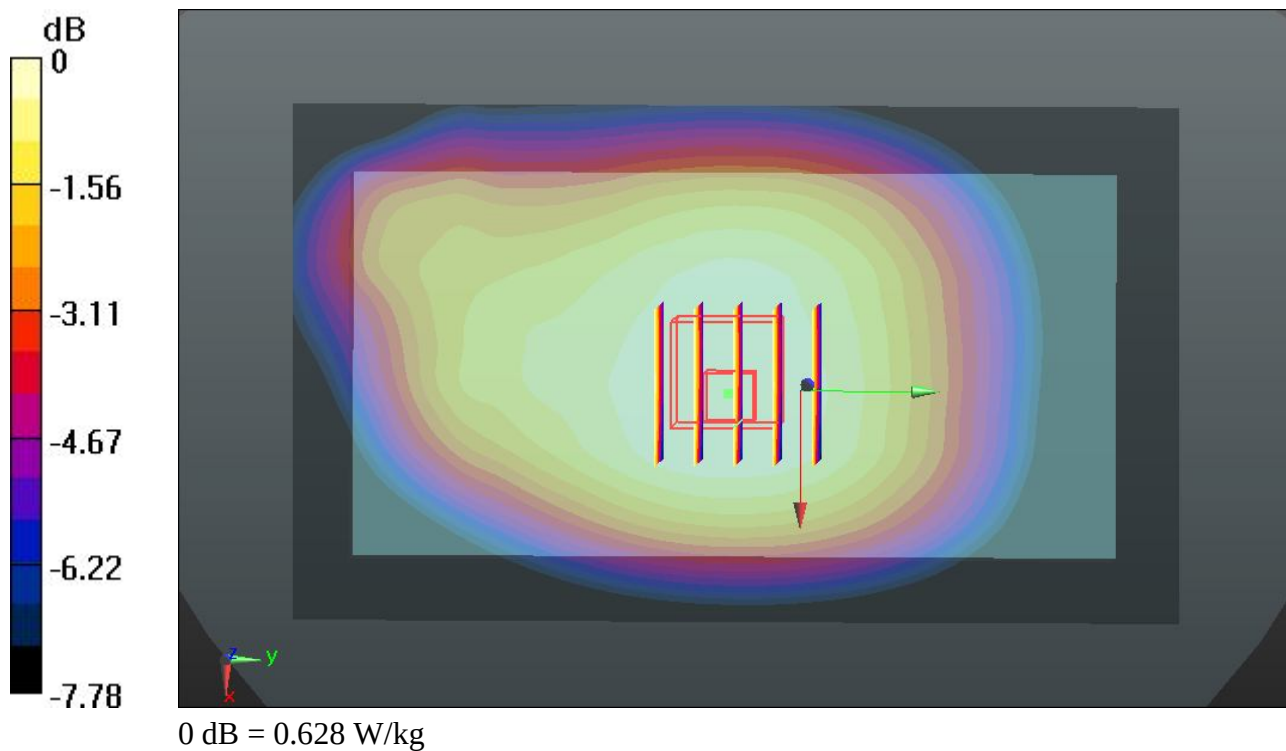

02 GSM850_GPRS (3 Tx slots)_Back_1cm_Ch128**DUT: 330701**

Communication System: GPRS/EDGE11; Frequency: 824.2 MHz; Duty Cycle: 1:2.7

Medium: MSL_835_130322 Medium parameters used: $f = 824.2$ MHz; $\sigma = 0.967$ mho/m; $\epsilon_r = 54.47$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.5, 9.5, 9.5); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch128/Area Scan (71x121x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.04 W/kg


Ch128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 33.670 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.138 mW/g

SAR(1 g) = 0.915 mW/g; SAR(10 g) = 0.716 mW/g

Maximum value of SAR (measured) = 1.04 W/kg

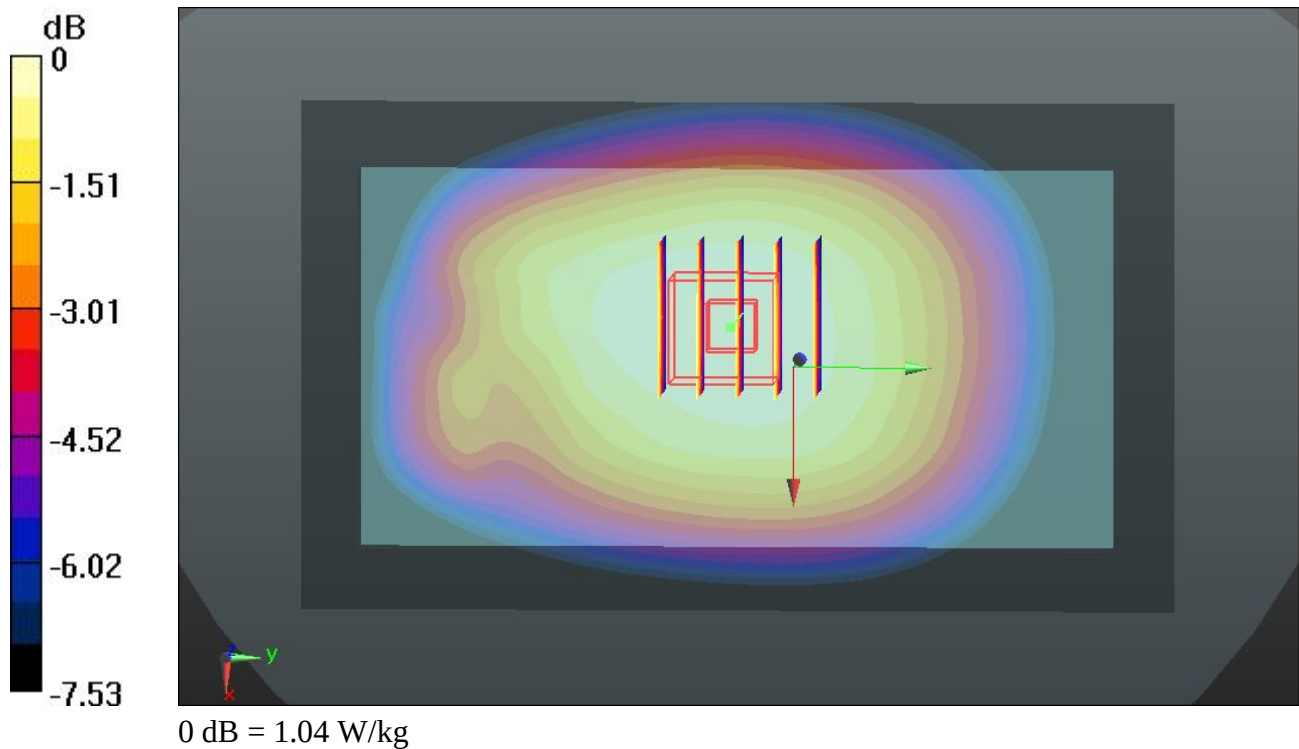

03 GSM850_GPRS (3 Tx slots)_Left Side_1cm_Ch128**DUT: 330701**

Communication System: GPRS/EDGE11; Frequency: 824.2 MHz; Duty Cycle: 1:2.7

Medium: MSL_835_130322 Medium parameters used: $f = 824.2$ MHz; $\sigma = 0.967$ mho/m; $\epsilon_r = 54.47$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.5, 9.5, 9.5); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch128/Area Scan (41x121x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.543 W/kg


Ch128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.274 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.617 mW/g

SAR(1 g) = 0.446 mW/g; SAR(10 g) = 0.313 mW/g

Maximum value of SAR (measured) = 0.537 W/kg

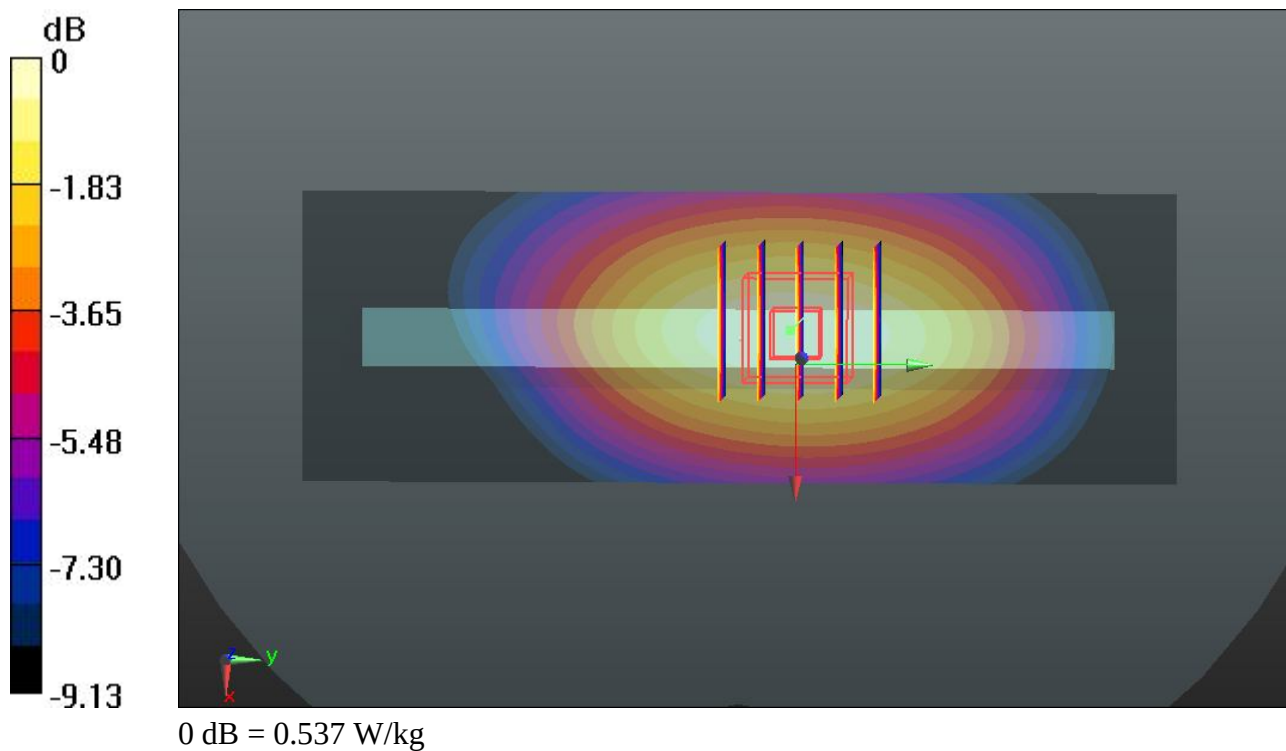

04 GSM850_GPRS (3 Tx slots)_Right Side_1cm_Ch128**DUT: 330701**

Communication System: GPRS/EDGE11; Frequency: 824.2 MHz; Duty Cycle: 1:2.7

Medium: MSL_835_130322 Medium parameters used: $f = 824.2$ MHz; $\sigma = 0.967$ mho/m; $\epsilon_r = 54.47$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.5, 9.5, 9.5); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch128/Area Scan (41x121x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.667 W/kg


Ch128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.923 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.750 mW/g

SAR(1 g) = 0.540 mW/g; SAR(10 g) = 0.380 mW/g

Maximum value of SAR (measured) = 0.656 W/kg

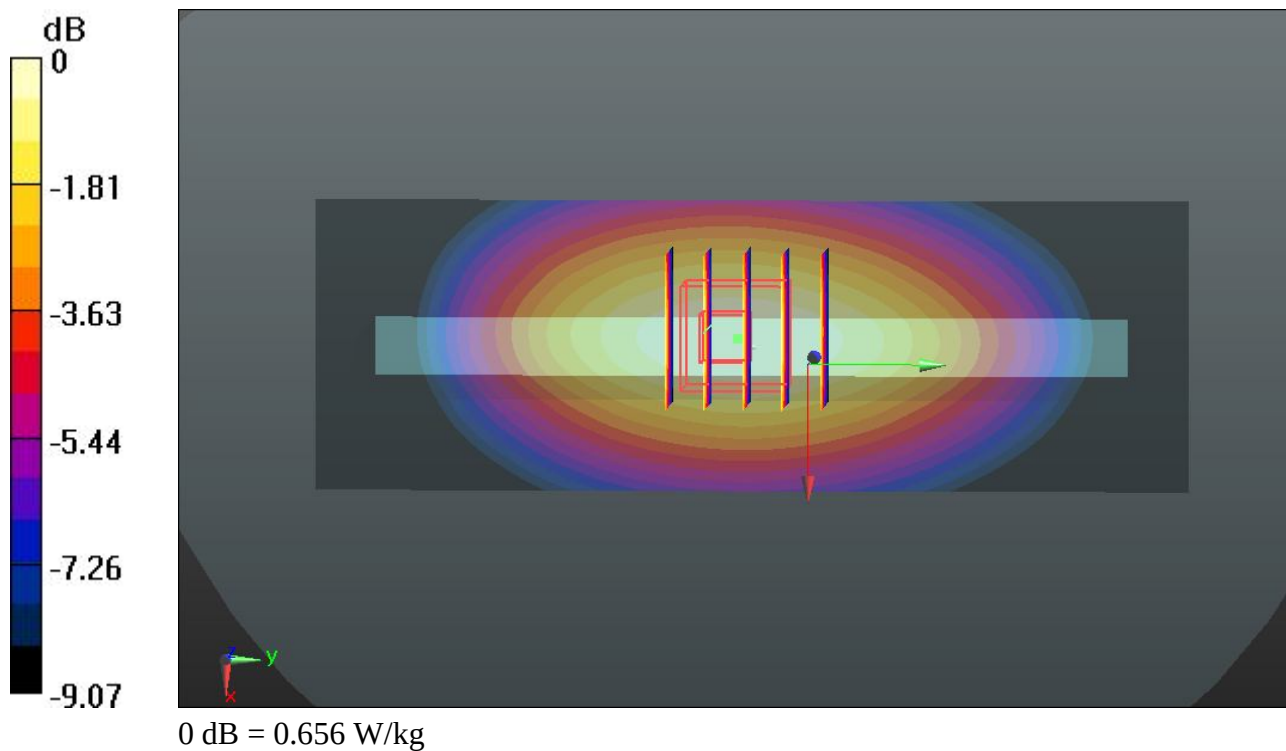

05 GSM850_GPRS (3 Tx slots)_Bottom Side_1cm_Ch128**DUT: 330701**

Communication System: GPRS/EDGE11; Frequency: 824.2 MHz; Duty Cycle: 1:2.7

Medium: MSL_835_130322 Medium parameters used: $f = 824.2$ MHz; $\sigma = 0.967$ mho/m; $\epsilon_r = 54.47$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.5, 9.5, 9.5); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch128/Area Scan (41x71x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.117 W/kg

Ch128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.081 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.151 mW/g

SAR(1 g) = 0.091 mW/g; SAR(10 g) = 0.060 mW/g

Maximum value of SAR (measured) = 0.122 W/kg


Ch128/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.081 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.143 mW/g

SAR(1 g) = 0.088 mW/g; SAR(10 g) = 0.053 mW/g

Maximum value of SAR (measured) = 0.108 W/kg

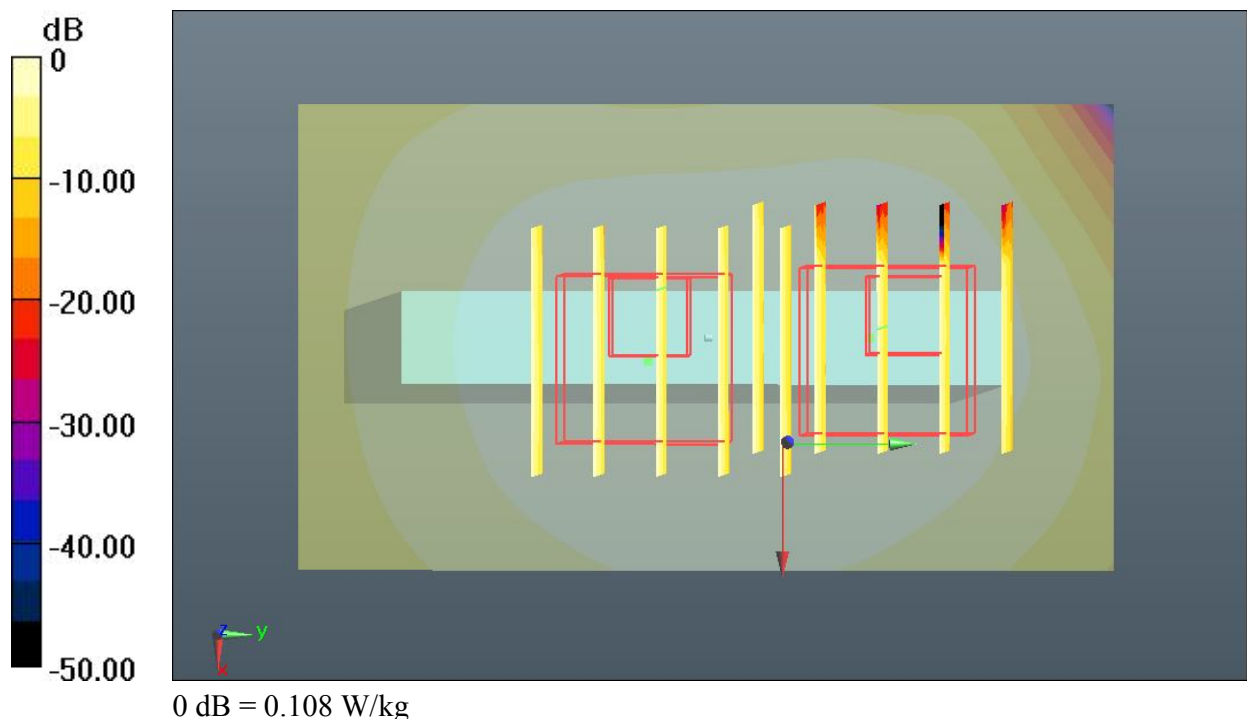

06 GSM850_GPRS (3 Tx slots)_Back_1cm_Ch189**DUT: 330701**

Communication System: GPRS/EDGE11; Frequency: 836.4 MHz; Duty Cycle: 1:2.7

Medium: MSL_835_130322 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.978$ mho/m; $\epsilon_r = 54.384$; ρ $= 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.5, 9.5, 9.5); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch189/Area Scan (71x121x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.17 W/kg

Ch189/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 35.069 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.262 mW/g

SAR(1 g) = 1.020 mW/g; SAR(10 g) = 0.785 mW/g

Maximum value of SAR (measured) = 1.15 W/kg


Ch189/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 35.069 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.058 mW/g

SAR(1 g) = 0.676 mW/g; SAR(10 g) = 0.388 mW/g

Maximum value of SAR (measured) = 0.952 W/kg

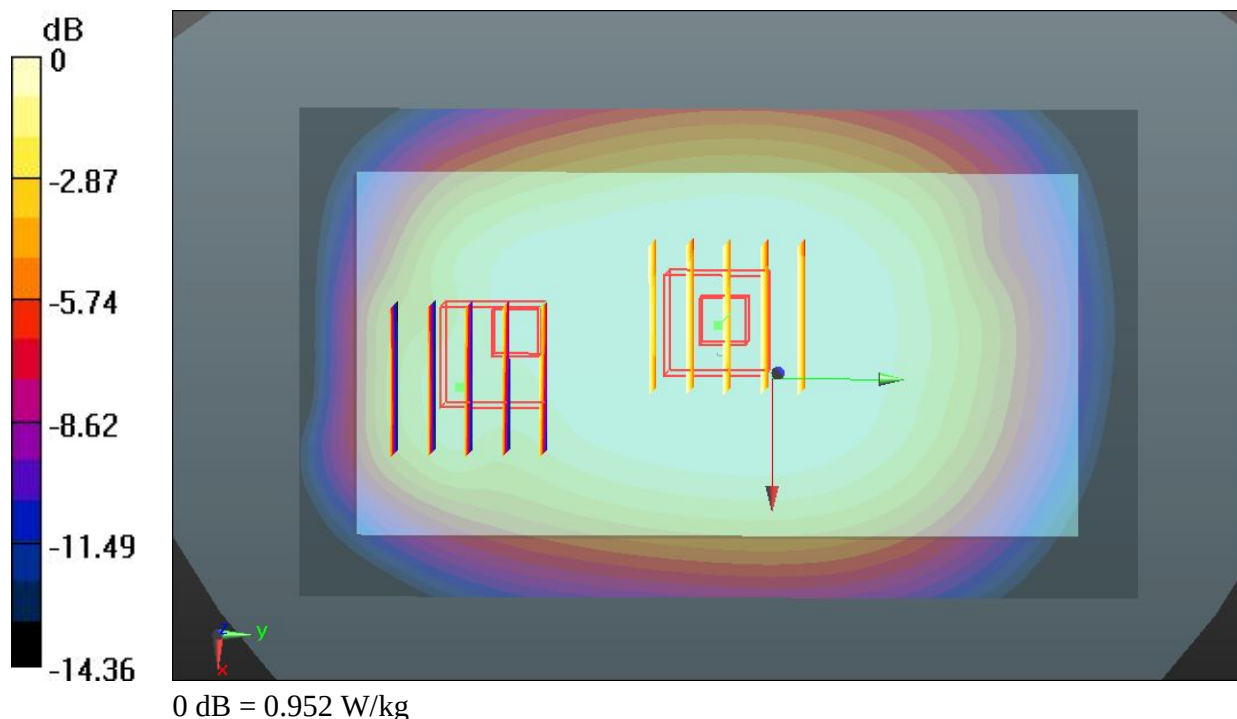

11 GSM850_GPRS (3 Tx slots)_Back_1cm_Ch189_Repeat SAR**DUT: 330701**

Communication System: GPRS/EDGE11; Frequency: 836.4 MHz; Duty Cycle: 1:2.7

Medium: MSL_835_130322 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.978$ mho/m; $\epsilon_r = 54.384$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.5, 9.5, 9.5); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch189/Area Scan (71x121x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.07 W/kg

Ch189/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 33.737 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 1.228 mW/g

SAR(1 g) = 0.969 mW/g; SAR(10 g) = 0.754 mW/g

Maximum value of SAR (measured) = 1.11 W/kg


Ch189/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 33.737 V/m; Power Drift = 0.12 dB

Peak SAR (extrapolated) = 1.187 mW/g

SAR(1 g) = 0.941 mW/g; SAR(10 g) = 0.669 mW/g

Maximum value of SAR (measured) = 1.07 W/kg

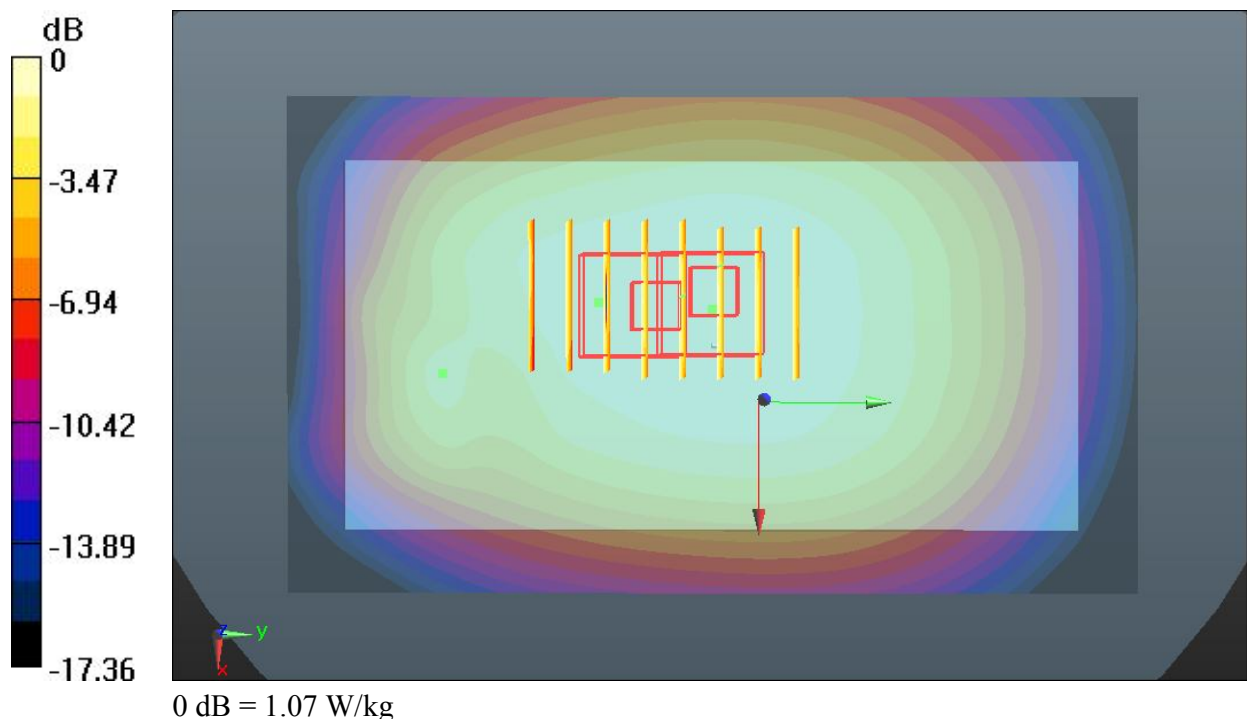


07 GSM850_GPRS (3 Tx slots)_Back_1cm_Ch251**DUT: 330701**

Communication System: GPRS/EDGE11; Frequency: 848.8 MHz; Duty Cycle: 1:2.7

Medium: MSL_835_130322 Medium parameters used: $f = 849$ MHz; $\sigma = 0.99$ mho/m; $\epsilon_r = 54.274$; $\rho =$ 1000 kg/m^3 Ambient Temperature : 23.5°C ; Liquid Temperature : 21.5°C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.5, 9.5, 9.5); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

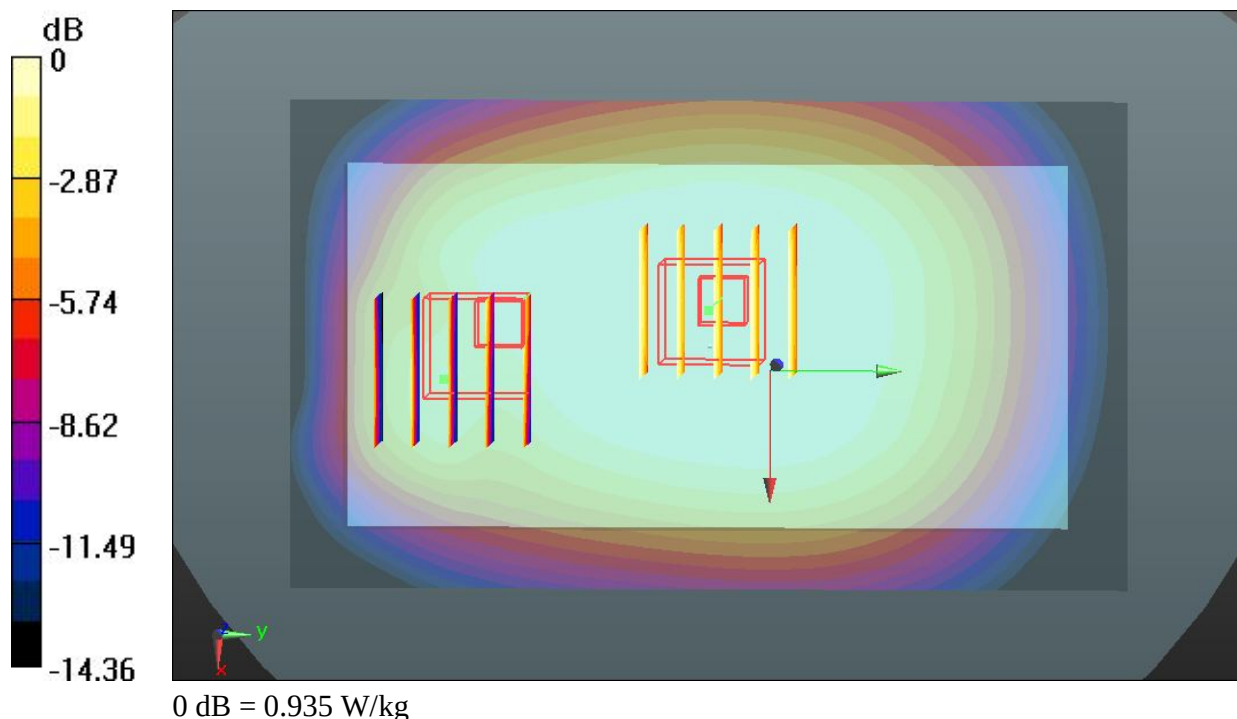Ch251/Area Scan (71x121x1): Interpolated grid: $dx=15\text{mm}$, $dy=15\text{mm}$ Maximum value of SAR (interpolated) = 1.16 W/kg **Ch251/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 34.861 V/m ; Power Drift = -0.01 dB Peak SAR (extrapolated) = 1.271 mW/g **SAR(1 g) = 1.010 mW/g ; SAR(10 g) = 0.782 mW/g** Maximum value of SAR (measured) = 1.15 W/kg **Ch251/Zoom Scan (5x5x7)/Cube 1:** Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$ Reference Value = 34.861 V/m ; Power Drift = -0.01 dB Peak SAR (extrapolated) = 1.052 mW/g **SAR(1 g) = 0.627 mW/g ; SAR(10 g) = 0.361 mW/g** Maximum value of SAR (measured) = 0.935 W/kg 

08 GSM850_GSM Voice_Back_1cm_Ch189**DUT: 330701**

Communication System: Generic GSM; Frequency: 836.4 MHz; Duty Cycle: 1:8.3

Medium: MSL_835_130322 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.978$ mho/m; $\epsilon_r = 54.384$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.5, 9.5, 9.5); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch189/Area Scan (71x121x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.696 W/kg

Ch189/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.235 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.767 mW/g

SAR(1 g) = 0.609 mW/g; SAR(10 g) = 0.470 mW/g

Maximum value of SAR (measured) = 0.696 W/kg


Ch189/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.235 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.611 mW/g

SAR(1 g) = 0.361 mW/g; SAR(10 g) = 0.213 mW/g

Maximum value of SAR (measured) = 0.542 W/kg

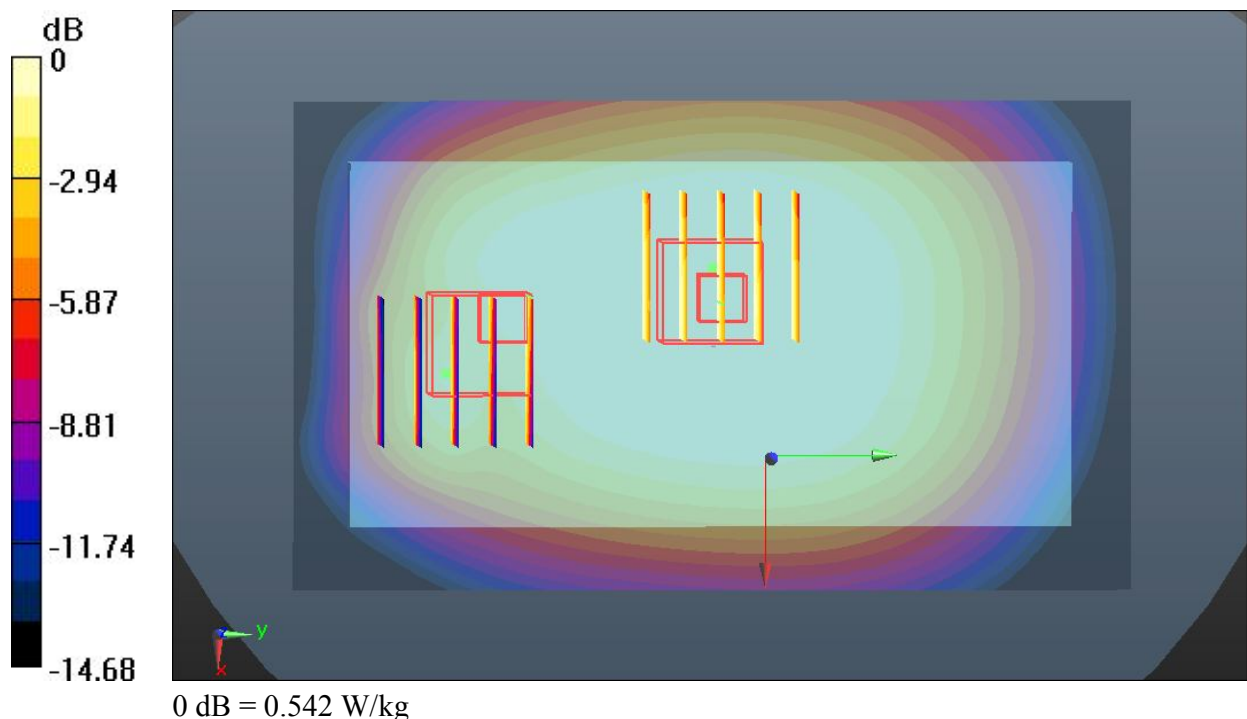

09 GSM850_GSM Voice_Back_1cm_Ch128**DUT: 330701**

Communication System: Generic GSM; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium: MSL_835_130322 Medium parameters used: $f = 824.2$ MHz; $\sigma = 0.967$ mho/m; $\epsilon_r = 54.47$;

$\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.5, 9.5, 9.5); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch128/Area Scan (71x121x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.628 W/kg


Ch128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.154 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.691 mW/g

SAR(1 g) = 0.554 mW/g; SAR(10 g) = 0.433 mW/g

Maximum value of SAR (measured) = 0.631 W/kg

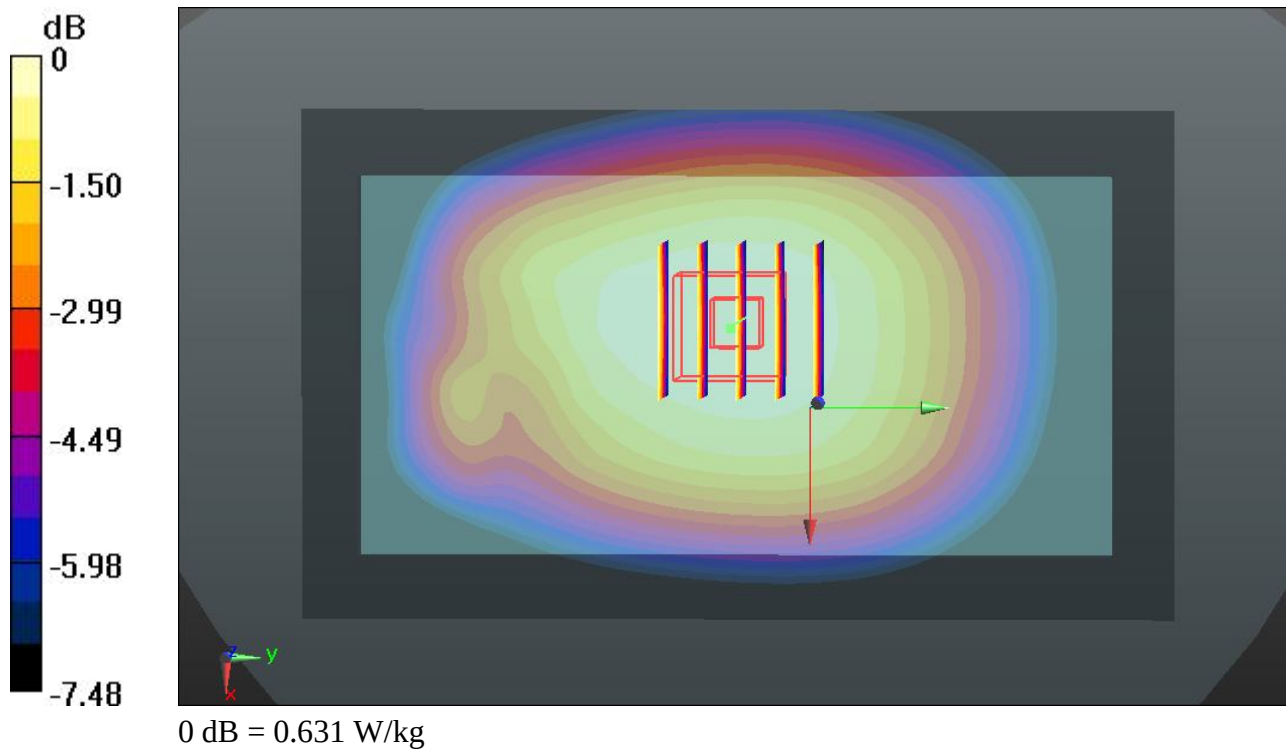

10 GSM850_GSM Voice_Back_1cm_Ch251**DUT: 330701**

Communication System: Generic GSM; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: MSL_835_130322 Medium parameters used: $f = 849$ MHz; $\sigma = 0.99$ mho/m; $\epsilon_r = 54.274$; $\rho =$ 1000 kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.5, 9.5, 9.5); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch251/Area Scan (71x121x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.710 W/kg

Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.325 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.784 mW/g

SAR(1 g) = 0.618 mW/g; SAR(10 g) = 0.476 mW/g

Maximum value of SAR (measured) = 0.708 W/kg


Ch251/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.325 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.635 mW/g

SAR(1 g) = 0.364 mW/g; SAR(10 g) = 0.217 mW/g

Maximum value of SAR (measured) = 0.560 W/kg

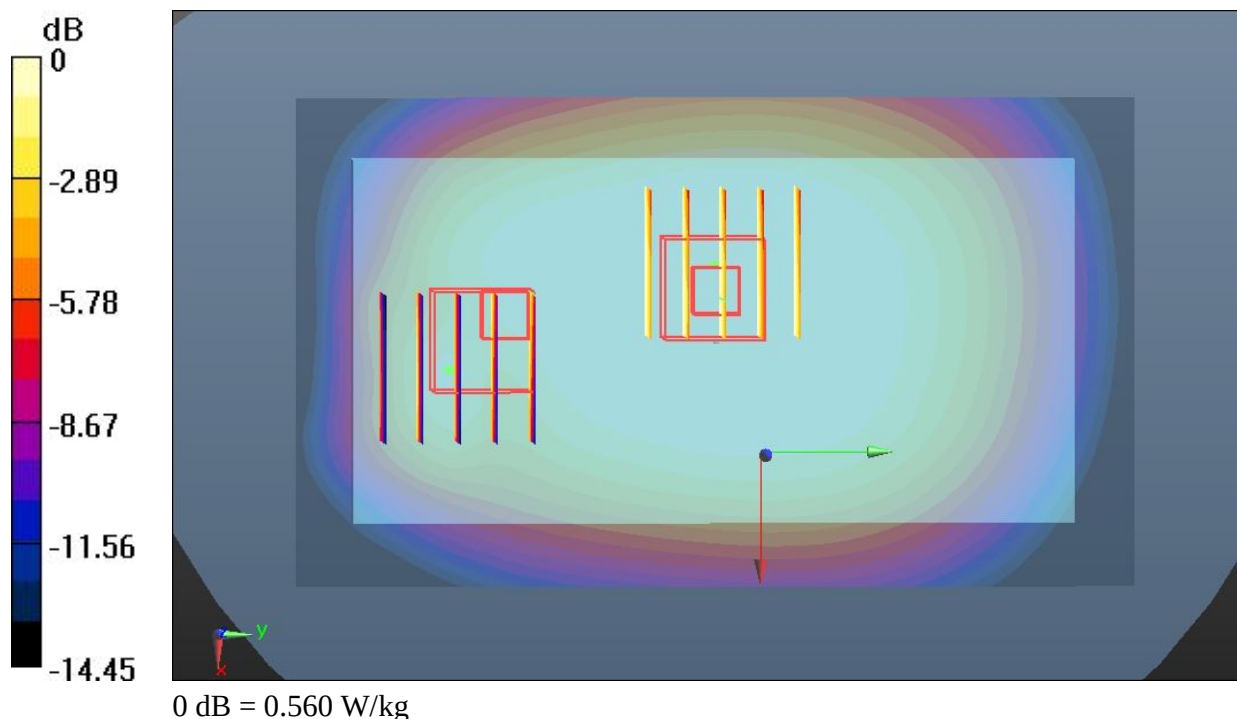

36 GSM1900_GPRS (3 Tx slots)_Front_1cm_Ch810**DUT: 330701**

Communication System: GPRS/EDGE11; Frequency: 1909.8 MHz; Duty Cycle: 1:2.7

Medium: MSL_1900_130324 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.536$ mho/m; $\epsilon_r =$ 54.849; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C ; Liquid Temperature : 21.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.67, 7.67, 7.67); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch810/Area Scan (71x121x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.581 W/kg


Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.720 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.704 mW/g

SAR(1 g) = 0.423 mW/g; SAR(10 g) = 0.240 mW/g

Maximum value of SAR (measured) = 0.570 W/kg

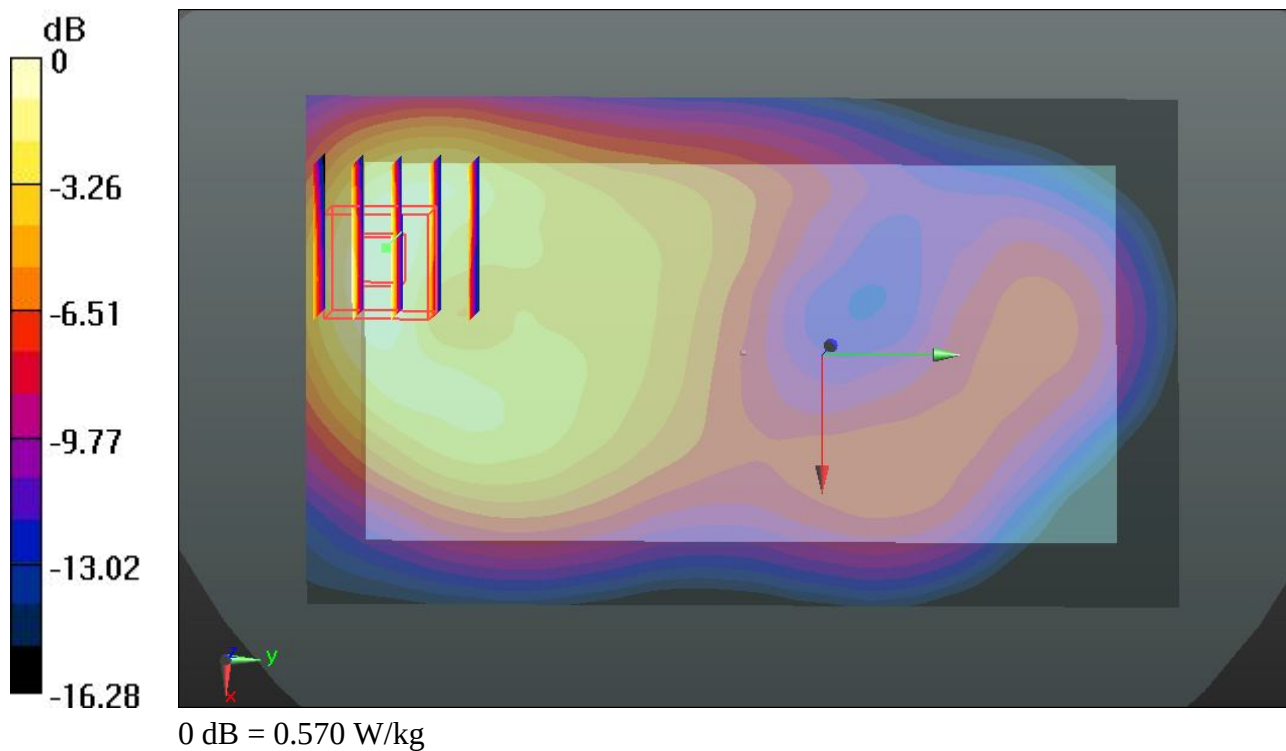

37 GSM1900_GPRS (3 Tx slots)_Back_1cm_Ch810**DUT: 330701**

Communication System: GPRS/EDGE11; Frequency: 1909.8 MHz; Duty Cycle: 1:2.7
Medium: MSL_1900_130324 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.536$ mho/m; $\epsilon_r = 54.849$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.1 °C ; Liquid Temperature : 21.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.67, 7.67, 7.67); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch810/Area Scan (71x121x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.19 W/kg


Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.498 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 1.573 mW/g

SAR(1 g) = 0.916 mW/g; SAR(10 g) = 0.491 mW/g

Maximum value of SAR (measured) = 1.27 W/kg

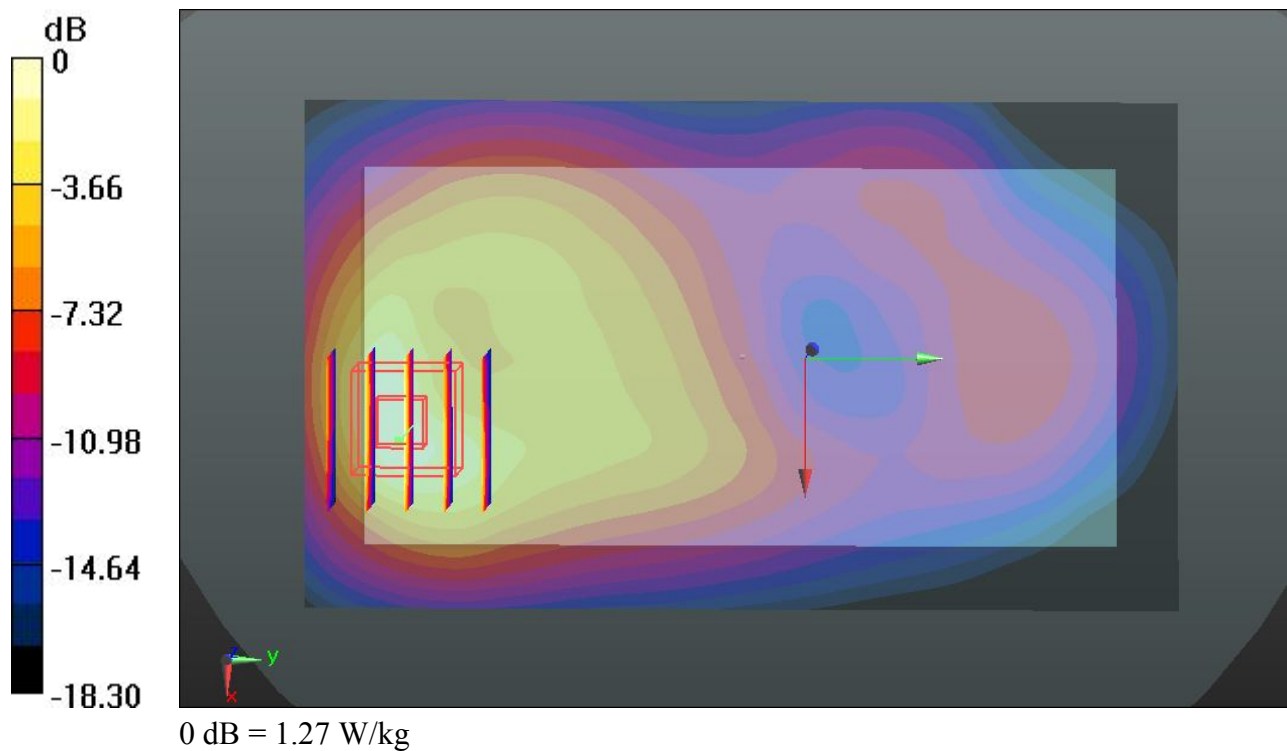

44 GSM1900_GPRS (3 Tx slots)_Back_1cm_Ch810_Repeat SAR**DUT: 330701**

Communication System: GPRS/EDGE11; Frequency: 1909.8 MHz; Duty Cycle: 1:2.7

Medium: MSL_1900_130324 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.536$ mho/m; $\epsilon_r =$ 54.849; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C ; Liquid Temperature : 21.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.67, 7.67, 7.67); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch810/Area Scan (71x121x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.07 W/kg


Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.231 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 1.453 mW/g

SAR(1 g) = 0.843 mW/g; SAR(10 g) = 0.454 mW/g

Maximum value of SAR (measured) = 1.18 W/kg

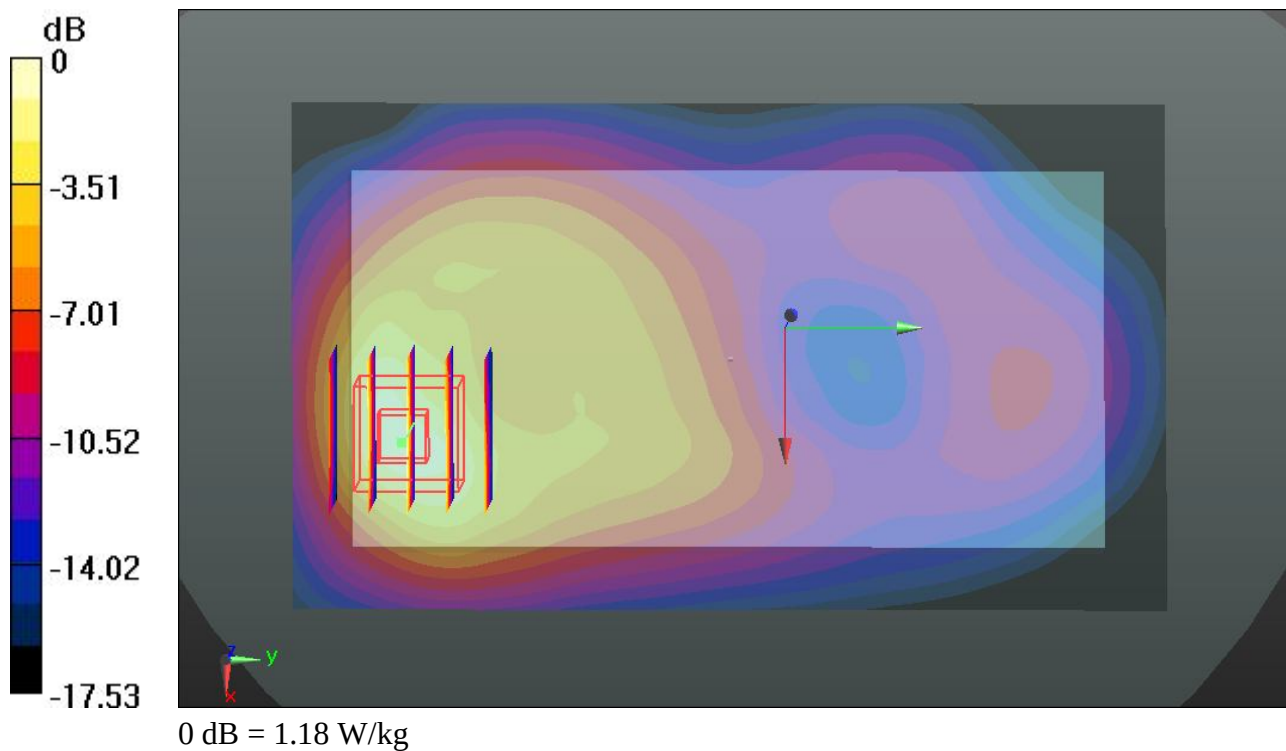

38 GSM1900_GPRS (3 Tx slots)_Left Side_1cm_Ch810**DUT: 330701**

Communication System: GPRS/EDGE11; Frequency: 1909.8 MHz; Duty Cycle: 1:2.7
Medium: MSL_1900_130324 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.536$ mho/m; $\epsilon_r = 54.849$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.1 °C ; Liquid Temperature : 21.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.67, 7.67, 7.67); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch810/Area Scan (41x121x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.223 W/kg


Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.200 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.263 mW/g

SAR(1 g) = 0.163 mW/g; SAR(10 g) = 0.096 mW/g

Maximum value of SAR (measured) = 0.221 W/kg

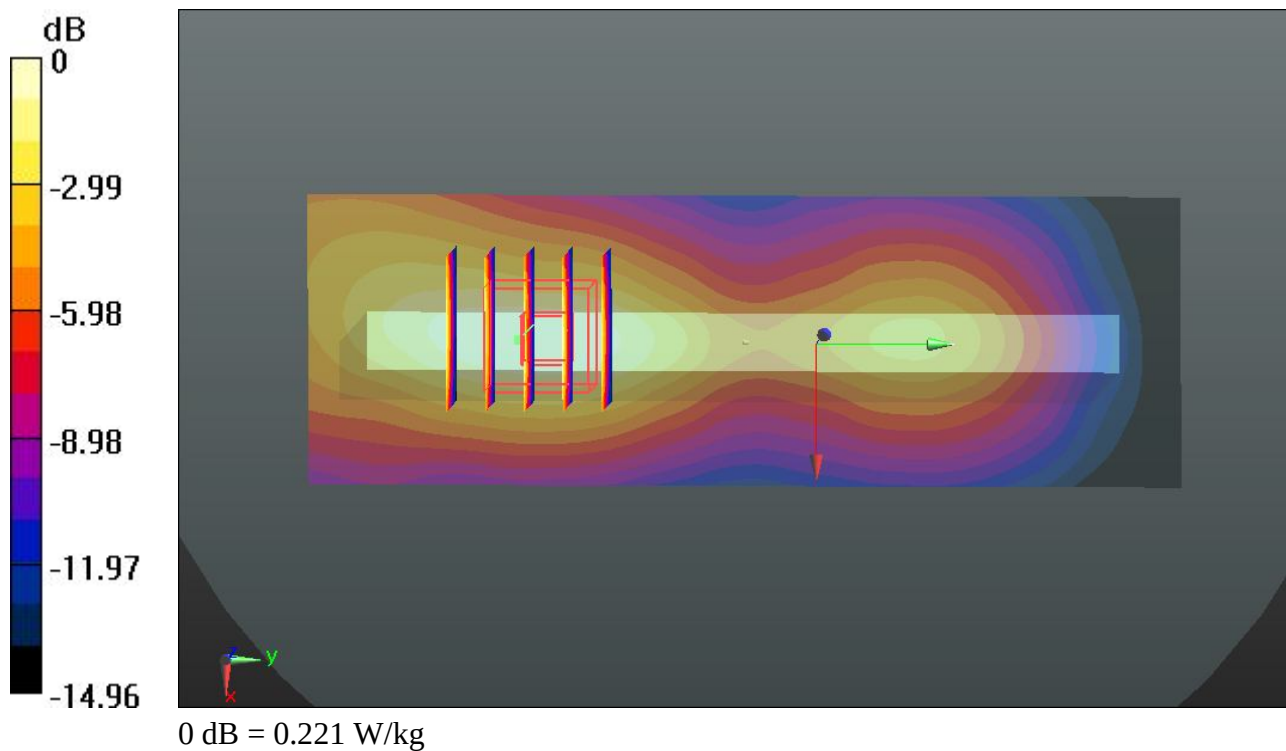

39 GSM1900_GPRS (3 Tx slots)_Right Side_1cm_Ch810**DUT: 330701**

Communication System: GPRS/EDGE11; Frequency: 1909.8 MHz; Duty Cycle: 1:2.7

Medium: MSL_1900_130324 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.536$ mho/m; $\epsilon_r = 54.849$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C; Liquid Temperature : 21.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.67, 7.67, 7.67); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch810/Area Scan (41x121x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.129 W/kg

Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.304 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.156 mW/g

SAR(1 g) = 0.097 mW/g; SAR(10 g) = 0.059 mW/g

Maximum value of SAR (measured) = 0.127 W/kg


Ch810/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.304 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.103 mW/g

SAR(1 g) = 0.064 mW/g; SAR(10 g) = 0.038 mW/g

Maximum value of SAR (measured) = 0.0853 W/kg

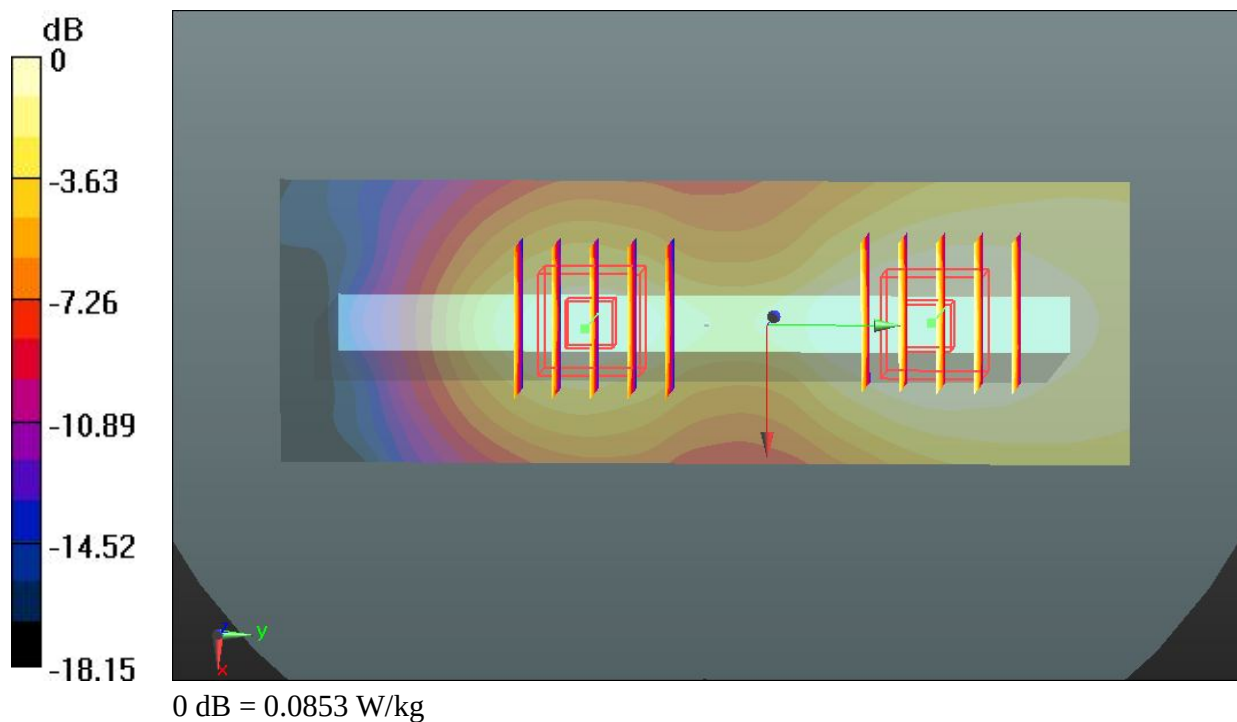

40 GSM1900_GPRS (3 Tx slots)_Bottom Side_1cm_Ch810**DUT: 330701**

Communication System: GPRS/EDGE11; Frequency: 1909.8 MHz; Duty Cycle: 1:2.7

Medium: MSL_1900_130324 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.536$ mho/m; $\epsilon_r =$ 54.849; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C ; Liquid Temperature : 21.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.67, 7.67, 7.67); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch810/Area Scan (41x71x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.753 W/kg


Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.754 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.949 mW/g

SAR(1 g) = 0.564 mW/g; SAR(10 g) = 0.315 mW/g

Maximum value of SAR (measured) = 0.767 W/kg

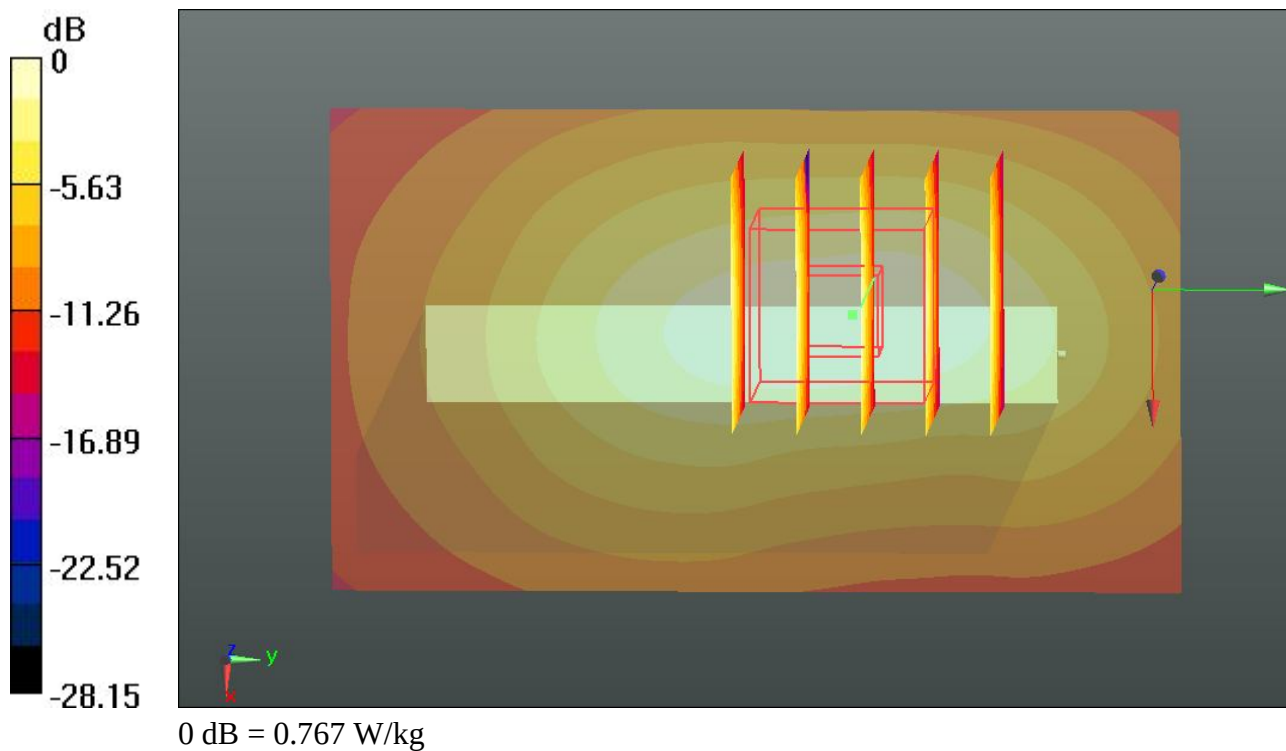

41 GSM1900_GPRS (3 Tx slots)_Back_1cm_Ch512**DUT: 330701**

Communication System: GPRS/EDGE11; Frequency: 1850.2 MHz; Duty Cycle: 1:2.7

Medium: MSL_1900_130324 Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.466$ mho/m; $\epsilon_r =$

54.972; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C ; Liquid Temperature : 21.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.67, 7.67, 7.67); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch512/Area Scan (71x121x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.07 W/kg


Ch512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.096 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.392 mW/g

SAR(1 g) = 0.809 mW/g; SAR(10 g) = 0.449 mW/g

Maximum value of SAR (measured) = 1.13 W/kg

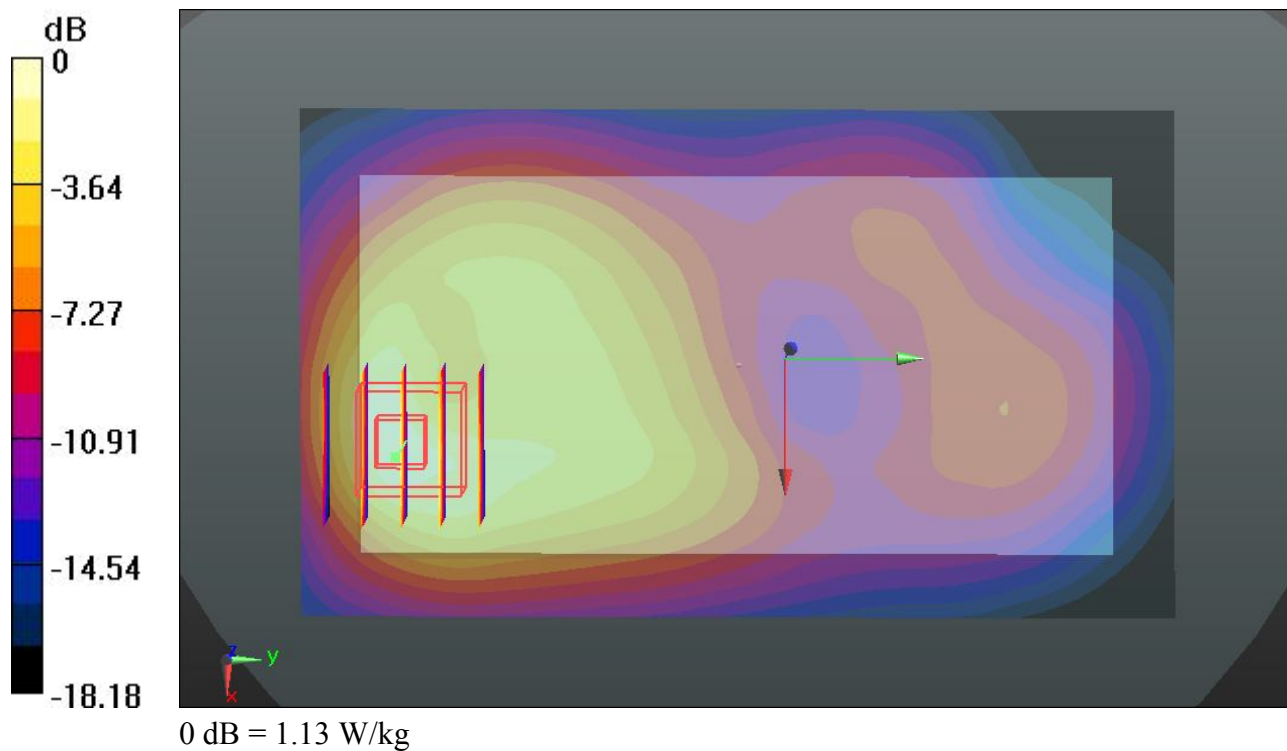

42 GSM1900_GPRS (3 Tx slots)_Back_1cm_Ch661**DUT: 330701**

Communication System: GPRS/EDGE11; Frequency: 1880 MHz; Duty Cycle: 1:2.7

Medium: MSL_1900_130324 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.506$ mho/m; $\epsilon_r = 54.9$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C ; Liquid Temperature : 21.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.67, 7.67, 7.67); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch661/Area Scan (71x121x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.16 W/kg


Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.908 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 1.549 mW/g

SAR(1 g) = 0.886 mW/g; SAR(10 g) = 0.480 mW/g

Maximum value of SAR (measured) = 1.26 W/kg

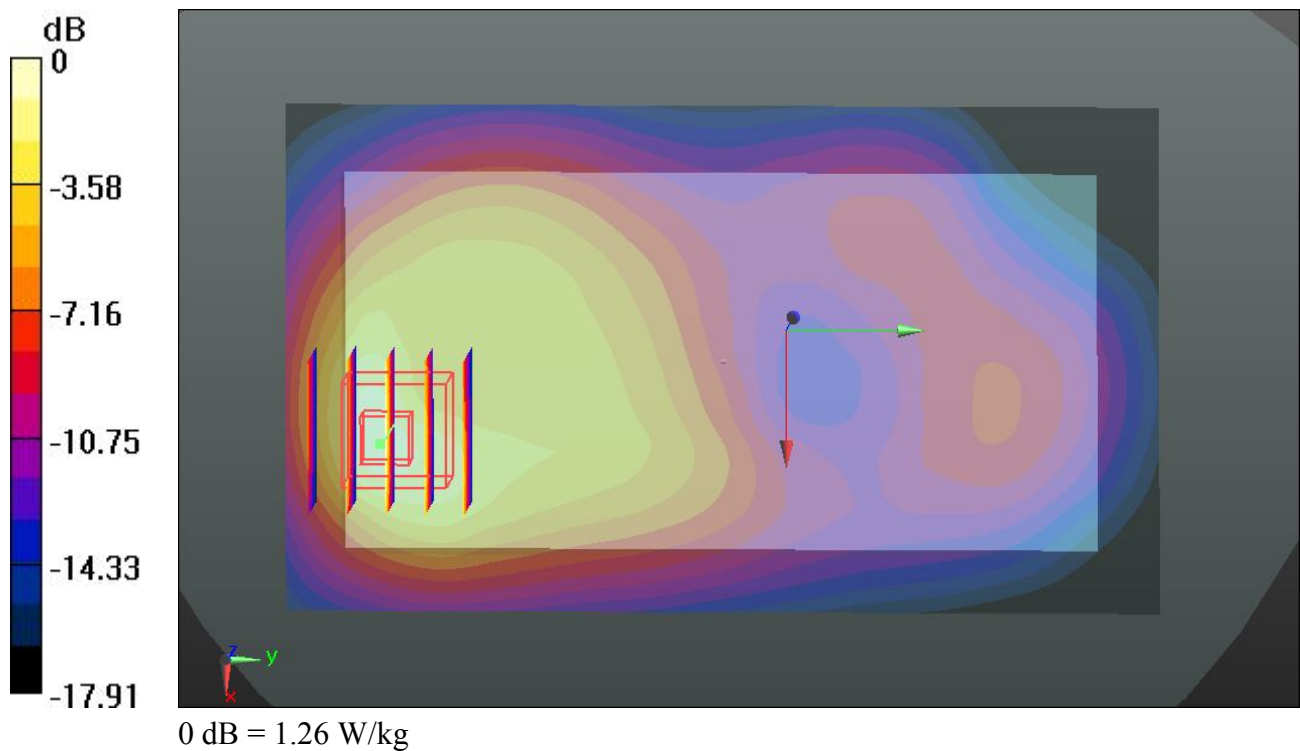

43 GSM1900_GSM Vioce_Back_1cm_Ch810**DUT: 330701**

Communication System: Generic GSM; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: MSL_1900_130324 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.536$ mho/m; $\epsilon_r =$

54.849; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C ; Liquid Temperature : 21.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.67, 7.67, 7.67); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch810/Area Scan (71x121x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.667 W/kg


Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.426 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.920 mW/g

SAR(1 g) = 0.527 mW/g; SAR(10 g) = 0.282 mW/g

Maximum value of SAR (measured) = 0.745 W/kg

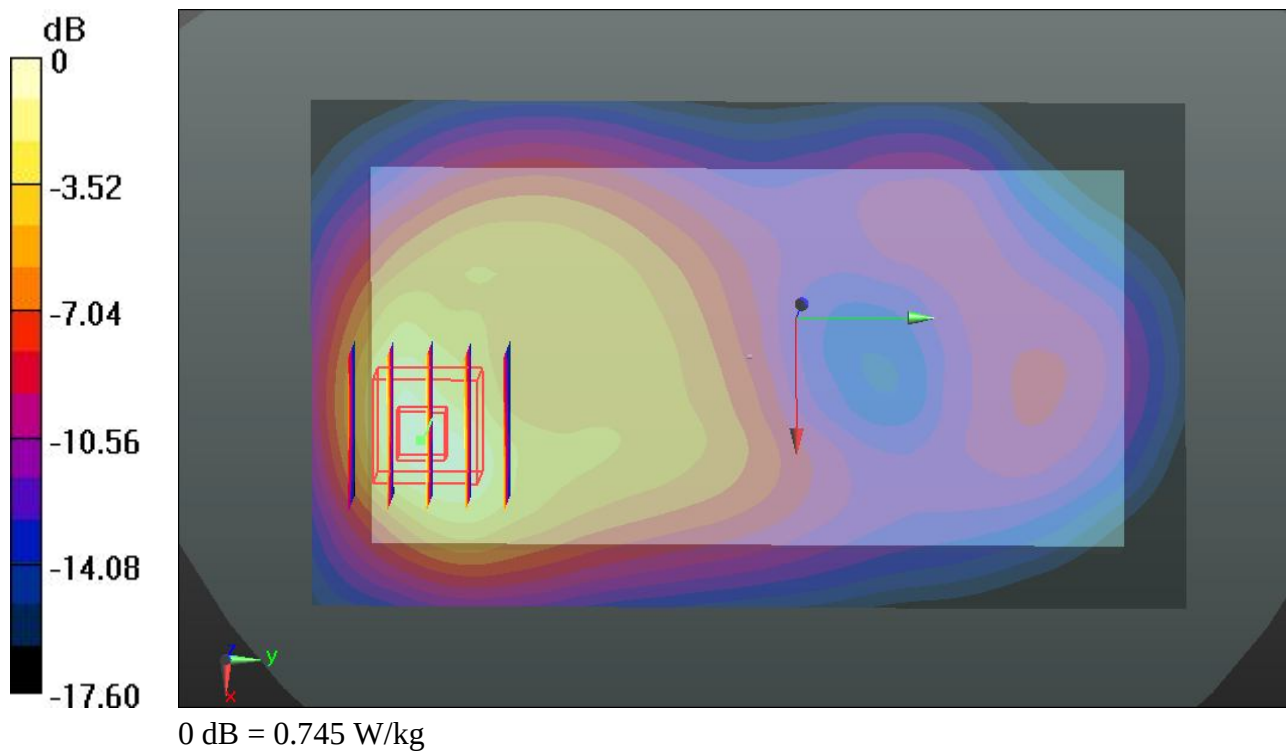

12 WCDMA V_RMC 12.2K_Front_1cm_Ch4182**DUT: 330701**

Communication System: UMTS; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: MSL_835_130322 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.978$ mho/m; $\epsilon_r =$

54.384; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.5, 9.5, 9.5); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch4182/Area Scan (71x121x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.421 W/kg


Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 21.269 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 0.452 mW/g

SAR(1 g) = 0.361 mW/g; SAR(10 g) = 0.281 mW/g

Maximum value of SAR (measured) = 0.410 W/kg

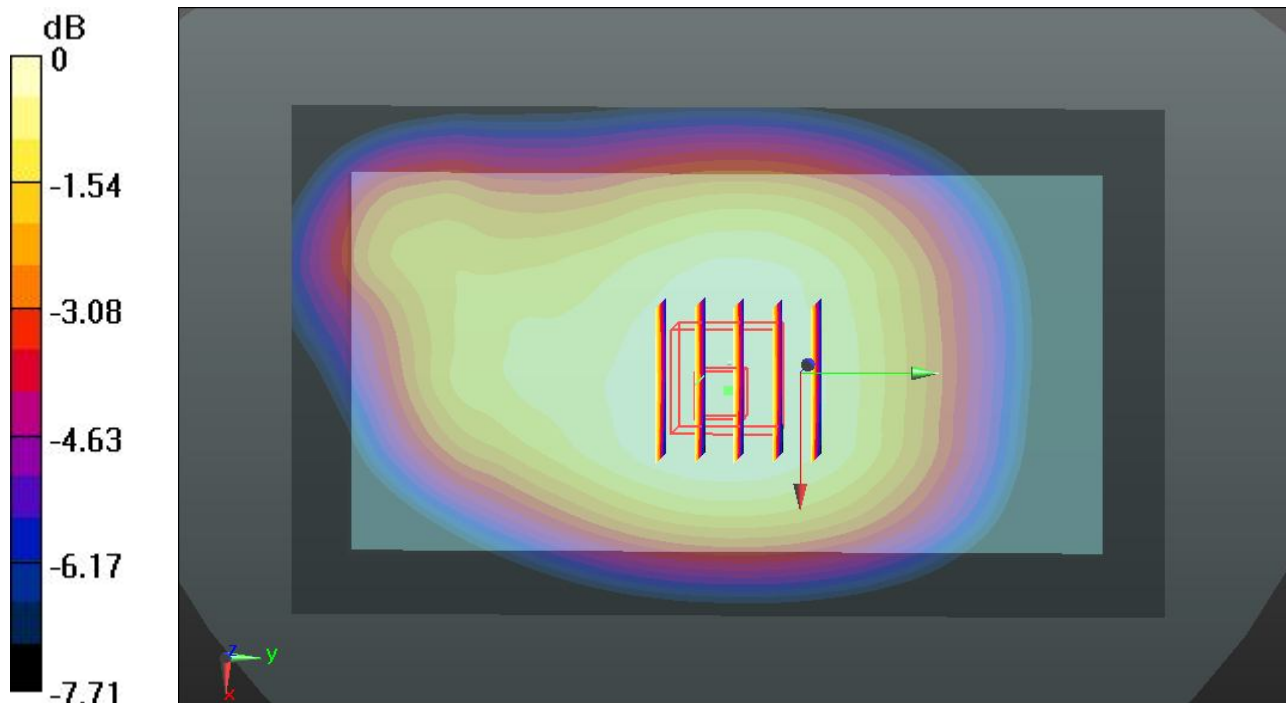

0 dB = 0.410 W/kg

13 WCDMA V_RMC 12.2K_Back_1cm_Ch4182**DUT: 330701**

Communication System: UMTS; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: MSL_835_130322 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.978$ mho/m; $\epsilon_r = 54.384$; ρ

$= 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.5, 9.5, 9.5); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch4182/Area Scan (71x121x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.599 W/kg

Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.086 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.639 mW/g

SAR(1 g) = 0.508 mW/g; SAR(10 g) = 0.398 mW/g

Maximum value of SAR (measured) = 0.582 W/kg


Ch4182/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.086 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.548 mW/g

SAR(1 g) = 0.326 mW/g; SAR(10 g) = 0.196 mW/g

Maximum value of SAR (measured) = 0.485 W/kg

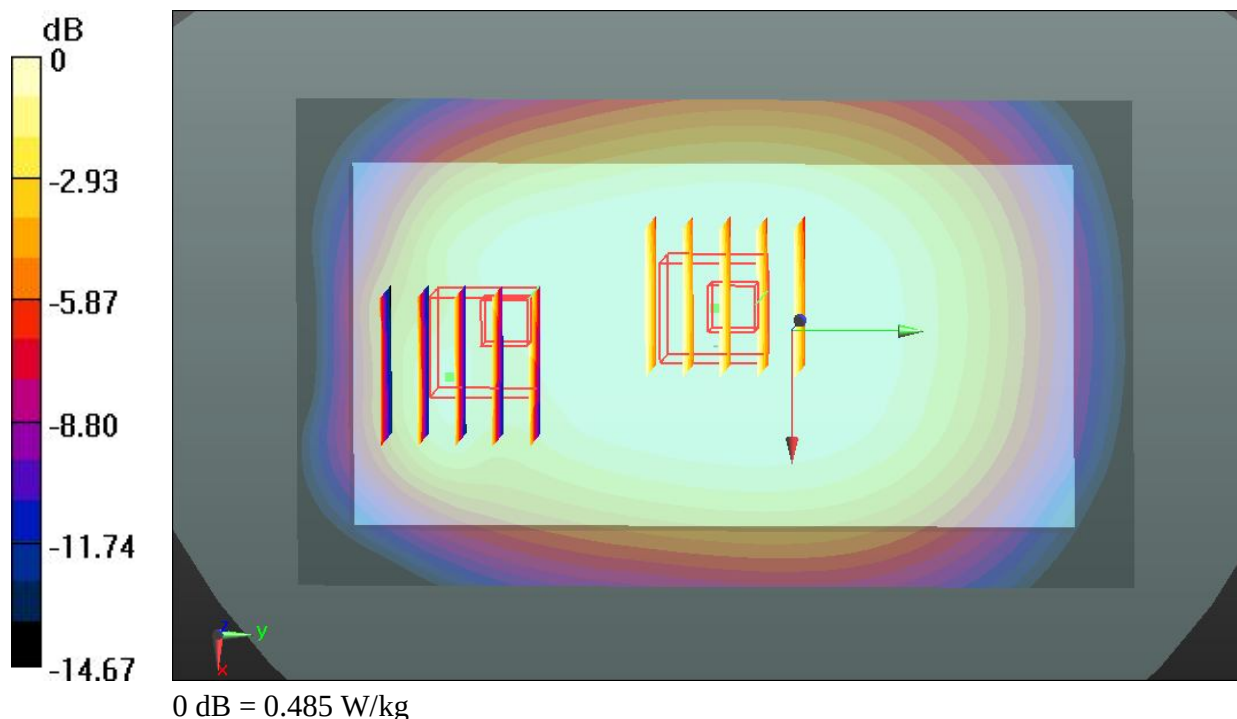

14 WCDMA V_RMC 12.2K_Left Side_1cm_Ch4182**DUT: 330701**

Communication System: UMTS; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: MSL_835_130322 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.978$ mho/m; $\epsilon_r =$

54.384; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.5, 9.5, 9.5); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch4182/Area Scan (41x121x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.348 W/kg


Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.343 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 0.397 mW/g

SAR(1 g) = 0.284 mW/g; SAR(10 g) = 0.198 mW/g

Maximum value of SAR (measured) = 0.346 W/kg

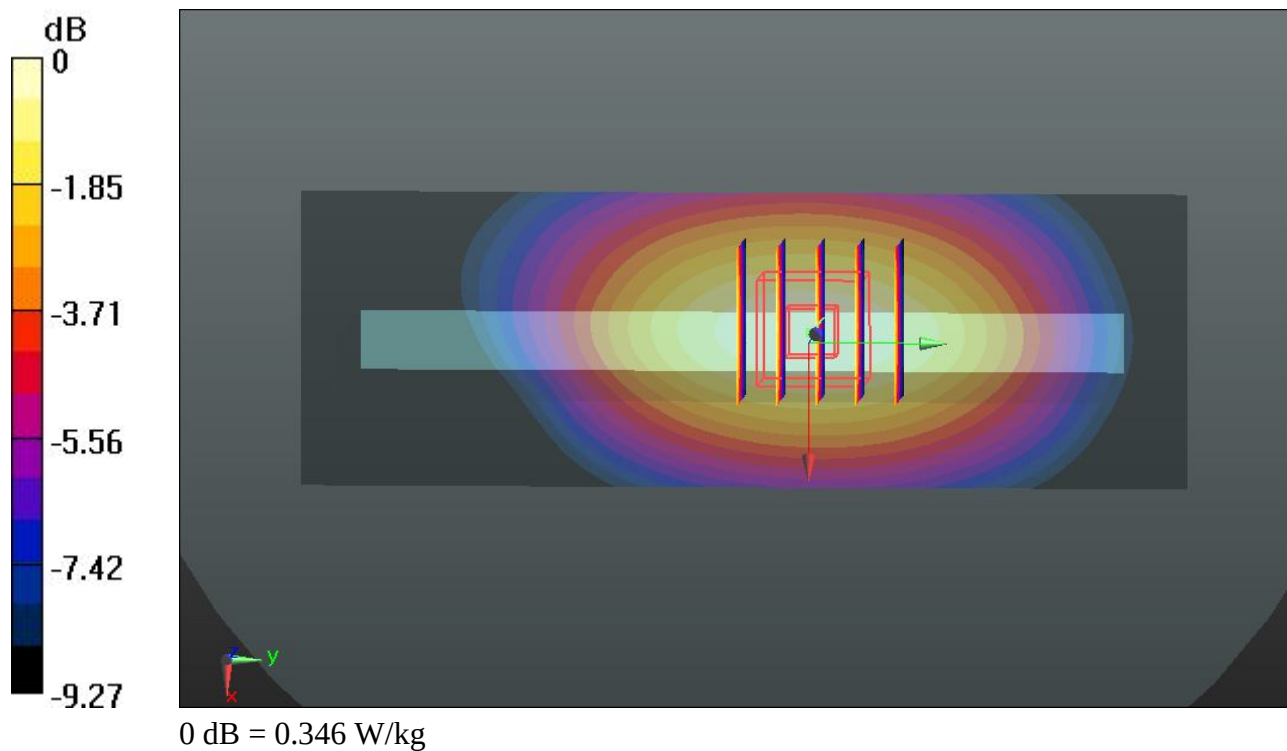

15 WCDMA V_RMC 12.2K_Right Side_1cm_Ch4182**DUT: 330701**

Communication System: UMTS; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: MSL_835_130322 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.978$ mho/m; $\epsilon_r =$

54.384; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.5, 9.5, 9.5); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch4182/Area Scan (41x121x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.474 W/kg


Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.468 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.537 mW/g

SAR(1 g) = 0.387 mW/g; SAR(10 g) = 0.270 mW/g

Maximum value of SAR (measured) = 0.469 W/kg

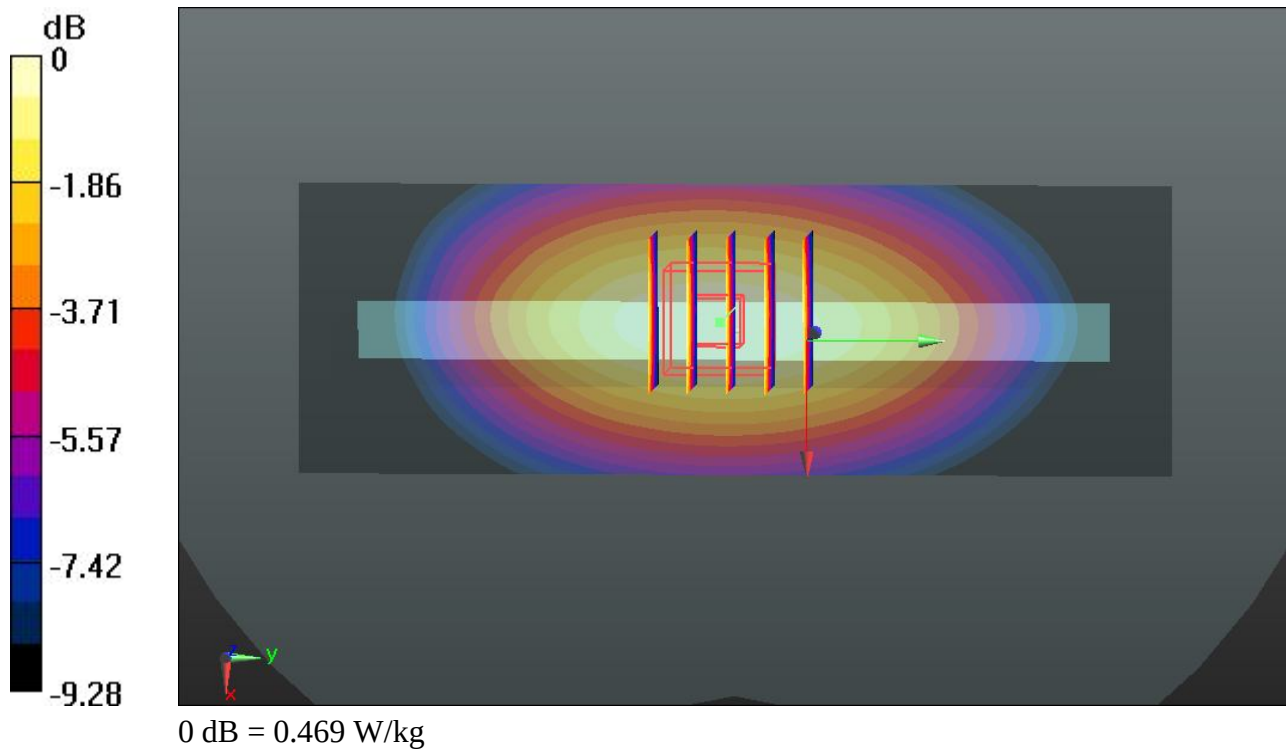

16 WCDMA V_RMC 12.2K_Bottom Side_1cm_Ch4182**DUT: 330701**

Communication System: UMTS; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: MSL_835_130322 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.978$ mho/m; $\epsilon_r = 54.384$; ρ $= 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.5, 9.5, 9.5); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch4182/Area Scan (41x71x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0999 W/kg

Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.139 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.123 mW/g

SAR(1 g) = 0.077 mW/g; SAR(10 g) = 0.050 mW/g

Maximum value of SAR (measured) = 0.0965 W/kg


Ch4182/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.139 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.110 mW/g

SAR(1 g) = 0.066 mW/g; SAR(10 g) = 0.041 mW/g

Maximum value of SAR (measured) = 0.0868 W/kg

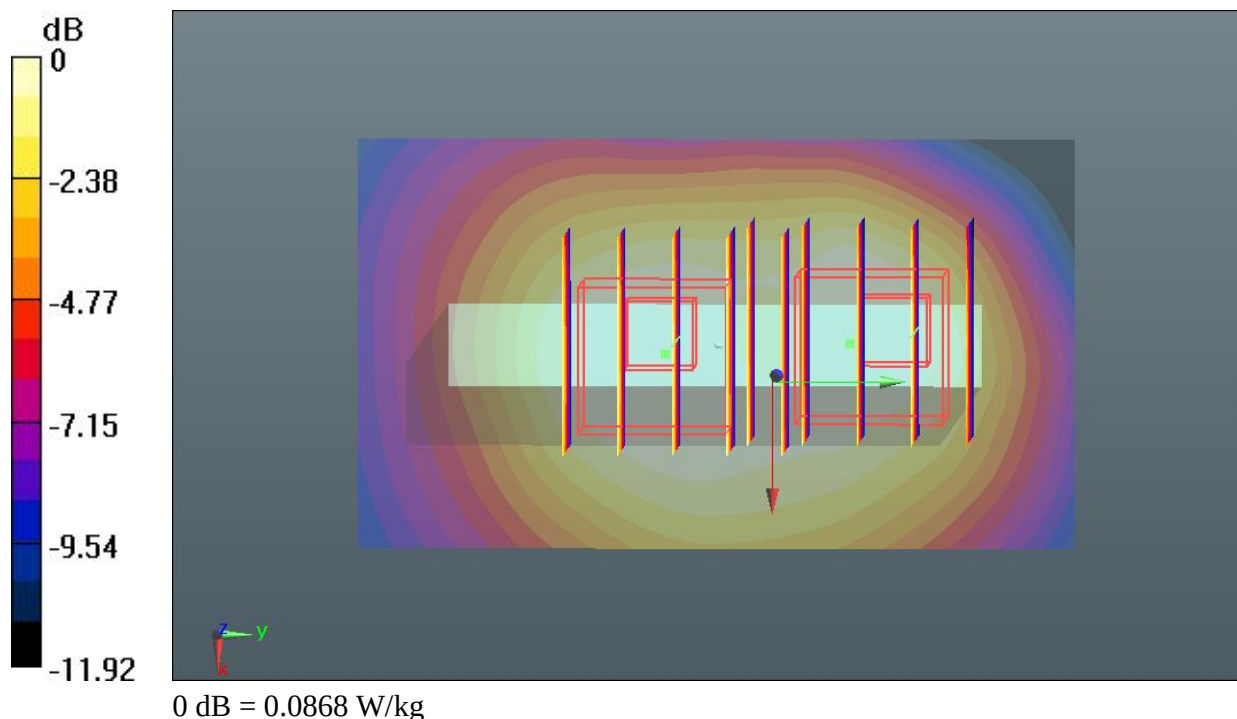

17 WCDMA II_RMC 12.2K_Front_1cm_Ch9262**DUT: 330701**

Communication System: UMTS; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: MSL_1900_130324 Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.469$ mho/m; $\epsilon_r = 54.965$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C ; Liquid Temperature : 21.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.67, 7.67, 7.67); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch9262/Area Scan (71x121x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.968 W/kg

Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.570 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 1.202 mW/g

SAR(1 g) = 0.719 mW/g; SAR(10 g) = 0.422 mW/g

Maximum value of SAR (measured) = 0.956 W/kg


Ch9262/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.570 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 1.120 mW/g

SAR(1 g) = 0.612 mW/g; SAR(10 g) = 0.389 mW/g

Maximum value of SAR (measured) = 0.930 W/kg

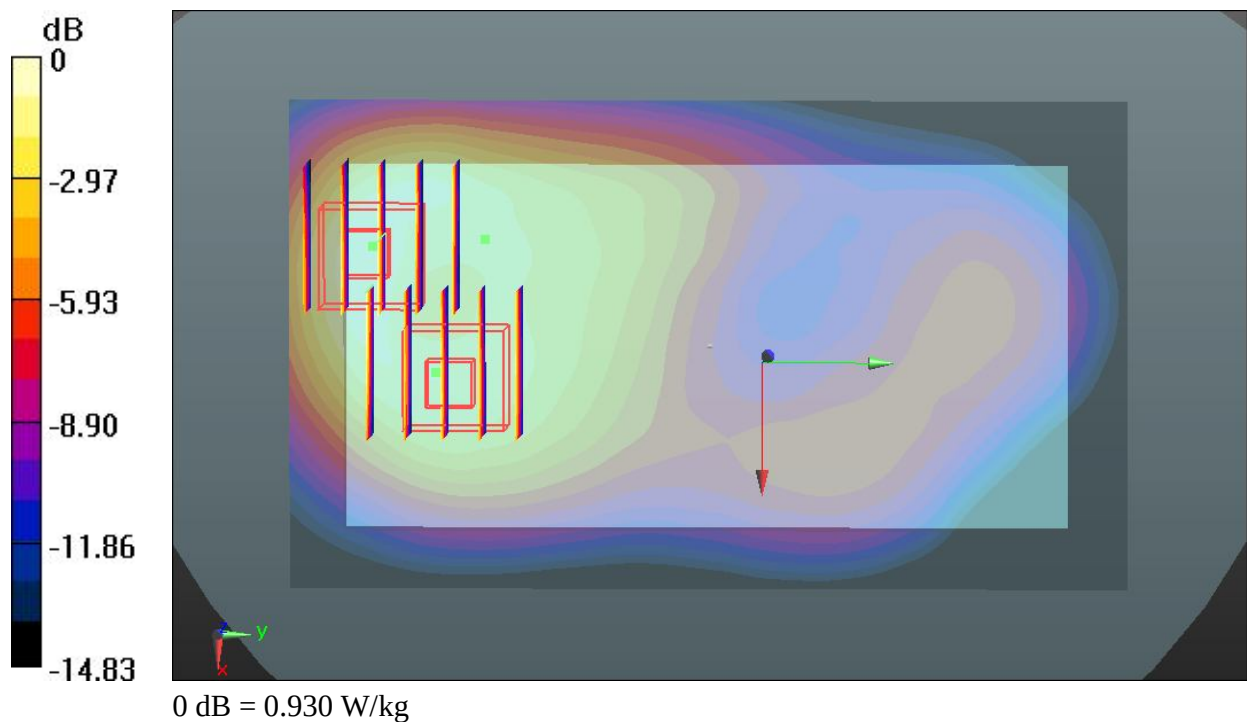

18 WCDMA II_RMC 12.2K_Back_1cm_Ch9262**DUT: 330701**

Communication System: UMTS; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: MSL_1900_130324 Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.469$ mho/m; $\epsilon_r =$

54.965; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C ; Liquid Temperature : 21.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.67, 7.67, 7.67); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch9262/Area Scan (71x121x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.31 W/kg


Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 31.488 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 1.727 mW/g

SAR(1 g) = 1.000 mW/g; SAR(10 g) = 0.551 mW/g

Maximum value of SAR (measured) = 1.40 W/kg

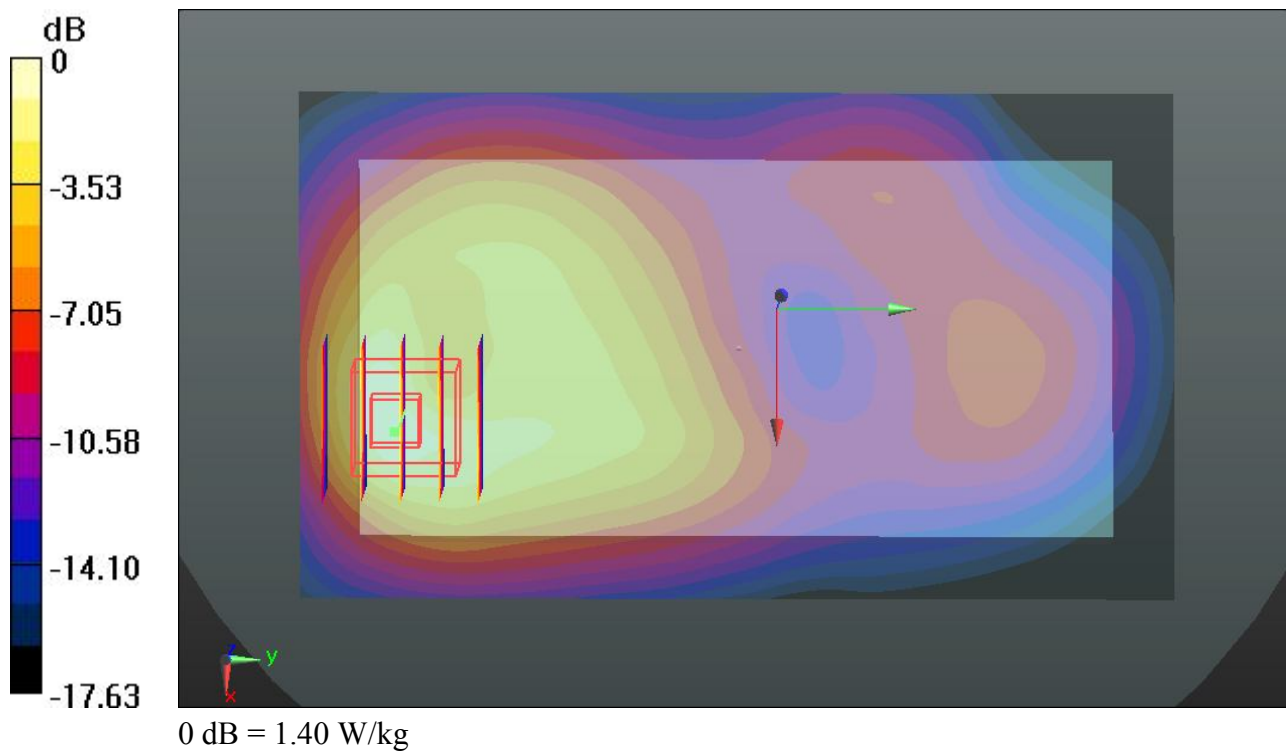

19 WCDMA II_RMC 12.2K_Left Side_1cm_Ch9262**DUT: 330701**

Communication System: UMTS; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: MSL_1900_130324 Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.469$ mho/m; $\epsilon_r =$ 54.965; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C ; Liquid Temperature : 21.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.67, 7.67, 7.67); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch9262/Area Scan (41x121x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.427 W/kg


Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 17.360 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.542 mW/g

SAR(1 g) = 0.333 mW/g; SAR(10 g) = 0.197 mW/g

Maximum value of SAR (measured) = 0.437 W/kg

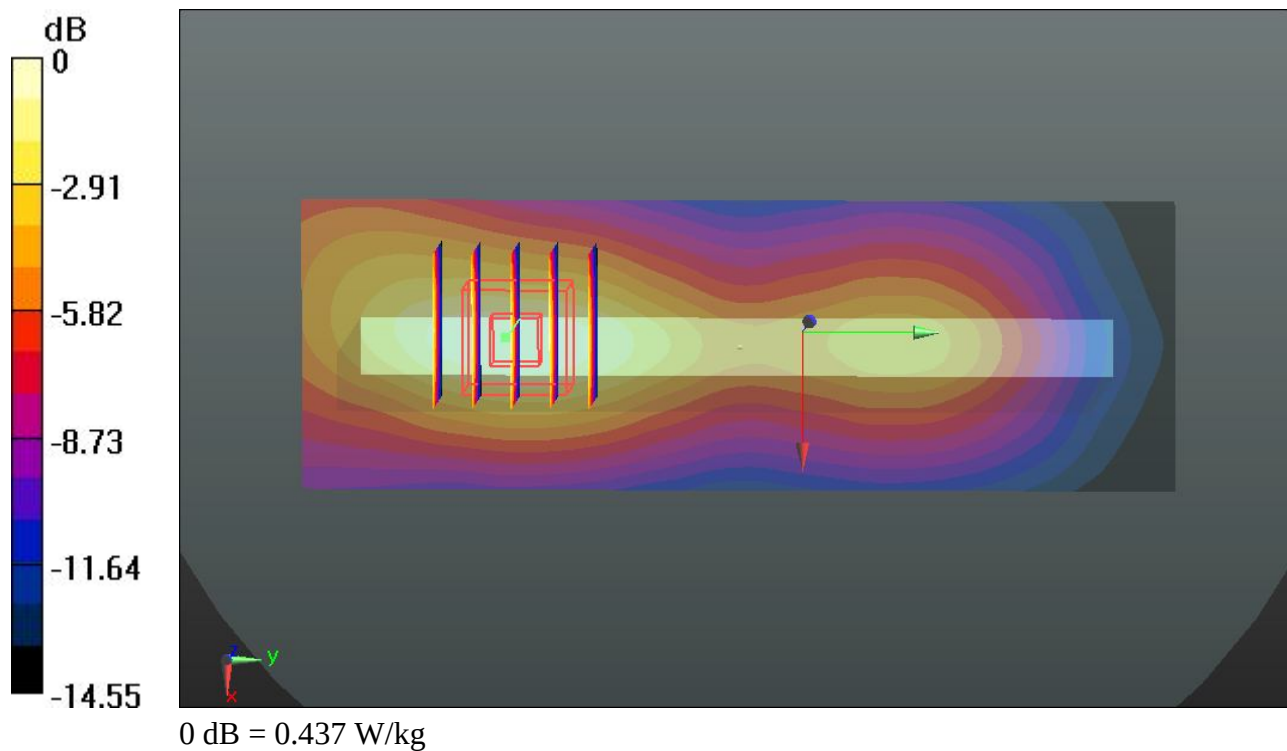

20 WCDMA II_RMC 12.2K_Right Side_1cm_Ch9262**DUT: 330701**

Communication System: UMTS; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: MSL_1900_130324 Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.469$ mho/m; $\epsilon_r = 54.965$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C ; Liquid Temperature : 21.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.67, 7.67, 7.67); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch9262/Area Scan (41x121x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.218 W/kg

Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.653 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.266 mW/g

SAR(1 g) = 0.171 mW/g; SAR(10 g) = 0.105 mW/g

Maximum value of SAR (measured) = 0.220 W/kg


Ch9262/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.653 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.210 mW/g

SAR(1 g) = 0.132 mW/g; SAR(10 g) = 0.080 mW/g

Maximum value of SAR (measured) = 0.172 W/kg

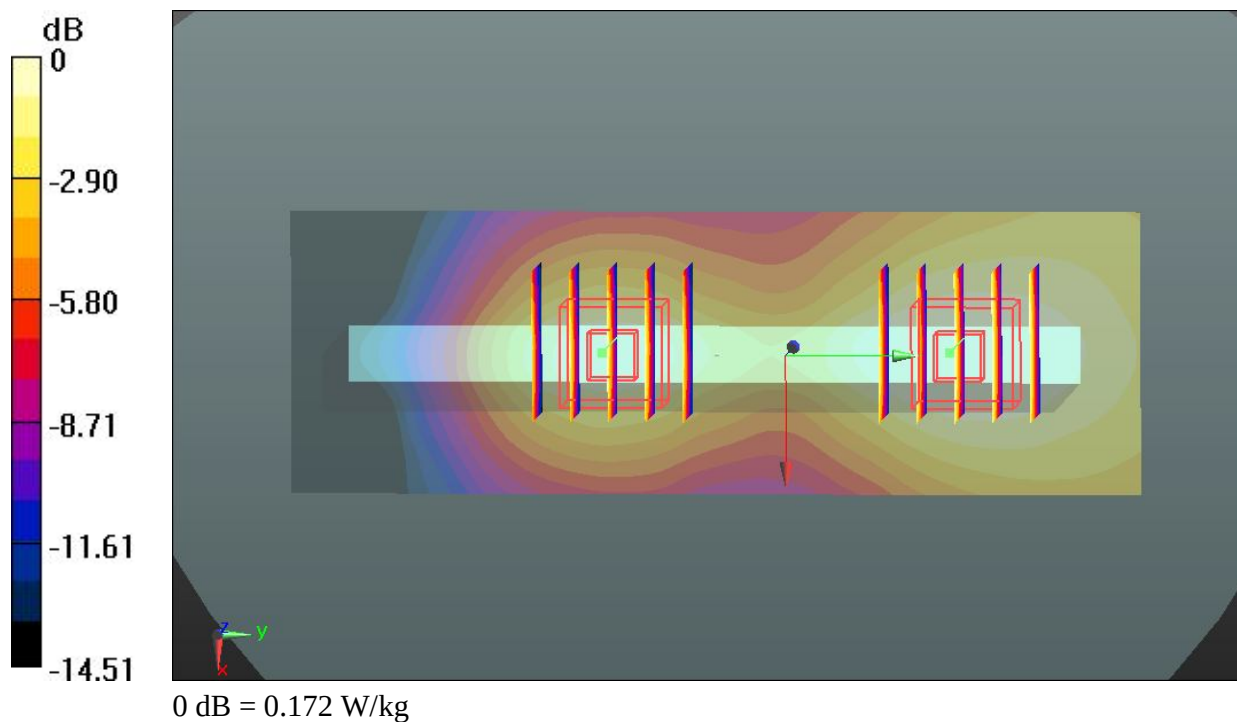

21 WCDMA II_RMC 12.2K_Bottom Side_1cm_Ch9262**DUT: 330701**

Communication System: UMTS; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: MSL_1900_130324 Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.469$ mho/m; $\epsilon_r =$ 54.965; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C ; Liquid Temperature : 21.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.67, 7.67, 7.67); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch9262/Area Scan (41x71x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.845 W/kg


Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.778 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.069 mW/g

SAR(1 g) = 0.643 mW/g; SAR(10 g) = 0.364 mW/g

Maximum value of SAR (measured) = 0.870 W/kg

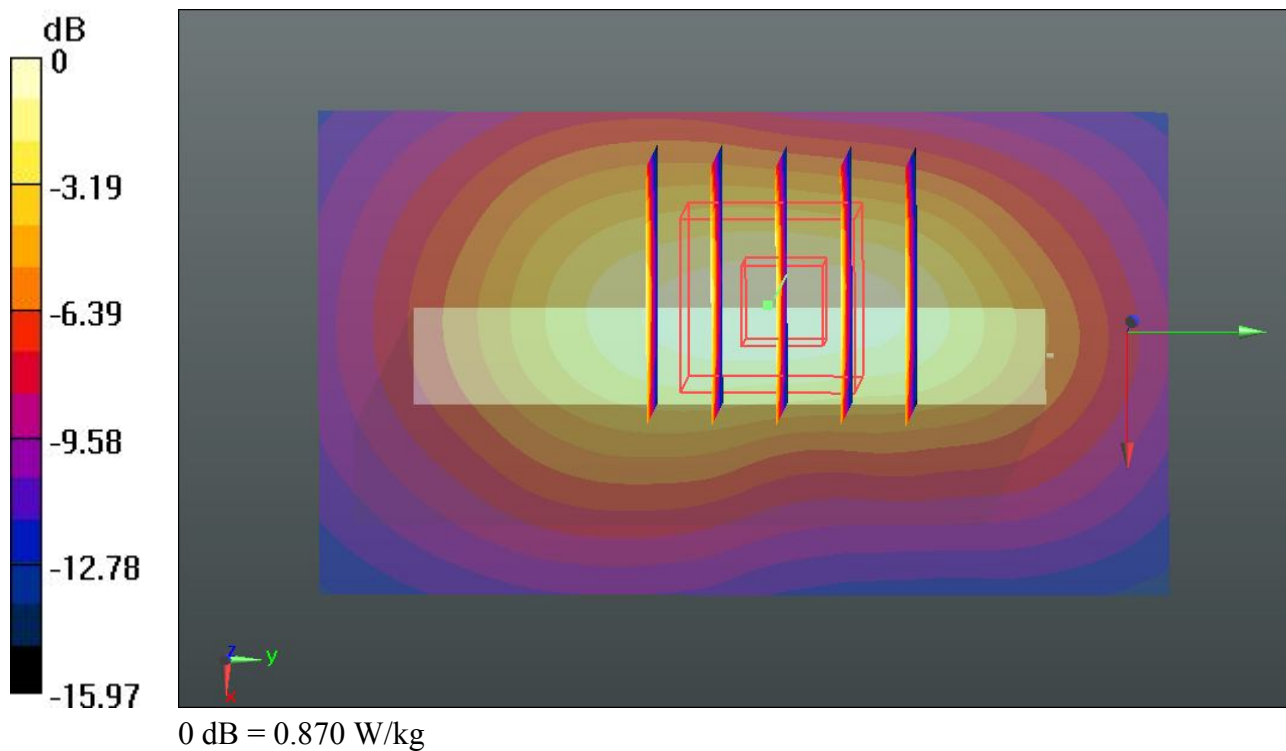

22 WCDMA II_RMC 12.2K_Front_1cm_Ch9400**DUT: 330701**

Communication System: UMTS; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: MSL_1900_130324 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.506$ mho/m; $\epsilon_r = 54.9$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C ; Liquid Temperature : 21.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.67, 7.67, 7.67); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch9400/Area Scan (71x121x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.821 W/kg

Ch9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.170 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.967 mW/g

SAR(1 g) = 0.583 mW/g; SAR(10 g) = 0.335 mW/g

Maximum value of SAR (measured) = 0.772 W/kg


Ch9400/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.170 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.935 mW/g

SAR(1 g) = 0.469 mW/g; SAR(10 g) = 0.277 mW/g

Maximum value of SAR (measured) = 0.766 W/kg

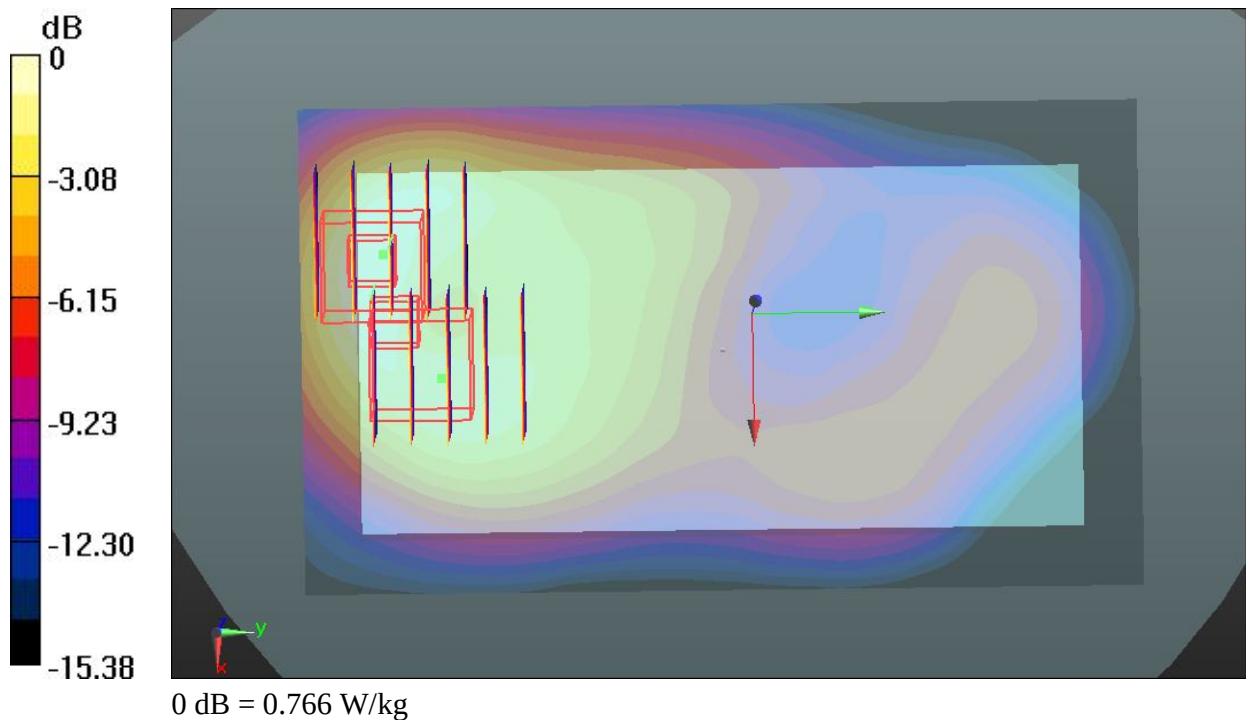

23 WCDMA II_RMC 12.2K_Front_1cm_Ch9538**DUT: 330701**

Communication System: UMTS; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: MSL_1900_130324 Medium parameters used: $f = 1908$ MHz; $\sigma = 1.535$ mho/m; $\epsilon_r =$ 54.854; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C ; Liquid Temperature : 21.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.67, 7.67, 7.67); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch9538/Area Scan (71x121x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.758 W/kg


Ch9538/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 22.410 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.904 mW/g

SAR(1 g) = 0.542 mW/g; SAR(10 g) = 0.308 mW/g

Maximum value of SAR (measured) = 0.732 W/kg

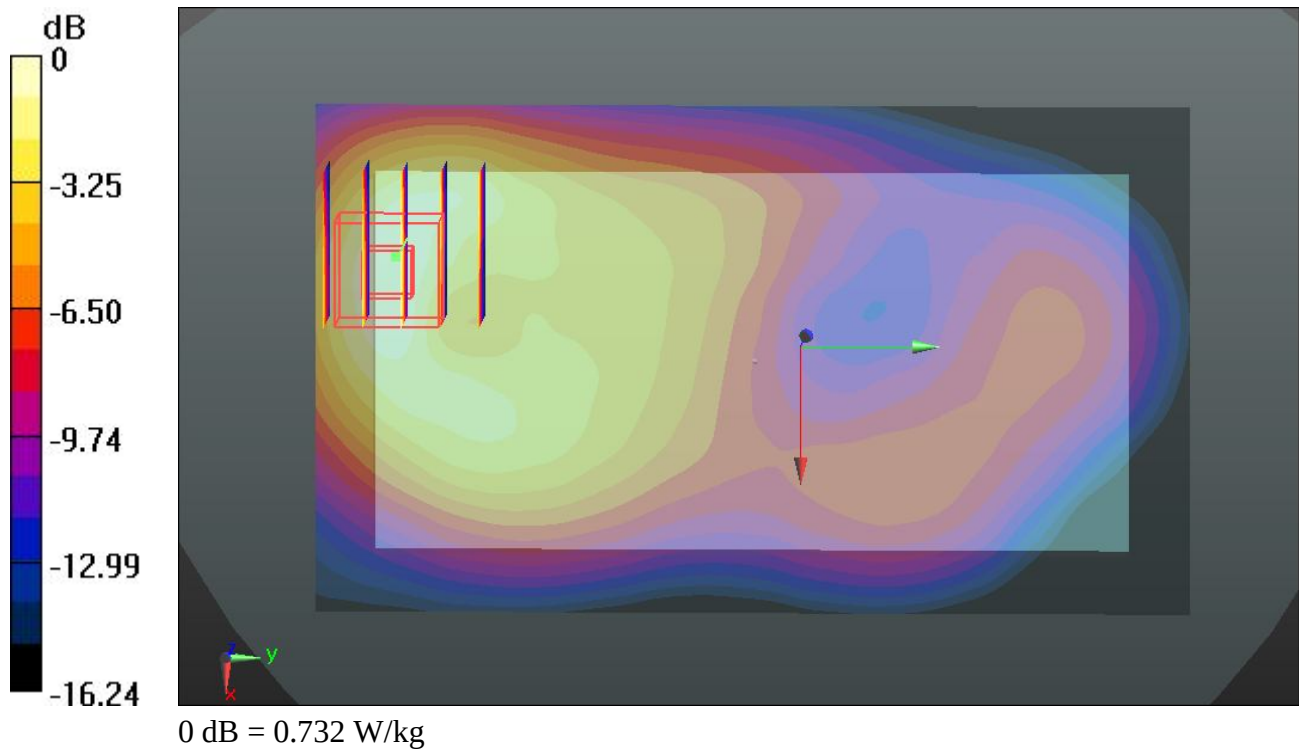

24 WCDMA II_RMC 12.2K_Back_1cm_Ch9400**DUT: 330701**

Communication System: UMTS; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: MSL_1900_130324 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.506$ mho/m; $\epsilon_r = 54.9$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C ; Liquid Temperature : 21.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.67, 7.67, 7.67); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch9400/Area Scan (71x121x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.22 W/kg


Ch9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.950 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.635 mW/g

SAR(1 g) = 0.935 mW/g; SAR(10 g) = 0.508 mW/g

Maximum value of SAR (measured) = 1.32 W/kg

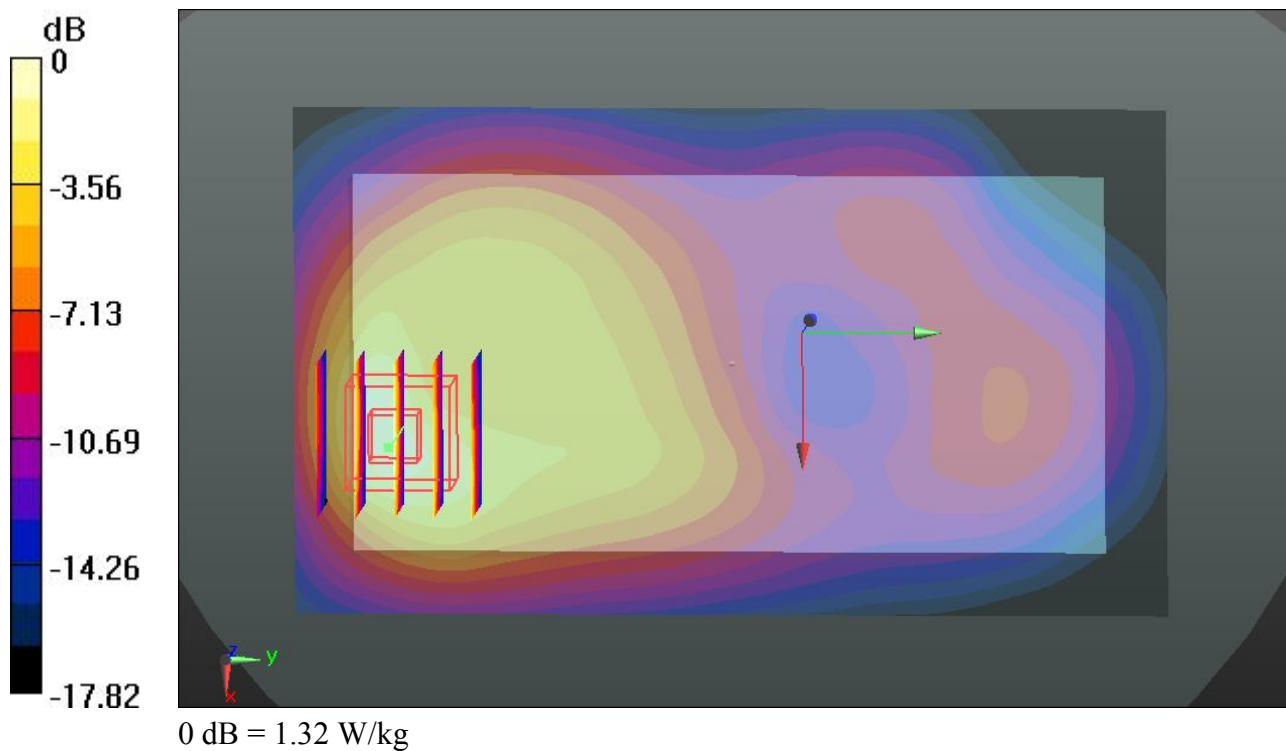

25 WCDMA II_RMC 12.2K_Back_1cm_Ch9538**DUT: 330701**

Communication System: UMTS; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: MSL_1900_130324 Medium parameters used: $f = 1908$ MHz; $\sigma = 1.535$ mho/m; $\epsilon_r =$

54.854; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C ; Liquid Temperature : 21.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.67, 7.67, 7.67); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch9538/Area Scan (71x121x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.30 W/kg


Ch9538/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 30.561 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.736 mW/g

SAR(1 g) = 0.994 mW/g; SAR(10 g) = 0.534 mW/g

Maximum value of SAR (measured) = 1.40 W/kg

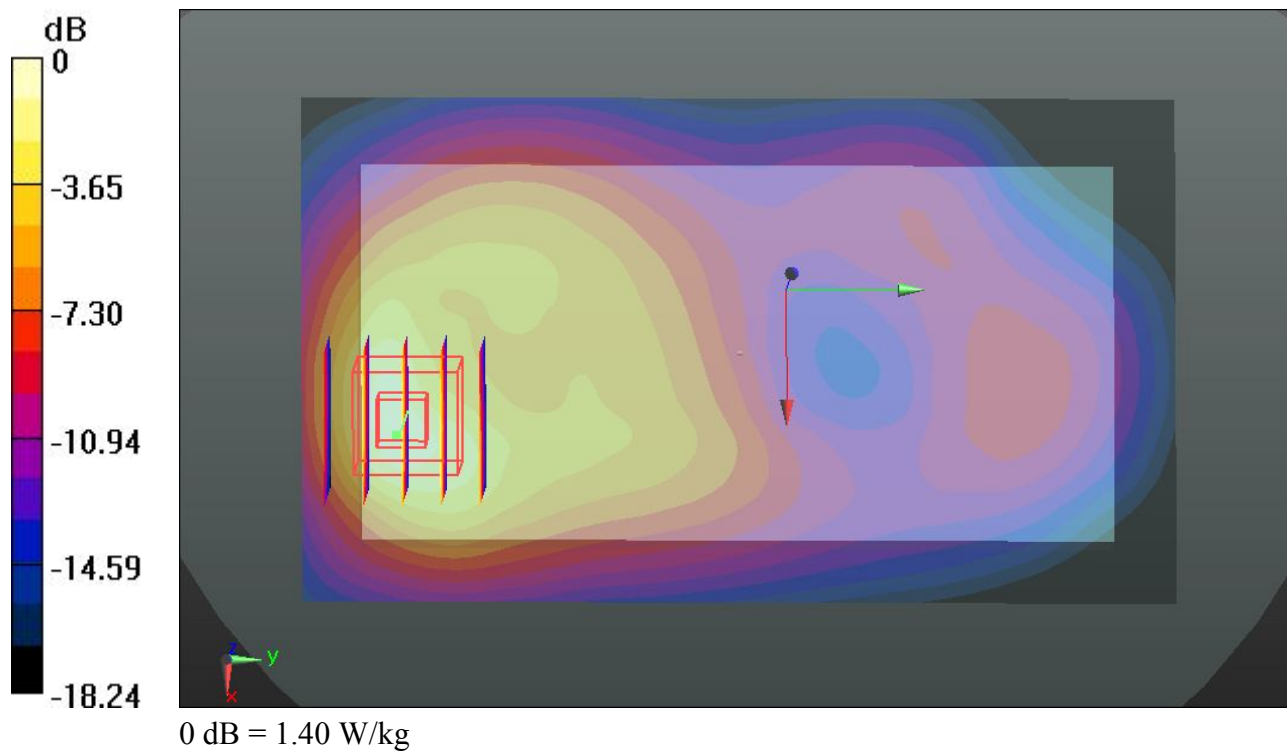

26 WCDMA II_RMC 12.2K_Back_1cm_Ch9262_Headset**DUT: 330701**

Communication System: UMTS; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: MSL_1900_130324 Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.469$ mho/m; $\epsilon_r =$ 54.965; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C ; Liquid Temperature : 21.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.67, 7.67, 7.67); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch9262/Area Scan (71x121x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.29 W/kg


Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 32.581 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 1.823 mW/g

SAR(1 g) = 1.060 mW/g; SAR(10 g) = 0.589 mW/g

Maximum value of SAR (measured) = 1.49 W/kg

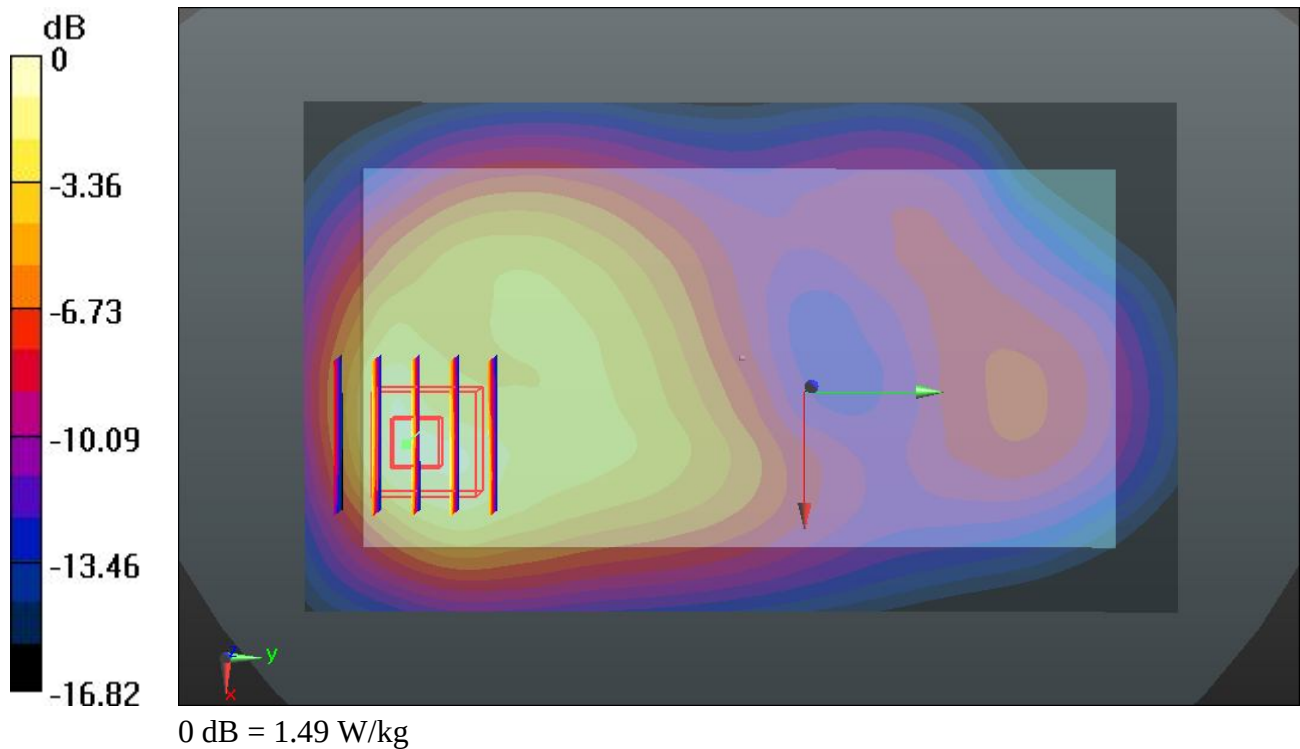

35 WCDMA II_RMC 12.2K_Back_1cm_Ch9262_Headset_Repeat SAR**DUT: 330701**

Communication System: UMTS; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: MSL_1900_130324 Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.469$ mho/m; $\epsilon_r = 54.965$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C ; Liquid Temperature : 21.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.67, 7.67, 7.67); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch9262/Area Scan (71x121x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.30 W/kg

Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 32.750 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 1.765 mW/g

SAR(1 g) = 1.040 mW/g; SAR(10 g) = 0.584 mW/g

Maximum value of SAR (measured) = 1.45 W/kg


Ch9262/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 32.750 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 1.143 mW/g

SAR(1 g) = 0.690 mW/g; SAR(10 g) = 0.446 mW/g

Maximum value of SAR (measured) = 0.931 W/kg

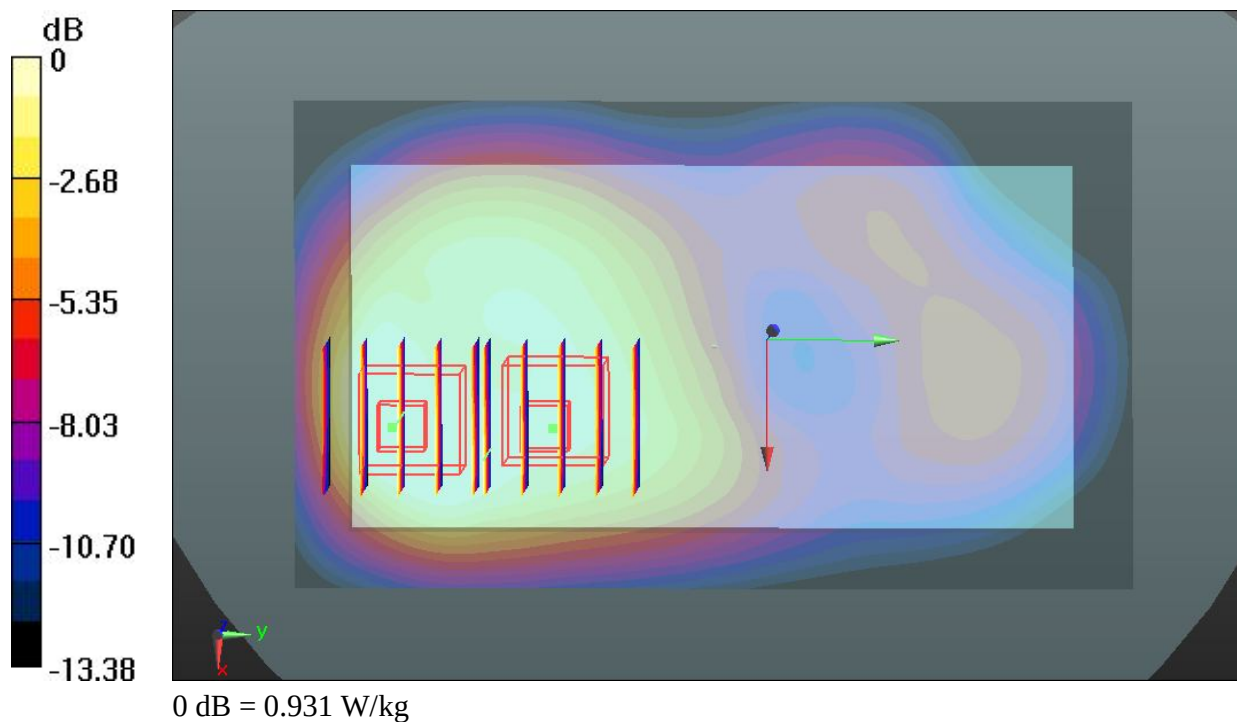

27 WCDMA II_RMC 12.2K_Back_1cm_Ch9400_Headset**DUT: 330701**

Communication System: UMTS; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: MSL_1900_130324 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.506$ mho/m; $\epsilon_r = 54.9$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C ; Liquid Temperature : 21.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.67, 7.67, 7.67); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch9400/Area Scan (71x121x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.30 W/kg


Ch9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 31.770 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.795 mW/g

SAR(1 g) = 1.040 mW/g; SAR(10 g) = 0.566 mW/g

Maximum value of SAR (measured) = 1.46 W/kg

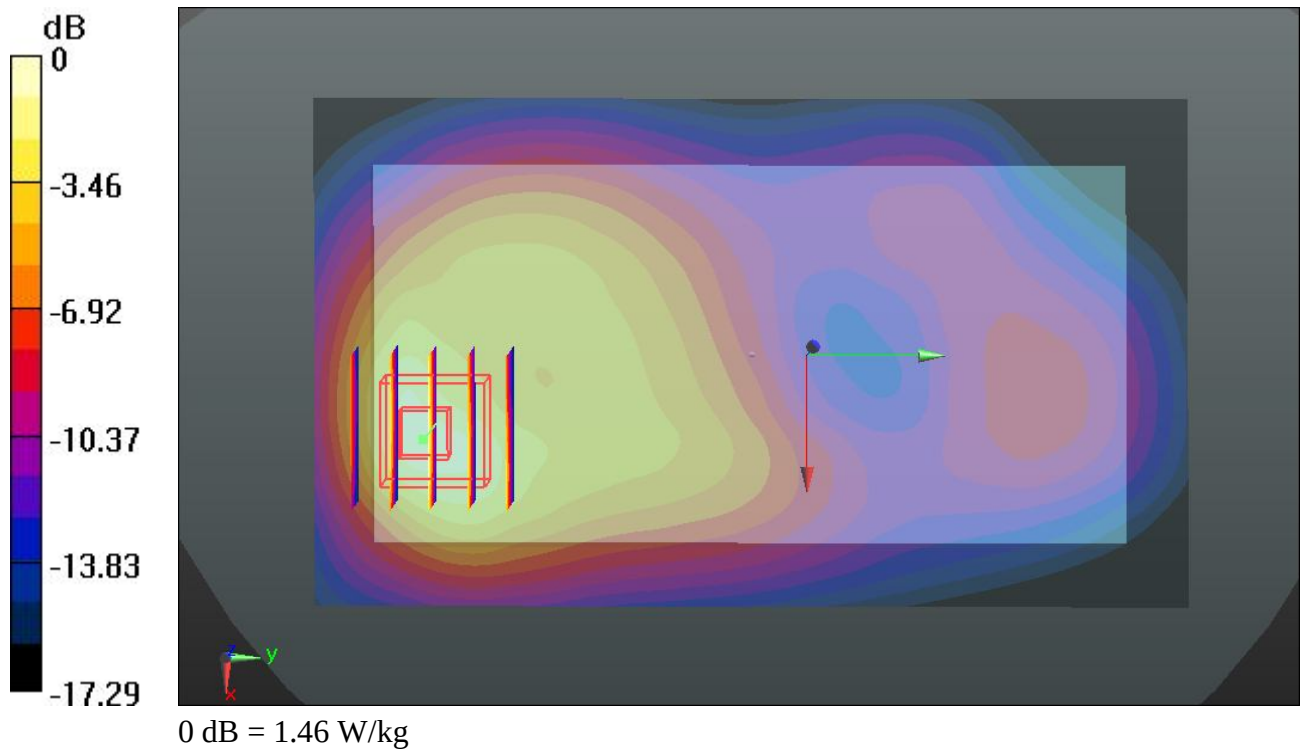

28 WCDMA II_RMC 12.2K_Back_1cm_Ch9538_Headset**DUT: 330701**

Communication System: UMTS; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: MSL_1900_130324 Medium parameters used: $f = 1908$ MHz; $\sigma = 1.535$ mho/m; $\epsilon_r =$ 54.854; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C ; Liquid Temperature : 21.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.67, 7.67, 7.67); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch9538/Area Scan (71x121x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.43 W/kg


Ch9538/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 32.943 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 1.668 mW/g

SAR(1 g) = 0.972 mW/g; SAR(10 g) = 0.532 mW/g

Maximum value of SAR (measured) = 1.36 W/kg

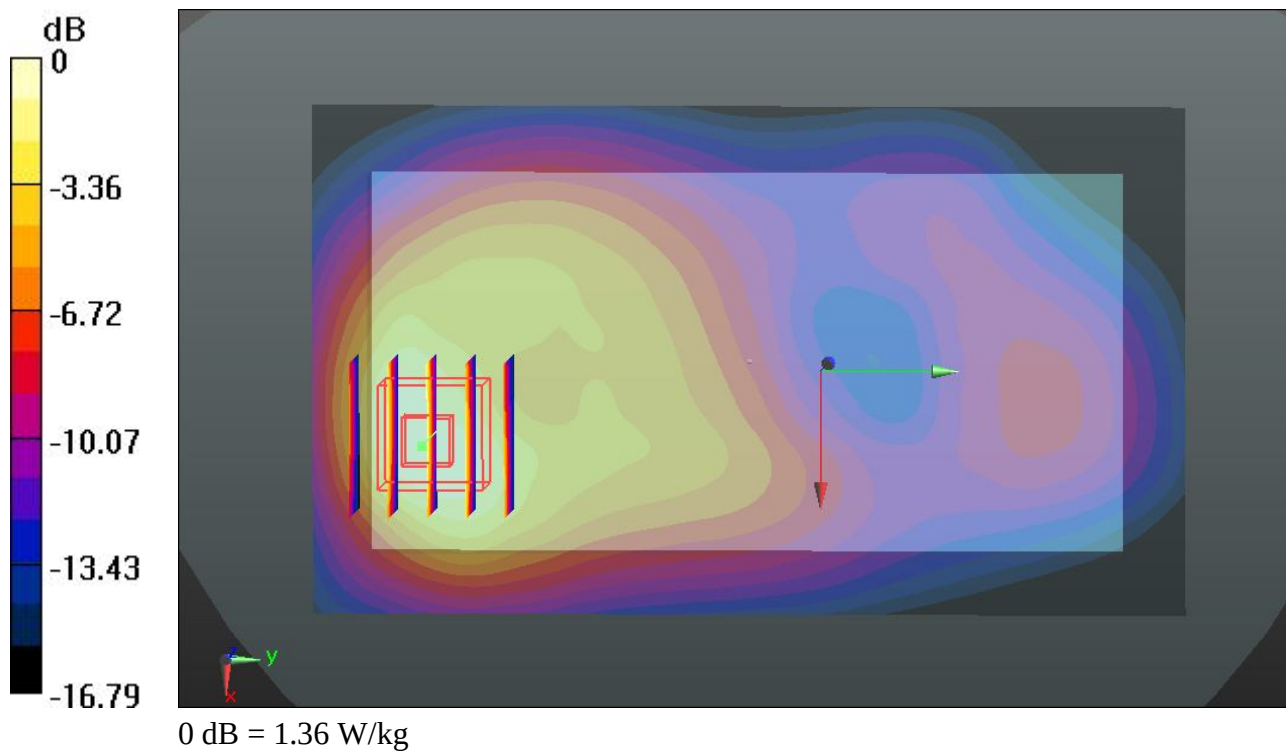

29 WCDMA II_HSDPA Subtest 1_Back_1cm_Ch9262**DUT: 330701**

Communication System: UMTS; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: MSL_1900_130324 Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.469$ mho/m; $\epsilon_r =$ 54.965; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C ; Liquid Temperature : 21.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.67, 7.67, 7.67); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch9262/Area Scan (71x121x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.36 W/kg


Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 32.266 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.696 mW/g

SAR(1 g) = 1.010 mW/g; SAR(10 g) = 0.570 mW/g

Maximum value of SAR (measured) = 1.40 W/kg

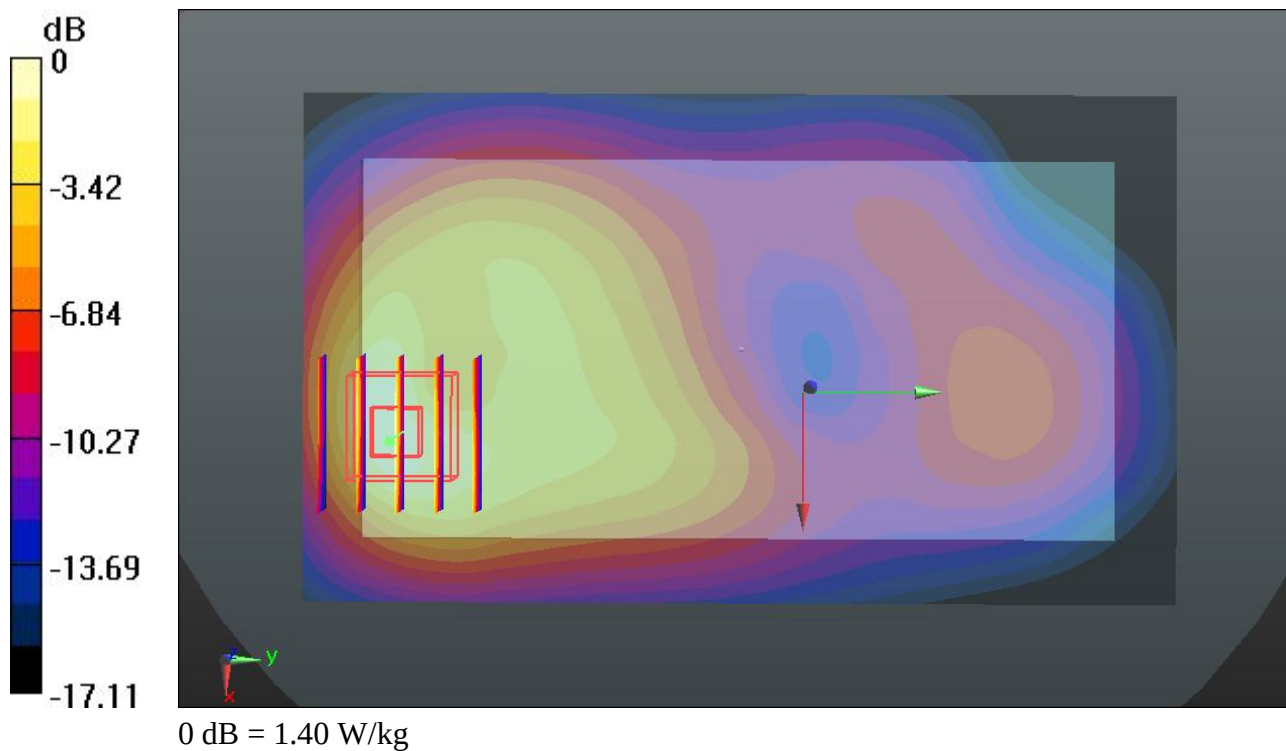

30 WCDMA II_HSDPA Subtest 1_Back_1cm_Ch9400**DUT: 330701**

Communication System: UMTS; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: MSL_1900_130324 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.506$ mho/m; $\epsilon_r = 54.9$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C ; Liquid Temperature : 21.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.67, 7.67, 7.67); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch9400/Area Scan (71x121x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.23 W/kg


Ch9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.399 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.571 mW/g

SAR(1 g) = 0.927 mW/g; SAR(10 g) = 0.515 mW/g

Maximum value of SAR (measured) = 1.29 W/kg

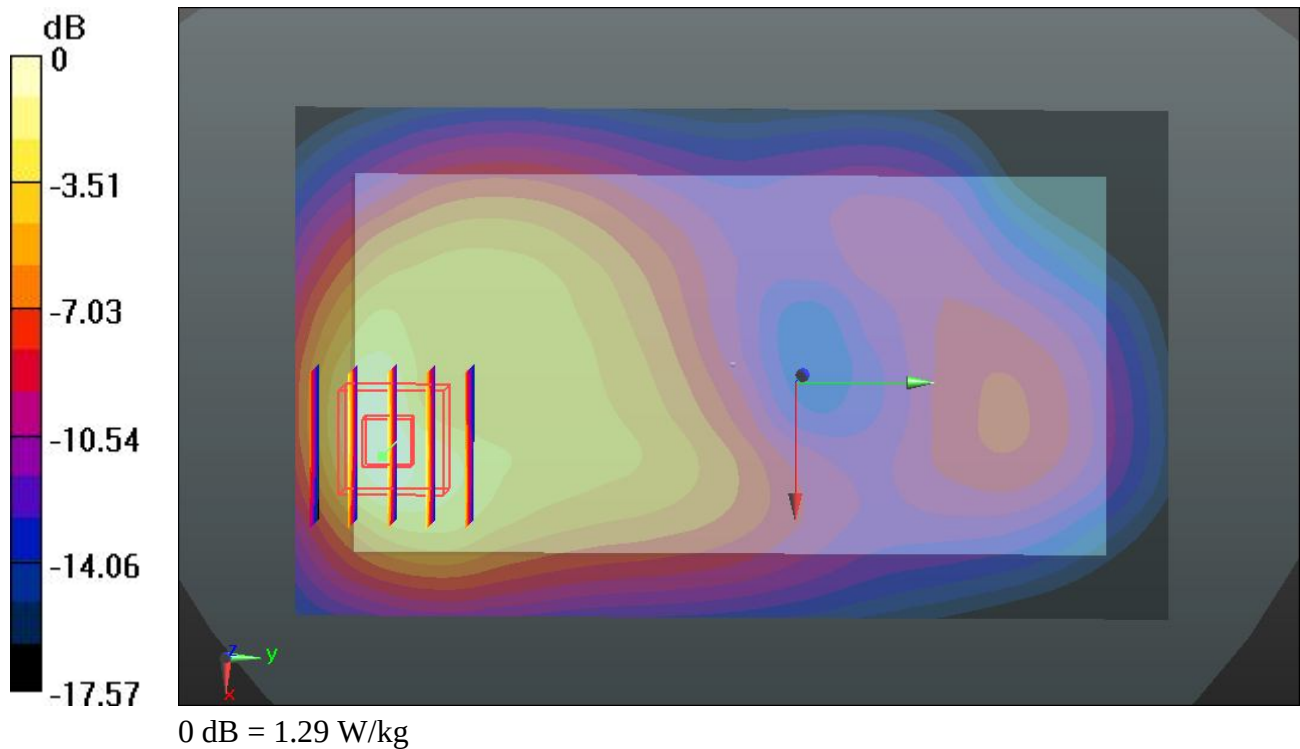

31 WCDMA II_HSDPA Subtest 1_Back_1cm_Ch9538**DUT: 330701**

Communication System: UMTS; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: MSL_1900_130324 Medium parameters used: $f = 1908$ MHz; $\sigma = 1.535$ mho/m; $\epsilon_r =$ 54.854; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C ; Liquid Temperature : 21.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.67, 7.67, 7.67); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch9538/Area Scan (71x121x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.30 W/kg


Ch9538/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 30.228 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.668 mW/g

SAR(1 g) = 0.985 mW/g; SAR(10 g) = 0.539 mW/g

Maximum value of SAR (measured) = 1.35 W/kg

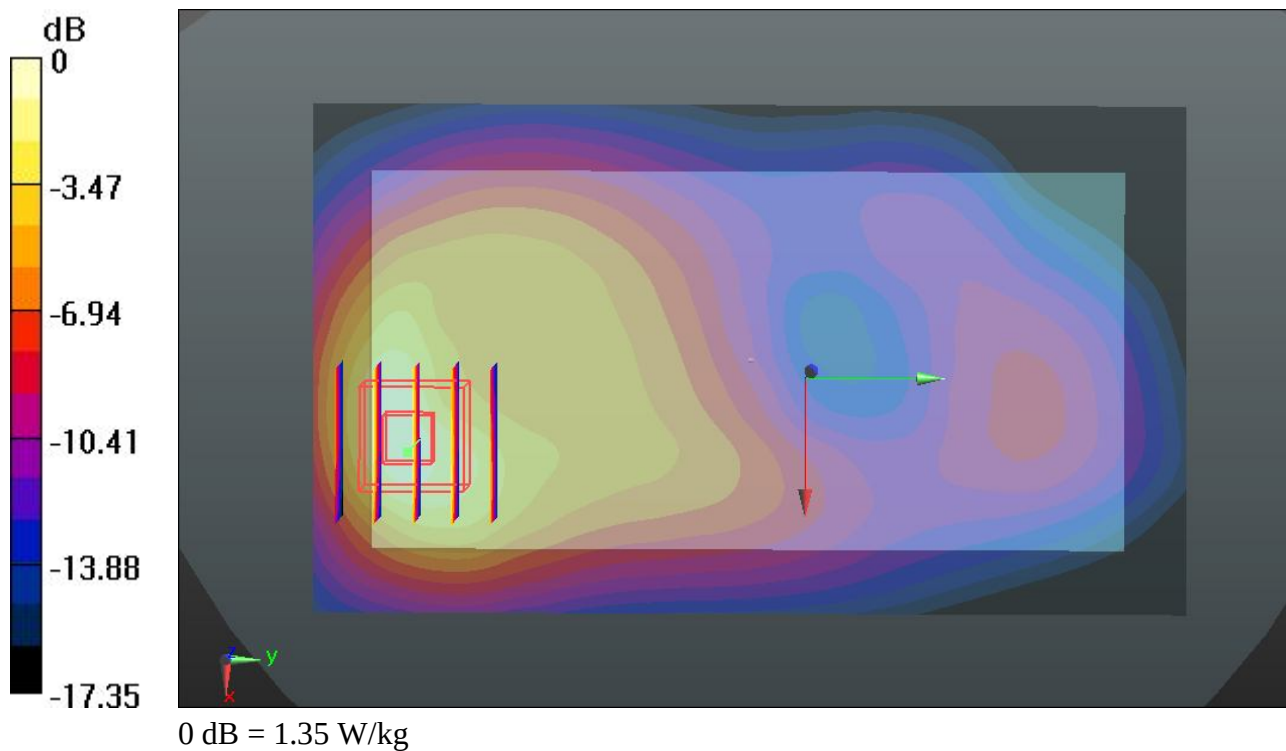

32 WCDMA II_HSUPA Subtest 5_Back_1cm_Ch9262**DUT: 330701**

Communication System: UMTS; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: MSL_1900_130324 Medium parameters used: $f = 1852.4$ MHz; $\sigma = 1.469$ mho/m; $\epsilon_r =$ 54.965; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C ; Liquid Temperature : 21.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.67, 7.67, 7.67); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch9262/Area Scan (71x121x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.864 W/kg


Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 28.197 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.473 mW/g

SAR(1 g) = 0.854 mW/g; SAR(10 g) = 0.475 mW/g

Maximum value of SAR (measured) = 1.20 W/kg

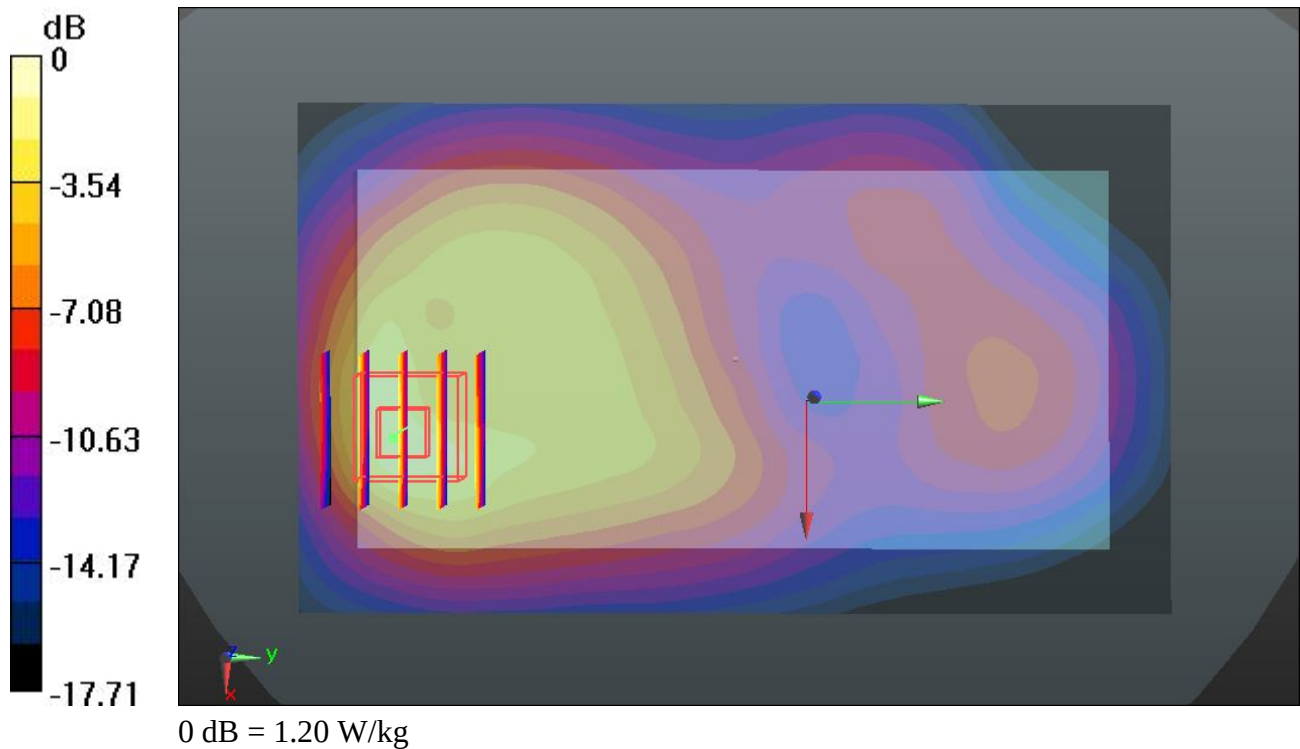

33 WCDMA II_HSUPA Subtest 5_Back_1cm_Ch9400**DUT: 330701**

Communication System: UMTS; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: MSL_1900_130324 Medium parameters used: $f = 1880$ MHz; $\sigma = 1.506$ mho/m; $\epsilon_r = 54.9$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C ; Liquid Temperature : 21.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.67, 7.67, 7.67); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch9400/Area Scan (71x121x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.891 W/kg


Ch9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 26.974 V/m; Power Drift = 0.11 dB

Peak SAR (extrapolated) = 1.360 mW/g

SAR(1 g) = 0.793 mW/g; SAR(10 g) = 0.435 mW/g

Maximum value of SAR (measured) = 1.11 W/kg

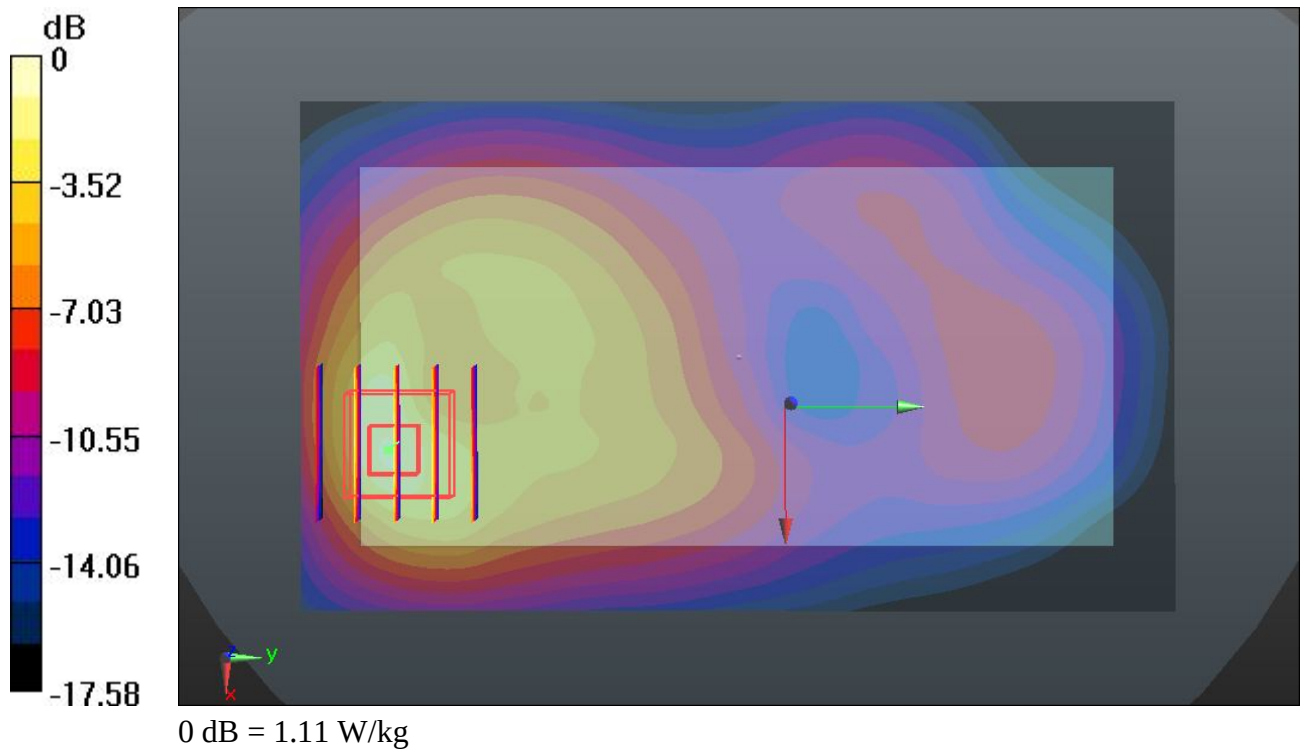

34 WCDMA II_HSUPA Subtest 5_Back_1cm_Ch9538**DUT: 330701**

Communication System: UMTS; Frequency: 1907.6 MHz; Duty Cycle: 1:1

Medium: MSL_1900_130324 Medium parameters used: $f = 1908$ MHz; $\sigma = 1.535$ mho/m; $\epsilon_r =$ 54.854; $\rho = 1000$ kg/m³

Ambient Temperature : 23.1 °C ; Liquid Temperature : 21.8 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.67, 7.67, 7.67); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch9538/Area Scan (71x121x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.22 W/kg


Ch9538/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 29.338 V/m; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 1.546 mW/g

SAR(1 g) = 0.899 mW/g; SAR(10 g) = 0.486 mW/g

Maximum value of SAR (measured) = 1.26 W/kg

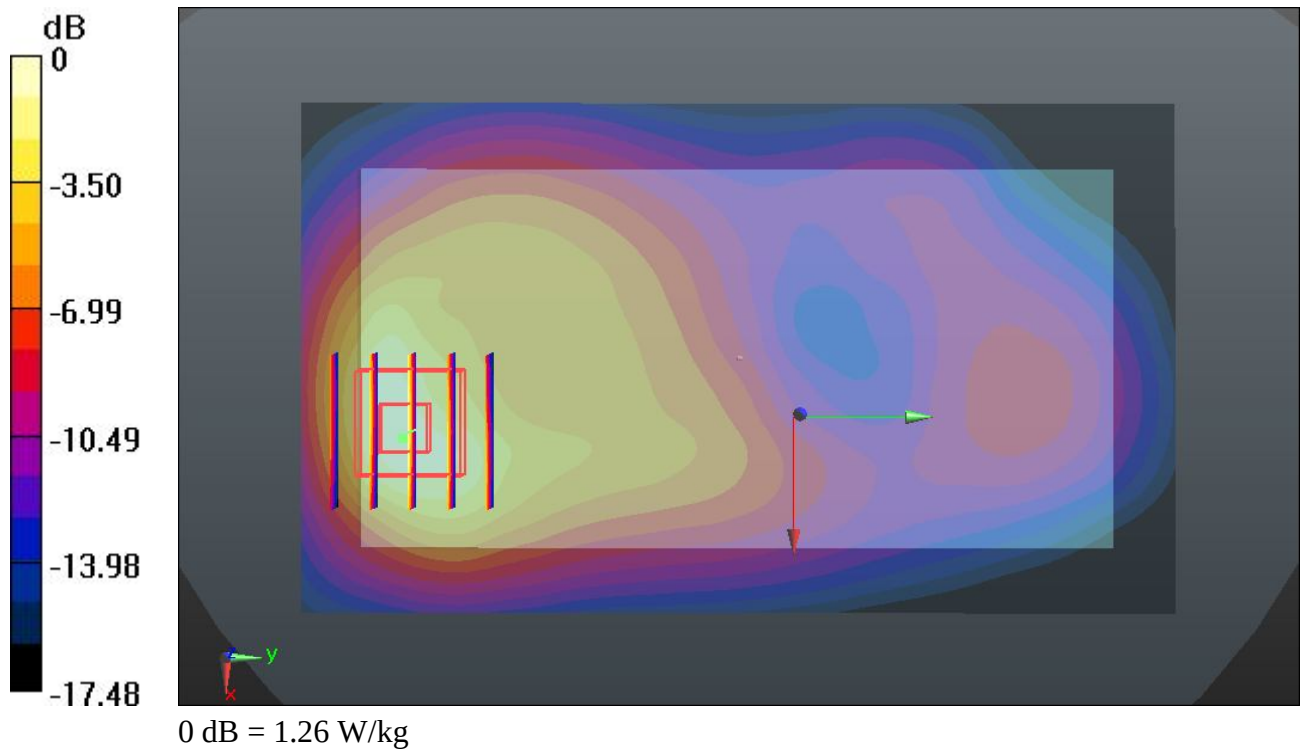

65 WLAN2.4G_802.11b_Front_1cm_Ch11**DUT: 330701**

Communication System: WIFI; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: MSL_2450_130325 Medium parameters used: $f = 2462$ MHz; $\sigma = 2$ mho/m; $\epsilon_r = 54.071$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.21, 7.21, 7.21); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch11/Area Scan (81x151x1): Interpolated grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.133 W/kg

Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.720 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.199 mW/g

SAR(1 g) = 0.100 mW/g; SAR(10 g) = 0.050 mW/g

Maximum value of SAR (measured) = 0.147 W/kg


Ch11/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.720 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.187 mW/g

SAR(1 g) = 0.081 mW/g; SAR(10 g) = 0.041 mW/g

Maximum value of SAR (measured) = 0.138 W/kg

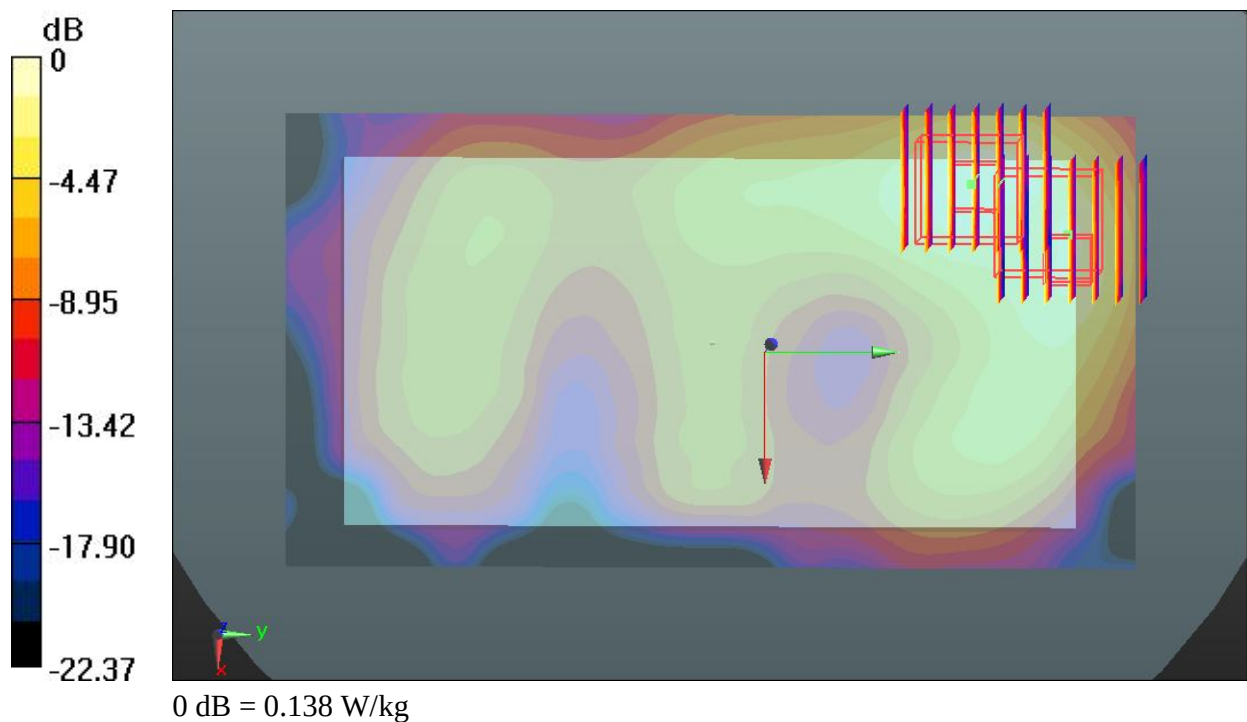

66 WLAN2.4G_802.11b_Back_1cm_Ch11**DUT: 330701**

Communication System: WIFI; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: MSL_2450_130325 Medium parameters used: $f = 2462$ MHz; $\sigma = 2$ mho/m; $\epsilon_r = 54.071$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.21, 7.21, 7.21); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch11/Area Scan (81x151x1): Interpolated grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.129 W/kg

Ch11/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.283 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.199 mW/g

SAR(1 g) = 0.097 mW/g; SAR(10 g) = 0.048 mW/g

Maximum value of SAR (measured) = 0.144 W/kg


Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 8.283 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.186 mW/g

SAR(1 g) = 0.091 mW/g; SAR(10 g) = 0.045 mW/g

Maximum value of SAR (measured) = 0.135 W/kg

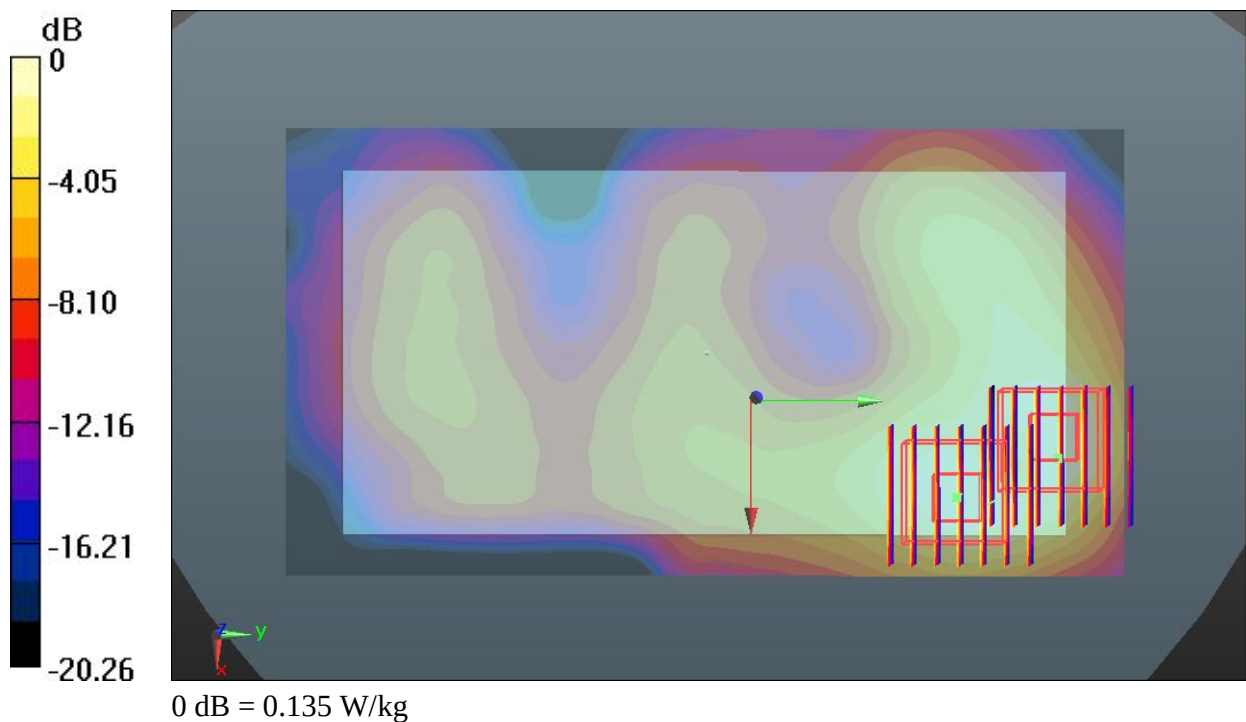

67 WLAN2.4G_802.11b_Left Side_1cm_Ch11**DUT: 330701**

Communication System: WIFI; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: MSL_2450_130325 Medium parameters used: $f = 2462$ MHz; $\sigma = 2$ mho/m; $\epsilon_r = 54.071$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.21, 7.21, 7.21); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch11/Area Scan (41x151x1): Interpolated grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.0963 W/kg

Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.001 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.123 mW/g

SAR(1 g) = 0.065 mW/g; SAR(10 g) = 0.034 mW/g

Maximum value of SAR (measured) = 0.0928 W/kg


Ch11/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.001 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.101 mW/g

SAR(1 g) = 0.053 mW/g; SAR(10 g) = 0.029 mW/g

Maximum value of SAR (measured) = 0.0748 W/kg

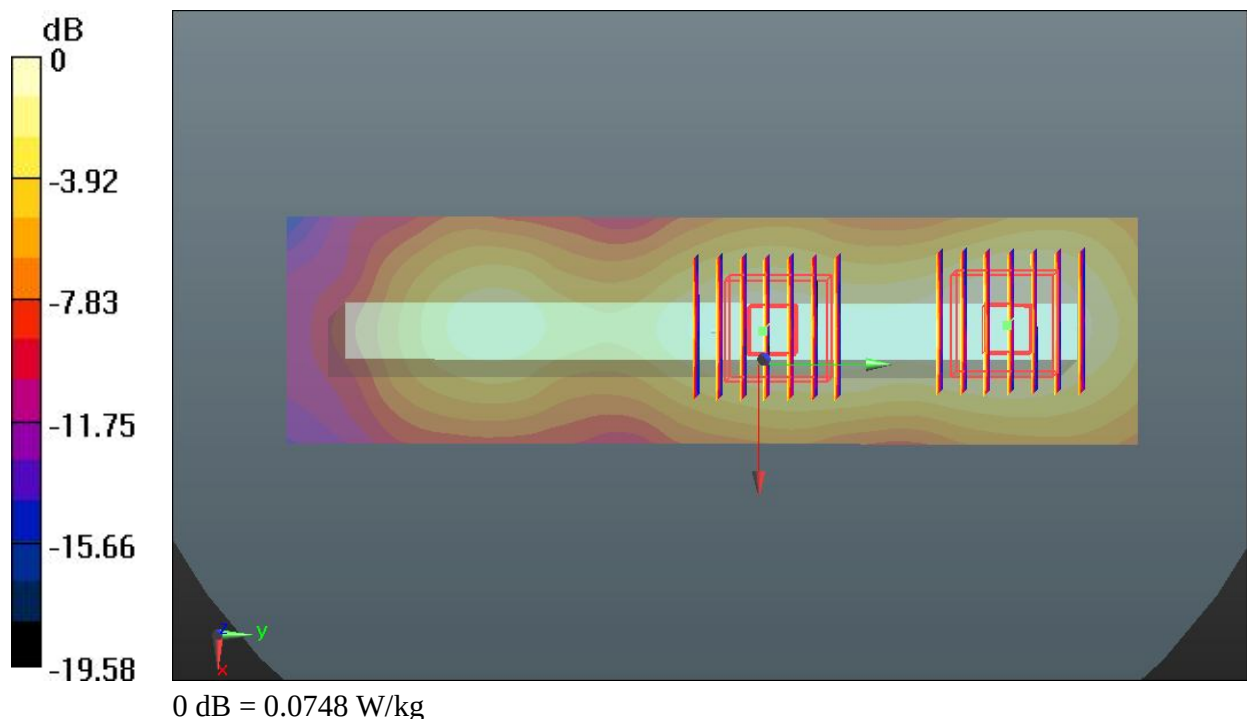

68 WLAN2.4G_802.11b_Top Side_1cm_Ch11**DUT: 330701**

Communication System: WIFI; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: MSL_2450_130325 Medium parameters used: $f = 2462$ MHz; $\sigma = 2$ mho/m; $\epsilon_r = 54.071$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.21, 7.21, 7.21); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch11/Area Scan (41x91x1): Interpolated grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.101 W/kg


Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.109 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.135 mW/g

SAR(1 g) = 0.070 mW/g; SAR(10 g) = 0.036 mW/g

Maximum value of SAR (measured) = 0.104 W/kg

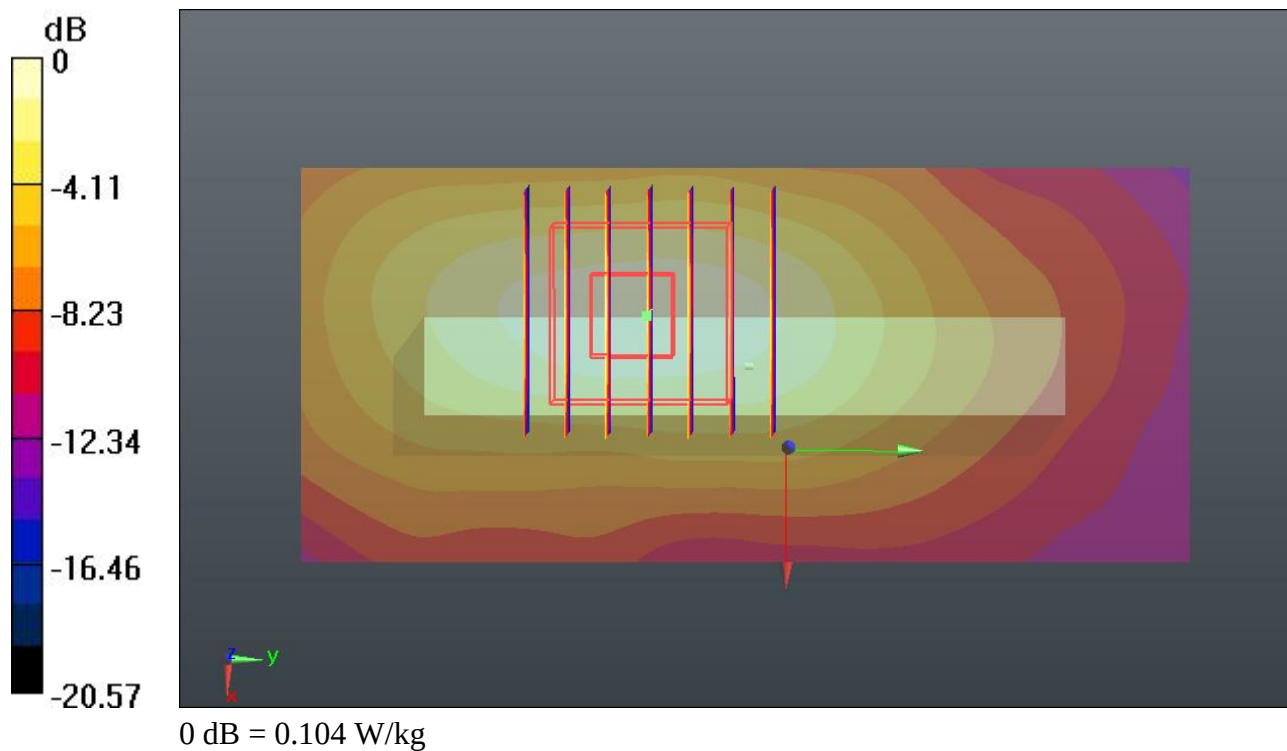

69 WLAN2.4G_802.11b_Back_1cm_Ch11_Headset**DUT: 330701**

Communication System: WIFI; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: MSL_2450_130325 Medium parameters used: $f = 2462$ MHz; $\sigma = 2$ mho/m; $\epsilon_r = 54.071$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.21, 7.21, 7.21); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch11/Area Scan (81x151x1): Interpolated grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.112 W/kg

Ch11/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.798 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.162 mW/g

SAR(1 g) = 0.078 mW/g; SAR(10 g) = 0.041 mW/g

Maximum value of SAR (measured) = 0.117 W/kg

Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 7.798 V/m; Power Drift = -0.16 dB

Peak SAR (extrapolated) = 0.160 mW/g

SAR(1 g) = 0.077 mW/g; SAR(10 g) = 0.039 mW/g

Maximum value of SAR (measured) = 0.115 W/kg

