# **FCC SAR Test Report**

APPLICANT : CT Asia

**EQUIPMENT**: Phone

**BRAND NAME**: BLU

MODEL NAME : Studio 7.0

FCC ID : YHLBLUSTUDIO70

**STANDARD** : FCC 47 CFR Part 2 (2.1093)

**ANSI/IEEE C95.1-1992** 

Report No. : FA470101

**IEEE 1528-2003** 

We, SPORTON INTERNATIONAL (SHENZHEN) INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and had been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (SHENZHEN) INC., the test report shall not be reproduced except in full.

Reviewed by: Eric Huang / Deputy Manager

Approved by: Jones Tsai / Manager

Mahahaha 2363

Testing Laboratory

# SPORTON INTERNATIONAL (SHENZHEN) INC.

No. 101, Complex Building C, Guanlong Village, Xili Town, Nanshan District, Shenzhen, Guangdong, P.R.C.

TEL: 86-755-8637-9589 / FAX: 86-755-8637-9595

FCC ID: YHLBLUSTUDIO70 Page 1 of 39

Issued Date : Sep. 10, 2014 ge 1 of 39 Form version. : 140820

# **Table of Contents**

1. Statement of Compliance	
2. Administration Data	
3. Guidance Standard	
4. Equipment Under Test (EUT)	6
4.1 General Information	6
4.2 Maximum Tune-up Limit	7
5. RF Exposure Limits	8
5.1 Uncontrolled Environment	8
5.2 Controlled Environment	
6. Specific Absorption Rate (SAR)	9
6.1 Introduction	9
6.2 SAR Definition	9
7. System Description and Setup	
8. Measurement Procedures	
8.1 Spatial Peak SAR Evaluation	
8.2 Power Reference Measurement	12
8.3 Area Scan	
8.4 Zoom Scan	13
8.5 Volume Scan Procedures	
8.6 Power Drift Monitoring	
9. Test Equipment List	
10. System Verification	
10.1 Tissue Verification	15
10.2 System Performance Check Results	16
11. RF Exposure Positions	17
11.1 Ear and handset reference point	17
11.2 Definition of the cheek position	
11.3 Definition of the tilt position	19
11.4 SAR Testing for Tablet	19
12. Conducted RF Output Power (Unit: dBm)	20
13. Bluetooth Exclusions Applied	
14. Antenna Location	26
15. SAR Test Results	28
15.1 Head SAR	29
15.2 Body SAR	30
15.3 Repeated SAR Measurement	31
16. Simultaneous Transmission Analysis	32
16.1 Head Exposure Conditions	
16.2 Body Accessory Exposure Conditions	34
16.3 SPLSR Evaluation and Analysis	36
17. Uncertainty Assessment	37
18. References	39
Appendix A. Plots of System Performance Check	
Appendix B. Plots of High SAR Measurement	
Appendix C. DASY Calibration Certificate	
Appendix D. Test Setup Photos	

TEL: 86-755-8637-9589 / FAX: 86-755-8637-9595

FCC ID: YHLBLUSTUDIO70

# **Revision History**

Report No. : FA470101

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FA470101	Rev. 01	Initial issue of report	Sep. 10, 2014

TEL: 86-755-8637-9589 / FAX: 86-755-8637-9595

Issued Date: Sep. 10, 2014 Form version. : 140820 FCC ID: YHLBLUSTUDIO70 Page 3 of 39

# 1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **CT Asia, Phone, Studio 7.0,** are as follows.

**Report No. : FA470101** 

			Highest SAR Summary		
Equipment Class	Frequency Band	Operating Mode	Head 1g SAR (W/kg)	Body 1g SAR (W/kg) (Gap 0cm)	Simultaneous Transmission SAR (W/kg)
	GSM850	Voice/Data	0.45	1.01	
PCE	GSM1900	Voice/Data	0.50	0.88	1.45
	WCDMA Band V	Voice/Data	0.29	0.49	
	WCDMA Band II	Voice/Data	0.90	1.25	
DTS	WLAN 2.4GHz Band	Data	0.31	0.45	1.45
DSS	Bluetooth	Data			1.30
Date of Testing:		07/2	7/2014 ~ 07/31/2014		

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2003.

# 2. Administration Data

Testing Laboratory			
Test Site SPORTON INTERNATIONAL (SHENZHEN) INC.			
Test Site Location	No. 101, Complex Building C, Guanlong Village, Xili Town, Nanshan District, Shenzhen, Guangdong, P.R.C. TEL: +86-755-8637-9589 FAX: +86-755-8637-9595		

Report No.: FA470101

Applicant		
Company Name CT Asia		
Address	Unit 01, 15/F, Seaview Centre, 139-141 Hoi bun road, Kwun Tong, Kowloon, Hongkong	

Manufacturer			
Company Name Shanghai Huaqin telecom technology co., ltd.			
Address	Building 1, NO.399, Keyuan Road, Zhangjiang Hi-tech Park, Pudong New District, Shanghai		

# 3. Guidance Standard

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2003
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r03
- FCC KDB 865664 D02 SAR Reporting v01r01
- FCC KDB 447498 D01 General RF Exposure Guidance v05r02
- FCC KDB 248227 D01 SAR meas for 802 11abg v01r02
- FCC KDB 616217 D04 SAR for laptop and tablets v01r01
- FCC KDB 941225 D01 SAR test for 3G devices v02
- FCC KDB 941225 D02 HSPA and 1x Advanced v02r02
- FCC KDB 941225 D03 SAR Test Reduction GSM GPRS EDGE v01

# 4. Equipment Under Test (EUT)

# 4.1 General Information

	Product Feature & Specification				
Equipment Name	Phone				
Brand Name	LU				
Model Name	Studio 7.0				
FCC ID	YHLBLUSTUDIO70				
Wireless Technology and Frequency Range	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz Bluetooth: 2402 MHz ~ 2480 MHz				
Mode	GSM/GPRS/EGPRS RMC/AMR 12.2Kbps HSDPA HSUPA 802.11b/g/n HT20/HT40 Bluetooth v3.0+EDR Bluetooth v4.0 LE				
HW Version	AW1975_MB_PCB_V2.0				
SW Version	AW1975PAH_BLU_V1_0_2_20140603				
GSM / (E)GPRS Transfer mode	Class B – EUT cannot support Packet Switched and Circuit Switched Network simultaneously but can automatically switch between Packet and Circuit Switched Network.				
EUT Stage	Identical Prototype				
Remark:					

Report No.: FA470101

- 1. This device supported VoIP in GPRS, EGPRS, WCDMA (e.g. 3rd party VoIP).
- This device supports GRPS/EGPRS mode up to multi-slot class 12 and does not support DTM operation.

TEL: 86-755-8637-9589 / FAX: 86-755-8637-9595 Issued Date: Sep. 10, 2014 FCC ID: YHLBLUSTUDIO70 Page 6 of 39 Form version. : 140820

# 4.2 Maximum Tune-up Limit

Mode	Burst average power(dBm)		
Wode	GSM 850	GSM 1900	
GSM (GMSK, 1 Tx slot)	32.5	29.5	
GPRS (GMSK, 1 Tx slot)	32.5	29.5	
GPRS (GMSK, 2 Tx slots)	31.5	29	
GPRS (GMSK, 3 Tx slots)	30	27.5	
GPRS (GMSK, 4 Tx slots)	29.5	26.5	
EDGE (8PSK, 1 Tx slot)	27	26	
EDGE (8PSK, 2 Tx slots)	26	25	
EDGE (8PSK, 3 Tx slots)	24	23	
EDGE (8PSK, 4 Tx slots)	23	22	

Report No. : FA470101

Mode	Average power(dBm)		
Mode	WCDMA Band V	WCDMA Band II	
AMR 12.2Kbps	22.5	23	
RMC 12.2Kbps	22.5	23	
HSDPA Subtest-1	22	22	
HSDPA Subtest-2	22	22	
HSDPA Subtest-3	21	22	
HSDPA Subtest-4	21	22	
HSUPA Subtest-1	20	20.5	
HSUPA Subtest-2	20	20	
HSUPA Subtest-3	21	21.5	
HSUPA Subtest-4	19	20	
HSUPA Subtest-5	20	21	

Mode			Maximum Average Power (dBm)
802.11b		1b	11
	802.11g		10.5
2.4GHz	802.11n-HT20		10.5
2.46П2	802.11n-HT40	CH 3	7
		CH 6	9
	CH 9	8	
Bluetooth v3.0+EDR			1
Bluetooth v4.0 LE			-6

# 5. RF Exposure Limits

### 5.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

Report No.: FA470101

### 5.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

#### Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

#### Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

# 6. Specific Absorption Rate (SAR)

## 6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

Report No.: FA470101

### 6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density ( $\rho$ ). The equation description is as below:

$$SAR = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where:  $\sigma$  is the conductivity of the tissue,  $\rho$  is the mass density of the tissue and E is the RMS electrical field strength.

# 7. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

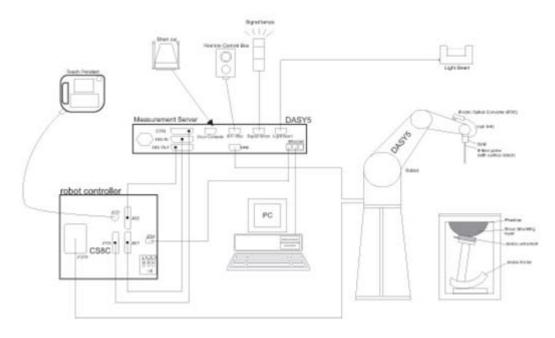

Report No.: FA470101

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps,
- The phantom, the device holder and other accessories according to the targeted measurement.

# 8. Measurement Procedures

The measurement procedures are as follows:

#### <Conducted power measurement>

(a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.

Report No.: FA470101

- Read the WWAN RF power level from the base station simulator.
- For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

#### <SAR measurement>

- Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power
- Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- Measure SAR results for the highest power channel on each testing position.
- Find out the largest SAR result on these testing positions of each band (e)
- Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- Power reference measurement (a)
- (b) Area scan
- Zoom scan (c)
- (d) Power drift measurement

### 8.1 Spatial Peak SAR Evaluation

SPORTON INTERNATIONAL (SHENZHEN) INC.

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- Extraction of the measured data (grid and values) from the Zoom Scan
- Calculation of the SAR value at every measurement point based on all stored data (A/D values and (b) measurement parameters)
- Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values form the measurement grid to the high-resolution grid
- Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface (e)
- Calculation of the averaged SAR within masses of 1g and 10g

Form version. : 140820 FCC ID: YHLBLUSTUDIO70 Page 11 of 39

### 8.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

Report No.: FA470101

## 8.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0 is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r03 SAR measurement 100 MHz to 6 GHz.

	≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5 \text{ mm}$
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°
	$\leq$ 2 GHz: $\leq$ 15 mm 2 – 3 GHz: $\leq$ 12 mm	$3 - 4 \text{ GHz:} \le 12 \text{ mm}$ $4 - 6 \text{ GHz:} \le 10 \text{ mm}$
Maximum area scan spatial resolution: $\Delta x_{Area}$ , $\Delta y_{Area}$	When the x or y dimension of measurement plane orientation the measurement resolution in x or y dimension of the test of measurement point on the test	on, is smaller than the above, must be $\leq$ the corresponding levice with at least one

### 8.4 Zoom Scan

Zoom scans are used assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube shoes base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Report No.: FA470101

Zoom scan parameters extracted from FCC KDB 865664 D01v01r03 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz	
Maximum zoom scan s	spatial reso	lution: Δx <sub>Zoom</sub> , Δy <sub>Zoom</sub>	$\leq$ 2 GHz: $\leq$ 8 mm 2 – 3 GHz: $\leq$ 5 mm <sup>*</sup>	$3 - 4 \text{ GHz: } \le 5 \text{ mm}^*$ $4 - 6 \text{ GHz: } \le 4 \text{ mm}^*$	
	uniform	grid: $\Delta z_{Zoom}(n)$	≤ 5 mm	$3 - 4 \text{ GHz: } \le 4 \text{ mm}$ $4 - 5 \text{ GHz: } \le 3 \text{ mm}$ $5 - 6 \text{ GHz: } \le 2 \text{ mm}$	
Maximum zoom scan spatial resolution, normal to phantom surface	graded	Δz <sub>Zoom</sub> (1): between 1 <sup>st</sup> two points closest to phantom surface	≤ 4 mm	$3 - 4 \text{ GHz: } \le 3 \text{ mm}$ $4 - 5 \text{ GHz: } \le 2.5 \text{ mm}$ $5 - 6 \text{ GHz: } \le 2 \text{ mm}$	
	surface graded grid		$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$		
Minimum zoom scan volume	X V 7		≥ 30 mm	$3 - 4 \text{ GHz:} \ge 28 \text{ mm}$ $4 - 5 \text{ GHz:} \ge 25 \text{ mm}$ $5 - 6 \text{ GHz:} \ge 22 \text{ mm}$	

Note:  $\delta$  is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.

### 8.5 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

### 8.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 / FAX: 86-755-8637-9595 Issued Date: Sep. 10, 2014

FCC ID : YHLBLUSTUDIO70 Page 13 of 39 Form version. : 140820

When zoom scan is required and the <u>reported</u> SAR from the area scan based 1-g SAR estimation procedures of KDB 447498 is  $\leq 1.4 \text{ W/kg}$ ,  $\leq 8 \text{ mm}$ ,  $\leq 7 \text{ mm}$  and  $\leq 5 \text{ mm}$  zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.

# 9. Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calib	ration	
Manufacturer	Name of Equipment	Type/Model	Serial Number	Last Cal.	Due Date	
SPEAG	835MHz System Validation Kit	D835V2	4d091	Nov. 18, 2011	Nov. 14, 2014	
SPEAG	1900MHz System Validation Kit	D1900V2	5d118	Nov. 21, 2011	Nov. 14, 2014	
SPEAG	2450MHz System Validation Kit	D2450V2	908	Mar. 26, 2013	Mar. 24, 2015	
SPEAG	Data Acquisition Electronics	DAE3	569	Nov. 22, 2013	Nov. 21, 2014	
SPEAG	Dosimetric E-Field Probe	EX3DV4	3819	Nov. 27, 2013	Nov. 26, 2014	
SPEAG	SAM Twin Phantom	QD 000 P40 CD	TP-1670	NCR	NCR	
SPEAG	ELI4 Phantom	QD OVA 002 AA	1149	NCR	NCR	
SPEAG	Phone Positioner	N/A	N/A	NCR	NCR	
Agilent	Wireless Communication Test Set	E5515C	MY50267224	Oct. 10, 2013	Oct. 09, 2014	
R&S	Network Analyzer	ZVB8	100106	Nov. 07, 2013	Nov. 06, 2014	
SPEAG	Dielectric Assessment KIT	DAK-3.5	1032	NCR	NCR	
Anritsu	Power Meter	ML2495A	1218010	Mar .03. 2014	Mar. 02, 2015	
Anritsu	Power Sensor	MA2411B	1207253	Mar .03. 2014	Mar. 02, 2015	
R&S	Spectrum Analyzer	FSP7	101230	Jun. 13, 2014	Jun. 12, 2015	
Agilent	Dual Directional Coupler	778D	50422	No	te 1	
Woken	Attenuator	WK0602-XX	N/A	No	te 1	
PE	Attenuator	PE7005-10	N/A	Note 1		
PE	Attenuator	PE7005- 3	N/A	Note 1		
AR	Power Amplifier	5S1G4M2	0328767	Note 1		
Mini-Circuits	Power Amplifier	ZVE-3W	162601250	Note 1		
Mini-Circuits	Power Amplifier	ZHL-42W+	13440021344	Note 1		

Report No.: FA470101

#### **General Note:**

- 1. Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.
- 2. Referring to KDB 865664 D01v01r03, the dipole calibration interval can be extended to 3 years with justification. The dipoles are also not physically damaged, or repaired during the interval.
- 3. The justification data of dipole D835V2, SN: 4d091, D1900V2, SN: 5d118 and D2450V2, SN: 908 can be found in appendix C. The return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration.

# 10. System Verification

# 10.1 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target

Report No.: FA470101

tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (εr)
				For Head				
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
				For Body				
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7

### <Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Tissue Type	Liquid Temp. (°C)	Conductivity (σ)	Permittivity (ε <sub>r</sub> )	Conductivity Target (σ)	Permittivity Target (ε <sub>r</sub> )	Delta (σ) (%)	Delta (ε <sub>r</sub> ) (%)	Limit (%)	Date
835	Head	22.6	0.902	40.749	0.90	41.50	0.22	-1.81	±5	2014/7/27
1900	Head	22.8	1.421	41.283	1.40	40.00	1.50	3.21	±5	2014/7/28
2450	Head	22.7	1.809	38.451	1.80	39.20	0.50	-1.91	±5	2014/7/30
835	Body	22.7	0.972	53.975	0.97	55.20	0.21	-2.22	±5	2014/7/28
1900	Body	22.7	1.575	54.215	1.52	53.30	3.62	1.72	±5	2014/7/29
2450	Body	22.6	2.001	52.089	1.95	52.70	2.62	-1.16	±5	2014/7/31

### 10.2 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured SAR (W/kg)	Targeted SAR (W/kg)	Normalized SAR (W/kg)	Deviation (%)
2014/7/27	835	Head	250	4d091	3819	569	2.29	9.40	9.16	-2.55
2014/7/28	1900	Head	250	5d118	3819	569	10.60	40.30	42.4	5.21
2014/7/30	2450	Head	250	908	3819	569	12.70	54.00	50.8	-5.93
2014/7/28	835	Body	250	4d091	3819	569	2.21	9.42	8.84	-6.16
2014/7/29	1900	Body	250	5d118	3819	569	10.70	41.80	42.8	2.39
2014/7/31	2450	Body	250	908	3819	569	13.30	50.40	53.2	5.56

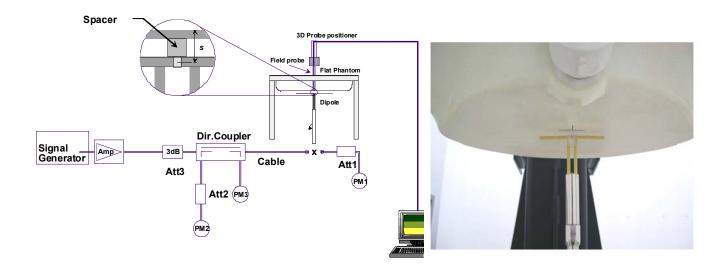


Fig 8.3.1 System Performance Check Setup

Fig 8.3.2 Setup Photo

**Report No. : FA470101** 

C SAR Test Report No. : FA470101

# 11. RF Exposure Positions

# 11.1 Ear and handset reference point

Figure 9.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled "M," the left ear reference point (ERP) is marked "LE," and the right ERP is marked "RE." Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 9.1.2 The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 9.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 9.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.



Fig 9.1.1 Front, back, and side views of SAM twin phantom




Fig 9.1.2 Close-up side view of phantom showing the ear region.




Fig 9.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations

TEL: 86-755-8637-9589 / FAX: 86-755-8637-9595 Issued Date: Sep. 10, 2014

FCC ID : YHLBLUSTUDIO70 Page 17 of 39 Form version. : 140820

SPORTON LAB. FCC SAR Test Report

## 11.2 Definition of the cheek position

- Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
- Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width wt of the handset at the level of the acoustic output (point A in Figure 9.2.1 and Figure 9.2.2), and the midpoint of the width wb of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 9.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 9.2.2). especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
- Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 9.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
- Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
- While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
- Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line. 6.
- While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 9.2.3. The actual rotation angles should be documented in the test report.

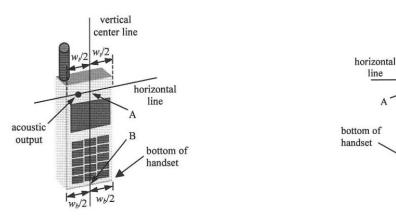


Fig 9.2.1 Handset vertical and horizontal reference lines—"fixed case

Fig 9.2.2 Handset vertical and horizontal reference lines-"clam-shell case"

vertical

center line

acoustic output

Report No.: FA470101

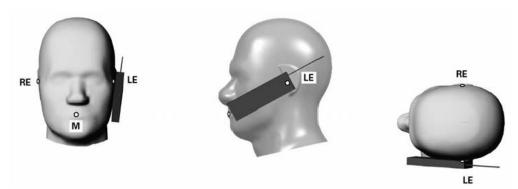


Fig 9.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

SPORTON INTERNATIONAL (SHENZHEN) INC. TEL: 86-755-8637-9589 / FAX: 86-755-8637-9595 Issued Date: Sep. 10, 2014 Form version. : 140820

FCC ID: YHLBLUSTUDIO70

## SPORTON LAB. FCC SAR Test Report

### 11.3 Definition of the tilt position

1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.

Report No.: FA470101

- 2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15°.
- 3. Rotate the handset around the horizontal line by 15°.
- 4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 9.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point



Fig 9.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.

### 11.4 SAR Testing for Tablet

This device can be used also in full sized tablet exposure conditions, due to its size. Per FCC KDB 616217, the back surface and edges of the tablet should be tested for SAR compliance with the tablet touching the phantom. The SAR exclusion threshold in KDB 447498 D01v05r02 can be applied to determine SAR test exclusion for adjacent edge configurations. The closest distance from the antenna to an adjacent tablet edge is used to determine if SAR testing is required for the adjacent edges, with the adjacent edge positioned against the phantom and the edge containing the antenna positioned perpendicular to the phantom.

# 12. Conducted RF Output Power (Unit: dBm)

#### <GSM Conducted Power>

#### **General Note:**

 Per KDB 447498 D01v05r02, the maximum output power channel is used for SAR testing and for further SAR test reduction.

Report No.: FA470101

2. According to October 2013TCB Workshop, For GSM / GPRS / EGPRS, the number of time slots to test for SAR should correspond to the highest source-based time-averaged maximum output power configuration, Considering the possibility of e.g. 3rd party VoIP operation for head and body-worn SAR testing, the EUT was set in GPRS (4Tx slots) for GSM850/GSM1900 band due to its highest frame-average power.

Band GSM850	Burst Average Power (dBm) Tune-up Frame-Average Power (dBm)					verage Pov	ver (dBm)	Tune-up
TX Channel	128	189	251	Limit	128	189	251	Limit
Frequency (MHz)	824.2	836.4	848.8	(dBm)	824.2	836.4	848.8	(dBm)
GSM (GMSK, 1 Tx slot)	32.22	32.20	<mark>32.30</mark>	32.5	23.22	23.20	23.30	23.5
GPRS (GMSK, 1 Tx slot) – CS1	32.19	32.14	32.22	32.5	23.19	23.14	23.22	23.5
GPRS (GMSK, 2 Tx slots) – CS1	31.28	31.23	31.33	31.5	25.28	25.23	25.33	25.5
GPRS (GMSK, 3 Tx slots) – CS1	29.77	29.73	29.85	30	25.51	25.47	25.59	25.74
GPRS (GMSK, 4 Tx slots) – CS1	29.24	29.19	29.29	29.5	26.24	26.19	<mark>26.29</mark>	26.5
EDGE (8PSK, 1 Tx slot) – MCS5	26.77	26.62	26.35	27	17.77	17.62	17.35	18
EDGE (8PSK, 2 Tx slots) – MCS5	25.70	25.60	25.37	26	19.70	19.60	19.37	20
EDGE (8PSK, 3 Tx slots) – MCS5	23.55	23.42	23.20	24	19.29	19.16	18.94	19.74
EDGE (8PSK, 4 Tx slots) – MCS5	22.48	22.33	22.08	23	19.48	19.33	19.08	20
Band GSM1900	Burst Av	erage Pow	er (dBm)	Tune-up	Frame-A	Tune-up		
TX Channel	512	661	810	Limit	512	661	810	Limit
- IX Gramoi	012	001					0.0	
Frequency (MHz)	1850.2	1880	1909.8	(dBm)	1850.2	1880	1909.8	(dBm)
			1909.8 <b>29.25</b>	(dBm) 29.5	1850.2 20.14	1880 20.15		(dBm) 20.5
Frequency (MHz)	1850.2	1880		, ,			1909.8	, ,
Frequency (MHz) GSM (GMSK, 1 Tx slot)	1850.2 29.14	1880 29.15	<mark>29.25</mark>	29.5	20.14	20.15	1909.8 20.25	20.5
Frequency (MHz) GSM (GMSK, 1 Tx slot) GPRS (GMSK, 1 Tx slot) – CS1	1850.2 29.14 29.02	1880 29.15 29.05	<b>29.25</b> 29.13	29.5 29.5	20.14	20.15 20.05	1909.8 20.25 20.13	20.5
Frequency (MHz)  GSM (GMSK, 1 Tx slot)  GPRS (GMSK, 1 Tx slot) – CS1  GPRS (GMSK, 2 Tx slots) – CS1	1850.2 29.14 29.02 28.31	1880 29.15 29.05 28.31	29.25 29.13 28.42	29.5 29.5 29	20.14 20.02 22.31	20.15 20.05 22.31	1909.8 20.25 20.13 22.42	20.5 20.5 23
Frequency (MHz)  GSM (GMSK, 1 Tx slot)  GPRS (GMSK, 1 Tx slot) – CS1  GPRS (GMSK, 2 Tx slots) – CS1  GPRS (GMSK, 3 Tx slots) – CS1	1850.2 29.14 29.02 28.31 26.87	1880 29.15 29.05 28.31 26.85	29.25 29.13 28.42 27.00	29.5 29.5 29 27.5	20.14 20.02 22.31 22.61	20.15 20.05 22.31 22.59	1909.8 20.25 20.13 22.42 22.74	20.5 20.5 23 23.24
Frequency (MHz)  GSM (GMSK, 1 Tx slot)  GPRS (GMSK, 1 Tx slot) – CS1  GPRS (GMSK, 2 Tx slots) – CS1  GPRS (GMSK, 3 Tx slots) – CS1  GPRS (GMSK, 4 Tx slots) – CS1	1850.2 29.14 29.02 28.31 26.87 26.18	1880 29.15 29.05 28.31 26.85 26.17	29.25 29.13 28.42 27.00 26.31	29.5 29.5 29 27.5 26.5	20.14 20.02 22.31 22.61 23.18	20.15 20.05 22.31 22.59 23.17	1909.8 20.25 20.13 22.42 22.74 23.31	20.5 20.5 23 23.24 23.5
Frequency (MHz)  GSM (GMSK, 1 Tx slot)  GPRS (GMSK, 1 Tx slot) – CS1  GPRS (GMSK, 2 Tx slots) – CS1  GPRS (GMSK, 3 Tx slots) – CS1  GPRS (GMSK, 4 Tx slots) – CS1  EDGE (8PSK, 1 Tx slot) – MCS5	29.14 29.02 28.31 26.87 26.18 25.96	1880 29.15 29.05 28.31 26.85 26.17 25.59	29.25 29.13 28.42 27.00 26.31 25.62	29.5 29.5 29 27.5 26.5 26	20.14 20.02 22.31 22.61 23.18 16.96	20.15 20.05 22.31 22.59 23.17 16.59	1909.8 20.25 20.13 22.42 22.74 23.31 16.62	20.5 20.5 23 23.24 23.5 17

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB

Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB

Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB

Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

SPORTON INTERNATIONAL (SHENZHEN) INC.

### <WCDMA Conducted Power>

- 1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
- 2. The procedures in KDB 941225 D01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.

Report No. : FA470101

A summary of these settings are illustrated below:

#### **HSDPA Setup Configuration:**

- The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- The RF path losses were compensated into the measurements. h.
- A call was established between EUT and Base Station with following setting: C.
  - Set Gain Factors ( $\beta_c$  and  $\beta_d$ ) and parameters were set according to each
  - Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
  - Set RMC 12.2Kbps + HSDPA mode.
  - Set Cell Power = -86 dBm
  - Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
  - vi. Select HSDPA Uplink Parameters
  - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
  - viii. Set Ack-Nack Repetition Factor to 3
  - ix. Set CQI Feedback Cycle (k) to 4 ms
  - Set CQI Repetition Factor to 2 Χ.
  - Power Ctrl Mode = All Up bits

SPORTON INTERNATIONAL (SHENZHEN) INC.

The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	βc	βd	β <sub>d</sub> (SF)	β₀/βа	βнs (Note1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

- Note 1:  $\Delta_{ACK}$ ,  $\Delta_{NACK}$  and  $\Delta_{CQI} = 30/15$  with  $\beta_{ls} = 30/15 * \beta_c$ .
- For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Note 2: Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA,  $\triangle_{ACK}$  and  $\triangle_{NACK}$  = 30/15 with  $\beta_{he}$  = 30/15 \*  $\beta_{e}$ , and  $\triangle_{CQI}$  = 24/15
- with  $\beta_{hs} = 24/15 * \beta_c$ . CM = 1 for  $\beta_c/\beta_d$  =12/15,  $\beta_{hs}/\beta_c$ =24/15. For all other combinations of DPDCH, DPCCH and HS-Note 3: DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.
- Note 4: For subtest 2 the β<sub>σ</sub>/β<sub>d</sub> ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c$  = 11/15 and  $\beta_d$

**Setup Configuration** 

FCC ID: YHLBLUSTUDIO70 Form version.: 140820 Page 21 of 39

#### **HSUPA Setup Configuration:**

- The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- The RF path losses were compensated into the measurements.
- A call was established between EUT and Base Station with following setting \*:
  - Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
  - Set the Gain Factors ( $\beta_c$  and  $\beta_d$ ) and parameters (AG Index) were set according to each specific sub-test in ii. the following table, C11.1.3, quoted from the TS 34.121

Report No.: FA470101

- iii. Set Cell Power = -86 dBm
- iv. Set Channel Type = 12.2k + HSPA
- Set UE Target Power

SPORTON INTERNATIONAL (SHENZHEN) INC.

- vi. Power Ctrl Mode= Alternating bits
- vii. Set and observe the E-TFCI
- viii. Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub- test	βс	βa	β <sub>d</sub> (SF)	βc/βd	βнs (Note1)	βес	β <sub>ed</sub> (Note 5) (Note 6)	β <sub>ed</sub> (SF)	β <sub>ed</sub> (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 6)	E- TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/2 25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β <sub>ed</sub> 1: 47/15 β <sub>ed</sub> 2: 47/15	4 4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 (Note 4)	15/15 (Note 4)	64	15/15 (Note 4)	30/15	24/15	134/15	4	1	1.0	0.0	21	81

- Note 1:  $\Delta_{ACK}$ ,  $\Delta_{NACK}$  and  $\Delta_{CQI}$  = 30/15 with  $\beta_{hs}$  = 30/15 \*  $\beta_c$ .
- CM = 1 for  $\beta_c/\beta_d$  =12/15,  $\beta_h s/\beta_c$ =24/15. For all other combinations of DPDCH, DPCCH, HS- DPCCH, E-DPDCH Note 2: and E-DPCCH the MPR is based on the relative CM difference.
- For subtest 1 the  $\beta_C/\beta_d$  ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by Note 3:
- setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c$  = 10/15 and  $\beta_d$  = 15/15. For subtest 5 the  $\beta_d/\beta_d$  ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by Note 4:
- setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c$  = 14/15 and  $\beta_d$  = 15/15. Note 5: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to
- TS25.306 Table 5.1g. Note 6:  $\beta_{\text{ed}}$  can not be set directly, it is set by Absolute Grant Value.

**Setup Configuration** 

Page 22 of 39



### <WCDMA Conducted Power>

#### **General Note:**

 SAR testing in AMR configuration is not required when the maximum average output of each RF channel for AMR 12.2Kbps is less than 0.25dB higher than that measured in RMC 12.2Kbps

Report No.: FA470101

Per KDB 941225 D02v02r02, RMC 12.2kbps setting is used to evaluate SAR. If HSDPA/HSUPA output power is < 0.25dB higher than RMC, or reported SAR with RMC 12.2kbps setting is ≤ 1.2W/kg, HSDPA/HSUPA SAR evaluation can be excluded..</li>

	В	and		WCDMA	Band V			WCDMA	A Band II	
	Tx C	hannel	4132	4182	4233	Tune-up	9262	9400	9538	Tune-up
	Rx C	hannel	4357	4407	4458	Limit	9662	9800	9938	Limit
Frequency (MHz)			826.4	836.4	846.6	(dBm)	1852.4	1880	1907.6	(dBm)
MPR	3GPP Rel 99	AMR 12.2Kbps	22.15	22.12	21.98	22.5	22.63	22.86	22.58	23
(dB)	3GPP Rel 99	RMC 12.2Kbps	<mark>22.16</mark>	22.13	21.99	22.5	22.64	<b>22.88</b>	22.59	23
0	3GPP Rel 6	HSDPA Subtest-1	21.29	21.40	21.19	22	21.75	21.94	21.55	22
0	3GPP Rel 6	HSDPA Subtest-2	21.30	21.39	21.19	22	21.76	21.96	21.58	22
0.5	3GPP Rel 6	HSDPA Subtest-3	20.83	20.94	20.73	21	21.29	21.45	21.08	22
0.5	3GPP Rel 6	HSDPA Subtest-4	20.81	20.92	20.71	21	21.29	21.45	21.09	22
0	3GPP Rel 6	HSUPA Subtest-1	19.37	19.49	19.25	20	19.85	20.02	19.68	20.5
2	3GPP Rel 6	HSUPA Subtest-2	19.34	19.48	19.24	20	19.83	19.99	19.61	20
1	3GPP Rel 6	HSUPA Subtest-3	20.36	20.46	20.24	21	20.82	21.00	20.63	21.5
2	3GPP Rel 6	HSUPA Subtest-4	18.82	18.93	18.67	19	19.31	19.55	19.12	20
0	3GPP Rel 6	HSUPA Subtest-5	19.88	19.97	19.73	20	20.33	20.50	20.14	21

### <WLAN Conducted Power>

#### **General Note:**

For 2.4GHz WLAN SAR testing, highest average RF output power channel for the lowest data rate for 802.11b were selected for SAR evaluation. 802.11g/n HT20/HT40 were not investigated since the average output powers over all channels and data rates were not more than 0.25 dB higher than the tested channel in the lowest data rate of 802.11b mode.

Report No.: FA470101

		,	WLAN 2.4GHz 802.1	1b Average Power (dl	Bm)		Tune up		
Power vs. Channel Power vs. Data Rate									
Channel	Frequency	Data Rate	Channel						
Charmer	(MHz)	1Mbps	Chamilei	21410/25	5.5ivibps	i iivibh2	(dBm)		
CH 01	2412	9.62							
CH 06	2437	9.93	CH 11	10.29	10.28	10.20	11		
CH 11	2462	10.34							

			WLAN 2.4	GHz 802.1	1g Average	e Power (d	Bm)				_
Po	Power vs. Channel Power vs. Data Rate									Tune up Limit	
Channel	Frequency	Data Rate	Channel	9Mbps	12Mbps	18Mbps	24Mbps	36Mbps	48Mbps	54Mbps	(dBm)
Chamilei	(MHz)	6Mbps	Chamilei	ampha	12101005	Tolvibps	241VIDPS	Solvibbs	40MDPS	54Mbps	()
CH 01	2412	8.90									
CH 06	2437	10.03	CH 06	9.78	9.82	9.86	10.00	10.01	9.95	9.90	10.5
CH 11	2462	9.27									

		V	VLAN 2.4G	Hz 802.11r	n HT20 Ave	erage Powe	er (dBm)				
Power vs. Channel Power vs. MCS Index											
Channel	Frequency	MCS Index	Channel	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	Limit (dBm)
	(MHz)	MCS0									
CH 01	2412	8.87									
CH 06	2437	10.01	CH 06	9.93	9.94	9.97	9.98	9.92	9.88	9.97	10.5
CH 11	2462	9.25									

		٧	VLAN 2.4G	Hz 802.11r	n HT40 Ave	rage Powe	er (dBm)					
Po	wer vs. Chann	iel				Power vs.	MCS Index				Tune up Limit	
Channel	Frequency	MCS Index	Channel	el MCS1 MCS2 MCS3 MCS4 MCS5 MCS6 MCS7								
	(MHz)	MCS0										
CH 03	2422	6.88									7	
CH 06	2437	<mark>8.78</mark>	CH 06	8.74	8.63	8.75	8.76	8.55	8.67	8.61	9	
CH 09	2452	7.12									8	

TEL: 86-755-8637-9589 / FAX: 86-755-8637-9595 Issued Date: Sep. 10, 2014

FCC ID: YHLBLUSTUDIO70 Form version. : 140820 Page 24 of 39

# 13. Bluetooth Exclusions Applied

Mode Band	Average po	wer(dBm)
Mode Dalid	Bluetoothv3.0+EDR	Bluetooth v4.0 LE
2.4GHz Bluetooth	1	-6

Report No.: FA470101

#### Note:

1. Per KDB 447498 D01v05r02, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:

[(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)]  $\cdot [\sqrt{f(GHz)}] \le 3.0$  for 1-g SAR and  $\le 7.5$  for 10-g extremity SAR

- f(GHz) is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- · The result is rounded to one decimal place for comparison

Bluetooth Max Power (dBm)	Separation Distance (mm)	Frequency (GHz)	exclusion thresholds
1	< 5	2.48	0.3


#### Note:

Per KDB 447498 D01v05r02, when the minimum test separation distance is < 5 mm, a distance of 5 mm is applied to determine SAR test exclusion. The test exclusion threshold is 0.3 which is <= 3, SAR testing is not required.

# 14. Antenna Location

# Edge1

Report No. : FA470101

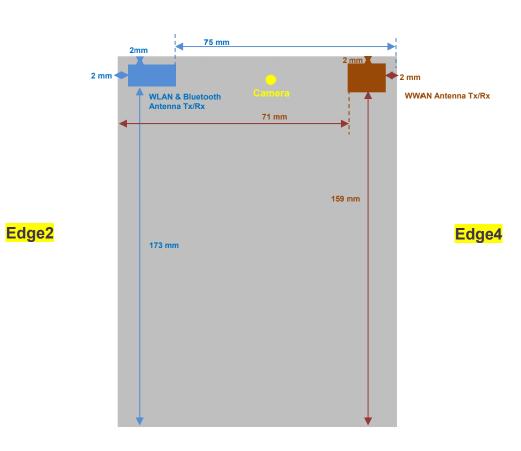

**Back View** Edge3 Diagonal: 205mm

TEL: 86-755-8637-9589 / FAX: 86-755-8637-9595

Issued Date: Sep. 10, 2014 Form version. : 140820 FCC ID: YHLBLUSTUDIO70 Page 26 of 39

#### **General Note:**

1. The below table, when the distance is < 50 mm exclusion threshold is "Ratio", when the distance is > 50 mm exclusion threshold is "mW"

Report No.: FA470101

- Maximum power is the source-based time-average power and represents the maximum RF output power among production units
- 3. Per KDB 447498 D01v05r02, for larger devices, the test separation distance of adjacent edge configuration is determined by the closest separation between the antenna and the user.
- 4. Per KDB 447498 D01v05r02, standalone SAR test exclusion threshold is applied; If the test separation distance is < 5mm. 5mm is used to determine SAR exclusion threshold.
- 5. Per KDB 447498 D01v05r02, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:

[(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)]  $\cdot [\sqrt{f(GHz)}] \le 3.0$  for 1-g SAR and  $\le 7.5$  for 10-g extremity SAR

- f(GHz) is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- · The result is rounded to one decimal place for comparison
- 6. Per KDB 447498 D01v05r02, at 100 MHz to 6 GHz and for *test separation distances* > 50 mm, the SAR test exclusion threshold is determined according to the following
  - a) [Threshold at 50 mm in step 1) + (test separation distance 50 mm)·( f(MHz)/150)] mW, at 100 MHz to 1500 MHz
  - b) [Threshold at 50 mm in step 1) + (test separation distance 50 mm) 10] mW at > 1500 MHz and ≤ 6 GHz

#### SAR test exclusion table distance is ≤ 50mm

OAN IESI EX	clusion table distance is 2 sonn					
Exposure Position	Wireless Interface	GPRS850 4Tx slots	GPRS1900 4 Tx slots	WCDMA Band V	WCDMA Band II	802.11b
FUSITION	Tune-up Maximum power (dBm)	26.5	23.5	22.5	23	11
	Antenna to user (mm)		Ę	5		5
Bottom Face	SAR exclusion threshold	82	62	33	55	4
	SAR testing required?	Yes	Yes	Yes	Yes	Yes
	Antenna to user (mm)		2	2		2
Edge 1	SAR exclusion threshold	82	62	33	55	4
	SAR testing required?	Yes	Yes	Yes	Yes	Yes
	Antenna to user (mm)					2
Edge 2	SAR exclusion threshold					4
	SAR testing required?					Yes
	Antenna to user (mm)		2	2		
Edge 4	SAR exclusion threshold	82	62	33	55	
	SAR testing required?	Yes	Yes	Yes	Yes	

#### SAR test exclusion table distance is > 50mm

Exposure	Wireless Interface	GPRS850 4Tx slots	GPRS1900 4 Tx slots	WCDMA Band V	WCDMA Band II	802.11b
Position	Tune-up Maximum power (dBm)	26.5	23.5	22.5	23	11
	Tune-up Maximum rated power (mW)	447	224	178	200	13
	Antenna to user (mm)		7	'1		
Edge 2	SAR exclusion threshold	282	319	282	319	
	SAR testing required?	Yes	No	No	No	
	Antenna to user (mm)		1	59		173
Edge 3	SAR exclusion threshold	779	1199	778	1199	1326
	SAR testing required?	No	No	No	No	No
	Antenna to user (mm)					75
Edge 4	SAR exclusion threshold					346
	SAR testing required?					No

FCC ID: YHLBLUSTUDIO70 Page 27 of 39 Form version.: 140820

# 15. SAR Test Results

#### **General Note:**

- 1. Per KDB 447498 D01v05r02, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
  - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.

Report No.: FA470101

- b. Reported SAR(W/kg)= Measured SAR(W/kg)\*Tune-up Scaling Factor
- 2. Per KDB 447498 D01v05r02, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
  - · ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
  - · ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
  - ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
- 3. According to October 2013TCB Workshop, For GSM / GPRS / EGPRS, the number of time slots to test for SAR should correspond to the highest source-based time-averaged maximum output power configuration, Considering the possibility of e.g. 3rd party VoIP operation for head and body SAR testing, the EUT was set in GPRS (4Tx slots) for GSM850/GSM1900 band due to its highest frame-average power.
- Per KDB 941225 D02v02r02, RMC 12.2kbps setting is used to evaluate SAR. If HSDPA/HSUPA output power is < 0.25dB higher than RMC, or reported SAR with RMC 12.2kbps setting is ≤ 1.2W/kg, HSDPA/HSUPA SAR evaluation can be excluded.</li>
- 5. Curved region diagram of the device according to the test setup photo (exterior radius dimension), X=1.44mm, Y=1.78mm, Z=1.05mm for WWAN and complied X>Z, Y>Z, Per KDB 616217 D04v01r01, curved SAR evaluation should be performed.
- 6. Additional WLAN SAR for Curved surface of bottom face testing was performed for simultaneous transmission analysis.

# 15.1 Head SAR

# <GSM SAR>

Plot No.	Band	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
01	GSM850	GPRS(4 Tx slots)	Right Cheek	251	848.8	29.29	29.5	1.050	0.05	0.425	0.446
	GSM850	GPRS(4 Tx slots)	Right Tilted	251	848.8	29.29	29.5	1.050	0.09	0.309	0.324
	GSM850	GPRS(4 Tx slots)	Left Cheek	251	848.8	29.29	29.5	1.050	0.02	0.248	0.260
	GSM850	GPRS(4 Tx slots)	Left Tilted	251	848.8	29.29	29.5	1.050	0.02	0.234	0.246
02	GSM1900	GPRS(4 Tx slots)	Right Cheek	810	1909.8	26.31	26.5	1.045	0.14	0.478	0.499
	GSM1900	GPRS(4 Tx slots)	Right Tilted	810	1909.8	26.31	26.5	1.045	0.07	0.288	0.301
	GSM1900	GPRS(4 Tx slots)	Left Cheek	810	1909.8	26.31	26.5	1.045	0.01	0.109	0.114
	GSM1900	GPRS(4 Tx slots)	Left Tilted	810	1909.8	26.31	26.5	1.045	0.09	0.083	0.087

**Report No. : FA470101** 

# <WCDMA SAR>

Plot No.	Band	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
03	WCDMA Band V	RMC 12.2K	Right Cheek	4132	826.4	22.16	22.5	1.081	0.02	0.268	0.290
	WCDMA Band V	RMC 12.2K	Right Tilted	4132	826.4	22.16	22.5	1.081	0.09	0.205	0.222
	WCDMA Band V	RMC 12.2K	Left Cheek	4132	826.4	22.16	22.5	1.081	0.05	0.116	0.125
	WCDMA Band V	RMC 12.2K	Left Tilted	4132	826.4	22.16	22.5	1.081	0.08	0.160	0.173
04	WCDMA Band II	RMC 12.2K	Right Cheek	9400	1880	22.88	23	1.028	0.06	0.872	0.896
	WCDMA Band II	RMC 12.2K	Right Tilted	9400	1880	22.88	23	1.028	0.05	0.579	0.595
	WCDMA Band II	RMC 12.2K	Left Cheek	9400	1880	22.88	23	1.028	0.06	0.244	0.251
	WCDMA Band II	RMC 12.2K	Left Tilted	9400	1880	22.88	23	1.028	0.03	0.191	0.196
	WCDMA Band II	RMC 12.2K	Right Cheek	9262	1852.4	22.64	23	1.086	0.06	0.699	0.759
	WCDMA Band II	RMC 12.2K	Right Cheek	9538	1907.6	22.59	23	1.099	0.02	0.562	0.618

### <DTS WLAN SAR>

Plot No.	Band	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN 2.4GHz	802.11b 1Mbps	Right Cheek	11	2462	10.34	11	1.164	0.09	0.113	0.132
	WLAN 2.4GHz	802.11b 1Mbps	Right Tilted	11	2462	10.34	11	1.164	0.05	0.120	0.140
05	WLAN 2.4GHz	802.11b 1Mbps	Right Tilted	11	2462	10.34	11	1.164	0.02	0.265	<mark>0.308</mark>
	WLAN 2.4GHz	802.11b 1Mbps	Right Tilted	11	2462	10.34	11	1.164	0.01	0.140	0.163

# 15.2 Body SAR

# <GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (cm)		Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS(4 Tx slots)	Bottom Face	0	251	848.8	29.29	29.5	1.050	0.07	0.679	0.713
	GSM850	GPRS(4 Tx slots)	Edge 1	0	251	848.8	29.29	29.5	1.050	0.07	0.427	0.448
	GSM850	GPRS(4 Tx slots)	Edge 2	0	251	848.8	29.29	29.5	1.050	0.03	0.079	0.083
	GSM850	GPRS(4 Tx slots)	Edge 4	0	251	848.8	29.29	29.5	1.050	0.07	0.574	0.602
06	GSM850	GPRS(4 Tx slots)	Curved surface of Bottom Face	0	251	848.8	29.29	29.5	1.050	0.08	0.960	1.008
	GSM850	GPRS(4 Tx slots)	Curved surface of Bottom Face	0	128	824.2	29.24	29.5	1.062	0.05	0.805	0.855
	GSM850	GPRS(4 Tx slots)	Curved surface of Bottom Face	0	189	836.4	29.19	29.5	1.074	0.08	0.919	0.987
	GSM1900	GPRS(4 Tx slots)	Bottom Face	0	810	1909.8	26.31	26.5	1.045	-0.04	0.835	0.872
	GSM1900	GPRS(4 Tx slots)	Edge 1	0	810	1909.8	26.31	26.5	1.045	0.06	0.316	0.330
	GSM1900	GPRS(4 Tx slots)	Edge 4	0	810	1909.8	26.31	26.5	1.045	0.06	0.289	0.302
	GSM1900	GPRS(4 Tx slots)	Bottom Face	0	512	1850.2	26.18	26.5	1.076	0.03	0.579	0.623
07	GSM1900	GPRS(4 Tx slots)	Bottom Face	0	661	1880	26.17	26.5	1.079	0.11	0.818	<mark>0.883</mark>
	GSM1900	GPRS(4 Tx slots)	Curved surface of Bottom Face	0	810	1909.8	26.31	26.5	1.045	0.18	0.712	0.744

**Report No. : FA470101** 

### <WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA Band V	RMC 12.2K	Bottom Face	0	4132	826.4	22.16	22.5	1.081	0.02	0.374	0.404
	WCDMA Band V	RMC 12.2K	Edge 1	0	4132	826.4	22.16	22.5	1.081	0.03	0.208	0.225
	WCDMA Band V	RMC 12.2K	Edge 4	0	4132	826.4	22.16	22.5	1.081	-0.08	0.344	0.372
80	WCDMA Band V	RMC 12.2K	Curved surface of Bottom Face	0	4132	826.4	22.16	22.5	1.081	0.05	0.451	0.488
09	WCDMA Band II	RMC 12.2K	Bottom Face	0	9400	1880	22.88	23	1.028	0.02	1.220	<mark>1.254</mark>
	WCDMA Band II	RMC 12.2K	Edge 1	0	9400	1880	22.88	23	1.028	-0.04	0.478	0.491
	WCDMA Band II	RMC 12.2K	Edge 4	0	9400	1880	22.88	23	1.028	-0.03	0.564	0.580
	WCDMA Band II	RMC 12.2K	Bottom Face	0	9262	1852.4	22.64	23	1.086	0.03	0.886	0.963
	WCDMA Band II	RMC 12.2K	Bottom Face	0	9538	1907.6	22.59	23	1.099	-0.02	0.944	1.037
	WCDMA Band II	RMC 12.2K	Curved surface of Bottom Face	0	9400	1880	22.88	23	1.028	0.13	1.180	1.213
	WCDMA Band II	RMC 12.2K	Curved surface of Bottom Face	0	9262	1852.4	22.64	23	1.086	0.03	1.030	1.119
	WCDMA Band II	RMC 12.2K	Curved surface of Bottom Face	0	9538	1907.6	22.59	23	1.099	0.02	0.820	0.901

### <DTS WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Dower	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN 2.4GHz	802.11b 1Mbps	Bottom Face	0	11	2462	10.34	11	1.164	-0.06	0.349	0.406
	WLAN 2.4GHz	802.11b 1Mbps	Edge 1	0	11	2462	10.34	11	1.164	0.09	0.253	0.295
	WLAN 2.4GHz	802.11b 1Mbps	Edge 2	0	11	2462	10.34	11	1.164	0.03	0.341	0.397
10	WLAN 2.4GHz	802.11b 1Mbps	Curved surface of Bottom Face	0	11	2462	10.34	11	1.164	0.03	0.382	<mark>0.445</mark>



# SPORTON LAB. FCC SAR Test Report

# 15.3 Repeated SAR Measurement

No.	Band	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	GSM850	GPRS(4 Tx slots)	Curved surface of Bottom Face	0	251	848.8	29.29	29.5	1.050	0.08	0.960	1	1.008
2nd	GSM850	GPRS(4 Tx slots)	Curved surface of Bottom Face	0	251	848.8	29.29	29.5	1.050	0.04	0.934	1.028	0.980
1st	WCDMA Band II	RMC 12.2K	Bottom Face	0	9400	1880	22.88	23	1.028	0.02	1.220	1	1.254
2nd	WCDMA Band II	RMC 12.2K	Bottom Face	0	9400	1880	22.88	23	1.028	0.18	1.210	1.008	1.244

Report No.: FA470101

#### **General Note:**

- 1. Per KDB 865664 D01v01r03, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥0.8W/kg
- 2. Per KDB 865664 D01v01r03, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR <1.45W/kg, only one repeated measurement is required.
- 3. The ratio is the difference in percentage between original and repeated measured SAR.
- 4. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

# 16. Simultaneous Transmission Analysis

NO	Circultana and Transmission Confirmations	Ph	one	Note	
NO.	Simultaneous Transmission Configurations	Head	Body	Note	
1.	GSM(Voice) + WLAN2.4GHz(data)	Yes	Yes		
2.	WCDMA(Voice) + WLAN2.4GHz(data)	Yes	Yes		
3.	GSM(Voice) + Bluetooth(data)	Yes	Yes		
4.	WCDMA((Voice) + Bluetooth(data)	Yes	Yes		
5.	GPRS/EDGE(Data) + WLAN2.4GHz(data)	Yes	Yes	2.4GHz Hotspot	
6.	WCDMA(Data) + WLAN2.4GHz(data)	Yes	Yes	2.4GHz Hotspot	
7.	GPRS/EDGE(Data) + Bluetooth(data)	Yes	Yes	Bluetooth Tethering	
8.	WCDMA(Data) + Bluetooth(data)	Yes	Yes	Bluetooth Tethering	

Report No.: FA470101

#### **General Note:**

- This device supported VoIP in GPRS, EGPRS, WCDMA (e.g. 3rd party VoIP). 1.
- 2. WLAN and Bluetooth share the same antenna, and cannot transmit simultaneously.
- 3. EUT will choose either GSM or WCDMA according to the network signal condition; therefore, they will not transmit simultaneously at any moment.
- 4. The reported SAR summation is calculated based on the same configuration and test position.
- Per KDB 447498 D01v05r02, simultaneous transmission SAR is compliant if,
  - i) Scalar SAR summation < 1.6W/kg.
  - ii) SPLSR = (SAR1 + SAR2)^1.5 / (min. separation distance, mm), and the peak separation distance is determined from the square root of [(x1-x2)2 + (y1-y2)2 + (z1-z2)2], where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
  - iii) If SPLSR ≤ 0.04, simultaneously transmission SAR measurement is not necessary.
  - iv) Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.
- For simultaneous transmission analysis, Bluetooth SAR is estimated per KDB 447498 D01v05r02 based on the formula below.
  - i) (max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)]·[√f(GHz)/x] W/kg for test separation distances  $\leq$  50 mm; where x = 7.5 for 1-g SAR, and x = 18.75 for 10-g SAR.
  - ii) When the minimum separation distance is < 5mm, the distance is used 5mm to determine SAR test exclusion.
  - iii) 0.4 W/kg for 1-q SAR and 1.0 W/kg for 10-q SAR, when the test separation distances is > 50 mm.
  - iv) Bluetooth estimated SAR is conservatively determined by 5mm separation, for all applicable exposure positions.

Page 32 of 39

Bluetooth Max Power	Exposure Position	All Positions		
1 dBm	Estimated SAR (W/kg)	0.042 W/kg		

TEL: 86-755-8637-9589 / FAX: 86-755-8637-9595 Issued Date: Sep. 10, 2014 Form version.: 140820

FCC ID: YHLBLUSTUDIO70

# 16.1 Head Exposure Conditions

### <WWAN + WLAN>

AWW	WWAN Band		WWAN SAR (W/kg)	WLAN DTS SAR (W/kg)	Summed SAR (W/kg)	SPLSR	Case No
		Right Cheek	0.446	0.132	0.58		
	GSM850	Right Tilted	0.324	0.140	0.46		
	GSIVIOSU	Left Cheek	0.260	0.308	0.57		
GSM		Left Tilted	0.246	0.163	0.41		
GSIVI		Right Cheek	0.499	0.132	0.63		
	CCM4000	Right Tilted	0.301	0.140	0.44		
	GSM1900	Left Cheek	0.114	0.308	0.42		
		Left Tilted	0.087	0.163	0.25		
		Right Cheek	0.290	0.132	0.42		
	Band V	Right Tilted	0.222	0.140	0.36		
	вапи у	Left Cheek	0.125	0.308	0.43		
WCMDA		Left Tilted	0.173	0.163	0.34		
WCIVIDA		Right Cheek	0.896	0.132	1.03		
	Dond II	Right Tilted	0.595	0.140	0.74		
	Band II	Left Cheek	0.251	0.308	0.56		
		Left Tilted	0.196	0.163	0.36		

**Report No. : FA470101** 

### <WWAN + Bluetooth>

WWAI	WWAN Band		WWAN SAR (W/kg)	Bluetooth DSS Estimated SAR (W/kg)	Summed SAR (W/kg)	SPLSR	Case No
		Right Cheek	0.446	0.042	0.49		
	0014050	Right Tilted	0.324	0.042	0.37		
	GSM850	Left Cheek	0.260	0.042	0.30		
CCM		Left Tilted	0.246	0.042	0.29		
GSM		Right Cheek	0.499	0.042	0.54		
	CCM4000	Right Tilted	0.301	0.042	0.34		
	GSM1900	Left Cheek	0.114	0.042	0.16		
		Left Tilted	0.087	0.042	0.13		
	5 114	Right Cheek	0.290	0.042	0.33		
		Right Tilted	0.222	0.042	0.26		
	Band V	Left Cheek	0.125	0.042	0.17		
MOMPA		Left Tilted	0.173	0.042	0.22		
WCMDA		Right Cheek	0.896	0.042	0.94		
	Dond II	Right Tilted	0.595	0.042	0.64		
	Band II	Left Cheek	0.251	0.042	0.29		
		Left Tilted	0.196	0.042	0.24		

TEL: 86-755-8637-9589 / FAX: 86-755-8637-9595

Issued Date: Sep. 10, 2014 Form version. : 140820 FCC ID: YHLBLUSTUDIO70 Page 33 of 39

# 16.2 Body Accessory Exposure Conditions

### <WWAN + WLAN>

	F WLAIN>		WWAN	WLAN DTS	Summed		
WW	AN Band	Exposure Position	SAR (W/kg)	SAR (W/kg)	SAR (W/kg)	SPLSR	Case No
		Curved surface of Bottom Face	1.008	0.445	<mark>1.45</mark>		
		Bottom Face at 0 cm	0.713	0.406	1.12		
	GSM850	Edge1 at 0cm	0.448	0.295	0.74		
		Edge2 at 0cm	0.083	0.397	0.48		
GSM		Edge4 at 0cm	0.602		0.60		
GSIVI	GSM1900	Curved surface of Bottom Face	0.744	0.445	1.19		
		Bottom Face at 0 cm	0.883	0.406	1.29		
		Edge1 at 0cm	0.330	0.295	0.63		
		Edge2 at 0cm		0.397	0.40		
		Edge4 at 0cm	0.302		0.30		
	Band V	Curved surface of Bottom Face	0.488	0.445	0.93		
		Bottom Face at 0 cm	0.404	0.406	0.81		
		Edge1 at 0cm	0.225	0.295	0.52		
		Edge2 at 0cm		0.397	0.40		
WCMDA		Edge4 at 0cm	0.372		0.37		
WCMDA		Curved surface of Bottom Face	1.213	0.445	1.66	0.04	01
		Bottom Face at 0 cm	1.254	0.406	<mark>1.66</mark>	0.03	02
	Band II	Edge1 at 0cm	0.491	0.295	0.79		
		Edge2 at 0cm		0.397	0.40		
		Edge4 at 0cm	0.580		0.58		

**Report No. : FA470101** 

TEL: 86-755-8637-9589 / FAX: 86-755-8637-9595

Issued Date: Sep. 10, 2014 Form version. : 140820 FCC ID: YHLBLUSTUDIO70 Page 34 of 39



### <WWAN + Bluetooth>

			WWAN	Bluetooth DSS	Summed		
WW	AN Band	Exposure Position	SAR (W/kg)	Estimated SAR (W/kg)	SAR (W/kg)	SPLSR	Case No
		Curved surface of Bottom Face	1.008	0.042	1.05		
		Bottom Face at 0 cm	0.713	0.042	0.76		
	GSM850	Edge1 at 0cm	0.448	0.042	0.49		
		Edge2 at 0cm	0.083	0.042	0.13		
GSM		Edge4 at 0cm	0.602	0.042	0.64		
GSIVI	GSM1900	Curved surface of Bottom Face	0.744	0.042	0.79		
		Bottom Face at 0 cm	0.883	0.042	0.93		
		Edge1 at 0cm	0.330	0.042	0.37		
		Edge2 at 0cm		0.042	0.04		
		Edge4 at 0cm	0.302	0.042	0.34		
	Band V	Curved surface of Bottom Face	0.488	0.042	0.53		
		Bottom Face at 0 cm	0.404	0.042	0.45		
		Edge1 at 0cm	0.225	0.042	0.27		
		Edge2 at 0cm		0.042	0.04		
MOMPA		Edge4 at 0cm	0.372	0.042	0.41		
WCMDA	Band II	Curved surface of Bottom Face	1.213	0.042	1.26		
		Bottom Face at 0 cm	1.254	0.042	1.30		
		Edge1 at 0cm	0.491	0.042	0.53		
		Edge2 at 0cm		0.042	0.04		
		Edge4 at 0cm	0.580	0.042	0.62		

Report No. : FA470101

TEL: 86-755-8637-9589 / FAX: 86-755-8637-9595


Issued Date: Sep. 10, 2014 Form version. : 140820 FCC ID: YHLBLUSTUDIO70 Page 35 of 39


# 16.3 SPLSR Evaluation and Analysis

#### **General Note:**

1. SPLSR =  $(SAR_1 + SAR_2)^{1.5} / (min. separation distance, mm)$ . If SPLSR  $\leq 0.04$ , simultaneously transmission SAR measurement is not necessary

Report No. : FA470101

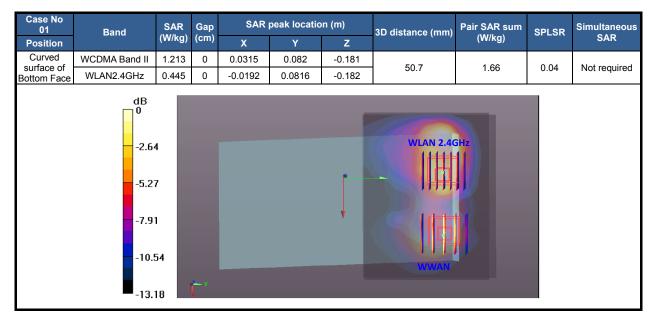

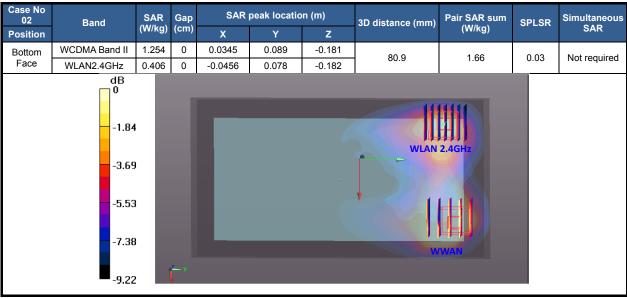

Test Engineer: Luke Lu

TEL: 86-755-8637-9589 / FAX: 86-755-8637-9595

Issued Date: Sep. 10, 2014 FCC ID: YHLBLUSTUDIO70 Page 36 of 39 Form version.: 140820

# 17. Uncertainty Assessment

The component of uncertainly may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainly by the statistical analysis of a series of observations is termed a Type An evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

Report No.: FA470101

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience, and knowledge of the behavior and properties of relevant materials and instruments, manufacture's specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in table below.

<b>Uncertainty Distributions</b>	Normal	Rectangular	Triangular	U-Shape
Multi-plying Factor <sup>(a)</sup>	1/k <sup>(b)</sup>	1/√3	1/√6	1/√2

- (a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity
- (b)  $\kappa$  is the coverage factor

#### **Table 14.1. Standard Uncertainty for Assumed Distribution**

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual "root-sum-squares" (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is shown in the following tables.

Report No. : FA470101

Error Description	Uncertainty Value (±%)	Probability Distribution	Divisor	Ci (1g)	Ci (10g)	Standard Uncertainty (1g)	Standard Uncertainty (10g)
Measurement System							
Probe Calibration	6.0	Normal	1	1	1	± 6.0 %	± 6.0 %
Axial Isotropy	4.7	Rectangular	√3	0.7	0.7	± 1.9 %	± 1.9 %
Hemispherical Isotropy	9.6	Rectangular	√3	0.7	0.7	± 3.9 %	± 3.9 %
Boundary Effects	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Linearity	4.7	Rectangular	√3	1	1	± 2.7 %	± 2.7 %
System Detection Limits	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Readout Electronics	0.3	Normal	1	1	1	± 0.3 %	± 0.3 %
Response Time	0.8	Rectangular	√3	1	1	± 0.5 %	± 0.5 %
Integration Time	2.6	Rectangular	√3	1	1	± 1.5 %	± 1.5 %
RF Ambient Noise	3.0	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
RF Ambient Reflections	3.0	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
Probe Positioner	0.4	Rectangular	√3	1	1	± 0.2 %	± 0.2 %
Probe Positioning	2.9	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
Max. SAR Eval.	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Test Sample Related							
Device Positioning	2.9	Normal	1	1	1	± 2.9 %	± 2.9 %
Device Holder	3.6	Normal	1	1	1	± 3.6 %	± 3.6 %
Power Drift	5.0	Rectangular	√3	1	1	± 2.9 %	± 2.9 %
Phantom and Setup							
Phantom Uncertainty	4.0	Rectangular	√3	1	1	± 2.3 %	± 2.3 %
Liquid Conductivity (Target)	5.0	Rectangular	√3	0.64	0.43	± 1.8 %	± 1.2 %
Liquid Conductivity (Meas.)	2.5	Normal	1	0.64	0.43	± 1.6 %	± 1.1 %
Liquid Permittivity (Target)	5.0	Rectangular	√3	0.6	0.49	± 1.7 %	± 1.4 %
Liquid Permittivity (Meas.)	2.5	Normal	1	0.6	0.49	± 1.5 %	± 1.2 %
Combined Standard Uncertainty						± 11.0 %	± 10.8 %
Coverage Factor for 95 %					K=2		
Expanded Uncertainty						± 22.0 %	± 21.5 %

Table 14.2. Uncertainty Budget for frequency range 300 MHz to 3 GHz

### 18. References

[1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"

Report No.: FA470101

- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2003, "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v01r02, "SAR Measurement Procedures for 802.11 a/b/g Transmitters", May 2007
- [6] FCC KDB 447498 D01 v05r02, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Feb 2014
- [7] FCC KDB 941225 D01 v02, "SAR Measurement Procedures for 3G Devices CDMA 2000 / Ev-Do / WCDMA / HSDPA / HSPA", October 2007
- [8] FCC KDB 941225 D02 v02r02, "SAR Guidance for HSPA, HSPA+, DC-HSDPA and 1x-Advanced", May 2013.
- [9] FCC KDB 941225 D03 v01, "Recommended SAR Test Reduction Procedures for GSM / GPRS / EDGE", December 2008
- [10] FCC KDB 616217 D04 v01r01, "SAR Evaluation Considerations for Laptop, Notebook, Netbook and Tablet Computers", May 2013
- [11] FCC KDB 865664 D01 v01r03, "SAR Measurement Requirements for 100 MHz to 6 GHz", Feb 2014.
- [12] FCC KDB 865664 D02 v01r01, "RF Exposure Compliance Reporting and Documentation Considerations" May 2013.

# Appendix A. Plots of System Performance Check

**Report No. : FA470101** 

The plots are shown as follows.

SPORTON INTERNATIONAL (SHENZHEN) INC.

#### System Check Head 835MHz 140727

#### **DUT: D835V2 - SN: 4d091**

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL\_835\_140727 Medium parameters used: f = 835 MHz;  $\sigma$  = 0.902 S/m;  $\epsilon_r$  = 40.749;  $\rho$ 

 $= 1000 \text{ kg/m}^3$ 

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.6 °C


# DASY5 Configuration:

- Probe: EX3DV4 SN3819; ConvF(9.68, 9.68, 9.68); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2013.11.22
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

# **Pin=250mW/Area Scan (61x61x1):** Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 2.87 W/kg

Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 57.830 V/m; Power Drift = -0.00 dB Peak SAR (extrapolated) = 3.35 W/kg SAR(1 g) = 2.29 W/kg; SAR(10 g) = 1.5 W/kg

SAR(1 g) = 2.29 W/kg; SAR(10 g) = 1.5 W/kg Maximum value of SAR (measured) = 2.88 W/kg

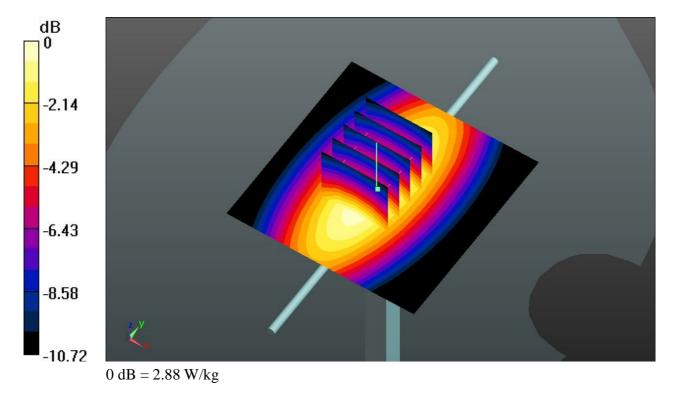

#### System Check Head 1900MHz 140728

#### **DUT: D1900V2 - SN: 5d118**

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL 1900 140728 Medium parameters used: f = 1900 MHz;  $\sigma = 1.421$  S/m;  $\varepsilon_r = 41.283$ ;

 $\rho = 1000 \text{ kg/m}^3$ 

Ambient Temperature: 23.5 °C; Liquid Temperature: 22.8 °C


#### DASY5 Configuration:

- Probe: EX3DV4 SN3819; ConvF(8, 8, 8); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2013.11.22
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

## Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 15.9 W/kg

Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 107.7 V/m; Power Drift = -0.04 dB Peak SAR (extrapolated) = 20.4 W/kg SAR(1 g) = 10.6 W/kg; SAR(10 g) = 5.73 W/kg

Maximum value of SAR (measured) = 15.8 W/kg

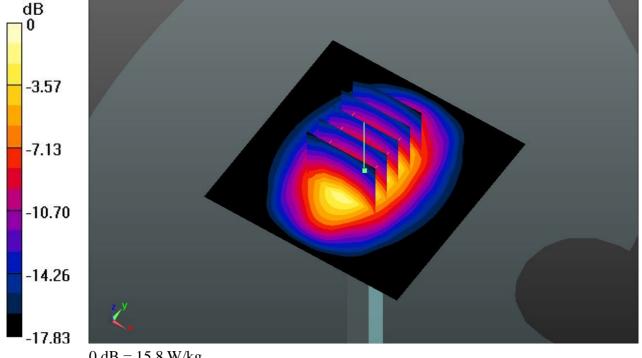

0 dB = 15.8 W/kg

#### System Check Head 2450MHz 130730

**DUT: D2450V2 - SN: 908** 

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: HSL\_2450\_140730 Medium parameters used: f = 2450 MHz;  $\sigma = 1.809$  S/m;  $\varepsilon_r = 38.451$ ;

 $\rho = 1000 \text{ kg/m}^3$ 

Ambient Temperature: 23.3 °C; Liquid Temperature: 22.7 °C


#### DASY5 Configuration:

- Probe: EX3DV4 SN3819; ConvF(7.22, 7.22, 7.22); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2013.11.22
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Pin=250mW/Area Scan (81x81x1):** Interpolated grid: dx=12mm, dy=12mm Maximum value of SAR (interpolated) = 18.8 W/kg

**Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 86.409 V/m; Power Drift = 0.02 dB Peak SAR (extrapolated) = 25.2 W/kg

SAR(1 g) = 12.7 W/kg; SAR(10 g) = 5.63 W/kgMaximum value of SAR (measured) = 18.6 W/kg

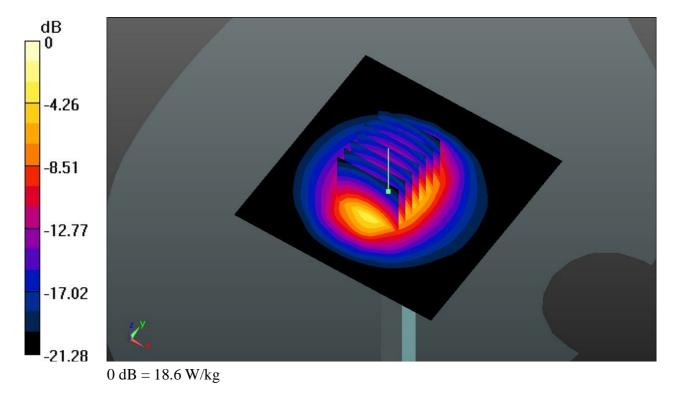

#### System Check Body 835MHz 140728

**DUT: D835V2 - SN: 4d091** 

Communication System: UID 0, CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: MSL\_835\_140728 Medium parameters used: f = 835 MHz;  $\sigma$  = 0.972 S/m;  $\epsilon_r$  = 53.975;  $\rho$ 

 $= 1000 \text{ kg/m}^3$ 

Ambient Temperature: 23.5 °C; Liquid Temperature: 22.7 °C


#### DASY5 Configuration:

- Probe: EX3DV4 SN3819; ConvF(9.54, 9.54, 9.54); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2013.11.22
- Phantom: SAM3; Type: QDOVA002AA; Serial: TP:1149
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Pin=250mW/Area Scan (61x61x1):** Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 2.38 W/kg

**Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 49.686 V/m; Power Drift = 0.02 dB Peak SAR (extrapolated) = 3.17 W/kg

SAR(1 g) = 2.21 W/kg; SAR(10 g) = 1.46 W/kgMaximum value of SAR (measured) = 2.37 W/kg

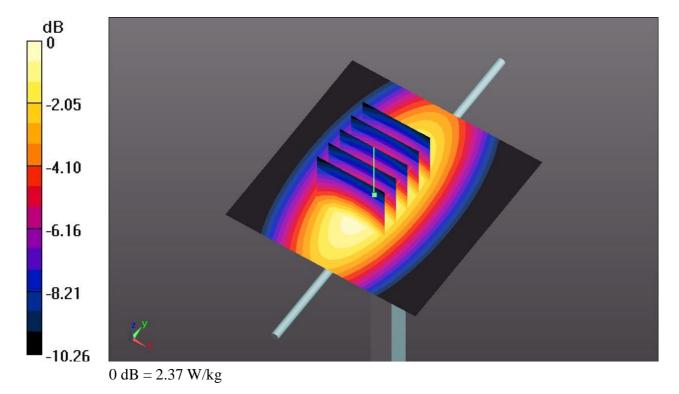

## System Check Body 1900MHz 140729

#### **DUT: D1900V2 - SN: 5d118**

Communication System: UID 0, CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: MSL\_1900\_140729 Medium parameters used: f = 1900 MHz;  $\sigma = 1.575$  S/m;  $\epsilon_r = 54.215$ ;

 $\rho = 1000 \text{ kg/m}^3$ 

Ambient Temperature: 23.3 °C; Liquid Temperature: 22.7 °C


#### DASY5 Configuration:

- Probe: EX3DV4 SN3819; ConvF(7.55, 7.55, 7.55); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2013.11.22
- Phantom: SAM3; Type: QDOVA002AA; Serial: TP:1149
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

# **Pin=250mW/Area Scan (61x61x1):** Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 15.0 W/kg

Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 85.635 V/m; Power Drift = -0.02 dB Peak SAR (extrapolated) = 18.8 W/kg SAR(1 g) = 10.7 W/kg; SAR(10 g) = 5.59 W/kg

SAR(1 g) = 10.7 W/kg; SAR(10 g) = 5.59 W/kg Maximum value of SAR (measured) = 14.9 W/kg

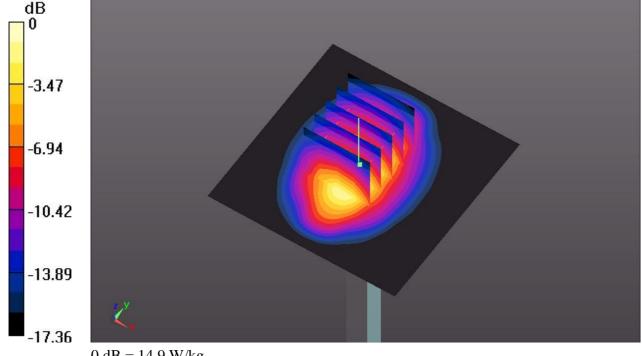

0 dB = 14.9 W/kg

#### System Check Body 2450MHz 140731

**DUT: D2450V2 - SN: 908** 

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: MSL\_2450\_140731 Medium parameters used: f = 2450 MHz;  $\sigma = 2.001$  S/m;  $\epsilon_r = 52.089$ ;

 $\rho = 1000 \text{ kg/m}^3$ 

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.6 °C


#### DASY5 Configuration:

- Probe: EX3DV4 SN3819; ConvF(7.07, 7.07, 7.07); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2013.11.22
- Phantom: SAM3; Type: QDOVA002AA; Serial: TP:1149
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Pin=250mW/Area Scan (81x81x1):** Interpolated grid: dx=12mm, dy=12mm Maximum value of SAR (interpolated) = 20.4 W/kg

**Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 86.646 V/m; Power Drift = 0.02 dB Peak SAR (extrapolated) = 27.2 W/kg

SAR(1 g) = 13.3 W/kg; SAR(10 g) = 6.13 W/kgMaximum value of SAR (measured) = 20.3 W/kg

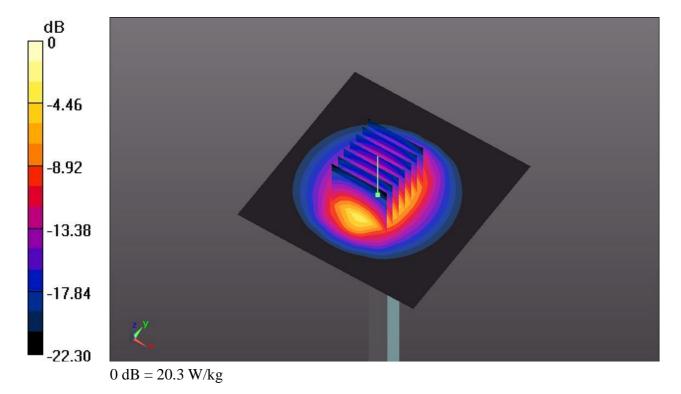

# Appendix B. Plots of SAR Measurement

Report No. : FA470101

The plots are shown as follows.

SPORTON INTERNATIONAL (SHENZHEN) INC.

#### 01 GSM850 GPRS(4 Tx slots) Right Cheek Ch251

Communication System: UID 0, GPRS/EDGE12 (0); Frequency: 848.8 MHz; Duty Cycle: 1:2.08 Medium: HSL\_835\_140727 Medium parameters used: f = 84: 0 MHz;  $\sigma = 0.913$  S/m;  $\epsilon_r = 40.606$ ;  $\rho = 1000$  kg/m<sup>3</sup>


Ambient Temperature : 23.5 °C; Liquid Temperature : 22.6 °C

#### DASY5 Configuration:

- Probe: EX3DV4 SN3819; ConvF(9.68, 9.68, 9.68); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2013.11.22
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Ch251/Area Scan (91x151x1): Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 0.590 W/kg

Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 1.341 V/m; Power Drift = 0.05 dB Peak SAR (extrapolated) = 0.759 W/kg SAR(1 g) = 0.425 W/kg; SAR(10 g) = 0.281 W/kg Maximum value of SAR (measured) = 0.550 W/kg

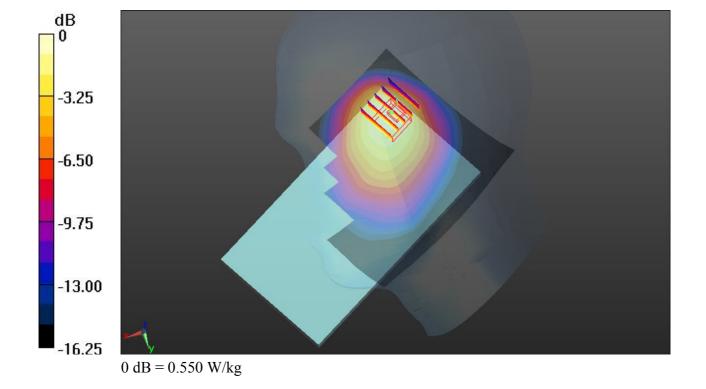

#### 02 GSM1900 GPRS(4 Tx slots) Right Cheek Ch810

Communication System: UID 0, GPRS/EDGE12 (0); Frequency: 1909.8 MHz; Duty Cycle: 1:2.08 Medium: HSL\_1900\_140728 Medium parameters used: f = 192; 0 MHz;  $\sigma = 1.43$  S/m;  $\epsilon_r = 41.238$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Date: 2014.07.28


Ambient Temperature : 23.5 °C; Liquid Temperature : 22.8 °C

#### DASY5 Configuration:

- Probe: EX3DV4 SN3819; ConvF(8, 8, 8); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2013.11.22
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Ch810/Area Scan (91x151x1):** Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 0.615 W/kg

Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 3.616 V/m; Power Drift = 0.14 dB Peak SAR (extrapolated) = 0.949 W/kg SAR(1 g) = 0.478 W/kg; SAR(10 g) = 0.233 W/kg Maximum value of SAR (measured) = 0.706 W/kg

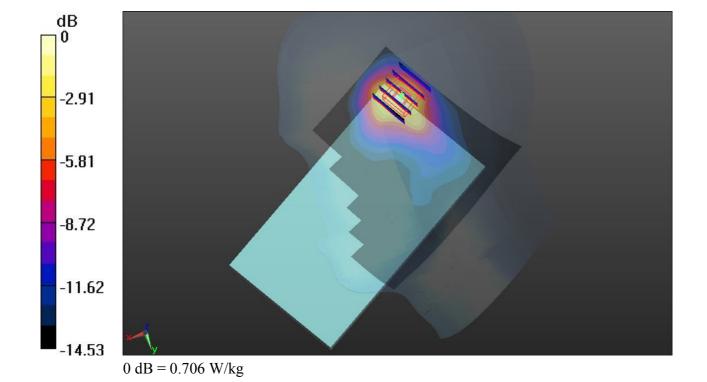

#### 03 WCDMA V RMC 12.2K Right Cheek Ch4132

Communication System: UID 0, UMTS (0); Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: HSL\_835\_140727 Medium parameters used: f = 826.6 MHz;  $\sigma$  = 0.894 S/m;  $\epsilon_r$  = 40.831;

 $\rho = 1000 \text{ kg/m}^3$ 


Ambient Temperature : 23.5 °C; Liquid Temperature : 22.6 °C

#### DASY5 Configuration:

- Probe: EX3DV4 SN3819; ConvF(9.68, 9.68, 9.68); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2013.11.22
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

# **Ch4132/Area Scan (91x151x1):** Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 0.343 W/kg

Ch4132/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 0.820 V/m; Power Drift = 0.02 dB Peak SAR (extrapolated) = 0.469 W/kg SAR(1 g) = 0.268 W/kg; SAR(10 g) = 0.175 W/kg Maximum value of SAR (measured) = 0.353 W/kg

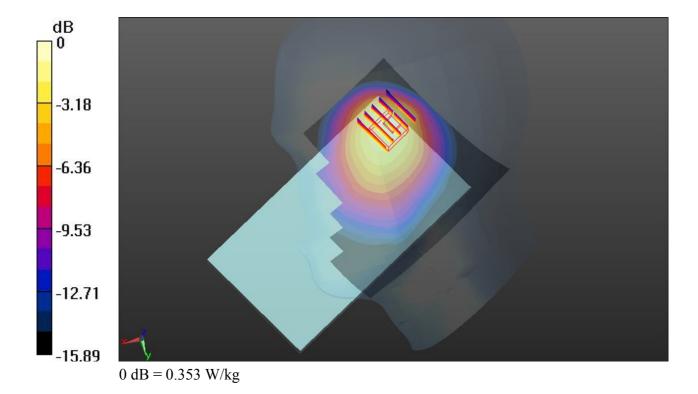

#### 04 WCDMA II RMC 12.2K Right Cheek Ch9400

Communication System: UID 0, UMTS (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium:  $HSL_{1900}140728$  Medium parameters used: f = 1880 MHz;  $\sigma = 1.401$  S/m;  $\epsilon_r = 41.376$ ;

 $\rho = 1000 \text{ kg/m}^3$ 

Ambient Temperature: 23.5 °C; Liquid Temperature: 22.8 °C

#### DASY5 Configuration:

- Probe: EX3DV4 SN3819; ConvF(8, 8, 8); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2013.11.22
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Ch9400/Area Scan (91x151x1):** Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 1.12 W/kg


Ch9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.702 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 1.77 W/kg

SAR(1 g) = 0.872 W/kg; SAR(10 g) = 0.410 W/kg

Maximum value of SAR (measured) = 1.38 W/kg

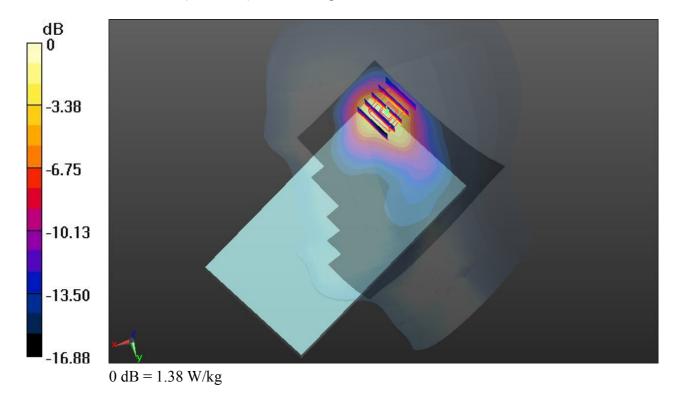

#### 05 WLAN2.4GHz 802.11b 1Mbps Left Cheek Ch11

Communication System: UID 0, WIFI (0); Frequency: 2462 MHz; Duty Cycle: 1:1

 $Medium: HSL\_2450\_140730 \ Medium \ parameters \ used: \ f=2462 \ MHz; \ \sigma=1.824 \ S/m; \ \epsilon_r=38.384;$ 

 $\rho = 1000 \text{ kg/m}^3$ 

Ambient Temperature: 23.3 °C; Liquid Temperature: 22.7 °C


#### DASY5 Configuration:

- Probe: EX3DV4 SN3819; ConvF(7.22, 7.22, 7.22); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2013.11.22
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Ch11/Area Scan (111x181x1):** Interpolated grid: dx=12mm, dy=12mm Maximum value of SAR (interpolated) = 0.446 W/kg

**Ch11/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 2.785 V/m; Power Drift = 0.02 dB Peak SAR (extrapolated) = 0.570 W/kg

SAR(1 g) = 0.265 W/kg; SAR(10 g) = 0.135 W/kgMaximum value of SAR (measured) = 0.404 W/kg

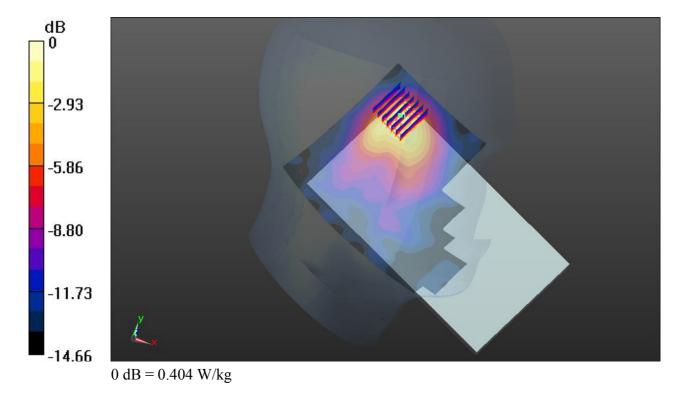

#### 06 GSM850 GPRS(4 Tx slots) Bottom Face EDGE 1 Tilted 30 Degree 0cm Ch251

Communication System: UID 0, GPRS/EDGE12 (0); Frequency: 848.8 MHz; Duty Cycle: 1:2.08 Medium: MSL\_835\_140728 Medium parameters used: f = 84: 0 MHz;  $\sigma$  = 0.987 S/m;  $\epsilon_r$  = 53.847;  $\rho$  = 1000 kg/m<sup>3</sup>

Date: 2014.07.28

Ambient Temperature: 23.5 °C; Liquid Temperature: 22.7 °C


#### DASY5 Configuration:

- Probe: EX3DV4 SN3819; ConvF(9.54, 9.54, 9.54); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2013.11.22
- Phantom: SAM3; Type: QDOVA002AA; Serial: TP:1149
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Ch251/Area Scan (91x61x1):** Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 1.09 W/kg

Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 3.749 V/m; Power Drift = 0.08 dB Peak SAR (extrapolated) = 2.88 W/kg

SAR(1 g) = 0.960 W/kg; SAR(10 g) = 0.419 W/kgMaximum value of SAR (measured) = 1.76 W/kg

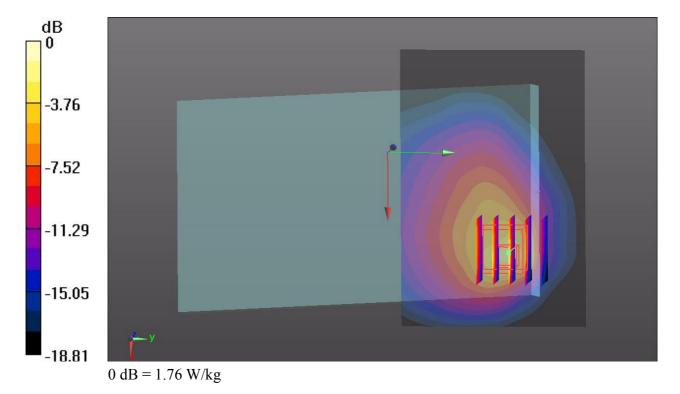

### 07 GSM1900\_GPRS(4 Tx slots)\_Bottom Face\_0cm\_Ch661

Communication System: UID 0, GPRS/EDGE12 (0); Frequency: 1880 MHz; Duty Cycle: 1:2.08 Medium: MSL\_1900\_140729 Medium parameters used: f = 1880 MHz;  $\sigma = 1.554$  S/m;  $\epsilon_r = 54.289$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Date: 2014.07.29

Ambient Temperature: 23.3 °C; Liquid Temperature: 22.7 °C

#### DASY5 Configuration:

-12.98

- Probe: EX3DV4 SN3819; ConvF(7.55, 7.55, 7.55); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2013.11.22

Maximum value of SAR (measured) = 1.20 W/kg

0 dB = 1.20 W/kg

- Phantom: SAM3; Type: QDOVA002AA; Serial: TP:1149
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Ch661/Area Scan (91x61x1):** Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 1.40 W/kg

Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 5.886 V/m; Power Drift = 0.11 dB Peak SAR (extrapolated) = 1.67 W/kg SAR(1 g) = 0.818 W/kg; SAR(10 g) = 0.372 W/kg

-2.60 -5.19 -7.79 -10.38

#### 08 WCDMA V\_RMC 12.2K\_Bottom Face EDGE 1 Tilted 30 Degree\_0cm\_Ch4132

Communication System: UID 0, UMTS (0); Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: MSL\_835\_140728 Medium parameters used: f = 826.4 MHz;  $\sigma = 0.963$  S/m;  $\varepsilon_r = 54.051$ ;

 $\rho = 1000 \text{ kg/m}^3$ 

Ambient Temperature: 23.5 °C; Liquid Temperature: 22.7 °C

#### DASY5 Configuration:

- Probe: EX3DV4 SN3819; ConvF(9.54, 9.54, 9.54); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2013.11.22
- Phantom: SAM3; Type: QDOVA002AA; Serial: TP:1149
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

# Ch4132/Area Scan (91x61x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.539 W/kg


# Ch4132/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.503 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 1.37 W/kg

## SAR(1 g) = 0.451 W/kg; SAR(10 g) = 0.199 W/kg

Maximum value of SAR (measured) = 0.820 W/kg

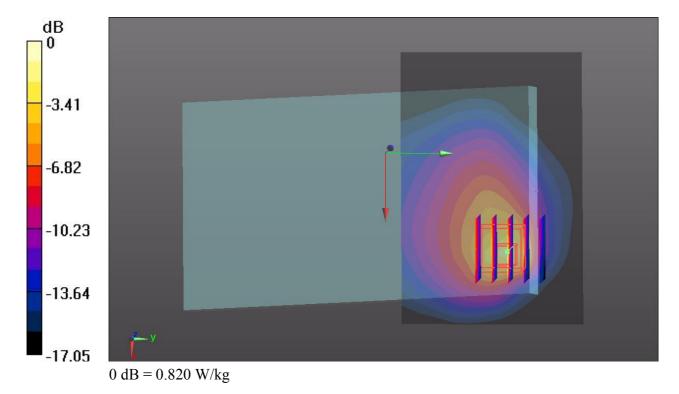

#### 09 WCDMA II RMC 12.2K Bottom Face 0cm Ch9400

Communication System: UID 0, UMTS (0); Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: MSL\_1900\_140729 Medium parameters used: f = 1880 MHz;  $\sigma$  = 1.554 S/m;  $\epsilon_r$  = 54.289;

Date: 2014.07.29

 $\rho = 1000 \text{ kg/m}^3$ 

Ambient Temperature: 23.3 °C; Liquid Temperature: 22.7 °C

#### DASY5 Configuration:

- Probe: EX3DV4 SN3819; ConvF(7.55, 7.55, 7.55); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2013.11.22
- Phantom: SAM3; Type: QDOVA002AA; Serial: TP:1149
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Ch9400/Area Scan (91x151x1):** Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 1.86 W/kg


Ch9400/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.886 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 2.52 W/kg

SAR(1 g) = 1.220 W/kg; SAR(10 g) = 0.554 W/kg

Maximum value of SAR (measured) = 1.66 W/kg

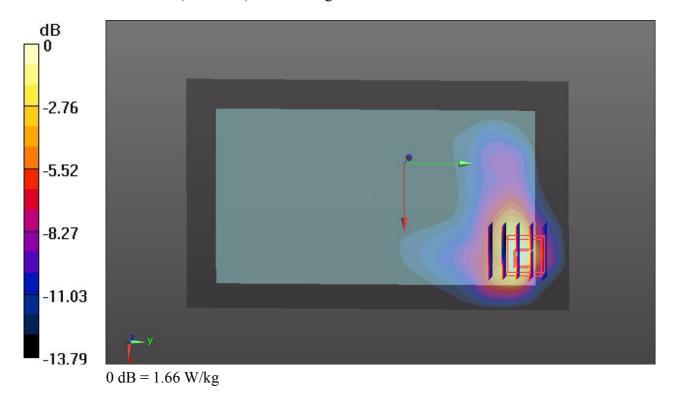

## 10 WLAN2.4GHz\_802.11b 1Mbps\_Bottom Face EDGE 1 Tilted 30 Degree\_0cm\_Ch11

Communication System: UID 0, WIFI (0); Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: MSL\_2450\_140731 Medium parameters used: f = 2462 MHz;  $\sigma$  = 2.017 S/m;  $\epsilon_r$  = 52.043;

Date: 2014.07.31

 $\rho = 1000 \text{ kg/m}^3$ 

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.6 °C

#### DASY5 Configuration:

- Probe: EX3DV4 SN3819; ConvF(7.07, 7.07, 7.07); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2013.11.22
- Phantom: SAM3; Type: QDOVA002AA; Serial: TP:1149
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Ch11/Area Scan (111x81x1):** Interpolated grid: dx=12mm, dy=12mm Maximum value of SAR (interpolated) = 0.577 W/kg

Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.755 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.709 W/kg

SAR(1 g) = 0.382 W/kg; SAR(10 g) = 0.200 W/kg

Maximum value of SAR (measured) = 0.544 W/kg

