



FCC SAR Test Report

APPLICANT : CT Asia
EQUIPMENT : Mobile Phone
BRAND NAME : BLU
MODEL NAME : Tank 4.5
FCC ID : YHLBLUTANK45
STANDARD : FCC 47 CFR Part 2 (2.1093)
ANSI/IEEE C95.1-1992
IEEE 1528-2003
FCC OET Bulletin 65 Supplement C (Edition 01-01)

The product was completely tested on Jan. 17, 2013. We, SPORTON INTERNATIONAL (SHENZHEN) INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (SHENZHEN) INC., the test report shall not be reproduced except in full.

Reviewed by:

Jones Tsai / Manager



Testing Laboratory
2353

SPORTON INTERNATIONAL (SHENZHEN) INC.

No. 101, Complex Building C, Guanglong Village, Xili Town, Nanshan District, Shenzhen, Guangdong, P.R.C.



Table of Contents

1. Statement of Compliance4
2. Administration Data5
2.1 Testing Laboratory5
2.2 Applicant5
2.3 Manufacturer5
2.4 Application Details5
3. General Information6
3.1 Description of Equipment Under Test (EUT)6
3.2 Maximum RF output power among production units7
3.3 Product Photos8
3.4 Applied Standard8
3.5 Device Category and SAR Limits8
3.6 Test Conditions8
4. Specific Absorption Rate (SAR)9
4.1 Introduction9
4.2 SAR Definition9
5. SAR Measurement System10
5.1 E-Field Probe11
5.2 Data Acquisition Electronics (DAE)11
5.3 Robot12
5.4 Measurement Server12
5.5 Phantom13
5.6 Device Holder13
5.7 Data Storage and Evaluation14
5.8 Test Equipment List16
6. Tissue Simulating Liquids17
7. SAR Measurement Evaluation18
7.1 Purpose of System Performance check18
7.2 System Setup18
7.3 SAR System Verification Results19
8. EUT Testing Position20
8.1 Define two imaginary lines on the handset20
8.2 Cheek Position21
8.3 Tilted Position21
8.4 Body Worn Position22
9. Measurement Procedures23
9.1 Spatial Peak SAR Evaluation23
9.2 Area & Zoom Scan Procedures24
9.3 Volume Scan Procedures25
9.4 SAR Averaged Methods25
9.5 Power Drift Monitoring25
10. SAR Test Configurations26
10.1 Exposure Positions Consideration26
11. Conducted RF Output Power (Unit: dBm)28
12. SAR Test Results34
12.1 Test Records for Head SAR Test34
12.2 Test Records for Hotspot SAR Test35
12.3 Test Records for Body-worn SAR Test37
12.4 Repeated SAR Measurement38
12.5 Highest SAR Plot38
12.6 Simultaneous Multi-band Transmission Analysis43
13. Uncertainty Assessment48
14. References50
Appendix A. Plots of System Performance Check
Appendix B. Plots of SAR Measurement
Appendix C. DASy Calibration Certificate
Appendix D. Product Photos
Appendix E. Test Setup Photos

1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **CT Asia; DUT: Mobile Phone; Brand Name: BLU; Model Name: Tank 4.5** are as follows.

<Highest Reported standalone SAR Summary>

Exposure Position	Frequency Band	Highest Reported 1g-SAR (W/kg)	Equipment Class	Highest Reported 1g-SAR (W/kg)
Head	GSM850	0.55	PCE	0.55
	GSM1900	0.30		
	WCDMA Band V	0.34		
	WLAN, 2412 - 2462 MHz	0.06	DTS	0.06
Hotspot (1cm Gap)	GSM850	1.17	PCE	1.17
	GSM1900	0.78		
	WCDMA Band V	0.64		
	WLAN, 2412 - 2462 MHz	0.08	DTS	0.08
Body-worn (1cm Gap)	GSM850	1.04	PCE	1.04
	GSM1900	0.52		
	WCDMA Band V	0.64		
	WLAN, 2412 - 2462 MHz	0.08	DTS	0.08

<Highest Simultaneous transmission SAR>

Frequency Band	Equipment Class	Exposure Position	Highest Reported Simultaneous Transmission 1g-SAR (W/kg)
GSM850	PCE	Body	1.25
Bluetooth	DSS		

Frequency Band	Equipment Class	Exposure Position	Highest Reported Simultaneous Transmission 1g-SAR (W/kg)
GSM850	PCE	Body	1.25
WLAN 2.4GHz	DTS		

Remark:

The highest simultaneous transmission is scalar summation of reported standalone SAR per FCC KDB 690783 D01 v01r02, and scalar SAR summation of all possible simultaneous transmission scenarios are < 1.6W/kg.

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2003 and FCC OET Bulletin 65 Supplement C (Edition 01-01).



2. Administration Data

2.1 Testing Laboratory

Test Site	SPORTON INTERNATIONAL (SHENZHEN) INC.
Test Site Location	No. 101, Complex Building C, Guanglong Village, Xili Town, Nanshan District, Shenzhen, Guangdong, P.R.C. TEL: +86-755-8637-9589 FAX: +86-755-8637-9595

2.2 Applicant

Company Name	CT Asia
Address	Unit 01, 15/F, Seaview Centre, 139-141 Hoi bun road, Kwun Tong, Kowloon, Hongkong

2.3 Manufacturer

Company Name	Beijing Tianyu Communication Equipment Co. Ltd.
Address	NO. 55 Jiachang 2 road, OPTO-Mechatronics Industrial Park, Tongzhou district, Beijing 101111

2.4 Application Details

Date of Start during the Test	Jan. 17, 2013
Date of End during the Test	Jan. 17, 2013



3. General Information

3.1 Description of Equipment Under Test (EUT)

Product Feature & Specification	
DUT	Mobile Phone
Brand Name	BLU
Model Name	Tank 4.5
FCC ID	YHLBLUTANK45
IMEI Code	869023010004028
Tx Frequency	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz WLAN2.4GHz: 2412 MHz ~ 2462 MHz Bluetooth: 2402 MHz ~ 2480 MHz
Antenna Type	WWAN: Fixed Internal Antenna WLAN: PIFA Antenna Bluetooth: PIFA Antenna
HW Version	DVT
SW Version	BLU-Tank4.5-V01-Generic
Uplink Modulations	GSM: GMSK GPRS: GMSK EDGE: GMSK / 8PSK WCDMA (Rel 6): QPSK HSDPA (Rel 6): QPSK HSUPA (Rel 6): QPSK 802.11b: DSSS (DBPSK / DQPSK / CCK) 802.11g/n: OFDM (BPSK / QPSK / 16QAM / 64QAM) Bluetooth BDR (1Mbps) : GFSK Bluetooth EDR (2Mbps) : $\pi/4$ -DQPSK Bluetooth EDR (3Mbps) : 8-DPSK
DUT Category	Class B – EUT cannot support Packet Switched and Circuit Switched Network simultaneously but can automatically switch between Packet and Circuit Switched Network.
DUT Stage	Identical Prototype
Remark:	<ol style="list-style-type: none">1. The above EUT's information was declared by manufacturer. Please refer to the specifications or user's manual for more detailed description.2. This device supports WLAN 2.4GHz hotspot operation.

3.2 Maximum RF output power among production units

Average power(dBm)		
Band	GSM850	GSM1900
GSM (GMSK, 1 Tx slot)	34	31
GPRS (GMSK, 1 Tx slot)	33.5	29.5
GPRS (GMSK, 2 Tx slots)	31.5	29
GPRS (GMSK, 3 Tx slots)	29	27
GPRS (GMSK, 4 Tx slots)	27.5	26.5
EDGE (GMSK, 1 Tx slot)	33	29.5
EDGE (GMSK, 2 Tx slots)	31	29
EDGE (GMSK, 3 Tx slots)	29	27
EDGE (GMSK, 4 Tx slots)	27.5	26
EDGE (8PSK, 1 Tx slot)	26.5	25
EDGE (8PSK, 2 Tx slots)	23.5	24
EDGE (8PSK, 3 Tx slots)	21.5	22
EDGE (8PSK, 4 Tx slots)	20	20.5

Average power(dBm)	
Band	WCDMA Band V
RMC 12.2k	23
HSDPA Subtest-1	21.5
HSDPA Subtest-2	21.5
HSDPA Subtest-3	21
HSDPA Subtest-4	21
HSUPA Subtest-1	20.5
HSUPA Subtest-2	19.5
HSUPA Subtest-3	20
HSUPA Subtest-4	19.5
HSUPA Subtest-5	21

Average power(dBm)					
Mode / Band	IEEE 802.11				
	a	b	g	n-HT20	n-HT40
2.4 GHz WIFI		15	13	13	13

Average power(dBm)			
Mode / Band	Bluetooth		
	1Mbps (GMSK)	2Mbps ($\pi/4$ -DQPSK)	3Mbps (8-DPSK)
2.4 GHz Bluetooth	6	4	4



3.3 Product Photos

Please refer to Appendix D.

3.4 Applied Standard

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- IEEE 1528-2003
- FCC OET Bulletin 65 Supplement C (Edition 01-01)
- FCC KDB 447498 D01 v05
- FCC KDB 648474 D04 v01
- FCC KDB 941225 D01 v02
- FCC KDB 941225 D03 v01
- FCC KDB 941225 D06 v01
- FCC KDB 865664 D01 v01
- FCC KDB 248227 D01 v01r02

3.5 Device Category and SAR Limits

This device belongs to portable device category because its radiating structure is allowed to be used within 20 centimeters of the body of the user. Limit for General Population/Uncontrolled exposure should be applied for this device, it is 1.6 W/kg as averaged over any 1 gram of tissue.

3.6 Test Conditions

3.5.1 Ambient Condition

Ambient Temperature	20 to 24 °C
Humidity	< 60 %

3.5.2 Test Configuration

For WWAN SAR testing, the device was controlled by using a base station emulator. Communication between the device and the emulator was established by air link. The distance between the EUT and the antenna of the emulator is larger than 50 cm and the output power radiated from the emulator antenna is at least 30 dB smaller than the output power of EUT.

During WLAN SAR testing EUT is configured with the WLAN continuous TX tool.

For WLAN SAR testing, WLAN engineering testing software installed on the EUT can provide continuous transmitting RF signal.

4. Specific Absorption Rate (SAR)

4.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

4.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$\text{SAR} = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$\text{SAR} = c \left(\frac{\delta T}{\delta t} \right)$$

Where: C is the specific heat capacity, δT is the temperature rise and δt is the exposure duration, or related to the electrical field in the tissue by

$$\text{SAR} = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

5. SAR Measurement System

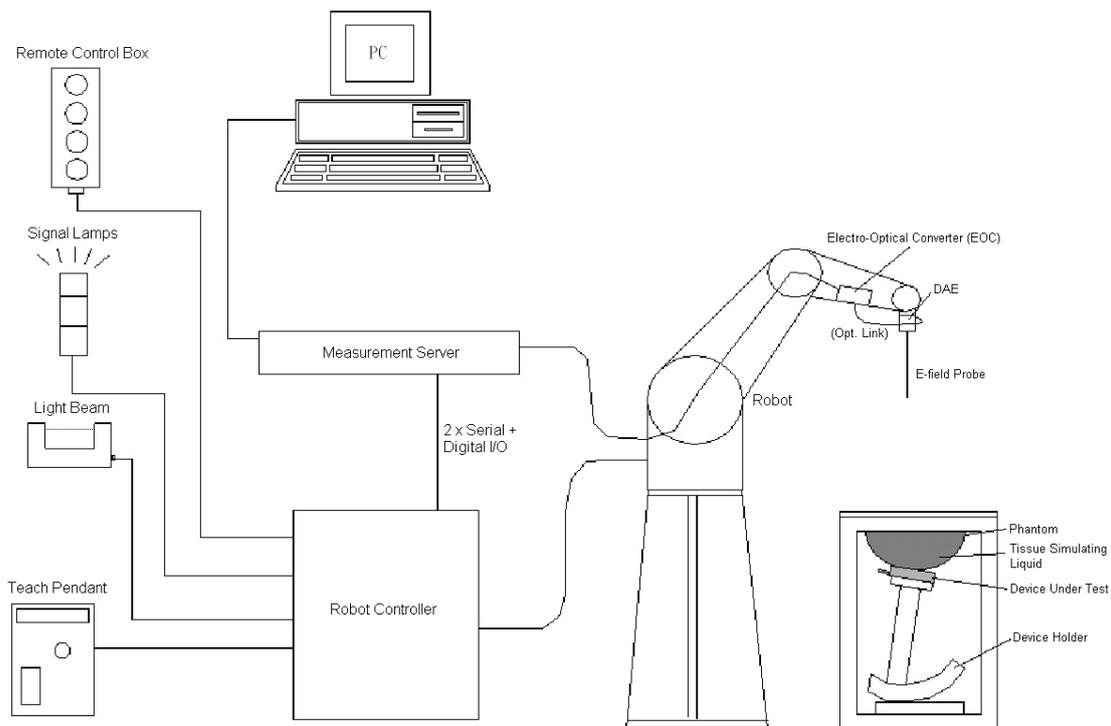


Fig 5.1 SPEAG DASY System Configurations

The DASY system for performance compliance tests is illustrated above graphically. This system consists of the following items:

- A standard high precision 6-axis robot with controller, a teach pendant and software
- A data acquisition electronic (DAE) attached to the robot arm extension
- A dosimetric probe equipped with an optical surface detector system
- The electro-optical converter (EOC) performs the conversion between optical and electrical signals
- A measurement server performs the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the accuracy of the probe positioning
- A computer operating Windows XP
- DASY software
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom
- A device holder
- Tissue simulating liquid
- Dipole for evaluating the proper functioning of the system

Component details are described in in the following sub-sections.

5.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

5.1.1 E-Field Probe Specification

<EX3DV4 Probe>

Construction	Symmetrical design with triangular core Built-in shielding against static charges PEEK enclosure material (resistant to organic solvents, e.g., DGBE)
Frequency	10 MHz to 6 GHz; Linearity: ± 0.2 dB
Directivity	± 0.3 dB in HSL (rotation around probe axis) ± 0.5 dB in tissue material (rotation normal to probe axis)
Dynamic Range	10 μ W/g to 100 mW/g; Linearity: ± 0.2 dB (noise: typically $< 1 \mu$ W/g)
Dimensions	Overall length: 330 mm (Tip: 20 mm) Tip diameter: 2.5 mm (Body: 12 mm) Typical distance from probe tip to dipole centers: 1 mm

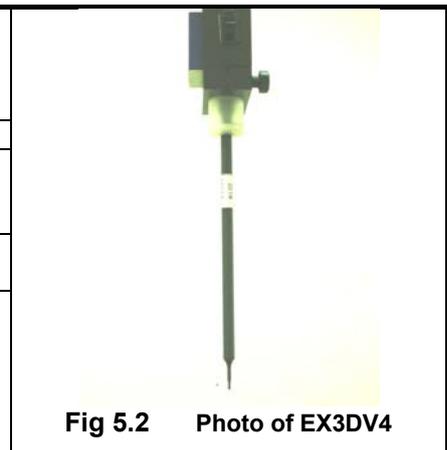


Fig 5.2 Photo of EX3DV4

5.1.2 E-Field Probe Calibration

Each probe needs to be calibrated according to a dosimetric assessment procedure with accuracy better than $\pm 10\%$. The spherical isotropy shall be evaluated and within ± 0.25 dB. The sensitivity parameters (NormX, NormY, and NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested. The calibration data can be referred to appendix C of this report.

5.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock. The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Fig 5.3 Photo of DAE

5.3 Robot

The SPEAG DASY system uses the high precision robots (DASY5: TX90XL) type from Stäubli SA (France). For the 6-axis controller system, the robot controller version (DASY5: CS8c) from Stäubli is used. The Stäubli robot series have many features that are important for our application:

- High precision (repeatability ± 0.035 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- Low ELF interference (the closed metallic construction shields against motor control fields)



Fig 5.4 Photo of DASY5

5.4 Measurement Server

The measurement server is based on a PC/104 CPU board with CPU (DASY5: 400 MHz, Intel Celeron), chipdisk (DASY5: 128 MB), RAM (DASY5: 128 MB). The necessary circuits for communication with the DAE electronic box, as well as the 16 bit AD converter system for optical detection and digital I/O interface are contained on the DASY I/O board, which is directly connected to the PC/104 bus of the CPU board.

The measurement server performs all the real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operations.



Fig 5.5 Photo of Server for DASY5

5.5 Phantom

<SAM Twin Phantom>

Shell Thickness	2 ± 0.2 mm; Center ear point: 6 ± 0.2 mm
Filling Volume	Approx. 25 liters
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet
Measurement Areas	Left Hand, Right Hand, Flat Phantom



Fig 5.6 Photo of SAM Phantom

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

5.6 Device Holder

<Device Holder for SAM Twin Phantom>

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5 mm distance, a positioning uncertainty of ± 0.5 mm would produce a SAR uncertainty of ± 20 %. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.

The DASY device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation center for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.

The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity $\epsilon = 3$ and loss tangent $\delta = 0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.



Fig 5.7 Device Holder

5.7 Data Storage and Evaluation

5.7.1 Data Storage

The DASY software stores the assessed data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all the necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files. The post-processing software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of erroneous parameter settings. For example, if a measurement has been performed with an incorrect crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be reevaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type (e.g., [V/m], [A/m], [mW/g]). Some of these units are not available in certain situations or give meaningless results, e.g., a SAR-output in a non-lose media, will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

5.7.2 Data Evaluation

The DASY post-processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software :

Probe parameters :	- Sensitivity	Norm _i , a _{i0} , a _{i1} , a _{i2}
	- Conversion factor	ConvF _i
	- Diode compression point	dcp _i
Device parameters :	- Frequency	f
	- Crest factor	cf
	Media parameters :	- Conductivity
	- Density	ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multi-meter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power.

The formula for each channel can be given as :

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

with V_i = compensated signal of channel i , ($i = x, y, z$)
 U_i = input signal of channel i , ($i = x, y, z$)
 cf = crest factor of exciting field (DASY parameter)
 dcp_i = diode compression point (DASY parameter)

From the compensated input signals, the primary field data for each channel can be evaluated :

$$\text{E-field Probes : } E_i = \sqrt{\frac{V_i}{\text{Norm}_i \cdot \text{ConvF}}}$$

$$\text{H-field Probes : } H_i = \sqrt{V_i \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}}$$

with V_i = compensated signal of channel i , ($i = x, y, z$)
 Norm_i = sensor sensitivity of channel i , ($i = x, y, z$), $\mu\text{V}/(\text{V/m})^2$ for E-field Probes
 ConvF = sensitivity enhancement in solution
 a_{ij} = sensor sensitivity factors for H-field probes
 f = carrier frequency [GHz]
 E_i = electric field strength of channel i in V/m
 H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude) :

$$E_{\text{tot}} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$\text{SAR} = E_{\text{tot}}^2 \cdot \frac{\sigma}{\rho \cdot 1000}$$

with SAR = local specific absorption rate in mW/g
 E_{tot} = total field strength in V/m
 σ = conductivity in [mho/m] or [Siemens/m]
 ρ = equivalent tissue density in g/cm^3

Note that the density is set to 1, to account for actual head tissue density rather than the density of the tissue simulating liquid.



5.8 Test Equipment List

Manufacturer	Name of Equipment	Type/Model	Serial Number	Calibration	
				Last Cal.	Due Date
SPEAG	835MHz System Validation Kit	D835V2	4d091	Nov. 18, 2011	Nov. 16, 2013
SPEAG	1900MHz System Validation Kit	D1900V2	5d118	Nov. 21, 2011	Nov. 16, 2013
SPEAG	2450MHz System Validation Kit	D2450V2	736	Jul. 25, 2011	Jul. 24, 2013
SPEAG	Data Acquisition Electronics	DAE4	1303	Nov. 22, 2012	Nov. 21, 2013
SPEAG	Dosimetric E-Field Probe	EX3DV4	3819	Nov. 26, 2012	Nov. 25, 2013
SPEAG	SAM Twin Phantom	QD 000 P40 CD	TP-1670	NCR	NCR
SPEAG	SAM Twin Phantom	QD 000 P40 CD	TP-1671	NCR	NCR
SPEAG	Test Arch Phantom	Par phantom	1105	NCR	NCR
SPEAG	Phone Positioner	N/A	N/A	NCR	NCR
Agilent	Base Station	E5515C	MY50267224	Dec. 29, 2012	Dec. 28, 2013
Agilent	ENA Series Network Analyzer	E5071C	MY46111157	Apr. 13, 2012	Apr. 12, 2013
R&S	Signal Generator	SMR40	100455	Dec. 29, 2012	Dec. 28, 2013
Agilent	Power Meter	E4416A	MY45101555	Aug. 22, 2012	Aug. 21, 2013
Agilent	Power Sensor	E9327A	MY44421198	Aug. 22, 2012	Aug. 21, 2013
Woken	Attenuator 1	WK0602-XX	N/A	Note 4	
PE	Attenuator 2	PE7005-10	N/A	Note 4	
PE	Attenuator 3	PE7005-3	N/A	Note 4	
Agilent	Dual Directional Coupler	778D	50422	Note 4	
Agilent	Dielectric Probe Kit	85070D	US01440205	Note 5	
AR	Power Amplifier	5S1G4M2	0328767	Note 6	
R&S	Spectrum Analyzer	FSP30	101400	Jun. 01, 2012	May 31, 2013

Table 5.1 Test Equipment List

Note:

1. The calibration certificate of DASY can be referred to appendix C of this report.
2. Referring to KDB 865664 D01v01, the dipole calibration interval can be extended to 3 years with justification. The dipoles are also not physically damaged, or repaired during the interval.
3. The justification data of dipole D835V2, SN: 4d091; D1900V2, SN: 5d118, D2450V2, SN: 736 can be found in appendix C. The return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration.
4. The Insertion Loss calibration of Dual Directional Coupler and Attenuator were characterized via the network analyzer and compensated during system check.
5. The dielectric probe kit was calibrated via the network analyzer, with the specified procedure (calibrated in pure water) and calibration kit (standard) short circuit, before the dielectric measurement. The specific procedure and calibration kit are provided by Agilent.
6. In system check we need to monitor the level on the power meter, and adjust the power amplifier level to have precise power level to the dipole; the measured SAR will be normalized to 1W input power according to the ratio of 1W to the input power to the dipole. For system check, the calibration of the power amplifier is deemed not critically required for correct measurement; the power meter is critical and we do have calibration for it.

6. Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 6.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 6.2.



Fig 6.1 Photo of Liquid Height for Head SAR



Fig 6.2 Photo of Liquid Height for Body SAR

The following table gives the recipes for tissue simulating liquid.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (ϵ_r)
For Head								
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
For Body								
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7

Table 6.1 Recipes of Tissue Simulating Liquid

The dielectric parameters of the liquids were verified prior to the SAR evaluation using an Agilent 85070D Dielectric Probe Kit and an Agilent Network Analyzer.

The following table shows the measuring results for simulating liquid.

Freq. (MHz)	Liquid Type	Temp. (°C)	Conductivity (σ)	Permittivity (ϵ_r)	Conductivity Target (σ)	Permittivity Target (ϵ_r)	Delta (σ) (%)	Delta (ϵ_r) (%)	Limit (%)	Date
835	Head	21.5	0.918	41.297	0.90	41.5	2.00	-0.49	±5	Jan. 17, 2013
1900	Head	21.4	1.419	40.609	1.40	40.0	1.36	1.52	±5	Jan. 17, 2013
2450	Head	21.7	1.82	39.753	1.80	39.2	1.11	1.41	±5	Jan. 17, 2013
835	Body	21.5	0.969	56.069	0.97	55.2	-0.10	1.57	±5	Jan. 17, 2013
1900	Body	21.6	1.528	54.867	1.52	53.3	0.53	2.94	±5	Jan. 17, 2013
2450	Body	21.2	1.939	53.98	1.95	52.7	-0.56	2.43	±5	Jan. 17, 2013

Table 6.2 Measuring Results for Simulating Liquid

7. SAR Measurement Evaluation

Each DASY system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the DASY software, enable the user to conduct the system performance check and system validation. System validation kit includes a dipole, tripod holder to fix it underneath the flat phantom and a corresponding distance holder.

7.1 Purpose of System Performance check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

7.2 System Setup

In the simplified setup for system evaluation, the EUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

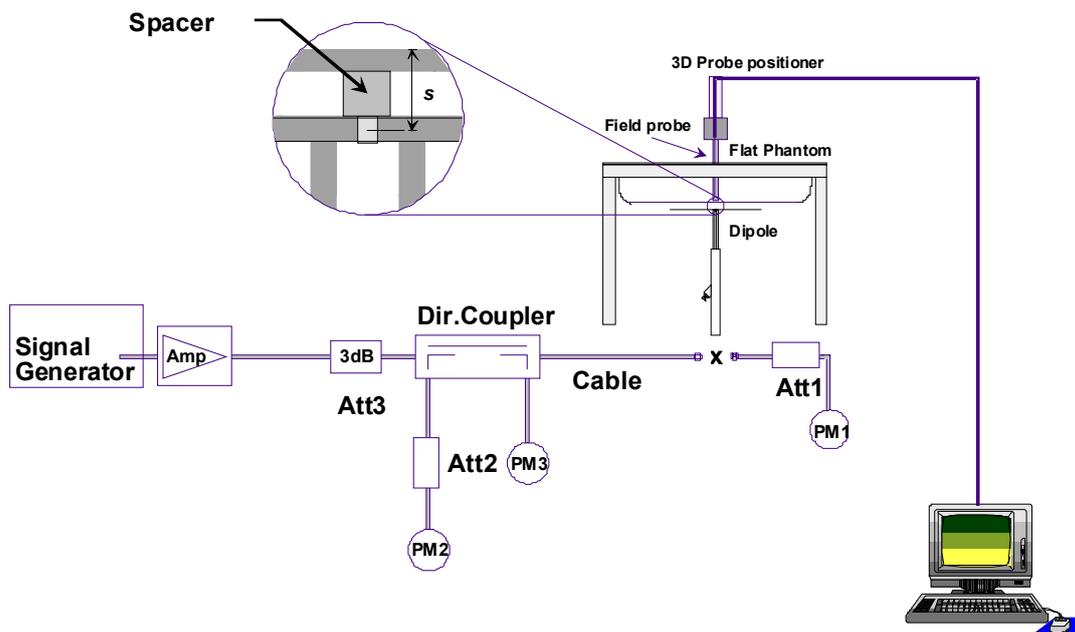


Fig 7.1 System Setup for System Evaluation

1. Signal Generator
2. Amplifier
3. Directional Coupler
4. Power Meter
5. Calibrated Dipole



Fig 7.2 Photo of Dipole Setup

7.3 SAR System Verification Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Table 7.1 shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Measurement Date	Frequency (MHz)	Liquid Type	Power fed onto reference dipole (mW)	Targeted SAR _{1g} (W/kg)	Measured SAR _{1g} (W/kg)	Normalized SAR _{1g} (W/kg)	Deviation (%)
Jan. 17, 2013	835	Head	250	9.40	2.41	9.64	2.55
Jan. 17, 2013	1900	Head	250	40.3	9.52	38.08	-5.51
Jan. 17, 2013	2450	Head	250	54.8	14.1	56.4	2.92
Jan. 17, 2013	835	Body	250	9.42	2.29	9.16	-2.76
Jan. 17, 2013	1900	Body	250	41.8	10.2	40.8	-2.39
Jan. 17, 2013	2450	Body	250	52.3	13.6	54.4	4.02

Table 7.1 Target and Measurement SAR after Normalized

8. EUT Testing Position

This EUT was tested in ten different positions. They are right cheek, right tilted, left cheek, left tilted, Front of the EUT with phantom 1 cm gap, Back of the EUT with phantom 1 cm gap, Top Side of the EUT with phantom 1 cm gap, Bottom Side of the EUT with phantom 1 cm gap, Right Side of the EUT with phantom 1 cm gap, and Left Side of the EUT with phantom 1 cm gap, as illustrated below:

8.1 Define two imaginary lines on the handset

- The vertical centerline passes through two points on the front side of the handset - the midpoint of the width w_t of the handset at the level of the acoustic output, and the midpoint of the width w_b of the bottom of the handset.
- The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output. The horizontal line is also tangential to the face of the handset at point A.
- The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset, especially for clamshell handsets, handsets with flip covers, and other irregularly shaped handsets.

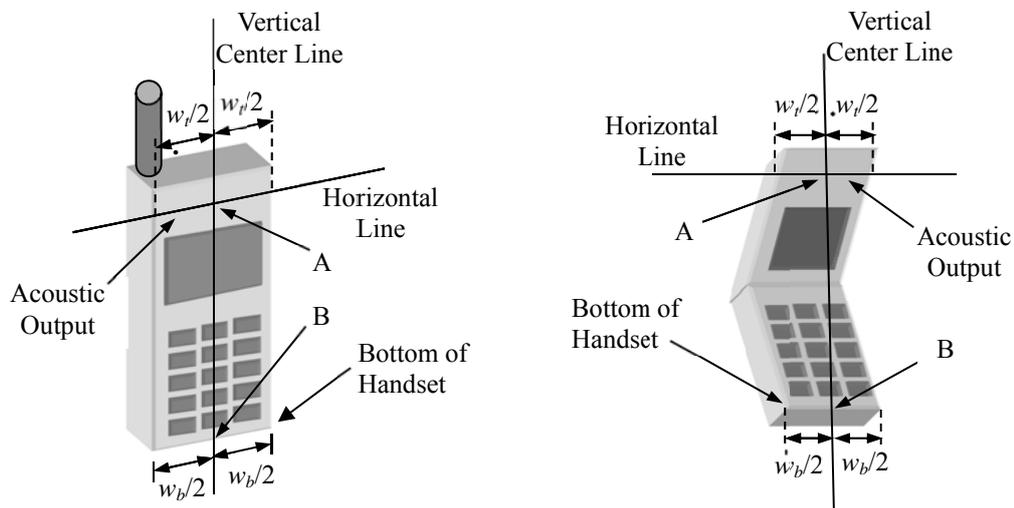


Fig 8.1 Illustration for Handset Vertical and Horizontal Reference Lines

8.2 Cheek Position

- (a) To position the device with the vertical center line of the body of the device and the horizontal line crossing the center piece in a plane parallel to the sagittal plane of the phantom. While maintaining the device in this plane, align the vertical center line with the reference plane containing the three ear and mouth reference point (M: Mouth, RE: Right Ear, and LE: Left Ear) and align the center of the ear piece with the line RE-LE.
- (b) To move the device towards the phantom with the ear piece aligned with the line LE-RE until the phone touched the ear. While maintaining the device in the reference plane and maintaining the phone contact with the ear, move the bottom of the phone until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost (see Fig. 8.2).

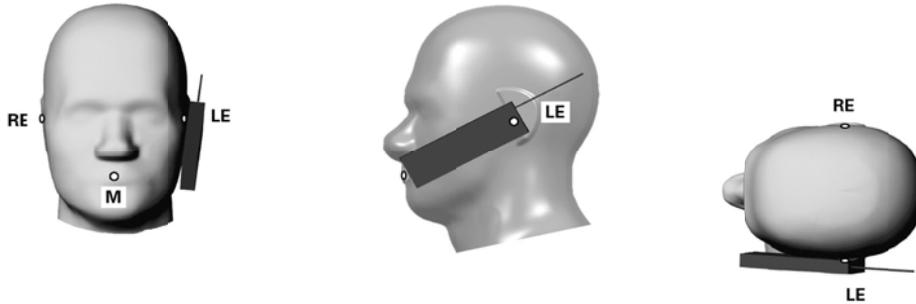


Fig 8.2 Illustration for Cheek Position

8.3 Tilted Position

- (a) To position the device in the “cheek” position described above.
- (b) While maintaining the device the reference plane described above and pivoting against the ear, moves it outward away from the mouth by an angle of 15 degrees or until contact with the ear is lost (sees Fig. 8.3).

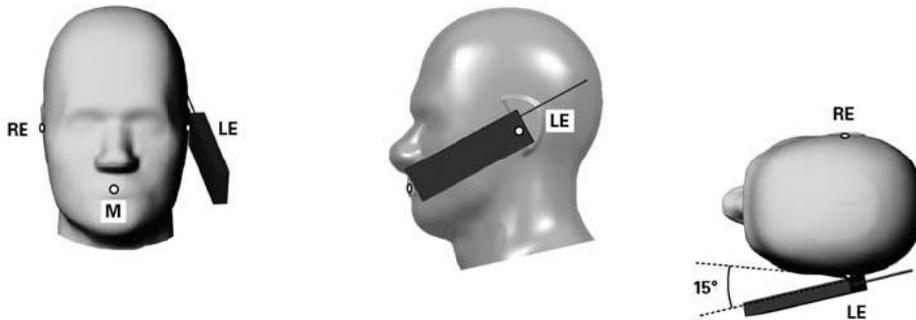


Fig 8.3 Illustration for Tilted Position

8.4 Body Worn Position

- (a) To position the device parallel to the phantom surface with either keypad up or down.
- (b) To adjust the device parallel to the flat phantom.
- (c) To adjust the distance between the device surface and the flat phantom to 1 cm.

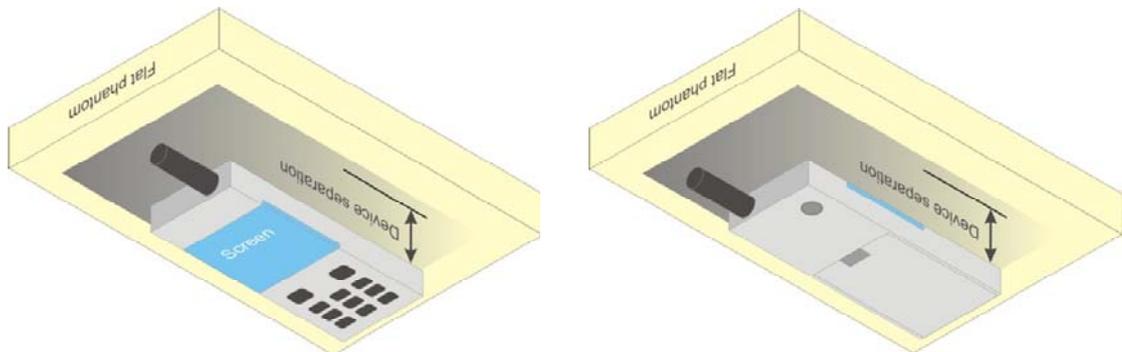


Fig 8.4 Illustration for Body Worn Position

8.5 Hotspot Position

- (a) To position the device parallel to the phantom surface with all sides.
- (b) To adjust the device parallel to the flat phantom.
- (c) To adjust the distance between the device and the flat phantom to 1 cm.

<EUT Setup Photos>

Please refer to Appendix E for the test setup photos.

9. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

- (a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.
- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix E demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

9.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values from the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

9.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

9.3 Area & Zoom Scan Procedures

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g.

Area scan and zoom scan resolution setting follows KDB 865664 D01v01 quoted below.

For any secondary peaks found in the area scan which are within 2 dB of the maximum peak and are not within this zoom scan, the zoom scan should be repeated.

		≤ 3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface		5 ± 1 mm	$\frac{1}{2} \delta \cdot \ln(2) \pm 0.5$ mm
Maximum probe angle from probe axis to phantom surface normal at the measurement location		$30^\circ \pm 1^\circ$	$20^\circ \pm 1^\circ$
Maximum area scan spatial resolution: $\Delta x_{Area}, \Delta y_{Area}$		≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm
		When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be \leq the corresponding x or y dimension of the test device with at least one measurement point on the test device.	
Maximum zoom scan spatial resolution: $\Delta x_{Zoom}, \Delta y_{Zoom}$		≤ 2 GHz: ≤ 8 mm 2 – 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*
Maximum zoom scan spatial resolution, normal to phantom surface	uniform grid: $\Delta z_{Zoom}(n)$	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm
	graded grid	$\Delta z_{Zoom}(1)$: between 1 st two points closest to phantom surface	≤ 4 mm
		$\Delta z_{Zoom}(n>1)$: between subsequent points	$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$
Minimum zoom scan volume	x, y, z	≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm
<p>Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.</p> <p>* When zoom scan is required and the reported SAR from the area scan based 1-g SAR estimation procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.</p>			



9.4 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

9.5 SAR Averaged Methods

In DASYS, the interpolation and extrapolation are both based on the modified Quadratic Shepard's method. The interpolation scheme combines a least-square fitted function method and a weighted average method which are the two basic types of computational interpolation and approximation.


Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5 mm.

9.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASYS measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

10. SAR Test Configurations

10.1 Exposure Positions Consideration

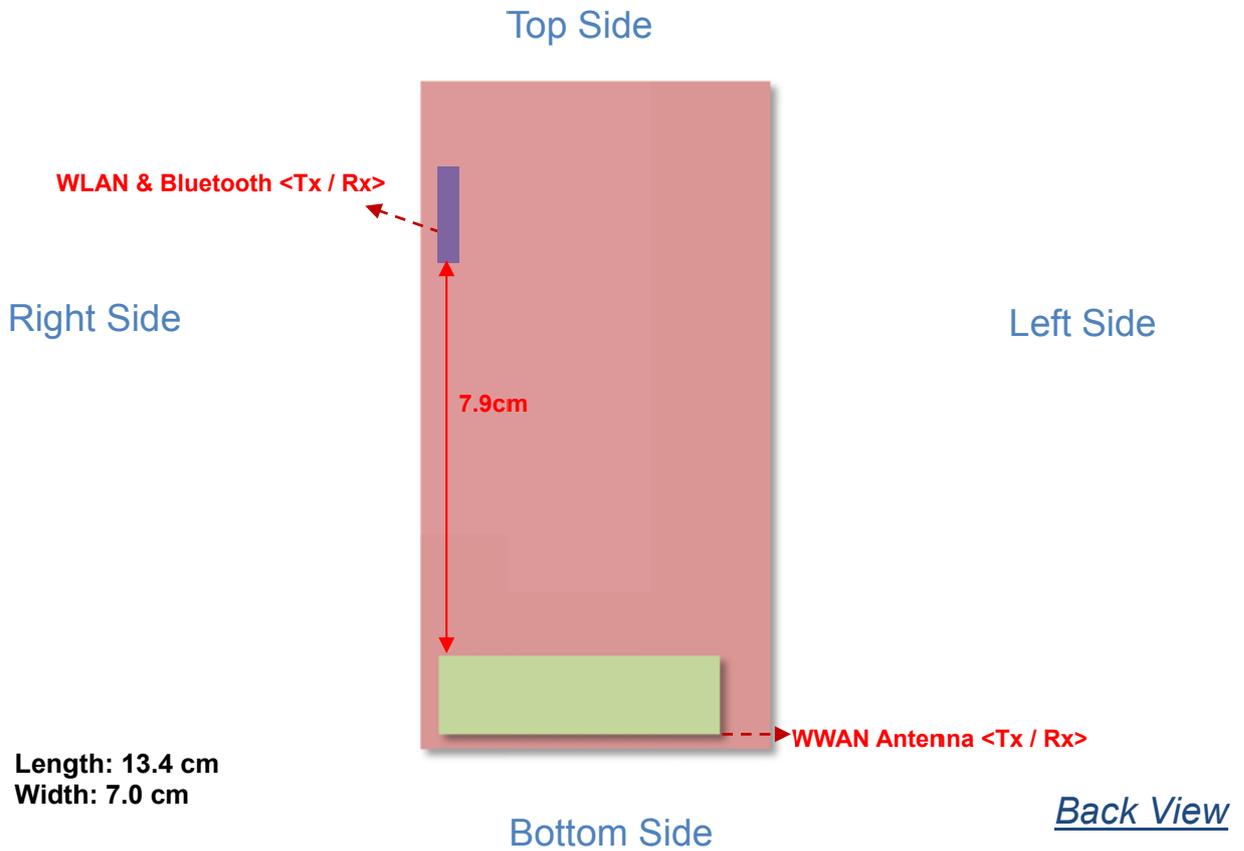

Antennas	Wireless Interface
WWAN Antenna (Tx / Rx)	GSM:850/1900 WCDMA: Band V
WLAN & Bluetooth Antenna (Tx / Rx)	WLAN 2.4GHz Bluetooth



Distance of the Antenna to the EUT surface/edge Test distance: 10 mm						
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side
WWAN Antenna	≤ 25mm	≤ 25mm	122mm	≤ 25mm	≤ 25mm	≤ 25mm
WLAN & Bluetooth Antenna	≤ 25mm	≤ 25mm	≤ 25mm	95mm	≤ 25mm	65mm

Sides for SAR tests; Hotspot mode Test distance: 10 mm						
Antennas	Front	Back	Top Side	Bottom Side	Right Side	Left Side
WWAN Antenna	YES	YES	NO	YES	YES	YES
WLAN & Bluetooth Antenna	YES	YES	YES	NO	YES	NO

Note:

1. Head/Body-worn/Hotspot mode SAR assessments are required.
2. Referring to KDB 941225 D06, when the overall device length and width are ≥ 9cm*5cm, the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge.
3. Per KDB 447498 D01v05, for handsets the test separation distance is determined by the smallest distance between the outer surface of the device and the user; which is 0mm for head SAR, 10mm for hotspot SAR, 10mm for body-worn SAR.
4. If the test separation distance (antenna-user) is < 5mm, 5mm is used for excluded SAR calculation
5. For minimum test separation distance ≤50mm, Bluetooth standalone SAR is excluded according to $[(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm})] \cdot [\sqrt{f(\text{GHz})}] \leq 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR.

	Wireless Interface	Bluetooth
	Tune-up Maximum power (dBm)	6
	Tune-up Maximum rated power (mW)	3.98
Head	Antenna to user (mm)	5
	SAR exclusion threshold (mW)	10
	SAR testing required?	NO
Body	Antenna to user (mm)	10
	SAR exclusion threshold (mW)	19
	SAR testing required?	NO

11. Conducted RF Output Power (Unit: dBm)

<GSM Conducted Power>

Note:

1. Per KDB 447498 D01v05, the maximum output power channel is used for SAR testing and for further SAR test reduction.
2. The EUT do not support DTM function.

Band: GSM850 Channel	Burst Average Power (dBm)			Frame-Average Power (dBm)		
	128	189	251	128	189	251
Frequency (MHz)	824.2	836.4	848.8	824.2	836.4	848.8
GSM (GMSK, 1 Tx slot)	32.86	32.96	33.02	23.86	23.96	24.02
GPRS (GMSK, 1 Tx slot) – CS1	32.84	32.93	33.00	23.84	23.93	24.00
GPRS (GMSK, 2 Tx slots) – CS1	30.73	30.61	30.59	24.73	24.61	24.59
GPRS (GMSK, 3 Tx slots) – CS1	28.69	28.56	28.53	24.43	24.30	24.27
GPRS (GMSK, 4 Tx slots) – CS1	27.12	27.00	26.97	24.12	24.00	23.97
EDGE (GMSK, 1 Tx slot) – MCS1	32.83	32.92	32.98	23.83	23.92	23.98
EDGE (GMSK, 2 Tx slots) – MCS1	30.71	30.60	30.58	24.71	24.60	24.58
EDGE (GMSK, 3 Tx slots) – MCS1	28.68	28.55	28.51	24.42	24.29	24.25
EDGE (GMSK, 4 Tx slots) – MCS1	27.09	26.99	26.95	24.09	23.99	23.95
EDGE (8PSK, 1 Tx slot) – MCS5	26.05	25.90	25.70	17.05	16.90	16.70
EDGE (8PSK, 2 Tx slots) – MCS5	23.38	23.19	23.00	17.38	17.19	17.00
EDGE (8PSK, 3 Tx slots) – MCS5	21.30	21.06	20.86	17.04	16.80	16.60
EDGE (8PSK, 4 Tx slots) – MCS5	19.62	19.42	19.30	16.62	16.42	16.30

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.
The calculated method are shown as below:
Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB
Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB
Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB
Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

Note:

1. For Head SAR testing, GSM should be evaluated, therefore the EUT was set in GSM Voice for GSM850 due to its highest frame-average power.
2. For Hotspot SAR testing, GPRS and EDGE should be evaluated, therefore the EUT was set in GPRS 2 Tx slots for GSM850 due to its highest frame-average power.
3. For Body-worn SAR testing, GSM Voice should be evaluated, therefore the EUT was set in GSM Voice for GSM850 due to its highest frame-average power.



Band: GSM1900	Burst Average Power (dBm)			Frame-Average Power (dBm)		
	Channel	512	661	810	512	661
Frequency (MHz)	1850.2	1880.0	1909.8	1850.2	1880.0	1909.8
GSM (GMSK, 1 Tx slot)	29.32	29.26	29.22	20.32	20.26	20.22
GPRS (GMSK, 1 Tx slot) – CS1	29.26	29.20	29.16	20.26	20.20	20.16
GPRS (GMSK, 2 Tx slots) – CS1	28.50	28.43	28.40	22.50	22.43	22.40
GPRS (GMSK, 3 Tx slots) – CS1	26.65	26.56	26.57	22.39	22.30	22.31
GPRS (GMSK, 4 Tx slots) – CS1	25.59	25.51	25.50	22.59	22.51	22.50
EDGE (GMSK, 1 Tx slot) – MCS1	29.26	29.19	29.16	20.26	20.19	20.16
EDGE (GMSK, 2 Tx slots) – MCS1	28.49	28.42	28.39	22.49	22.42	22.39
EDGE (GMSK, 3 Tx slots) – MCS1	26.63	26.54	26.52	22.37	22.28	22.26
EDGE (GMSK, 4 Tx slots) – MCS1	25.57	25.48	25.48	22.57	22.48	22.48
EDGE (8PSK, 1 Tx slot) – MCS5	24.85	24.69	24.33	15.85	15.69	15.33
EDGE (8PSK, 2 Tx slots) – MCS5	23.76	23.60	23.25	17.76	17.60	17.25
EDGE (8PSK, 3 Tx slots) – MCS5	21.59	21.35	20.94	17.33	17.09	16.68
EDGE (8PSK, 4 Tx slots) – MCS5	20.15	19.93	19.48	17.15	16.93	16.48

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.
The calculated method are shown as below:
Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB
Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB
Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB
Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

Note:

1. For Head SAR testing, GSM should be evaluated, therefore the EUT was set in GSM Voice for GSM1900 due to its highest frame-average power.
2. For Hotspot SAR testing, GPRS and EDGE should be evaluated, therefore the EUT was set in GPRS 4 Tx slots for GSM1900 due to its highest frame-average power.
3. For Body-worn SAR testing, GSM Voice should be evaluated, therefore the EUT was set in GSM Voice for GSM1900 due to its highest frame-average power.

<WCDMA Conducted Power>

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.

A summary of these settings are illustrated below:

HSDPA Setup Configuration:

- a. The EUT was connected to Base Station referred to the drawing of Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
 - i. Set Gain Factors (β_c and β_d) and parameters were set according to each
 - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
 - iii. Set RMC 12.2Kbps + HSDPA mode.
 - iv. Set Cell Power = -86 dBm
 - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
 - vi. Select HSDPA Uplink Parameters
 - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
 - viii. Set Ack-Nack Repetition Factor to 3
 - ix. Set CQI Feedback Cycle (k) to 4 ms
 - x. Set CQI Repetition Factor to 2
 - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$.

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH test in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA, Δ_{ACK} and $\Delta_{NACK} = 30/15$ with $\beta_{HS} = 30/15 * \beta_c$, and $\Delta_{CQI} = 24/15$ with $\beta_{HS} = 24/15 * \beta_c$.

Note 3: CM = 1 for $\beta_c/\beta_d = 12/15$, $\beta_{HS}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the β_c/β_d ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 11/15$ and $\beta_d = 15/15$.

Setup Configuration

HSUPA Setup Configuration:

- a. The EUT was connected to Base Station referred to the drawing of Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting * :
 - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
 - ii. Set the Gain Factors (β_c and β_d) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121
 - iii. Set Cell Power = -86 dBm
 - iv. Set Channel Type = 12.2k + HSPA
 - v. Set UE Target Power
 - vi. Power Ctrl Mode= Alternating bits
 - vii. Set and observe the E-TFCl
 - viii. Confirm that E-TFCl is equal to the target E-TFCl of 75 for sub-test 1, and other subtest's E-TFCl
- d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub-test	β_c	β_d	β_d (SF)	β_c/β_d	β_{HS} (Note 1)	β_{ec}	β_{ed} (Note 5) (Note 6)	β_{ed} (SF)	β_{ed} (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 6)	E-TFCl
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/225	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	$\beta_{ed1}: 47/15$ $\beta_{ed2}: 47/15$	4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 (Note 4)	15/15 (Note 4)	64	15/15 (Note 4)	30/15	24/15	134/15	4	1	1.0	0.0	21	81

Note 1: $\Delta_{ACK}, \Delta_{NACK}$ and $\Delta_{CQI} = 30/15$ with $\beta_{hs} = 30/15 * \beta_c$.

Note 2: CM = 1 for $\beta_c/\beta_d = 12/15, \beta_{hs}/\beta_c = 24/15$. For all other combinations of DPDCH, DPCCH, HS-DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.

Note 3: For subtest 1 the β_c/β_d ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 10/15$ and $\beta_d = 15/15$.

Note 4: For subtest 5 the β_c/β_d ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to $\beta_c = 14/15$ and $\beta_d = 15/15$.

Note 5: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to TS25.306 Table 5.1g.

Note 6: β_{ed} can not be set directly, it is set by Absolute Grant Value.

Setup Configuration



<WCDMA Conducted Power>

Note:

1. Per KDB 941225 D01, RMC 12.2kbps setting is used to evaluate SAR. If AMR 12.2kbps power is < 0.25dB higher than RMC 12.2kbps, SAR tests with AMR 12.2kbps can be excluded.
2. By design, AMR, HSDPA and HSUPA RF power will not be larger than RMC 12.2kbps. detailed information is included in Tune-up Procure exhibit.
3. It is expected by the manufacturer that MPR for some HSDPA and HSUPA subtests may differ from the specification of 3GPP, according to the chipset implementation in this model. The implementation and expected deviation are detailed in tune-up procedure exhibit.

WCDMA Average power (dBm)				
Band		WCDMA Band V		
Channel		4132	4182	4233
Frequency (MHz)		826.4	836.4	846.6
3GPP Rel 6	AMR 12.2K	22.14	22.16	22.06
3GPP Rel 6	RMC 12.2K	22.16	22.19	22.08
3GPP Rel 6	HSDPA Subtest-1	21.25	21.28	21.17
3GPP Rel 6	HSDPA Subtest-2	21.23	21.24	21.16
3GPP Rel 6	HSDPA Subtest-3	20.79	20.81	20.74
3GPP Rel 6	HSDPA Subtest-4	20.81	20.84	20.76
3GPP Rel 6	HSUPA Subtest-1	20.32	20.39	20.26
3GPP Rel 6	HSUPA Subtest-2	19.31	19.36	19.23
3GPP Rel 6	HSUPA Subtest-3	19.81	19.84	19.76
3GPP Rel 6	HSUPA Subtest-4	19.34	19.37	19.29
3GPP Rel 6	HSUPA Subtest-5	20.79	20.84	20.76

		MPR (dB)			
3GPP MPR	Subtest		WCDMA Band V		
0	3GPP Rel 6	HSDPA Subtest-1	0.00	0.00	0.00
0	3GPP Rel 6	HSDPA Subtest-2	0.02	0.04	0.01
≤ 0.5	3GPP Rel 6	HSDPA Subtest-3	0.46	0.47	0.43
≤ 0.5	3GPP Rel 6	HSDPA Subtest-4	0.44	0.44	0.41
0	3GPP Rel 6	HSUPA Subtest-1	0.47	0.45	0.50
≤ 2	3GPP Rel 6	HSUPA Subtest-2	1.48	1.48	1.53
≤ 1	3GPP Rel 6	HSUPA Subtest-3	0.98	1.00	1.00
≤ 2	3GPP Rel 6	HSUPA Subtest-4	1.45	1.47	1.47
0	3GPP Rel 6	HSUPA Subtest-5	0.00	0.00	0.00

<WLAN 2.4GHz Conducted Power>

Mode	Channel	Frequency (MHz)	Average power (dBm)			
			Data Rate (bps)			
			1M	2M	5.5M	11M
802.11b	CH 01	2412	14.00	14.07	14.12	14.29
	CH 06	2437	14.11	14.11	14.18	14.30
	CH 11	2462	14.26	14.25	14.41	14.46

Mode	Channel	Frequency (MHz)	Average power (dBm)							
			Data Rate (bps)							
			6M	9M	12M	18M	24M	36M	48M	54M
802.11g	CH 01	2412	12.18	12.25	12.22	12.55	12.76	12.72	12.75	12.80
	CH 06	2437	12.21	12.69	12.17	12.52	12.75	12.79	12.81	12.86
	CH 11	2462	12.23	12.78	12.18	12.24	12.77	12.90	12.88	12.93

Mode	Channel	Frequency (MHz)	Average power (dBm)							
			MCS Index							
			MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
802.11n HT20	CH 01	2412	11.52	11.64	11.66	11.66	11.23	11.79	11.78	11.85
	CH 06	2437	11.56	11.47	11.65	11.64	11.72	11.78	11.78	11.86
	CH 11	2462	11.64	11.75	11.71	11.72	11.81	11.91	11.89	11.95

Mode	Channel	Frequency (MHz)	Average power (dBm)							
			MCS Index							
			MCS0	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7
802.11n HT40	CH 03	2422	11.51	11.53	11.57	11.53	11.56	11.56	11.53	11.97
	CH 06	2437	11.62	11.81	11.67	11.69	11.71	11.72	11.62	11.74
	CH 09	2452	11.84	11.97	11.84	11.99	11.94	11.95	12.28	12.00

Note:

- Per KDB 248227, choose the highest output power channel to test SAR and determine further SAR exclusion
- Per KDB 248227, 11g and 11n-HT20 and 11n-HT40 output power is less than 1/4 dB higher than 11b mode, thus the SAR can be excluded.
- For each frequency band, testing at higher data rates and higher order modulations is not required when the maximum average output power for each of these configurations is less than 1/4 dB higher than those measured at the lowest data rate. 2.4GHz WLAN SAR was tested on 802.11b 11Mbps.

<Bluetooth Conducted Power>

Mode	Channel	Frequency (MHz)	Average Power (dBm)								
			Data Rate								
			DH1	DH3	DH5	2DH1	2DH3	2DH5	3DH1	3DH3	3DH5
Bluetooth	CH 00	2402	4.86	4.57	4.58	1.91	1.31	1.29	1.95	1.26	1.27
	CH 39	2441	5.91	5.96	5.84	3.37	2.64	2.65	3.09	2.42	2.36
	CH 78	2480	5.96	5.59	5.85	3.19	2.62	2.75	3.01	2.49	2.69

12. SAR Test Results

Note:

- Per KDB 447498 D01v05, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
 $Scaling\ Factor = \frac{tune-up\ limit\ power\ (mW)}{EUT\ RF\ power\ (mW)}$, where tune-up limit is the maximum rated power among all production units.
 $Reported\ SAR\ (W/kg) = Measured\ SAR\ (W/kg) * Scaling\ Factor$
- Per KDB 447498 D01v05, for each exposure position, if the highest output channel reported SAR $\leq 0.8W/kg$, other channels SAR testing are not necessary
- For Hotspot SAR testing, per KDB 941225 D06, for EUT dimension $\geq 9cm*5cm$, the test distance is 1cm. SAR must be measured for all surfaces and sides with a transmitting antenna located within 2.5cm from that surface or edge.

12.1 Test Records for Head SAR Test

<GSM SAR>

Plot No.	Band	Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
33	GSM850	GSM	Right Cheek	251	848.8	33.02	34	1.253	-0.11	0.437	0.548
34	GSM850	GSM	Right Tilted	251	848.8	33.02	34	1.253	-0.10	0.273	0.342
35	GSM850	GSM	Left Cheek	251	848.8	33.02	34	1.253	-0.04	0.420	0.526
36	GSM850	GSM	Left Tilted	251	848.8	33.02	34	1.253	0.13	0.253	0.317
23	GSM1900	GSM	Right Cheek	512	1850.2	29.32	31	1.472	-0.12	0.166	0.244
24	GSM1900	GSM	Right Tilted	512	1850.2	29.32	31	1.472	0.02	0.071	0.105
25	GSM1900	GSM	Left Cheek	512	1850.2	29.32	31	1.472	-0.09	0.205	0.302
26	GSM1900	GSM	Left Tilted	512	1850.2	29.32	31	1.472	-0.09	0.067	0.099

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
37	WCDMA Band V	RMC 12.2K	Right Cheek	4182	836.4	22.19	23	1.205	0.06	0.267	0.322
38	WCDMA Band V	RMC 12.2K	Right Tilted	4182	836.4	22.19	23	1.205	0.09	0.168	0.202
39	WCDMA Band V	RMC 12.2K	Left Cheek	4182	836.4	22.19	23	1.205	-0.07	0.281	0.339
40	WCDMA Band V	RMC 12.2K	Left Tilted	4182	836.4	22.19	23	1.205	0.10	0.172	0.207

Note:

- If Reported SAR with RMC 12.2kbps setting is $> 1.2W/kg$, HSDPA subtest-1 and HSUPA subtest-5 SAR is additionally tested at that exposure position.
- Per KDB 941225 D01, RMC 12.2kbps setting is used to evaluate SAR. If HSDPA and HSUPA output power is $< 0.25dB$ higher than RMC, or reported SAR with RMC 12.2kbps setting is $\leq 1.2W/kg$, HSDPA and HSUPA SAR evaluation can be excluded.

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
41	WLAN 2.4GHz	802.11b	Right Cheek	11	2462	14.46	15	1.132	0.08	0.02	0.023
42	WLAN 2.4GHz	802.11b	Right Tilted	11	2462	14.46	15	1.132	0.01	0.00272	0.003
43	WLAN 2.4GHz	802.11b	Left Cheek	11	2462	14.46	15	1.132	0.07	0.055	0.062
44	WLAN 2.4GHz	802.11b	Left Tilted	11	2462	14.46	15	1.132	-0.01	0.016	0.018



12.2 Test Records for Hotspot SAR Test

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
1	GSM850	GPRS(2 Tx slots)	Front	1	128	824.2	30.73	31.5	1.194	0.01	0.729	0.870
2	GSM850	GPRS(2 Tx slots)	Back	1	128	824.2	30.73	31.5	1.194	0.01	0.947	1.131
3	GSM850	GPRS(2 Tx slots)	Left Side	1	128	824.2	30.73	31.5	1.194	0.02	0.792	0.946
4	GSM850	GPRS(2 Tx slots)	Right Side	1	128	824.2	30.73	31.5	1.194	0.09	0.737	0.880
5	GSM850	GPRS(2 Tx slots)	Bottom Side	1	128	824.2	30.73	31.5	1.194	-0.01	0.097	0.116
6	GSM850	GPRS(2 Tx slots)	Front	1	189	836.4	30.61	31.5	1.227	0.01	0.747	0.917
7	GSM850	GPRS(2 Tx slots)	Front	1	251	848.8	30.59	31.5	1.233	0.01	0.768	0.947
8	GSM850	GPRS(2 Tx slots)	Back	1	189	836.4	30.61	31.5	1.227	0.01	0.951	1.167
9	GSM850	GPRS(2 Tx slots)	Back	1	251	848.8	30.59	31.5	1.233	0.01	0.949	1.170
10	GSM850	GPRS(2 Tx slots)	Left Side	1	189	836.4	30.61	31.5	1.227	-0.04	0.816	1.002
11	GSM850	GPRS(2 Tx slots)	Left Side	1	251	848.8	30.59	31.5	1.233	-0.04	0.840	1.036
12	GSM850	GPRS(2 Tx slots)	Right Side	1	189	836.4	30.61	31.5	1.227	0.03	0.738	0.906
13	GSM850	GPRS(2 Tx slots)	Right Side	1	251	848.8	30.59	31.5	1.233	-0.05	0.724	0.893
27	GSM1900	GPRS(4 Tx slots)	Front	1	512	1850.2	25.59	26.5	1.233	-0.02	0.407	0.502
28	GSM1900	GPRS(4 Tx slots)	Back	1	512	1850.2	25.59	26.5	1.233	0.01	0.630	0.777
29	GSM1900	GPRS(4 Tx slots)	Left Side	1	512	1850.2	25.59	26.5	1.233	-0.01	0.112	0.138
30	GSM1900	GPRS(4 Tx slots)	Right Side	1	512	1850.2	25.59	26.5	1.233	-0.05	0.147	0.181
31	GSM1900	GPRS(4 Tx slots)	Bottom Side	1	512	1850.2	25.59	26.5	1.233	-0.04	0.596	0.735

Note: For Hotspot SAR testing, per KDB 941225 D06, for EUT dimension ≥ 9cm*5cm, the test distance is 1cm. SAR must be measured for all surfaces and sides with a transmitting antenna located within 2.5cm from that surface or edge.



<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
18	WCDMA Band V	RMC 12.2K	Front	1	4182	836.4	22.19	23	1.205	0.01	0.354	0.427
19	WCDMA Band V	RMC 12.2K	Back	1	4182	836.4	22.19	23	1.205	0.02	0.532	0.641
20	WCDMA Band V	RMC 12.2K	Left Side	1	4182	836.4	22.19	23	1.205	-0.01	0.326	0.393
21	WCDMA Band V	RMC 12.2K	Right Side	1	4182	836.4	22.19	23	1.205	0.01	0.275	0.331
22	WCDMA Band V	RMC 12.2K	Bottom Side	1	4182	836.4	22.19	23	1.205	-0.03	0.060	0.072

Note: Body SAR, per KDB 941225 D01, RMC 12.2kbps setting is used to evaluate SAR. If HSDPA/HSUPA output power is < 0.25dB higher than RMC, or Reported SAR with RMC 12.2kbps setting is ≤ 1.2W/kg, HSDPA/HSUPA SAR evaluation can be excluded.

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
45	WLAN 2.4GHz	802.11b	Front	1	11	2462	14.46	15	1.132	-0.06	0.015	0.017
46	WLAN 2.4GHz	802.11b	Back	1	11	2462	14.46	15	1.132	0.06	0.066	0.075
47	WLAN 2.4GHz	802.11b	Right Side	1	11	2462	14.46	15	1.132	0.16	0.051	0.058
48	WLAN 2.4GHz	802.11b	Top Side	1	11	2462	14.46	15	1.132	-0.14	0.00464	0.005

12.3 Test Records for Body-worn SAR Test

Note:

1. Body-worn SAR testing was performed at 10mm separation, and this distance is determined by the handset manufacturer that there will be body-worn accessories that users may acquire at the time of equipment certification, to enable users to purchase aftermarket body-worn accessories with the required minimum separation.
2. Per KDB 941225 D06, when the same wireless modes and device transmission configurations are required for testing body-worn accessories and hotspot mode, it is not necessary to test body-worn accessory SAR for the same device orientation if the test separation distance for hotspot mode is more conservative than that used for body-worn accessories. In this report, the worst exposure position is the back exposure position of the device.
3. Body-worn exposure conditions are intended to voice call operations, therefore GSM voice call is selected based on worst position of hotspot to be tested at the back exposure position.
4. Per KDB 648474 D04v01, when the reported SAR for a body-worn accessory measured without a headset connected to the handset is ≤ 1.2 W/kg, SAR testing with a headset connected to the handset is not required.

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
14	GSM850	GSM	Back	1	189	836.4	32.96	34	1.271	-0.05	0.735	0.934
15	GSM850	GSM	Back	1	128	824.2	32.86	34	1.300	-0.04	0.800	1.040
16	GSM850	GSM	Back	1	251	848.8	33.02	34	1.253	-0.07	0.804	1.008
32	GSM1900	GSM	Back	1	512	1850.2	29.32	31	1.472	-0.04	0.352	0.518

<WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Burst Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
19	WCDMA Band V	RMC 12.2K	Back	1	4182	836.4	22.19	23	1.205	0.02	0.532	0.641

<WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
46	WLAN 2.4GHz	802.11b	Back	1	11	2462	14.46	15	1.132	0.06	0.066	0.075



12.4 Repeated SAR Measurement

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	SAR _{1a} (W/kg)	Reported SAR _{1a} (W/kg)
8	GSM850	GPRS(2 Tx slots)	Back	1	189	836.4	30.61	31.5	1.227	0.01	0.951	1.167
17	GSM850	GPRS(2 Tx slots)	Back	1	189	836.4	30.61	31.5	1.227	0.04	0.932	1.144

Note:

1. Per KDB 865664 D01v01, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥ 0.8 W/kg
2. Per KDB 865664 D01v01, if the deviation among the repeated measurement is $\leq 20\%$ and the measured SAR < 1.45 W/kg, only one repeated measurement is required.
3. The deviation is the difference in percentage between original and repeated *measured SAR*.
4. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

12.5 Highest SAR Plot

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	SAR _{1a} (W/kg)	Reported SAR _{1a} (W/kg)
9	GSM850	GPRS(2 Tx slots)	Back	1	251	848.8	30.59	31.5	1.233	0.01	0.949	1.170
28	GSM1900	GPRS(4 Tx slots)	Back	1	512	1850.2	25.59	26.5	1.233	0.01	0.630	0.777
19	WCDMA Band V	RMC 12.2K	Back	1	4182	836.4	22.19	23	1.205	0.02	0.532	0.641
46	WLAN 2.4GHz	802.11b	Back	1	11	2462	14.46	15	1.132	0.06	0.066	0.075

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 17.01.2013

09 GSM850_GPRS(2 Tx slots)_Back_1cm_Ch251

DUT: 2D2703

Communication System: GPRS/EDGE10; Frequency: 848.8 MHz; Duty Cycle: 1:4

Medium: MSL_835_130117 Medium parameters used: $f = 849$ MHz; $\sigma = 0.982$ mho/m; $\epsilon_r = 55.937$;

$\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.5, 9.5, 9.5); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch251/Area Scan (61x111x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.11 W/kg


Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 34.250 V/m; Power Drift= 0.01 dB

Peak SAR (extrapolated) = 1.202 mW/g

SAR(1 g) = 0.949 mW/g; SAR(10 g) = 0.718 mW/g

Maximum value of SAR (measured) = 1.09 W/kg

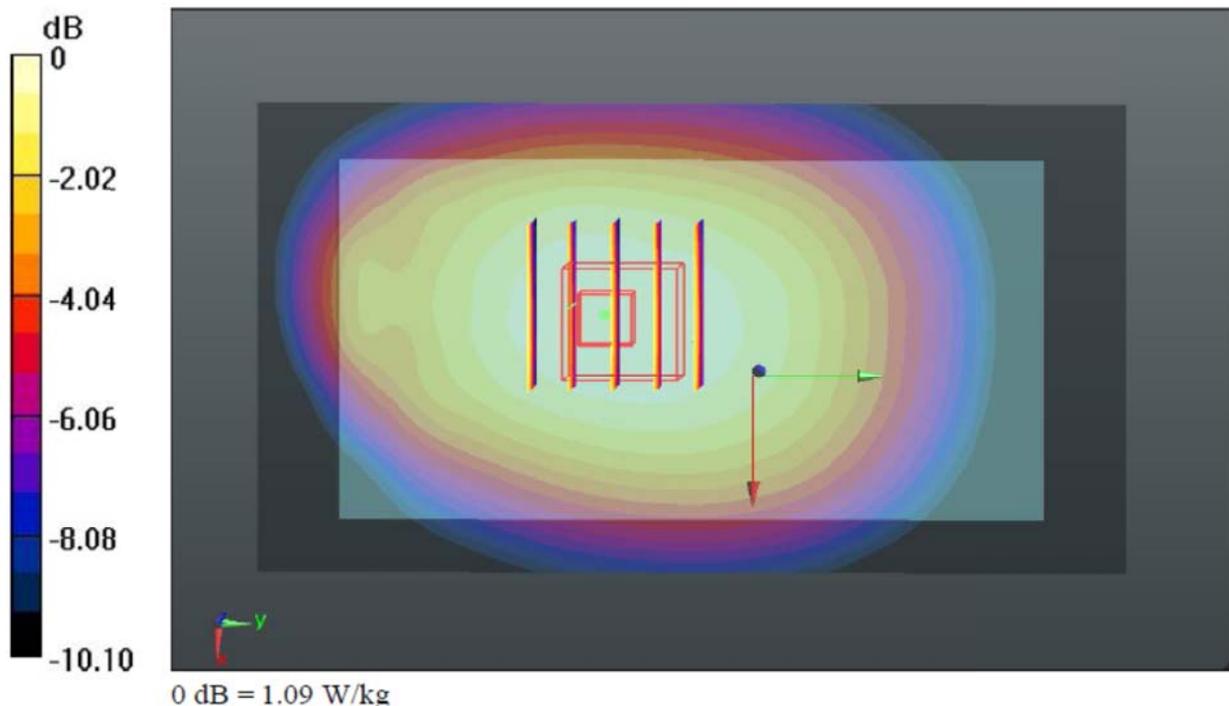

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 17.01.2013

28 GSM1900_GPRS(4 Tx slots)_Back_1cm_Ch512**DUT: 2D2703**


Communication System: GPRS/EDGE12; Frequency: 1850.2 MHz; Duty Cycle: 1:2
Medium: MSL_1900_130117 Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.466$ mho/m; $\epsilon_r = 54.972$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.5 °C; Liquid Temperature : 21.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.67, 7.67, 7.67); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch512/Area Scan (61x111x1): Interpolated grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.904 W/kg

Ch512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
Reference Value = 24.764 V/m; Power Drift = 0.01 dB
Peak SAR (extrapolated) = 1.068 mW/g
SAR(1 g) = 0.630 mW/g; SAR(10 g) = 0.358 mW/g
Maximum value of SAR (measured) = 0.859 W/kg

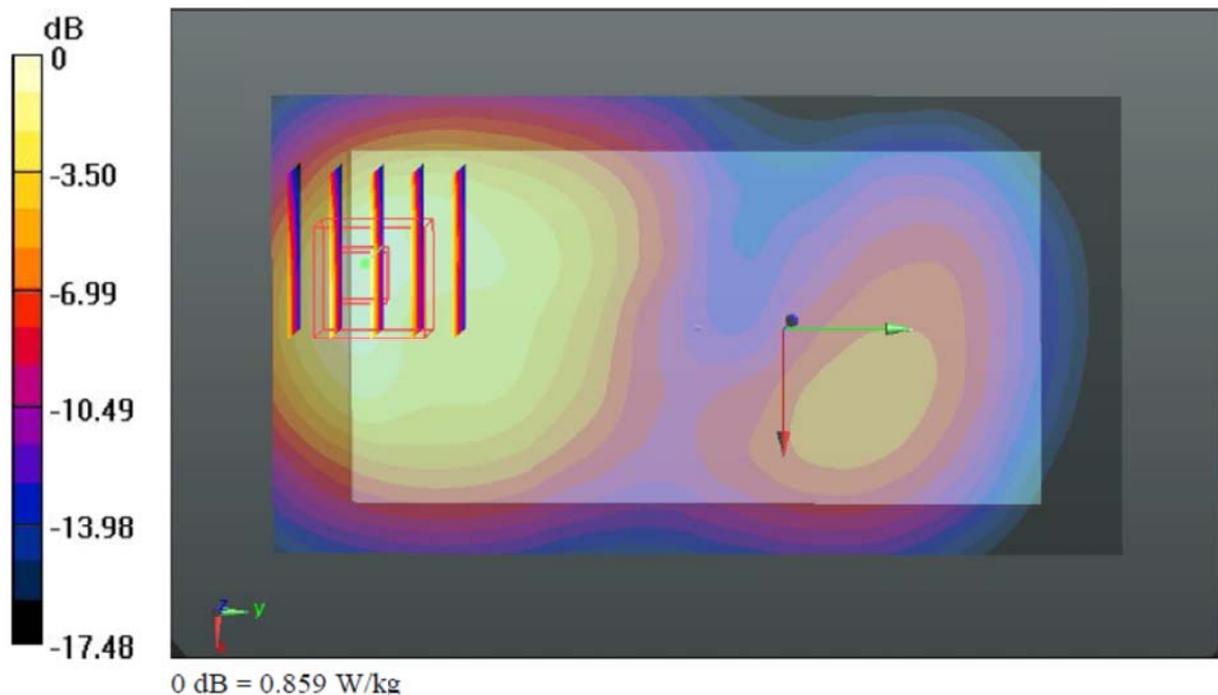

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 1701.2013

19 WCDMA Band V_RMC 12.2K_Back_1cm_Ch4182

DUT: 2D2703

Communication System: UMTS; Frequency: 836.4 MHz; Duty Cycle: 1:1
 Medium: MSL_835_130117 Medium parameters used: $f = 836.4 \text{ MHz}$; $\sigma = 0.97 \text{ mho/m}$; $\epsilon_r = 56.057$; $\rho = 1000 \text{ kg/m}^3$
 Ambient Temperature : 23.5 °C; Liquid Temperature : 21.5 °C


DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.5, 9.5, 9.5); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch4182/Area Scan (61x111x1): Interpolated grid: dx=15mm, dy=15mm
 Maximum value of SAR (interpolated) = 0.606 W/kg

Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 25.659 V/m; Power Drift = 0.02 dB
 Peak SAR (extrapolated) = 0.669 mW/g
SAR(1 g) = 0.532 mW/g; SAR(10 g) = 0.403 mW/g
 Maximum value of SAR (measured) = 0.610 W/kg

Ch4182/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm
 Reference Value = 25.659 V/m; Power Drift = 0.02 dB
 Peak SAR (extrapolated) = 0.484 mW/g
SAR(1 g) = 0.322 mW/g; SAR(10 g) = 0.212 mW/g
 Maximum value of SAR (measured) = 0.431 W/kg

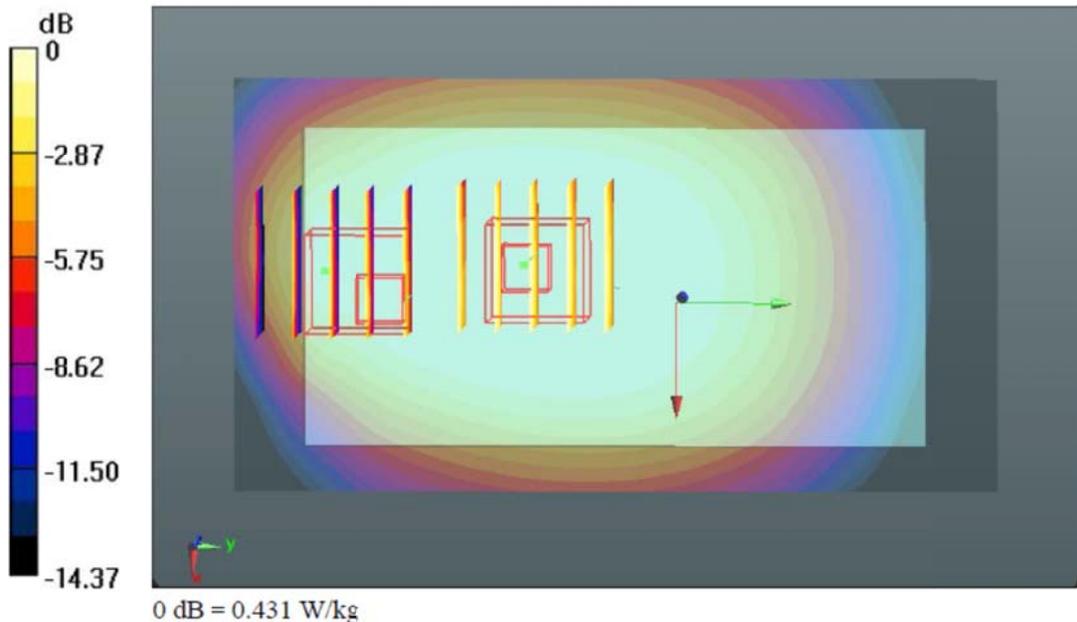

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab

Date: 17.01.2013

46 WLAN2.4GHz_802.11b_Back_1cm_Ch11

DUT: 2D2703

Communication System: WIFI; Frequency: 2462 MHz;Duty Cycle: 1:1

Medium: MSL_2450_130117 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.964$ mho/m; $\epsilon_r =$

53.919 ; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C; Liquid Temperature : 21.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.21, 7.21, 7.21); Calibrated: 26.11.2012;

- Sensor-Surface: 2mm (Mechanical Surface Detection)

- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012

- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670

- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch11/Area Scan (71x131x1): Interpolated grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.135 W/kg


Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 6.274 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.142 mW/g

SAR(1 g) = 0.066 mW/g; SAR(10 g) = 0.030 mW/g

Maximum value of SAR (measured) = 0.0992 W/kg

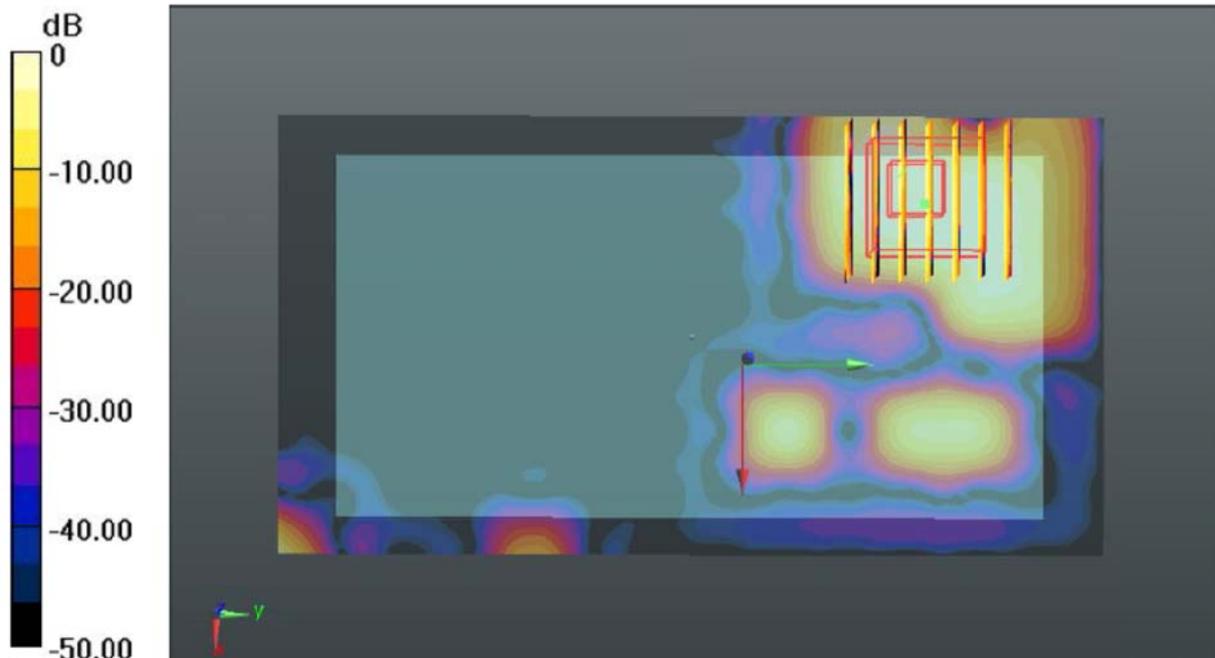

0 dB = 0.0992 W/kg

12.6 Simultaneous Multi-band Transmission Analysis

	Position	Applicable Combination
Simultaneous Transmission	Head	GSM/WCDMA (voice) + WLAN 2.4GHz
		GSM/WCDMA (voice) + Bluetooth
	Hotspot	GPRS/EDGE/WCDMA (data) + WLAN 2.4GHz
		GPRS/EDGE/WCDMA (data) + Bluetooth
	Body-worn	GSM/WCDMA (voice) + WLAN 2.4GHz
		GSM/WCDMA (voice) + Bluetooth

Note:

1. WLAN and Bluetooth share the same antenna, and cannot transmit simultaneously.
2. GSM and WCDMA share the same antenna, and cannot transmit simultaneously.
3. Simultaneous transmission analysis for hotspot mode 1cm separation to the body represents the compliance for hand-held and near-body use conditions. Simultaneous transmission of Hotspot mode for head and body-worn conditions was covered under simultaneous transmission analysis of head and body-worn positions, due to the possible WWAN voice call and data transmission SAR was considered in standalone SAR measurement for those exposure positions
4. For simultaneous transmission analysis, Bluetooth SAR is estimated per KDB 447498 D01v05 based on the formula below.
5. The Scaled SAR summation is calculated based on the same configuration and test position.
6. For simultaneous transmission analysis, Bluetooth SAR is estimated per KDB 447498 D01v05 based on the formula below.
 - i) $(\text{max. power of channel, including tune-up tolerance, mW}) / (\text{min. test separation distance, mm}) \cdot [\sqrt{f(\text{GHz})} / x] \text{ W/kg}$ for test separation distances $\leq 50 \text{ mm}$; where $x = 7.5$ for 1-g SAR, and $x = 18.75$ for 10-g SAR.
 - ii) 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is $> 50 \text{ mm}$.
7. Per KDB 447498 D01v05, simultaneous transmission SAR is compliant if,
 - (i) Scalar SAR summation $< 1.6 \text{ W/kg}$.
 - (ii) $\text{SPLSR} = (\text{SAR1} + \text{SAR2})^{1.5} / (\text{min. separation distance, mm})$, and the peak separation distance is determined from the square root of $[(x1-x2)^2 + (y1-y2)^2 + (z1-z2)^2]$, where $(x1, y1, z1)$ and $(x2, y2, z2)$ are the coordinates of the extrapolated peak SAR locations in the zoom scan
If $\text{SPLSR} \leq 0.04$, simultaneously transmission SAR measurement is not necessary
 - (iii) Simultaneously transmission SAR measurement, and the reported multi-band SAR $< 1.6 \text{ W/kg}$

	Max power	Head 0cm gap	Body 1cm gap
Estimated SAR (W/kg)	6 dBm	0.166 W/kg	0.083 W/kg



<Head SAR>

Position	WWAN-PCE			WLAN 2.4GHz -DTS		WWAN + WLAN SAR (W/kg)	SPLSR ≤ 0.04	Case No
	WWAN Band	Plot No	Max. WWAN SAR (W/kg)	Plot No	Max. WLAN SAR (W/kg)			
Right Cheek	GSM850	33	0.548	41	0.023	0.57		
	GSM1900	23	0.244	41	0.023	0.27		
	WCDMA Band V	37	0.322	41	0.023	0.35		
Right Tilted	GSM850	34	0.342	42	0.003	0.35		
	GSM1900	24	0.105	42	0.003	0.11		
	WCDMA Band V	38	0.202	42	0.003	0.21		
Left Cheek	GSM850	35	0.526	43	0.062	0.59		
	GSM1900	25	0.302	43	0.062	0.36		
	WCDMA Band V	39	0.339	43	0.062	0.40		
Left Tilted	GSM850	36	0.317	44	0.018	0.34		
	GSM1900	26	0.099	44	0.018	0.12		
	WCDMA Band V	40	0.207	44	0.018	0.23		

Position	WWAN-PCE			Bluetooth-DSS	WWAN + Bluetooth SAR (W/kg)	SPLSR ≤ 0.04	Case No
	WWAN Band	Plot No	Max. WWAN SAR (W/kg)	Estimated SAR (W/kg)			
Right Cheek	GSM850	33	0.548	0.166	0.71		
	GSM1900	23	0.244	0.166	0.41		
	WCDMA Band V	37	0.322	0.166	0.49		
Right Tilted	GSM850	34	0.342	0.166	0.51		
	GSM1900	24	0.105	0.166	0.27		
	WCDMA Band V	38	0.202	0.166	0.37		
Left Cheek	GSM850	35	0.526	0.166	0.69		
	GSM1900	25	0.302	0.166	0.47		
	WCDMA Band V	39	0.339	0.166	0.51		
Left Tilted	GSM850	36	0.317	0.166	0.48		
	GSM1900	26	0.099	0.166	0.27		
	WCDMA Band V	40	0.207	0.166	0.37		



<Hotspot SAR>

Position	WWAN-PCE			WLAN 2.4GHz -DTS		WWAN + WLAN SAR (W/kg)	SPLSR ≤ 0.04	Case No
	WWAN Band	Plot No	Max. WWAN SAR (W/kg)	Plot No	Max. WLAN SAR (W/kg)			
Front	GSM850	7	0.947	45	0.017	0.96		
	GSM1900	27	0.502	45	0.017	0.52		
	WCDMA Band V	18	0.427	45	0.017	0.44		
Back	GSM850	9	1.170	46	0.075	1.25		
	GSM1900	28	0.777	46	0.075	0.85		
	WCDMA Band V	19	0.641	46	0.075	0.72		
Left Side	GSM850	11	1.036	-	-	1.04		
	GSM1900	29	0.138	-	-	0.14		
	WCDMA Band V	20	0.393	-	-	0.39		
Right Side	GSM850	12	0.906	47	0.058	0.96		
	GSM1900	30	0.181	47	0.058	0.24		
	WCDMA Band V	21	0.331	47	0.058	0.39		
Top Side	GSM850	-	-	48	0.005	0.01		
	GSM1900	-	-	48	0.005	0.01		
	WCDMA Band V	-	-	48	0.005	0.01		
Bottom Side	GSM850	5	0.116	-	-	0.12		
	GSM1900	31	0.735	-	-	0.74		
	WCDMA Band V	22	0.072	-	-	0.07		



Position	WWAN-PCE			Bluetooth-DSS	WWAN + Bluetooth SAR (W/kg)	SPLSR ≤ 0.04	Case No
	WWAN Band	Plot No	Max. WWAN SAR (W/kg)	Estimated SAR (W/kg)			
Front	GSM850	7	0.947	0.083	1.03		
	GSM1900	27	0.502	0.083	0.59		
	WCDMA Band V	18	0.427	0.083	0.51		
Back	GSM850	9	1.170	0.083	1.25		
	GSM1900	28	0.777	0.083	0.86		
	WCDMA Band V	19	0.641	0.083	0.72		
Left Side	GSM850	11	1.036	0.083	1.12		
	GSM1900	29	0.138	0.083	0.22		
	WCDMA Band V	20	0.393	0.083	0.48		
Right Side	GSM850	12	0.906	0.083	0.99		
	GSM1900	30	0.181	0.083	0.26		
	WCDMA Band V	21	0.331	0.083	0.41		
Top Side	GSM850	-	-	0.083	0.08		
	GSM1900	-	-	0.083	0.08		
	WCDMA Band V	-	-	0.083	0.08		
Bottom Side	GSM850	5	0.116	0.083	0.20		
	GSM1900	31	0.735	0.083	0.82		
	WCDMA Band V	22	0.072	0.083	0.16		



<Body-worn SAR>

Position	WWAN-PCE			WLAN 2.4GHz -DTS		WWAN + WLAN SAR (W/kg)	SPLSR ≤ 0.04	Case No
	WWAN Band	Plot No	Max. WWAN SAR (W/kg)	Plot No	Max. WLAN SAR (W/kg)			
Back	GSM850	15	1.040	46	0.075	1.12		
	GSM1900	32	0.518	46	0.075	0.59		
	WCDMA Band V	19	0.641	46	0.075	0.72		

Position	WWAN-PCE			Bluetooth-DSS	WWAN + Bluetooth SAR (W/kg)	SPLSR ≤ 0.04	Case No
	WWAN Band	Plot No	Max. WWAN SAR (W/kg)	Estimated SAR (W/kg)			
Back	GSM850	15	1.040	0.083	1.25		
	GSM1900	32	0.518	0.083	0.86		
	WCDMA Band V	19	0.641	0.083	0.72		

Test Engineer : Jeme Li and Krin Wu

13. Uncertainty Assessment

The component of uncertainty may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainty by the statistical analysis of a series of observations is termed a Type A evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observations is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience, and knowledge of the behavior and properties of relevant materials and instruments, manufacture’s specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in Table 12.1

Uncertainty Distributions	Normal	Rectangular	Triangular	U-Shape
Multi-plying Factor ^(a)	1/k ^(b)	1/√3	1/√6	1/√2

(a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity

(b) κ is the coverage factor

Table 12.1 Standard Uncertainty for Assumed Distribution

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual “root-sum-squares” (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is shown in the following tables.

Error Description	Uncertainty	Probability	Divisor	Ci	Ci	Standard	Standard
	Value (±%)	Distribution		(1g)	(10g)	Uncertainty (1g)	Uncertainty (10g)
Measurement System							
Probe Calibration	6.0	Normal	1	1	1	± 6.0 %	± 6.0 %
Axial Isotropy	4.7	Rectangular	√3	0.7	0.7	± 1.9 %	± 1.9 %
Hemispherical Isotropy	9.6	Rectangular	√3	0.7	0.7	± 3.9 %	± 3.9 %
Boundary Effects	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Linearity	4.7	Rectangular	√3	1	1	± 2.7 %	± 2.7 %
System Detection Limits	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Readout Electronics	0.3	Normal	1	1	1	± 0.3 %	± 0.3 %
Response Time	0.8	Rectangular	√3	1	1	± 0.5 %	± 0.5 %
Integration Time	2.6	Rectangular	√3	1	1	± 1.5 %	± 1.5 %
RF Ambient Noise	3.0	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
RF Ambient Reflections	3.0	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
Probe Positioner	0.4	Rectangular	√3	1	1	± 0.2 %	± 0.2 %
Probe Positioning	2.9	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
Max. SAR Eval.	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Test Sample Related							
Device Positioning	2.9	Normal	1	1	1	± 2.9 %	± 2.9 %
Device Holder	3.6	Normal	1	1	1	± 3.6 %	± 3.6 %
Power Drift	5.0	Rectangular	√3	1	1	± 2.9 %	± 2.9 %
Phantom and Setup							
Phantom Uncertainty	4.0	Rectangular	√3	1	1	± 2.3 %	± 2.3 %
Liquid Conductivity (Target)	5.0	Rectangular	√3	0.64	0.43	± 1.8 %	± 1.2 %
Liquid Conductivity (Meas.)	2.5	Normal	1	0.64	0.43	± 1.6 %	± 1.1 %
Liquid Permittivity (Target)	5.0	Rectangular	√3	0.6	0.49	± 1.7 %	± 1.4 %
Liquid Permittivity (Meas.)	2.5	Normal	1	0.6	0.49	± 1.5 %	± 1.2 %
Combined Standard Uncertainty						± 11.0 %	± 10.8 %
Coverage Factor for 95 %						K=2	
Expanded Uncertainty						± 22.0 %	± 21.5 %

Table 12.2 Uncertainty Budget of DASY for frequency range 300 MHz to 3 GHz according to IEEE 1528-2003



14. References

- [1] FCC 47 CFR Part 2 “Frequency Allocations and Radio Treaty Matters; General Rules and Regulations”
- [2] ANSI/IEEE Std. C95.1-1992, “IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz”, September 1992
- [3] IEEE Std. 1528-2003, “Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques”, December 2003
- [4] FCC OET Bulletin 65 (Edition 97-01) Supplement C (Edition 01-01), “Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields”, June 2001
- [5] SPEAG DASY System Handbook
- [6] FCC KDB 248227 D01 v01r02, “SAR Measurement Procedures for 802.11 a/b/g Transmitters”, May 2007
- [7] FCC KDB 447498 D01 v05, “Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies”, October 2012
- [8] FCC KDB 865664 D01 v01, “SAR Measurement Requirements for 100MHz to 6 GHz”, October 2012.
- [9] FCC KDB 648474 D04 v01, “SAR Evaluation Considerations for Handsets with Multiple Transmitters and Antennas”, October 2012
- [10] FCC KDB 941225 D01 v02, “SAR Measurement Procedures for 3G Devices – CDMA 2000 / Ev-Do / WCDMA / HSDPA / HSPA”, October 2007
- [11] FCC KDB 941225 D03 v01, “Recommended SAR Test Reduction Procedures for GSM / GPRS / EDGE”, December 2008
- [12] FCC KDB 941225 D06 v01, “SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities”, April 2011



Appendix A. Plots of System Performance Check

The plots are shown as follows.

System Check_Head_835MHz_130117

DUT: D835V2-SN:4d091

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL_835_130117 Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.918 \text{ mho/m}$; $\epsilon_r = 41.297$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.4 \text{ }^\circ\text{C}$; Liquid Temperature : $21.5 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.56, 9.56, 9.56); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 2.60 W/kg


Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 52.897 V/m ; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 3.578 mW/g

SAR(1 g) = 2.41 mW/g ; SAR(10 g) = 1.59 mW/g

Maximum value of SAR (measured) = 2.59 W/kg

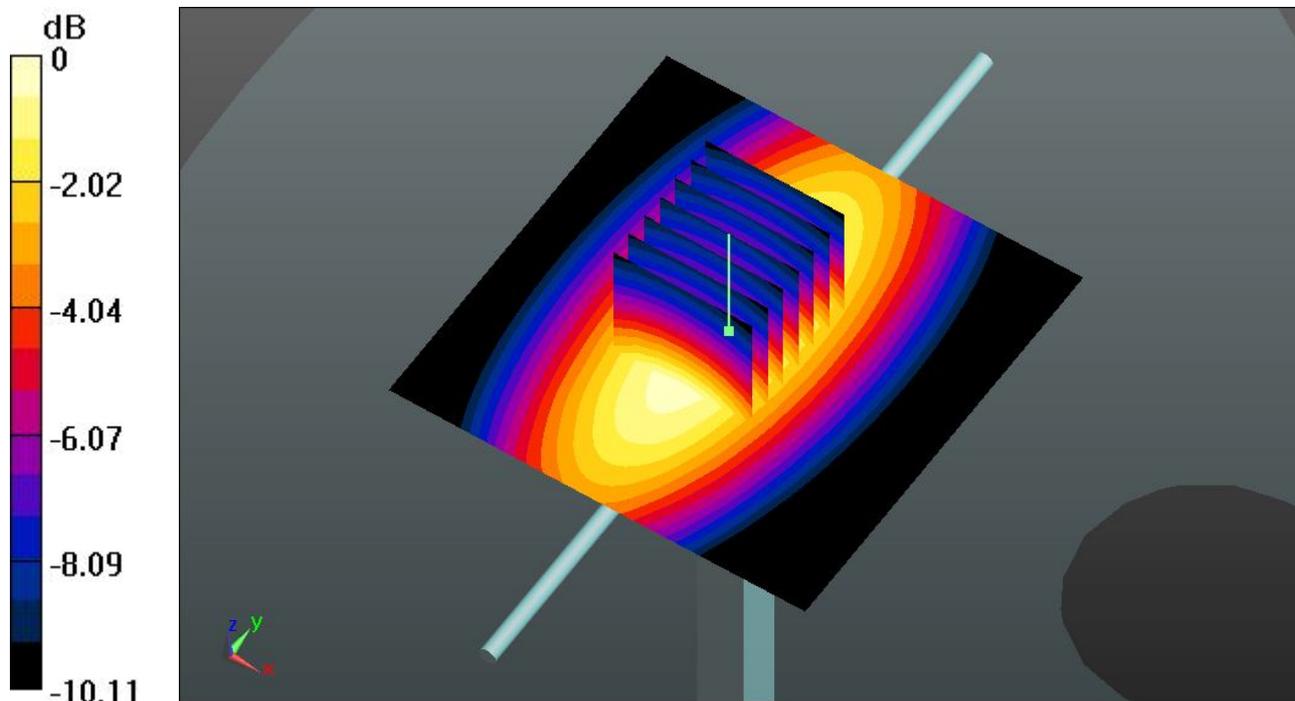

0 dB = 2.59 W/kg

System Check_Head_1900MHz_130117

DUT: D1900V2-SN:5d118

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL_1900_130117 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.419$ mho/m; $\epsilon_r =$

40.609 ; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 21.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.84, 7.84, 7.84); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 10.8 W/kg


Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 86.159 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 17.931 mW/g

SAR(1 g) = 9.52 mW/g; SAR(10 g) = 4.92 mW/g

Maximum value of SAR (measured) = 10.7 W/kg

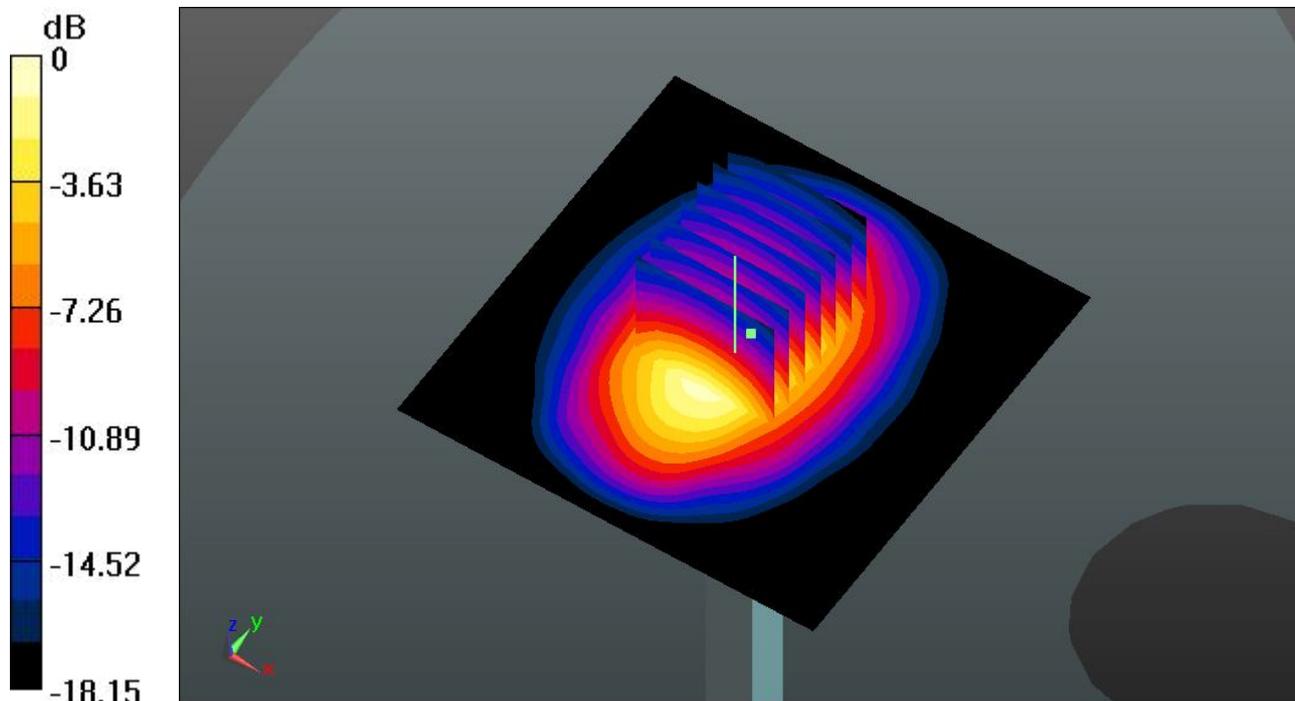

0 dB = 10.7 W/kg

System Check_Head_2450MHz_130117

DUT: D2450V2-SN:736

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: HSL_2450_130117 Medium parameters used: $f = 2450$ MHz; $\sigma = 1.82$ mho/m; $\epsilon_r = 39.753$;

$\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C ; Liquid Temperature : 21.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(6.99, 6.99, 6.99); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Pin=250mW/Area Scan (71x71x1): Interpolated grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 15.9 W/kg


Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 93.207 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 30.502 mW/g

SAR(1 g) = 14.1 mW/g; SAR(10 g) = 6.4 mW/g

Maximum value of SAR (measured) = 16.0 W/kg

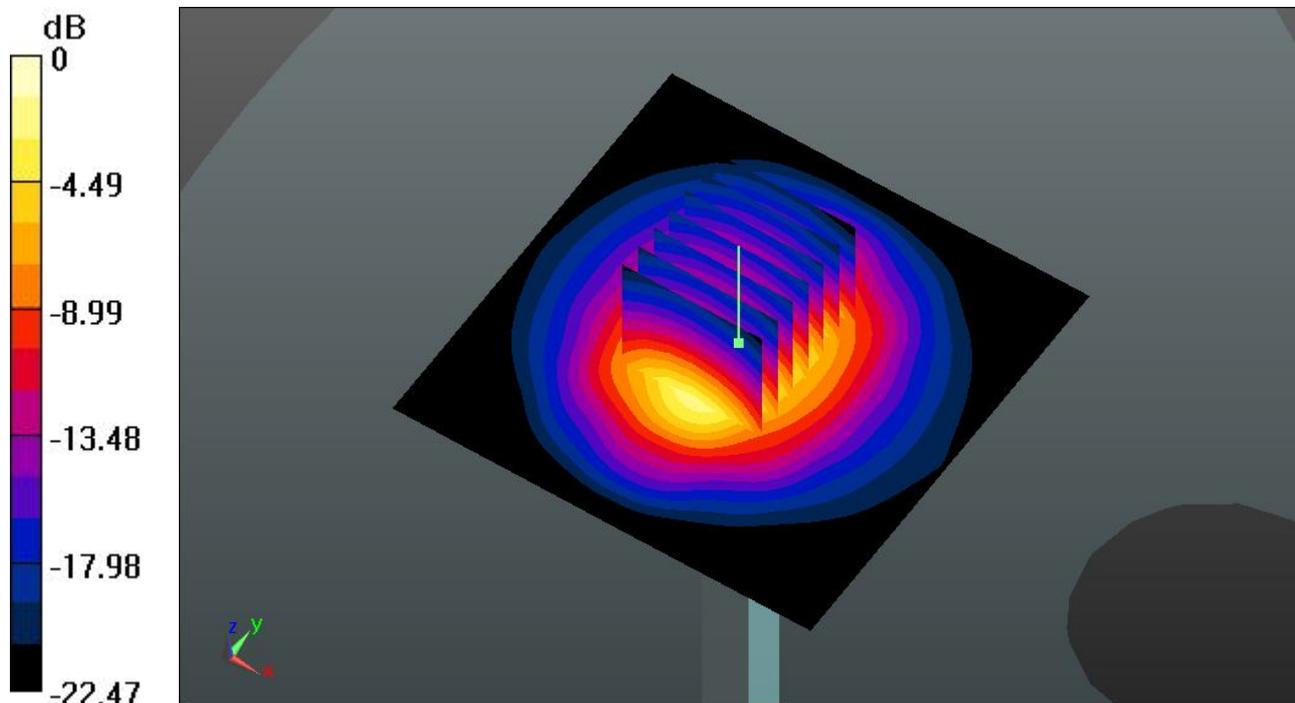

0 dB = 16.0 W/kg

System Check_Body_835MHz_130117

DUT: D835V2-SN:4d091

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: MSL_835_130117 Medium parameters used: $f = 835 \text{ MHz}$; $\sigma = 0.969 \text{ mho/m}$; $\epsilon_r = 56.069$;

$\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.5 \text{ }^\circ\text{C}$; Liquid Temperature : $21.5 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.5, 9.5, 9.5); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 2.49 W/kg


Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 50.665 V/m ; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 3.379 mW/g

SAR(1 g) = 2.29 mW/g ; SAR(10 g) = 1.51 mW/g

Maximum value of SAR (measured) = 2.47 W/kg

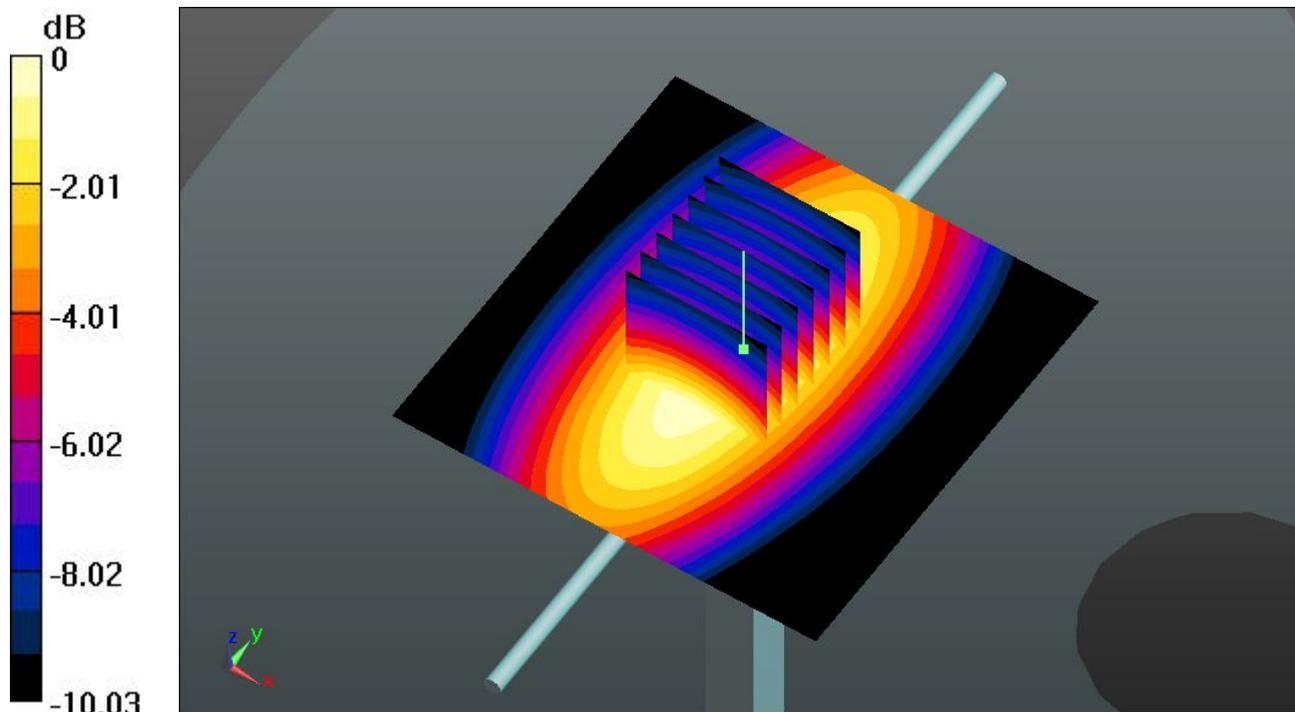

0 dB = 2.47 W/kg

System Check_Body_1900MHz_130117

DUT: D1900V2-SN:5d118

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: MSL_1900_130117 Medium parameters used: $f = 1900 \text{ MHz}$; $\sigma = 1.528 \text{ mho/m}$; $\epsilon_r =$

54.867 ; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.5 \text{ }^\circ\text{C}$; Liquid Temperature : $21.6 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.67, 7.67, 7.67); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 11.7 W/kg


Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 86.753 V/m ; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 18.541 mW/g

SAR(1 g) = 10.2 mW/g ; SAR(10 g) = 5.3 mW/g

Maximum value of SAR (measured) = 11.4 W/kg

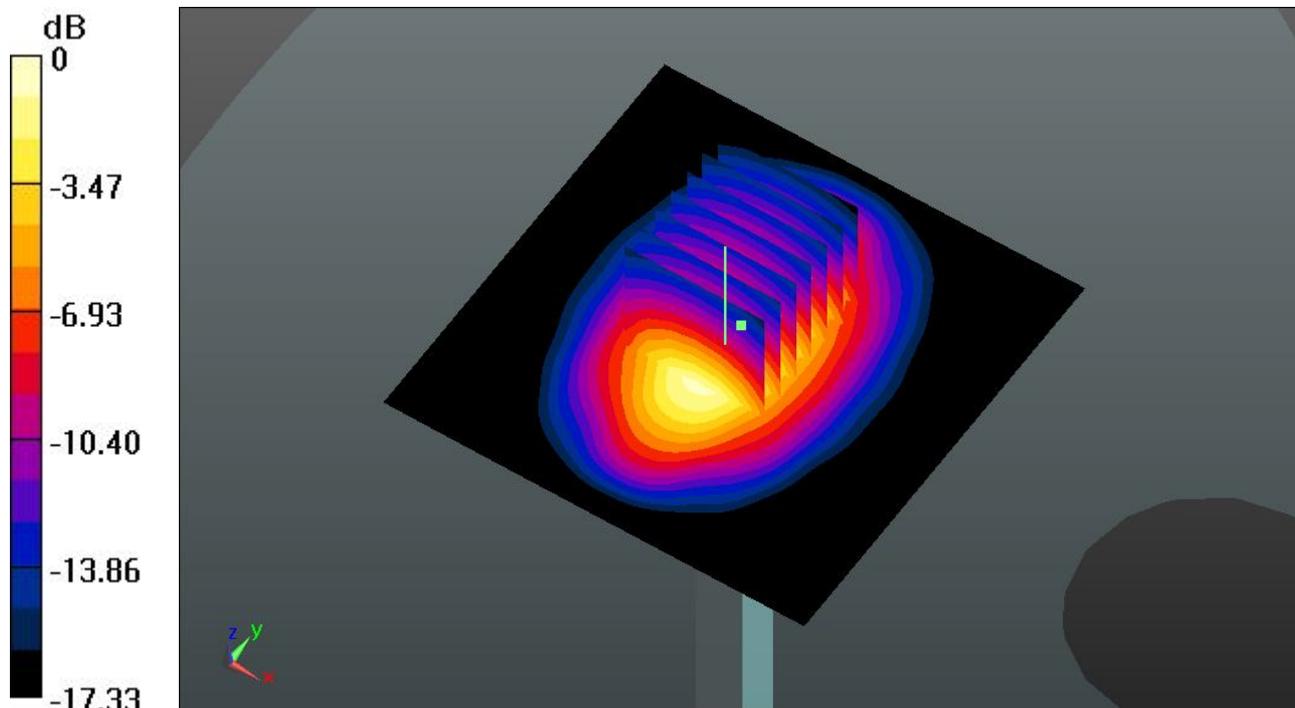

0 dB = 11.4 W/kg

System Check_Body_2450MHz_130117

DUT: D2450V2-SN:736

Communication System: CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: MSL_2450_130117 Medium parameters used: $f = 2450 \text{ MHz}$; $\sigma = 1.939 \text{ mho/m}$; $\epsilon_r = 53.98$;

$\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.5 \text{ }^\circ\text{C}$; Liquid Temperature : $21.2 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.21, 7.21, 7.21); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Pin=250mW/Area Scan (71x71x1): Interpolated grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (interpolated) = 21.1 W/kg


Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 89.407 V/m ; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 28.424 mW/g

SAR(1 g) = 13.6 mW/g ; SAR(10 g) = 6.22 mW/g

Maximum value of SAR (measured) = 20.8 W/kg

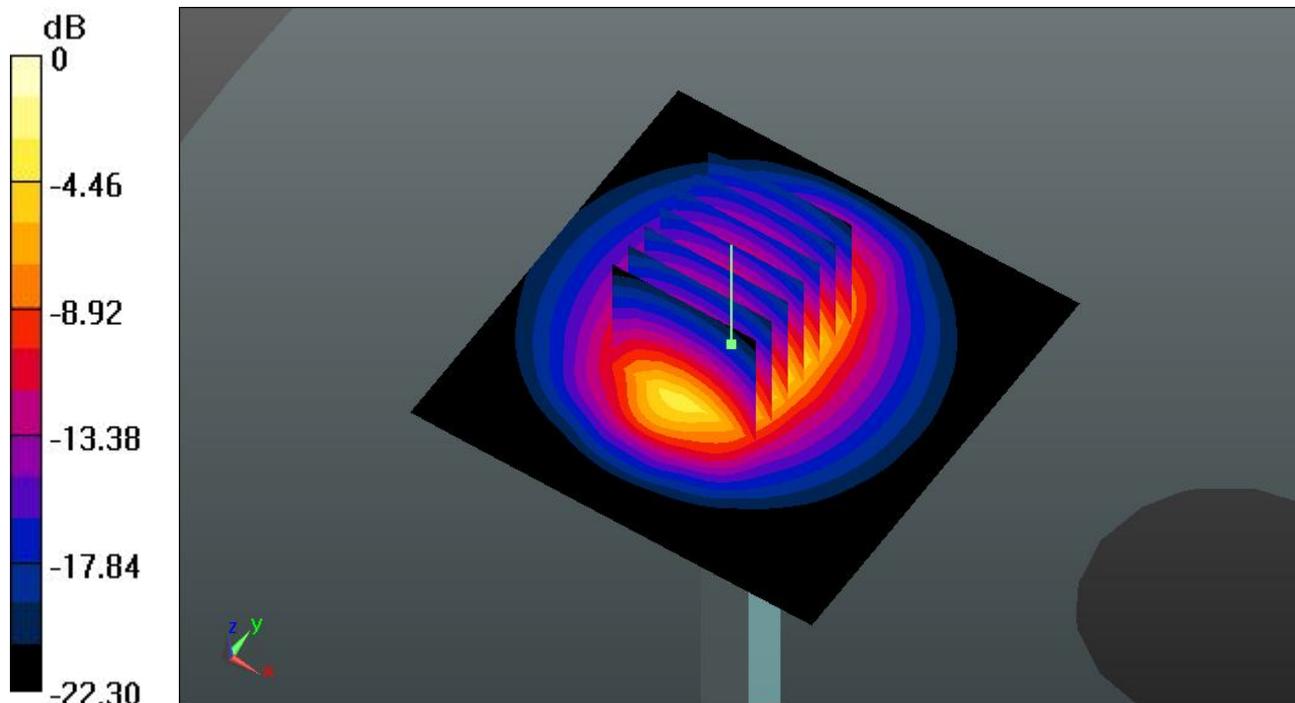

0 dB = 20.8 W/kg



Appendix B. Plots of SAR Measurement

The plots are shown as follows.

33 GSM850_GSM_Right Cheek_Ch251

DUT: 2D2703

Communication System: Generic GSM; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: HSL_835_130117 Medium parameters used: $f = 849$ MHz; $\sigma = 0.93$ mho/m; $\epsilon_r = 41.133$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.56, 9.56, 9.56); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch251/Area Scan (61x111x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.521 W/kg


Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.936 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.565 mW/g

SAR(1 g) = 0.437 mW/g; SAR(10 g) = 0.328 mW/g

Maximum value of SAR (measured) = 0.501 W/kg

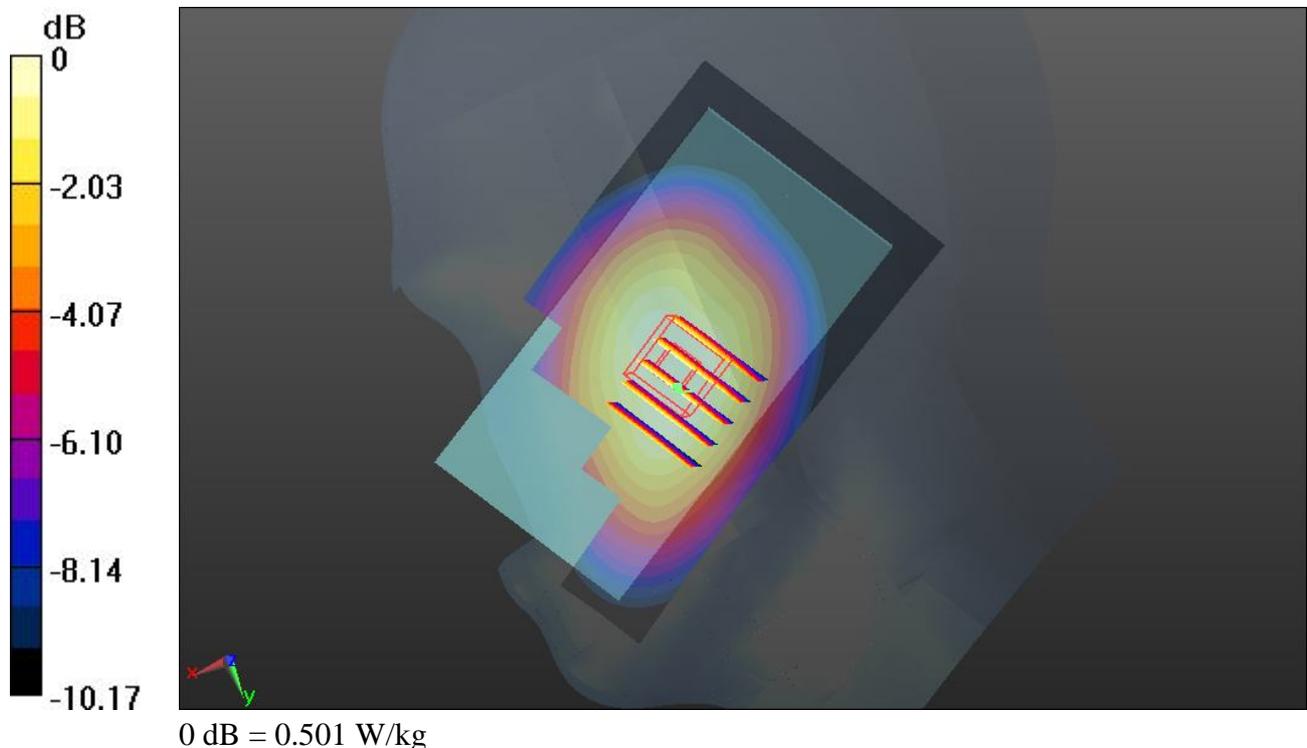

33 GSM850_GSM_Right Cheek_Ch251_2D

DUT: 2D2703

Communication System: Generic GSM; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: HSL_835_130117 Medium parameters used: $f = 849$ MHz; $\sigma = 0.93$ mho/m; $\epsilon_r = 41.133$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.56, 9.56, 9.56); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch251/Area Scan (61x111x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.521 W/kg


Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.936 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.565 mW/g

SAR(1 g) = 0.437 mW/g; SAR(10 g) = 0.328 mW/g

Maximum value of SAR (measured) = 0.501 W/kg

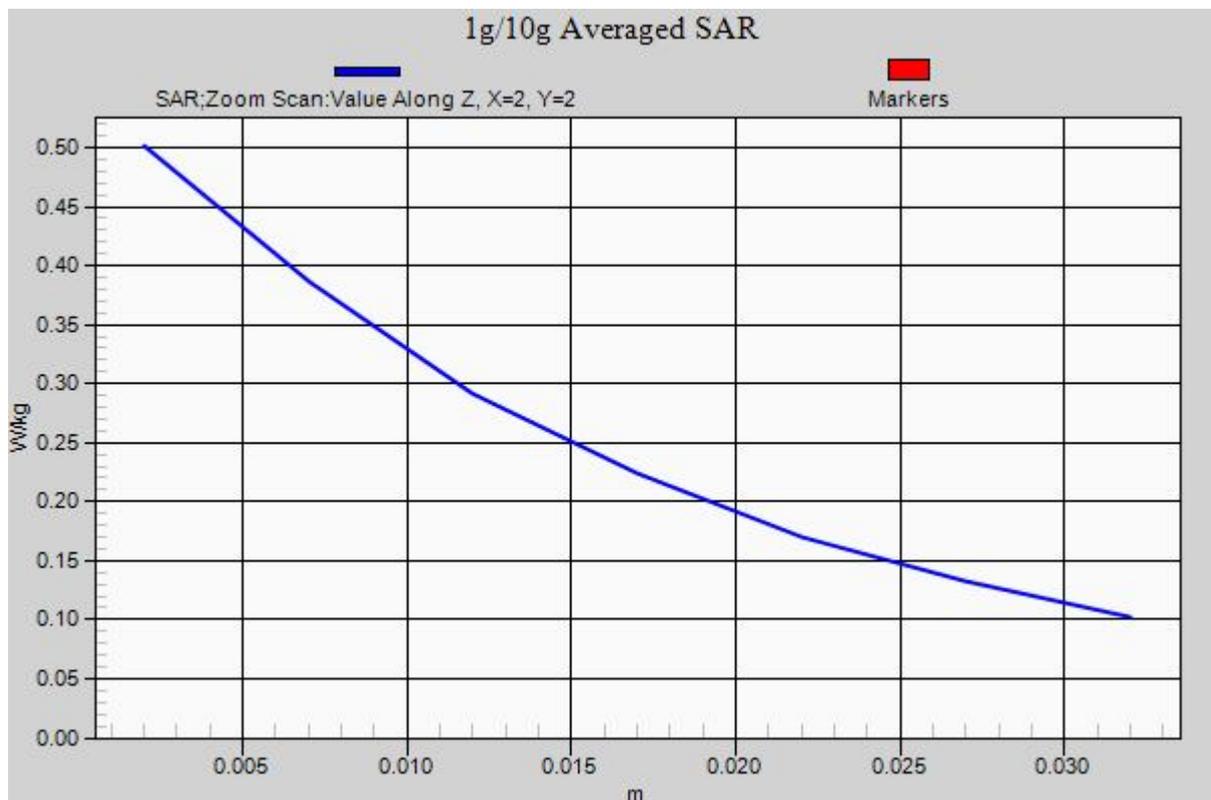

34 GSM850_GSM_Right Tilted_Ch251

DUT: 2D2703

Communication System: Generic GSM; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: HSL_835_130117 Medium parameters used: $f = 849$ MHz; $\sigma = 0.93$ mho/m; $\epsilon_r = 41.133$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.56, 9.56, 9.56); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch251/Area Scan (61x111x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.311 W/kg


Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.744 V/m; Power Drift = -0.10 dB

Peak SAR (extrapolated) = 0.336 mW/g

SAR(1 g) = 0.273 mW/g; SAR(10 g) = 0.210 mW/g

Maximum value of SAR (measured) = 0.310 W/kg

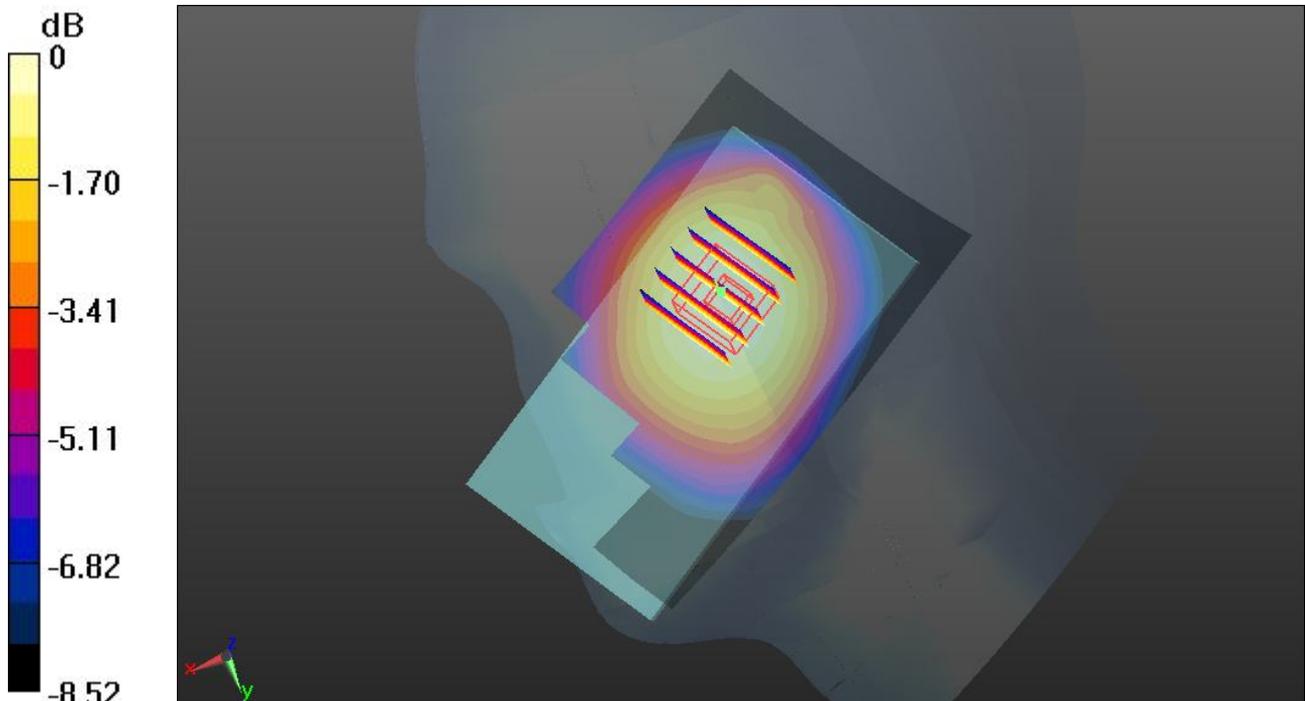

0 dB = 0.310 W/kg

35 GSM850_GSM_Left Cheek_Ch251

DUT: 2D2703

Communication System: Generic GSM; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: HSL_835_130117 Medium parameters used: $f = 849$ MHz; $\sigma = 0.93$ mho/m; $\epsilon_r = 41.133$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.56, 9.56, 9.56); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch512/Area Scan (61x111x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.486 W/kg


Ch512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 23.435 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.516 mW/g

SAR(1 g) = 0.420 mW/g; SAR(10 g) = 0.319 mW/g

Maximum value of SAR (measured) = 0.474 W/kg

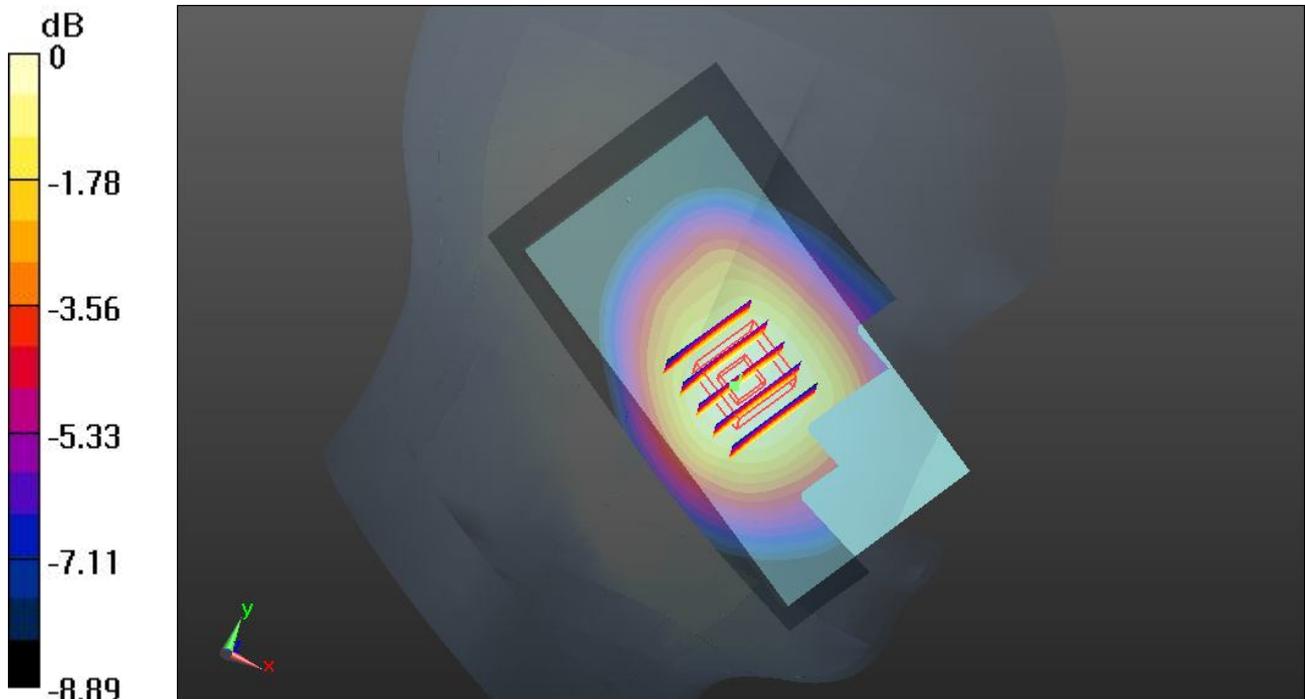

0 dB = 0.474 W/kg

36 GSM850_GSM_Left Tilted_Ch251

DUT: 2D2703

Communication System: Generic GSM; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: HSL_835_130117 Medium parameters used: $f = 849$ MHz; $\sigma = 0.93$ mho/m; $\epsilon_r = 41.133$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.56, 9.56, 9.56); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch251/Area Scan (61x111x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.285 W/kg


Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.143 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.316 mW/g

SAR(1 g) = 0.253 mW/g; SAR(10 g) = 0.194 mW/g

Maximum value of SAR (measured) = 0.286 W/kg

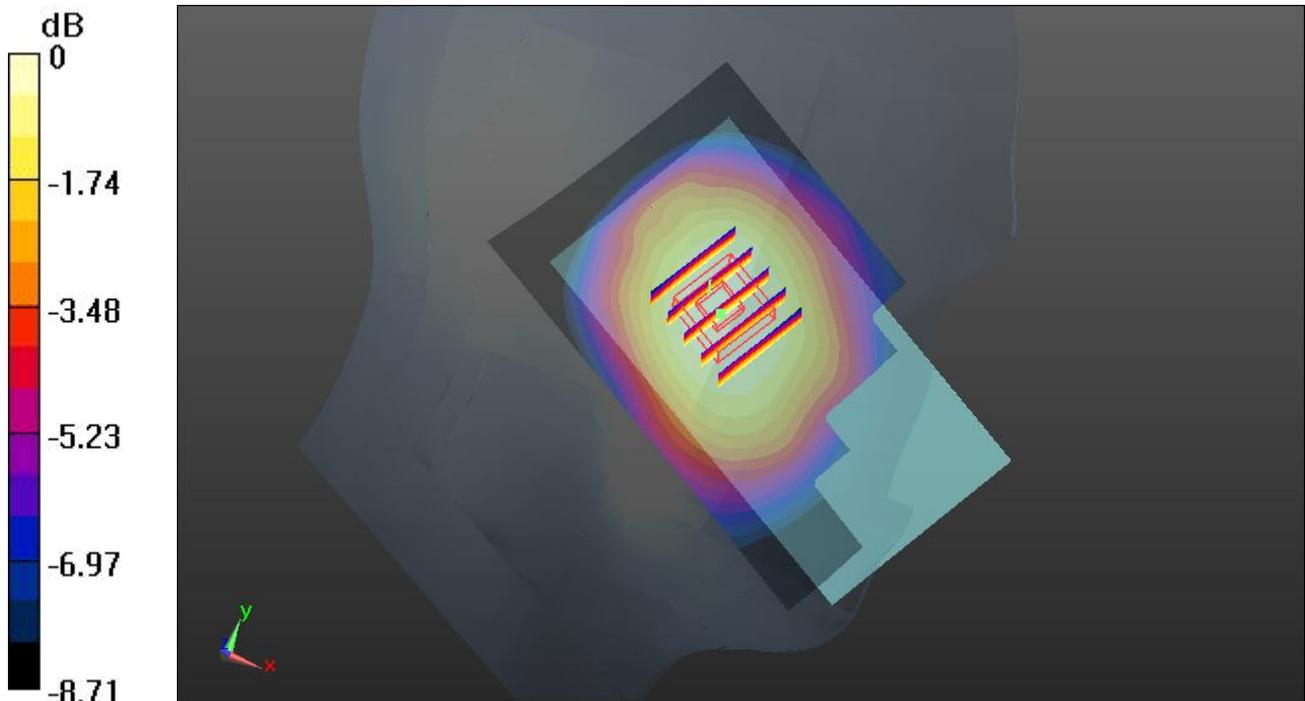

0 dB = 0.286 W/kg

23 GSM1900_GSM_Right Cheek_Ch512

DUT: 2D2703

Communication System: Generic GSM; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: HSL_1900_130117 Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.362$ mho/m; $\epsilon_r = 40.819$;

$\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 21.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.84, 7.84, 7.84); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch512/Area Scan (61x111x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.234 W/kg

Ch512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.727 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.255 mW/g

SAR(1 g) = 0.166 mW/g; SAR(10 g) = 0.102 mW/g

Maximum value of SAR (measured) = 0.211 W/kg


Ch512/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.727 V/m; Power Drift = -0.12 dB

Peak SAR (extrapolated) = 0.257 mW/g

SAR(1 g) = 0.164 mW/g; SAR(10 g) = 0.099 mW/g

Maximum value of SAR (measured) = 0.214 W/kg

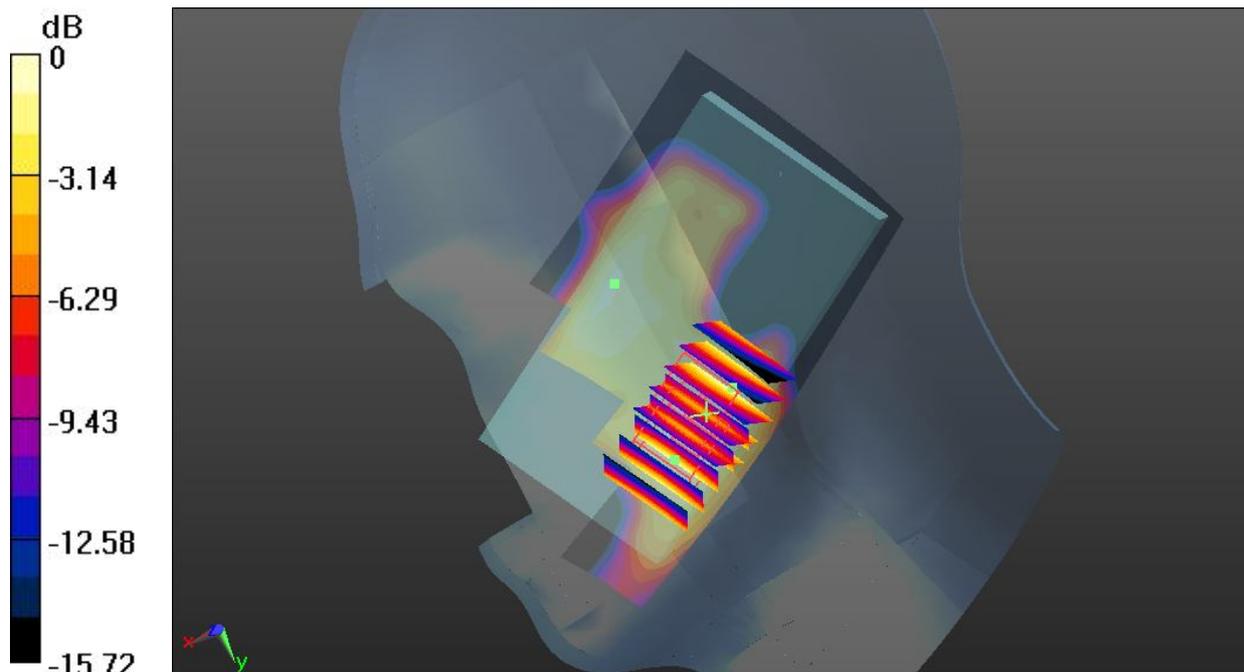

0 dB = 0.214 W/kg

24 GSM1900_GSM_Right Tilted_Ch512

DUT: 2D2703

Communication System: Generic GSM; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: HSL_1900_130117 Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.362$ mho/m; $\epsilon_r =$

40.819 ; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 21.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.84, 7.84, 7.84); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch512/Area Scan (61x111x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0948 W/kg


Ch512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.193 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.105 mW/g

SAR(1 g) = 0.071 mW/g; SAR(10 g) = 0.045 mW/g

Maximum value of SAR (measured) = 0.0887 W/kg

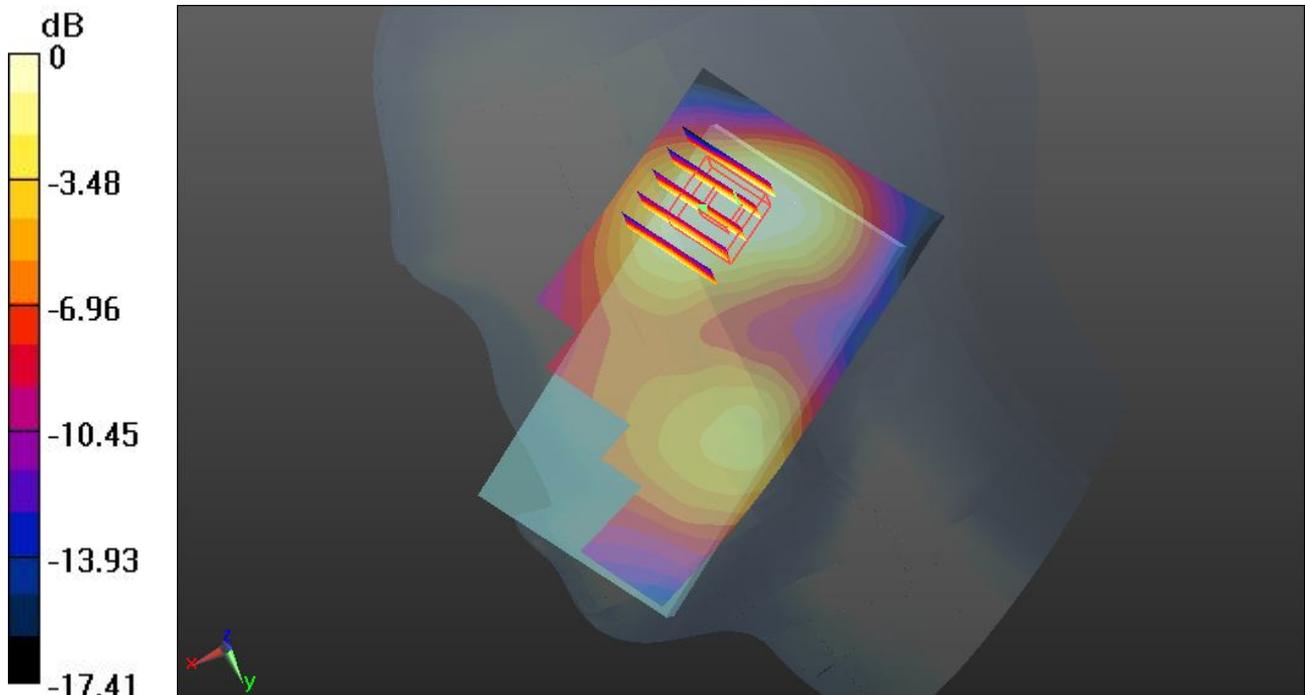

0 dB = 0.0887 W/kg

25 GSM1900_GSM_Left Cheek_Ch512

DUT: 2D2703

Communication System: Generic GSM; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: HSL_1900_130117 Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.362$ mho/m; $\epsilon_r =$

40.819 ; $\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 21.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.84, 7.84, 7.84); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch512/Area Scan (61x111x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.264 W/kg


Ch512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.256 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.307 mW/g

SAR(1 g) = 0.205 mW/g; SAR(10 g) = 0.126 mW/g

Maximum value of SAR (measured) = 0.259 W/kg

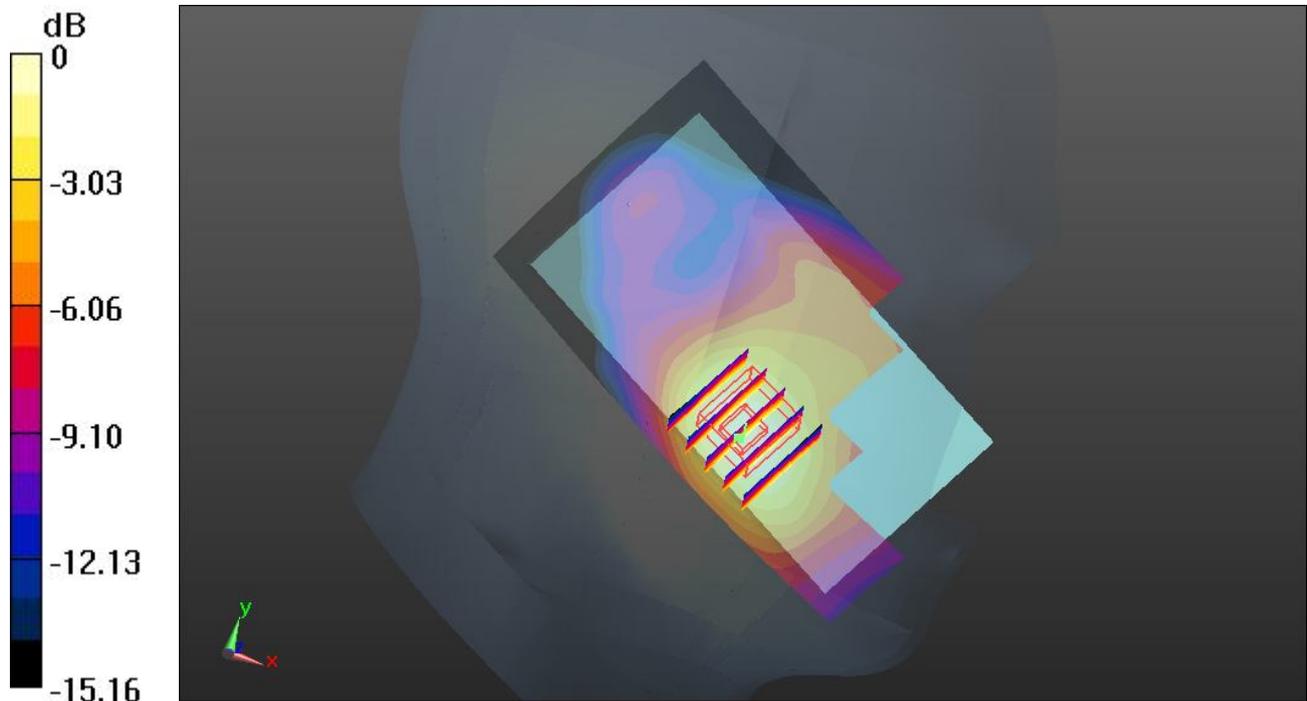

0 dB = 0.259 W/kg

25 GSM1900_GSM_Left Cheek_Ch512_2D

DUT: 2D2703

Communication System: Generic GSM; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3
Medium: HSL_1900_130117 Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.362$ mho/m; $\epsilon_r = 40.819$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C ; Liquid Temperature : 21.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.84, 7.84, 7.84); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch512/Area Scan (61x111x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.264 W/kg


Ch512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.256 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.307 mW/g

SAR(1 g) = 0.205 mW/g; SAR(10 g) = 0.126 mW/g

Maximum value of SAR (measured) = 0.259 W/kg

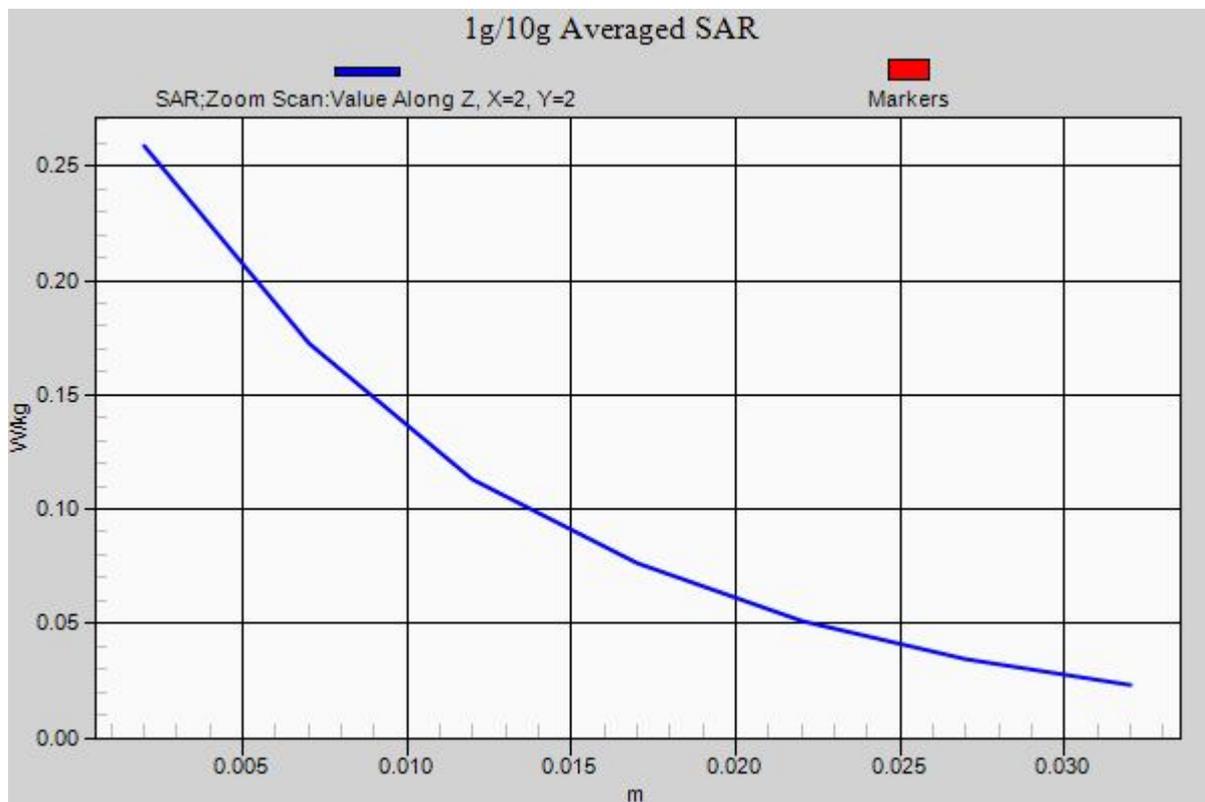

26 GSM1900_GSM_Left Tilted_Ch512

DUT: 2D2703

Communication System: Generic GSM; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3
Medium: HSL_1900_130117 Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.362$ mho/m; $\epsilon_r = 40.819$; $\rho = 1000$ kg/m³
Ambient Temperature : 23.4 °C ; Liquid Temperature : 21.4 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.84, 7.84, 7.84); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch512/Area Scan (61x111x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.0940 W/kg



Ch512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.126 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 0.108 mW/g

SAR(1 g) = 0.067 mW/g; SAR(10 g) = 0.039 mW/g

Maximum value of SAR (measured) = 0.0892 W/kg

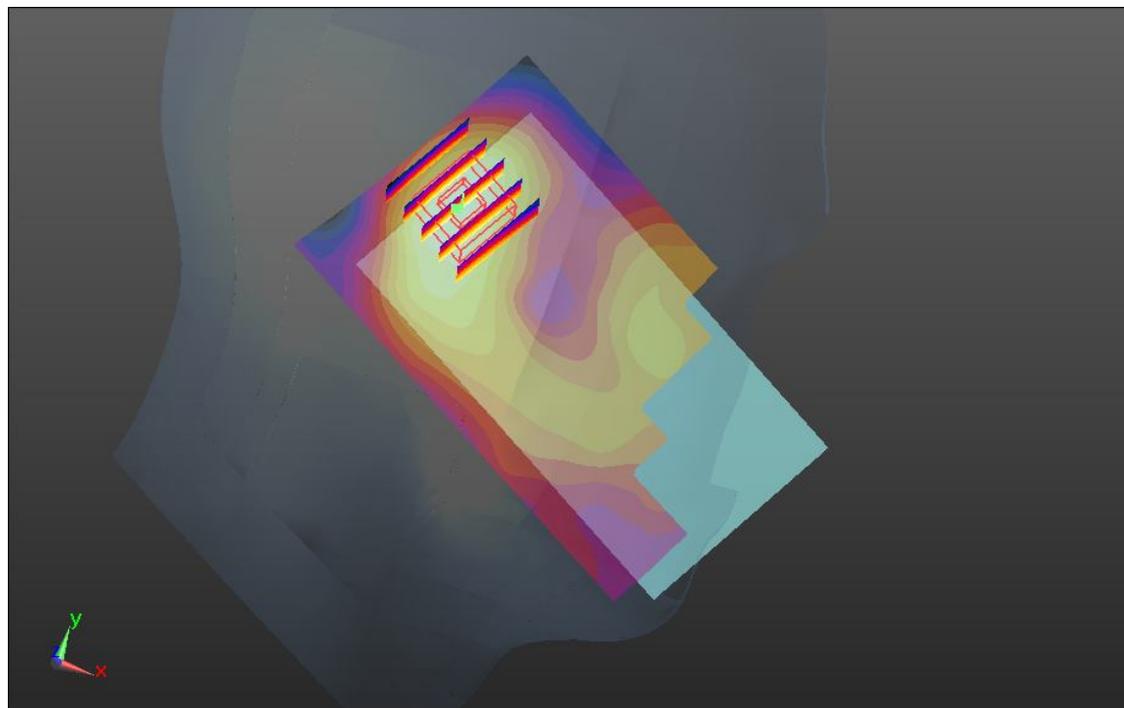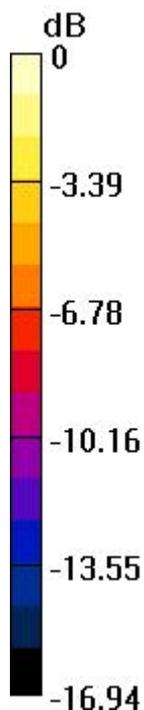

0 dB = 0.0892 W/kg

37 WCDMA Band V_RMC 12.2K_Right Cheek_Ch4182

DUT: 2D2703

Communication System: UMTS; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL_835_130117 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.919$ mho/m; $\epsilon_r = 41.281$;

$\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.56, 9.56, 9.56); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch4182/Area Scan (61x111x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.314 W/kg


Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.836 V/m; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.345 mW/g

SAR(1 g) = 0.267 mW/g; SAR(10 g) = 0.200 mW/g

Maximum value of SAR (measured) = 0.304 W/kg

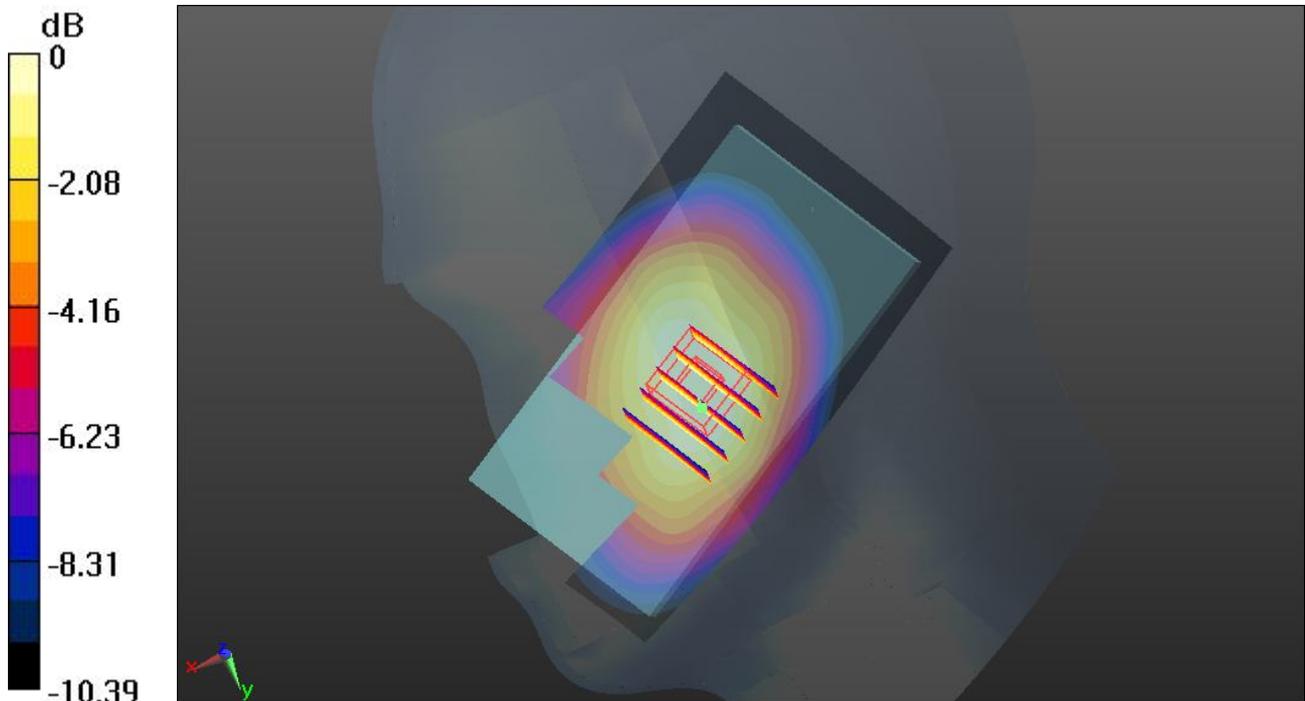

0 dB = 0.304 W/kg

38 WCDMA Band V_RMC 12.2K_Right Tilted_Ch4182

DUT: 2D2703

Communication System: UMTS; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL_835_130117 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.919$ mho/m; $\epsilon_r = 41.281$;

$\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.56, 9.56, 9.56); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch4182/Area Scan (61x111x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.187 W/kg


Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.559 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.209 mW/g

SAR(1 g) = 0.168 mW/g; SAR(10 g) = 0.130 mW/g

Maximum value of SAR (measured) = 0.190 W/kg

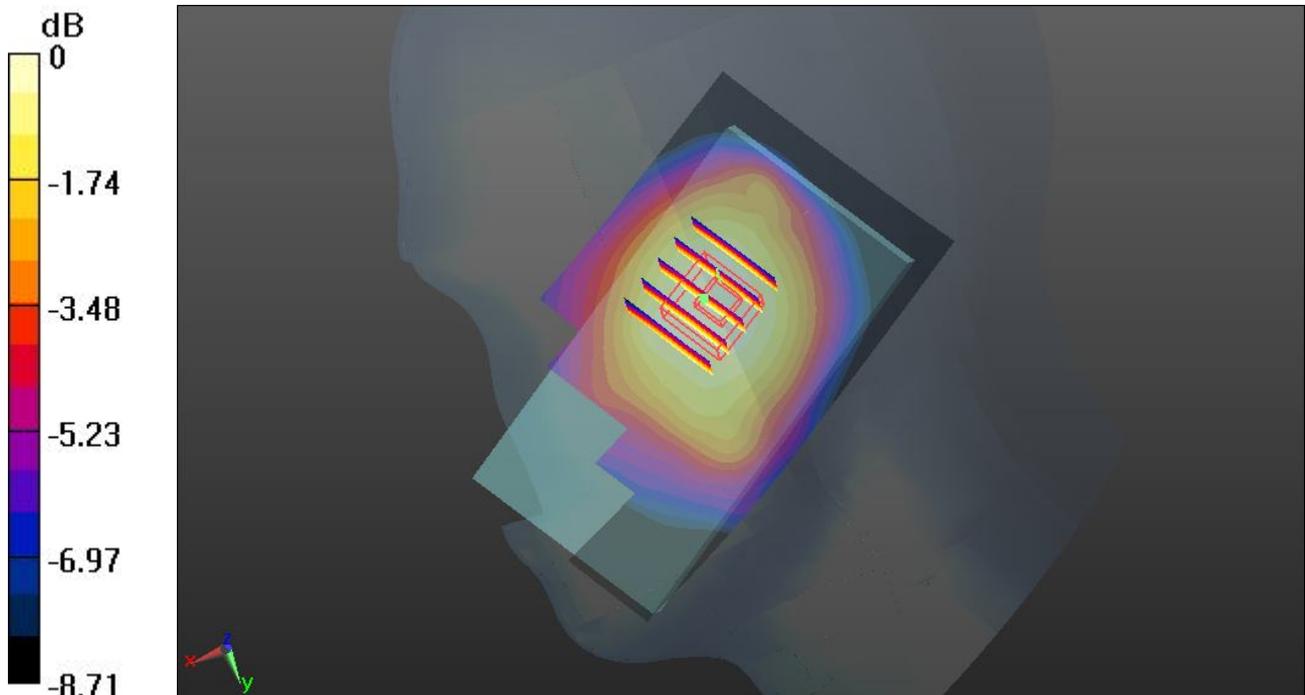

39 WCDMA Band V_RMC 12.2K_Left Cheek_Ch4182

DUT: 2D2703

Communication System: UMTS; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL_835_130117 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.919$ mho/m; $\epsilon_r = 41.281$;

$\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.56, 9.56, 9.56); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch4182/Area Scan (61x111x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.316 W/kg


Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.092 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.349 mW/g

SAR(1 g) = 0.281 mW/g; SAR(10 g) = 0.213 mW/g

Maximum value of SAR (measured) = 0.315 W/kg

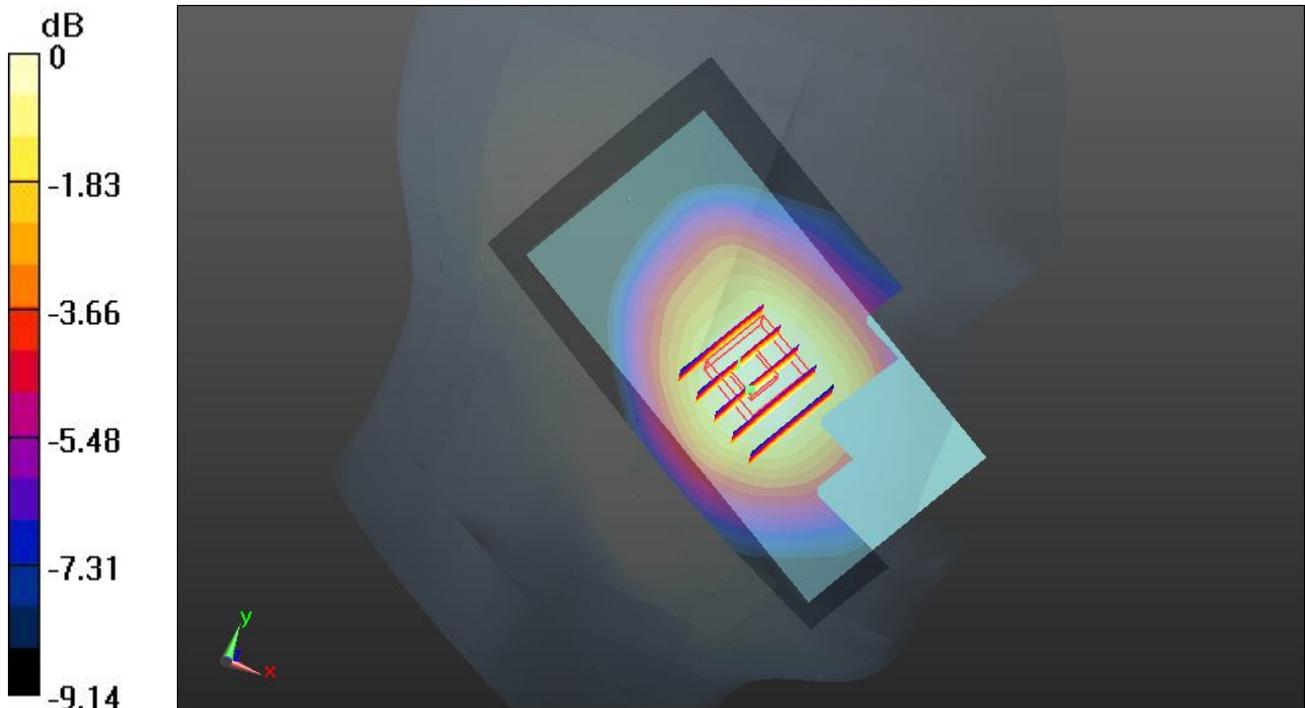

0 dB = 0.315 W/kg

39 WCDMA Band V_RMC 12.2K_Left Cheek_Ch4182_2D

DUT: 2D2703


Communication System: UMTS; Frequency: 836.4 MHz; Duty Cycle: 1:1
 Medium: HSL_835_130117 Medium parameters used: $f = 836.4 \text{ MHz}$; $\sigma = 0.919 \text{ mho/m}$; $\epsilon_r = 41.281$; $\rho = 1000 \text{ kg/m}^3$
 Ambient Temperature : $23.4 \text{ }^\circ\text{C}$; Liquid Temperature : $21.5 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.56, 9.56, 9.56); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch4182/Area Scan (61x111x1): Interpolated grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.316 W/kg

Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 19.092 V/m ; Power Drift = -0.07 dB
 Peak SAR (extrapolated) = 0.349 mW/g
SAR(1 g) = 0.281 mW/g ; SAR(10 g) = 0.213 mW/g
 Maximum value of SAR (measured) = 0.315 W/kg

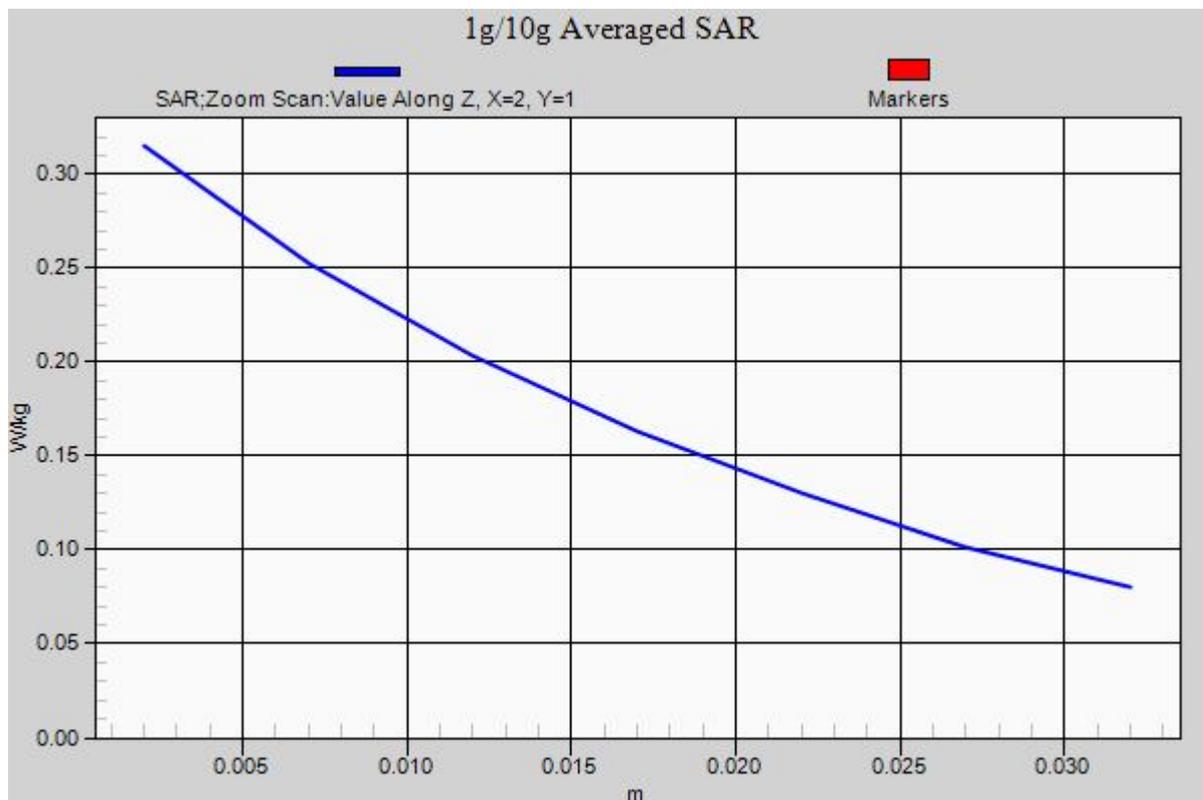

40 WCDMA Band V_RMC 12.2K_Left Tilted_Ch4182

DUT: 2D2703

Communication System: UMTS; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: HSL_835_130117 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.919$ mho/m; $\epsilon_r = 41.281$;

$\rho = 1000$ kg/m³

Ambient Temperature : 23.4 °C ; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.56, 9.56, 9.56); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch4182/Area Scan (61x111x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.191 W/kg


Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 15.055 V/m; Power Drift = 0.10 dB

Peak SAR (extrapolated) = 0.215 mW/g

SAR(1 g) = 0.172 mW/g; SAR(10 g) = 0.132 mW/g

Maximum value of SAR (measured) = 0.196 W/kg

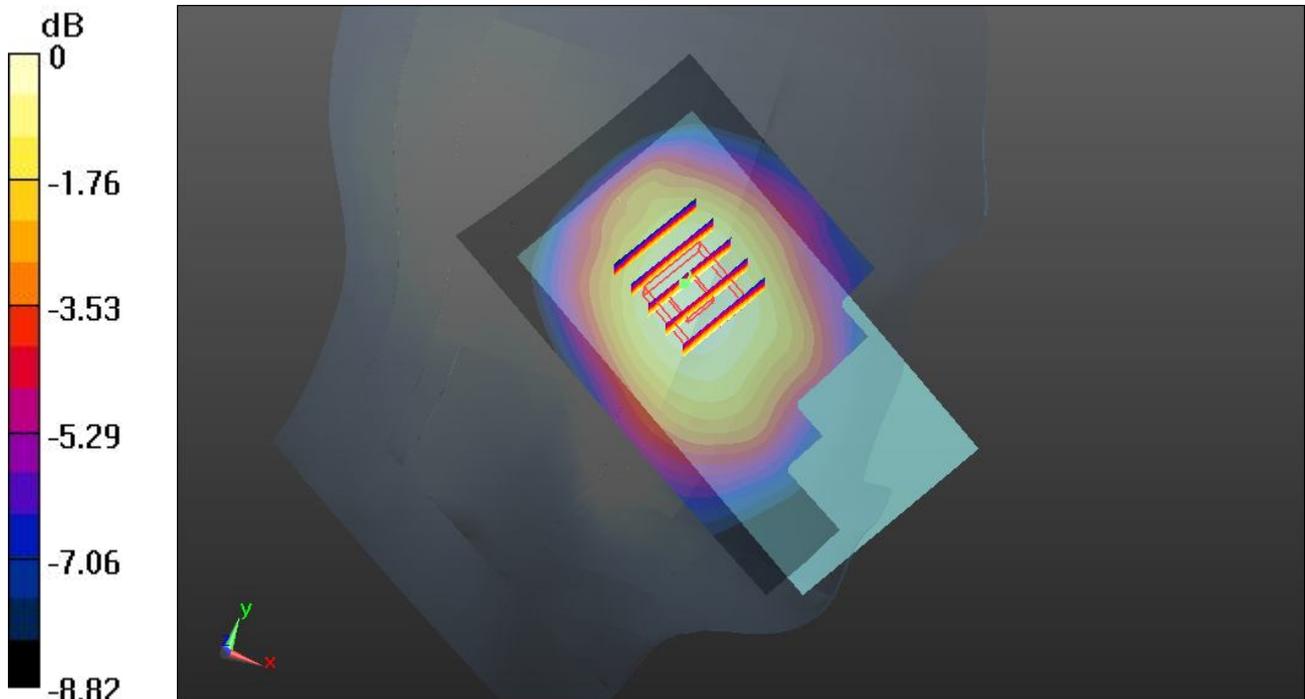

0 dB = 0.196 W/kg

41 WLAN2.4GHz_802.11b_Right Cheek_Ch11

DUT: 2D2703

Communication System: WIFI; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: HSL_2450_130117 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.833$ mho/m; $\epsilon_r =$

39.712 ; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C ; Liquid Temperature : 21.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(6.99, 6.99, 6.99); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch11/Area Scan (81x131x1): Interpolated grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.0422 W/kg


Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.626 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.113 mW/g

SAR(1 g) = 0.020 mW/g; SAR(10 g) = 0.00682 mW/g

Maximum value of SAR (measured) = 0.0665 W/kg

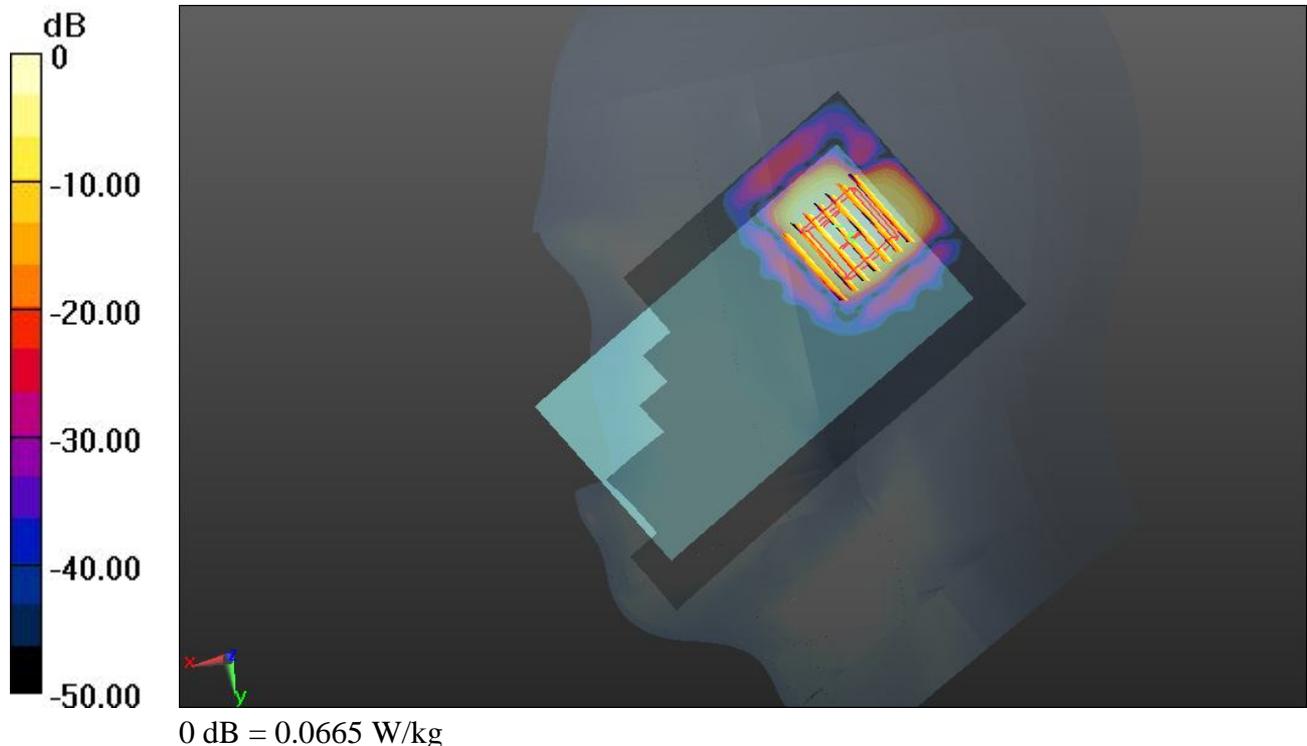

42 WLAN2.4GHz_802.11b_Right Tilted_Ch11

DUT: 2D2703

Communication System: WIFI; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: HSL_2450_130117 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.833$ mho/m; $\epsilon_r =$

39.712 ; $\rho = 1000$ kg/m³

Ambient Temperature : 23.7 °C ; Liquid Temperature : 21.7 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(6.99, 6.99, 6.99); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch11/Area Scan (81x131x1): Interpolated grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (interpolated) = 0.0581 W/kg


Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 0 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.079 mW/g

SAR(1 g) = 0.00272 mW/g; SAR(10 g) = 0.000602 mW/g

Maximum value of SAR (measured) = 0.0560 W/kg

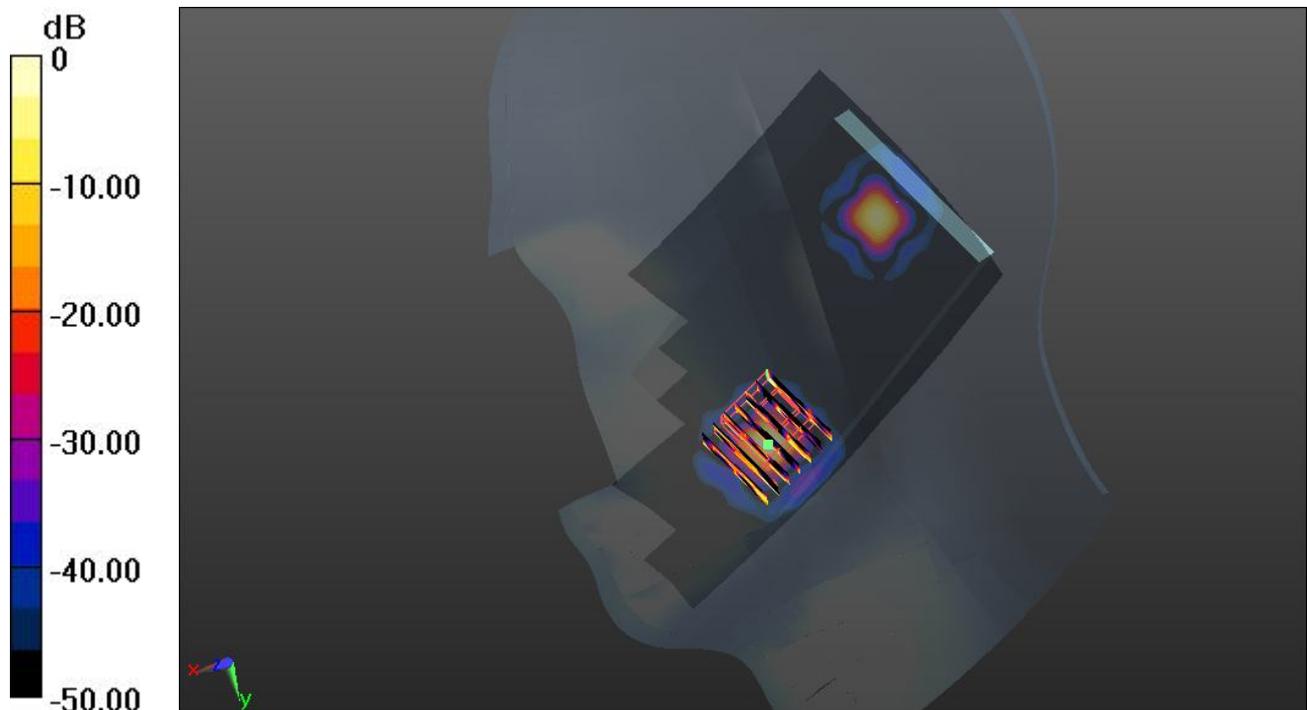

0 dB = 0.0560 W/kg

43 WLAN2.4GHz_802.11b_Left Cheek_Ch11

DUT: 2D2703

Communication System: WIFI; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: HSL_2450_130117 Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 1.833 \text{ mho/m}$; $\epsilon_r =$

39.712 ; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.7 \text{ }^\circ\text{C}$; Liquid Temperature : $21.7 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(6.99, 6.99, 6.99); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch11/Area Scan (81x131x1): Interpolated grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (interpolated) = 0.209 W/kg


Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 5.769 V/m ; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.313 mW/g

SAR(1 g) = 0.055 mW/g ; SAR(10 g) = 0.013 mW/g

Maximum value of SAR (measured) = 0.152 W/kg

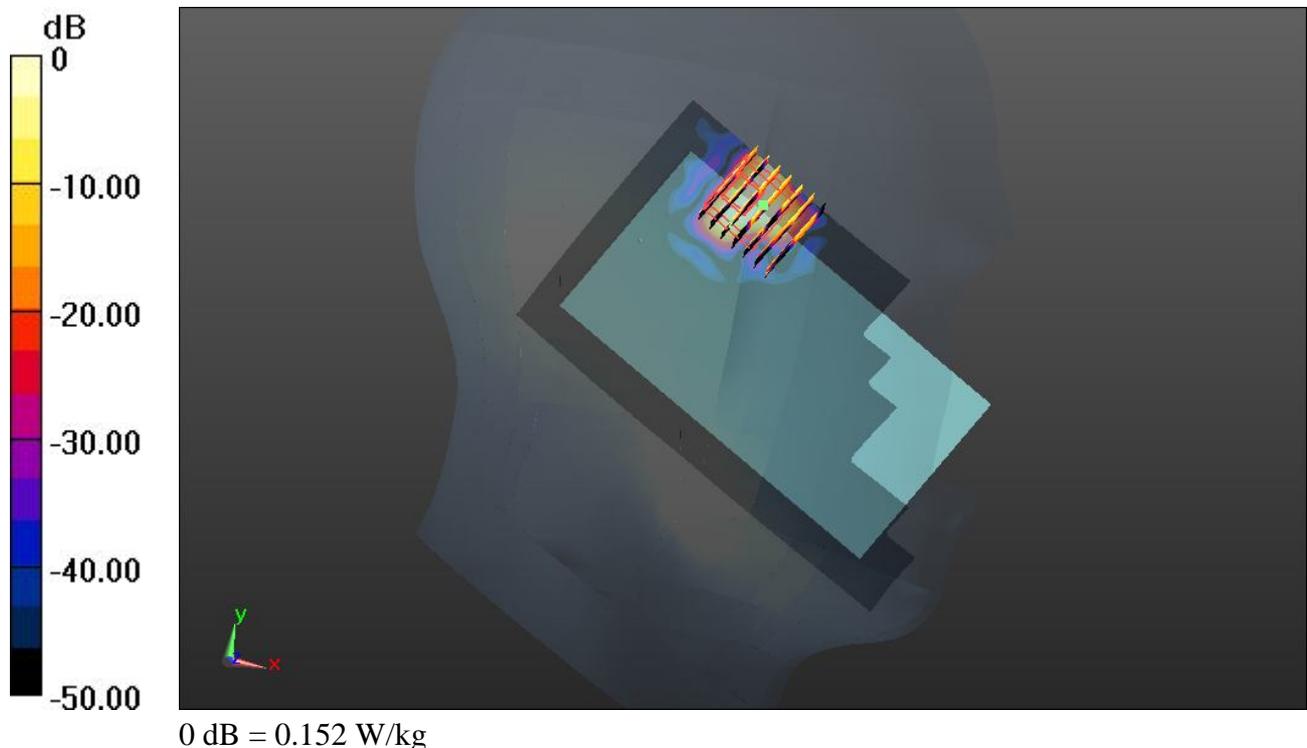

43 WLAN2.4GHz_802.11b_Left Cheek_Ch11_2D

DUT: 2D2703

Communication System: WIFI; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: HSL_2450_130117 Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 1.833 \text{ mho/m}$; $\epsilon_r =$

39.712 ; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.7 \text{ }^\circ\text{C}$; Liquid Temperature : $21.7 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(6.99, 6.99, 6.99); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch11/Area Scan (81x131x1): Interpolated grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (interpolated) = 0.209 W/kg


Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 5.769 V/m ; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.313 mW/g

SAR(1 g) = 0.055 mW/g ; SAR(10 g) = 0.013 mW/g

Maximum value of SAR (measured) = 0.152 W/kg

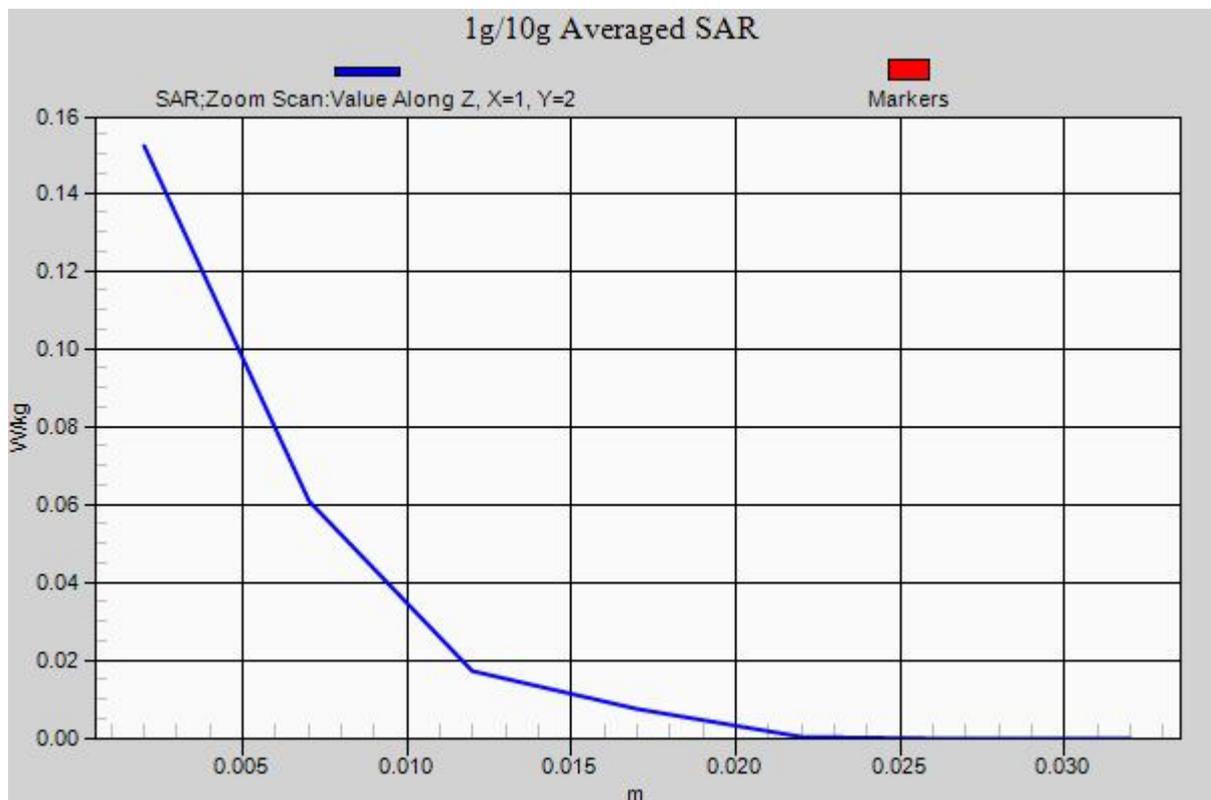

44 WLAN2.4GHz_802.11b_Left Tilted_Ch11

DUT: 2D2703

Communication System: WIFI; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: HSL_2450_130117 Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 1.833 \text{ mho/m}$; $\epsilon_r =$

39.712 ; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.7 \text{ }^\circ\text{C}$; Liquid Temperature : $21.7 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(6.99, 6.99, 6.99); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch11/Area Scan (81x131x1): Interpolated grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (interpolated) = 0.0804 W/kg


Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.834 V/m ; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.237 mW/g

SAR(1 g) = 0.016 mW/g ; SAR(10 g) = 0.00226 mW/g

Maximum value of SAR (measured) = 0.237 W/kg

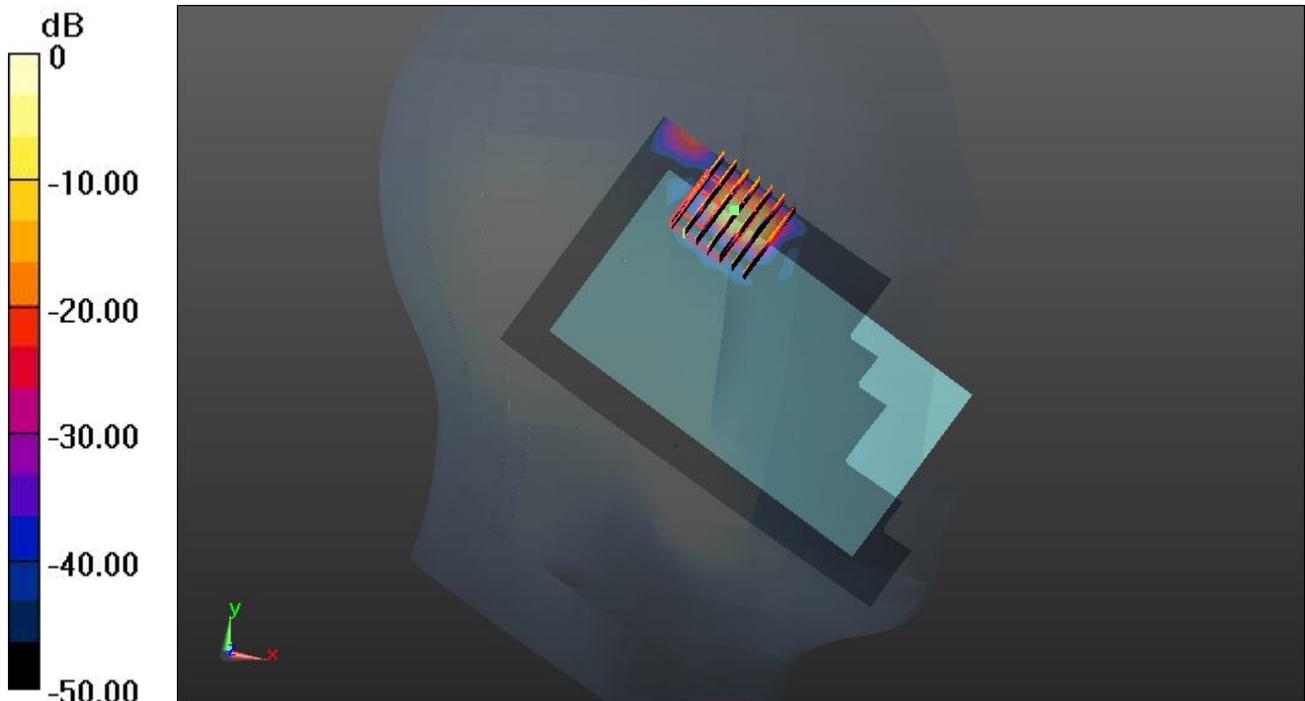

01 GSM850_GPRS(2 Tx slots)_Front_1cm_Ch128

DUT: 2D2703

Communication System: GPRS/EDGE10; Frequency: 824.2 MHz; Duty Cycle: 1:4
 Medium: MSL_835_130117 Medium parameters used: $f = 824.2 \text{ MHz}$; $\sigma = 0.959 \text{ mho/m}$; $\epsilon_r = 56.157$; $\rho = 1000 \text{ kg/m}^3$
 Ambient Temperature : $23.5 \text{ }^\circ\text{C}$; Liquid Temperature : $21.5 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.5, 9.5, 9.5); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch128/Area Scan (61x111x1): Interpolated grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.848 W/kg


Ch128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 30.196 V/m ; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.920 mW/g

SAR(1 g) = 0.729 mW/g ; SAR(10 g) = 0.557 mW/g

Maximum value of SAR (measured) = 0.835 W/kg

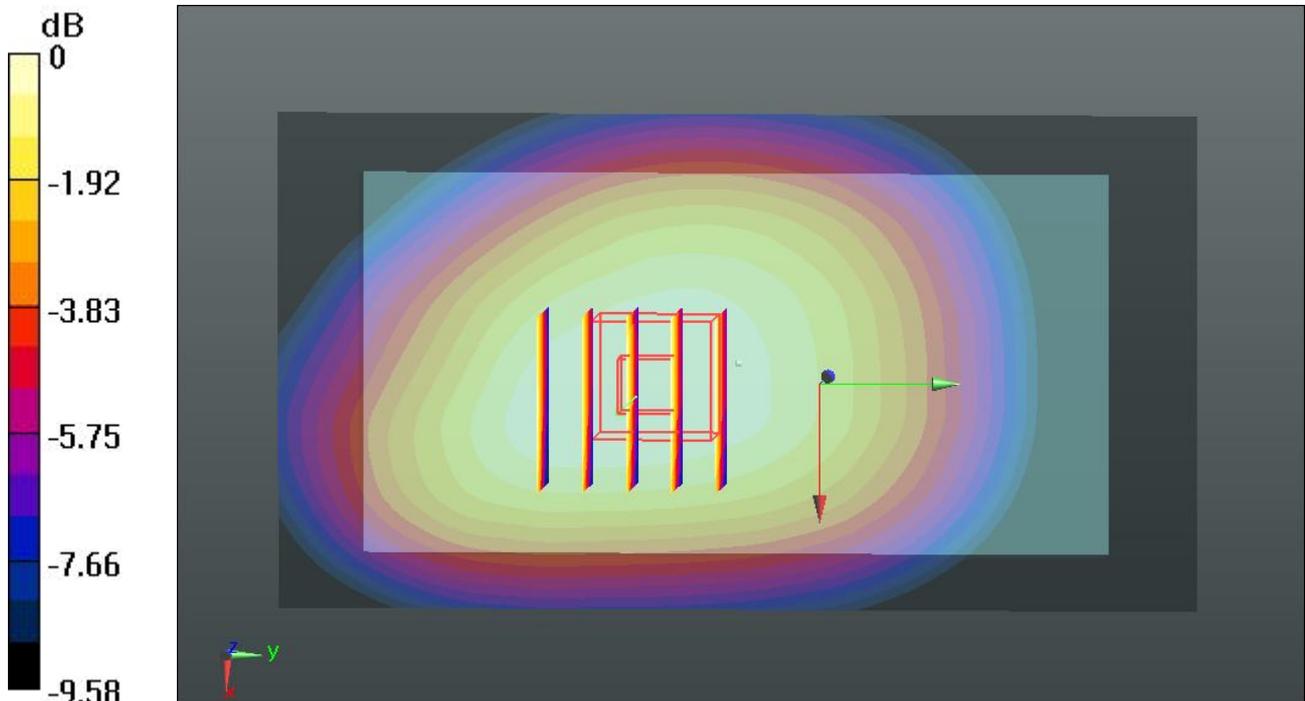

0 dB = 0.835 W/kg

02 GSM850_GPRS(2 Tx slots)_Back_1cm_Ch128

DUT: 2D2703

Communication System: GPRS/EDGE10; Frequency: 824.2 MHz; Duty Cycle: 1:4
 Medium: MSL_835_130117 Medium parameters used: $f = 824.2 \text{ MHz}$; $\sigma = 0.959 \text{ mho/m}$; $\epsilon_r = 56.157$; $\rho = 1000 \text{ kg/m}^3$
 Ambient Temperature : $23.5 \text{ }^\circ\text{C}$; Liquid Temperature : $21.5 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.5, 9.5, 9.5); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch128/Area Scan (61x111x1): Interpolated grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 1.10 W/kg


Ch128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 34.558 V/m ; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.199 mW/g

SAR(1 g) = 0.947 mW/g ; SAR(10 g) = 0.716 mW/g

Maximum value of SAR (measured) = 1.09 W/kg

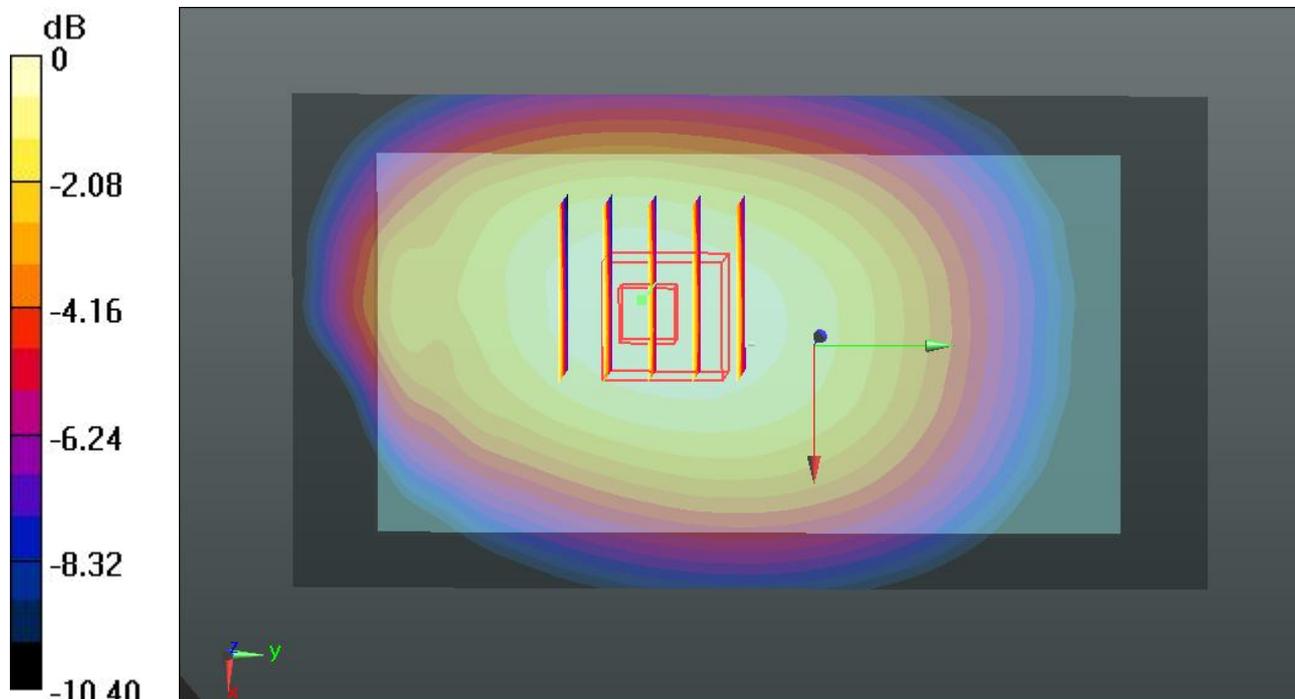

0 dB = 1.09 W/kg

03 GSM850_GPRS(2 Tx slots)_Left Side_1cm_Ch128

DUT: 2D2703

Communication System: GPRS/EDGE10; Frequency: 824.2 MHz; Duty Cycle: 1:4
Medium: MSL_835_130117 Medium parameters used: $f = 824.2 \text{ MHz}$; $\sigma = 0.959 \text{ mho/m}$; $\epsilon_r = 56.157$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $23.5 \text{ }^\circ\text{C}$; Liquid Temperature : $21.5 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.5, 9.5, 9.5); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch128/Area Scan (41x111x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.964 W/kg


Ch128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 32.440 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 1.095 mW/g

SAR(1 g) = 0.792 mW/g; SAR(10 g) = 0.557 mW/g

Maximum value of SAR (measured) = 0.957 W/kg

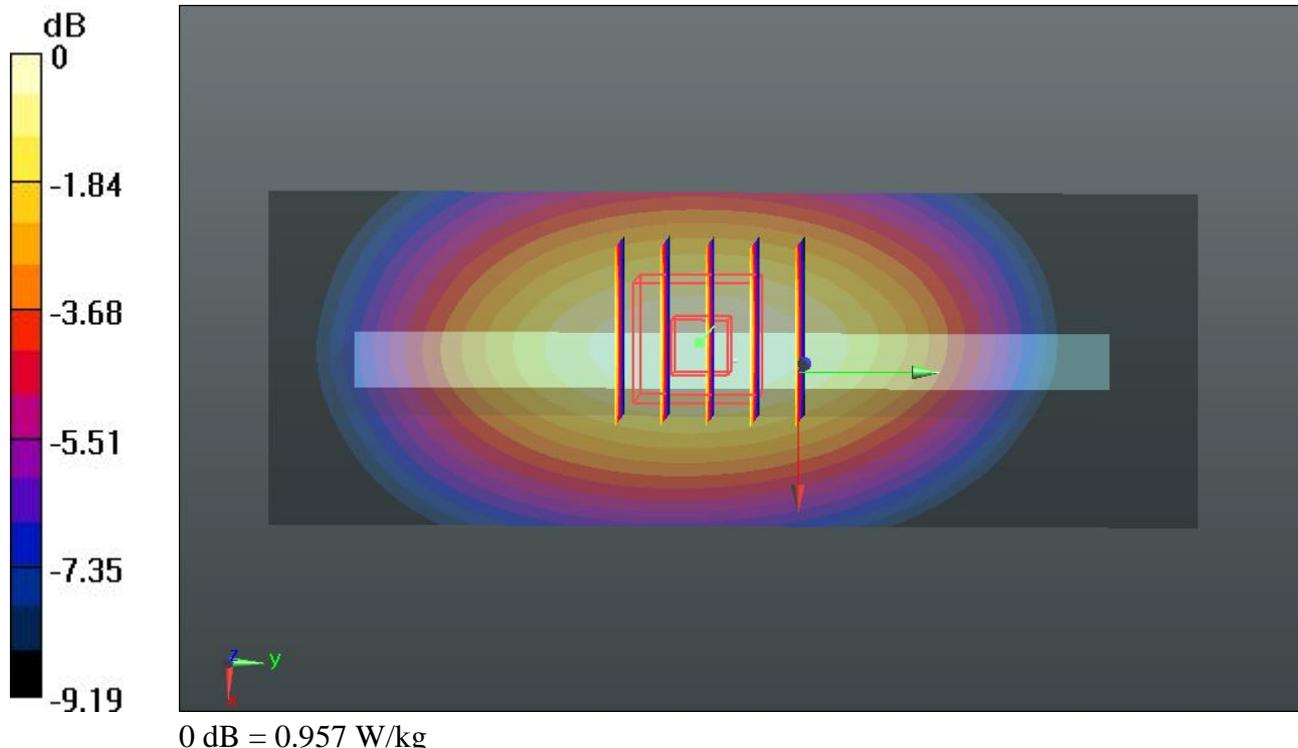

04 GSM850_GPRS(2 Tx slots)_Right Side_1cm_Ch128

DUT: 2D2703

Communication System: GPRS/EDGE10; Frequency: 824.2 MHz; Duty Cycle: 1:4
Medium: MSL_835_130117 Medium parameters used: $f = 824.2 \text{ MHz}$; $\sigma = 0.959 \text{ mho/m}$; $\epsilon_r = 56.157$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $23.5 \text{ }^\circ\text{C}$; Liquid Temperature : $21.5 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.5, 9.5, 9.5); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch128/Area Scan (41x111x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.890 W/kg


Ch128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 31.238 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 1.020 mW/g

SAR(1 g) = 0.737 mW/g; SAR(10 g) = 0.518 mW/g

Maximum value of SAR (measured) = 0.888 W/kg

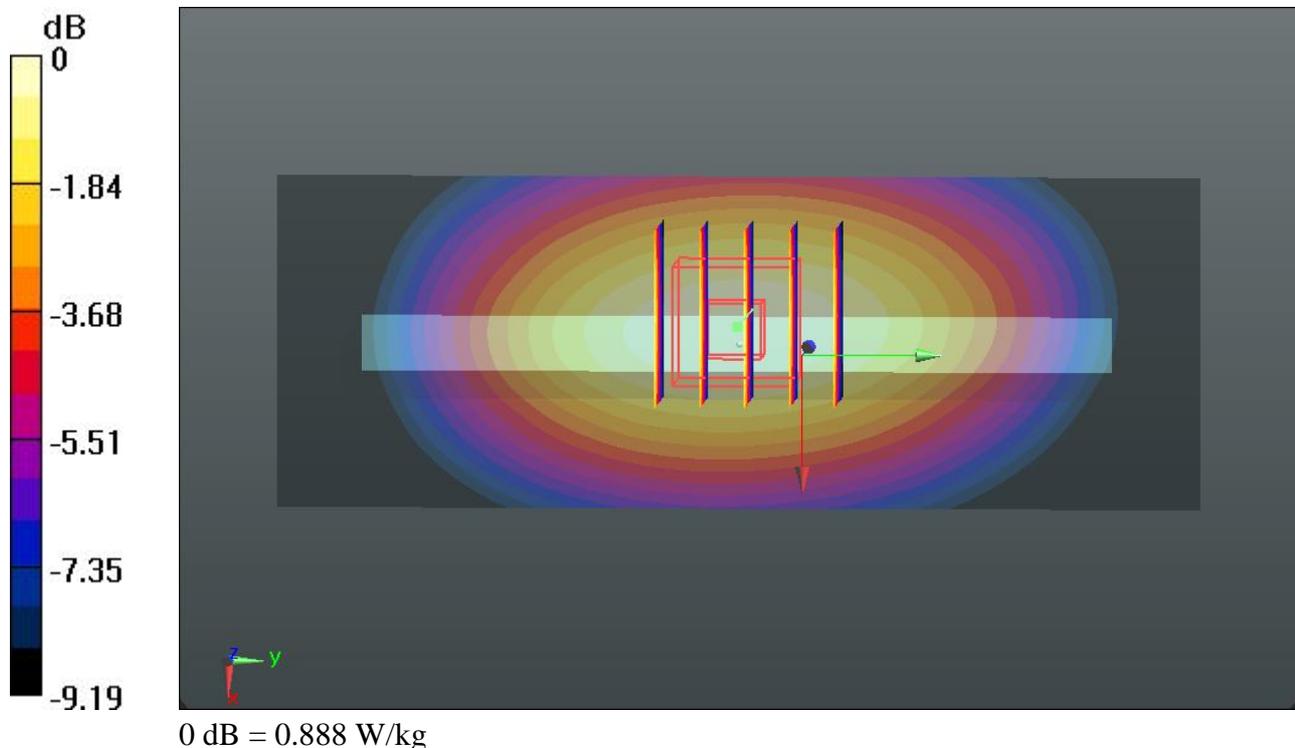

05 GSM850_GPRS(2 Tx slots)_Bottom Side_1cm_Ch128

DUT: 2D2703


Communication System: GPRS/EDGE10; Frequency: 824.2 MHz; Duty Cycle: 1:4
 Medium: MSL_835_130117 Medium parameters used: $f = 824.2 \text{ MHz}$; $\sigma = 0.959 \text{ mho/m}$; $\epsilon_r = 56.157$; $\rho = 1000 \text{ kg/m}^3$
 Ambient Temperature : $23.5 \text{ }^\circ\text{C}$; Liquid Temperature : $21.5 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.5, 9.5, 9.5); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch128/Area Scan (41x71x1): Interpolated grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.125 W/kg

Ch128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 12.340 V/m ; Power Drift = -0.01 dB
 Peak SAR (extrapolated) = 0.186 mW/g
SAR(1 g) = 0.097 mW/g ; SAR(10 g) = 0.053 mW/g
 Maximum value of SAR (measured) = 0.137 W/kg

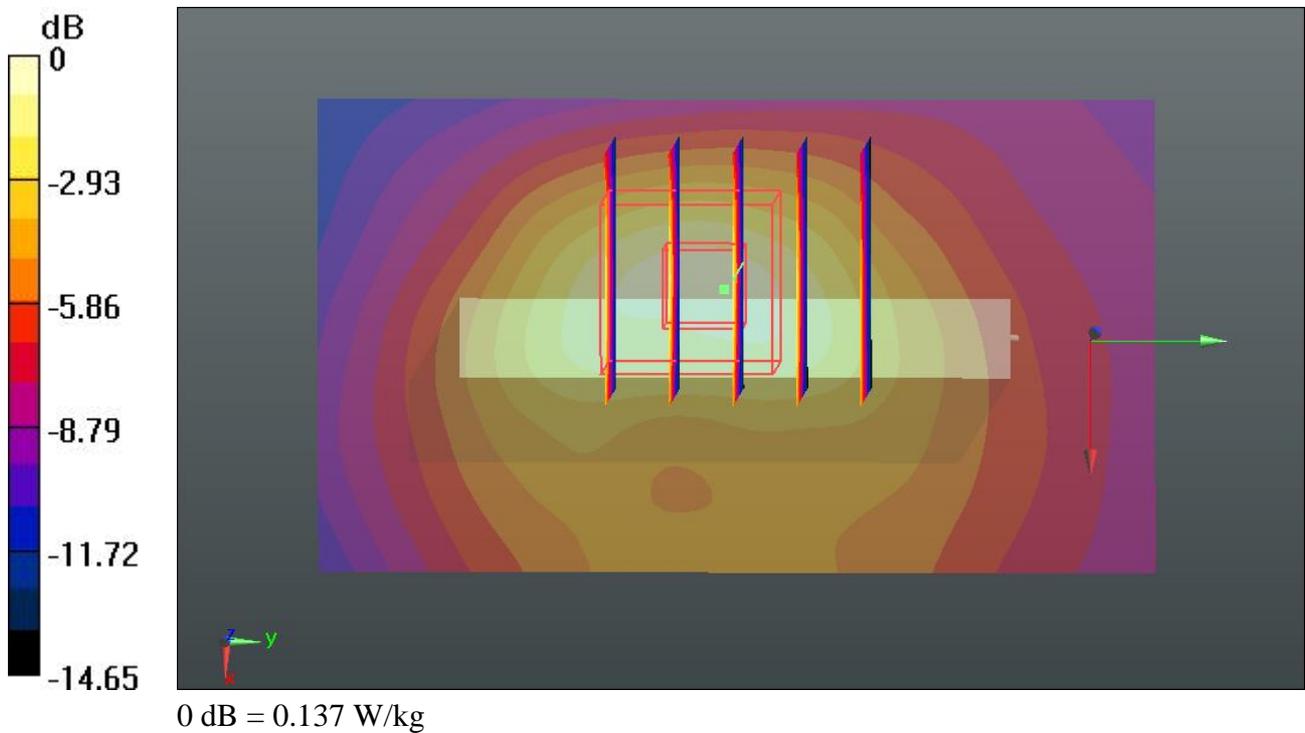

06 GSM850_GPRS(2 Tx slots)_Front_1cm_Ch189

DUT: 2D2703

Communication System: GPRS/EDGE10; Frequency: 836.4 MHz; Duty Cycle: 1:4

Medium: MSL_835_130117 Medium parameters used: $f = 836.4 \text{ MHz}$; $\sigma = 0.97 \text{ mho/m}$; $\epsilon_r = 56.057$;

$\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.5 \text{ }^\circ\text{C}$; Liquid Temperature : $21.5 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.5, 9.5, 9.5); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch189/Area Scan (61x111x1): Interpolated grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.860 W/kg


Ch189/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 30.204 V/m ; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.941 mW/g

SAR(1 g) = 0.747 mW/g ; SAR(10 g) = 0.570 mW/g

Maximum value of SAR (measured) = 0.853 W/kg

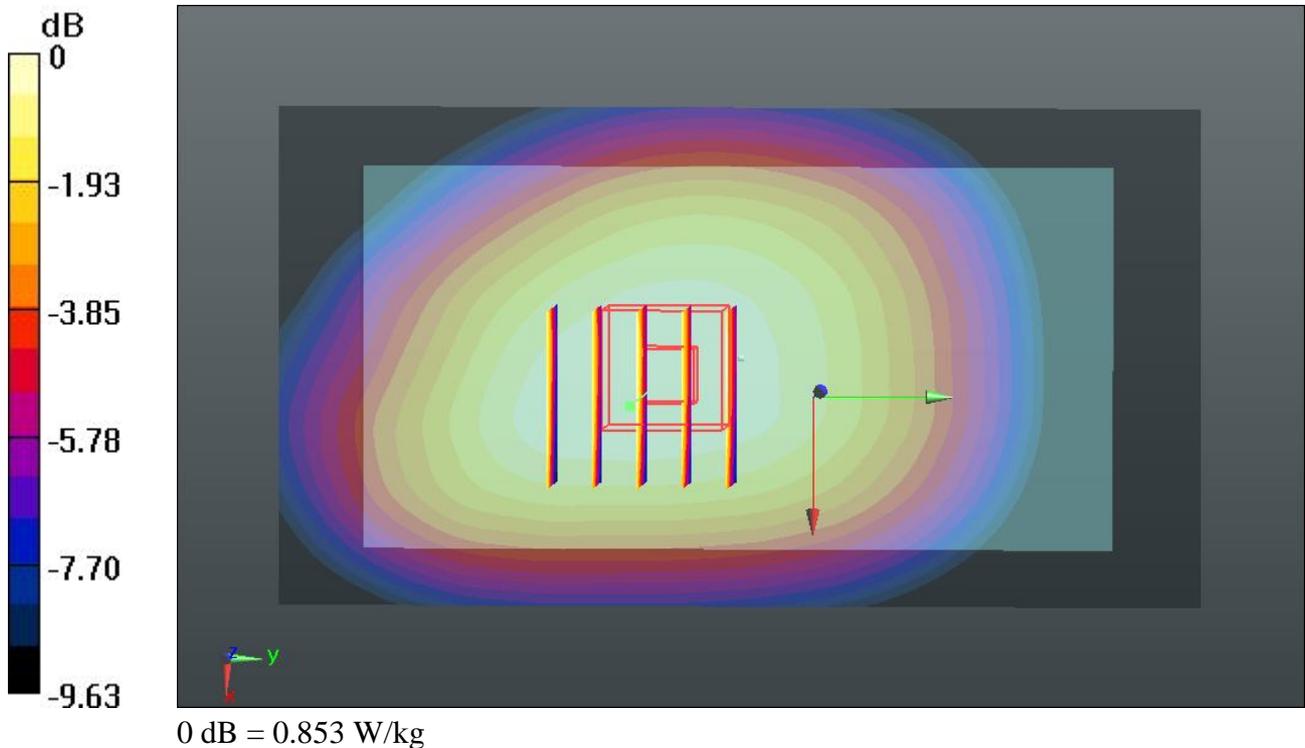

07 GSM850_GPRS(2 Tx slots)_Front_1cm_Ch251

DUT: 2D2703

Communication System: GPRS/EDGE10; Frequency: 848.8 MHz; Duty Cycle: 1:4

Medium: MSL_835_130117 Medium parameters used: $f = 849$ MHz; $\sigma = 0.982$ mho/m; $\epsilon_r = 55.937$;

$\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.5, 9.5, 9.5); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch251/Area Scan (61x111x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.883 W/kg


Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 30.679 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.967 mW/g

SAR(1 g) = 0.768 mW/g; SAR(10 g) = 0.585 mW/g

Maximum value of SAR (measured) = 0.879 W/kg

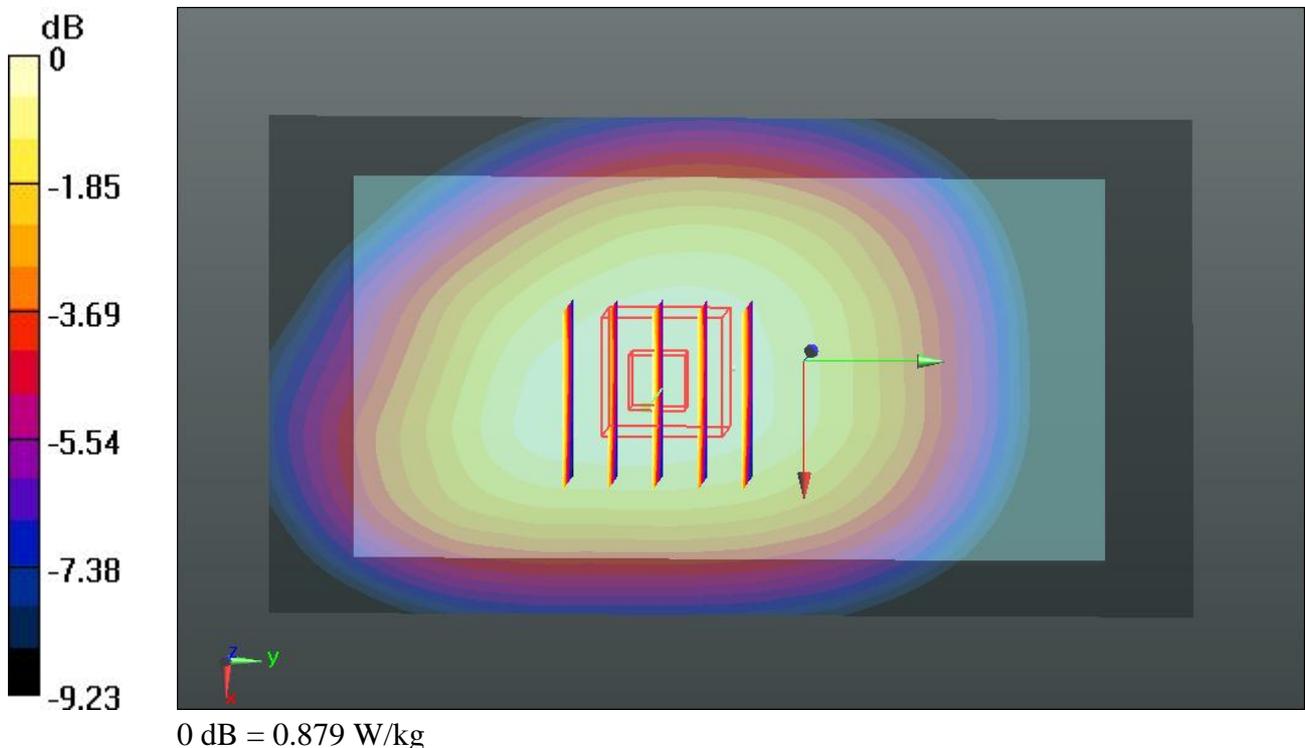

08 GSM850_GPRS(2 Tx slots)_Back_1cm_Ch189

DUT: 2D2703

Communication System: GPRS/EDGE10; Frequency: 836.4 MHz; Duty Cycle: 1:4

Medium: MSL_835_130117 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.97$ mho/m; $\epsilon_r = 56.057$;

$\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.5, 9.5, 9.5); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch189/Area Scan (61x111x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.09 W/kg


Ch189/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 34.292 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.199 mW/g

SAR(1 g) = 0.951 mW/g; SAR(10 g) = 0.718 mW/g

Maximum value of SAR (measured) = 1.09 W/kg

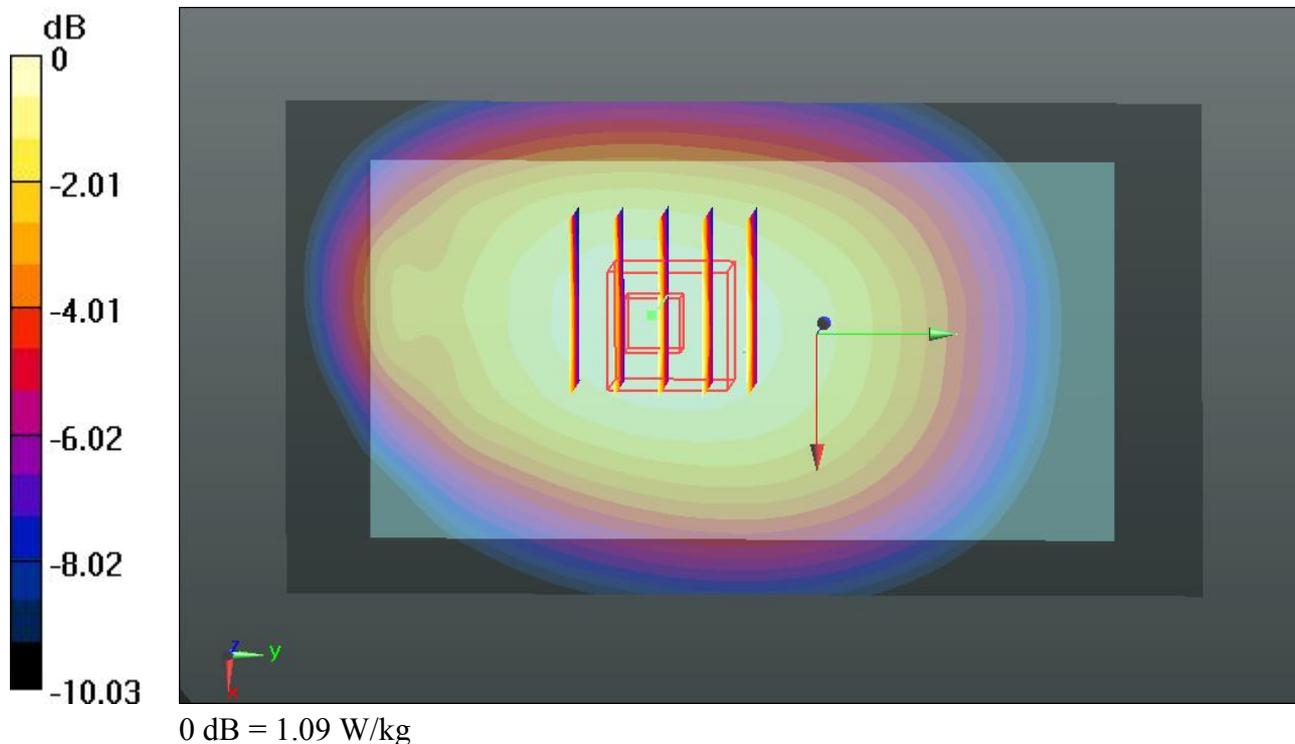

08 GSM850_GPRS(2 Tx slots)_Back_1cm_Ch189_2D

DUT: 2D2703

Communication System: GPRS/EDGE10; Frequency: 836.4 MHz; Duty Cycle: 1:4
 Medium: MSL_835_130117 Medium parameters used: $f = 836.4 \text{ MHz}$; $\sigma = 0.97 \text{ mho/m}$; $\epsilon_r = 56.057$; $\rho = 1000 \text{ kg/m}^3$
 Ambient Temperature : $23.5 \text{ }^\circ\text{C}$; Liquid Temperature : $21.5 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.5, 9.5, 9.5); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch189/Area Scan (61x111x1): Interpolated grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 1.09 W/kg


Ch189/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 34.292 V/m ; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.199 mW/g

SAR(1 g) = 0.951 mW/g ; SAR(10 g) = 0.718 mW/g

Maximum value of SAR (measured) = 1.09 W/kg

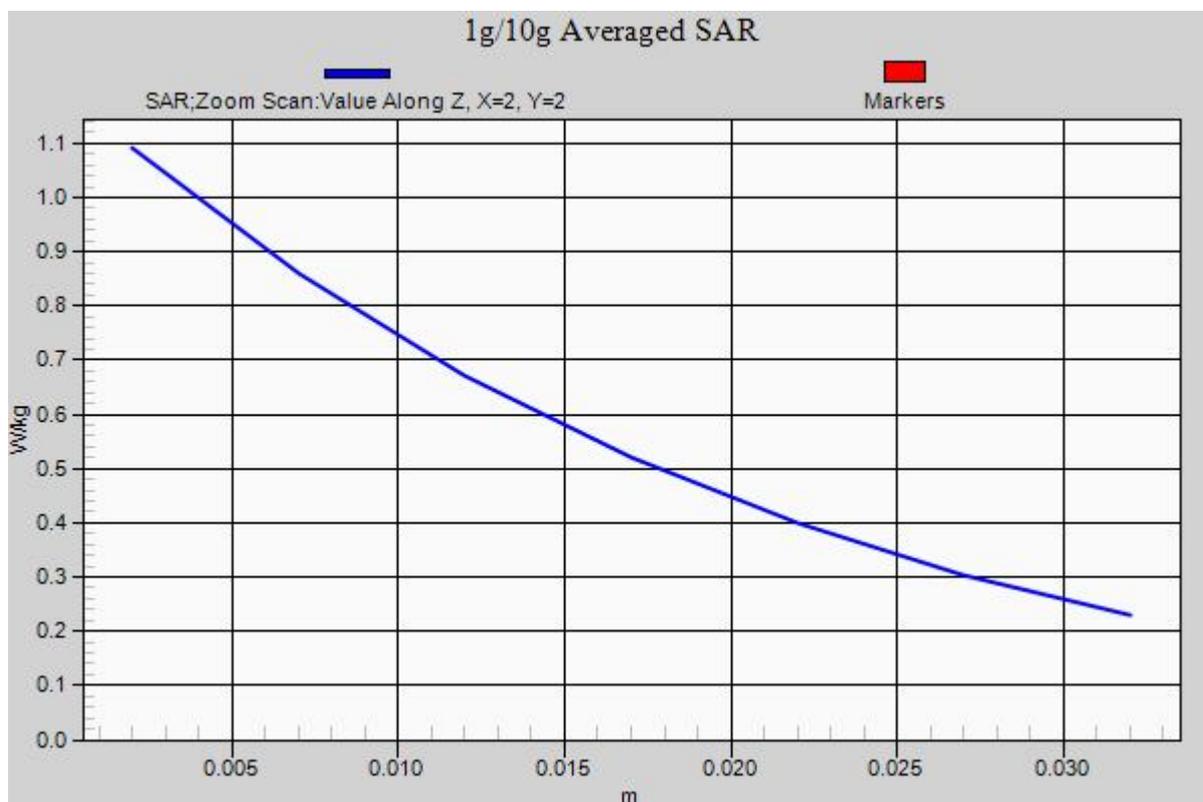

17 GSM850_GPRS(2 Tx slots)_Back_1cm_Ch189_Repeat SAR

DUT: 2D2703

Communication System: GPRS/EDGE10; Frequency: 836.4 MHz; Duty Cycle: 1:4

Medium: MSL_835_130117 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.97$ mho/m; $\epsilon_r = 56.057$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.5, 9.5, 9.5); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch189/Area Scan (61x111x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.08 W/kg

Ch189/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 34.009 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 1.177 mW/g

SAR(1 g) = 0.932 mW/g; SAR(10 g) = 0.706 mW/g

Maximum value of SAR (measured) = 1.07 W/kg


Ch189/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 34.009 V/m; Power Drift = 0.04 dB

Peak SAR (extrapolated) = 0.829 mW/g

SAR(1 g) = 0.543 mW/g; SAR(10 g) = 0.359 mW/g

Maximum value of SAR (measured) = 0.718 W/kg

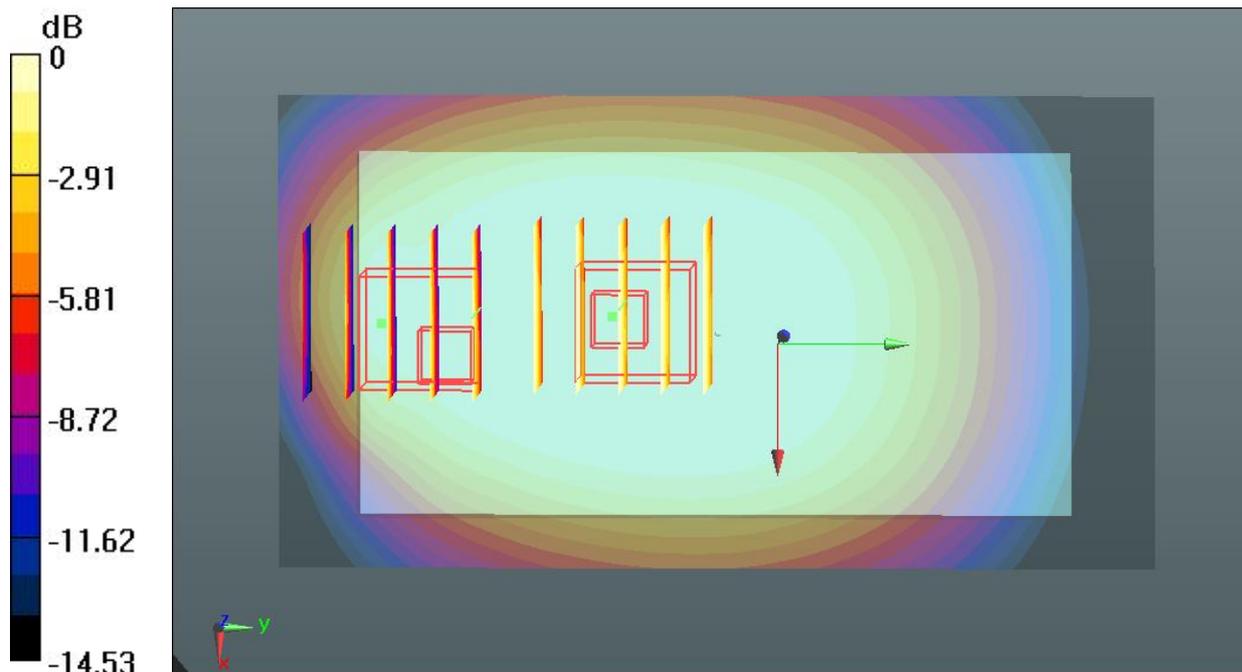

0 dB = 0.718 W/kg

09 GSM850_GPRS(2 Tx slots)_Back_1cm_Ch251

DUT: 2D2703

Communication System: GPRS/EDGE10; Frequency: 848.8 MHz; Duty Cycle: 1:4

Medium: MSL_835_130117 Medium parameters used: $f = 849$ MHz; $\sigma = 0.982$ mho/m; $\epsilon_r = 55.937$;

$\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.5, 9.5, 9.5); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch251/Area Scan (61x111x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.11 W/kg


Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 34.250 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.202 mW/g

SAR(1 g) = 0.949 mW/g; SAR(10 g) = 0.718 mW/g

Maximum value of SAR (measured) = 1.09 W/kg

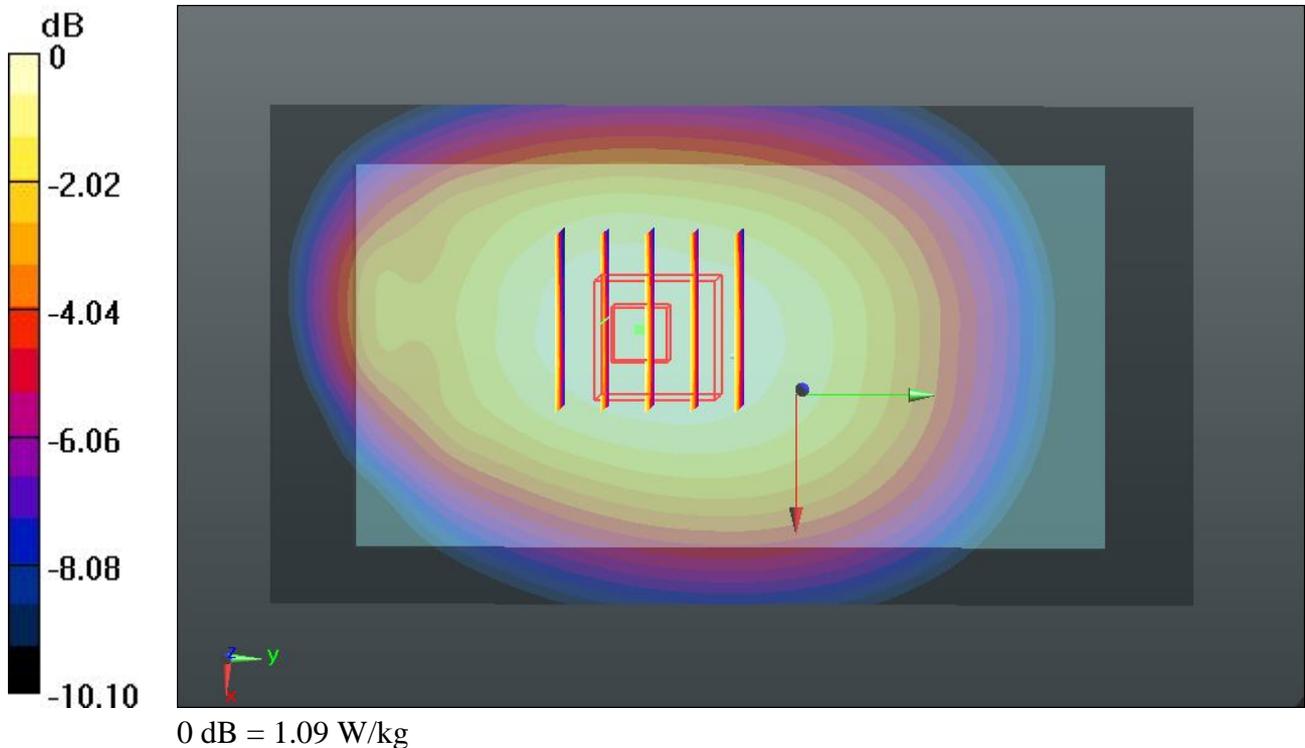

10 GSM850_GPRS(2 Tx slots)_Left Side_1cm_Ch189

DUT: 2D2703

Communication System: GPRS/EDGE10; Frequency: 836.4 MHz; Duty Cycle: 1:4

Medium: MSL_835_130117 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.97$ mho/m; $\epsilon_r = 56.057$;

$\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.5, 9.5, 9.5); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch189/Area Scan (41x111x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.993 W/kg


Ch189/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 32.781 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.136 mW/g

SAR(1 g) = 0.816 mW/g; SAR(10 g) = 0.571 mW/g

Maximum value of SAR (measured) = 0.990 W/kg

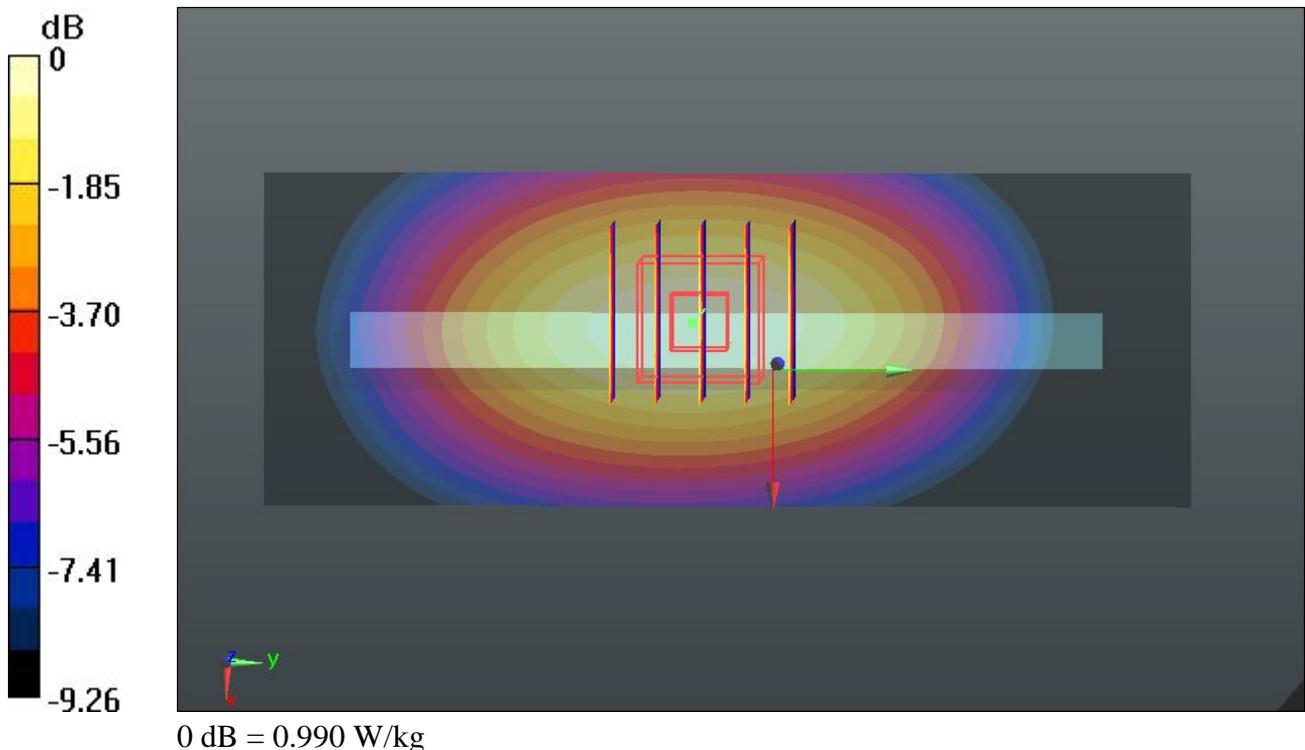

11 GSM850_GPRS(2 Tx slots)_Left Side_1cm_Ch251

DUT: 2D2703

Communication System: GPRS/EDGE10; Frequency: 848.8 MHz; Duty Cycle: 1:4

Medium: MSL_835_130117 Medium parameters used: $f = 849$ MHz; $\sigma = 0.982$ mho/m; $\epsilon_r = 55.937$;

$\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.5, 9.5, 9.5); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch251/Area Scan (41x111x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.02 W/kg


Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 33.108 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.172 mW/g

SAR(1 g) = 0.840 mW/g; SAR(10 g) = 0.586 mW/g

Maximum value of SAR (measured) = 1.02 W/kg

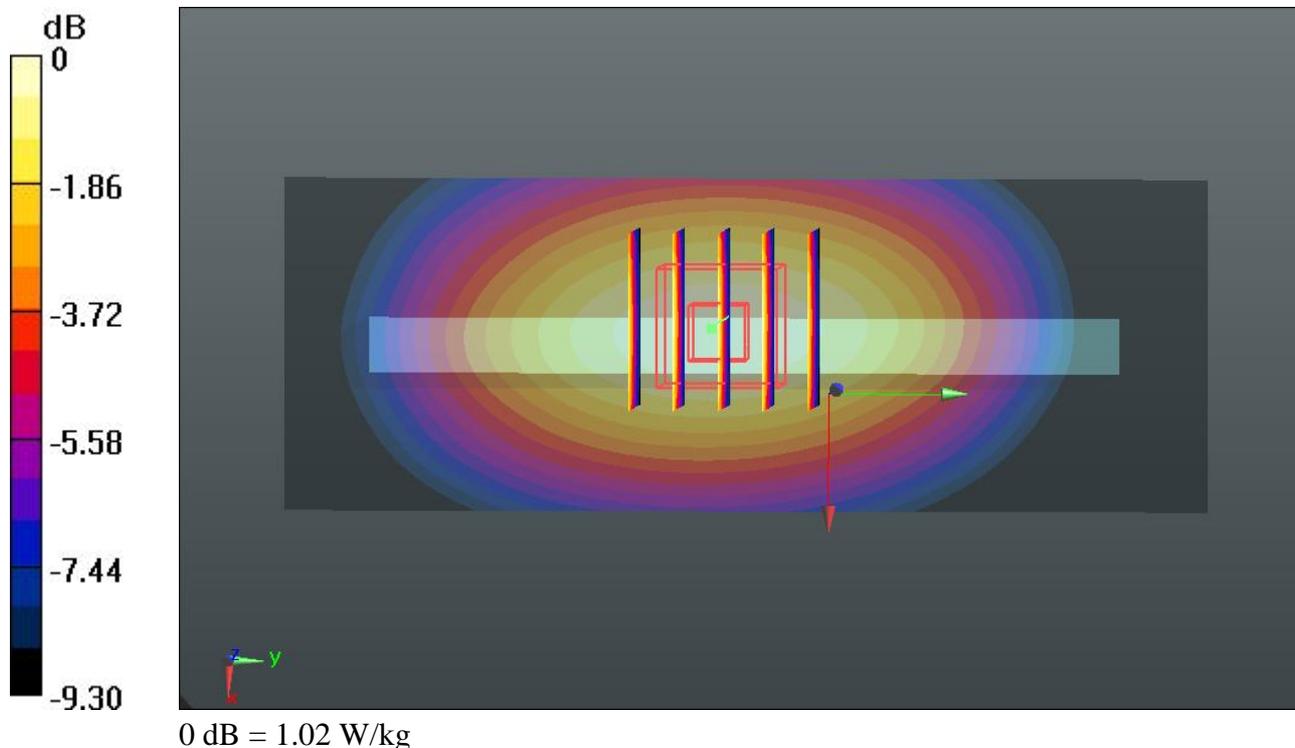

12 GSM850_GPRS(2 Tx slots)_Right Side_1cm_Ch189

DUT: 2D2703

Communication System: GPRS/EDGE10; Frequency: 836.4 MHz; Duty Cycle: 1:4

Medium: MSL_835_130117 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.97$ mho/m; $\epsilon_r = 56.057$;

$\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.5, 9.5, 9.5); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch189/Area Scan (41x111x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.889 W/kg


Ch189/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 31.000 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 1.025 mW/g

SAR(1 g) = 0.738 mW/g; SAR(10 g) = 0.517 mW/g

Maximum value of SAR (measured) = 0.892 W/kg

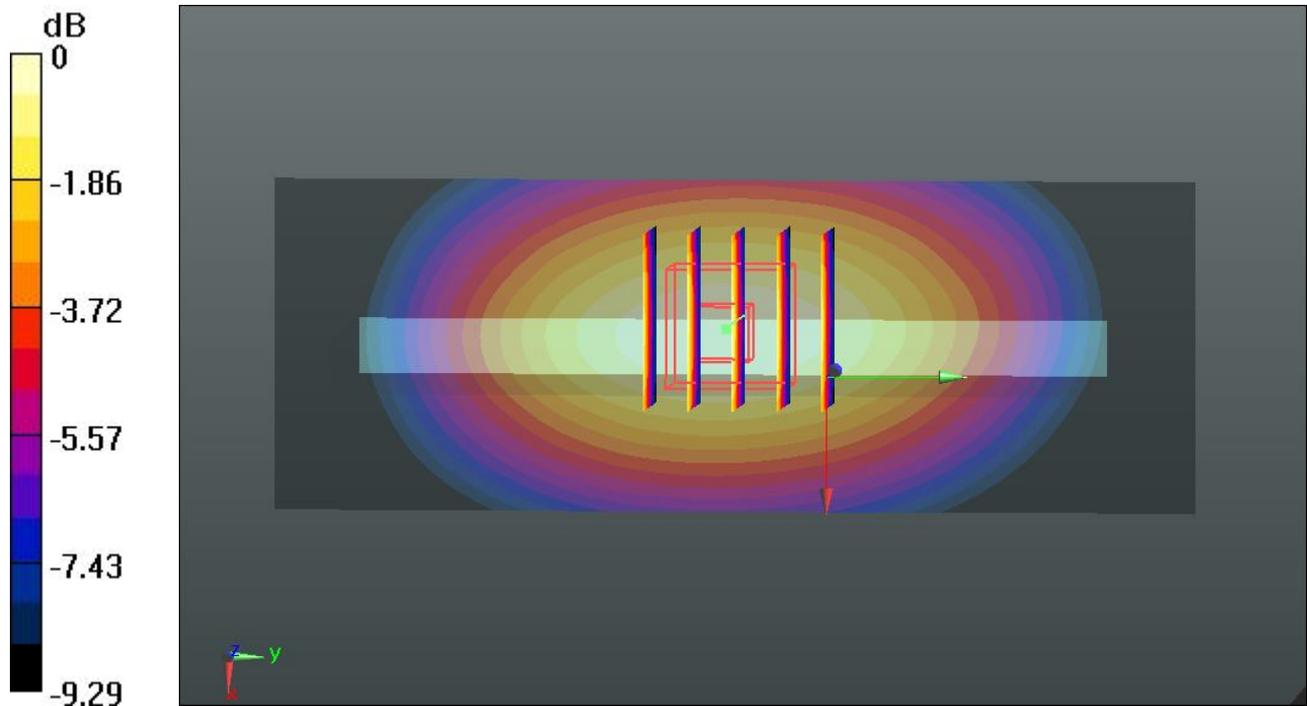

0 dB = 0.892 W/kg

13 GSM850_GPRS(2 Tx slots)_Right Side_1cm_Ch251

DUT: 2D2703

Communication System: GPRS/EDGE10; Frequency: 848.8 MHz; Duty Cycle: 1:4

Medium: MSL_835_130117 Medium parameters used: $f = 849$ MHz; $\sigma = 0.982$ mho/m; $\epsilon_r = 55.937$;

$\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.5, 9.5, 9.5); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch251/Area Scan (41x111x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.882 W/kg


Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 30.748 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.009 mW/g

SAR(1 g) = 0.724 mW/g; SAR(10 g) = 0.505 mW/g

Maximum value of SAR (measured) = 0.879 W/kg

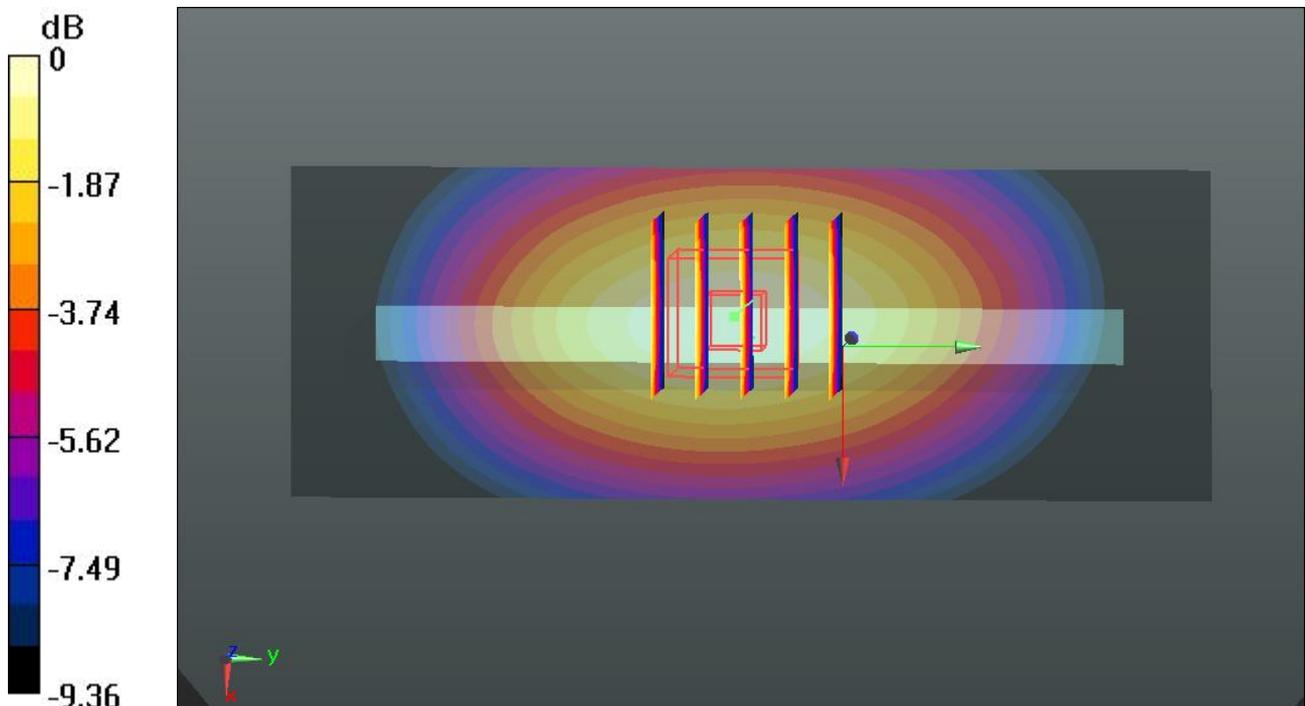

0 dB = 0.879 W/kg

14 GSM850_GSM_Back_1cm_Ch189

DUT: 2D2703

Communication System: Generic GSM; Frequency: 836.4 MHz; Duty Cycle: 1:8.3

Medium: MSL_835_130117 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.97$ mho/m; $\epsilon_r = 56.057$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.5, 9.5, 9.5); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch189/Area Scan (61x111x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.860 W/kg

Ch189/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 30.289 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.931 mW/g

SAR(1 g) = 0.735 mW/g; SAR(10 g) = 0.555 mW/g

Maximum value of SAR (measured) = 0.845 W/kg


Ch189/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 30.289 V/m; Power Drift = -37.95 dB

Peak SAR (extrapolated) = 1.284 mW/g

SAR(1 g) = 0.486 mW/g; SAR(10 g) = 0.290 mW/g

Maximum value of SAR (measured) = 0.544 W/kg

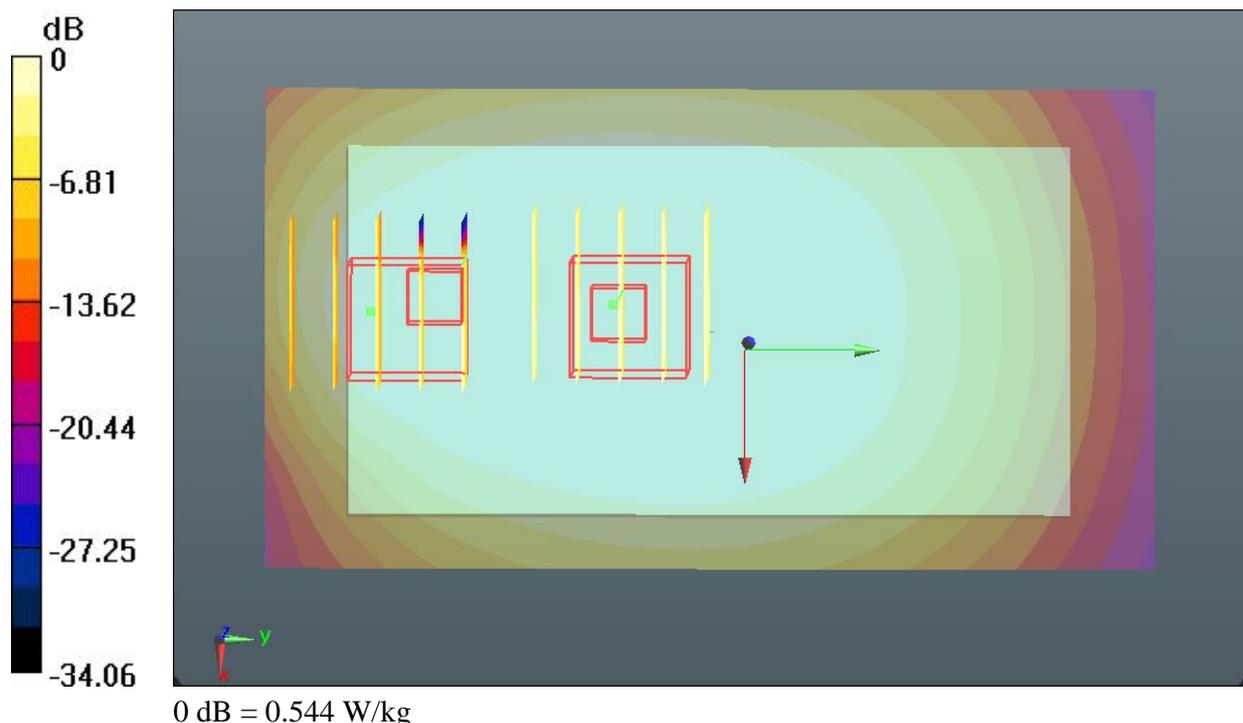

15 GSM850_GSM_Back_1cm_Ch128

DUT: 2D2703

Communication System: Generic GSM; Frequency: 824.2 MHz; Duty Cycle: 1:8.3
Medium: MSL_835_130117 Medium parameters used: $f = 824.2 \text{ MHz}$; $\sigma = 0.959 \text{ mho/m}$; $\epsilon_r = 56.157$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $23.5 \text{ }^\circ\text{C}$; Liquid Temperature : $21.5 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.5, 9.5, 9.5); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch128/Area Scan (61x111x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.932 W/kg


Ch128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 31.683 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.010 mW/g

SAR(1 g) = 0.800 mW/g; SAR(10 g) = 0.608 mW/g

Maximum value of SAR (measured) = 0.917 W/kg

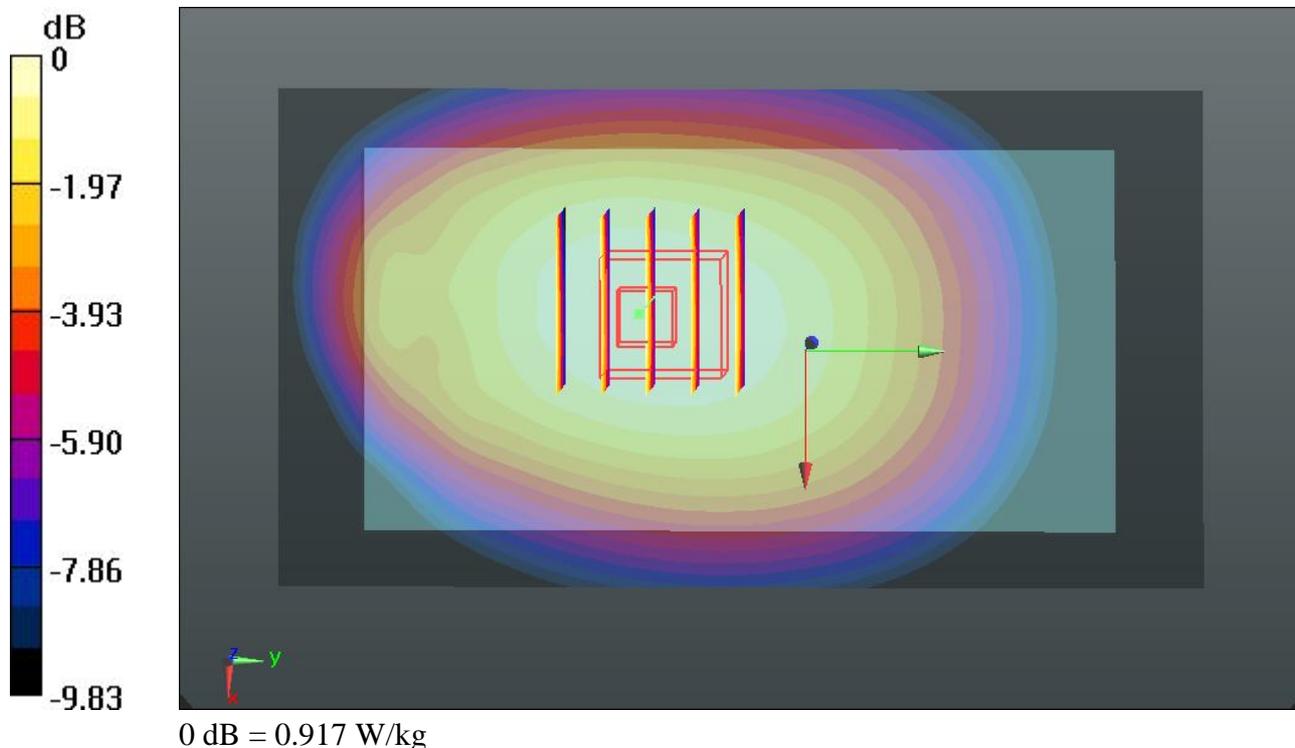

16 GSM850_GSM_Back_1cm_Ch251

DUT: 2D2703

Communication System: Generic GSM; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: MSL_835_130117 Medium parameters used: $f = 849 \text{ MHz}$; $\sigma = 0.982 \text{ mho/m}$; $\epsilon_r = 55.937$;

$\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.5 \text{ }^\circ\text{C}$; Liquid Temperature : $21.5 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.5, 9.5, 9.5); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch251/Area Scan (61x111x1): Interpolated grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.939 W/kg


Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 31.545 V/m ; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 1.009 mW/g

SAR(1 g) = 0.804 mW/g ; SAR(10 g) = 0.609 mW/g

Maximum value of SAR (measured) = 0.920 W/kg

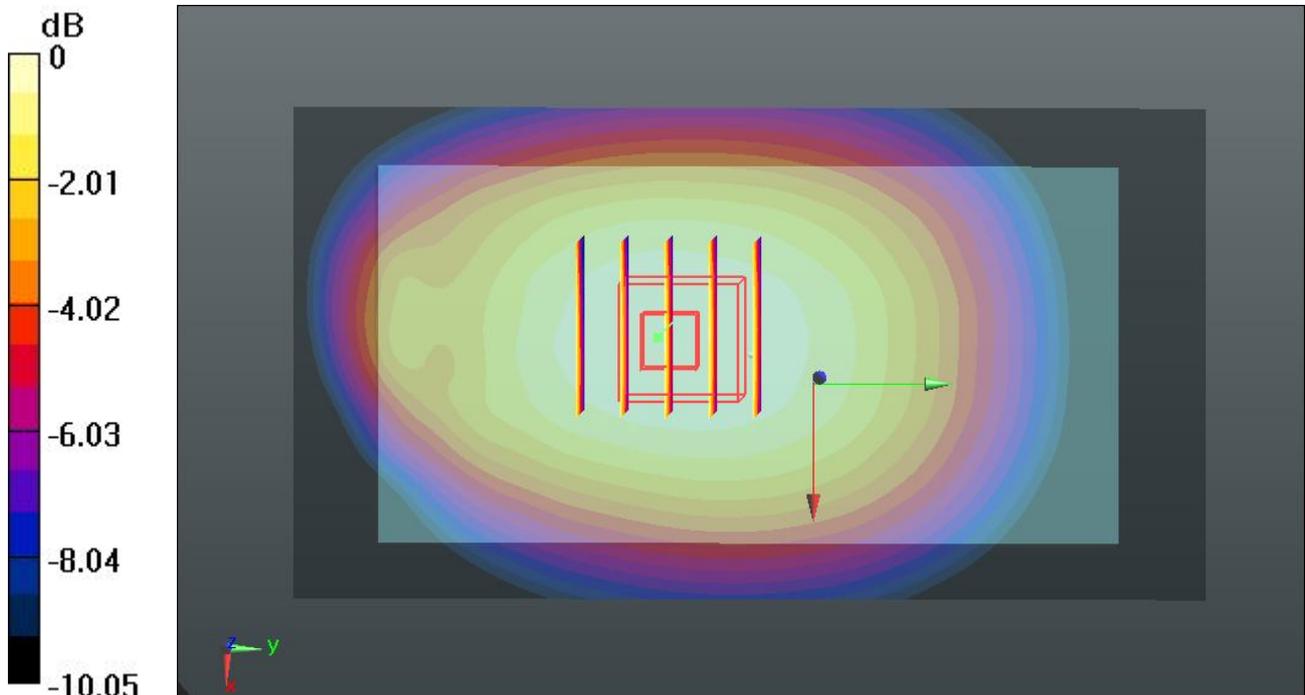

0 dB = 0.920 W/kg

27 GSM1900_GPRS(4 Tx slots)_Front_1cm_Ch512

DUT: 2D2703

Communication System: GPRS/EDGE12; Frequency: 1850.2 MHz; Duty Cycle: 1:2
Medium: MSL_1900_130117 Medium parameters used: $f = 1850.2 \text{ MHz}$; $\sigma = 1.466 \text{ mho/m}$; $\epsilon_r = 54.972$; $\rho = 1000 \text{ kg/m}^3$
Ambient Temperature : $23.5 \text{ }^\circ\text{C}$; Liquid Temperature : $21.6 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.67, 7.67, 7.67); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch512/Area Scan (61x111x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.580 W/kg


Ch512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 19.714 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.663 mW/g

SAR(1 g) = 0.407 mW/g; SAR(10 g) = 0.241 mW/g

Maximum value of SAR (measured) = 0.539 W/kg

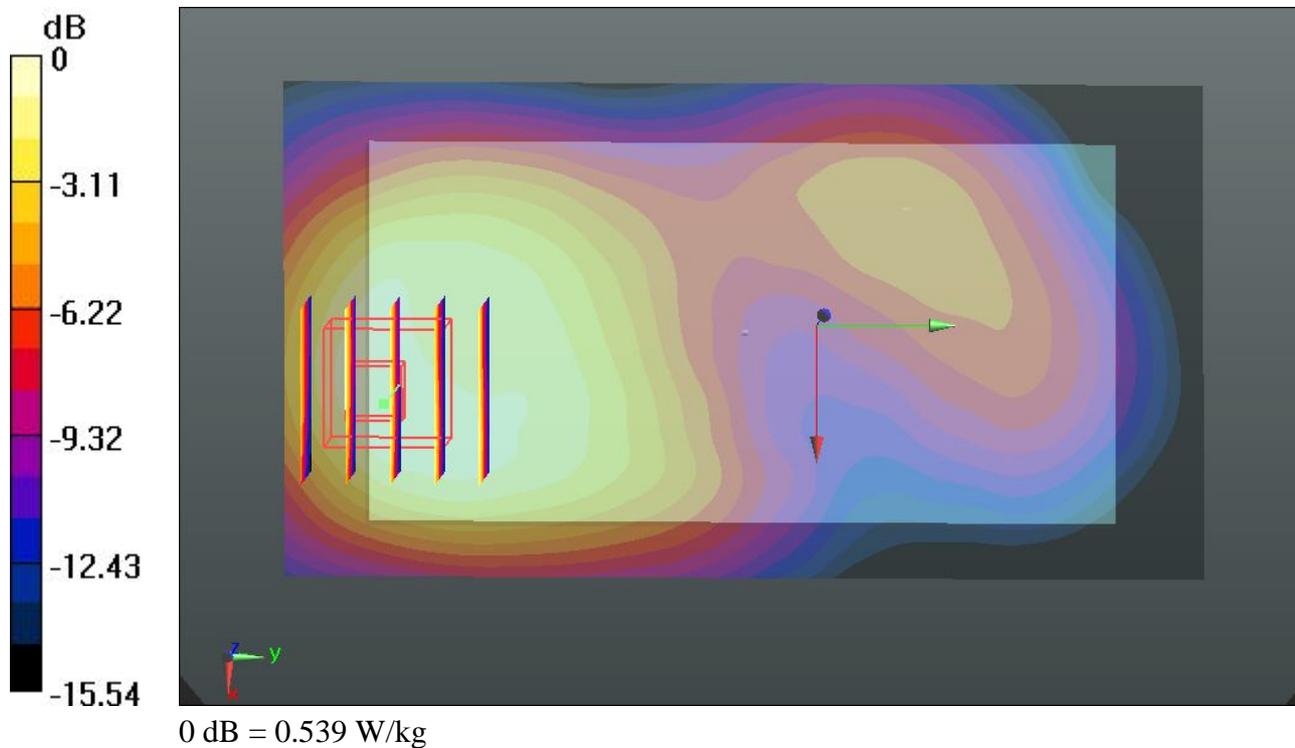

28 GSM1900_GPRS(4 Tx slots)_Back_1cm_Ch512

DUT: 2D2703

Communication System: GPRS/EDGE12; Frequency: 1850.2 MHz; Duty Cycle: 1:2
 Medium: MSL_1900_130117 Medium parameters used: $f = 1850.2 \text{ MHz}$; $\sigma = 1.466 \text{ mho/m}$; $\epsilon_r = 54.972$; $\rho = 1000 \text{ kg/m}^3$
 Ambient Temperature : $23.5 \text{ }^\circ\text{C}$; Liquid Temperature : $21.6 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.67, 7.67, 7.67); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch512/Area Scan (61x111x1): Interpolated grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.904 W/kg


Ch512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 24.764 V/m ; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 1.068 mW/g

SAR(1 g) = 0.630 mW/g ; SAR(10 g) = 0.358 mW/g

Maximum value of SAR (measured) = 0.859 W/kg

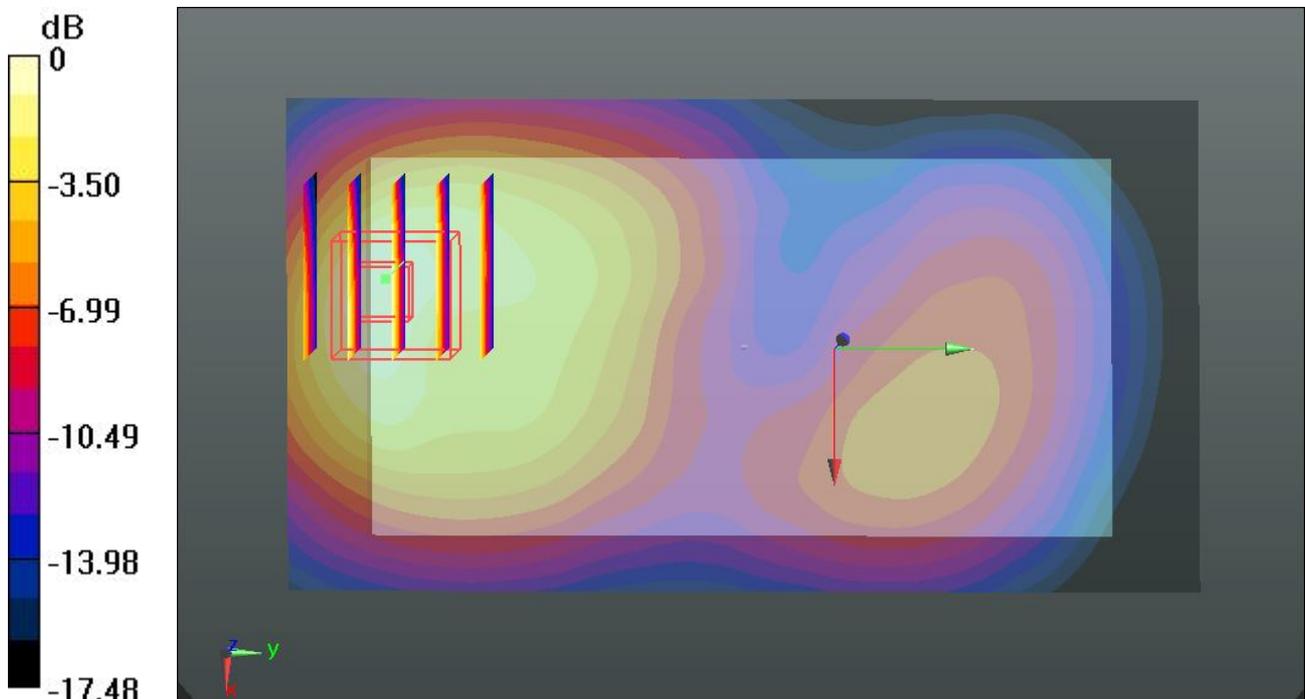

0 dB = 0.859 W/kg

28 GSM1900_GPRS(4 Tx slots)_Back_1cm_Ch512_2D

DUT: 2D2703


Communication System: GPRS/EDGE12; Frequency: 1850.2 MHz; Duty Cycle: 1:2
 Medium: MSL_1900_130117 Medium parameters used: $f = 1850.2 \text{ MHz}$; $\sigma = 1.466 \text{ mho/m}$; $\epsilon_r = 54.972$; $\rho = 1000 \text{ kg/m}^3$
 Ambient Temperature : $23.5 \text{ }^\circ\text{C}$; Liquid Temperature : $21.6 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.67, 7.67, 7.67); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch512/Area Scan (61x111x1): Interpolated grid: $dx=15\text{mm}$, $dy=15\text{mm}$
 Maximum value of SAR (interpolated) = 0.904 W/kg

Ch512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$
 Reference Value = 24.764 V/m ; Power Drift = 0.01 dB
 Peak SAR (extrapolated) = 1.068 mW/g
SAR(1 g) = 0.630 mW/g ; SAR(10 g) = 0.358 mW/g
 Maximum value of SAR (measured) = 0.859 W/kg

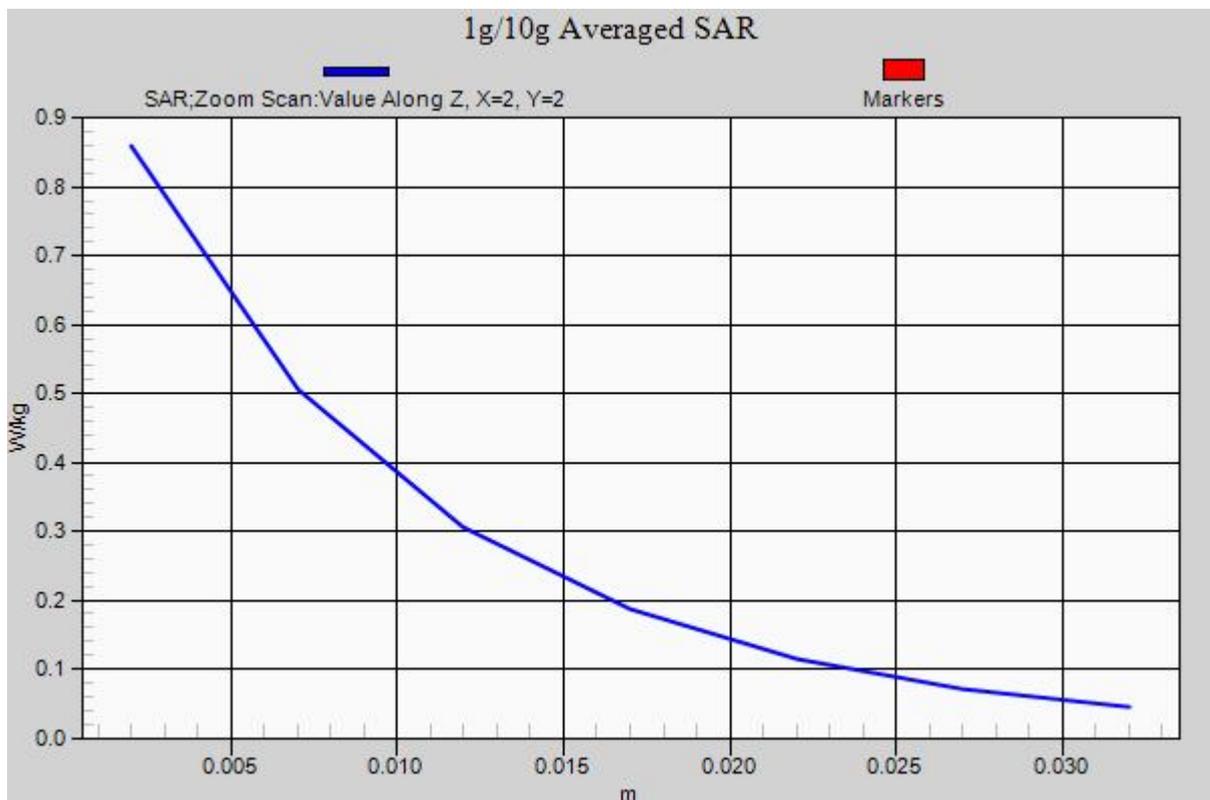

29 GSM1900_GPRS(4 Tx slots)_Left Slide_1cm_Ch512

DUT: 2D2703

Communication System: GPRS/EDGE12; Frequency: 1850.2 MHz; Duty Cycle: 1:2

Medium: MSL_1900_130117 Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.466$ mho/m; $\epsilon_r = 54.972$;

$\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 21.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.67, 7.67, 7.67); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch512/Area Scan (41x111x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.148 W/kg

Ch512/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.150 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.176 mW/g

SAR(1 g) = 0.112 mW/g; SAR(10 g) = 0.069 mW/g

Maximum value of SAR (measured) = 0.144 W/kg


Ch512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 10.150 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.180 mW/g

SAR(1 g) = 0.111 mW/g; SAR(10 g) = 0.066 mW/g

Maximum value of SAR (measured) = 0.146 W/kg

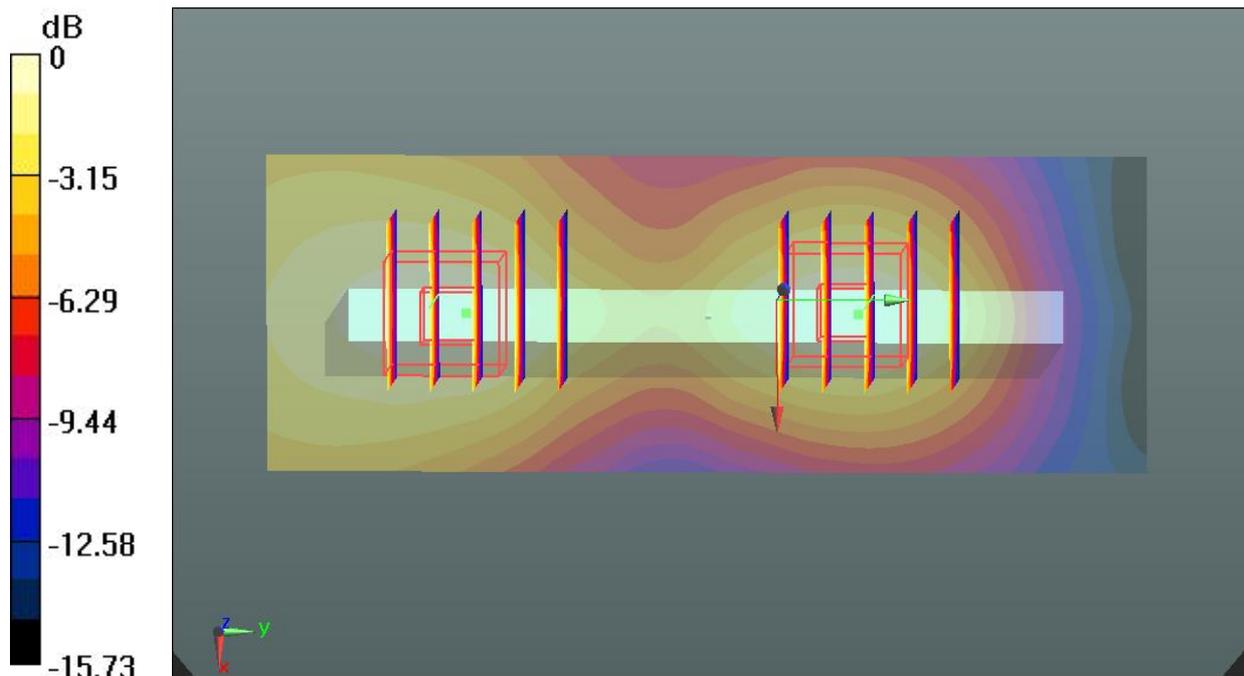

0 dB = 0.146 W/kg

30 GSM1900_GPRS(4 Tx slots)_Right Slide_1cm_Ch512

DUT: 2D2703

Communication System: GPRS/EDGE12; Frequency: 1850.2 MHz; Duty Cycle: 1:2

Medium: MSL_1900_130117 Medium parameters used: $f = 1850.2 \text{ MHz}$; $\sigma = 1.466 \text{ mho/m}$; $\epsilon_r =$

54.972 ; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.5 \text{ }^\circ\text{C}$; Liquid Temperature : $21.6 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.67, 7.67, 7.67); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch512/Area Scan (41x111x1): Interpolated grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.196 W/kg


Ch512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 11.792 V/m ; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.241 mW/g

SAR(1 g) = 0.147 mW/g ; SAR(10 g) = 0.086 mW/g

Maximum value of SAR (measured) = 0.197 W/kg

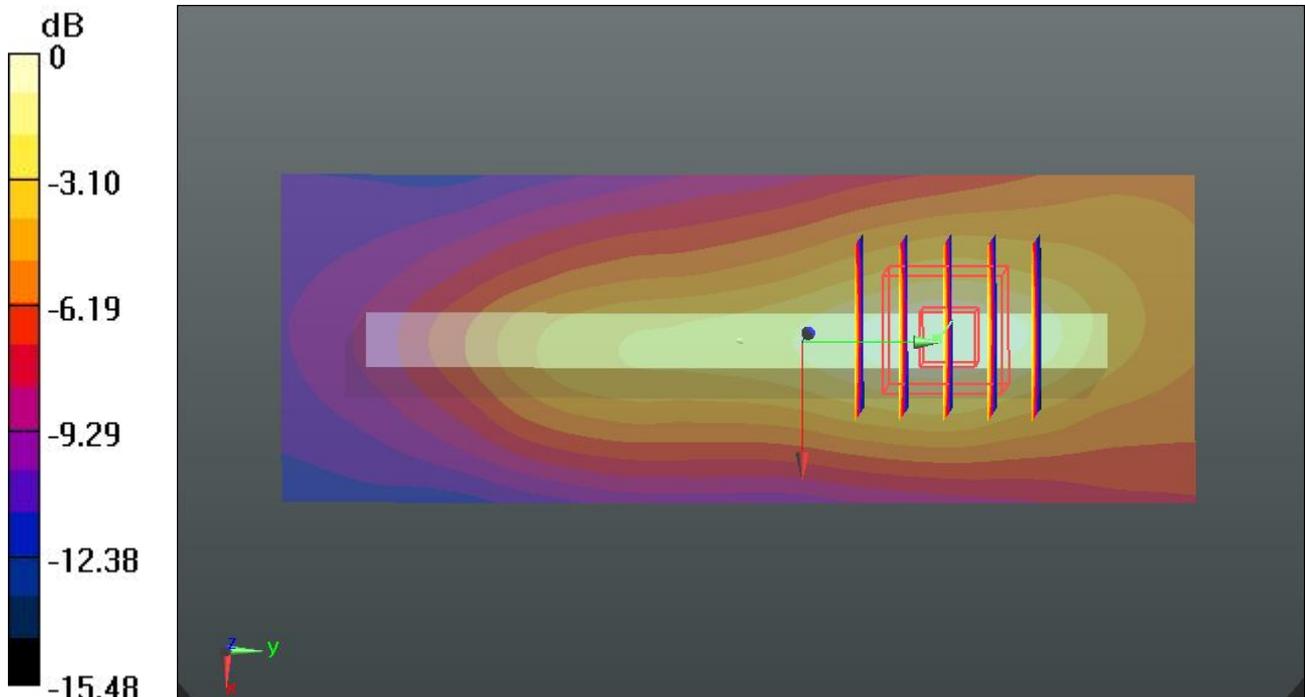

0 dB = 0.197 W/kg

31 GSM1900_GPRS(4 Tx slots)_Bottom Slide_1cm_Ch512

DUT: 2D2703

Communication System: GPRS/EDGE12; Frequency: 1850.2 MHz; Duty Cycle: 1:2

Medium: MSL_1900_130117 Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.466$ mho/m; $\epsilon_r =$

54.972 ; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 21.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.67, 7.67, 7.67); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch512/Area Scan (41x71x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.816 W/kg


Ch512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.173 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 1.004 mW/g

SAR(1 g) = 0.596 mW/g; SAR(10 g) = 0.326 mW/g

Maximum value of SAR (measured) = 0.819 W/kg

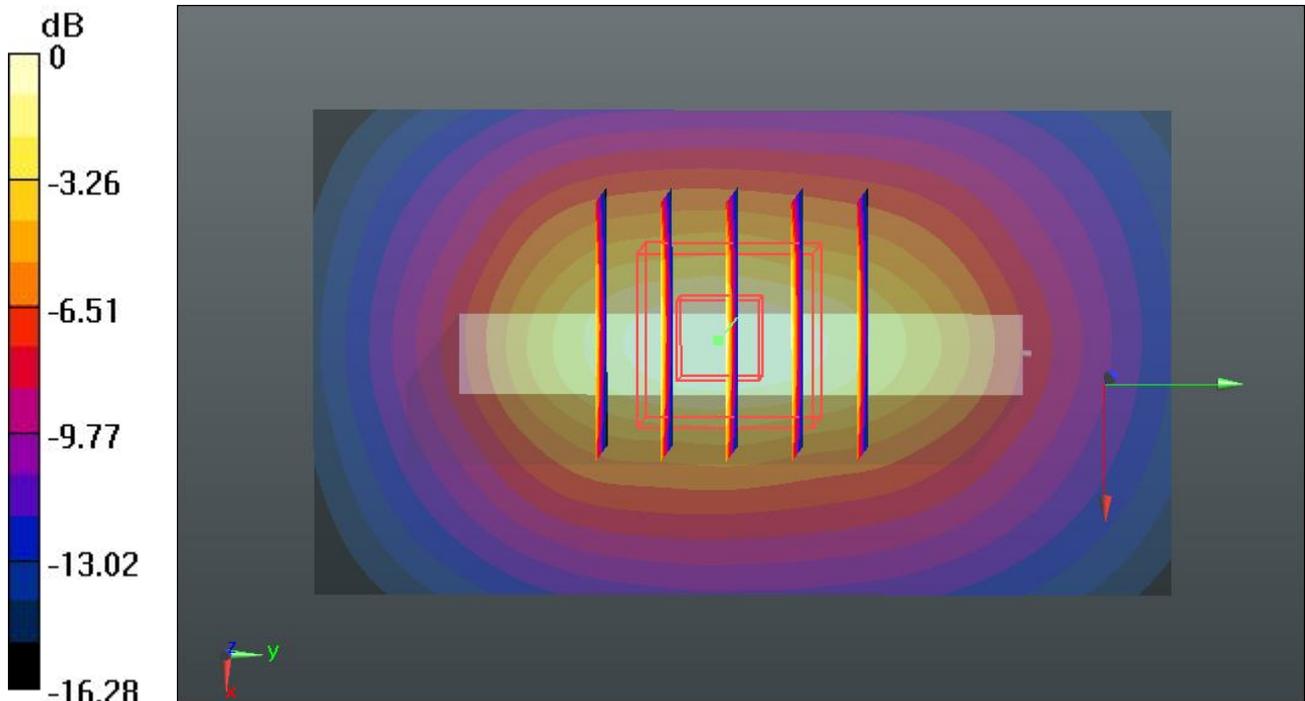

0 dB = 0.819 W/kg

32 GSM1900_GSM_Back_1cm_Ch512

DUT: 2D2703

Communication System: Generic GSM; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: MSL_1900_130117 Medium parameters used: $f = 1850.2$ MHz; $\sigma = 1.466$ mho/m; $\epsilon_r =$

54.972 ; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 21.6 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.67, 7.67, 7.67); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch512/Area Scan (61x111x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.505 W/kg


Ch512/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 18.561 V/m; Power Drift = -0.04 dB

Peak SAR (extrapolated) = 0.596 mW/g

SAR(1 g) = 0.352 mW/g; SAR(10 g) = 0.200 mW/g

Maximum value of SAR (measured) = 0.481 W/kg

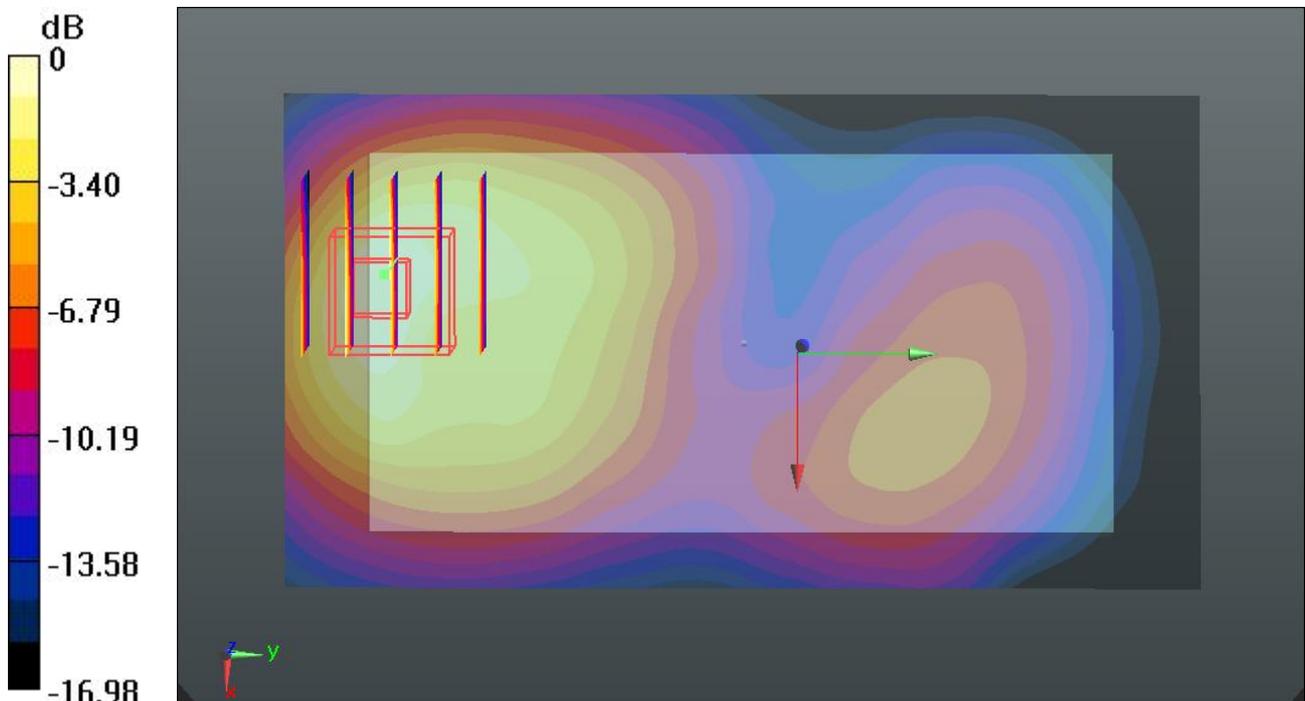

0 dB = 0.481 W/kg

18 WCDMA Band V_RMC 12.2K_Front_1cm_Ch4182

DUT: 2D2703

Communication System: UMTS; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: MSL_835_130117 Medium parameters used: $f = 836.4 \text{ MHz}$; $\sigma = 0.97 \text{ mho/m}$; $\epsilon_r = 56.057$;

$\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.5 \text{ }^\circ\text{C}$; Liquid Temperature : $21.5 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.5, 9.5, 9.5); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch4182/Area Scan (61x111x1): Interpolated grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.404 W/kg


Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 20.951 V/m ; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.445 mW/g

SAR(1 g) = 0.354 mW/g ; SAR(10 g) = 0.270 mW/g

Maximum value of SAR (measured) = 0.405 W/kg

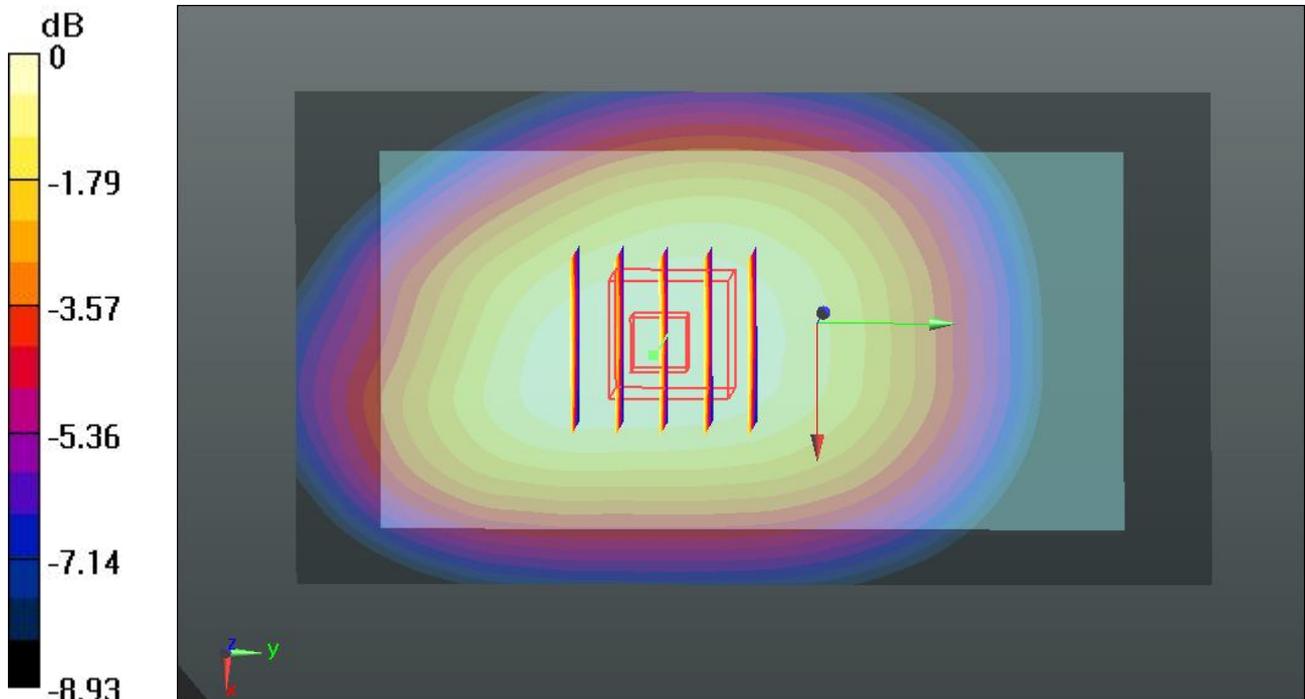

0 dB = 0.405 W/kg

19 WCDMA Band V_RMC 12.2K_Back_1cm_Ch4182

DUT: 2D2703

Communication System: UMTS; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: MSL_835_130117 Medium parameters used: $f = 836.4 \text{ MHz}$; $\sigma = 0.97 \text{ mho/m}$; $\epsilon_r = 56.057$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.5 \text{ }^\circ\text{C}$; Liquid Temperature : $21.5 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.5, 9.5, 9.5); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch4182/Area Scan (61x111x1): Interpolated grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.606 W/kg

Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 25.659 V/m ; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.669 mW/g

SAR(1 g) = 0.532 mW/g ; SAR(10 g) = 0.403 mW/g

Maximum value of SAR (measured) = 0.610 W/kg


Ch4182/Zoom Scan (5x5x7)/Cube 1: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 25.659 V/m ; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.484 mW/g

SAR(1 g) = 0.322 mW/g ; SAR(10 g) = 0.212 mW/g

Maximum value of SAR (measured) = 0.431 W/kg

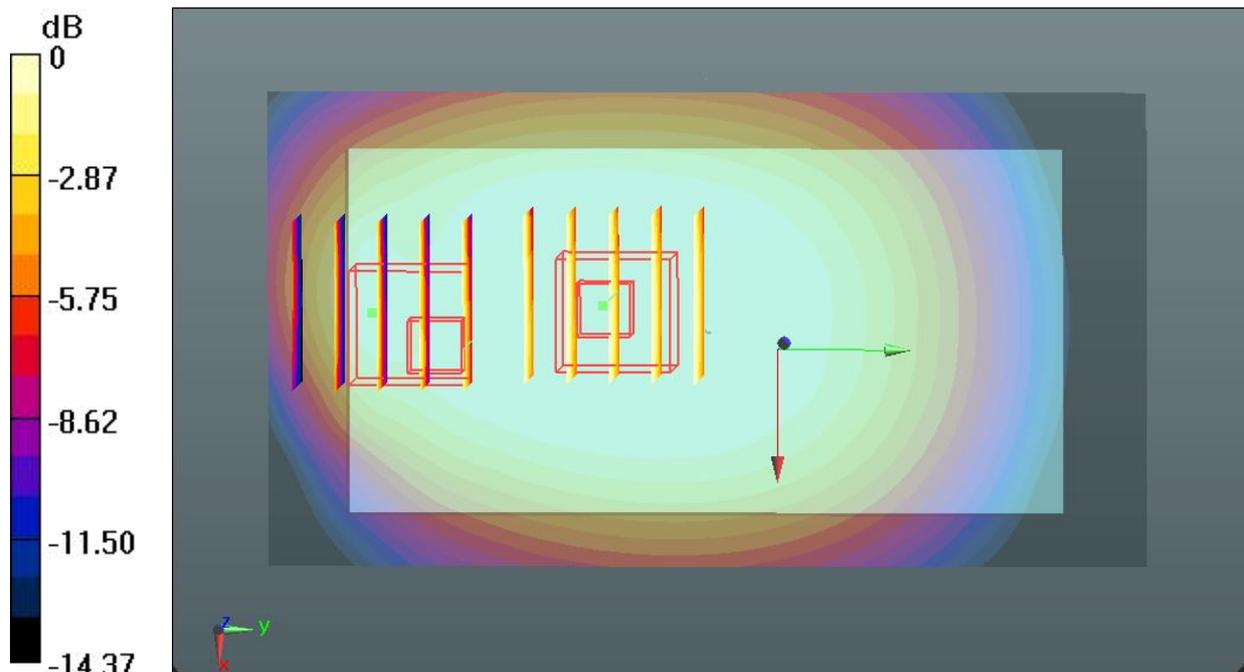

0 dB = 0.431 W/kg

19 WCDMA Band V_RMC 12.2K_Back_1cm_Ch4182_2D

DUT: 2D2703

Communication System: UMTS; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: MSL_835_130117 Medium parameters used: $f = 836.4$ MHz; $\sigma = 0.97$ mho/m; $\epsilon_r =$

56.057 ; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.5, 9.5, 9.5); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch4182/Area Scan (61x111x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.606 W/kg

Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 25.659 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.669 mW/g

SAR(1 g) = 0.532 mW/g; SAR(10 g) = 0.403 mW/g

Maximum value of SAR (measured) = 0.610 W/kg

Ch4182/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm


Reference Value = 25.659 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 0.484 mW/g

SAR(1 g) = 0.322 mW/g; SAR(10 g) = 0.212 mW/g

Maximum value of SAR (measured) = 0.431 W/kg

1g/10g Averaged SAR

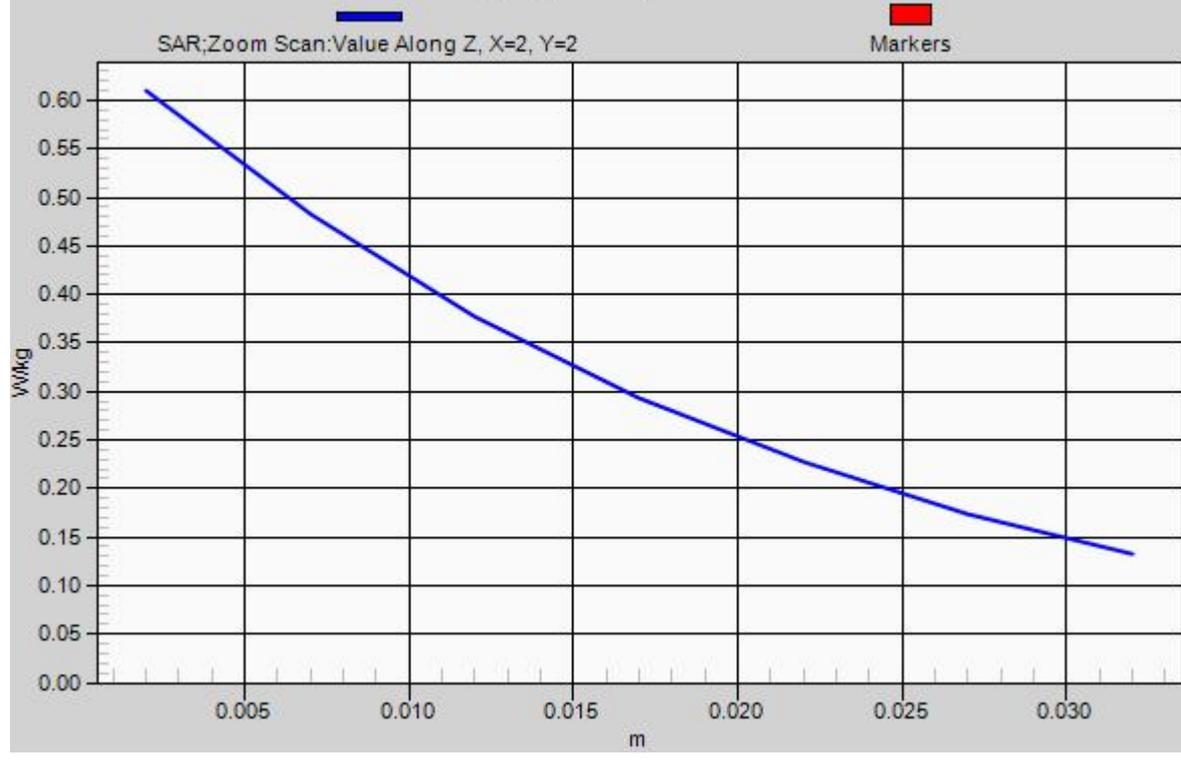

20 WCDMA Band V_RMC 12.2K_Left Slide_1cm_Ch4182

DUT: 2D2703

Communication System: UMTS; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: MSL_835_130117 Medium parameters used: $f = 836.4 \text{ MHz}$; $\sigma = 0.97 \text{ mho/m}$; $\epsilon_r = 56.057$;

$\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.5 \text{ }^\circ\text{C}$; Liquid Temperature : $21.5 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.5, 9.5, 9.5); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch4182/Area Scan (41x111x1): Interpolated grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.396 W/kg


Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 20.733 V/m ; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 0.453 mW/g

SAR(1 g) = 0.326 mW/g ; SAR(10 g) = 0.228 mW/g

Maximum value of SAR (measured) = 0.396 W/kg

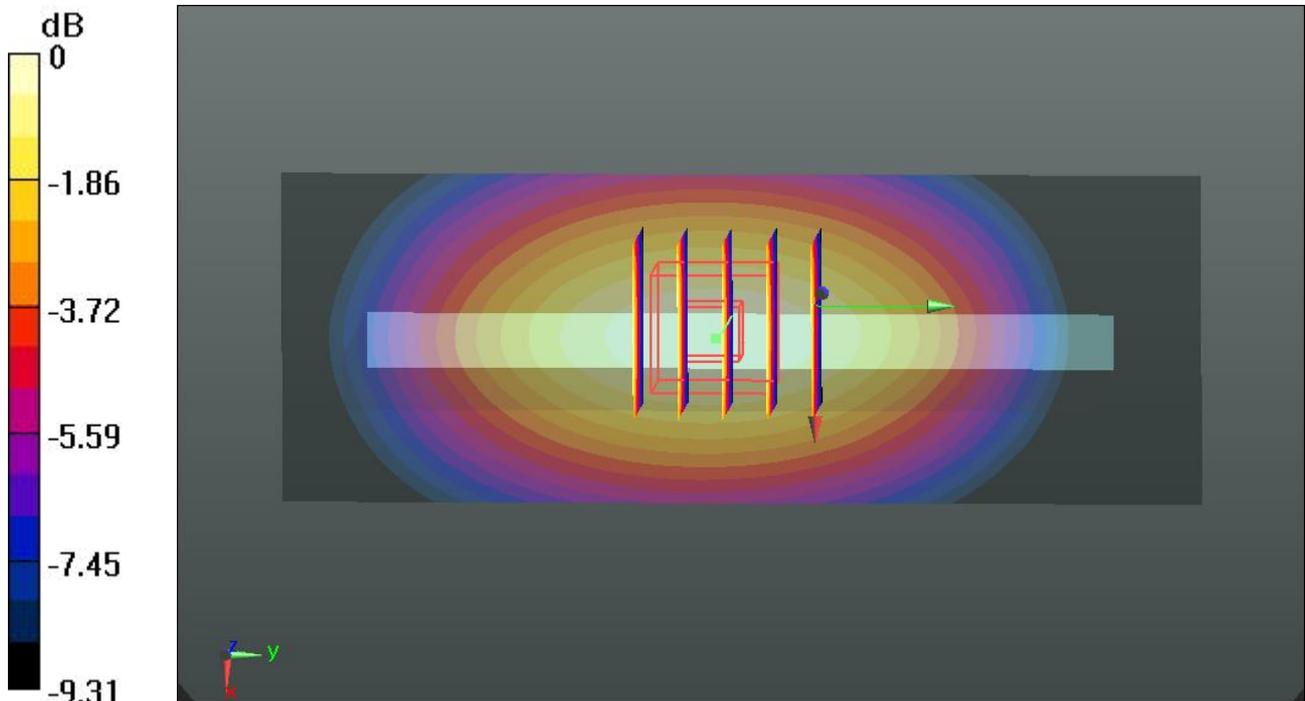

0 dB = 0.396 W/kg

21 WCDMA Band V_RMC 12.2K_Right Slide_1cm_Ch4182

DUT: 2D2703

Communication System: UMTS; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: MSL_835_130117 Medium parameters used: $f = 836.4 \text{ MHz}$; $\sigma = 0.97 \text{ mho/m}$; $\epsilon_r = 56.057$;

$\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.5 \text{ }^\circ\text{C}$; Liquid Temperature : $21.5 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.5, 9.5, 9.5); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch4182/Area Scan (41x111x1): Interpolated grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.334 W/kg


Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 19.033 V/m ; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.383 mW/g

SAR(1 g) = 0.275 mW/g ; SAR(10 g) = 0.192 mW/g

Maximum value of SAR (measured) = 0.334 W/kg

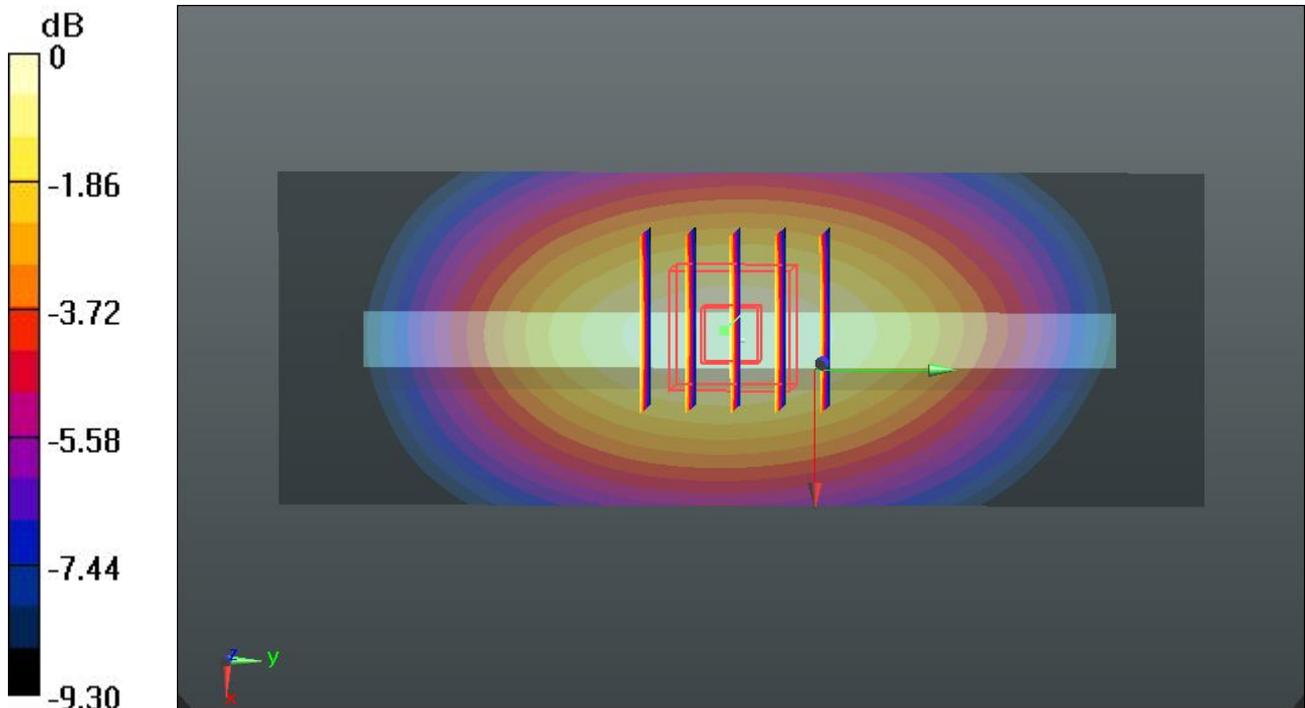

0 dB = 0.334 W/kg

22 WCDMA Band V_RMC 12.2K_Bottom Slide_1cm_Ch4182

DUT: 2D2703

Communication System: UMTS; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: MSL_835_130117 Medium parameters used: $f = 836.4 \text{ MHz}$; $\sigma = 0.97 \text{ mho/m}$; $\epsilon_r = 56.057$;

$\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.5 \text{ }^\circ\text{C}$; Liquid Temperature : $21.5 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(9.5, 9.5, 9.5); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch4182/Area Scan (41x71x1): Interpolated grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.0765 W/kg


Ch4182/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 9.471 V/m ; Power Drift = -0.03 dB

Peak SAR (extrapolated) = 0.112 mW/g

SAR(1 g) = 0.060 mW/g ; SAR(10 g) = 0.033 mW/g

Maximum value of SAR (measured) = 0.0815 W/kg

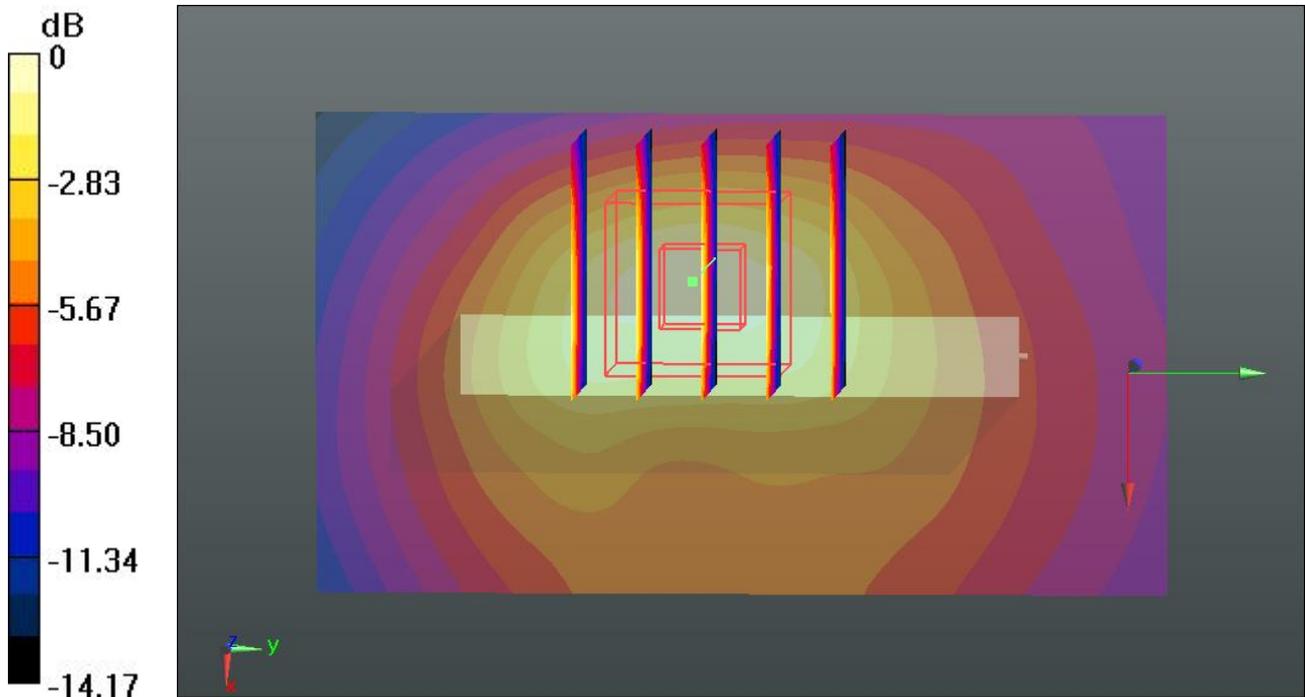

0 dB = 0.0815 W/kg

45 WLAN2.4GHz_802.11b_Front_1cm_Ch11

DUT: 2D2703

Communication System: WIFI; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: MSL_2450_130117 Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 1.964 \text{ mho/m}$; $\epsilon_r = 53.919$; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.5 \text{ }^\circ\text{C}$; Liquid Temperature : $21.2 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.21, 7.21, 7.21); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch11/Area Scan (81x131x1): Interpolated grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (interpolated) = 0.0244 W/kg


Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 3.916 V/m ; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 0.061 mW/g

SAR(1 g) = 0.015 mW/g ; SAR(10 g) = 0.00539 mW/g

Maximum value of SAR (measured) = 0.0240 W/kg

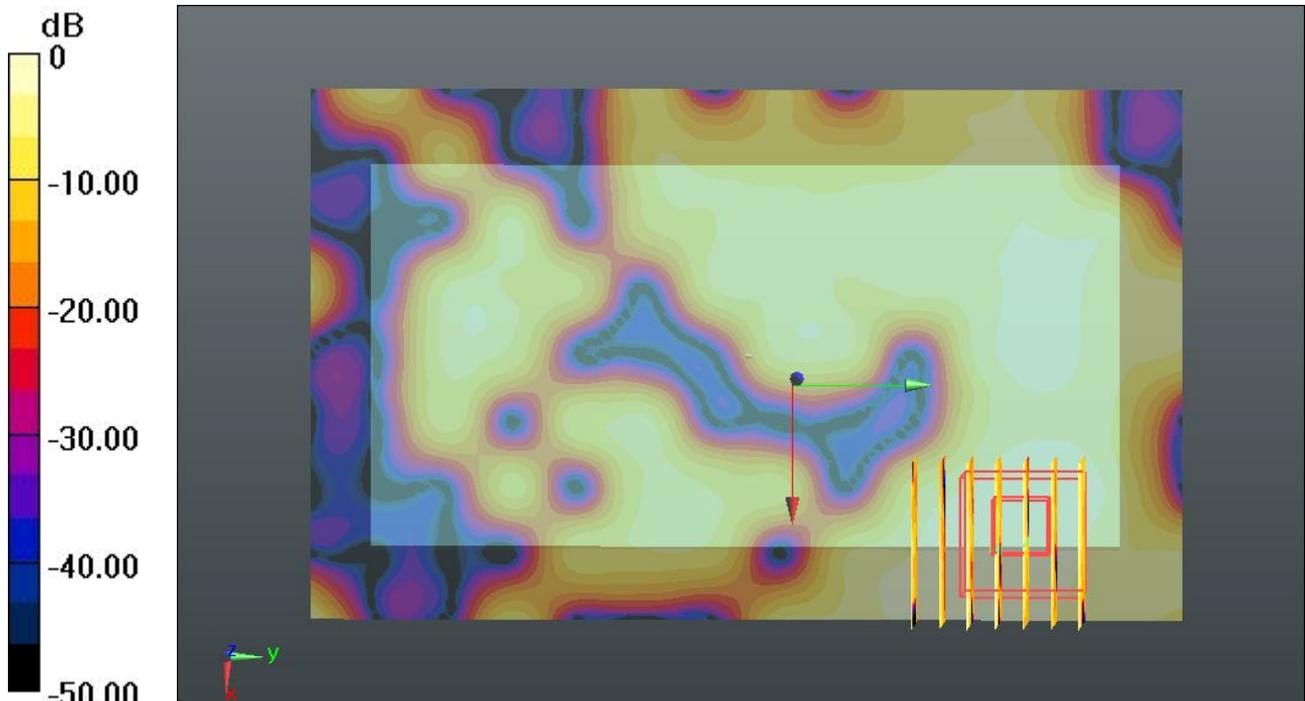

0 dB = 0.0240 W/kg

46 WLAN2.4GHz_802.11b_Back_1cm_Ch11

DUT: 2D2703

Communication System: WIFI; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: MSL_2450_130117 Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 1.964 \text{ mho/m}$; $\epsilon_r =$

53.919 ; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.5 \text{ }^\circ\text{C}$; Liquid Temperature : $21.2 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.21, 7.21, 7.21); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch11/Area Scan (71x131x1): Interpolated grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (interpolated) = 0.135 W/kg


Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 6.274 V/m ; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.142 mW/g

SAR(1 g) = 0.066 mW/g ; SAR(10 g) = 0.030 mW/g

Maximum value of SAR (measured) = 0.0992 W/kg

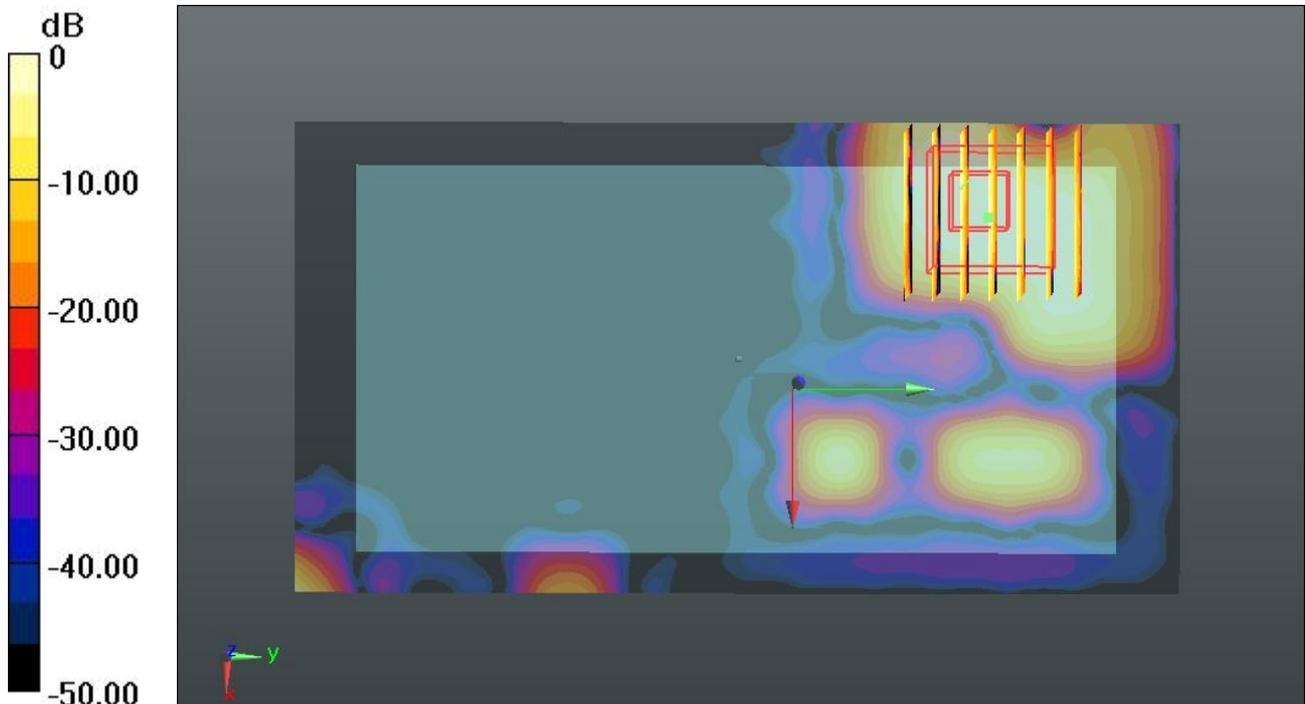

0 dB = 0.0992 W/kg

46 WLAN2.4GHz_802.11b_Back_1cm_Ch11_2D

DUT: 2D2703

Communication System: WIFI; Frequency: 2462 MHz;Duty Cycle: 1:1

Medium: MSL_2450_130117 Medium parameters used: $f = 2462 \text{ MHz}$; $\sigma = 1.964 \text{ mho/m}$; $\epsilon_r =$

53.919 ; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : $23.5 \text{ }^\circ\text{C}$; Liquid Temperature : $21.2 \text{ }^\circ\text{C}$

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.21, 7.21, 7.21); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch11/Area Scan (71x131x1): Interpolated grid: $dx=12\text{mm}$, $dy=12\text{mm}$

Maximum value of SAR (interpolated) = 0.135 W/kg


Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5\text{mm}$, $dy=5\text{mm}$, $dz=5\text{mm}$

Reference Value = 6.274 V/m ; Power Drift = 0.06 dB

Peak SAR (extrapolated) = 0.142 mW/g

SAR(1 g) = 0.066 mW/g ; SAR(10 g) = 0.030 mW/g

Maximum value of SAR (measured) = 0.0992 W/kg

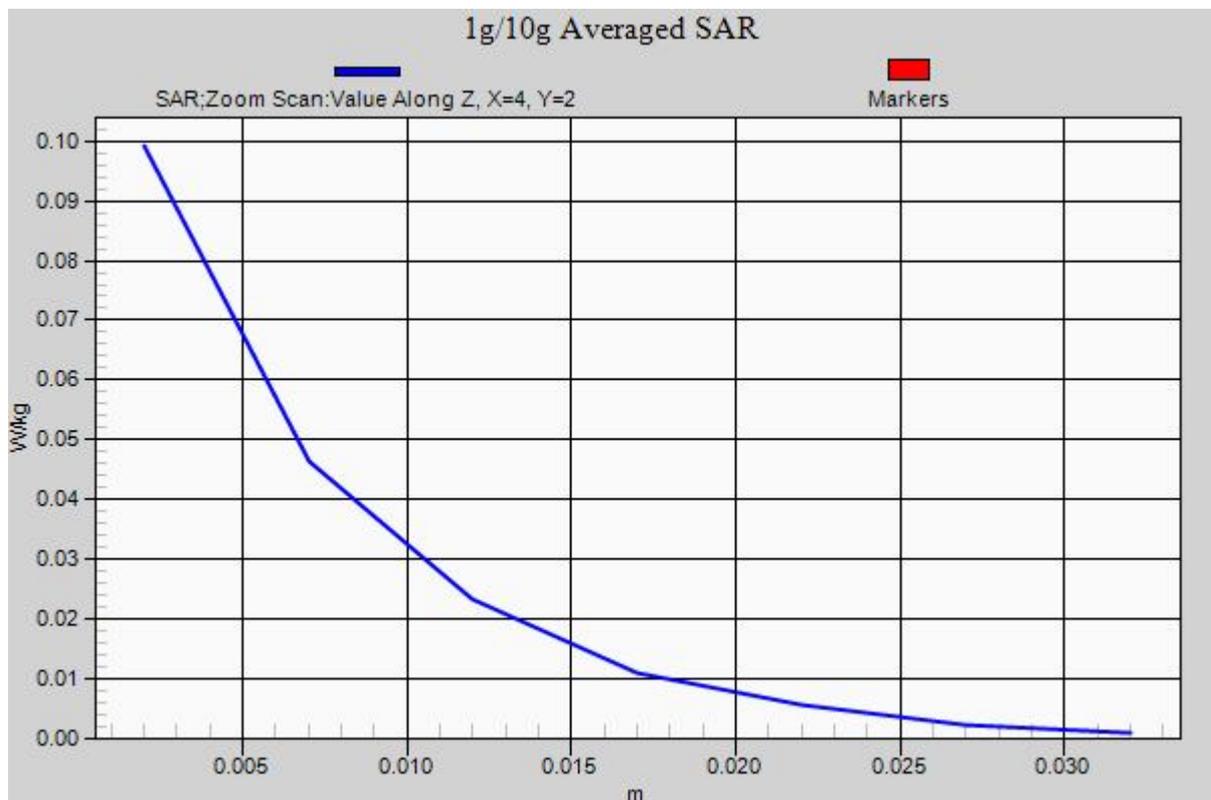

47 WLAN2.4GHz_802.11b_Right Side_1cm_Ch11

DUT: 2D2703

Communication System: WIFI; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: MSL_2450_130117 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.964$ mho/m; $\epsilon_r =$

53.919 ; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 21.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.21, 7.21, 7.21); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch11/Area Scan (51x131x1): Interpolated grid: $dx=12$ mm, $dy=12$ mm

Maximum value of SAR (interpolated) = 0.0707 W/kg


Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 5.999 V/m; Power Drift = 0.16 dB

Peak SAR (extrapolated) = 0.097 mW/g

SAR(1 g) = 0.051 mW/g; SAR(10 g) = 0.021 mW/g

Maximum value of SAR (measured) = 0.0725 W/kg

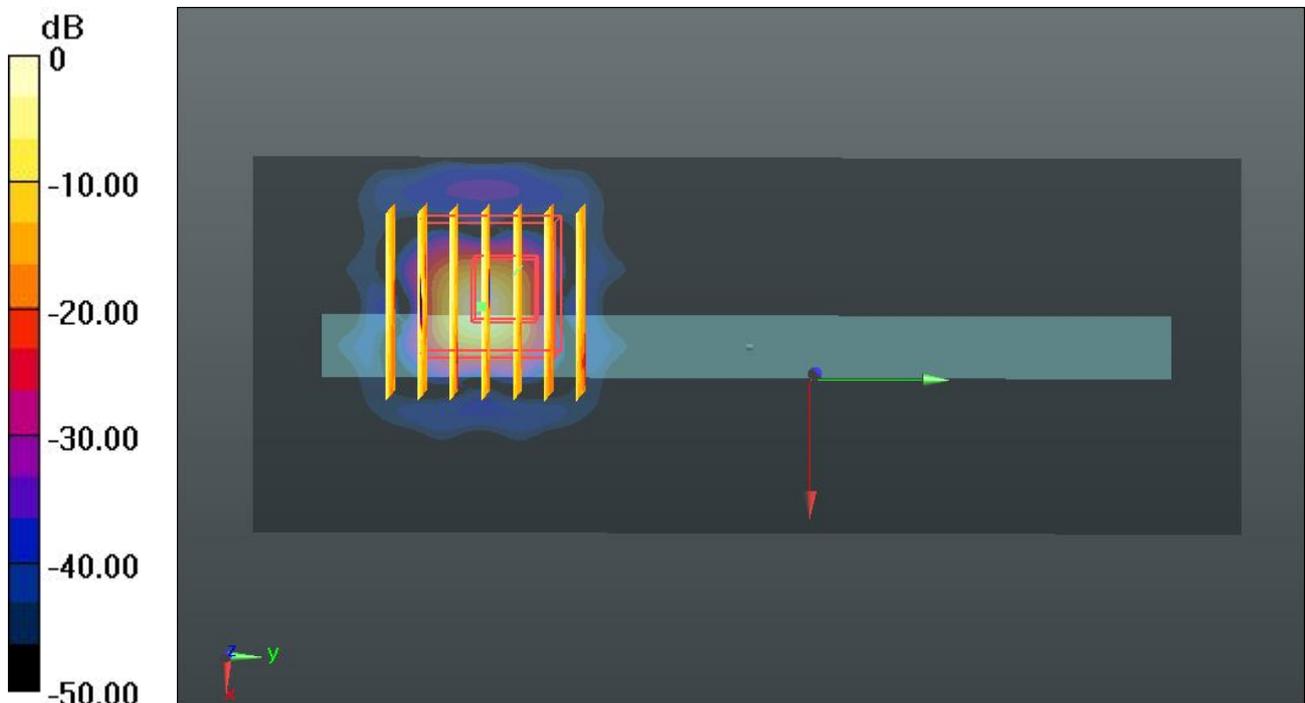

0 dB = 0.0725 W/kg

48 WLAN2.4GHz_802.11b_Top Side_1cm_Ch11

DUT: 2D2703

Communication System: WIFI; Frequency: 2462 MHz; Duty Cycle: 1:1

Medium: MSL_2450_130117 Medium parameters used: $f = 2462$ MHz; $\sigma = 1.964$ mho/m; $\epsilon_r = 53.919$; $\rho = 1000$ kg/m³

Ambient Temperature : 23.5 °C ; Liquid Temperature : 21.2 °C

DASY5 Configuration:

- Probe: EX3DV4 - SN3819; ConvF(7.21, 7.21, 7.21); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch11/Area Scan (51x81x1): Interpolated grid: dx=12mm, dy=12mm

Maximum value of SAR (interpolated) = 0.00820 W/kg

Ch11/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.200 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.331 mW/g

SAR(1 g) = 0.00464 mW/g; SAR(10 g) = 0.000464 mW/g

Maximum value of SAR (measured) = 0.196 W/kg

Ch11/Zoom Scan (7x7x7)/Cube 1: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.200 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.020 mW/g

SAR(1 g) = 0.00452 mW/g; SAR(10 g) = 0.00231 mW/g

Maximum value of SAR (measured) = 0.00759 W/kg

