

P01_GSM850_GSM_Right Cheek_251**DUT: EUT**

Communication System: GSM850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: H835 Medium parameters used: $f = 849$ MHz; $\sigma = 0.905$ mho/m; $\epsilon_r = 42.3$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3142; ConvF(6.29, 6.29, 6.29); Calibrated: 2020/3/12
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2019/6/23
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- ; Postprocessing SW: SEMCAD, V1.8 Build 186

Test/Area Scan (71x71x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 0.308 mW/g


Test/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 4.29 V/m; Power Drift = 0.08 dB

Peak SAR (extrapolated) = 0.611 W/kg

SAR(1 g) = 0.341 mW/g; SAR(10 g) = 0.162 mW/g

Maximum value of SAR (measured) = 0.545 mW/g

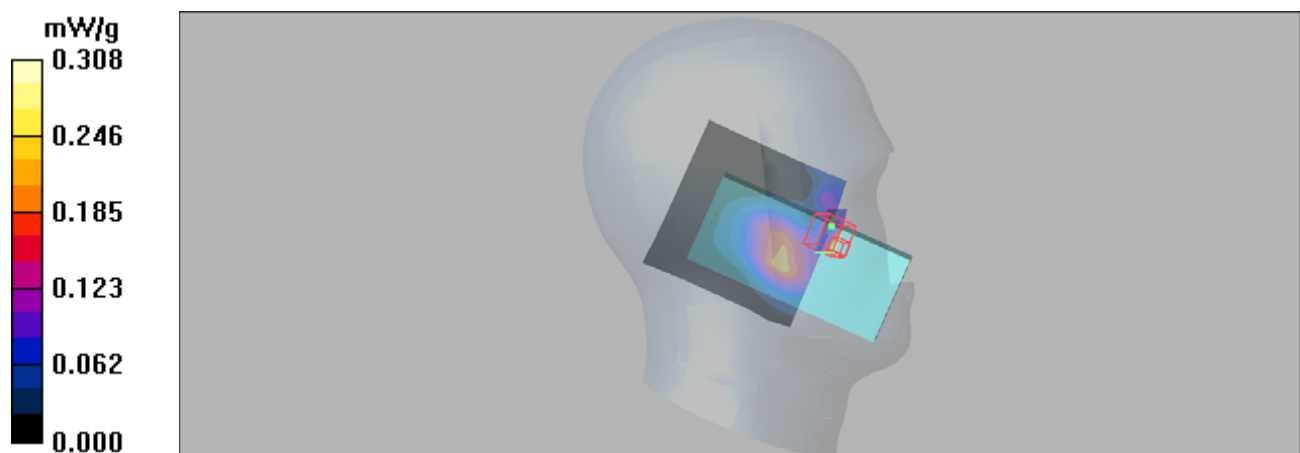

P02_GSM1900_GSM_Left Cheek_512**DUT: EUT**

Communication System: GSM1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium: H1900 Medium parameters used (interpolated): $f = 1850.2$ MHz; $\sigma = 1.35$ mho/m; $\epsilon_r = 41.1$;

$\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3142; ConvF(5.08, 5.08, 5.08); Calibrated: 2020/3/12
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2019/6/23
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- ; Postprocessing SW: SEMCAD, V1.8 Build 186

Test/Area Scan (71x71x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.323 mW/g


Test/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.53 V/m; Power Drift = 0.099 dB

Peak SAR (extrapolated) = 0.412 W/kg

SAR(1 g) = 0.269 mW/g; SAR(10 g) = 0.168 mW/g

Maximum value of SAR (measured) = 0.316 mW/g

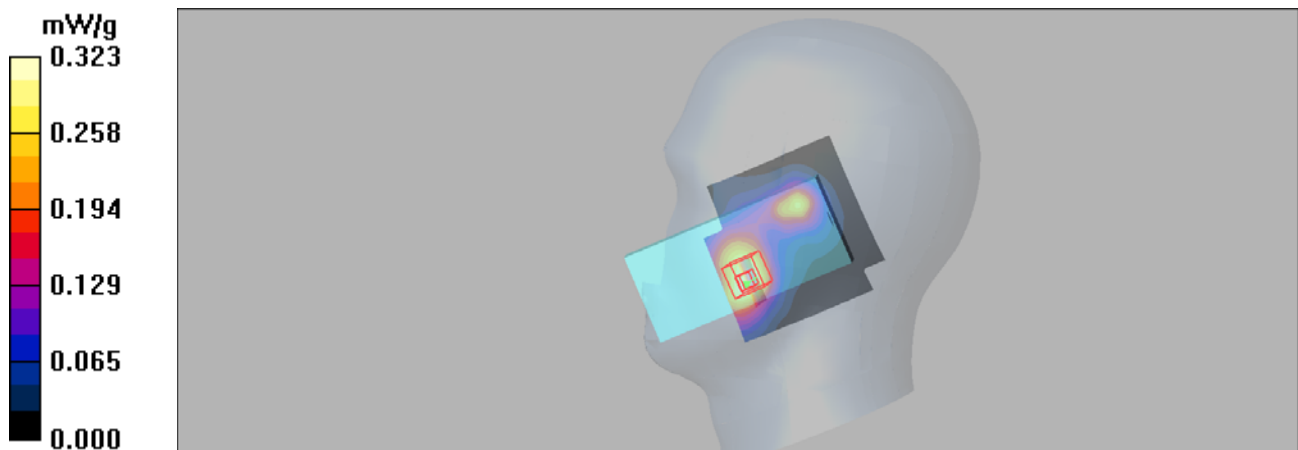

P03_WCDMA II_RMC12.2K_Left Cheek_9262**DUT: EUT**

Communication System: WCDMA Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: H1900 Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.35$ mho/m; $\epsilon_r = 41.1$;

$\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3142; ConvF(5.08, 5.08, 5.08); Calibrated: 2020/3/12
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2019/6/23
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- ; Postprocessing SW: SEMCAD, V1.8 Build 186

Test/Area Scan (71x71x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.482 mW/g



Test/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.34 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 0.602 W/kg

SAR(1 g) = 0.398 mW/g; SAR(10 g) = 0.249 mW/g

Maximum value of SAR (measured) = 0.469 mW/g

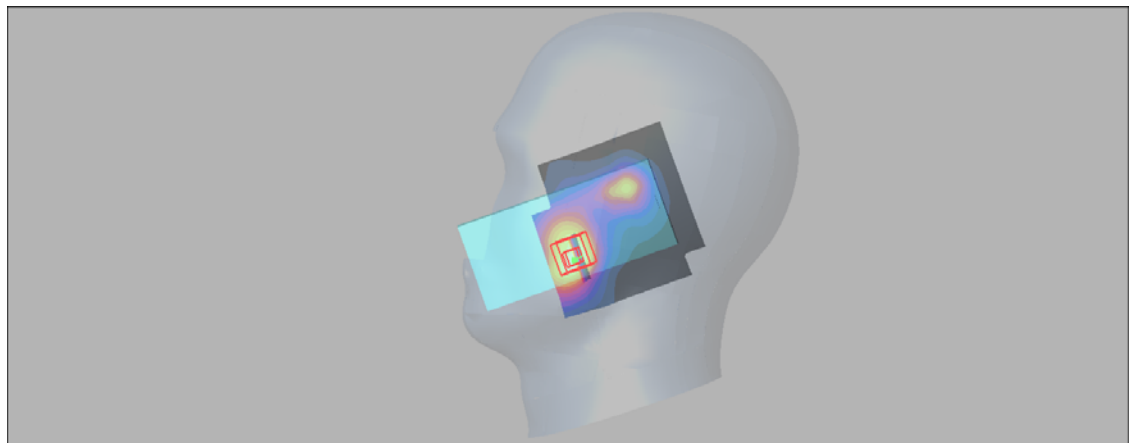

P04_WCDMA V_RMC12.2K_Right Cheek_4233**DUT: EUT**

Communication System: WCDMA Band V; Frequency: 836.4 MHz; Duty Cycle: 1:1

Medium: H835 Medium parameters used (interpolated): $f = 836.4$ MHz; $\sigma = 0.894$ mho/m; $\epsilon_r = 42.5$;

$\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3142; ConvF(6.29, 6.29, 6.29); Calibrated: 2020/3/12
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2019/6/23
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- ; Postprocessing SW: SEMCAD, V1.8 Build 186

Test/Area Scan (71x71x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.15 mW/g


Test/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 12.9 V/m; Power Drift = 0.054 dB

Peak SAR (extrapolated) = 1.77 W/kg

SAR(1 g) = 1.08 mW/g; SAR(10 g) = 0.680 mW/g

Maximum value of SAR (measured) = 1.33 mW/g

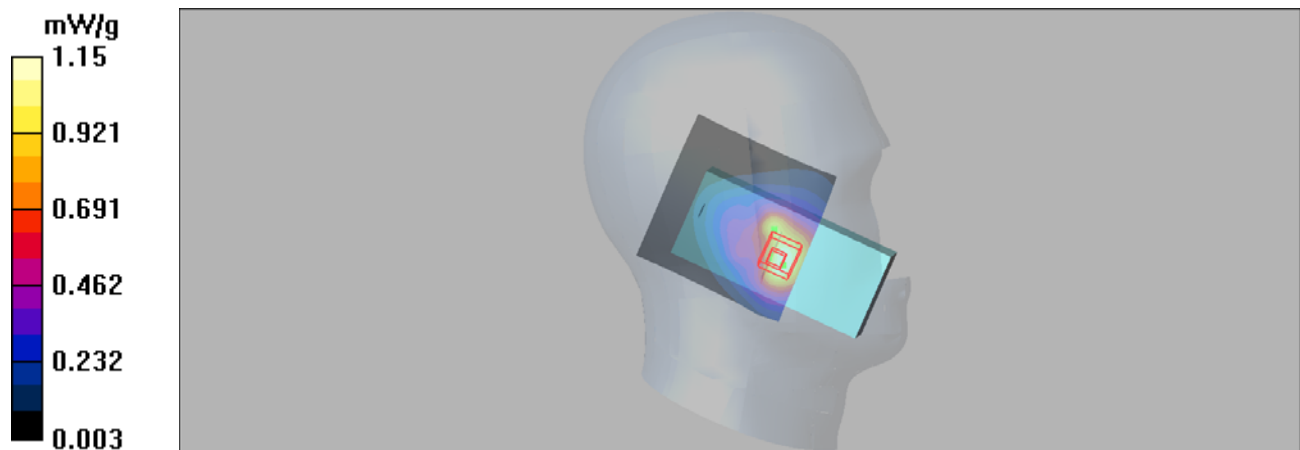

P05_802.11b_Right Cheek_1**DUT: EUT**

Communication System: Wlan 802.11b; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: H2450 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.72$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3142; ConvF(4.57, 4.57, 4.57); Calibrated: 2020/3/12
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2019/6/23
- Phantom: SAM 2; Type: QD 000 P40 CB; Serial: TP-1376
- ; Postprocessing SW: SEMCAD, V1.8 Build 186

Test/Area Scan (71x71x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.149 mW/g


Test/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.26 V/m; Power Drift = 0.09 dB

Peak SAR (extrapolated) = 0.254 W/kg

SAR(1 g) = 0.109 mW/g; SAR(10 g) = 0.048 mW/g

Maximum value of SAR (measured) = 0.150 mW/g

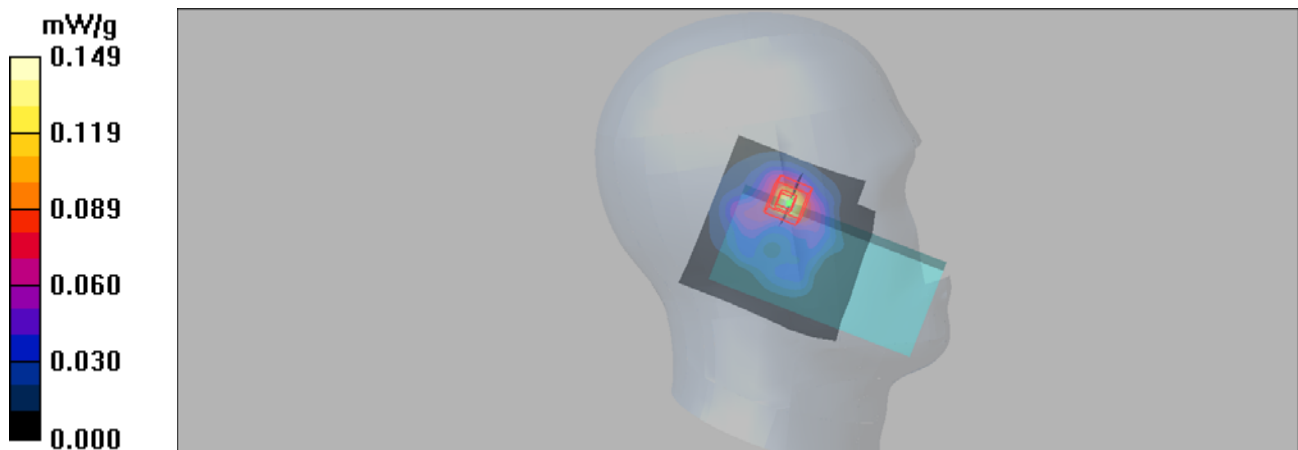

P06_GSM850_GPRS11_Rear Face_10mm_251**DUT: EUT**

Communication System: GPRS 850-3solt; Frequency: 848.8 MHz; Duty Cycle: 1:2.67

Medium: H850 Medium parameters used: $f = 849 \text{ MHz}$; $\sigma = 0.905 \text{ mho/m}$; $\epsilon_r = 42.3$; $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:

- Probe: ES3DV3 - SN3142; ConvF(6.29, 6.29, 6.29); Calibrated: 2020/3/12
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2019/6/23
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- ; Postprocessing SW: SEMCAD, V1.8 Build 186

Test/Area Scan (71x71x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.310 mW/g



Test/Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 18.0 V/m ; Power Drift = 0.180 dB

Peak SAR (extrapolated) = 0.761 W/kg

SAR(1 g) = 0.239 mW/g ; SAR(10 g) = 0.114 mW/g

Maximum value of SAR (measured) = 0.327 mW/g

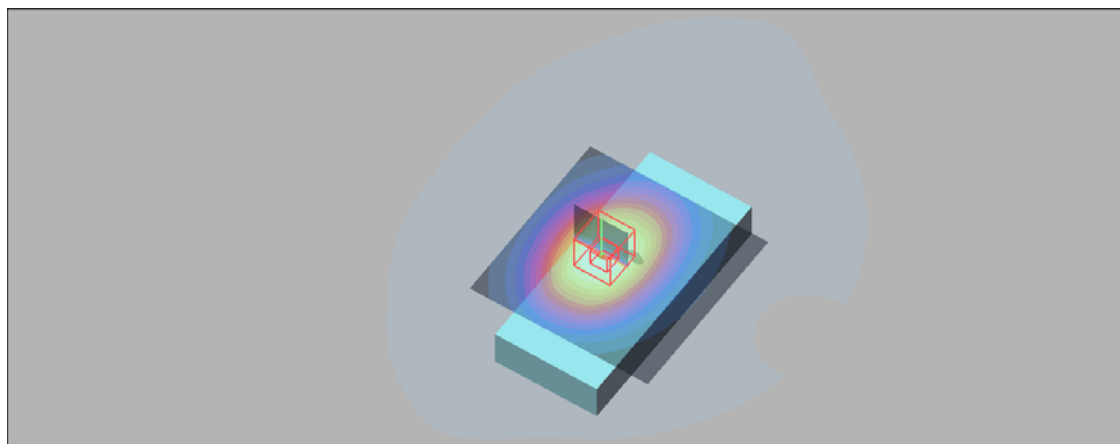

P07_GSM1900_GPRS11_Rear Face_10mm_810**DUT: EUT**

Communication System: GPRS1900-3slots; Frequency: 1909.8 MHz; Duty Cycle: 1:2.67
Medium: H1900 Medium parameters used: $f = 1910$ MHz; $\sigma = 1.42$ mho/m; $\epsilon_r = 40.8$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3142; ConvF(5.08, 5.08, 5.08); Calibrated: 2020/3/12
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2019/6/23
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- ; Postprocessing SW: SEMCAD, V1.8 Build 186

Test/Area Scan (71x71x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.781 mW/g



Test/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.4 V/m; Power Drift = -0.086 dB

Peak SAR (extrapolated) = 1.14 W/kg

SAR(1 g) = 0.641 mW/g; SAR(10 g) = 0.345 mW/g

Maximum value of SAR (measured) = 0.803 mW/g

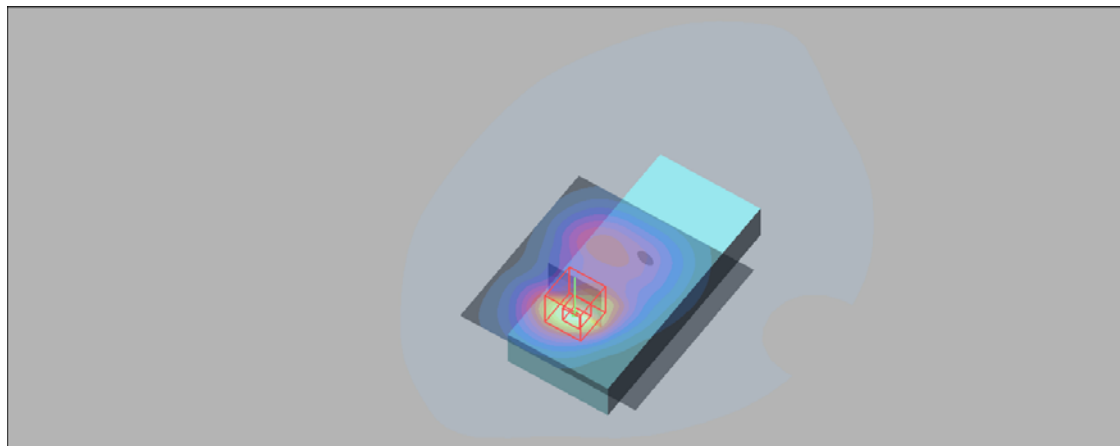

P08_WCDMA II_RMC12.2K_Rear Face_10mm_9262**DUT: EUT**

Communication System: WCDMA Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: H1900 Medium parameters used (interpolated): $f = 1852.4$ MHz; $\sigma = 1.35$ mho/m; $\epsilon_r = 41$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3142; ConvF(5.08, 5.08, 5.08); Calibrated: 2020/3/12
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2019/6/23
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- ; Postprocessing SW: SEMCAD, V1.8 Build 186

Test/Area Scan (71x71x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.778 mW/g



Test/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.5 V/m; Power Drift = 0.024 dB

Peak SAR (extrapolated) = 1.12 W/kg

SAR(1 g) = 0.634 mW/g; SAR(10 g) = 0.348 mW/g

Maximum value of SAR (measured) = 0.787 mW/g

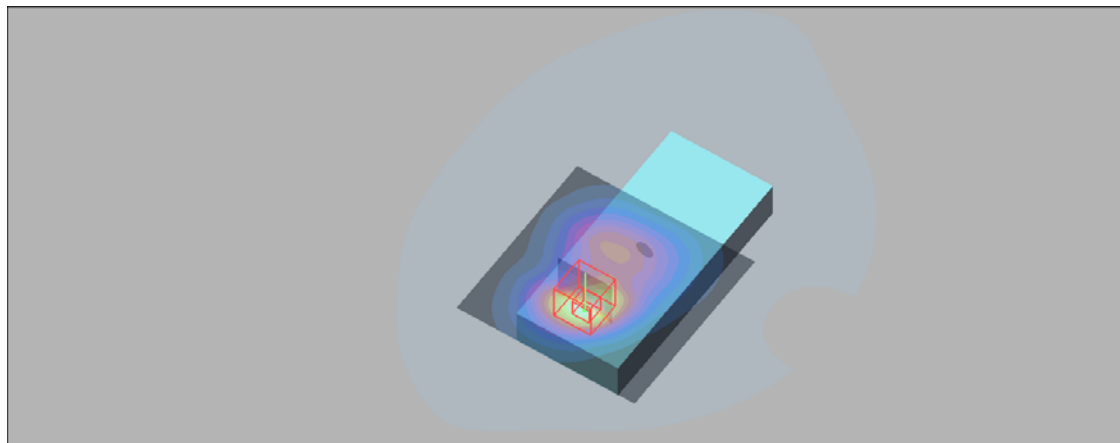

P09_WCDMA V_RMC12.2K_Rear Face_10mm_4233**DUT: EUT**

Communication System: WCDMA Band V; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: H835 Medium parameters used: $f = 847$ MHz; $\sigma = 0.904$ mho/m; $\epsilon_r = 42.3$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3142; ConvF(6.29, 6.29, 6.29); Calibrated: 2020/3/12
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2019/6/23
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- ; Postprocessing SW: SEMCAD, V1.8 Build 186

Test/Area Scan (71x71x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.31 mW/g


Test/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 37.5 V/m; Power Drift = 0.125 dB

Peak SAR (extrapolated) = 1.65 W/kg

SAR(1 g) = 1.17 mW/g; SAR(10 g) = 0.812 mW/g

Maximum value of SAR (measured) = 1.32 mW/g

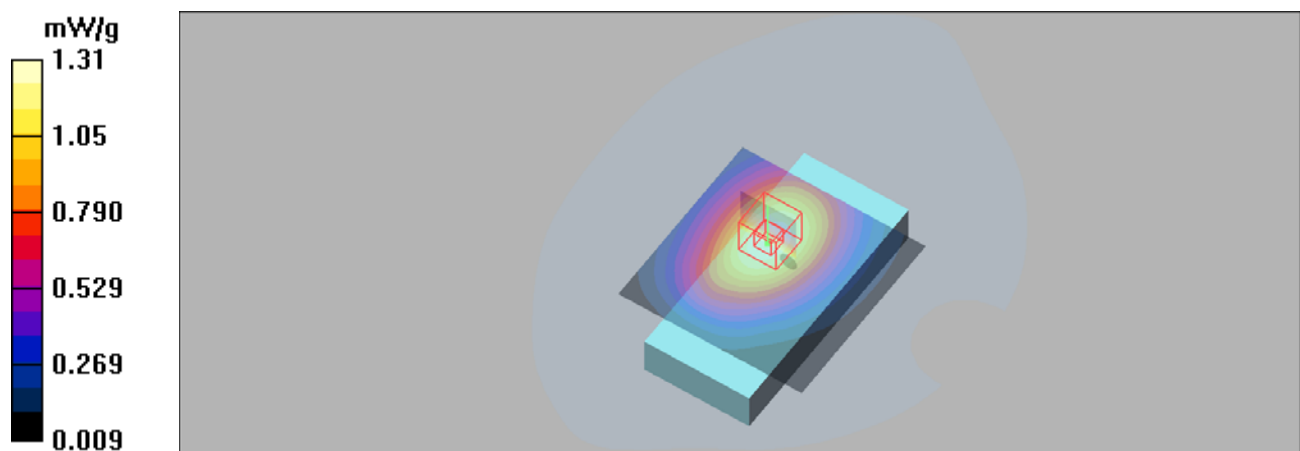

P10_802.11b_Rear Face_10mm_1**DUT: EUT**

Communication System: Wlan 802.11b; Frequency: 2412 MHz; Duty Cycle: 1:1

Medium: H2450 Medium parameters used: $f = 2412$ MHz; $\sigma = 1.72$ mho/m; $\epsilon_r = 40.3$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3142; ConvF(4.57, 4.57, 4.57); Calibrated: 2020/3/12
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1324; Calibrated: 2019/6/23
- Phantom: SAM 2; Type: QD 000 P40 CB; Serial: TP-1376
- ; Postprocessing SW: SEMCAD, V1.8 Build 186

Test/Area Scan (71x71x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.068 mW/g

Test/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 6.16 V/m; Power Drift = -0.191 dB

Peak SAR (extrapolated) = 0.104 W/kg

SAR(1 g) = 0.048 mW/g; SAR(10 g) = 0.024 mW/g

Maximum value of SAR (measured) = 0.063 mW/g

