# **FCC SAR Test Report**

APPLICANT : CT Asia

**EQUIPMENT** : Smart phone

BRAND NAME : BLU

MODEL NAME : Win JR

**FCC ID** : YHLBLUWINJR

**STANDARD** : FCC 47 CFR Part 2 (2.1093)

**ANSI/IEEE C95.1-1992** 

IEEE 1528-2003

We, SPORTON INTERNATIONAL (SHENZHEN) INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and had been in compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (SHENZHEN) INC., the test report shall not be reproduced except in full.

Reviewed by: Eric Huang / Deputy Manager

Approved by: Jones Tsai / Manager

2353

Report No. : FA471701

# SPORTON INTERNATIONAL (SHENZHEN) INC.

No. 101, Complex Building C, Guanlong Village, Xili Town, Nanshan District, Shenzhen, Guangdong, P.R.C.

TEL: 86-755-8637-9589 / FAX: 86-755-8637-9595

Issued Date: Aug. 14, 2014 Form version.: 140422 FCC ID: YHLBLUWINJR Page 1 of 44

# **Table of Contents**

1. Statement of Compliance	
2. Administration Data	
3. Guidance Standard	5
4. Equipment Under Test (EUT)	6
4.1 General Information	6
4.2 Maximum Tune-up Limit	
5. RF Exposure Limits	
5.1 Uncontrolled Environment	
5.2 Controlled Environment	
6. Specific Absorption Rate (SAR)	
6.1 Introduction	
6.2 SAR Definition	
7. System Description and Setup	
8. Measurement Procedures	
8.1 Spatial Peak SAR Evaluation	
8.2 Power Reference Measurement	
8.3 Area Scan	12
8.4 Zoom Scan	
8.5 Volume Scan Procedures	13
8.6 Power Drift Monitoring	
9. Test Equipment List	
10. System Verification	15
10.1 Tissue Verification	
10.2 System Performance Check Results	
11. RF Exposure Positions	
11.1 Ear and handset reference point	17
11.2 Definition of the cheek position.	12
11.3 Definition of the tilt position.	
11.4 Body Worn Accessory	
11.5 Wireless Router	
12. Conducted RF Output Power (Unit: dBm)	
13. Antenna Location	28
14. SAR Test Results	
14.1 Head SAR	
14.2 Hotspot SAR	
14.3 Body Worn Accessory SAR	
14.4 Repeated SAR Measurement	
15. Simultaneous Transmission Analysis	
15.1 Head Exposure Conditions	
15.2 Hotspot Exposure Conditions	
15.3 Body-Worn Accessory Exposure Conditions	
15.4 SPLSR Evaluation and Analysis	ار∧
16. Uncertainty Assessment	
17. References	
Appendix A. Plots of System Performance Check	44
Appendix B. Plots of High SAR Measurement	
Appendix C. DASY Calibration Certificate	
Appendix D. Test Setup Photos	

# **Revision History**

Report No. : FA471701

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FA471701	Rev. 01	Initial issue of report	Aug. 14, 2014

TEL: 86-755-8637-9589 / FAX: 86-755-8637-9595

Issued Date: Aug. 14, 2014 Form version. : 140422 FCC ID: YHLBLUWINJR Page 3 of 44

# 1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **CT Asia, Smart phone, Win JR**, are as follows.

**Report No. : FA471701** 

				Highest	SAR Summary	
Equipment Class	Frequency Band	Operating Mode	Head 1g SAR (W/kg)	Body-worn 1g SAR (W/kg) (Separation 1cm)	Wireless Router 1g SAR (W/kg) (Separation 1cm)	Simultaneous Transmission SAR (W/kg)
	GSM850	Voice/Data	0.59	1.19	1.19	
PCE	GSM1900	Voice/Data	0.54	1.21	1.19	1.55
PCE	WCDMA Band V	Voice/Data	0.47	0.95	0.95	1.55
	WCDMA Band II	Voice/Data	0.45	0.92	0.92	
DTS	WLAN 2.4GHz Band	Data	1.26	0.36	0.40	1.55
DSS	Bluetooth	Data	0.10	<0.10	<0.10	1.22
	Date of Testing:			08/01/201	4 ~ 08/12/2014	

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2003.

# 2. Administration Data

Testing Laboratory		
Test Site SPORTON INTERNATIONAL (SHENZHEN) INC.		
Test Site Location	No. 101, Complex Building C, Guanlong Village, Xili Town, Nanshan District, Shenzhen, Guangdong, P.R.C. TEL: +86-755-8637-9589 FAX: +86-755-8637-9595	

**Report No. : FA471701** 

Applicant Applicant		
Company Name	CT Asia	
Address	Unit 01, 15/F, Seaview Centre, 139-141 Hoi bun road, Kwun Tong, Kowloon, Hongkong	

Manufacturer		
Company Name	BEIJING BENYWAVE TECHNOLOGY CO., LTD.	
Address	NO.55 Jiachang 2 road, OPTO-Mechatronics Industrial Park, Tongzhou district, Beijing 101111	

# 3. Guidance Standard

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- · IEEE 1528-2003
- FCC KDB 865664 D01 SAR Measurement 100 MHz to 6 GHz v01r03
- FCC KDB 865664 D02 SAR Reporting v01r01
- FCC KDB 447498 D01 General RF Exposure Guidance v05r02
- FCC KDB 648474 D04 SAR Evaluation Considerations for Wireless Handsets v01r02
- FCC KDB 248227 D01 SAR meas for 802 11abg v01r02
- FCC KDB 941225 D01 SAR test for 3G devices v02
- FCC KDB 941225 D02 HSPA and 1x Advanced v02r02
- FCC KDB 941225 D03 SAR Test Reduction GSM GPRS EDGE v01
- FCC KDB 941225 D06 Hotspot Mode SAR v01r01

# 4. Equipment Under Test (EUT)

# 4.1 General Information

	Product Feature & Specification
Equipment Name	Smart phone
Brand Name	BLU
Model Name	Win JR
FCC ID	YHLBLUWINJR
IMEI Code	SIM1: 862288020893911 SIM2: 862288020893929
Wireless Technology and Frequency Range	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz WCDMA Band V: 826.4 MHz ~ 846.6 MHz WCDMA Band II: 1852.4 MHz ~ 1907.6 MHz WLAN 2.4GHz Band: 2412 MHz ~ 2462 MHz Bluetooth: 2402 MHz ~ 2480 MHz
Mode	• GSM/GPRS/EGPRS • RMC/AMR 12.2Kbps • HSDPA • HSUPA • DC-HSDPA • HSPA+ (Downlink Only) • 802.11b/g/n HT20 • Bluetooth v3.0+EDR
HW Version	TBW5703B2_P3
SW Version	01068.00016.57032.01048
GSM / (E)GPRS Transfer mode	Class B – EUT cannot support Packet Switched and Circuit Switched Network simultaneously but can automatically switch between Packet and Circuit Switched Network.
EUT Stage	Pre-Production
Remark:	

**Report No. : FA471701** 

# Remark:

- 1. This device 2.4GHz WLAN supports Hotspot operation.
- 2. 802.11n-HT40 is not supported in 2.4GHz WLAN.
- 3. This device supported VoIP in GPRS, EGPRS, WCDMA (e.g. 3rd party VoIP).
- 4. This device supports GRPS/EGPRS mode up to multi-slot class12 and does not supports DTM operation.
- 5. This device has 2 SIM slots and supports dual SIM dual Standby. The WWAN radio transmission will be enabled by either one SIM at a time (Single active).

# 4.2 Maximum Tune-up Limit

Mode	Burst average	e power(dBm)
Mode	GSM 850	GSM 1900
GSM (GMSK, 1 Tx slot)	34	30
GPRS (GMSK, 1 Tx slot)	34	30
GPRS (GMSK, 2 Tx slots)	29	29.5
GPRS (GMSK, 3 Tx slots)	29	29
GPRS (GMSK, 4 Tx slots)	28.5	29
EDGE (8PSK, 1 Tx slot)	28	26
EDGE (8PSK, 2 Tx slots)	28	26
EDGE (8PSK, 3 Tx slots)	28	26
EDGE (8PSK, 4 Tx slots)	28	26

Report No. : FA471701

Mada	Average Po	wer (dBm)
Mode	WCDMA Band V	WCDMA Band II
AMR 12.2Kbps	24	23.5
RMC 12.2Kbps	24	23.5
HSDPA Subtest-1	23	22.5
HSDPA Subtest-2	23	22.5
HSDPA Subtest-3	23	22
HSDPA Subtest-4	23	22
DC-HSDPA Subtest-1	23	22.5
DC-HSDPA Subtest-2	23	22.5
DC-HSDPA Subtest-3	23	22
DC-HSDPA Subtest-4	23	22
HSUPA Subtest-1	23	22.5
HSUPA Subtest-2	22	21
HSUPA Subtest-3	22	21.5
HSUPA Subtest-4	22.5	21.5
HSUPA Subtest-5	23	22.5

	Mode	Maximum Average Power (dBm)
	802.11b	15
2.4GHz	802.11g	9
	802.11n-HT20	9
	Bluetooth v3.0 + EDR	10.5

# 5. RF Exposure Limits

### 5.1 Uncontrolled Environment

Uncontrolled Environments are defined as locations where there is the exposure of individuals who have no knowledge or control of their exposure. The general population/uncontrolled exposure limits are applicable to situations in which the general public may be exposed or in which persons who are exposed as a consequence of their employment may not be made fully aware of the potential for exposure or cannot exercise control over their exposure. Members of the general public would come under this category when exposure is not employment-related; for example, in the case of a wireless transmitter that exposes persons in its vicinity.

Report No. : FA471701

# 5.2 Controlled Environment

Controlled Environments are defined as locations where there is exposure that may be incurred by persons who are aware of the potential for exposure, (i.e. as a result of employment or occupation). In general, occupational/controlled exposure limits are applicable to situations in which persons are exposed as a consequence of their employment, who have been made fully aware of the potential for exposure and can exercise control over their exposure. The exposure category is also applicable when the exposure is of a transient nature due to incidental passage through a location where the exposure levels may be higher than the general population/uncontrolled limits, but the exposed person is fully aware of the potential for exposure and can exercise control over his or her exposure by leaving the area or by some other appropriate means.

### Limits for Occupational/Controlled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.4	8.0	20.0

#### Limits for General Population/Uncontrolled Exposure (W/kg)

Whole-Body	Partial-Body	Hands, Wrists, Feet and Ankles
0.08	1.6	4.0

1. Whole-Body SAR is averaged over the entire body, partial-body SAR is averaged over any 1gram of tissue defined as a tissue volume in the shape of a cube. SAR for hands, wrists, feet and ankles is averaged over any 10 grams of tissue defined as a tissue volume in the shape of a cube.

# 6. Specific Absorption Rate (SAR)

# 6.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

**Report No.: FA471701** 

### 6.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (p). The equation description is as below:

$$SAR = \frac{d}{dt} \left( \frac{dW}{dm} \right) = \frac{d}{dt} \left( \frac{dW}{\rho dv} \right)$$


SAR is expressed in units of Watts per kilogram (W/kg)

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where:  $\sigma$  is the conductivity of the tissue,  $\rho$  is the mass density of the tissue and E is the RMS electrical field strength.

# 7. System Description and Setup

The DASY system used for performing compliance tests consists of the following items:

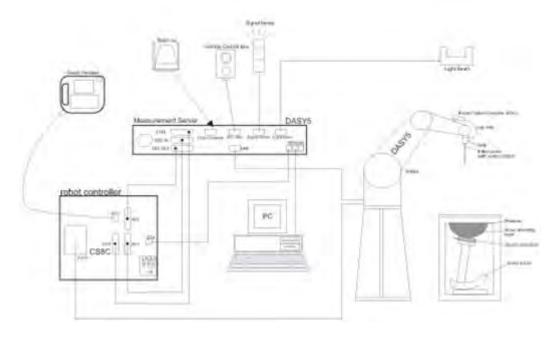

Report No. : FA471701

- A standard high precision 6-axis robot with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- An isotropic Field probe optimized and calibrated for the targeted measurement.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion from optical to electrical signals for the digital communication to the DAE. To use optical surface detection, a special version of the EOC is required. The EOC signal is transmitted to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- The Light Beam used is for probe alignment. This improves the (absolute) accuracy of the probe positioning.
- A computer running WinXP or Win7 and the DASY5 software.
- Remote control and teach pendant as well as additional circuitry for robot safety such as warning lamps,
- The phantom, the device holder and other accessories according to the targeted measurement.

# 8. Measurement Procedures

The measurement procedures are as follows:

#### <Conducted power measurement>

For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.

Report No. : FA471701

- Read the WWAN RF power level from the base station simulator.
- For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

#### <SAR measurement>

- Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power
- Place the EUT in the positions as Appendix D demonstrates. (b)
- Set scan area, grid size and other setting on the DASY software. (c)
- Measure SAR results for the highest power channel on each testing position.
- Find out the largest SAR result on these testing positions of each band (e)
- Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- Power reference measurement (a)
- (b) Area scan
- (c) Zoom scan
- Power drift measurement

### 8.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- Extraction of the measured data (grid and values) from the Zoom Scan
- Calculation of the SAR value at every measurement point based on all stored data (A/D values and (b) measurement parameters)
- Generation of a high-resolution mesh within the measured volume (c)
- (d) Interpolation of all measured values form the measurement grid to the high-resolution grid
- Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface (e)
- Calculation of the averaged SAR within masses of 1g and 10g

FCC ID: YHLBLUWINJR Page 11 of 44

### 8.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

**Report No.: FA471701** 

### 8.3 Area Scan

The area scan is used as a fast scan in two dimensions to find the area of high field values, before doing a fine measurement around the hot spot. The sophisticated interpolation routines implemented in DASY software can find the maximum found in the scanned area, within a range of the global maximum. The range (in dB0 is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE standard 1528 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan), if only one zoom scan follows the area scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of zoom scans has to be increased accordingly.

Area scan parameters extracted from FCC KDB 865664 D01v01r03 SAR measurement 100 MHz to 6 GHz.

	≤3 GHz	> 3 GHz
Maximum distance from closest measurement point (geometric center of probe sensors) to phantom surface	5 ± 1 mm	$\frac{1}{2} \cdot \delta \cdot \ln(2) \pm 0.5 \text{ mm}$
Maximum probe angle from probe axis to phantom surface normal at the measurement location	30° ± 1°	20° ± 1°
	$\leq$ 2 GHz: $\leq$ 15 mm 2 – 3 GHz: $\leq$ 12 mm	$3 - 4 \text{ GHz: } \le 12 \text{ mm}$ $4 - 6 \text{ GHz: } \le 10 \text{ mm}$
Maximum area scan spatial resolution: $\Delta x_{Area}$ , $\Delta y_{Area}$	When the x or y dimension of measurement plane orientation the measurement resolution is x or y dimension of the test of measurement point on the test	on, is smaller than the above, must be ≤ the corresponding device with at least one

### 8.4 Zoom Scan

Zoom scans are used assess the peak spatial SAR values within a cubic averaging volume containing 1 gram and 10 gram of simulated tissue. The zoom scan measures points (refer to table below) within a cube shoes base faces are centered on the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the zoom scan evaluates the averaged SAR for 1 gram and 10 gram and displays these values next to the job's label.

Report No. : FA471701

Zoom scan parameters extracted from FCC KDB 865664 D01v01r03 SAR measurement 100 MHz to 6 GHz.

			≤ 3 GHz	> 3 GHz
Maximum zoom scan s	patial reso	lution: Δx <sub>Zoom</sub> , Δy <sub>Zoom</sub>	$\leq$ 2 GHz: $\leq$ 8 mm 2 – 3 GHz: $\leq$ 5 mm <sup>*</sup>	$3 - 4 \text{ GHz: } \le 5 \text{ mm}^*$ $4 - 6 \text{ GHz: } \le 4 \text{ mm}^*$
	uniform	grid: $\Delta z_{Zoom}(n)$	≤ 5 mm	$3 - 4 \text{ GHz: } \le 4 \text{ mm}$ $4 - 5 \text{ GHz: } \le 3 \text{ mm}$ $5 - 6 \text{ GHz: } \le 2 \text{ mm}$
Maximum zoom scan spatial resolution, normal to phantom surface	graded	Δz <sub>Zoom</sub> (1): between 1 <sup>st</sup> two points closest to phantom surface	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm
	grid	Δz <sub>Zoom</sub> (n>1): between subsequent points	≤ 1.5·∆z	Zoom(n-1)
Minimum zoom scan volume	finimum zoom scan		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm

Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.

### 8.5 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

#### 8.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

TEL: 86-755-8637-9589 / FAX: 86-755-8637-9595 Issued Date: Aug. 14, 2014

FCC ID: YHLBLUWINJR Form version. : 140422 Page 13 of 44

When zoom scan is required and the <u>reported</u> SAR from the area scan based 1-g SAR estimation procedures of KDB 447498 is  $\leq 1.4 \text{ W/kg}, \leq 8 \text{ mm}, \leq 7 \text{ mm}$  and  $\leq 5 \text{ mm}$  zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.

# 9. Test Equipment List

Manufactures	Name of Environment	True o /B/I o al o l	Serial Number	Calib	ration
Manufacturer	Name of Equipment	Type/Model	Seriai Number	Last Cal.	Due Date
SPEAG	835MHz System Validation Kit	D835V2	4d151	Mar. 25. 2013	Mar. 23. 2015
SPEAG	1900MHz System Validation Kit	D1900V2	5d170	Mar. 27. 2013	Mar. 25. 2015
SPEAG	2450MHz System Validation Kit	D2450V2	908	Mar. 26. 2013	Mar. 24. 2015
SPEAG	Data Acquisition Electronics	DAE4	1358	Apr. 30, 2014	Apr. 29, 2015
SPEAG	Data Acquisition Electronics	DAE3	569	Nov. 22, 2013	Nov. 21, 2014
SPEAG	Dosimetric E-Field Probe	EX3DV4	3911	Apr. 22, 2014	Apr. 21, 2015
SPEAG	Dosimetric E-Field Probe	EX3DV4	3819	Nov. 27, 2013	Nov. 26, 2014
SPEAG	Phone Positioner	N/A	N/A	NCR	NCR
SPEAG	SAM Twin Phantom	QD 000 P40 CD	TP-1753	NCR	NCR
SPEAG	SAM Twin Phantom	QD 000 P40 CD	TP-1754	NCR	NCR
SPEAG	SAM Twin Phantom	QD 000 P40 CD	TP-1670	NCR	NCR
SPEAG	SAM Twin Phantom	QD 000 P40 CD	TP-1671	NCR	NCR
Agilent	Wireless Communication Test Set	E5515C	MY52102600	Dec. 30, 2013	Dec. 29, 2014
Agilent	Wireless Communication Test Set	E5515C	MY50266977	May 06, 2014	May 05, 2015
Agilent	ENA Series Network Analyzer	E5071C	MY46111157	Dec. 30, 2013	Dec. 29, 2014
SPEAG	Dielectric Assessment KIT	DAK-3.5	1032	NCR	NCR
Anritsu	Power Meter	ML2495A	1005002	Feb. 27, 2014	Feb. 26, 2015
Anritsu	Power Sensor	MA2411B	917070	Feb. 27, 2014	Feb. 26, 2015
R&S	Spectrum Analyzer	FSP7	101045	Dec. 30, 2013	Dec. 29, 2014
Agilent	Dual Directional Coupler	778D	50422	No	te 1
Woken	Attenuator	WK0602-XX	N/A	No	te 1
PE	Attenuator	PE7005-10	N/A	No	te 1
PE	Attenuator	PE7005- 3	N/A	No	te 1
AR	Power Amplifier	5S1G4M2	0328767	No	te 1
Mini-Circuits	Power Amplifier	ZVE-3W	162601250	Not	te 1
Mini-Circuits	Power Amplifier	ZHL-42W+	13440021344	Not	te 1

**Report No.: FA471701** 

### **General Note:**

- Prior to system verification and validation, the path loss from the signal generator to the system check source and the power meter, which includes the amplifier, cable, attenuator and directional coupler, was measured by the network analyzer. The reading of the power meter was offset by the path loss difference between the path to the power meter and the path to the system check source to monitor the actual power level fed to the system check source.
- Referring to KDB 865664 D01v01r03, the dipole calibration interval can be extended to 3 years with justification. 2. The dipoles are also not physically damaged, or repaired during the interval.
- 3. The justification data of dipole D835V2, SN: 4d151, D1900V2, SN: 5d170, D2450V2, SN: 908 can be found in appendix C. The return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration.

TEL: 86-755-8637-9589 / FAX: 86-755-8637-9595 Issued Date: Aug. 14, 2014

FCC ID: YHLBLUWINJR Form version. : 140422 Page 14 of 44

# 10. System Verification

# 10.1 Tissue Verification

The following tissue formulations are provided for reference only as some of the parameters have not been thoroughly verified. The composition of ingredients may be modified accordingly to achieve the desired target

**Report No. : FA471701** 

tissue parameters required for routine SAR evaluation.

Frequency (MHz)	Water (%)	Sugar (%)	Cellulose (%)	Salt (%)	Preventol (%)	DGBE (%)	Conductivity (σ)	Permittivity (εr)
				For Head				
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0
2450	55.0	0	0	0	0	45.0	1.80	39.2
				For Body				
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3
2450	68.6	0	0	0	0	31.4	1.95	52.7

### <Tissue Dielectric Parameter Check Results>

Frequency (MHz)	Tissue Type	Liquid Temp. (℃)	Conductivity (σ)	Permittivity (ε <sub>r</sub> )	Conductivity Target (σ)	Permittivity Target (ε <sub>r</sub> )	Delta (σ) (%)	Delta (ε <sub>r</sub> ) (%)	Limit (%)	Date
835	Head	22.5	0.916	41.029	0.90	41.50	1.78	-1.13	±5	2014.08.02
835	Head	22.6	0.913	40.859	0.90	41.50	1.44	-1.54	±5	2014.08.08
1900	Head	22.7	1.427	41.191	1.40	40.00	1.93	2.98	±5	2014.08.02
2450	Head	22.6	1.878	40.464	1.80	39.20	4.33	3.22	±5	2014.08.01
2450	Head	22.7	1.829	40.081	1.80	39.20	1.61	2.25	±5	2014.08.12
835	Body	22.6	0.973	54.088	0.97	55.20	0.31	-2.01	±5	2014.08.01
835	Body	22.6	0.974	54.111	0.97	55.20	0.41	-1.97	±5	2014.08.09
1900	Body	22.7	1.528	53.974	1.52	53.30	0.53	1.26	±5	2014.08.01
2450	Body	22.7	2.013	51.474	1.95	52.70	3.23	-2.33	±5	2014.08.01
2450	Body	22.8	1.977	51.617	1.95	52.70	1.38	-2.06	±5	2014.08.12

# 10.2 System Performance Check Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Below table shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Tissue Type	Input Power (mW)	Dipole S/N	Probe S/N	DAE S/N	Measured SAR (W/kg)	Targeted SAR (W/kg)	Normalized SAR (W/kg)	Deviation (%)
2014.08.02	835	Head	250	4d151	3911	1358	2.40	9.49	9.6	1.16
2014.08.08	835	Head	250	4d151	3911	1358	2.39	9.49	9.56	0.74
2014.08.02	1900	Head	250	5d170	3911	1358	9.78	40.20	39.12	-2.69
2014.08.01	2450	Head	250	908	3819	569	12.60	54.00	50.4	-6.67
2014.08.12	2450	Head	250	908	3819	569	12.40	54.00	49.6	-8.15
2014.08.01	835	Body	250	4d151	3911	1358	2.31	9.43	9.24	-2.01
2014.08.09	835	Body	250	4d151	3911	1358	2.33	9.43	9.32	-1.17
2014.08.01	1900	Body	250	5d170	3911	1358	9.59	41.20	38.36	-6.89
2014.08.01	2450	Body	250	908	3819	569	12.60	50.40	50.4	0.00
2014.08.12	2450	Body	250	908	3819	569	12.40	50.40	49.6	-1.59

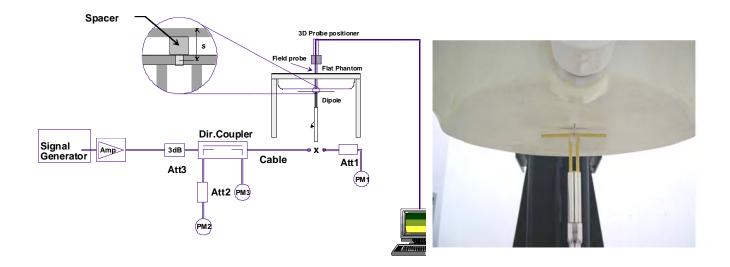


Fig 8.3.1 System Performance Check Setup

Fig 8.3.2 Setup Photo

**Report No. : FA471701** 

# 11. RF Exposure Positions

# 11.1 Ear and handset reference point

Figure 9.1.1 shows the front, back, and side views of the SAM phantom. The center-of-mouth reference point is labeled "M," the left ear reference point (ERP) is marked "LE," and the right ERP is marked "RE." Each ERP is 15 mm along the B-M (back-mouth) line behind the entrance-to-ear-canal (EEC) point, as shown in Figure 9.1.2 The Reference Plane is defined as passing through the two ear reference points and point M. The line N-F (neck-front), also called the reference pivoting line, is normal to the Reference Plane and perpendicular to both a line passing through RE and LE and the B-M line (see Figure 9.1.3). Both N-F and B-M lines should be marked on the exterior of the phantom shell to facilitate handset positioning. Posterior to the N-F line the ear shape is a flat surface with 6 mm thickness at each ERP, and forward of the N-F line the ear is truncated, as illustrated in Figure 9.1.2. The ear truncation is introduced to preclude the ear lobe from interfering with handset tilt, which could lead to unstable positioning at the cheek.



Fig 9.1.1 Front, back, and side views of SAM twin phantom





Fig 9.1.2 Close-up side view of phantom showing the ear region.



Report No. : FA471701

Fig 9.1.3 Side view of the phantom showing relevant markings and seven cross-sectional plane locations

# 11.2 Definition of the cheek position

- Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
- Define two imaginary lines on the handset—the vertical centerline and the horizontal line. The vertical centerline passes through two points on the front side of the handset—the midpoint of the width wt of the handset at the level of the acoustic output (point A in Figure 9.2.1 and Figure 9.2.2), and the midpoint of the width wb of the bottom of the handset (point B). The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output (see Figure 9.2.1). The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset (see Figure 9.2.2), especially for clamshell handsets, handsets with flip covers, and other irregularly-shaped handsets.
- Position the handset close to the surface of the phantom such that point A is on the (virtual) extension of the line passing through points RE and LE on the phantom (see Figure 9.2.3), such that the plane defined by the vertical centerline and the horizontal line of the handset is approximately parallel to the sagittal plane of the phantom.
- Translate the handset towards the phantom along the line passing through RE and LE until handset point A touches the pinna at the ERP.
- 5. While maintaining the handset in this plane, rotate it around the LE-RE line until the vertical centerline is in the plane normal to the plane containing B-M and N-F lines, i.e., the Reference Plane.
- 6. Rotate the handset around the vertical centerline until the handset (horizontal line) is parallel to the N-F line.
- While maintaining the vertical centerline in the Reference Plane, keeping point A on the line passing through RE and LE, and maintaining the handset contact with the pinna, rotate the handset about the N-F line until any point on the handset is in contact with a phantom point below the pinna on the cheek. See Figure 9.2.3. The actual rotation angles should be documented in the test report.

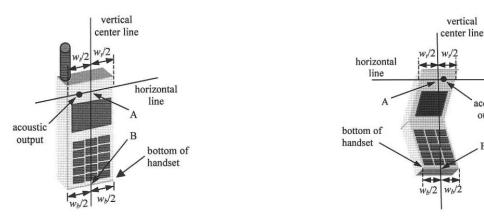


Fig 9.2.1 Handset vertical and horizontal reference lines—"fixed case

Fig 9.2.2 Handset vertical and horizontal reference lines-"clam-shell case"

acoustic output

Report No.: FA471701

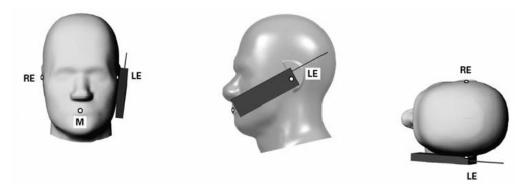


Fig 9.2.3 cheek or touch position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which establish the Reference Plane for handset positioning, are indicated.

SPORTON INTERNATIONAL (SHENZHEN) INC. TEL: 86-755-8637-9589 / FAX: 86-755-8637-9595 Issued Date: Aug. 14, 2014 Form version. : 140422

FCC ID: YHLBLUWINJR Page 18 of 44

### 11.3 Definition of the tilt position

- 1. Ready the handset for talk operation, if necessary. For example, for handsets with a cover piece (flip cover), open the cover. If the handset can transmit with the cover closed, both configurations must be tested.
- 2. While maintaining the orientation of the handset, move the handset away from the pinna along the line passing through RE and LE far enough to allow a rotation of the handset away from the cheek by 15°.
- 3. Rotate the handset around the horizontal line by 15°.
- 4. While maintaining the orientation of the handset, move the handset towards the phantom on the line passing through RE and LE until any part of the handset touches the ear. The tilt position is obtained when the contact point is on the pinna. See Figure 9.3.1. If contact occurs at any location other than the pinna, e.g., the antenna at the back of the phantom head, the angle of the handset should be reduced. In this case, the tilt position is obtained if any point on the handset is in contact with the pinna and a second point



Fig 9.3.1 Tilt position. The reference points for the right ear (RE), left ear (LE), and mouth (M), which define the Reference Plane for handset positioning, are indicated.

# 11.4 Body Worn Accessory

Body-worn operating configurations are tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in a normal use configuration (see Figure 9.4). Per KDB 648474 D04v01r02, body-worn accessory exposure is typically related to voice mode operations when handsets are carried in body-worn accessories. The body-worn accessory procedures in FCC KDB 447498 D01v05r02 should be used to test for body-worn accessory SAR compliance, without a headset connected to it. This enables the test results for such configuration to be compatible with that required for hotspot mode when the body-worn accessory test separation distance is greater than or equal to that required for hotspot mode, when applicable. When the reported SAR for body-worn accessory, measured without a headset connected to the handset is < 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be repeated for that body-worn accessory with a handset attached to the handset.

Report No. : FA471701

Accessories for body-worn operation configurations are divided into two categories: those that do not contain metallic components and those that do contain metallic components and those that do contain metallic components. When multiple accessories that do not contain metallic components are supplied with the device, the device is tested with only the accessory that dictates the closest spacing to the body. Then multiple accessories that contain metallic components are test with the device with each accessory. If multiple accessories share an identical metallic component (i.e. the same metallic belt-chip used with different holsters with no other metallic components) only the accessory that dictates the closest spacing to the body is tested.

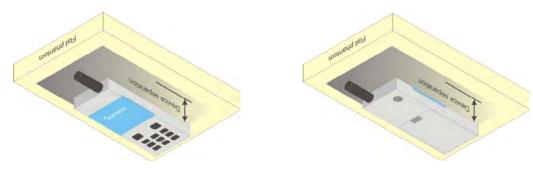


Fig 9.4 Body Worn Position

### 11.5 Wireless Router

Some battery-operated handsets have the capability to transmit and receive user through simultaneous transmission of WIFI simultaneously with a separate licensed transmitter. The FCC has provided guidance in FCC HDB Publication 941225 D06v01r01 where SAR test considerations for handsets (L x W  $\ge$  9 cm x 5 cm) are based on a composite test separation distance of 10mm from the front, back and edges of the device containing transmitting antennas within 2.5cm of their edges, determined form general mixed use conditions for this type of devices. Since the hotspot SAR results may overlap with the body-worn accessory SAR requirements, the more conservative configurations can be considered, thus excluding some body-worn accessory SAR tests.

When the user enables the personal wireless router functions for the handset, actual operations include simultaneous transmission of both the WIFI transmitter and another licensed transmitter. Both transmitters often do not transmit at the same transmitting frequency and thus cannot be evaluated for SAR under actual use conditions due to the limitations of the SAR assessment probes. Therefore, SAR must be evaluated for each frequency transmission and mode separately and spatially summed with the WIFI transmitter according to FCC KDB Publication 447498 D01v05r02 publication procedures. The "Portable Hotspot" feature on the handset was NOT activated during SAR assessments, to ensure the SAR measurements were evaluated for a single transmission frequency RF signal at a time.

# 12. Conducted RF Output Power (Unit: dBm)

#### <GSM Conducted Power>

#### **General Note:**

1. Per KDB 447498 D01v05r02, the maximum output power channel is used for SAR testing and for further SAR test reduction.

Report No. : FA471701

- 2. According to October 2013TCB Workshop, For GSM / GPRS / EGPRS, the number of time slots to test for SAR should correspond to the highest source-based time-averaged maximum output power configuration, Considering the possibility of e.g. 3rd party VoIP operation for head and body-worn SAR testing, the EUT was set in GPRS (4Tx slots) for GSM850/GSM1900 band due to its highest frame-average power.
- 3. For hotspot mode SAR testing, GPRS / EDGE should be evaluated, therefore the EUT was set in GPRS 4 Tx slots for GSM850/GSM1900 band due to its highest frame-average power.

#### SIM1:

Burst Av	erage Pow	er (dBm)	Tune-up	Frame-A	erage Pov	ver (dBm)	Tune-up
128	189	251	Limit	128	189	251	Limit
824.2	836.4	848.8	(dBm)	824.2	836.4	848.8	(dBm)
33.14	<mark>33.16</mark>	33.15	34	24.14	24.16	24.15	25
33.03	33.15	33.14	34	24.03	24.15	24.14	25
28.16	28.37	28.18	29	22.16	22.37	22.18	23
28.12	28.27	28.15	29	23.86	24.01	23.89	24.74
28.13	28.41	28.14	28.5	25.13	<mark>25.41</mark>	25.14	25.5
27.35	27.42	27.38	28	18.35	18.42	18.38	19
27.17	27.30	27.26	28	21.17	21.30	21.26	22
27.21	27.24	27.23	28	22.95	22.98	22.97	23.74
27.13	27.15	27.14	28	24.13	24.15	24.14	25
Burst Average Power (dBm)			Tune-up	Frame-Av	erage Pov	ver (dBm)	Tune-up
512	661	810	Limit	512	661	810	Limit
1850.2	1880	1909.8	(dBm)	1850.2	1880	1909.8	(dBm)
1850.2 29.18	1880 29.07	1909.8 29.37	(dBm) 30	1850.2 20.18	1880 20.07	1909.8	(dBm) 21
111			, ,				, ,
29.18	29.07	<mark>29.37</mark>	30	20.18	20.07	20.37	21
29.18 29.17	29.07 28.95	<b>29.37</b> 29.27	30 30	20.18	20.07 19.95	20.37 20.27	21 21
29.18 29.17 28.97	29.07 28.95 28.89	29.37 29.27 29.20	30 30 29.5	20.18 20.17 22.97	20.07 19.95 22.89	20.37 20.27 23.20	21 21 23.5
29.18 29.17 28.97 28.79	29.07 28.95 28.89 28.62	29.37 29.27 29.20 28.95	30 30 29.5 29	20.18 20.17 22.97 24.53	20.07 19.95 22.89 24.36	20.37 20.27 23.20 24.69	21 21 23.5 24.74
29.18 29.17 28.97 28.79 28.46	29.07 28.95 28.89 28.62 28.37	29.37 29.27 29.20 28.95 28.65	30 30 29.5 29 29	20.18 20.17 22.97 24.53 25.46	20.07 19.95 22.89 24.36 25.37	20.37 20.27 23.20 24.69 25.65	21 21 23.5 24.74 26
29.18 29.17 28.97 28.79 28.46 25.86	29.07 28.95 28.89 28.62 28.37 25.70	29.37 29.27 29.20 28.95 28.65 25.91	30 30 29.5 29 29 26	20.18 20.17 22.97 24.53 25.46 16.86	20.07 19.95 22.89 24.36 25.37 16.70	20.37 20.27 23.20 24.69 <b>25.65</b> 16.91	21 21 23.5 24.74 26 17
	128 824.2 33.14 33.03 28.16 28.12 28.13 27.35 27.17 27.21 27.13 Burst Av	128 189 824.2 836.4 33.14 33.16 33.03 33.15 28.16 28.37 28.12 28.27 28.13 28.41 27.35 27.42 27.17 27.30 27.21 27.24 27.13 27.15 Burst Average Pow	824.2     836.4     848.8       33.14     33.16     33.15       33.03     33.15     33.14       28.16     28.37     28.18       28.12     28.27     28.15       28.13     28.41     28.14       27.35     27.42     27.38       27.17     27.30     27.26       27.21     27.24     27.23       27.13     27.15     27.14       Burst Average Power (dBm)	128         189         251         Limit (dBm)           824.2         836.4         848.8         (dBm)           33.14         33.16         33.15         34           33.03         33.15         33.14         34           28.16         28.37         28.18         29           28.12         28.27         28.15         29           28.13         28.41         28.14         28.5           27.35         27.42         27.38         28           27.17         27.30         27.26         28           27.21         27.24         27.23         28           27.13         27.15         27.14         28           Burst Average Power (dBm)         Tune-up	128         189         251         Limit (dBm)         128           824.2         836.4         848.8         (dBm)         824.2           33.14         33.16         33.15         34         24.14           33.03         33.15         33.14         34         24.03           28.16         28.37         28.18         29         22.16           28.12         28.27         28.15         29         23.86           28.13         28.41         28.14         28.5         25.13           27.35         27.42         27.38         28         18.35           27.17         27.30         27.26         28         21.17           27.21         27.24         27.23         28         22.95           27.13         27.15         27.14         28         24.13           Burst Average Power (dBm)         Tune-up         Frame-Average Frame-Average	128         189         251         Limit (dBm)         128         189           824.2         836.4         848.8         (dBm)         824.2         836.4           33.14         33.16         33.15         34         24.14         24.16           33.03         33.15         33.14         34         24.03         24.15           28.16         28.37         28.18         29         22.16         22.37           28.12         28.27         28.15         29         23.86         24.01           28.13         28.41         28.14         28.5         25.13         25.41           27.35         27.42         27.38         28         18.35         18.42           27.17         27.30         27.26         28         21.17         21.30           27.21         27.24         27.23         28         22.95         22.98           27.13         27.15         27.14         28         24.13         24.15           Burst Average Power (dBm)         Tune-up         Frame-Average Power	128         189         251         Limit (dBm)         128         189         251           824.2         836.4         848.8         (dBm)         824.2         836.4         848.8           33.14         33.16         33.15         34         24.14         24.16         24.15           33.03         33.15         33.14         34         24.03         24.15         24.14           28.16         28.37         28.18         29         22.16         22.37         22.18           28.12         28.27         28.15         29         23.86         24.01         23.89           28.13         28.41         28.14         28.5         25.13         25.41         25.14           27.35         27.42         27.38         28         18.35         18.42         18.38           27.17         27.30         27.26         28         21.17         21.30         21.26           27.21         27.24         27.23         28         22.95         22.98         22.97           27.13         27.15         27.14         28         24.13         24.15         24.14           Burst Average Power (dBm)         7une-up Limit

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB

Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB

Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB

Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

SPORTON INTERNATIONAL (SHENZHEN) INC.



# FCC SAR Test Report

#### SIM2:

Band GSM850	Burst Av	erage Pow	er (dBm)	Tune-up	Frame-A	verage Pov	ver (dBm)	Tune-up
TX Channel	128	189	251	Limit	128	189	251	Limit
Frequency (MHz)	824.2	836.4	848.8	(dBm)	824.2	836.4	848.8	(dBm)
GSM (GMSK, 1 Tx slot)	33.09	33.14	33.12	34	24.09	24.14	24.12	25
GPRS (GMSK, 1 Tx slot) – CS1	32.98	33.05	33.01	34	23.98	24.05	24.01	25
GPRS (GMSK, 2 Tx slots) – CS1	28.12	28.30	28.21	29	22.12	22.30	22.21	23
GPRS (GMSK, 3 Tx slots) – CS1	28.03	28.22	28.19	29	23.77	23.96	23.93	24.74
GPRS (GMSK, 4 Tx slots) – CS1	28.11	28.38	28.26	28.5	25.11	<b>25.38</b>	25.26	25.5
EDGE (8PSK, 1 Tx slot) – MCS5	27.12	27.13	27.07	28	18.12	18.13	18.07	19
EDGE (8PSK, 2 Tx slots) – MCS5	27.13	27.06	27.05	28	21.13	21.06	21.05	22
EDGE (8PSK, 3 Tx slots) – MCS5	27.05	27.06	26.95	28	22.79	22.80	22.69	23.74
EDGE (8PSK, 4 Tx slots) – MCS5	26.84	26.87	26.82	28	23.84	23.87	23.82	25
Band GSM1900	Burst Av	erage Pow	er (dBm)	Tune-up	Frame-A	verage Pov	ver (dBm)	Tune-up
Band GSM1900 TX Channel	Burst Av 512	erage Pow 661	er (dBm) 810	Limit	Frame-Av 512	verage Pov 661	ver (dBm) 810	Tune-up Limit
			<u> </u>				· · · · ·	
TX Channel	512	661	810	Limit	512	661	810	Limit
TX Channel Frequency (MHz)	512 1850.2	661 1880	810 1909.8	Limit (dBm)	512 1850.2	661 1880	810 1909.8	Limit (dBm)
TX Channel Frequency (MHz) GSM (GMSK, 1 Tx slot)	512 1850.2 29.12	661 1880 29.01	810 1909.8 <b>29.30</b>	Limit (dBm)	512 1850.2 20.12	661 1880 20.01	810 1909.8 20.30	Limit (dBm)
TX Channel Frequency (MHz) GSM (GMSK, 1 Tx slot) GPRS (GMSK, 1 Tx slot) – CS1	512 1850.2 29.12 29.09	661 1880 29.01 28.92	810 1909.8 <b>29.30</b> 29.27	Limit (dBm) 30 30	512 1850.2 20.12 20.09	661 1880 20.01 19.92	810 1909.8 20.30 20.27	Limit (dBm) 21 21
TX Channel Frequency (MHz) GSM (GMSK, 1 Tx slot) GPRS (GMSK, 1 Tx slot) – CS1 GPRS (GMSK, 2 Tx slots) – CS1	512 1850.2 29.12 29.09 28.95	661 1880 29.01 28.92 28.82	810 1909.8 <b>29.30</b> 29.27 29.16	Limit (dBm) 30 30 29.5	512 1850.2 20.12 20.09 22.95	661 1880 20.01 19.92 22.82	810 1909.8 20.30 20.27 23.16	Limit (dBm) 21 21 23.5
TX Channel Frequency (MHz) GSM (GMSK, 1 Tx slot) GPRS (GMSK, 1 Tx slot) – CS1 GPRS (GMSK, 2 Tx slots) – CS1 GPRS (GMSK, 3 Tx slots) – CS1	512 1850.2 29.12 29.09 28.95 28.75	661 1880 29.01 28.92 28.82 28.57	810 1909.8 29.30 29.27 29.16 28.95	Limit (dBm) 30 30 29.5 29	512 1850.2 20.12 20.09 22.95 24.49	661 1880 20.01 19.92 22.82 24.31	810 1909.8 20.30 20.27 23.16 24.69	Limit (dBm) 21 21 23.5 24.74
TX Channel Frequency (MHz) GSM (GMSK, 1 Tx slot) GPRS (GMSK, 1 Tx slot) – CS1 GPRS (GMSK, 2 Tx slots) – CS1 GPRS (GMSK, 3 Tx slots) – CS1 GPRS (GMSK, 4 Tx slots) – CS1	512 1850.2 29.12 29.09 28.95 28.75 28.44	661 1880 29.01 28.92 28.82 28.57 28.33	810 1909.8 <b>29.30</b> 29.27 29.16 28.95 28.57	Limit (dBm) 30 30 29.5 29 29	512 1850.2 20.12 20.09 22.95 24.49 25.44	661 1880 20.01 19.92 22.82 24.31 25.33	810 1909.8 20.30 20.27 23.16 24.69 25.57	Limit (dBm) 21 21 23.5 24.74 26
TX Channel Frequency (MHz) GSM (GMSK, 1 Tx slot) GPRS (GMSK, 1 Tx slot) – CS1 GPRS (GMSK, 2 Tx slots) – CS1 GPRS (GMSK, 3 Tx slots) – CS1 GPRS (GMSK, 4 Tx slots) – CS1 EDGE (8PSK, 1 Tx slot) – MCS5	512 1850.2 29.12 29.09 28.95 28.75 28.44 25.80	661 1880 29.01 28.92 28.82 28.57 28.33 25.63	810 1909.8 29.30 29.27 29.16 28.95 28.57 25.88	Limit (dBm) 30 30 29.5 29 29 26	512 1850.2 20.12 20.09 22.95 24.49 25.44 16.80	661 1880 20.01 19.92 22.82 24.31 25.33 16.63	810 1909.8 20.30 20.27 23.16 24.69 25.57 16.88	Limit (dBm) 21 21 23.5 24.74 26 17

**Report No. : FA471701** 

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB
Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

TEL: 86-755-8637-9589 / FAX: 86-755-8637-9595 Issued Date: Aug. 14, 2014 FCC ID: YHLBLUWINJR Form version. : 140422 Page 22 of 44

#### <WCDMA Conducted Power>

- 1. The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification.
- 2. The procedures in KDB 941225 D01 are applied for 3GPP Rel. 6 HSPA to configure the device in the required sub-test mode(s) to determine SAR test exclusion.

Report No. : FA471701

 For DC-HSDPA, the device was configured according to the H-Set 12, Fixed Reference Channel (FRC) configuration in Table C.8.1.12 of 3GPP TS 34.121-1, with the primary and the secondary serving HS-DSCH Cell enabled during the power measurement.

A summary of these settings are illustrated below:

#### **HSDPA Setup Configuration:**

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting:
  - i. Set Gain Factors ( $\beta_c$  and  $\beta_d$ ) and parameters were set according to each
  - ii. Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121
  - iii. Set RMC 12.2Kbps + HSDPA mode.
  - iv. Set Cell Power = -86 dBm
  - v. Set HS-DSCH Configuration Type to FRC (H-set 1, QPSK)
  - vi. Select HSDPA Uplink Parameters
  - vii. Set Delta ACK, Delta NACK and Delta CQI = 8
  - viii. Set Ack-Nack Repetition Factor to 3
  - ix. Set CQI Feedback Cycle (k) to 4 ms
  - x. Set CQI Repetition Factor to 2
  - xi. Power Ctrl Mode = All Up bits
- d. The transmitted maximum output power was recorded.

Table C.10.1.4: β values for transmitter characteristics tests with HS-DPCCH

Sub-test	βο	βd	β <sub>d</sub> (SF)	β₀/βа	βнs (Note1, Note 2)	CM (dB) (Note 3)	MPR (dB) (Note 3)
1	2/15	15/15	64	2/15	4/15	0.0	0.0
2	12/15 (Note 4)	15/15 (Note 4)	64	12/15 (Note 4)	24/15	1.0	0.0
3	15/15	8/15	64	15/8	30/15	1.5	0.5
4	15/15	4/15	64	15/4	30/15	1.5	0.5

Note 2: For the HS-DPCCH power mask requirement test in clause 5.2C, 5.7A, and the Error Vector Magnitude (EVM) with HS-DPCCH lest in clause 5.13.1A, and HSDPA EVM with phase discontinuity in clause 5.13.1AA,  $\Delta_{ACK}$  and  $\Delta_{NACK}$  = 30/15 with  $\beta_{hs}$  = 30/15 \*  $\beta_{rs}$ , and  $\Delta_{CQI}$  = 24/15

with  $\beta_{hs} = 24/15 * \beta_c$ .

Note 3: CM = 1 for β<sub>e</sub>/β<sub>d</sub> =12/15, β<sub>hs</sub>/β<sub>c</sub>=24/15. For all other combinations of DPDCH, DPCCH and HS-DPCCH the MPR is based on the relative CM difference. This is applicable for only UEs that support HSDPA in release 6 and later releases.

Note 4: For subtest 2 the  $\beta_c/\beta_d$  ratio of 12/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c$  = 11/15 and  $\beta_d$  = 15/15.

**Setup Configuration** 

#### **HSUPA Setup Configuration:**

- a. The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration.
- b. The RF path losses were compensated into the measurements.
- c. A call was established between EUT and Base Station with following setting \*:
  - i. Call Configs = 5.2B, 5.9B, 5.10B, and 5.13.2B with QPSK
  - ii. Set the Gain Factors ( $\beta_c$  and  $\beta_d$ ) and parameters (AG Index) were set according to each specific sub-test in the following table, C11.1.3, quoted from the TS 34.121

**Report No.: FA471701** 

- iii. Set Cell Power = -86 dBm
- iv. Set Channel Type = 12.2k + HSPA
- v. Set UE Target Power

SPORTON INTERNATIONAL (SHENZHEN) INC.

- vi. Power Ctrl Mode= Alternating bits
- vii. Set and observe the E-TFCI
- viii. Confirm that E-TFCI is equal to the target E-TFCI of 75 for sub-test 1, and other subtest's E-TFCI
- d. The transmitted maximum output power was recorded.

Table C.11.1.3: β values for transmitter characteristics tests with HS-DPCCH and E-DCH

Sub- test	βс	βa	β <sub>d</sub> (SF)	βc/βd	βнs (Note1)	βес	β <sub>ed</sub> (Note 5) (Note 6)	β <sub>ed</sub> (SF)	β <sub>ed</sub> (Codes)	CM (dB) (Note 2)	MPR (dB) (Note 2)	AG Index (Note 6)	E- TFCI
1	11/15 (Note 3)	15/15 (Note 3)	64	11/15 (Note 3)	22/15	209/2 25	1309/225	4	1	1.0	0.0	20	75
2	6/15	15/15	64	6/15	12/15	12/15	94/75	4	1	3.0	2.0	12	67
3	15/15	9/15	64	15/9	30/15	30/15	β <sub>ed</sub> 1: 47/15 β <sub>ed</sub> 2: 47/15	4 4	2	2.0	1.0	15	92
4	2/15	15/15	64	2/15	4/15	2/15	56/75	4	1	3.0	2.0	17	71
5	15/15 (Note 4)	15/15 (Note 4)	64	15/15 (Note 4)	30/15	24/15	134/15	4	1	1.0	0.0	21	81

- Note 1:  $\Delta_{\rm ACK}$ ,  $\Delta_{\rm NACK}$  and  $\Delta_{\rm CQI}$  = 30/15 with  $\beta_{hs}$  = 30/15 \*  $\beta_c$ .
- Note 2: CM = 1 for  $\beta_0/\beta_d = 12/15$ ,  $\beta_{1s}/\beta_c = 24/15$ . For all other combinations of DPDCH, DPCCH, HS- DPCCH, E-DPDCH and E-DPCCH the MPR is based on the relative CM difference.
- Note 3: For subtest 1 the  $\beta_c/\beta_d$  ratio of 11/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c$  = 10/15 and  $\beta_d$  = 15/15.
- Note 4: For subtest 5 the  $\beta_d/\beta_d$  ratio of 15/15 for the TFC during the measurement period (TF1, TF0) is achieved by setting the signalled gain factors for the reference TFC (TF1, TF1) to  $\beta_c$  = 14/15 and  $\beta_d$  = 15/15.
- Note 5: In case of testing by UE using E-DPDCH Physical Layer category 1, Sub-test 3 is omitted according to
- TS25.306 Table 5.1g. Note 6:  $\beta_{ed}$  can not be set directly, it is set by Absolute Grant Value.

Setup Configuration

#### **DC-HSDPA 3GPP release 8 Setup Configuration:**

- The EUT was connected to Base Station Agilent E5515C referred to the Setup Configuration below
- The RF path losses were compensated into the measurements.
- A call was established between EUT and Base Station with following setting: C.
  - Set RMC 12.2Kbps + HSDPA mode.
  - Set Cell Power = -25 dBm
  - Set HS-DSCH Configuration Type to FRC (H-set 12, QPSK) iii.
  - Select HSDPA Uplink Parameters iv.
  - Set Gain Factors ( $\beta_c$  and  $\beta_d$ ) and parameters were set according to each Specific sub-test in the following table, C10.1.4, quoted from the TS 34.121

Report No. : FA471701

- a). Subtest 1:  $\beta_c/\beta_d=2/15$  b). Subtest 2:  $\beta_c/\beta_d=12/15$
- c). Subtest 3:  $\beta_c/\beta_d=15/8$
- d). Subtest 4:  $\beta_c/\beta_d=15/4$
- Set Delta ACK, Delta NACK and Delta CQI = 8 vi.
- Set Ack-Nack Repetition Factor to 3 vii.
- Set CQI Feedback Cycle (k) to 4 ms
- Set CQI Repetition Factor to 2 ix.
- Power Ctrl Mode = All Up bits
- The transmitted maximum output power was recorded.

The following tests were conducted according to the test requirements outlines in 3GPP TS 34.121 specification. A summary of these settings are illustrated below:

#### C.8.1.12 Fixed Reference Channel Definition H-Set 12

Table C.8.1.12: Fixed Reference Channel H-Set 12

	Parameter	Unit	Value
Nominal	Avg. Inf. Bit Rate	kbps	60
Inter-TTI	Distance	TTI's	1
Number	of HARQ Processes	Proces	6
		ses	0
Informati	on Bit Payload ( $N_{\mathit{INF}}$ )	Bits	120
Number	Code Blocks	Blocks	1
Binary C	hannel Bits Per TTI	Bits	960
Total Ava	ailable SML's in UE	SML's	19200
Number	of SML's per HARQ Proc.	SML's	3200
Coding F	Rate		0.15
Number	of Physical Channel Codes	Codes	1
Modulati			QPSK
Note 1:	The RMC is intended to be used for	or DC-HSD	PA
	mode and both cells shall transmit	with identi	ical
	parameters as listed in the table.		
Note 2:			
	retransmission is not allowed. The	e redundan	cy and
	constellation version 0 shall be use	ed.	

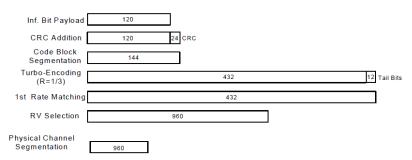


Figure C.8.19: Coding rate for Fixed reference Channel H-Set 12 (QPSK)

# **Setup Configuration**

FCC ID: YHLBLUWINJR Page 25 of 44

#### <WCDMA Conducted Power>

#### **General Note:**

 SAR testing in AMR configuration is not required when the maximum average output of each RF channel for AMR 12.2Kbps is less than 0.25dB higher than that measured in RMC 12.2Kbps

**Report No. : FA471701** 

2. Per KDB 941225 D02v02r02, RMC 12.2kbps setting is used to evaluate SAR. If HSDPA/HSUPA/DC-HSDPA output power is < 0.25dB higher than RMC, or reported SAR with RMC 12.2kbps setting is ≤ 1.2W/kg, HSDPA/HSUPA/DC-HSDPA SAR evaluation can be excluded.

#### SIM1:

SIIVI I .											
	E	Band		WCDMA	A Band V			WCDMA	A Band II		
	Tx C	Channel	4132	4182	4233	Tune-up	9262	9400	9538	Tune-up	
	Rx (	Channel	4357	4407	4458	Limit	9662	9800	9938	Limit	
	Freque	ncy (MHz)	826.4	836.4	846.6	(dBm)	1852.4	1880	1907.6	(dBm)	
MPR	3GPP Rel 99	AMR 12.2Kbps	23.64	23.40	23.57	24	22.66	22.96	22.72	23.5	
(dB)	3GPP Rel 99	RMC 12.2Kbps	<b>23.65</b>	23.41	23.58	24	22.67	<b>22.97</b>	22.73	23.5	
0	3GPP Rel 6	HSDPA Subtest-1	22.58	22.42	22.55	23	21.75	22.18	21.86	22.5	
0	3GPP Rel 6	HSDPA Subtest-2	22.59	22.55	22.65	23	21.86	22.27	21.90	22.5	
0.5	3GPP Rel 6	HSDPA Subtest-3	22.18	22.08	22.19	23	21.36	21.87	21.48	22	
0.5	3GPP Rel 6	HSDPA Subtest-4	22.16	22.05	22.19	23	21.34	21.86	21.48	22	
0	3GPP Rel 8	DC-HSDPA Subtest-1	22.66	22.34	22.50	23	21.80	22.12	21.83	22.5	
0	3GPP Rel 8	DC-HSDPA Subtest-2	22.59	22.58	22.66	23	21.93	22.21	21.98	22.5	
0.5	3GPP Rel 8	DC-HSDPA Subtest-3	22.21	22.15	22.25	23	21.29	21.80	21.56	22	
0.5	3GPP Rel 8	DC-HSDPA Subtest-4	22.22	22.06	22.11	23	21.38	21.94	21.48	22	
0	3GPP Rel 6	HSUPA Subtest-1	22.45	22.38	22.61	23	21.66	22.28	21.85	22.5	
2	3GPP Rel 6	HSUPA Subtest-2	21.16	21.10	21.29	22	20.76	20.78	20.70	21	
1	3GPP Rel 6	HSUPA Subtest-3	21.51	21.47	20.80	22	20.41	21.04	20.87	21.5	
2	3GPP Rel 6	HSUPA Subtest-4	22.05	22.05	21.55	22.5	20.85	21.02	20.84	21.5	
0	3GPP Rel 6	HSUPA Subtest-5	22.90	22.40	22.90	23	21.8	22.1	21.7	22.5	

#### SIM2:

WCDMA 9400		
9400	0500	
	9538	Tune-up
9800	9938	Limit
1880	1907.6	(dBm)
22.95	22.67	23.5
<mark>22.96</mark>	22.68	23.5
22.13	21.80	22.5
22.27	21.85	22.5
21.81	21.43	22
21.82	21.42	22
22.20	21.74	22.5
22.35	21.84	22.5
21.90	21.37	22
21.74	21.35	22
21.79	21.48	22.5
20.76	20.67	21
21.02	20.63	21.5
21.01	20.83	21.5
22.1	21.70	22.5
	1880 22.95 22.96 22.13 22.27 21.81 21.82 22.20 22.35 21.90 21.74 21.79 20.76 21.02 21.01	1880         1907.6           22.95         22.67           22.96         22.68           22.13         21.80           22.27         21.85           21.81         21.42           22.20         21.74           22.35         21.84           21.90         21.37           21.74         21.35           21.79         21.48           20.76         20.67           21.01         20.83

### <WLAN Conducted Power>

#### **General Note:**

 For 2.4GHz WLAN SAR testing, highest average RF output power channel for the lowest data rate for 802.11b were selected for SAR evaluation. 802.11g/n HT20 were not investigated since the average output powers over all channels and data rates were not more than 0.25 dB higher than the tested channel in the lowest data rate of 802.11b mode.

**Report No.: FA471701** 

	WL	AN 2.4GHz 802.11b A	verage Power (dBm)				
	Power vs. Channel			Power vs. Data Rate			
Channel	Frequency (MHz)	Data Rate 1Mbps	2Mbps	2Mbps 5.5Mbps			
CH 1	2412	14.75					
CH 6	2437	<mark>14.95</mark>	14.85	14.93	14.92		
CH 11	2462	14.61					

			WLAN 2.40	Hz 802.11g <i>F</i>	Average Powe	er (dBm)				
Pov	wer vs. Chann	el	Power vs. Data Rate							
Channel	Frequency (MHz)	Data Rate 6Mbps	9Mbps 12Mbps 18Mbps 24Mbps 36Mbps 48Mbps 54Mbp							
CH 1	2412	<mark>8.85</mark>				8.68		8.71		
CH 6	2437	8.62	8.60	8.65	8.60		8.79		8.78	
CH 11	2462	8.55								

		٧	VLAN 2.4GHz	: 802.11n-HT2	20 Average Po	ower (dBm)				
Pov	wer vs. Chann	el	Power vs. MCS Index							
Channel	Frequency	MCS Index	MCS1	MCS2	MCS3	MCS4	MCS5	MCS6	MCS7	
Channel	(MHz)	MCS0	IVICST	IVICOZ	IVICOS	101004	IVICOS	IVICSO	IVICO	
CH 1	2412	<mark>8.79</mark>								
CH 6	2437	8.64	8.63	8.59	8.69	8.72	8.60	8.75	8.71	
CH 11	2462	8.59								


### <Bluetooth Conducted Power>

		Bluetooth Burst Average Powe	Bluetooth Burst Average Power (dBm)_DH5									
Channel	Fragues av (MIII-)	Data Rate										
Channel	Frequency (MHz)	1Mbps	2Mbps	3Mbps								
CH 00	2402	<mark>10.22</mark>	8.23	8.21								
CH 39	2441	9.62	7.63	7.65								
CH 78	2480	9.68	7.11	7.66								

#### Note:

- 1. The burst average power is the average power level during the "ON" burst of Bluetooth transmitter
- Bluetooth SAR testing was performed at the data rate of 1Mbps and at DH5 due to highest duty factor which is maximum 83.3%

# 13. Antenna Location

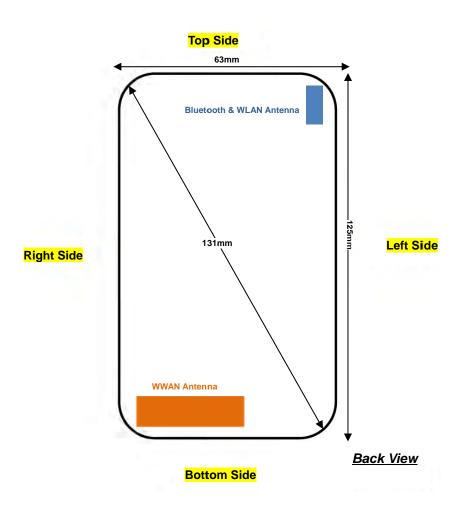

Report No. : FA471701

Distance of the Antenna to the EUT surface/edge										
Antennas Back Front Top Side Bottom Side Right Side Left Side										
WWAN	≤ 25mm	≤ 25mm	110mm	≤ 25mm	≤ 25mm	≤ 25mm				
BT&WLAN ≤ 25mm ≤ 25mm 101mm 53mm ≤ 25mi										

Positions for SAR tests; Hotspot mode										
Antennas Back Front Top Side Bottom Side Right Side Left Side										
WWAN	Yes	Yes	No	Yes	Yes	Yes				
BT&WLAN	Yes	Yes	Yes	No	No	Yes				

**General Note:** Referring to KDB 941225 D06 v01r01, when the overall device length and width are ≥ 9cm\*5cm, the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge

TEL: 86-755-8637-9589 / FAX: 86-755-8637-9595 Issued Date: Aug. 14, 2014

FCC ID : YHLBLUWINJR Page 28 of 44 Form version. : 140422

# 14. SAR Test Results

#### **General Note:**

- 1. Per KDB 447498 D01v05r02, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance.
  - a. Tune-up scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.

**Report No.: FA471701** 

- b. For SAR testing of WLAN signal with non-100% duty cycle, the measured SAR is scaled-up by the duty cycle scaling factor which is equal to "1/(duty cycle)"
- c. For WWAN: Reported SAR(W/kg)= Measured SAR(W/kg)\*Tune-up Scaling Factor
- d. For WLAN: Reported SAR(W/kg)= Measured SAR(W/kg)\* Duty Cycle scaling factor \* Tune-up scaling factor WLAN 2.4GHz 802.11b Duty Cycle: 97.63%
- 2. Per KDB 447498 D01v05r02, for each exposure position, testing of other required channels within the operating mode of a frequency band is not required when the *reported* 1-g or 10-g SAR for the mid-band or highest output power channel is:
  - ≤ 0.8 W/kg or 2.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≤ 100 MHz
  - · ≤ 0.6 W/kg or 1.5 W/kg, for 1-g or 10-g respectively, when the transmission band is between 100 MHz and 200 MHz
  - · ≤ 0.4 W/kg or 1.0 W/kg, for 1-g or 10-g respectively, when the transmission band is ≥ 200 MHz
- 3. According to October 2013TCB Workshop, For GSM / GPRS / EGPRS, the number of time slots to test for SAR should correspond to the highest source-based time-averaged maximum output power configuration, Considering the possibility of e.g. 3rd party VoIP operation for head and body-worn SAR testing, the EUT was set in GPRS (4Tx slots) for GSM850/GSM1900 band due to its highest frame-average power.
- 4. For hotspot mode SAR testing, GPRS and EDGE should be evaluated, therefore the EUT was set in GPRS 4 Tx slots for GSM850/GSM1900 band due to its highest frame-average power.
- Pre KDB648474 D04v01r02, when the reported SAR for a body-worn accessory, measured without a headset connected to
  the handset, is > 1.2 W/kg, the highest reported SAR configuration for that wireless mode and frequency band should be
  repeated for that body-worn accessory with a headset attached to the handset.
- 6. Per KDB 941225 D02v02r02, RMC 12.2kbps setting is used to evaluate SAR. If HSDPA/HSUPA/DC-HSDPA output power is < 0.25dB higher than RMC, or reported SAR with RMC 12.2kbps setting is ≤ 1.2W/kg, HSDPA/HSUPA/DC-HSDPA SAR evaluation can be excluded.
- 7. Additional WLAN/Bluetooth SAR with headset testing was performed for simultaneous transmission analysis.

 SPORTON INTERNATIONAL (SHENZHEN) INC.

 TEL: 86-755-8637-9589 / FAX: 86-755-8637-9595
 Issued Date: Aug. 14, 2014

FCC ID : YHLBLUWINJR Page 29 of 44 Form version. : 140422

# 14.1 Head SAR

# <GSM SAR>

Plot No.	Band	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS(GMSK 4 TX Slot)	Right Cheek	189	836.4	28.41	28.50	1.021	0.04	0.535	0.546
	GSM850	GPRS(GMSK 4 TX Slot)	Right Tilted	189	836.4	28.41	28.50	1.021	-0.07	0.399	0.407
01	GSM850	GPRS(GMSK 4 TX Slot)	Left Cheek	189	836.4	28.41	28.50	1.021	0.05	0.582	<mark>0.594</mark>
	GSM850	GPRS(GMSK 4 TX Slot)	Left Tilted	189	836.4	28.41	28.50	1.021	-0.02	0.421	0.430
	GSM1900	GPRS(GMSK 4 TX Slot)	Right Cheek	810	1909.8	28.65	29.00	1.084	-0.05	0.332	0.360
	GSM1900	GPRS(GMSK 4 TX Slot)	Right Tilted	810	1909.8	28.65	29.00	1.084	-0.04	0.151	0.164
02	GSM1900	GPRS(GMSK 4 TX Slot)	Left Cheek	810	1909.8	28.65	29.00	1.084	-0.02	0.499	<mark>0.541</mark>
	GSM1900	GPRS(GMSK 4 TX Slot)	Left Tilted	810	1909.8	28.65	29.00	1.084	-0.04	0.195	0.211

Report No. : FA471701

# <WCDMA SAR>

Plot No.	Band	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
03	WCDMA Band V	RMC12.2K	Right Cheek	4132	826.4	23.65	24.00	1.084	0.07	0.431	<mark>0.467</mark>
	WCDMA Band V	RMC12.2K	Right Tilted	4132	826.4	23.65	24.00	1.084	-0.06	0.322	0.349
	WCDMA Band V	RMC12.2K	Left Cheek	4132	826.4	23.65	24.00	1.084	0.07	0.425	0.461
	WCDMA Band V	RMC12.2K	Left Tilted	4132	826.4	23.65	24.00	1.084	-0.05	0.304	0.330
	WCDMA Band II	RMC12.2K	Right Cheek	9400	1880	22.97	23.50	1.130	-0.05	0.360	0.407
	WCDMA Band II	RMC12.2K	Right Tilted	9400	1880	22.97	23.50	1.130	-0.02	0.140	0.158
04	WCDMA Band II	RMC12.2K	Left Cheek	9400	1880	22.97	23.50	1.130	-0.08	0.399	<mark>0.451</mark>
	WCDMA Band II	RMC12.2K	Left Tilted	9400	1880	22.97	23.50	1.130	-0.04	0.163	0.184

# <DTS WLAN SAR>

Plot No.	Band	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle Scaling Factor	Duide	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
05	WLAN2.4GHz	802.11b, 1Mbps	Right Cheek	6	2437	14.95	15.00	1.012	1.024	0.05	1.220	<mark>1.264</mark>
	WLAN2.4GHz	802.11b, 1Mbps	Right Tilted	6	2437	14.95	15.00	1.012	1.024	0.07	0.548	0.568
	WLAN2.4GHz	802.11b, 1Mbps	Left Cheek	6	2437	14.95	15.00	1.012	1.024	0.01	0.496	0.514
	WLAN2.4GHz	802.11b, 1Mbps	Left Tilted	6	2437	14.95	15.00	1.012	1.024	0.07	0.251	0.260
	WLAN2.4GHz	802.11b, 1Mbps	Right Cheek	1	2412	14.75	15.00	1.058	1.024	0.02	1.160	1.257
	WLAN2.4GHz	802.11b, 1Mbps	Right Cheek	11	2462	14.61	15.00	1.093	1.024	0.08	0.998	1.117

# <Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
06	Bluetooth	1Mbps DH5	Right Cheek	0	2402	10.22	10.5	1.066	0.13	0.093	0.099
	Bluetooth	1Mbps DH5	Right Tilted	0	2402	10.22	10.5	1.066	0.05	0.040	0.043
	Bluetooth	1Mbps DH5	Left Cheek	0	2402	10.22	10.5	1.066	0.06	0.043	0.046
	Bluetooth	1Mbps DH5	Left Tilted	0	2402	10.22	10.5	1.066	0.04	0.027	0.029

 SPORTON INTERNATIONAL (SHENZHEN) INC.

 TEL: 86-755-8637-9589 / FAX: 86-755-8637-9595
 Issued Date: Aug. 14, 2014

FCC ID: YHLBLUWINJR Page 30 of 44 Form version: : 140422



# SPORTON LAB. FCC SAR Test Report

# 14.2 Hotspot SAR

Distance of the Antenna to the EUT surface/edge										
Antennas Back Front Top Side Bottom Side Right Side Left Side										
WWAN	≤ 25mm	≤ 25mm	110mm	≤ 25mm	≤ 25mm	≤ 25mm				
BT&WLAN	≤ 25mm	≤ 25mm	≤ 25mm	101mm	53mm	≤ 25mm				

**Report No. : FA471701** 

	Po	ositions for SAR te	ests; Hotspot mod	de							
Antennas	Back	Front	Top Side	Bottom Side	Right Side	Left Side					
WWAN	Yes	Yes	No	Yes	Yes	Yes					
BT&WLAN	BT&WLAN Yes Yes No No Yes										

**General Note:** Referring to KDB 941225 D06 v01r01, when the overall device length and width are ≥ 9cm\*5cm, the test distance is 10 mm. SAR must be measured for all sides and surfaces with a transmitting antenna located within 25mm from that surface or edge

# <GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS(GMSK 4 TX Slot)	Front	1	189	836.4	28.41	28.50	1.021	-0.08	0.689	0.703
	GSM850	GPRS(GMSK 4 TX Slot)	Back	1	189	836.4	28.41	28.50	1.021	-0.16	1.160	1.184
	GSM850	GPRS(GMSK 4 TX Slot)	Left side	1	189	836.4	28.41	28.50	1.021	-0.02	0.762	0.778
	GSM850	GPRS(GMSK 4 TX Slot)	Right side	1	189	836.4	28.41	28.50	1.021	-0.02	0.882	0.900
	GSM850	GPRS(GMSK 4 TX Slot)	Bottom side	1	189	836.4	28.41	28.50	1.021	-0.03	0.106	0.108
07	GSM850	GPRS(GMSK 4 TX Slot)	Back	1	128	824.2	28.13	28.50	1.089	-0.01	1.090	<mark>1.187</mark>
	GSM850	GPRS(GMSK 4 TX Slot)	Back	1	251	848.8	28.14	28.50	1.086	-0.13	1.080	1.173
	GSM850	GPRS(GMSK 4 TX Slot)	Right side	1	128	824.2	28.13	28.50	1.089	-0.08	0.790	0.860
	GSM850	GPRS(GMSK 4 TX Slot)	Right side	1	251	848.8	28.14	28.50	1.086	-0.09	0.943	1.024
	GSM1900	GPRS(GMSK 4 TX Slot)	Front	1	810	1909.8	28.65	29.00	1.084	-0.03	0.732	0.793
	GSM1900	GPRS(GMSK 4 TX Slot)	Back	1	810	1909.8	28.65	29.00	1.084	-0.11	1.050	1.138
	GSM1900	GPRS(GMSK 4 TX Slot)	Left side	1	810	1909.8	28.65	29.00	1.084	-0.07	0.198	0.215
	GSM1900	GPRS(GMSK 4 TX Slot)	Right side	1	810	1909.8	28.65	29.00	1.084	-0.11	0.225	0.244
	GSM1900	GPRS(GMSK 4 TX Slot)	Bottom side	1	810	1909.8	28.65	29.00	1.084	-0.06	0.905	0.981
	GSM1900	GPRS(GMSK 4 TX Slot)	Back	1	512	1850.2	28.46	29.00	1.132	-0.04	1.040	1.178
08	GSM1900	GPRS(GMSK 4 TX Slot)	Back	1	661	1880	28.37	29.00	1.156	-0.03	1.030	<mark>1.191</mark>
	GSM1900	GPRS(GMSK 4 TX Slot)	Bottom side	1	512	1850.2	28.46	29.00	1.132	-0.04	1.010	1.144
	GSM1900	GPRS(GMSK 4 TX Slot)	Bottom side	1	661	1880	28.37	29.00	1.156	-0.03	0.919	1.062

### <WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA Band V	RMC12.2K	Front	1	4132	826.4	23.65	24.00	1.084	-0.03	0.528	0.572
	WCDMA Band V	RMC12.2K	Back	1	4132	826.4	23.65	24.00	1.084	-0.01	0.827	0.896
	WCDMA Band V	RMC12.2K	Left side	1	4132	826.4	23.65	24.00	1.084	-0.06	0.549	0.595
	WCDMA Band V	RMC12.2K	Right side	1	4132	826.4	23.65	24.00	1.084	-0.01	0.639	0.693
	WCDMA Band V	RMC12.2K	Bottom side	1	4132	826.4	23.65	24.00	1.084	-0.07	0.069	0.075
	WCDMA Band V	RMC12.2K	Back	1	4182	836.4	23.41	24.00	1.146	-0.08	0.782	0.896
09	WCDMA Band V	RMC12.2K	Back	1	4233	846.6	23.58	24.00	1.102	-0.05	0.861	<mark>0.948</mark>
	WCDMA Band II	RMC 12.2K	Front	1	9400	1880	22.97	23.50	1.130	0.01	0.503	0.568
	WCDMA Band II	RMC 12.2K	Back	1	9400	1880	22.97	23.50	1.130	0.06	0.735	0.830
	WCDMA Band II	RMC 12.2K	Left side	1	9400	1880	22.97	23.50	1.130	-0.06	0.148	0.167
	WCDMA Band II	RMC 12.2K	Right side	1	9400	1880	22.97	23.50	1.130	-0.06	0.184	0.208
	WCDMA Band II	RMC 12.2K	Bottom side	1	9400	1880	22.97	23.50	1.130	-0.08	0.697	0.787
10	WCDMA Band II	RMC 12.2K	Back	1	9262	1852.4	22.67	23.50	1.211	-0.02	0.757	<mark>0.916</mark>
	WCDMA Band II	RMC 12.2K	Back	1	9538	1907.6	22.73	23.50	1.194	0.01	0.656	0.783

SPORTON INTERNATIONAL (SHENZHEN) INC.

FCC ID : YHLBLUWINJR Page 31 of 44 Form version. : 140422



# SPORTON LAB. FCC SAR Test Report

# < WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b, 1Mbps	Front	1	6	2437	14.95	15.00	1.012	1.024	0.05	0.263	0.272
	WLAN2.4GHz	802.11b, 1Mbps	Back	1	6	2437	14.95	15.00	1.012	1.024	0.03	0.343	0.355
11	WLAN2.4GHz	802.11b, 1Mbps	Left Side	1	6	2437	14.95	15.00	1.012	1.024	0.07	0.389	0.40 <mark>3</mark>
	WLAN2.4GHz	802.11b, 1Mbps	Top Side	1	6	2437	14.95	15.00	1.012	1.024	-0.03	0.142	0.147

Report No. : FA471701

# <Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps DH5	Front	1	0	2402	10.22	10.5	1.066	-0.06	0.00545	0.006
12	Bluetooth	1Mbps DH5	Back	1	0	2402	10.22	10.5	1.066	0.01	0.020	0.021
	Bluetooth	1Mbps DH5	Left Side	1	0	2402	10.22	10.5	1.066	0.04	0.00598	0.006
	Bluetooth	1Mbps DH5	Top Side	1	0	2402	10.22	10.5	1.066	0.09	0.000756	0.001

# 14.3 Body Worn Accessory SAR

# <GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	GSM850	GPRS(GMSK 4 TX Slot)	Front	1	189	836.4	28.41	28.50	1.021	-0.08	0.689	0.703
	GSM850	GPRS(GMSK 4 TX Slot)	Back	1	189	836.4	28.41	28.50	1.021	-0.16	1.160	1.184
07	GSM850	GPRS(GMSK 4 TX Slot)	Back	1	128	824.2	28.13	28.50	1.089	-0.01	1.090	<mark>1.187</mark>
	GSM850	GPRS(GMSK 4 TX Slot)	Back	1	251	848.8	28.14	28.50	1.086	-0.13	1.080	1.173
	GSM1900	GPRS(GMSK 4 TX Slot)	Front	1	810	1909.8	28.65	29.00	1.084	-0.03	0.732	0.793
	GSM1900	GPRS(GMSK 4 TX Slot)	Back	1	810	1909.8	28.65	29.00	1.084	-0.11	1.050	1.138
	GSM1900	GPRS(GMSK 4 TX Slot)	Back	1	512	1850.2	28.46	29.00	1.132	-0.04	1.040	1.178
	GSM1900	GPRS(GMSK 4 TX Slot)	Back	1	661	1880	28.37	29.00	1.156	-0.03	1.030	1.191
	GSM1900	GPRS(GMSK 4 TX Slot)	Back with Headset	1	661	1880	28.37	29.00	1.156	-0.02	0.972	1.124
13	GSM1900	GPRS(GMSK 4 TX Slot)	Back with Headset	1	512	1850.2	28.46	29.00	1.132	-0.17	1.070	<mark>1.212</mark>
	GSM1900	GPRS(GMSK 4 TX Slot)	Back with Headset	1	810	1909.8	28.65	29.00	1.084	0.13	1.060	1.149

Report No. : FA471701

# <WCDMA SAR>

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WCDMA Band V	RMC12.2K	Front	1	4132	826.4	23.65	24.00	1.084	-0.03	0.528	0.572
	WCDMA Band V	RMC12.2K	Back	1	4132	826.4	23.65	24.00	1.084	-0.01	0.827	0.896
	WCDMA Band V	RMC12.2K	Back	1	4182	836.4	23.41	24.00	1.146	-0.08	0.782	0.896
09	WCDMA Band V	RMC12.2K	Back	1	4233	846.6	23.58	24.00	1.102	-0.05	0.861	<mark>0.948</mark>
	WCDMA Band II	RMC 12.2K	Front	1	9400	1880	22.97	23.50	1.130	0.01	0.503	0.568
	WCDMA Band II	RMC 12.2K	Back	1	9400	1880	22.97	23.50	1.130	0.06	0.735	0.830
10	WCDMA Band II	RMC 12.2K	Back	1	9262	1852.4	22.67	23.50	1.211	-0.02	0.757	<mark>0.916</mark>
	WCDMA Band II	RMC 12.2K	Back	1	9538	1907.6	22.73	23.50	1.194	0.01	0.656	0.783

# < WLAN SAR>

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Duty Cycle Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	WLAN2.4GHz	802.11b, 1Mbps	Front	1	6	2437	14.95	15.00	1.012	1.024	0.05	0.263	0.272
14	WLAN2.4GHz	802.11b, 1Mbps	Back	1	6	2437	14.95	15.00	1.012	1.024	0.03	0.343	0.355
	WLAN2.4GHz	802.11b, 1Mbps	Back with Headset	1	6	2437	14.95	15.00	1.012	1.024	0.01	0.203	0.210

# <Bluetooth SAR>

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor	Power Drift (dB)	Measured 1g SAR (W/kg)	Reported 1g SAR (W/kg)
	Bluetooth	1Mbps DH5	Front	1	0	2402	10.22	10.5	1.066	-0.06	0.00545	0.006
12	Bluetooth	1Mbps DH5	Back	1	0	2402	10.22	10.5	1.066	0.01	0.020	0.021
	Bluetooth	1Mbps DH5	Back with Headset	1	0	2402	10.22	10.5	1.066	-0.07	0.01	0.011

 SPORTON INTERNATIONAL (SHENZHEN) INC.

 TEL: 86-755-8637-9589 / FAX: 86-755-8637-9595
 Issuer

# 14.4 Repeated SAR Measurement

No.	Band	Mode	Test Position	Gap (cm)	LUCIO I	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Tune-up Scaling Factor		Delfs	Measured 1g SAR (W/kg)	Ratio	Reported 1g SAR (W/kg)
1st	GSM850	GPRS(GMSK 4 TX Slot)	Back	1	189	836.4	28.41	28.50	1.021	1	-0.16	1.160	1	1.184
2nd	GSM850	GPRS(GMSK 4 TX Slot)	Back	1	189	836.4	28.41	28.50	1.021	-	-0.15	1.130	1.025	1.154
1st	GSM1900	GPRS(GMSK 4 TX Slot)	Back with Headset	1	512	1850.2	28.46	29.00	1.132	-	-0.17	1.070	1	1.212
2nd	GSM1900	GPRS(GMSK 4 TX Slot)	Back with Headset	1	512	1850.2	28.46	29.00	1.132	-	-0.07	1.060	1.010	1.200
1st	WLAN2.4GHz	802.11b, 1Mbps	Right Cheek	-	6	2437	14.95	15.00	1.012	1.024	0.05	1.220	1	1.264
2nd	WLAN2.4GHz	802.11b, 1Mbps	Right Cheek	-	6	2437	14.95	15.00	1.012	1.024	0.08	1.180	1.033	1.222

**Report No.: FA471701** 

#### **General Note:**

- 1. Per KDB 865664 D01v01r03, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥0.8W/kg
- 2. Per KDB 865664 D01v01r03, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR <1.45W/kg, only one repeated measurement is required.
- 3. The ratio is the difference in percentage between original and repeated measured SAR.
- 4. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

# 15. Simultaneous Transmission Analysis

NO	Circultura and Tananaisa in Confirmation	Po	ortable Hands	set	Nete
NO.	Simultaneous Transmission Configurations	Head	Body-worn	Hotspot	Note
1.	GSM(Voice) + WLAN2.4GHz(data)	Yes	Yes		
2.	WCDMA(Voice) + WLAN2.4GHz(data)	Yes	Yes		
3.	GSM(Voice) + Bluetooth(data)	Yes	Yes		
4.	WCDMA((Voice) + Bluetooth(data)	Yes	Yes		
5.	GPRS/EDGE(Data) + WLAN2.4GHz(data)	Yes	Yes	Yes	2.4GHz Hotspot
6.	WCDMA(Data) + WLAN2.4GHz(data)	Yes	Yes	Yes	2.4GHz Hotspot
7.	GPRS/EDGE(Data) + Bluetooth(data)	Yes	Yes	Yes	Bluetooth Tethering
8.	WCDMA(Data) + Bluetooth(data)	Yes	Yes	Yes	Bluetooth Tethering

**Report No.: FA471701** 

#### **General Note:**

- 1. This device supported VoIP in GPRS, EGPRS, WCDMA, LTE (e.g. 3rd party VoIP).
- 2. This device 2.4GHz WLAN supports Hotspot operation.
- 3. WLAN and Bluetooth share the same antenna, and cannot transmit simultaneously.
- 4. EUT will choose either GSM or WCDMA according to the network signal condition; therefore, they will not transmit simultaneously at any moment.
- 5. The reported SAR summation is calculated based on the same configuration and test position.
- 6. Per KDB 447498 D01v05r02, simultaneous transmission SAR is compliant if,
  - i) Scalar SAR summation < 1.6W/kg.
  - ii) SPLSR = (SAR1 + SAR2)^1.5 / (min. separation distance, mm), and the peak separation distance is determined from the square root of [(x1-x2)2 + (y1-y2)2 + (z1-z2)2], where (x1, y1, z1) and (x2, y2, z2) are the coordinates of the extrapolated peak SAR locations in the zoom scan.
  - iii) If SPLSR ≤ 0.04, simultaneously transmission SAR measurement is not necessary.
  - iv) Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg.

# 15.1 Head Exposure Conditions

### <WWAN + WLAN>

WWA	N Band	Exposure Position	WWAN SAR (W/kg)	WLAN SAR (W/kg)	Summed SAR (W/kg)	SPLSR	Case No
		Right Cheek	0.546	1.264	<mark>1.81</mark>	0.04	#01
	COMOTO	Right Tilted	0.407	0.568	0.98		
	GSM850	Left Cheek	0.594	0.514	1.11		
CCM		Left Tilted	0.430	0.260	0.69		
GSM		Right Cheek	0.360	1.264	1.62	0.03	#02
	CCM4000	Right Tilted	0.164	0.568	0.73		
	GSM1900	Left Cheek	0.541	0.514	1.06		
		Left Tilted	0.211	0.260	0.47		
		Right Cheek	0.467	1.264	1.73	0.04	#03
	Band V	Right Tilted	0.349	0.568	0.92		
	banu v	Left Cheek	0.461	0.514	0.98		
WCMDA		Left Tilted	0.330	0.260	0.59		
WCIVIDA		Right Cheek	0.407	1.264	<mark>1.67</mark>	0.03	#04
	Band II	Right Tilted	0.158	0.568	0.73		
	Dalla II	Left Cheek	0.451	0.514	0.97		
		Left Tilted	0.184	0.260	0.44		

Report No. : FA471701

### <WWAN + Bluetooth>

WWAN + Bluetooth>		Exposure Position	WWAN	Bluetooth	Summed SAR (W/kg)	SPLSR	Case No
			SAR (W/kg)	SAR (W/kg)			
GSM	GSM850	Right Cheek	0.546	0.099	0.65		
		Right Tilted	0.407	0.043	0.45		
		Left Cheek	0.594	0.046	0.64		
		Left Tilted	0.430	0.029	0.46		
	GSM1900	Right Cheek	0.360	0.099	0.46		
		Right Tilted	0.164	0.043	0.21		
		Left Cheek	0.541	0.046	0.59		
		Left Tilted	0.211	0.029	0.24		
WCMDA	Band V	Right Cheek	0.467	0.099	0.57		
		Right Tilted	0.349	0.043	0.39		
		Left Cheek	0.461	0.046	0.51		
		Left Tilted	0.330	0.029	0.36		
	Band II	Right Cheek	0.407	0.099	0.51		
		Right Tilted	0.158	0.043	0.20		
		Left Cheek	0.451	0.046	0.50		
		Left Tilted	0.184	0.029	0.21		

# 15.2 Hotspot Exposure Conditions

### <WWAN + WLAN>

1AWW	WWAN Band		WWAN SAR (W/kg)	WLAN SAR (W/kg)	Summed SAR (W/kg)	SPLSR	Case No
		Front	0.703	0.272	0.98		
		Back	1.187	0.355	1.54		
	GSM850	Left side	0.778	0.403	1.18		
	GSIVI650	Right side	1.024		1.02		
		Top side		0.147	0.15		
CCM		Bottom side	0.108		0.11		
GSM		Front	0.793	0.272	1.07		
		Back	1.191	0.355	1.55		
	GSM1900	Left side	0.215	0.403	0.62		
		Right side	0.244		0.24		
		Top side		0.147	0.15		
		Bottom side	1.144		1.14		
	5	Front	0.572	0.272	0.84		
		Back	0.948	0.355	1.30		
		Left side	0.595	0.403	1.00		
	Band V	Right side	0.693		0.69		
		Top side		0.147	0.15		
WCMDA		Bottom side	0.075		0.08		
WCIVIDA		Front	0.568	0.272	0.84		
		Back	0.916	0.355	1.27		
	Dandill	Left side	0.167	0.403	0.57		
	Band II	Right side	0.208		0.21		
		Top side		0.147	0.15		
		Bottom side	0.787		0.79		

Report No. : FA471701

#### <WWAN + Bluetooth>

			WWAN	Bluetooth	Summed		
WWA	N Band	Exposure Position	SAR (W/kg)	SAR (W/kg)	SAR (W/kg)	SPLSR	Case No
		Front	0.703	0.006	0.71		
		Back	1.187	0.021	1.21		
	GSM850	Left side	0.778	0.006	0.78		
	GSIVIOSU	Right side	1.024		1.02		
		Top side		0.001	0.00		
GSM		Bottom side	0.108		0.11		
GSIVI		Front	0.793	0.006	0.80		
		Back	1.191	0.021	1.21		
	GSM1900	Left side	0.215	0.006	0.22		
	GSW1900	Right side	0.244		0.24		
		Top side		0.001	0.00		
		Bottom side	1.144		1.14		
		Front	0.572	0.006	0.58		
		Back	0.948	0.021	0.97		
	Band V	Left side	0.595	0.006	0.60		
	Band v	Right side	0.693		0.69		
		Top side		0.001	0.00		
WCMDA		Bottom side	0.075		0.08		
VVCIVIDA		Front	0.568	0.006	0.57		
		Back	0.916	0.021	0.94		
	Band II	Left side	0.167	0.006	0.17		
	Band II	Right side	0.208		0.21		
		Top side		0.001	0.00		
		Bottom side	0.787		0.79		

Report No. : FA471701



# 15.3 Body-Worn Accessory Exposure Conditions

### < WWAN + WLAN >

WWAN Band		Exposure Position	WWAN SAR (W/kg)	WLAN SAR (W/kg)	Summed SAR (W/kg)	SPLSR	Case No
	GSM850	Front	0.703	0.272	0.98		
	GSIVIOSU	Back	1.187	0.355	1.54		
GSM	GSM1900	Front	0.793	0.272	1.07		
		Back	1.191	0.355	1.55		
		Back with Headset	1.212	0.210	1.42		
	Band V	Front	0.572	0.272	0.84		
WCMDA	Band v	Back	0.948	0.355	1.30		
	Band II	Front	0.568	0.272	0.84		
		Back	0.916	0.355	1.27		

Report No. : FA471701

### <WWAN + Bluetooth>

			WWAN	WWAN Bluetooth			
WW	AN Band	Exposure Position	SAR (W/kg)	SAR (W/kg)	Summed SAR (W/kg)	SPLSR	Case No
	GSM850	Front	0.703	0.006	0.71		
	GSIVIOSO	Back	1.187	0.021	1.21		
GSM		Front	0.793	0.006	0.80		
	GSM1900	Back	1.191	0.021	1.21		
		Back with Headset	1.212	0.011	1.22		
	Dand \/	Front	0.572	0.006	0.58		
WCMDA	Band V	Back	0.948	0.021	0.97		
WCIVIDA	Band II	Front	0.568	0.006	0.57		
		Back	0.916	0.021	0.94		

# 15.4 SPLSR Evaluation and Analysis

0 dB = 1.69 W/kg

### **General Note:**

1.  $SPLSR = (SAR_1 + SAR_2)^{1.5} / (min. separation distance, mm)$ . If  $SPLSR \le 0.04$ , simultaneously transmission SAR measurement is not necessary

**Report No. : FA471701** 

	Band Position		Band Position SAR Gap		SAR p	SAR peak location (m)			Summed SAR	SPLSR	Simultaneous
Case No.	band	Position	(W/kg)	(cm)	X	Y	Z	distance (mm)	(W/kg)	Results	SAR
#01	GSM850	Right Cheek	0.546	ı	0.066	-0.268	-0.173	55.2	1.81	0.04	Not required
	WLAN2.4GHz	Kigiit Crieek	1.264	-	0.0389	-0.316	-0.175	33.2	1.01	0.04	Not required
-7 -1					WLAN	12.4GHz					


	Band	Position	s SAR		ap SAR peak location (m)			3D distance	Summed SAR	SPLSR	Simultaneous
Case No.	Dano	Position	(W/kg)	(cm)	Х	Y	Z	(mm)	(W/kg)	Results	SAR
#02	GSM1900	Right Cheek	0.360	ı	0.07	-0.248	-0.17	74.9	1.62	0.03	Not required
	WLAN2.4GHz	Right Officer	1.264	-	0.0389	-0.316	-0.175	74.5	1.02	0.03	Not required
-6 -9 -1	.06 .11 .17 2.22 5.28	3 = 0.407 W	7/kg		WLA	N2.4GHz					


TEL: 86-755-8637-9589 / FAX: 86-755-8637-9595

Issued Date: Aug. 14, 2014 FCC ID: YHLBLUWINJR Page 40 of 44 Form version. : 140422

FCC SAR Test Report

# Report No. : FA471701

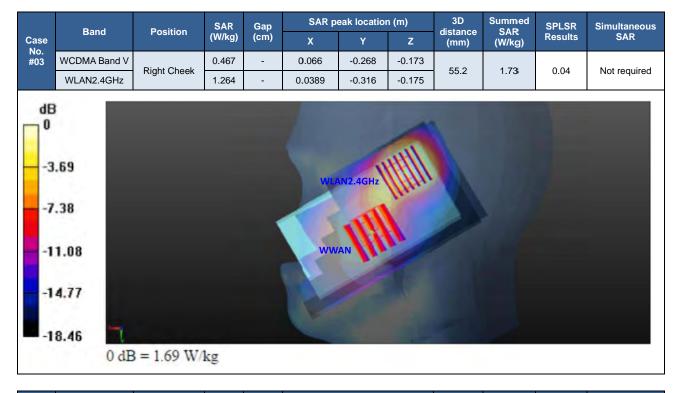

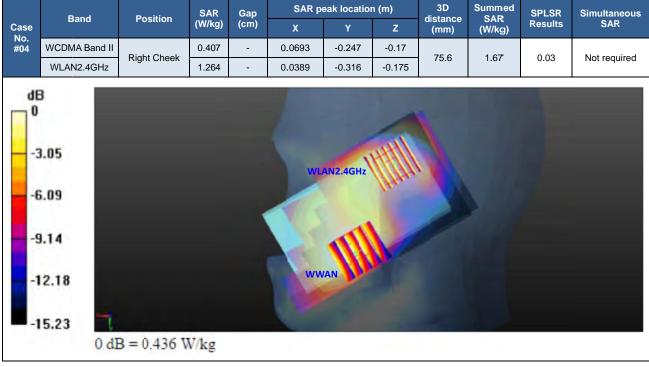

Test Engineer: Luke Lu

TEL: 86-755-8637-9589 / FAX: 86-755-8637-9595

Issued Date: Aug. 14, 2014 FCC ID: YHLBLUWINJR Form version.: 140422 Page 41 of 44

# 16. Uncertainty Assessment

The component of uncertainly may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainly by the statistical analysis of a series of observations is termed a Type An evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

Report No.: FA471701

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience, and knowledge of the behavior and properties of relevant materials and instruments, manufacture's specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in table below.

<b>Uncertainty Distributions</b>	Normal	Rectangular	Triangular	U-Shape
Multi-plying Factor <sup>(a)</sup>	1/k <sup>(b)</sup>	1/√3	1/√6	1/√2

- (a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity
- (b)  $\kappa$  is the coverage factor

#### **Table 14.1. Standard Uncertainty for Assumed Distribution**

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual "root-sum-squares" (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is shown in the following tables.

ort No. : FA471701
--------------------

Error Description	Uncertainty Value (±%)	Probability Distribution	Divisor	Ci (1g)	Ci (10g)	Standard Uncertainty (1g)	Standard Uncertainty (10g)
Measurement System	•				•	•	
Probe Calibration	6.0	Normal	1	1	1	± 6.0 %	± 6.0 %
Axial Isotropy	4.7	Rectangular	√3	0.7	0.7	± 1.9 %	± 1.9 %
Hemispherical Isotropy	9.6	Rectangular	√3	0.7	0.7	± 3.9 %	± 3.9 %
Boundary Effects	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Linearity	4.7	Rectangular	√3	1	1	± 2.7 %	± 2.7 %
System Detection Limits	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Readout Electronics	0.3	Normal	1	1	1	± 0.3 %	± 0.3 %
Response Time	0.8	Rectangular	√3	1	1	± 0.5 %	± 0.5 %
Integration Time	2.6	Rectangular	√3	1	1	± 1.5 %	± 1.5 %
RF Ambient Noise	3.0	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
RF Ambient Reflections	3.0	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
Probe Positioner	0.4	Rectangular	√3	1	1	± 0.2 %	± 0.2 %
Probe Positioning	2.9	Rectangular	√3	1	1	± 1.7 %	± 1.7 %
Max. SAR Eval.	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %
Test Sample Related							
Device Positioning	2.9	Normal	1	1	1	± 2.9 %	± 2.9 %
Device Holder	3.6	Normal	1	1	1	± 3.6 %	± 3.6 %
Power Drift	5.0	Rectangular	√3	1	1	± 2.9 %	± 2.9 %
Phantom and Setup							
Phantom Uncertainty	4.0	Rectangular	√3	1	1	± 2.3 %	± 2.3 %
Liquid Conductivity (Target)	5.0	Rectangular	√3	0.64	0.43	± 1.8 %	± 1.2 %
Liquid Conductivity (Meas.)	2.5	Normal	1	0.64	0.43	± 1.6 %	± 1.1 %
Liquid Permittivity (Target)	5.0	Rectangular	√3	0.6	0.49	± 1.7 %	± 1.4 %
Liquid Permittivity (Meas.)	2.5	Normal	1	0.6	0.49	± 1.5 %	± 1.2 %
<b>Combined Standard Uncertainty</b>	± 11.0 %	± 10.8 %					
Coverage Factor for 95 %	K:	=2					
Expanded Uncertainty						± 22.0 %	± 21.5 %

Table 14.2. Uncertainty Budget for frequency range 300 MHz to 3 GHz

# 17. References

[1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"

Report No.: FA471701

- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2003, "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- [4] SPEAG DASY System Handbook
- [5] FCC KDB 248227 D01 v01r02, "SAR Measurement Procedures for 802.11 a/b/g Transmitters", May 2007
- [6] FCC KDB 447498 D01 v05r02, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", Feb 2014
- [7] FCC KDB 648474 D04 v01r02, "SAR Evaluation Considerations for Wireless Handsets", Dec 2013.
- [8] FCC KDB 941225 D01 v02, "SAR Measurement Procedures for 3G Devices CDMA 2000 / Ev-Do / WCDMA / HSDPA / HSPA", October 2007
- [9] FCC KDB 941225 D02 v02r02, "SAR Guidance for HSPA, HSPA+, DC-HSDPA and 1x-Advanced", May 2013.
- [10] FCC KDB 941225 D03 v01, "Recommended SAR Test Reduction Procedures for GSM / GPRS / EDGE", December 2008
- [11] FCC KDB 941225 D06 v01r01, "SAR Evaluation Procedures for Portable Devices with Wireless Router Capabilities", May 2013.
- [12] FCC KDB 865664 D01 v01r03, "SAR Measurement Requirements for 100 MHz to 6 GHz", Feb 2014.
- [13] FCC KDB 865664 D02 v01r01, "RF Exposure Compliance Reporting and Documentation Considerations" May 2013.

# Appendix A. Plots of System Performance Check

Report No. : FA471701

The plots are shown as follows.

SPORTON INTERNATIONAL (SHENZHEN) INC.

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2014/8/2

### System Check Head 835MHz 140802

### **DUT: D835V2 - SN:4d151**

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL\_835\_140802 Medium parameters used: f = 835 MHz;  $\sigma = 0.916$  S/m;  $\epsilon_r = 41.029$ ;  $\rho = 0.916$  S/m;  $\epsilon_r = 41.029$ ;  $\epsilon_r = 41.029$ 

 $1000 \text{ kg/m}^3$ 

Ambient Temperature: 23.5 °C; Liquid Temperature: 22.5 °C


### DASY5 Configuration:

- Probe: EX3DV4 SN3911; ConvF(9.84, 9.84, 9.84); Calibrated: 2014/4/22;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2014/4/30
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1754
- Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

**Pin=250mW/Area Scan (61x61x1):** Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 3.05 W/kg

**Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 58.522 V/m; Power Drift = -0.05 dB Peak SAR (extrapolated) = 3.57 W/kg

SAR(1 g) = 2.4 W/kg; SAR(10 g) = 1.59 W/kgMaximum value of SAR (measured) = 3.03 W/kg

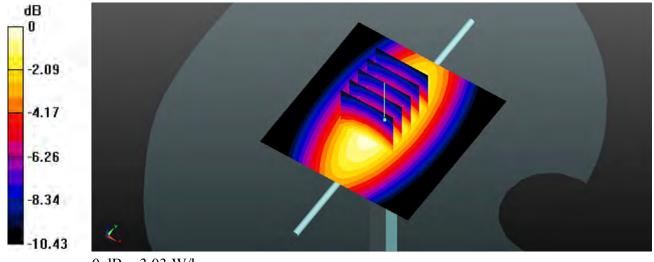

0 dB = 3.03 W/kg

Test Laboratory: Sporton International Inc. SAR/HAC Testing Lab Date: 2014/8/8

### System Check Head 835MHz 140808

### **DUT: D835V2 - SN:4d151**

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL 835 140808 Medium parameters used: f = 835 MHz;  $\sigma = 0.913$  S/m;  $\varepsilon_r = 40.859$ ;  $\rho =$ 

 $1000 \text{ kg/m}^3$ 

Ambient Temperature: 23.5 °C; Liquid Temperature: 22.6 °C


### DASY5 Configuration:

- Probe: EX3DV4 SN3911; ConvF(9.84, 9.84, 9.84); Calibrated: 2014/4/22;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2014/4/30
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1754
- Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 3.04 W/kg

Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 58.522 V/m; Power Drift = -0.05 dB Peak SAR (extrapolated) = 3.56 W/kg

SAR(1 g) = 2.39 W/kg; SAR(10 g) = 1.58 W/kgMaximum value of SAR (measured) = 3.02 W/kg

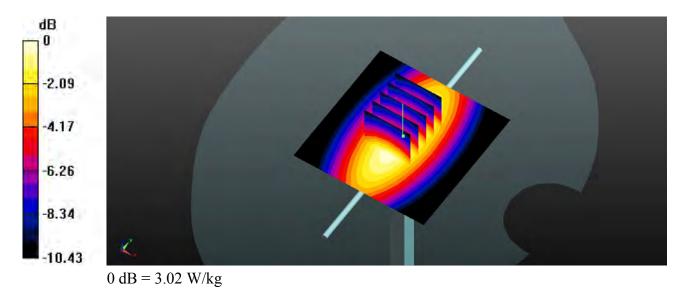

### System Check Head 1900MHz 140802

### **DUT: D1900V2 - SN:5d170**

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL\_1900\_140802 Medium parameters used: f = 1900 MHz;  $\sigma = 1.427$  S/m;  $\epsilon_r = 41.191$ ;  $\rho$ 

 $= 1000 \text{ kg/m}^3$ 

Ambient Temperature: 23.6°C; Liquid Temperature: 22.7°C


### DASY5 Configuration:

- Probe: EX3DV4 SN3911; ConvF(8.09, 8.09, 8.09); Calibrated: 2014/4/22;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2014/4/30
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1754
- Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

**Pin=250mW/Area Scan (61x61x1):** Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 14.1 W/kg

**Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 100.8 V/m; Power Drift = -0.11 dB Peak SAR (extrapolated) = 17.7 W/kg

SAR(1 g) = 9.78 W/kg; SAR(10 g) = 5.12 W/kgMaximum value of SAR (measured) = 13.9 W/kg

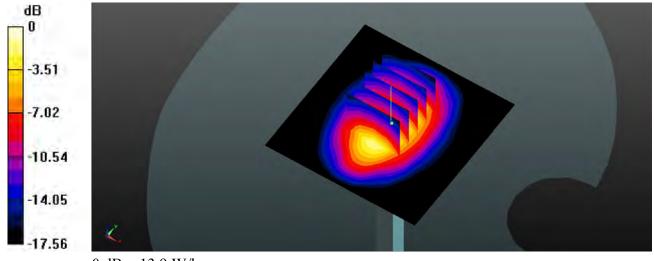

0 dB = 13.9 W/kg

### System Check Head 2450MHz 140801

### **DUT: D2450V2 - SN:908**

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: HSL\_2450\_140801 Medium parameters used: f = 2450 MHz;  $\sigma = 1.878$  S/m;  $\epsilon_r = 40.464$ ;

 $\rho = 1000 \text{ kg/m}^3$ 

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.6 °C


### DASY5 Configuration:

- Probe: EX3DV4 SN3819; ConvF(7.22, 7.22, 7.22); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2013.11.22
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

# **Pin=250mW/Area Scan (81x81x1):** Interpolated grid: dx=12mm, dy=12mm Maximum value of SAR (interpolated) = 19.5 W/kg

Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 86.409 V/m; Power Drift = 0.00 dB Peak SAR (extrapolated) = 26.1 W/kg SAR(1 g) = 12.6 W/kg; SAR(10 g) = 5.85 W/kg

SAR(1 g) = 12.6 W/kg; SAR(10 g) = 5.85 W/kg Maximum value of SAR (measured) = 19.3 W/kg

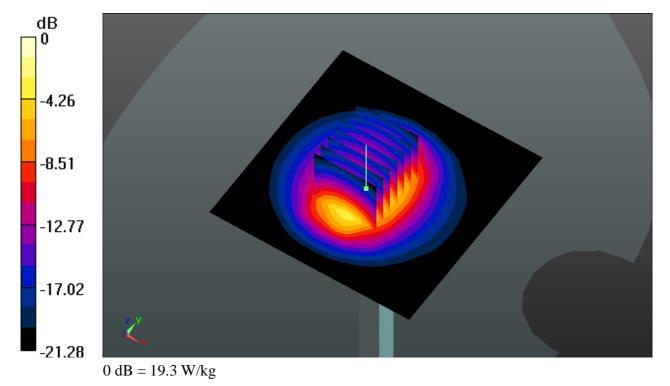

### System Check Head 2450MHz 140812

### **DUT: D2450V2 - SN:908**

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: HSL 2450 140812 Medium parameters used: f = 2450 MHz;  $\sigma = 1.829$  S/m;  $\varepsilon_r = 40.081$ ;

 $\rho = 1000 \text{ kg/m}^3$ 

Ambient Temperature: 23.5 °C; Liquid Temperature: 22.7 °C


### DASY5 Configuration:

- Probe: EX3DV4 SN3819; ConvF(7.22, 7.22, 7.22); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2013.11.22
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

# Pin=250mW/Area Scan (81x81x1): Interpolated grid: dx=12mm, dy=12mm Maximum value of SAR (interpolated) = 19.3 W/kg

Pin=250mW/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 87.152 V/m; Power Drift = -0.03 dB Peak SAR (extrapolated) = 26.1 W/kgSAR(1 g) = 12.4 W/kg; SAR(10 g) = 5.71 W/kg

Maximum value of SAR (measured) = 19.1 W/kg

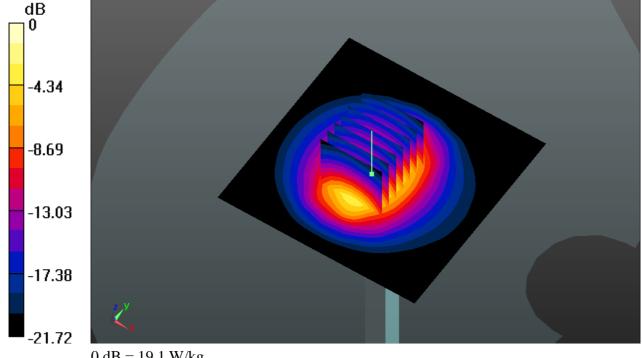

0 dB = 19.1 W/kg

### System Check Body 835MHz 140801

### **DUT: D835V2 - SN:4d151**

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: MSL\_835\_140801 Medium parameters used: f = 835 MHz;  $\sigma = 0.973$  S/m;  $\epsilon_r = 54.088$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Ambient Temperature: 23.5 °C; Liquid Temperature: 22.6 °C


### DASY5 Configuration:

- Probe: EX3DV4 SN3911; ConvF(10.02, 10.02, 10.02); Calibrated: 2014/4/22;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2014/4/30
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1753
- Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

**Pin=250mW/Area Scan (61x61x1):** Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 2.52 W/kg

**Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 50.553 V/m; Power Drift = -0.07 dB Peak SAR (extrapolated) = 3.40 W/kg

SAR(1 g) = 2.31 W/kg; SAR(10 g) = 1.55 W/kgMaximum value of SAR (measured) = 2.49 W/kg

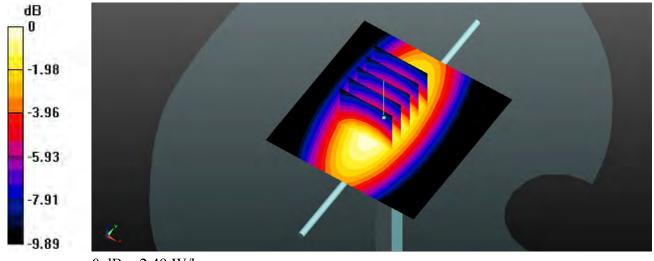

0 dB = 2.49 W/kg

### System Check Body 835MHz 140809

### **DUT: D835V2 - SN:4d151**

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: MSL\_835\_140809 Medium parameters used: f = 835 MHz;  $\sigma = 0.974$  S/m;  $\epsilon_r = 54.111$ ;  $\rho = 0.974$  S/m;  $\epsilon_r = 54.111$ ;  $\epsilon_r = 54.111$ 

 $1000 \text{ kg/m}^3$ 

Ambient Temperature: 23.5 °C; Liquid Temperature: 22.6 °C

### DASY5 Configuration:

- Probe: EX3DV4 SN3911; ConvF(10.02, 10.02, 10.02); Calibrated: 2014/4/22;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2014/4/30
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1753
- Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)


**Pin=250mW/Area Scan (61x61x1):** Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 2.53 W/kg

**Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 50.506 V/m; Power Drift = -0.06 dB

Peak SAR (extrapolated) = 3.41 W/kg

SAR(1 g) = 2.33 W/kg; SAR(10 g) = 1.56 W/kg

Maximum value of SAR (measured) = 2.50 W/kg

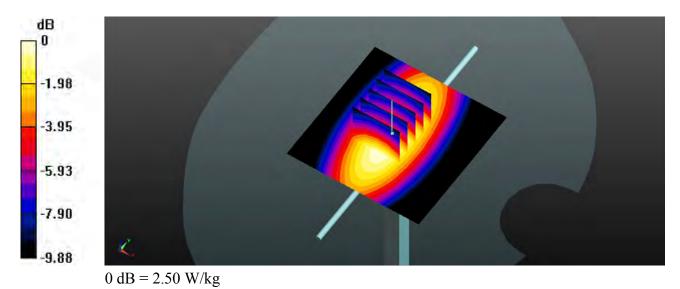

### System Check Body 1900MHz 140801

### **DUT: D1900V2 - SN:5d170**

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: MSL\_1900\_140801 Medium parameters used: f = 1900 MHz;  $\sigma = 1.528$  S/m;  $\epsilon_r = 53.974$ ;  $\rho$ 

 $= 1000 \text{ kg/m}^3$ 

Ambient Temperature: 23.6°C; Liquid Temperature: 22.7°C

### DASY5 Configuration:

- Probe: EX3DV4 SN3911; ConvF(7.83, 7.83, 7.83); Calibrated: 2014/4/22;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2014/4/30
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1754
- Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)


**Pin=250mW/Area Scan (61x61x1):** Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 13.0 W/kg

**Pin=250mW/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 81.139 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 16.4 W/kg

SAR(1 g) = 9.59 W/kg; SAR(10 g) = 4.88 W/kg

Maximum value of SAR (measured) = 13.0 W/kg

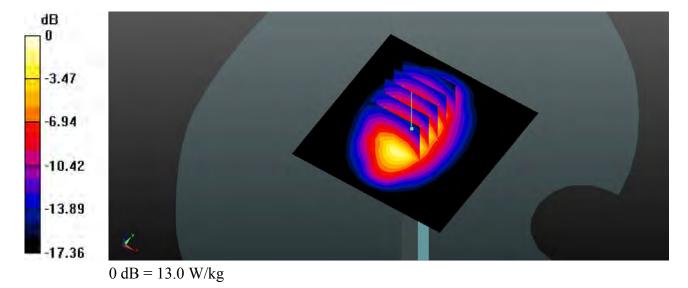

### System Check Body 2450MHz 140801

### **DUT: D2450V2 - SN:908**

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

Medium: MSL\_2450\_140801 Medium parameters used: f = 2450 MHz;  $\sigma = 2.013$  S/m;  $\epsilon_r = 51.474$ ;

 $\rho = 1000 \text{ kg/m}^3$ 

Ambient Temperature: 23.5 °C; Liquid Temperature: 22.7 °C


### DASY5 Configuration:

- Probe: EX3DV4 SN3819; ConvF(7.07, 7.07, 7.07); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2013.11.22
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

# **Pin=250mW/Area Scan (81x81x1):** Interpolated grid: dx=12mm, dy=12mm Maximum value of SAR (interpolated) = 18.9 W/kg

**Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 82.870 V/m; Power Drift = -0.01 dB Peak SAR (extrapolated) = 25.1 W/kg SAP(1 g) = 12.6 W/kg: SAP(10 g) = 5.95 W/kg

SAR(1 g) = 12.6 W/kg; SAR(10 g) = 5.95 W/kgMaximum value of SAR (measured) = 19.0 W/kg

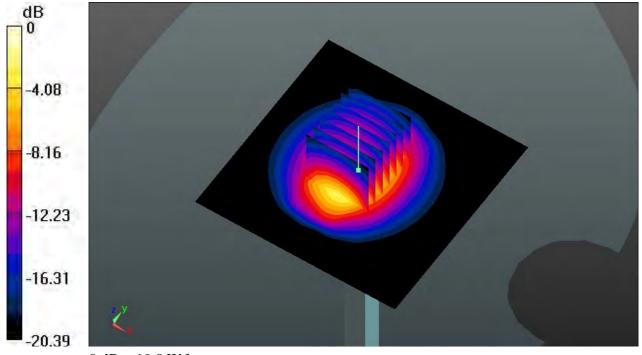

0 dB = 19.0 W/kg

### System Check Body 2450MHz 140812

### **DUT: D2450V2 - SN:908**

Communication System: UID 0, CW; Frequency: 2450 MHz; Duty Cycle: 1:1

 $Medium:\ MSL\_2450\_140812\ Medium\ parameters\ used:\ f=2450\ MHz;\ \sigma=1.977\ S/m;\ \epsilon_r=51.617;$ 

 $\rho = 1000 \text{ kg/m}^3$ 

Ambient Temperature: 23.5 °C; Liquid Temperature: 22.8 °C


### DASY5 Configuration:

- Probe: EX3DV4 SN3819; ConvF(7.07, 7.07, 7.07); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2013.11.22
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

# **Pin=250mW/Area Scan (81x81x1):** Interpolated grid: dx=12mm, dy=12mm Maximum value of SAR (interpolated) = 18.6 W/kg

**Pin=250mW/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 82.870 V/m; Power Drift = -0.01 dB Peak SAR (extrapolated) = 24.7 W/kg SAR(1 g) = 12.4 W/kg; SAR(10 g) = 5.84 W/kg

SAR(1 g) = 12.4 W/kg; SAR(10 g) = 5.84 W/kg Maximum value of SAR (measured) = 18.7 W/kg

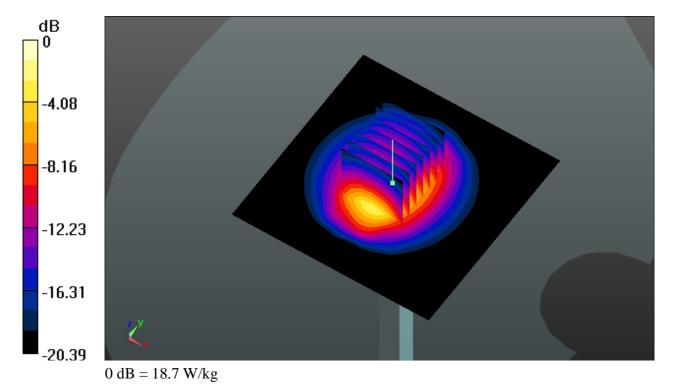

# Appendix B. Plots of High SAR Measurement

Report No. : FA471701

The plots are shown as follows.

SPORTON INTERNATIONAL (SHENZHEN) INC.

# 01 GSM850\_GPRS(GMSK 4 TX Slot)\_Left Cheek\_Ch189

Communication System: GPRS (GMSK 4 Tx slot); Frequency: 836.4 MHz; Duty Cycle: 1:2.08 Medium: HSL\_835\_140808 Medium parameters used: f = 836.6 MHz;  $\sigma = 0.914$  S/m;  $\epsilon_r = 40.842$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Date: 2014/8/8


Ambient Temperature: 23.5 °C; Liquid Temperature: 22.6 °C

### DASY5 Configuration:

- Probe: EX3DV4 SN3911; ConvF(9.84, 9.84, 9.84); Calibrated: 2014/4/22;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2014/4/30
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1754
- Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

**Ch189/Area Scan (61x101x1):** Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 0.649 W/kg

Ch189/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 6.890 V/m; Power Drift = 0.05 dB Peak SAR (extrapolated) = 1.98 W/kg SAR(1 g) = 0.582 W/kg; SAR(10 g) = 0.455 W/kg Maximum value of SAR (measured) = 0.651 W/kg

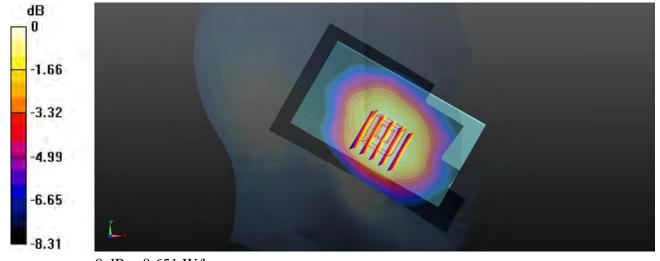

0 dB = 0.651 W/kg

# 02 GSM1900\_GPRS(GMSK 4 TX Slot)\_Left Cheek\_Ch810

Communication System: GPRS (GMSK 4 Tx slot); Frequency: 1909.8 MHz; Duty Cycle: 1:2.08 Medium: HSL\_1900\_140802 Medium parameters used: f = 192; 0 MHz;  $\sigma = 1.436$  S/m;  $\epsilon_r = 41.187$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Date: 2014/8/2


Ambient Temperature: 23.6°C; Liquid Temperature: 22.7°C

### DASY5 Configuration:

- Probe: EX3DV4 SN3911; ConvF(8.09, 8.09, 8.09); Calibrated: 2014/4/22;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2014/4/30
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1754
- Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

**Ch810/Area Scan (61x101x1):** Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 0.645 W/kg

Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 8.622 V/m; Power Drift = -0.02 dB Peak SAR (extrapolated) = 0.979 W/kg SAR(1 g) = 0.499 W/kg; SAR(10 g) = 0.332 W/kg Maximum value of SAR (measured) = 0.586 W/kg

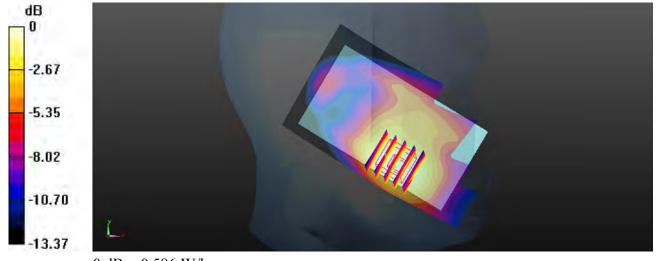

0 dB = 0.586 W/kg

# 03 WCDMA Band V\_RMC 12.2K\_Right Cheek\_Ch4132

Communication System: WCDMA; Frequency: 826.4 MHz; Duty Cycle: 1:1

Medium: HSL\_835\_140802 Medium parameters used: f = 826.4 MHz;  $\sigma = 0.908$  S/m;  $\varepsilon_r = 41.122$ ;  $\rho$ 

Date: 2014/8/2

 $= 1000 \text{ kg/m}^3$ 

Ambient Temperature: 23.5 °C; Liquid Temperature: 22.5 °C

### DASY5 Configuration:

- Probe: EX3DV4 SN3911; ConvF(9.84, 9.84, 9.84); Calibrated: 2014/4/22;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2014/4/30
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1754
- Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

**Ch4132/Area Scan (61x101x1):** Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 0.479 W/kg


Ch4132/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.608 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.516 W/kg

SAR(1 g) = 0.431 W/kg; SAR(10 g) = 0.340 W/kg

Maximum value of SAR (measured) = 0.481 W/kg

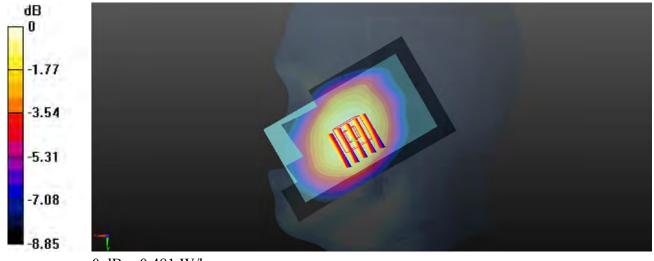

0 dB = 0.481 W/kg

# 04 WCDMA Band II\_RMC 12.2K\_Left Cheek\_Ch9400

Communication System: WCDMA; Frequency: 1880 MHz; Duty Cycle: 1:1

Medium: HSL\_1900\_140802 Medium parameters used: f = 1880 MHz;  $\sigma = 1.402$  S/m;  $\epsilon_r = 41.184$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Date: 2014/8/2

Ambient Temperature: 23.6°C; Liquid Temperature: 22.7°C


### DASY5 Configuration:

- Probe: EX3DV4 SN3911; ConvF(8.09, 8.09, 8.09); Calibrated: 2014/4/22;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2014/4/30
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1754
- Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Ch9400/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 0.531 W/kg

**Ch9400/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 8.070 V/m; Power Drift = -0.08 dB Peak SAR (extrapolated) = 0.551 W/kg

SAR(1 g) = 0.399 W/kg; SAR(10 g) = 0.270 W/kgMaximum value of SAR (measured) = 0.476 W/kg

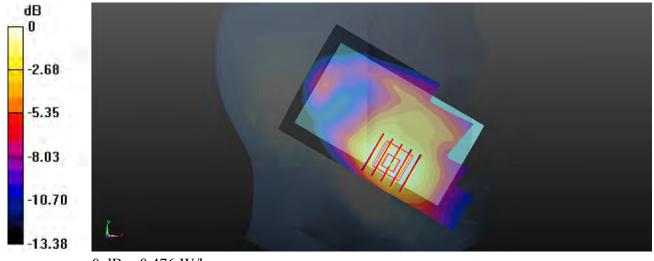

0 dB = 0.476 W/kg

### 05 WLAN2.4GHz 802.11b 1Mbps Right Cheek Ch6

Communication System: UID 0, WIFI (0); Frequency: 2437 MHz; Duty Cycle: 1:1.024

Medium: HSL\_2450\_140801 Medium parameters used: f = 2437 MHz;  $\sigma = 1.863$  S/m;  $\epsilon_r = 40.52$ ;  $\rho$ 

Date: 2014.08.01

 $= 1000 \text{ kg/m}^3$ 

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.6 °C

### DASY5 Configuration:

- Probe: EX3DV4 SN3819; ConvF(7.22, 7.22, 7.22); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2013.11.22
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Ch6/Area Scan (71x131x1):** Interpolated grid: dx=12mm, dy=12mm Maximum value of SAR (interpolated) = 1.62 W/kg


Ch6/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 2.071 V/m; Power Drift = 0.05 dB

Peak SAR (extrapolated) = 2.03 W/kg

SAR(1 g) = 1.220 W/kg; SAR(10 g) = 0.638 W/kg

Maximum value of SAR (measured) = 1.69 W/kg

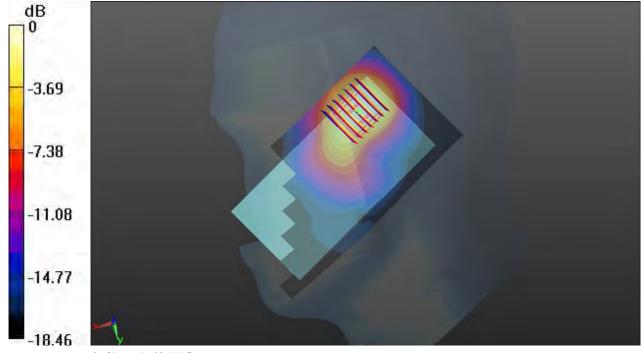

0 dB = 1.69 W/kg

### 06 Bluetooth 1Mbps Right Cheek Ch0

Communication System: UID 0, Bluetooth (0); Frequency: 2402 MHz; Duty Cycle: 1:1.2

Medium:  $HSL_{2}2450_{1}40812$  Medium parameters used: f = 2402 MHz;  $\sigma = 1.774$  S/m;  $\epsilon_r = 40.247$ ;

Date: 2014.08.12

 $\rho = 1000 \text{ kg/m}^3$ 

Ambient Temperature: 23.5 °C; Liquid Temperature: 22.7 °C

### DASY5 Configuration:

- Probe: EX3DV4 SN3819; ConvF(7.22, 7.22, 7.22); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2013.11.22
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Ch0/Area Scan (71x131x1):** Interpolated grid: dx=12mm, dy=12mm Maximum value of SAR (interpolated) = 0.334 W/kg


Ch0/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 1.046 V/m; Power Drift = 0.13 dB

Peak SAR (extrapolated) = 0.179 W/kg

SAR(1 g) = 0.093 W/kg; SAR(10 g) = 0.031 W/kg

Maximum value of SAR (measured) = 0.133 W/kg

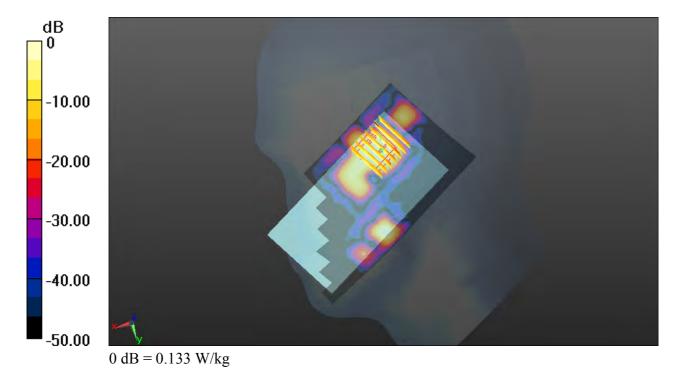

### 07 GSM850 GPRS(GMSK 4 TX Slot) Back 1.0cm Ch128

Communication System: GPRS (GMSK 4 Tx slot); Frequency: 824.2 MHz; Duty Cycle: 1:2.08 Medium: MSL\_835\_140809 Medium parameters used: f = 824.2 MHz;  $\sigma = 0.964$  S/m;  $\epsilon_r = 54.201$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Date: 2014/8/9

Ambient Temperature : 23.5 °C; Liquid Temperature : 22.6 °C

### DASY5 Configuration:

- Probe: EX3DV4 SN3911; ConvF(10.02, 10.02, 10.02); Calibrated: 2014/4/22;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2014/4/30
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1753
- Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

**Ch128/Area Scan (61x101x1):** Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 1.23 W/kg

Ch128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 30.858 V/m; Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.30 W/kg

SAR(1 g) = 1.090 W/kg; SAR(10 g) = 0.866 W/kg

Maximum value of SAR (measured) = 1.23 W/kg


Ch128/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 30.858 V/m: Power Drift = -0.01 dB

Peak SAR (extrapolated) = 1.31 W/kg

SAR(1 g) = 1.02 W/kg; SAR(10 g) = 0.774 W/kg

Maximum value of SAR (measured) = 1.21 W/kg

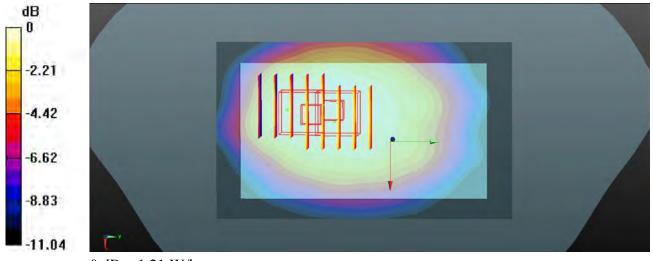

0 dB = 1.21 W/kg

# 08 GSM1900\_GPRS(GMSK 4 TX Slot)\_Back\_1.0cm\_Ch661

Communication System: GPRS (GMSK 4 Tx slot); Frequency: 1880 MHz; Duty Cycle: 1:2.08 Medium: MSL\_1900\_140801 Medium parameters used: f = 1880 MHz;  $\sigma = 1.507$  S/m;  $\epsilon_r = 54.011$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Date: 2014/8/1

Ambient Temperature: 23.6°C; Liquid Temperature: 22.7°C


### DASY5 Configuration:

- Probe: EX3DV4 SN3911; ConvF(7.83, 7.83, 7.83); Calibrated: 2014/4/22;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2014/4/30
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1754
- Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

**Ch661/Area Scan (61x101x1):** Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 1.36 W/kg

Ch661/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 11.491 V/m; Power Drift = -0.03 dB Peak SAR (extrapolated) = 1.45 W/kg SAR(1 g) = 1.030 W/kg; SAR(10 g) = 0.690 W/kg

Maximum value of SAR (measured) = 1.29 W/kg

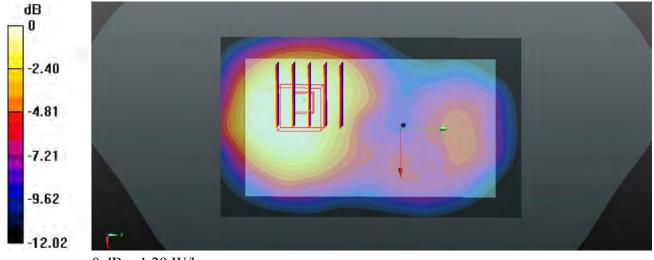

0 dB = 1.29 W/kg

# 29 WCDMA Band V\_RMC 12.2K\_Back\_1.0cm\_Ch4233

Communication System: WCDMA; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: MSL\_835\_140801 Medium parameters used: f = 84808 MHz;  $\sigma = 0.983$  S/m;  $\epsilon_r = 53.987$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Date: 2014/8/1

Ambient Temperature: 23.5 °C; Liquid Temperature: 22.6 °C

### DASY5 Configuration:

- Probe: EX3DV4 SN3911; ConvF(10.02, 10.02, 10.02); Calibrated: 2014/4/22;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2014/4/30
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1753
- Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)


Ch4233/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 0.998 W/kg

**Ch4233/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 27.761 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 1.04 W/kg

SAR(1 g) = 0.861 W/kg; SAR(10 g) = 0.673 W/kg

Maximum value of SAR (measured) = 0.976 W/kg

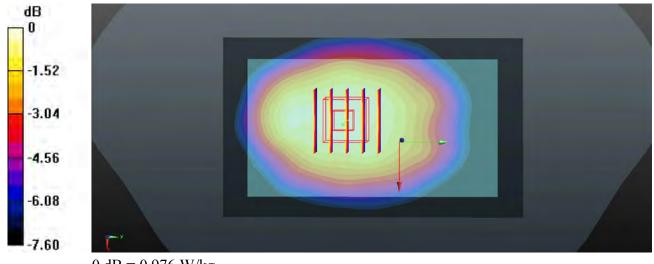

0 dB = 0.976 W/kg

# 06 WCDMA Band II\_RMC 12.2K\_Back\_1.0cm\_Ch9262

Communication System: WCDMA; Frequency: 1852.4 MHz; Duty Cycle: 1:1

Medium: MSL\_1900\_140801 Medium parameters used: f = 1852.4 MHz; σ = 1.472 S/m;  $ε_r = 54.075$ ;

Date: 2014/8/1

 $\rho = 1000 \text{ kg/m}^3$ 

Ambient Temperature: 23.6°C; Liquid Temperature: 22.7°C

### DASY5 Configuration:

- Probe: EX3DV4 SN3911; ConvF(7.83, 7.83, 7.83); Calibrated: 2014/4/22;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2014/4/30
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1754
- Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

Ch9262/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 0.954 W/kg


Ch9262/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.044 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.09 W/kg

SAR(1 g) = 0.757 W/kg; SAR(10 g) = 0.495 W/kg

Maximum value of SAR (measured) = 0.943 W/kg

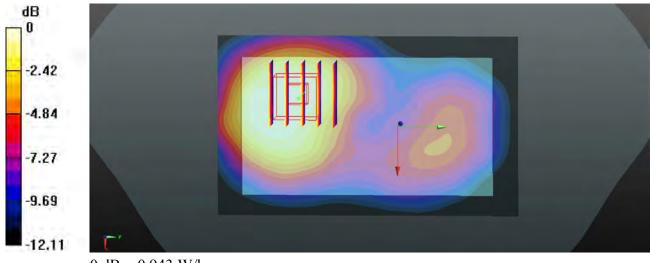

0 dB = 0.943 W/kg

### 11 WLAN2.4GHz 802.11b 1Mbps Left Side 1cm Ch6

Communication System: UID 0, WIFI (0); Frequency: 2437 MHz; Duty Cycle: 1:1.024

Medium: MSL 2450 140801 Medium parameters used: f = 2437 MHz;  $\sigma = 1.996$  S/m;  $\varepsilon_r = 51.523$ ;

Date: 2014.08.01

 $\rho = 1000 \text{ kg/m}^3$ 

Ambient Temperature: 23.5 °C; Liquid Temperature: 22.7 °C

### DASY5 Configuration:

- Probe: EX3DV4 SN3819; ConvF(7.07, 7.07, 7.07); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2013.11.22
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)


Ch6/Area Scan (41x131x1): Interpolated grid: dx=12mm, dy=12mm Maximum value of SAR (interpolated) = 0.576 W/kg

Ch6/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 2.529 V/m; Power Drift = 0.07 dB

Peak SAR (extrapolated) = 0.688 W/kg

SAR(1 g) = 0.389 W/kg; SAR(10 g) = 0.217 W/kg

Maximum value of SAR (measured) = 0.539 W/kg

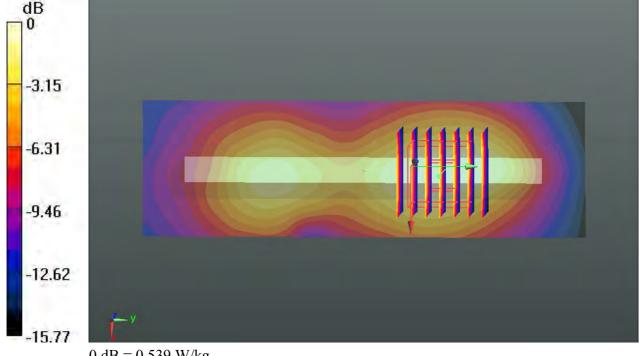

0 dB = 0.539 W/kg

### 12 Bluetooth 1Mbps Back 1cm Ch0

Communication System: UID 0, Bluetooth (0); Frequency: 2402 MHz; Duty Cycle: 1:1.2

Medium: MSL\_2450\_140812 Medium parameters used: f = 2402 MHz;  $\sigma$  = 1.911 S/m;  $\epsilon_r$  = 51.764;

Date: 2014.08.12

 $\rho = 1000 \text{ kg/m}^3$ 

Ambient Temperature: 23.5 °C; Liquid Temperature: 22.8 °C

### DASY5 Configuration:

- Probe: EX3DV4 SN3819; ConvF(7.07, 7.07, 7.07); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2013.11.22
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

**Ch0/Area Scan (71x131x1):** Interpolated grid: dx=12mm, dy=12mm Maximum value of SAR (interpolated) = 0.0484 W/kg


Ch0/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 0.984 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 0.0510 W/kg

SAR(1 g) = 0.020 W/kg; SAR(10 g) = 0.010 W/kg

Maximum value of SAR (measured) = 0.0289 W/kg

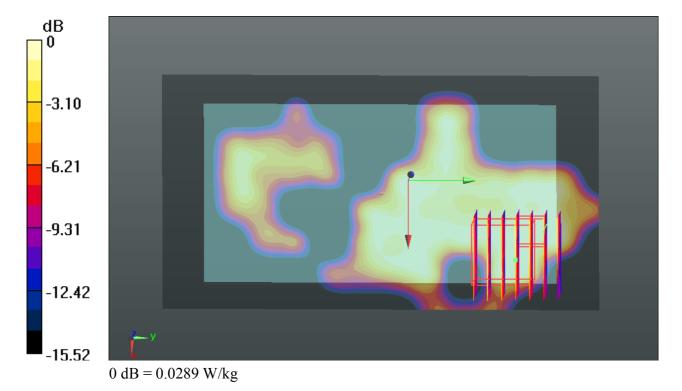

Communication System: GPRS (GMSK 4 Tx slot); Frequency: 1850.2 MHz; Duty Cycle: 1:2.08 Medium: MSL\_1900\_140801 Medium parameters used: f = 1850.2 MHz;  $\sigma = 1.469$  S/m;  $\epsilon_r = 54.083$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Date: 2014/8/1

Ambient Temperature: 23.6°C; Liquid Temperature: 22.7°C

### DASY5 Configuration:

- Probe: EX3DV4 SN3911; ConvF(7.83, 7.83, 7.83); Calibrated: 2014/4/22;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1358; Calibrated: 2014/4/30
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1754
- Measurement SW: DASY52, Version 52.8 (5); SEMCAD X Version 14.6.8 (7028)

# **Ch512/Area Scan (61x101x1):** Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 1.40 W/kg

**Ch512/Zoom Scan (5x5x7)/Cube 0:** Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 14.353 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 1.63 W/kg

SAR(1 g) = 1.070 W/kg; SAR(10 g) = 0.687 W/kg

Maximum value of SAR (measured) = 1.39 W/kg


# Ch512/Zoom Scan (5x5x7)/Cube 1: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.353 V/m; Power Drift = -0.17 dB

Peak SAR (extrapolated) = 1.49 W/kg

# SAR(1 g) = 1.03 W/kg; SAR(10 g) = 0.686 W/kg

Maximum value of SAR (measured) = 1.30 W/kg

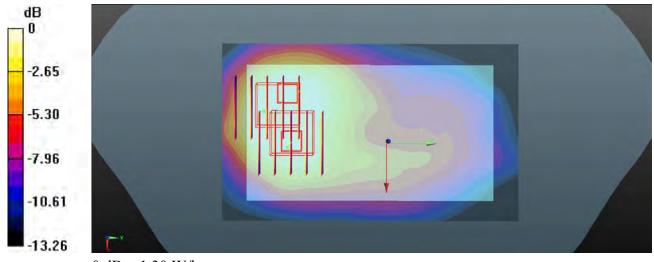

0 dB = 1.30 W/kg

### 14 WLAN2.4GHz 802.11b 1Mbps Back 1cm Ch6

Communication System: UID 0, WIFI (0); Frequency: 2437 MHz; Duty Cycle: 1:1.024

Medium: MSL 2450 140801 Medium parameters used: f = 2437 MHz;  $\sigma = 1.996$  S/m;  $\varepsilon_r = 51.523$ ;

Date: 2014.08.01

 $\rho = 1000 \text{ kg/m}^3$ 

Ambient Temperature: 23.5 °C; Liquid Temperature: 22.7 °C

# DASY5 Configuration:

- Probe: EX3DV4 SN3819; ConvF(7.07, 7.07, 7.07); Calibrated: 2013.11.27;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn569; Calibrated: 2013.11.22
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (7); SEMCAD X Version 14.6.10 (7164)

Ch6/Area Scan (71x131x1): Interpolated grid: dx=12mm, dy=12mm Maximum value of SAR (interpolated) = 0.528 W/kg


Ch6/Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm

Reference Value = 3.449 V/m; Power Drift = 0.03 dB

Peak SAR (extrapolated) = 0.625 W/kg

SAR(1 g) = 0.343 W/kg; SAR(10 g) = 0.196 W/kg

Maximum value of SAR (measured) = 0.482 W/kg

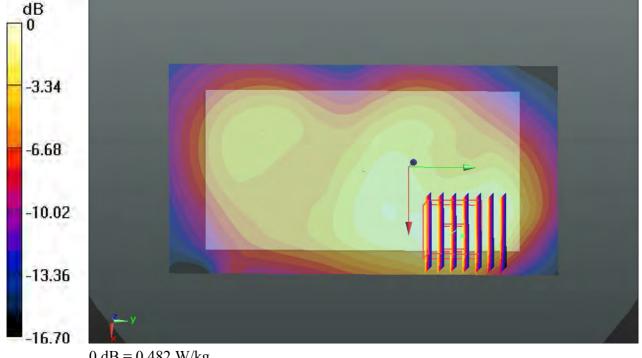

0 dB = 0.482 W/kg