



# FCC PART 22H, PART 24E MEASUREMENT AND TEST REPORT

For

# **BLU Products, Inc.**

10814 NW 33rd St # 100 Doral, FL 33172, United States

FCC ID: YHLBLUZ4

Report Type: **Product Type:** Original Report Mobile phone

Report Number: RSZ170808005-00C

**Report Date:** 2017-08-28

Rocky Kang

Reviewed By: RF Engineer

**Prepared By:** Bay Area Compliance Laboratories Corp. (Shenzhen)

6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone,

Rocky Kang

Shenzhen, Guangdong, China Tel: +86-755-33320018

Fax: +86-755-33320008 www.baclcorp.com.cn

Note: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report must not be used by the customer to claim product certification, approval, or endorsement by NVLAP, NIST, or any agency of the Federal Government. This report may contain data that are not covered by the NVLAP accreditation and shall be marked with an asterisk "\*\(\dprime\)". This report may contain data were produced under the subcontractor and shall be marked with an asterisk " $\triangle$ ".

# TABLE OF CONTENTS

GENERAL INFORMATION	
PRODUCT DESCRIPTION FOR EQUIPMENT UNDER TEST (EUT)	
OBJECTIVE	
RELATED SUBMITTAL(S)/GRANT(S)	
MEASUREMENT UNCERTAINTY	
TEST FACILITY	
SYSTEM TEST CONFIGURATION	
JUSTIFICATION	
EQUIPMENT MODIFICATIONS	
SUPPORT EQUIPMENT LIST AND DETAILS	
BLOCK DIAGRAM OF TEST SETUP	
SUMMARY OF TEST RESULTS	
TEST EQUIPMENT LIST	
FCC §1.1307(B) & §2.1093 - RF EXPOSURE INFORMATION	
APPLICABLE STANDARD	
TEST RESULT	
FCC §2.1047 - MODULATION CHARACTERISTIC	
§2.1046; § 22.913 (A); § 24.232 (C) - RF OUTPUT POWER	10
APPLICABLE STANDARDS	
TEST PROCEDURE	
TEST DATA	
FCC §2.1049, §22.917, §22.905 & §24.238 - OCCUPIED BANDWIDTH	13
APPLICABLE STANDARDS	
TEST PROCEDURE	
TEST DATA	13
$\S$ 2.1051; $\S$ 22.917 (A); $\S$ 24.238 (A)-SPURIOUS EMISSIONS AT ANTENNA TERMINALS	10
APPLICABLE STANDARDS	
TEST PROCEDURE	
TEST DATA	
FCC § 2.1053; § 22.917 (A); § 24.238 (A)-SPURIOUS RADIATED EMISSIONS	20
APPLICABLE STANDARDS	20
TEST PROCEDURE	
TEST DATA	
FCC § 22.917 (A);§ 24.238 (A) - BAND EDGES	22
APPLICABLE STANDARDS	
Test Procedure	
TEST DATA	
FCC § 2.1055; § 22.355; § 24.235 - FREQUENCY STABILITY	25
APPLICABLE STANDARDS	
Test Procedure	
TEST DATA	20

#### **GENERAL INFORMATION**

#### **Product Description for Equipment under Test (EUT)**

The *BLU Products, Inc.*'s product, model number: Z4 (*FCC ID: YHLBLUZ4*) or the "EUT" in this report was a *Mobile phone*, which was measured approximately: 112.7 mm (L)  $\times$  47 mm (W)  $\times$  15 mm (H), rated with input voltage: DC 3.7 V battery or DC 5V from adapter.

Report No.: RSZ170808005-00C

Adapter Information: Model: US-SL-0550

Input: AC 100-240V, 50/60Hz, 0.15A

Output: DC 5.0V, 550 mA

\*All measurement and test data in this report was gathered from production sample serial number: 1701886 (Assigned by applicant). The EUT supplied by the applicant was received on 2017-08-08.

#### **Objective**

This type approval report is prepared on behalf of *BLU Products*, *Inc.* in accordance with Part 2, Part 22-Subpart H, Part 24-Subpart E of the Federal Communication Commission's rules.

The objective is to determine the compliance of EUT with FCC rules for output power, modulation characteristic, occupied bandwidth, and spurious emission at antenna terminal, spurious radiated emission, frequency stability, and band edge.

#### Related Submittal(s)/Grant(s)

FCC Part 15B JBP, Part 15.247 DSS submissions with FCC ID: YHLBLUZ4

#### **Test Methodology**

All tests and measurements indicated in this document were performed in accordance with the Code of Federal Regulations Title 47 Part 2, Sub-Part J as well as the following parts:

Part 22 Subpart H - Public Mobile Services

Part 24 Subpart E - Personal Communication Services

Applicable Standards: TIA/EIA 603-D.

All emissions measurement was performed at Bay Area Compliance Laboratories Corp. (Shenzhen). The radiated testing was performed at an antenna-to-EUT distance of 3 meters.

FCC Part 22H/24E Page 3 of 27

#### **Measurement Uncertainty**

Parameter	uncertainty
Occupied Channel Bandwidth	±5%
RF output power, conducted	±1.5dB
Unwanted Emission, conducted	±1.5dB
All emissions, radiated	±4.88dB
Temperature	±1℃
Supply voltages	±0.4%

Report No.: RSZ170808005-00C

#### **Test Facility**

The Test site used by Bay Area Compliance Laboratories Corp. (Shenzhen) to collect test data is located on the 6/F., West Wing, Third Phase of Wanli Industrial Building, Shihua Road, Futian Free Trade Zone, Shenzhen, Guangdong, China.

Bay Area Compliance Laboratories Corp. (Shenzhen) has been accredited to ISO/IEC 17025 by CNAS(Lab code: L2408). And accredited to ISO/IEC 17025 by NVLAP(Lab code: 200707-0), the FCC Designation No. CN5001 under the KDB 974614 D01.

The Federal Communications Commission has the reports on file and is listed under FCC Registration No.: 382179. The test site has been approved by the FCC for public use and is listed in the FCC Public Access Link (PAL) database.

Bay Area Compliance Laboratories Corp. (Shenzhen) was registered with ISED Canada under ISED Canada Registration Number 3062B.

FCC Part 22H/24E Page 4 of 27

## **SYSTEM TEST CONFIGURATION**

#### **Justification**

The EUT was configured for testing according to TIA/EIA-603-D.

The final qualification test was performed with the EUT operating at normal mode.

## **Equipment Modifications**


No modifications were made to the EUT.

## **Support Equipment List and Details**

Manufacturer	Description	Model	Serial Number
Rohde & Schwarz	Universal Radio Communication Tester	CMU200	106891

Report No.: RSZ170808005-00C

#### **Block Diagram of Test Setup**

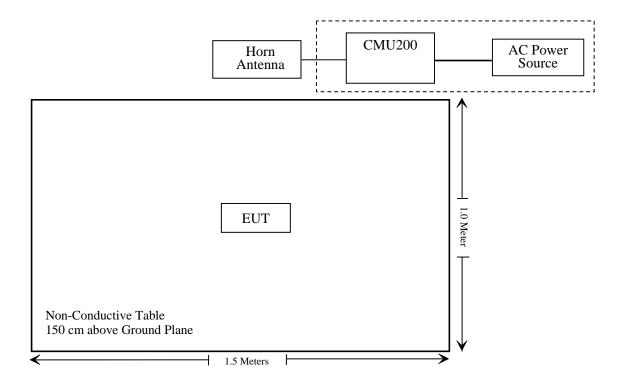

FCC Part 22H/24E Page 5 of 27

# SUMMARY OF TEST RESULTS

FCC Rules	Description of Test	Result
§1.1307, §2.1093	RF Exposure Information	Compliance*
\$2.1046; \$ 22.913 (a); \$ 24.232 (c)	RF Output Power	Compliance
§ 2.1047	Modulation Characteristics	Not Applicable
§ 2.1049; § 22.905 § 22.917; § 24.238	Occupied Bandwidth	Compliance
§ 2.1051, § 22.917 (a); § 24.238 (a)	Spurious Emissions at Antenna Terminal	Compliance
§ 2.1053 § 22.917 (a); § 24.238 (a)	Spurious Radiated Emissions	Compliance
§ 22.917 (a); § 24.238 (a)	Band Edge	Compliance
§ 2.1055 § 22.355; § 24.235	Frequency stability	Compliance

Report No.: RSZ170808005-00C

Compliance\*: Please refer to SAR report released by BACL, report number: RSZ170808005-20.

FCC Part 22H/24E Page 6 of 27

# TEST EQUIPMENT LIST

Manufacturer	Description	Model	Serial Number	Calibration Date	Calibration Due Date			
	Radiated Emission Test							
Sunol Sciences	Horn Antenna	DRH-118	A052604	2014-12-29	2017-12-28			
Rohde & Schwarz	Signal Analyzer	FSIQ26	8386001028	2017-04-24	2018-04-24			
Sunol Sciences	Bi-log Antenna	JB1	A040904-2	2014-12-17	2017-12-16			
Mini	Pre-amplifier	ZVA-183-S+	5969001149	2017-02-14	2018-02-14			
HP	Amplifier	HP8447E	1937A01046	2017-05-21	2017-11-19			
Anritsu	Signal Generator	68369B	004114	2016-12-05	2017-12-05			
Rohde & Schwarz	EMI Test Receiver	ESCI	101120	2016-12-07	2017-12-07			
COM POWER	Dipole Antenna	AD-100	041000	NCR	NCR			
A.H. System	Horn Antenna	SAS-200/571	135	2015-08-18	2018-08-17			
Ducommun technologies	RF Cable	UFA210A-1-4724- 30050U	MFR64369 223410-001	2017-05-21	2017-11-19			
Ducommun technologies	RF Cable	104PEA	218124002	2017-05-21	2017-11-19			
Ducommun technologies	RF Cable	RG-214	1	2017-05-21	2017-11-19			
Ducommun technologies	RF Cable	RG-214	2	2017-05-22	2017-11-22			
Ducommun Technologies	Horn Antenna	ARH-4223-02	1007726-04	2014-12-29	2017-12-28			
Ducommun Technologies	Pre-amplifier	ALN-22093530-01	991373-01	2017-08-03	2018-08-03			
		RF Conducted Tes	t					
Rohde & Schwarz	SPECTRUM ANALYZER	FSU26	200120	2016-12-05	2017-12-05			
ESPEC	Temperature & Humidity Chamber	EL-10KA	09107726	2016-11-22	2017-11-22			
Long Wei	DC Power Supply	TPR-6420D	398363	NCR	NCR			
Rohde & Schwarz	Wideband Radio Communication Tester	CMU200	106891	2016-10-18	2017-10-18			
Ducommun technologies	RF Cable	RG-214	3	2017-05-22	2017-11-22			

Report No.: RSZ170808005-00C

FCC Part 22H/24E Page 7 of 27

<sup>\*</sup> **Statement of Traceability:** Bay Area Compliance Laboratories Corp. (Shenzhen) attests that all calibrations have been performed in accordance to requirements that traceable to National Primary Standards and International System of Units (SI).

# FCC §1.1307(b) & §2.1093 - RF EXPOSURE INFORMATION

Report No.: RSZ170808005-00C

## **Applicable Standard**

FCC§1.1307, §2.1093.

#### **Test Result**

Compliance, please refer to the SAR report: RSZ170808005-20.

FCC Part 22H/24E Page 8 of 27

# FCC §2.1047 - MODULATION CHARACTERISTIC

According to FCC  $\S 2.1047(d)$ , Part 22H & 24E there is no specific requirement for digital modulation, therefore modulation characteristic is not presented.

Report No.: RSZ170808005-00C

FCC Part 22H/24E Page 9 of 27

## §2.1046; § 22.913 (a); § 24.232 (c) - RF OUTPUT POWER

#### **Applicable Standards**

According to FCC  $\S 2.1046$  and  $\S 22.913$  (a), the ERP of mobile transmitters and auxiliary test transmitters must not exceed 7 watts.

Report No.: RSZ170808005-00C


According to FCC §2.1046 and §24.232 (c), mobile and portable stations are limited to 2 watts EIRP and the equipment must employ a means for limiting power to the minimum necessary for successful communications.

The peak-to-average power ratio (PAPR) of the transmitter output power must not exceed 13 dB.

#### **Test Procedure**

Conducted method:

The RF output of the transmitter was connected to the CMU200 through sufficient attenuation.



Radiated method:

TIA603-D section 2.2.17

#### **Test Data**

#### **Environmental Conditions**

Temperature:	25 ℃	
Relative Humidity:	52 %	
ATM Pressure:	101.0 kPa	

The testing was performed by Hill He on 2017-08-24.

FCC Part 22H/24E Page 10 of 27

## **Conducted Power**

## Cellular Band (Part 22H)

Report No.: RSZ170808005-00C

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)	Limit (dBm)
	128	824.2	31.96	38.45
GSM	190	836.6	32.06	38.45
	251	848.8	32.14	38.45

Mode	Channel	Frequency	Average Output Power (dBm)				Limit
Mode	Channel	(MHz)	1 slot	2 slots	3 slots	4 slots	(dBm)
	128	824.2	32.04	29.88	27.85	26.85	38.45
GPRS	190	836.6	32.14	30.09	28.03	27.07	38.45
	251	848.8	32.14	30.19	28.17	27.21	38.45

## PCS Band (Part 24E)

Mode	Channel	Frequency (MHz)	Average Output Power (dBm)	Limit (dBm)
	512	1850.2	28.07	33
GSM	661	1880.0	28.16	33
	810	1909.8	28.26	33

Mada	Channal	Frequency	requency Average Output Power (dBm)			Limit	
Mode	Channel	(MHz)	1 slot	2 slots	3 slots	4 slots	(dBm)
	512	1850.2	28.02	25.55	24.02	22.70	33
GPRS	661	1880.0	28.07	25.43	23.92	22.59	33
	810	1909.8	28.23	25.58	24.05	22.70	33

FCC Part 22H/24E Page 11 of 27

## Peak-to-average ratio (PAR)

#### Cellular Band

Report No.: RSZ170808005-00C

Mode	Channel	PAR (dB)	Limit (dB)
	Low	0.16	13
GSM	Middle	0.28	13
	High	0.19	13

#### **PCS Band**

Mode	Channel	PAR (dB)	Limit (dB)
	Low	0.25	13
GSM	Middle	0.11	13
	High	0.18	13

#### **Radiated Power**

#### **GSM Mode:**

Receiver Turntable		ntable Rx Antenna Substituted		ed	Absolute					
Frequency (MHz)	Reading Angle	Height (m)	Polar (H/V)	Level (dBm)	Cable loss (dB)	Antenna Gain (dB)	Level (dBm)	Limit (dBm)	Margin (dB)	
	ERP, Cellular Band (Part 22H), Middle Channel									
836.6	83.13	118	1.0	Н	23.1	0.60	0.0	22.48	38.45	15.97
836.6	90.76	215	1.9	V	31.7	0.60	0.0	31.09	38.45	7.36
	EIRP, PCS Band (Part 24E), Middle Channel									
1880.00	87.05	7	1.1	Н	17.0	1.30	8.50	24.20	33	8.80
1880.00	86.17	186	1.5	V	15.9	1.30	8.50	23.10	33	9.90

#### Note

All above data were tested with no amplifier. Absolute Level = Substituted Level - Cable loss + Antenna Gain Margin = Limit- Absolute Level

FCC Part 22H/24E Page 12 of 27

## FCC §2.1049, §22.917, §22.905 & §24.238 - OCCUPIED BANDWIDTH

Report No.: RSZ170808005-00C

#### **Applicable Standards**


FCC 47 §2.1049, §22.917, §22.905, §24.238.

#### **Test Procedure**

The RF output of the transmitter was connected to the simulator and the spectrum analyzer through sufficient attenuation.

The resolution bandwidth of the spectrum analyzer was set at 1% to 5% of the anticipated emission bandwidth and the 26 dB & 99% bandwidth was recorded.

.



#### **Test Data**

#### **Environmental Conditions**

Temperature:	25 ℃	
Relative Humidity:	52 %	
ATM Pressure:	101.0 kPa	

The testing was performed by Hill He on 2017-08-24.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to the following tables and plots.

FCC Part 22H/24E Page 13 of 27

## Cellular Band (Part 22H)

Report No.: RSZ170808005-00C

Mode Frequency (MHz)		99% Occupied Bandwidth (kHz)	26 dB Emission Bandwidth (kHz)	
GSM(GMSK)	836.6	240.4	314.1	


## PCS Band (Part 24E)

Mode	Frequency (MHz)	99% Occupied Bandwidth (kHz)	26 dB Emission Bandwidth (kHz)	
GSM(GMSK)	1880.0	243.6	315.7	

FCC Part 22H/24E Page 14 of 27

# Cellular Band (Part 22H) 26 dB Emissions & 99% Occupied Bandwidth for GSM (GMSK) Mode


Report No.: RSZ170808005-00C

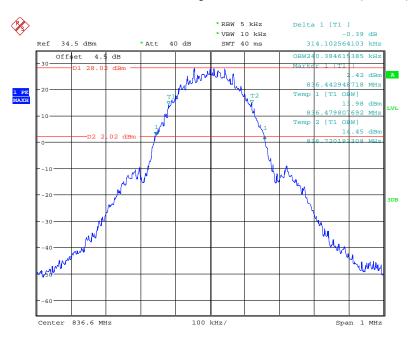

Date: 24.AUG.2017 16:08:43

#### PCS Band (Part 24E)

#### 26 dB Emissions & 99% Occupied Bandwidth for GSM (GMSK) Mode

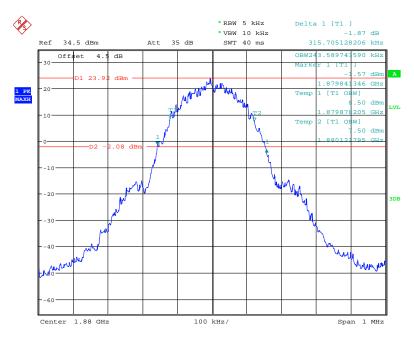

Date: 24.AUG.2017 16:03:36

FCC Part 22H/24E Page 15 of 27

# $\S$ 2.1051; $\S$ 22.917 (a); $\S$ 24.238 (a)-SPURIOUS EMISSIONS AT ANTENNA TERMINALS

Report No.: RSZ170808005-00C


## **Applicable Standards**

FCC §2.1051, §22.917(a) and §24.238(a).

The spectrum was to be investigated to the tenth harmonics of the highest fundamental frequency as specified in § 2.1051.

#### **Test Procedure**

The RF output of the transceiver was connected to a spectrum analyzer and simulator through appropriate attenuation. The resolution bandwidth of the spectrum analyzer was set at 100kHz for below 1GHz and 1MHz for above 1GHz. Sufficient scans were taken to show any out of band emissions up to 10<sup>th</sup> harmonic.

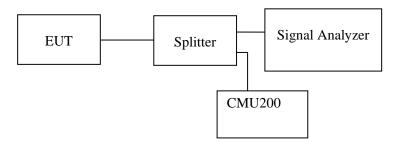

#### **Test Data**

#### **Environmental Conditions**

Temperature:	25 ℃	
Relative Humidity:	52 %	
ATM Pressure:	101.0 kPa	


The testing was performed by Hill He on 2017-08-24.

FCC Part 22H/24E Page 16 of 27

#### Report No.: RSZ170808005-00C


#### Cellular Band (Part 22H)

## 30 MHz - 1 GHz (GSM Mode)

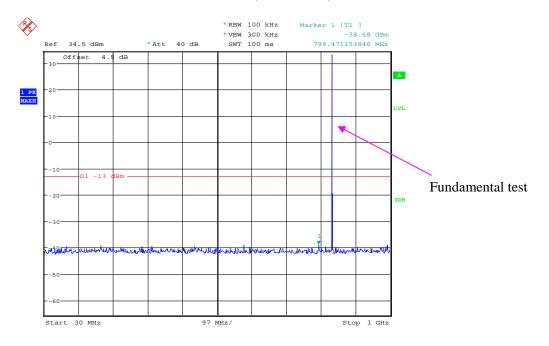

Date: 24.AUG.2017 16:28:04

## 1 GHz – 10 GHz (GSM Mode)

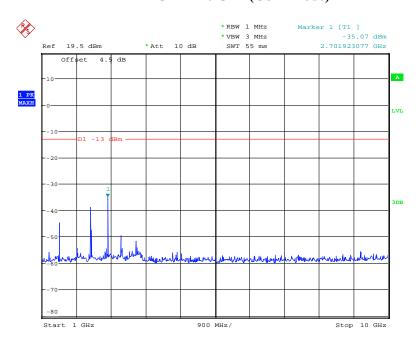


Date: 24.AUG.2017 16:26:53

FCC Part 22H/24E Page 17 of 27


#### PCS Band (Part 24E)

#### 30 MHz – 1 GHz (GSM Mode)

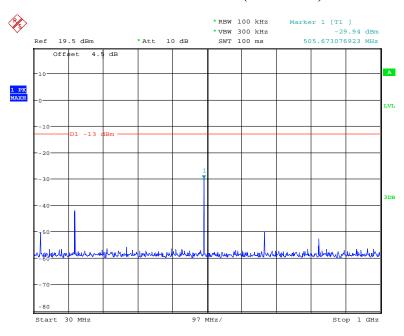

Date: 24.AUG.2017 16:21:23


## 1 GHz – 2 GHz (GSM Mode)

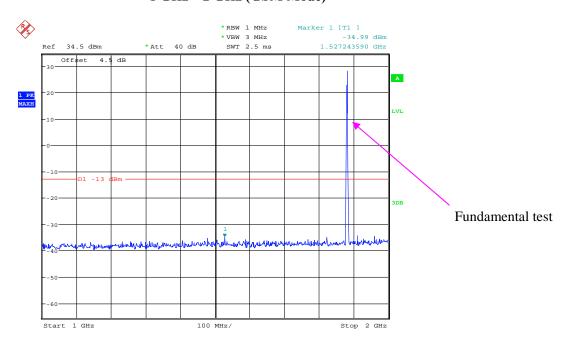

Date: 24.AUG.2017 16:22:50

FCC Part 22H/24E Page 18 of 27

# Report No.: RSZ170808005-00C

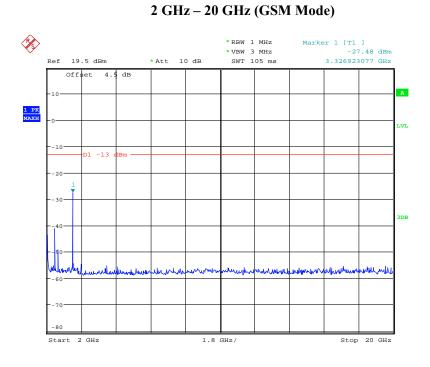

Date: 24.AUG.2017 16:24:42

FCC Part 22H/24E Page 19 of 27

## FCC § 2.1053; § 22.917 (a); § 24.238 (a)-SPURIOUS RADIATED EMISSIONS

Report No.: RSZ170808005-00C

#### **Applicable Standards**

FCC § 2.1053, §22.917(a) and § 24.238(a)

#### **Test Procedure**

The transmitter was placed on a wooden turntable, and it was transmitting into a non-radiating load which was also placed on the turntable.

The measurement antenna was placed at a distance of 3 meters from the EUT. During the tests, the antenna height and polarization as well as EUT azimuth were varied in order to identify the maximum level of emissions from the EUT. The test was performed by placing the EUT on 3-orthogonal axis.

The frequency range up to tenth harmonic of the fundamental frequency was investigated.

Remove the EUT and replace it with substitution antenna. A signal generator was connected to the substitution antenna by a non-radiating cable. The absolute levels of the spurious emissions were measured by the substitution.

Spurious emissions in  $dB = 10 \lg (TX pwr in Watts/0.001) - the absolute level$ 

Spurious attenuation limit in  $dB = 43 + 10 \text{ Log}_{10}$  (power out in Watts) or,

#### **Test Data**

#### **Environmental Conditions**

Temperature:	25 ℃	
Relative Humidity:	52 %	
ATM Pressure:	101.0 kPa	

The testing was performed by Hill He on 2017-08-24.

Test mode: Transmitting

FCC Part 22H/24E Page 20 of 27

Test mode: Transmitting (Pre-scan with Low, Middle, High channel, and the worse case data as below)

#### 30 MHz ~ 10 GHz:

## Cellular Band (Part 22H)

Report No.: RSZ170808005-00C

	Receiver	Turntable	Rx An	tenna	,	Substitut	ed	Absolute		
Frequency (MHz)	Reading (dBµV)	Angle Degree	Height (m)	Polar (H/V)	Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)	Level (dBm)	Limit (dBm)	Margin (dB)
	GSM 850 Mode									
199.11	38.15	118	1.8	Н	-58.80	0.29	0	-59.09	-13	46.09
199.11	38.09	208	1.1	V	-58.90	0.29	0	-59.19	-13	46.19
1673.20	62.56	249	2.1	Н	-44.5	1.30	9.10	-36.70	-13	23.70
1673.20	64.47	137	2.2	V	-42.0	1.30	9.10	-34.20	-13	21.20
2509.80	55.42	208	2.0	Н	-48.1	2.60	9.30	-41.40	-13	28.40
2509.80	55.61	207	2.1	V	-47.3	2.60	9.30	-40.60	-13	27.60
3346.40	52.51	130	1.8	Н	-47.8	1.50	9.60	-39.70	-13	26.70
3346.40	54.59	113	1.5	V	-45.8	1.50	9.60	-37.70	-13	24.70

#### 30 MHz ~ 20 GHz:

#### PCS Band (Part 24E)

	Receiver Turntable		Rx An	tenna	Substitut		Substituted			
Frequency (MHz)	Reading (dBµV)	Angle Degree	Height (m)	Polar (H/V)	Level (dBm)	Cable Loss (dB)	Antenna Gain (dB)	Absolute Level (dBm)	Limit (dBm)	Margin (dB)
GSM 1900 Mode										
199.11	38.77	355	1.7	Н	-58.20	0.29	0	-58.49	-13	45.49
199.11	38.09	232	1.4	V	-58.90	0.29	0	-59.19	-13	46.19
3760.00	58.45	177	1.3	Н	-42.8	1.50	9.70	-34.60	-13	21.60
3760.00	57.6	284	1.5	V	-43.2	1.50	9.70	-35.00	-13	22.00

#### Note:

1) Absolute Level = Substituted Level - Cable loss + Antenna Gain

2) Margin = Limit- Absolute Level

FCC Part 22H/24E Page 21 of 27

## FCC § 22.917 (a); § 24.238 (a) - BAND EDGES

#### **Applicable Standards**

According to § 22.917(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.


Report No.: RSZ170808005-00C

According to \$24.238(a), the power of any emissions outside of the authorized operating frequency ranges must be attenuated below the transmitting power (P) by a factor of at least  $43 + 10 \log(P)$  dB.

#### **Test Procedure**

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation.

The center of the spectrum analyzer was set to block edge frequency



#### **Test Data**

#### **Environmental Conditions**

Temperature:	25 ℃	
Relative Humidity:	52 %	
ATM Pressure:	101.0 kPa	

The testing was performed by Hill He on 2017-08-24.


EUT operation mode: Transmitting

Test Result: Compliance. Please refer to the following plots.

FCC Part 22H/24E Page 22 of 27


## Report No.: RSZ170808005-00C

#### Cellular Band, Left Band Edge for GSM (GMSK) Mode

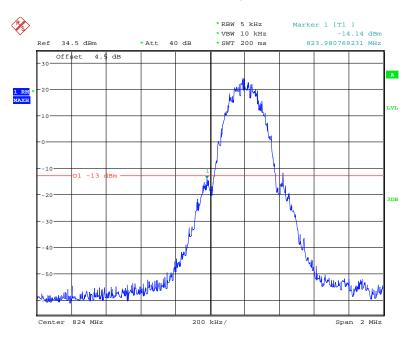

Date: 24.AUG.2017 16:13:48

#### Cellular Band, Right Band Edge for GSM (GMSK) Mode

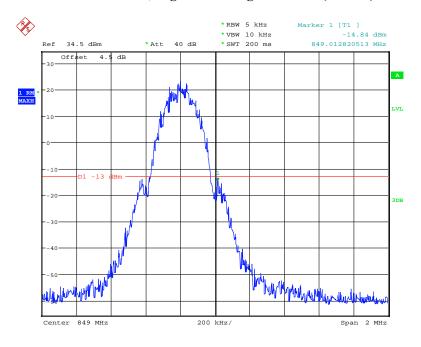


Date: 24.AUG.2017 16:15:22

FCC Part 22H/24E Page 23 of 27


## PCS Band, Left Band Edge for GSM (GMSK) Mode

Report No.: RSZ170808005-00C

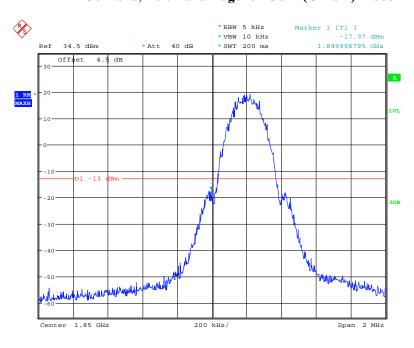

Date: 24.AUG.2017 16:16:58

### PCS Band, Right Band Edge for GSM (GMSK) Mode

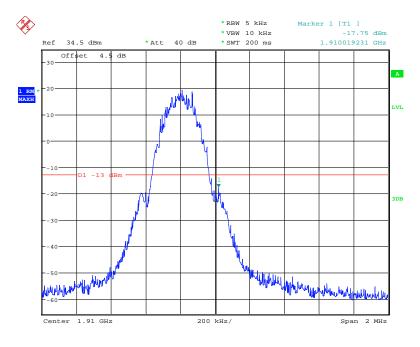

Date: 24.AUG.2017 16:17:51

FCC Part 22H/24E Page 24 of 27

### FCC § 2.1055; § 22.355; § 24.235 - FREQUENCY STABILITY

#### **Applicable Standards**

FCC § 2.1055, §22.355, §24.235.

According to FCC §2.1055, the frequency stability shall be sufficient to ensure that the fundamental emissions stay within the authorized bands of operation.

According to §22.355, the carrier frequency of each transmitter in the Public Mobile Services must be maintained within the tolerances given in Table below:

Frequency Tole	rance for Tran	smitters in the	e Public N	Mobile Services
----------------	----------------	-----------------	------------	-----------------

Report No.: RSZ170808005-00C

Frequency Range (MHz)	Base, fixed (ppm)	Mobile > 3 watts (ppm)	Mobile ≤ 3 watts (ppm)
25 to 50	20.0	20.0	50.0
50 to 450	5.0	5.0	50.0
450 to 512	2.5	5.0	5.0
821 to 896	1.5	2.5	2.5
928 to 929.	5.0	N/A	N/A
929 to 960.	1.5	N/A	N/A
2110 to 2220	10.0	N/A	N/A


According to §24.235, the frequency stability shall be sufficient to ensure that the fundamental emissions stays within the authorized frequency block.

#### **Test Procedure**

Frequency Stability vs. Temperature: The equipment under test was connected to an external DC power supply and the RF output was connected to communication test set via feed-through attenuators. The EUT was placed inside the temperature chamber. The DC leads and RF output cable exited the chamber through an opening made for the purpose.

After the temperature stabilized for approximately 20 minutes, the frequency output was recorded from the communication test set.

Frequency Stability vs. Voltage: For hand carried, battery powered equipment; reduce primary supply voltage to the battery operating end point which shall be specified by the manufacturer.

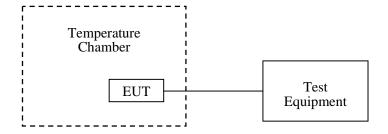

FCC Part 22H/24E Page 25 of 27

#### **Test Data**

#### **Environmental Conditions**

Temperature:	25 ℃	
Relative Humidity:	52 %	
ATM Pressure:	101.0 kPa	

Report No.: RSZ170808005-00C

The testing was performed by Hill He on 2017-08-24.

EUT operation mode: Transmitting

Test Result: Compliance. Please refer to the following tables.

FCC Part 22H/24E Page 26 of 27

## Cellular Band (Part 22H)

Report No.: RSZ170808005-00C

#### **GSM Mode**

Middle Channel, f <sub>o</sub> =836.6 MHz						
Temperature (°C)	Power Supplied (V <sub>DC</sub> )	Frequency Error (Hz)	Frequency Error (ppm)	Limit (ppm)		
-30	3.7	4	0.004781	2.5		
-20		6	0.007172	2.5		
-10		3	0.003586	2.5		
0		1	0.001195	2.5		
10		-6	-0.007172	2.5		
20		4	0.004781	2.5		
30		-1	-0.001195	2.5		
40		10	0.011953	2.5		
50		12	0.014344	2.5		
25	V min.= 3.5	-8	-0.009563	2.5		
	V max.= 4.2	-7	-0.008367	2.5		

## PCS Band (Part 24E)

## **GSM Mode**

Middle Channel, f <sub>o</sub> =1880.0 MHz					
Temperature (°C)	Power Supplied (V <sub>DC</sub> )	Frequency Error (Hz)	Frequency Error (ppm)	Result	
-30	3.7	1	0.000532	pass	
-20		-5	-0.002660	pass	
-10		-9	-0.004787	pass	
0		2	0.001064	pass	
10		7	0.003723	pass	
20		16	0.008511	pass	
30		-10	-0.005319	pass	
40		-1	-0.000532	pass	
50		3	0.001596	pass	
25	V min.= 3.5	-4	-0.002128	pass	
	V max.= 4.2	-6	-0.003191	pass	

\*\*\*\*\* END OF REPORT \*\*\*\*\*

FCC Part 22H/24E Page 27 of 27