

Report No. : FA361702

FCC SAR Test Report

APPLICANT : CT Asia

EQUIPMENT : Quad-band /GPRS/ GSM Mobile Phone

BRAND NAME : BLU
MODEL NAME : Zoey

FCC ID : YHLBLUZOEY

STANDARD : FCC 47 CFR Part 2 (2.1093)

ANSI/IEEE C95.1-1992

IEEE 1528-2003

FCC OET Bulletin 65 Supplement C (Edition 01-01)

The product was completely tested on Jun. 25, 2013. We, SPORTON INTERNATIONAL (SHENZHEN) INC., would like to declare that the tested sample has been evaluated in accordance with the procedures and shown the compliance with the applicable technical standards.

The test results in this report apply exclusively to the tested model / sample. Without written approval of SPORTON INTERNATIONAL (SHENZHEN) INC., the test report shall not be reproduced except in full.

Reviewed by: Eric Huang / Deputy Manager

Exte huans

Approved by: Jones Tsai / Manager

lac-MRA



SPORTON INTERNATIONAL (SHENZHEN) INC.

No. 101, Complex Building C, Guanlong Village, Xili Town, Nanshan District, Shenzhen, Guangdong, P.R.C.

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUZOEY Page Number : 1 of 36
Report Issued Date : Jul. 18, 2013

Report Version : Rev. 01

Table of Contents

1. Statement of Compliance	
2. Administration Data	
2.1 Testing Laboratory	
2.2 Applicant	
2.3 Manufacturer	5
2.4 Application Details	5
3. General Information	
3.1 Description of Equipment Under Test (EUT)	
3.2 Maximum RF output power among production units	
3.3 Applied Standard	8
3.4 Device Category and SAR Limits	
3.5 Test Conditions	
4. Specific Absorption Rate (SAR)	
4.1 Introduction	0
4.2 SAR Definition	
5. SAR Measurement System	
5.1 E-Field Probe	10
5.2 Data Acquisition Electronics (DAE)	
5.3 Robot	
5.4 Measurement Server	
5.5 Phantom	
5.6 Device Holder	
5.7 Data Storage and Evaluation	
5.8 Test Equipment List	
6. Tissue Simulating Liquids	
7. System Verification Procedures	
7.1 Purpose of System Performance check	
7.2 System Setup	
7.3 SAR System Verification Results	
8. EUT Testing Position	20
8.1 Define two imaginary lines on the handset	20
8.2 Cheek Position	21
8.3 Tilted Position	21
8.4 Body Worn Position	22
9. Measurement Procedures	23
9.1 Spatial Peak SAR Evaluation	23
9.2 Power Reference Measurement	
9.3 Area & Zoom Scan Procedures	
9.4 Volume Scan Procedures	
9.5 SAR Averaged Methods	25
9.6 Power Drift Monitoring	
10. Conducted RF Output Power (Unit: dBm)	26
11. SAR Test Results	
11.1 Test Records for Head SAR Test	28
11.2 Test Records for Body Worn SAR Test	
11.3 Repeated SAR Measurement	
11.4 Highest SAR Plot	
12. Simultaneous Transmission Analysis	
12.1 Head Exposure Conditions	
12.1 Head Exposure Conditions	
13. Uncertainty Assessment	
14. References	56
Appendix B. Plots of SAR Measurement	
Appendix C. DASY Calibration Certificate	
Appendix D. Test Setup Photos	

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUZOEY Page Number : 2 of 36
Report Issued Date : Jul. 18, 2013
Report Version : Rev. 01



Revision History

REPORT NO.	VERSION	DESCRIPTION	ISSUED DATE
FA361702	Rev. 01	Initial issue of report	Jul. 18, 2013

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUZOEY Page Number : 3 of 36
Report Issued Date : Jul. 18, 2013
Report Version : Rev. 01



1. Statement of Compliance

The maximum results of Specific Absorption Rate (SAR) found during testing for **CT Asia DUT**: **Quad-band** /**GPRS/ GSM Mobile Phone**, **Brand Name**: **BLU**, **Model Name**: **Zoey** are as follows.

<Highest SAR Summary>

Exposure Position	Frequency Band	Reported 1g-SAR (W/kg)	Equipment Class	Highest Reported 1g-SAR (W/kg)
Head	GSM850	1.23	PCE	1.23
пеац	GSM1900	0.54	PGE	1.23
Body-worn	GSM850	0.67	PCE	0.67
(1.5cm Gap)	GSM1900	0.67	FUE	0.67

<Highest Simultaneous transmission SAR>

Frequency Band	Equipment Class	Exposure Position	Highest Reported Simultaneous Transmission 1g-SAR (W/kg)
GSM850	PCE	Hood	1.56
Bluetooth	DSS	- Head	1.56

This device is in compliance with Specific Absorption Rate (SAR) for general population/uncontrolled exposure limits (1.6 W/kg) specified in FCC 47 CFR part 2 (2.1093) and ANSI/IEEE C95.1-1992, and had been tested in accordance with the measurement methods and procedures specified in IEEE 1528-2003 and FCC OET Bulletin 65 Supplement C (Edition 01-01).

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUZOEY Page Number : 4 of 36
Report Issued Date : Jul. 18, 2013
Report Version : Rev. 01

2. Administration Data

2.1 <u>Testing Laboratory</u>

Test Site	SPORTON INTERNATIONAL (SHENZHEN) INC.
Test Site Location	No. 101, Complex Building C, Guanlong Village, Xili Town, Nanshan District, Shenzhen, Guangdong, P.R.C. TEL: +86-755-8637-9589 FAX: +86-755-8637-9595

2.2 Applicant

Company Name	CT Asia
	Unit 01, 15/F, Seaview Centre, 139-141 Hoi bun road, Kwun Tong, Kowloon, Hongkong

2.3 Manufacturer

Company Name	Zechin Communications Co., Ltd.		
	Unit804, 8th Floor Desay Tech Building Gaoxin Road South, Nanshan District Shenzhen, China		

2.4 Application Details

Date of Start during the Test	Jun. 24, 2013
Date of End during the Test	Jun. 25, 2013

SPORTON INTERNATIONAL (SHENZHEN) INC.

FAX: 86-755-8637-9595 FCC ID: YHLBLUZOEY

TEL: 86-755-8637-9589

Page Number : 5 of 36
Report Issued Date : Jul. 18, 2013
Report Version : Rev. 01



3. General Information

3.1 <u>Description of Equipment Under Test (EUT)</u>

	Product Feature & Specification
EUT	Quad-band /GPRS/ GSM Mobile Phone
Brand Name	BLU
Model Name	Zoey
FCC ID	YHLBLUZOEY
IMEI Code	355861041340262 355861041340270
Wireless Technology and Frequency Range	GSM850: 824.2 MHz ~ 848.8 MHz GSM1900: 1850.2 MHz ~ 1909.8 MHz Bluetooth: 2402 MHz ~ 2480 MHz
Mode	GSM/GPRS Bluetooth 3.0
Antenna Type	WWAN: PIFA Antenna Bluetooth: Monopole Antenna
HW Version	BLU-T176-V05-GENERIC
SW Version	X119-MB-V0.1
Transfer Mode Category	Class B – EUT cannot support Packet Switched and Circuit Switched Network simultaneously but can automatically switch between Packet and Circuit Switched Network.
EUT Stage	Production Unit
Remark: The above EUT's i for more detailed description	nformation was declared by manufacturer. Please refer to the specifications or user's manual .

SPORTON INTERNATIONAL (SHENZHEN) INC.

FAX: 86-755-8637-9595 FCC ID: YHLBLUZOEY

TEL: 86-755-8637-9589

Page Number : 6 of 36
Report Issued Date : Jul. 18, 2013
Report Version : Rev. 01

3.2 Maximum RF output power among production units

Mode	GSM 850	GSM 1900
Wode	Average power(dBm)	
GSM (GMSK, 1 Tx slot)	32.5	31
GPRS (GMSK, 1 Tx slot)	32.5	31
GPRS (GMSK, 2 Tx slots)	32	29.5
GPRS (GMSK, 3 Tx slots)	30.5	28
GPRS (GMSK, 4 Tx slots)	29.5	26.5

	Bluetooth		
Mode / Band	1Mbps	2Mbps	3Mbps
	(GFSK)	π/4-DQPSK	(8-DPSK)
2.4GHz Bluetooth	9	8	8

SPORTON INTERNATIONAL (SHENZHEN) INC. TEL: 86-755-8637-9589

FAX: 86-755-8637-9595 FCC ID: YHLBLUZOEY Page Number : 7 of 36
Report Issued Date : Jul. 18, 2013
Report Version : Rev. 01



3.3 Applied Standard

The Specific Absorption Rate (SAR) testing specification, method, and procedure for this device is in accordance with the following standards:

Report No. : FA361702

- FCC 47 CFR Part 2 (2.1093)
- ANSI/IEEE C95.1-1992
- · IEEE 1528-2003
- FCC OET Bulletin 65 Supplement C (Edition 01-01)
- FCC KDB 447498 D01 v05r01
- FCC KDB 648474 D04 v01r01
- FCC KDB 941225 D03 v01
- FCC KDB 865664 D01 v01r01

3.4 <u>Device Category and SAR Limits</u>

This device belongs to portable device category because its radiating structure is allowed to be used within 20 centimeters of the body of the user. Limit for General Population/Uncontrolled exposure should be applied for this device, it is 1.6 W/kg as averaged over any 1 gram of tissue.

3.5 Test Conditions

3.5.1 Ambient Condition

Ambient Temperature	20 to 24 ℃
Humidity	< 60 %

3.5.2 Test Configuration

For WWAN SAR testing, the device was controlled by using a base station emulator. Communication between the device and the emulator was established by air link. The distance between the EUT and the antenna of the emulator is larger than 50 cm and the output power radiated from the emulator antenna is at least 30 dB smaller than the output power of EUT.

 SPORTON INTERNATIONAL (SHENZHEN) INC.
 Page Number
 : 8 of 36

 TEL: 86-755-8637-9589
 Report Issued Date
 : Jul. 18, 2013

 FAX: 86-755-8637-9595
 Report Version
 : Rev. 01

FCC ID: YHLBLUZOEY



4. Specific Absorption Rate (SAR)

4.1 Introduction

SAR is related to the rate at which energy is absorbed per unit mass in an object exposed to a radio field. The SAR distribution in a biological body is complicated and is usually carried out by experimental techniques or numerical modeling. The standard recommends limits for two tiers of groups, occupational/controlled and general population/uncontrolled, based on a person's awareness and ability to exercise control over his or her exposure. In general, occupational/controlled exposure limits are higher than the limits for general population/uncontrolled.

4.2 SAR Definition

The SAR definition is the time derivative (rate) of the incremental energy (dW) absorbed by (dissipated in) an incremental mass (dm) contained in a volume element (dv) of a given density (ρ). The equation description is as below:

$$SAR = \frac{d}{dt} \left(\frac{dW}{dm} \right) = \frac{d}{dt} \left(\frac{dW}{\rho dv} \right)$$

SAR is expressed in units of Watts per kilogram (W/kg)

SAR measurement can be either related to the temperature elevation in tissue by

$$SAR = C\left(\frac{\delta T}{\delta t}\right)$$

Where: C is the specific heat capacity, δT is the temperature rise and δt is the exposure duration, or related to the electrical field in the tissue by

$$SAR = \frac{\sigma |E|^2}{\rho}$$

Where: σ is the conductivity of the tissue, ρ is the mass density of the tissue and E is the RMS electrical field strength.

However for evaluating SAR of low power transmitter, electrical field measurement is typically applied.

SPORTON INTERNATIONAL (SHENZHEN) INC.

FAX: 86-755-8637-9595 FCC ID: YHLBLUZOEY

TEL: 86-755-8637-9589

Page Number : 9 of 36
Report Issued Date : Jul. 18, 2013
Report Version : Rev. 01



5. SAR Measurement System

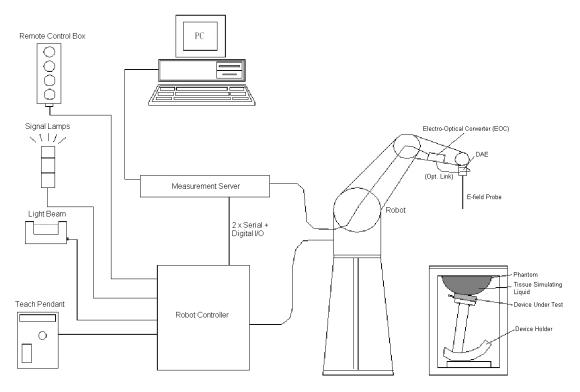


Fig 5.1 SPEAG DASY System Configurations

The DASY system for performance compliance tests is illustrated above graphically. This system consists of the following items:

- A standard high precision 6-axis robot with controller, a teach pendant and software
- A data acquisition electronic (DAE) attached to the robot arm extension
- A dosimetric probe equipped with an optical surface detector system
- > The electro-optical converter (EOC) performs the conversion between optical and electrical signals
- A measurement server performs the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the accuracy of the probe positioning
- A computer operating Windows XP
- DASY software
- > Remove control with teach pendant and additional circuitry for robot safety such as warming lamps, etc.
- The SAM twin phantom
- A device holder
- > Tissue simulating liquid
- Dipole for evaluating the proper functioning of the system

Component details are described in in the following sub-sections.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUZOEY Page Number : 10 of 36
Report Issued Date : Jul. 18, 2013
Report Version : Rev. 01



5.1 E-Field Probe

The SAR measurement is conducted with the dosimetric probe (manufactured by SPEAG). The probe is specially designed and calibrated for use in liquid with high permittivity. The dosimetric probe has special calibration in liquid at different frequency. This probe has a built in optical surface detection system to prevent from collision with phantom.

E-Field Probe Specification 5.1.1

<EX3DV4 Probe>

Construction	Symmetrical design with triangular core	
	Built-in shielding against static charges	
	PEEK enclosure material (resistant to organic	
	solvents, e.g., DGBE)	-
Frequency	10 MHz to 6 GHz; Linearity: ± 0.2 dB	
Directivity	± 0.3 dB in HSL (rotation around probe axis)	· ·
	± 0.5 dB in tissue material (rotation normal to	
	probe axis)	8
Dynamic Range	10 μW/g to 100 mW/g; Linearity: ± 0.2 dB	
	(noise: typically < 1 μW/g)	
Dimensions	Overall length: 330 mm (Tip: 20 mm)	
	Tip diameter: 2.5 mm (Body: 12 mm)	
	Typical distance from probe tip to dipole	
	centers: 1 mm	
	303.3.	
		Fig 5.2 Photo of EX3DV4
		Filoto of EX3DV4

5.1.2 E-Field Probe Calibration

Each probe needs to be calibrated according to a dosimetric assessment procedure with accuracy better than ± 10%. The spherical isotropy shall be evaluated and within ± 0.25dB. The sensitivity parameters (NormX, NormY, and NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested. The calibration data can be referred to appendix C of this report.

5.2 Data Acquisition Electronics (DAE)

The data acquisition electronics (DAE) consists of a highly sensitive electrometer-grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock. The input impedance of the DAE is 200 MOhm; the inputs are symmetrical and floating. Common mode rejection is above 80 dB.



Report No. : FA361702

Fig 5.3 **Photo of DAE**

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUZOEY

: 11 of 36 Page Number Report Issued Date: Jul. 18, 2013

Report Version : Rev. 01

5.3 Robot

The SPEAG DASY system uses the high precision robots (DASY5: TX90XL) type from Stäubli SA (France). For the 6-axis controller system, the robot controller version (DASY5: CS8c) from Stäubli is used. The Stäubli robot series have many features that are important for our application:

- High precision (repeatability ±0.035 mm)
- High reliability (industrial design)
- Jerk-free straight movements
- > Low ELF interference (the closed metallic construction shields against motor control fields)



Fig 5.4 Photo of DASY5

5.4 Measurement Server

The measurement server is based on a PC/104 CPU board with CPU (DASY5: 400 MHz, Intel Celeron), chipdisk (DASY5: 128 MB), RAM (DASY5: 128 MB). The necessary circuits for communication with the DAE electronic box, as well as the 16 bit AD converter system for optical detection and digital I/O interface are contained on the DASY I/O board, which is directly connected to the PC/104 bus of the CPU board.

The measurement server performs all the real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operations.



Fig 5.5 Photo of Server for DASY5

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUZOEY Page Number : 12 of 36
Report Issued Date : Jul. 18, 2013
Report Version : Rev. 01



Report No. : FA361702

5.5 Phantom

<SAM Twin Phantom>

OAN IWIII I Halltoille		
Shell Thickness	2 ± 0.2 mm;	
	Center ear point: 6 ± 0.2 mm	
Filling Volume	Approx. 25 liters	THE THE
Dimensions	Length: 1000 mm; Width: 500 mm; Height: adjustable feet	
Measurement Areas	Left Hand, Right Hand, Flat Phantom	Fig 5.6 Photo of SAM Phantom

The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. A white cover is provided to tap the phantom during off-periods to prevent water evaporation and changes in the liquid parameters. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

5.6 <u>Device Holder</u>

<Device Holder for SAM Twin Phantom>

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source at 5 mm distance, a positioning uncertainty of ± 0.5 mm would produce a SAR uncertainty of ± 20 %. Accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions in which the devices must be measured are defined by the standards.

The DASY device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation center for both scales is the ear reference point (ERP). Thus the device needs no repositioning when changing the angles.

The DASY device holder is constructed of low-loss POM material having the following dielectric parameters: relative permittivity $\varepsilon = 3$ and loss tangent $\delta = 0.02$. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.



Fig 5.7 **Device Holder**

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUZOEY

Page Number : 13 of 36 Report Issued Date: Jul. 18, 2013 Report Version : Rev. 01



5.7 Data Storage and Evaluation

5.7.1 Data Storage

The DASY software stores the assessed data from the data acquisition electronics as raw data (in microvolt readings from the probe sensors), together with all the necessary software parameters for the data evaluation (probe calibration data, liquid parameters and device frequency and modulation data) in measurement files. The post-processing software evaluates the desired unit and format for output each time the data is visualized or exported. This allows verification of the complete software setup even after the measurement and allows correction of erroneous parameter settings. For example, if a measurement has been performed with an incorrect crest factor parameter in the device setup, the parameter can be corrected afterwards and the data can be reevaluated.

The measured data can be visualized or exported in different units or formats, depending on the selected probe type (e.g., [V/m], [A/m], [mW/g]). Some of these units are not available in certain situations or give meaningless results, e.g., a SAR-output in a non-lose media, will always be zero. Raw data can also be exported to perform the evaluation with other software packages.

5.7.2 Data Evaluation

Device parameters:

The DASY post-processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters: - Sensitivity Norm_i, a_{i0}, a_{i1}, a_{i2}

 $\begin{array}{lll} \text{- Conversion factor} & \text{ConvF}_i \\ \text{- Diode compression point} & \text{dcp}_i \\ \text{- Frequency} & \text{f} \end{array}$

- Crest factor cf

Media parameters: - Conductivity σ
- Density ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multi-meter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power.

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUZOEY Page Number : 14 of 36
Report Issued Date : Jul. 18, 2013
Report Version : Rev. 01



The formula for each channel can be given as :

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

Report No. : FA361702

with V_i = compensated signal of channel i, (i = x, y, z)

 U_i = input signal of channel i, (i = x, y, z)

cf = crest factor of exciting field (DASY parameter) dcp_i = diode compression point (DASY parameter)

From the compensated input signals, the primary field data for each channel can be evaluated:

E-field Probes : $E_i = \sqrt{\frac{V_i}{Norm_i \cdot ConvF}}$

H-field Probes : $H_i = \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$

with V_i = compensated signal of channel i, (i = x, y, z)

Norm_i = sensor sensitivity of channel i, (i = x, y, z), $\mu V/(V/m)^2$ for E-field Probes

ConvF = sensitivity enhancement in solution a_{ij} = sensor sensitivity factors for H-field probes

f = carrier frequency [GHz]

 E_i = electric field strength of channel i in V/m H_i = magnetic field strength of channel i in A/m

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{o \cdot 1000}$$

with SAR = local specific absorption rate in mW/g

E_{tot} = total field strength in V/m

 σ = conductivity in [mho/m] or [Siemens/m]

 ρ = equivalent tissue density in g/cm³

Note that the density is set to 1, to account for actual head tissue density rather than the density of the tissue simulating liquid.

Page Number

Report Version

: 15 of 36

: Rev. 01

Report Issued Date: Jul. 18, 2013



5.8 Test Equipment List

Manufacturer	Name of Faviores at	Turno/Mondol	Carial Number	Calib	ration
Manufacturer	Name of Equipment	Type/Model	Serial Number	Last Cal.	Due Date
SPEAG	835MHz System Validation Kit	D835V2	4d091	Nov. 18, 2011	Nov. 16, 2013
SPEAG	1900MHz System Validation Kit	D1900V2	5d118	Nov. 21, 2011	Nov. 16, 2013
SPEAG	Data Acquisition Electronics	DAE4	1303	Nov. 22, 2012	Nov. 21, 2013
SPEAG	Dosimetric E-Field Probe	EX3DV4	3819	Nov. 26, 2012	Nov. 25, 2013
SPEAG	SAM Twin Phantom	QD 000 P40 CD	TP-1670	NCR	NCR
SPEAG	SAM Twin Phantom	QD 000 P40 CD	TP-1671	NCR	NCR
SPEAG	Phone Positioner	N/A	N/A	NCR	NCR
Agilent	Base Station	E5515C	MY50267224	Dec. 29, 2011	Dec. 28, 2013
Agilent	ENA Series Network Analyzer	E5071C	MY46106933	Aug. 31, 2012	Aug. 30, 2013
Agilent	Dielectric Probe Kit	85070E	MY44300475	NCR	NCR
AR	Amplifier	551G4	333096	NCR	NCR
Anritsu	Power Meter	ML2495A	1218010	Mar. 28, 2013	Mar. 27, 2014
Anritsu	Power Sensor	MA2411B	1207253	Mar. 28, 2013	Mar. 27, 2014
ARRA	Power Divider	A3200-2	N/A	NA	NA
MCL	Attenuation	BW-S10W5	N/A	NA	NA
Agilent	Dual Directional Coupler	778D	50422	No	te 4
Woken	Attenuator 1	WK0602-XX	N/A	No	te 4
PE	Attenuator 2	PE7005-10	N/A	No	te 4
PE	Attenuator 3	PE7005- 3	N/A	No	te 4
Agilent	Dielectric Probe Kit	85070D	US01440205	No	te 5
AR	Power Amplifier	5S1G4M2	328767	No	te 6
R&S	Spectrum Analyzer	FSP30	100818	Aug. 22, 2012	Aug. 21, 2013

Report No. : FA361702

Table 5.1 Test Equipment List

Note:

- 1. The calibration certificate of DASY can be referred to appendix C of this report.
- 2. Referring to KDB 865664 D01v01, the dipole calibration interval can be extended to 3 years with justification. The dipoles are also not physically damaged, or repaired during the interval.
- 3. The justification data of dipole D835V2, SN: 4d091, D1900V2, SN: 5d118, can be found in appendix C. The return loss is < -20dB, within 20% of prior calibration, the impedance is within 5 ohm of prior calibration.
- 4. The Insertion Loss calibration of Dual Directional Coupler and Attenuator were characterized via the network analyzer and compensated during system check.
- 5. The dielectric probe kit was calibrated via the network analyzer, with the specified procedure (calibrated in pure water) and calibration kit (standard) short circuit, before the dielectric measurement. The specific procedure and calibration kit are provided by Agilent.
- 6. In system check we need to monitor the level on the power meter, and adjust the power amplifier level to have precise power level to the dipole; the measured SAR will be normalized to 1W input power according to the ratio of 1W to the input power to the dipole. For system check, the calibration of the power amplifier is deemed not critically required for correct measurement; the power meter is critical and we do have calibration for it
- Attenuator 1 insertion loss is calibrated by the network Analyzer, which the calibration is valid, before system
 check.

 SPORTON INTERNATIONAL (SHENZHEN) INC.
 Page Number
 : 16 of 36

 TEL: 86-755-8637-9589
 Report Issued Date
 : Jul. 18, 2013

 FAX: 86-755-8637-9595
 Report Version
 : Rev. 01

FCC ID: YHLBLUZOEY



Report No. : FA361702

6. Tissue Simulating Liquids

For the measurement of the field distribution inside the SAM phantom with DASY, the phantom must be filled with around 25 liters of homogeneous body tissue simulating liquid. For head SAR testing, the liquid height from the ear reference point (ERP) of the phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 6.1. For body SAR testing, the liquid height from the center of the flat phantom to the liquid top surface is larger than 15 cm, which is shown in Fig. 6.2.





Fig 6.1 Photo of Liquid Height for Head SAR

Fig 6.2 Photo of Liquid Height for Body SAR

The following table gives the recipes for tissue simulating liquid.

Frequency	Water	Sugar	Cellulose	Salt	Preventol	DGBE	Conductivity	Permittivity		
(MHz)	(%)	(%)	(%)	(%)	(%)	(%)	(σ)	(ε _r)		
For Head										
835	40.3	57.9	0.2	1.4	0.2	0	0.90	41.5		
1800, 1900, 2000	55.2	0	0	0.3	0	44.5	1.40	40.0		
				For Body						
835	50.8	48.2	0	0.9	0.1	0	0.97	55.2		
1800, 1900, 2000	70.2	0	0	0.4	0	29.4	1.52	53.3		

Table 6.1 Recipes of Tissue Simulating Liquid

The dielectric parameters of the liquids were verified prior to the SAR evaluation using an Agilent 85070D Dielectric Probe Kit and an Agilent Network Analyzer.

The following table shows the measuring results for simulating liquid.

	no following table offere the measuring results for simulating liquid.											
Frequency (MHz)	Liquid Type	Liquid Temp. (℃)	Conductivity (σ)	Permittivity (ε _r)	Conductivity Target (σ)	Permittivity Target (ε _r)	Delta (σ) (%)	Delta (ε _r) (%)	Limit (%)	Date		
835	Head	21.8	0.901	41.605	0.90	41.5	0.11	0.25	±5	Jun. 24, 2013		
1900	Head	21.9	1.407	39.644	1.40	40.0	0.50	-0.89	±5	Jun. 25, 2013		
835	Body	21.5	0.978	54.413	0.97	55.2	0.82	-1.43	±5	Jun. 25, 2013		
1900	Body	21.3	1.531	54.671	1.52	53.3	0.72	2.57	±5	Jun. 25, 2013		

Table 6.2 Measuring Results for Simulating Liquid

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUZOEY Page Number : 17 of 36
Report Issued Date : Jul. 18, 2013
Report Version : Rev. 01



port Report No. : FA361702

7. System Verification Procedures

Each DASY system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the DASY software, enable the user to conduct the system performance check and system validation. System validation kit includes a dipole, tripod holder to fix it underneath the flat phantom and a corresponding distance holder.

7.1 Purpose of System Performance check

The system performance check verifies that the system operates within its specifications. System and operator errors can be detected and corrected. It is recommended that the system performance check be performed prior to any usage of the system in order to guarantee reproducible results. The system performance check uses normal SAR measurements in a simplified setup with a well characterized source. This setup was selected to give a high sensitivity to all parameters that might fail or vary over time. The system check does not intend to replace the calibration of the components, but indicates situations where the system uncertainty is exceeded due to drift or failure.

7.2 System Setup

In the simplified setup for system evaluation, the EUT is replaced by a calibrated dipole and the power source is replaced by a continuous wave that comes from a signal generator. The calibrated dipole must be placed beneath the flat phantom section of the SAM twin phantom with the correct distance holder. The distance holder should touch the phantom surface with a light pressure at the reference marking and be oriented parallel to the long side of the phantom. The equipment setup is shown below:

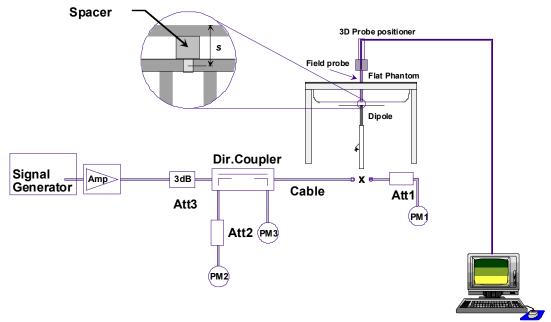


Fig 7.1 System Setup for System Evaluation

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUZOEY Page Number : 18 of 36
Report Issued Date : Jul. 18, 2013
Report Version : Rev. 01



- 1. Signal Generator
- 2. Amplifier
- 3. Directional Coupler
- Power Meter
- 5. Calibrated Dipole



Fig 7.2 Photo of Dipole Setup

7.3 SAR System Verification Results

Comparing to the original SAR value provided by SPEAG, the verification data should be within its specification of 10 %. Table 7.1 shows the target SAR and measured SAR after normalized to 1W input power. The table below indicates the system performance check can meet the variation criterion and the plots can be referred to Appendix A of this report.

Date	Frequency (MHz)	Liquid Type	Power fed onto reference dipole (mW)	Targeted SAR (W/kg)	Measured SAR (W/kg)	Normalized SAR (W/kg)	Deviation (%)
Jun. 24, 2013	835	Head	250	9.40	2.51	10.04	6.81
Jun. 25, 2013	1900	Head	250	40.3	9.91	39.64	-1.64
Jun. 25, 2013	835	Body	250	9.42	2.32	9.28	-1.49
Jun. 25, 2013	1900	Body	250	41.8	10.3	41.2	-1.44

Table 7.1 Target and Measurement SAR after Normalized

SPORTON INTERNATIONAL (SHENZHEN) INC.

FAX: 86-755-8637-9595 FCC ID: YHLBLUZOEY

TEL: 86-755-8637-9589

Page Number : 19 of 36
Report Issued Date : Jul. 18, 2013
Report Version : Rev. 01



Report No. : FA361702

8. EUT Testing Position

This EUT was tested in six different positions. They are right cheek/right tilted/left cheek/left tilted for Head, Front/Band of the EUT with phantom 1.5 cm gap, as illustrated below, please refer to Appendix D for the test setup photos.

8.1 Define two imaginary lines on the handset

- (a) The vertical centerline passes through two points on the front side of the handset the midpoint of the width w_t of the handset at the level of the acoustic output, and the midpoint of the width w_b of the bottom of the handset.
- (b) The horizontal line is perpendicular to the vertical centerline and passes through the center of the acoustic output. The horizontal line is also tangential to the face of the handset at point A.
- The two lines intersect at point A. Note that for many handsets, point A coincides with the center of the acoustic output; however, the acoustic output may be located elsewhere on the horizontal line. Also note that the vertical centerline is not necessarily parallel to the front face of the handset, especially for clamshell handsets, handsets with flip covers, and other irregularly shaped handsets.

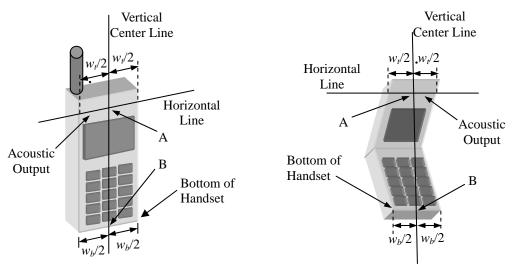


Fig 8.1 Illustration for Handset Vertical and Horizontal Reference Lines

SPORTON INTERNATIONAL (SHENZHEN) INC.

FAX: 86-755-8637-9595 FCC ID: YHLBLUZOEY

TEL: 86-755-8637-9589

Page Number : 20 of 36
Report Issued Date : Jul. 18, 2013
Report Version : Rev. 01



Report No. : FA361702

8.2 Cheek Position

- (a) To position the device with the vertical center line of the body of the device and the horizontal line crossing the center piece in a plane parallel to the sagittal plane of the phantom. While maintaining the device in this plane, align the vertical center line with the reference plane containing the three ear and mouth reference point (M: Mouth, RE: Right Ear, and LE: Left Ear) and align the center of the ear piece with the line RE-LE.
- (b) To move the device towards the phantom with the ear piece aligned with the line LE-RE until the phone touched the ear. While maintaining the device in the reference plane and maintaining the phone contact with the ear, move the bottom of the phone until any point on the front side is in contact with the cheek of the phantom or until contact with the ear is lost (see Fig. 8.2).







Fig 8.2 Illustration for Cheek Position

8.3 Tilted Position

- (a) To position the device in the "cheek" position described above.
- (b) While maintaining the device the reference plane described above and pivoting against the ear, moves it outward away from the mouth by an angle of 15 degrees or until contact with the ear is lost (see Fig. 8.3).








Fig 8.3 Illustration for Tilted Position

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUZOEY Page Number : 21 of 36
Report Issued Date : Jul. 18, 2013
Report Version : Rev. 01

8.4 Body Worn Position

- (a) To position the device parallel to the phantom surface with either keypad up or down.
- (b) To adjust the device parallel to the flat phantom.
- (c) To adjust the distance between the device surface and the flat phantom to 1.5 cm.

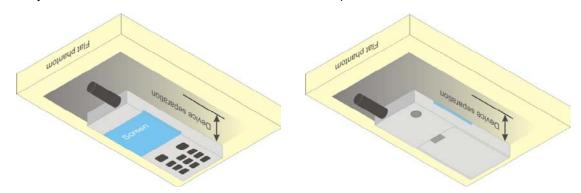


Fig 8.4 Illustration for Body Worn Position

8.5 Hotspot Position

- (a) To position the device parallel to the phantom surface with all sides and either keypad up or down.
- (b) To adjust the device parallel to the flat phantom.
- (c) To adjust the distance between the device and the flat phantom to 1.0cm.

<EUT Setup Photos>

Please refer to Appendix D for the test setup photos.

SPORTON INTERNATIONAL (SHENZHEN) INC.

FAX: 86-755-8637-9595 FCC ID: YHLBLUZOEY

TEL: 86-755-8637-9589

Page Number : 22 of 36
Report Issued Date : Jul. 18, 2013
Report Version : Rev. 01

9. Measurement Procedures

The measurement procedures are as follows:

<Conducted power measurement>

(a) For WWAN power measurement, use base station simulator to configure EUT WWAN transmission in conducted connection with RF cable, at maximum power in each supported wireless interface and frequency band.

Report No. : FA361702

- (b) Read the WWAN RF power level from the base station simulator.
- (c) For WLAN/BT power measurement, use engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power in each supported wireless interface and frequency band
- (d) Connect EUT RF port through RF cable to the power meter, and measure WLAN/BT output power

<SAR measurement>

- (a) Use base station simulator to configure EUT WWAN transmission in radiated connection, and engineering software to configure EUT WLAN/BT continuously transmission, at maximum RF power, in the highest power channel.
- (b) Place the EUT in the positions as Appendix D demonstrates.
- (c) Set scan area, grid size and other setting on the DASY software.
- (d) Measure SAR results for the highest power channel on each testing position.
- (e) Find out the largest SAR result on these testing positions of each band
- (f) Measure SAR results for other channels in worst SAR testing position if the reported SAR of highest power channel is larger than 0.8 W/kg

According to the test standard, the recommended procedure for assessing the peak spatial-average SAR value consists of the following steps:

- (a) Power reference measurement
- (b) Area scan
- (c) Zoom scan
- (d) Power drift measurement

9.1 Spatial Peak SAR Evaluation

The procedure for spatial peak SAR evaluation has been implemented according to the test standard. It can be conducted for 1g and 10g, as well as for user-specific masses. The DASY software includes all numerical procedures necessary to evaluate the spatial peak SAR value.

The base for the evaluation is a "cube" measurement. The measured volume must include the 1g and 10g cubes with the highest averaged SAR values. For that purpose, the center of the measured volume is aligned to the interpolated peak SAR value of a previously performed area scan.

The entire evaluation of the spatial peak values is performed within the post-processing engine (SEMCAD). The system always gives the maximum values for the 1g and 10g cubes. The algorithm to find the cube with highest averaged SAR is divided into the following stages:

- (a) Extraction of the measured data (grid and values) from the Zoom Scan
- (b) Calculation of the SAR value at every measurement point based on all stored data (A/D values and measurement parameters)
- (c) Generation of a high-resolution mesh within the measured volume
- (d) Interpolation of all measured values form the measurement grid to the high-resolution grid
- (e) Extrapolation of the entire 3-D field distribution to the phantom surface over the distance from sensor to surface
- (f) Calculation of the averaged SAR within masses of 1g and 10g

 SPORTON INTERNATIONAL (SHENZHEN) INC.
 Page Number
 : 23 of 36

 TEL: 86-755-8637-9589
 Report Issued Date
 : Jul. 18, 2013

 FAX: 86-755-8637-9595
 Report Version
 : Rev. 01

FCC ID: YHLBLUZOEY



9.2 Power Reference Measurement

The Power Reference Measurement and Power Drift Measurements are for monitoring the power drift of the device under test in the batch process. The minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. This distance cannot be smaller than the distance of sensor calibration points to probe tip as defined in the probe properties.

9.3 Area & Zoom Scan Procedures

First Area Scan is used to locate the approximate location(s) of the local peak SAR value(s). The measurement grid within an Area Scan is defined by the grid extent, grid step size and grid offset. Next, in order to determine the EM field distribution in a three-dimensional spatial extension, Zoom Scan is required. The Zoom Scan is performed around the highest E-field value to determine the averaged SAR-distribution over 10 g. Area scan and zoom scan resolution setting follows KDB 865664 D01v01 quoted below.

When the 1-g SAR of the highest peak is within 2 dB of the SAR limit, additional zoom scans are required for other peaks within 2 dB of the highest peak that have not been included in any zoom scan to ensure there is no increase in SAR.

			≤ 3 GHz	> 3 GHz	
Maximum distance from (geometric center of pro			5 ± 1 mm	½-δ-ln(2) ± 0.5 mm	
Maximum probe angle in normal at the measurem			30° ± 1° 20° ± 1°		
			≤ 2 GHz: ≤ 15 mm 2 – 3 GHz: ≤ 12 mm	3 – 4 GHz: ≤ 12 mm 4 – 6 GHz: ≤ 10 mm	
Maximum area scan spa	tial resoluti	on: Δx _{Area} , Δy _{Area}	When the x or y dimension of the test device, in the measurement plane orientation, is smaller than the above, the measurement resolution must be ≤ the corresponding x or y dimension of the test device with at least one measurement point on the test device.		
Maximum zoom scan sp	oatial resolu	tion: Δx _{Zoom} , Δy _{Zoom}	≤ 2 GHz: ≤ 8 mm 2 - 3 GHz: ≤ 5 mm*	3 – 4 GHz: ≤ 5 mm* 4 – 6 GHz: ≤ 4 mm*	
	uniform g	rid: Δz _{Zoom} (n)	≤ 5 mm	3 – 4 GHz: ≤ 4 mm 4 – 5 GHz: ≤ 3 mm 5 – 6 GHz: ≤ 2 mm	
Maximum zoom scan spatial resolution, normal to phantom surface	graded grid \[\text{\Delta z_{z_{0000}}}(1): \text{ between } 1^{st} \\ \text{two points closest to} \\ \text{phantom surface} \] \[\text{\Delta z_{z_{0000}}}(n>1): \text{ between } \\ \text{subsequent points} \]	two points closest to	≤ 4 mm	3 – 4 GHz: ≤ 3 mm 4 – 5 GHz: ≤ 2.5 mm 5 – 6 GHz: ≤ 2 mm	
Surve		$\leq 1.5 \cdot \Delta z_{Zoom}(n-1)$			
Minimum zoom scan volume	x, y, z		≥ 30 mm	3 – 4 GHz: ≥ 28 mm 4 – 5 GHz: ≥ 25 mm 5 – 6 GHz: ≥ 22 mm	

Note: δ is the penetration depth of a plane-wave at normal incidence to the tissue medium; see draft standard IEEE P1528-2011 for details.

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 Repor FAX: 86-755-8637-9595 Repor FCC ID: YHLBLUZOEY

Page Number : 24 of 36
Report Issued Date : Jul. 18, 2013
Report Version : Rev. 01

When zoom scan is required and the <u>reported</u> SAR from the area scan based 1-g SAR estimation procedures of KDB 447498 is ≤ 1.4 W/kg, ≤ 8 mm, ≤ 7 mm and ≤ 5 mm zoom scan resolution may be applied, respectively, for 2 GHz to 3 GHz, 3 GHz to 4 GHz and 4 GHz to 6 GHz.



9.4 Volume Scan Procedures

The volume scan is used for assess overlapping SAR distributions for antennas transmitting in different frequency bands. It is equivalent to an oversized zoom scan used in standalone measurements. The measurement volume will be used to enclose all the simultaneous transmitting antennas. For antennas transmitting simultaneously in different frequency bands, the volume scan is measured separately in each frequency band. In order to sum correctly to compute the 1g aggregate SAR, the EUT remain in the same test position for all measurements and all volume scan use the same spatial resolution and grid spacing. When all volume scan were completed, the software, SEMCAD postprocessor can combine and subsequently superpose these measurement data to calculating the multiband SAR.

9.5 SAR Averaged Methods

In DASY, the interpolation and extrapolation are both based on the modified Quadratic Shepard's method. The interpolation scheme combines a least-square fitted function method and a weighted average method which are the two basic types of computational interpolation and approximation.

Extrapolation routines are used to obtain SAR values between the lowest measurement points and the inner phantom surface. The extrapolation distance is determined by the surface detection distance and the probe sensor offset. The uncertainty increases with the extrapolation distance. To keep the uncertainty within 1% for the 1 g and 10 g cubes, the extrapolation distance should not be larger than 5 mm.

9.6 Power Drift Monitoring

All SAR testing is under the EUT install full charged battery and transmit maximum output power. In DASY measurement software, the power reference measurement and power drift measurement procedures are used for monitoring the power drift of EUT during SAR test. Both these procedures measure the field at a specified reference position before and after the SAR testing. The software will calculate the field difference in dB. If the power drifts more than 5%, the SAR will be retested.

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUZOEY

Page Number : 25 of 36 Report Issued Date: Jul. 18, 2013

Report No. : FA361702

Report Version : Rev. 01

10. Conducted RF Output Power (Unit: dBm)

<GSM Conducted Power>

Note:

- 1. Per KDB 447498 D01v05r01, the maximum output power channel is used for SAR testing and for further SAR test reduction.
- 2. The EUT do not support DTM function.
- 3. For Head SAR testing, GSM should be evaluated, therefore the EUT was set in GSM Voice for GSM850 and GSM1900 due to its highest frame-average power.
- 4. For Body worn SAR testing, GSM should be evaluated, therefore the EUT was set in GSM Voice for GSM850 and GSM1900 due to its highest frame-average power.

For SIM1 Card

Band GSM850	Burst A	verage Powe	er (dBm)	Frame-Average Power (dBm)			
TX Channel	128	189	251	128	189	251	
Frequency (MHz)	824.2	836.4	848.8	824.2	836.4	848.8	
GSM (GMSK, 1 Tx slot)	32.03	31.98	32.07	23.03	22.98	23.07	
GPRS (GMSK, 1 Tx slot) - CS1	32.01	31.91	32.02	23.01	22.91	23.02	
GPRS (GMSK, 2 Tx slots) - CS1	31.43	31.25	31.47	25.43	25.25	25.47	
GPRS (GMSK, 3 Tx slots) - CS1	29.77	29.65	29.86	25.51	25.39	25.60	
GPRS (GMSK, 4 Tx slots) - CS1	28.68	28.58	28.71	25.68	25.58	<mark>25.71</mark>	

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB
Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB
Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB
Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

Band GSM1900	Burst A	verage Powe	er (dBm)	Frame-Average Power (dBm)			
TX Channel	512	661	810	512	661	810	
Frequency (MHz)	1850.2	1880	1909.8	1850.2	1880	1909.8	
GSM (GMSK, 1 Tx slot)	29.17	29.08	<mark>29.28</mark>	20.17	20.08	20.28	
GPRS (GMSK, 1 Tx slot) - CS1	29.12	29.03	29.24	20.12	20.03	20.24	
GPRS (GMSK, 2 Tx slots) – CS1	28.58	28.47	28.70	22.58	22.47	22.70	
GPRS (GMSK, 3 Tx slots) – CS1	27.04	26.92	27.16	22.78	22.66	22.90	
GPRS (GMSK, 4 Tx slots) - CS1	25.97	25.85	26.08	22.97	22.85	<mark>23.08</mark>	

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB

Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB

Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB

Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

SPORTON INTERNATIONAL (SHENZHEN) INC.
TEL: 86-755-8637-9589

FAX: 86-755-8637-9595 FCC ID: YHLBLUZOEY Page Number : 26 of 36
Report Issued Date : Jul. 18, 2013

Report No. : FA361702

Report Version : Rev. 01



For SIM2 Card

Band GSM850	Burst A	verage Powe	er (dBm)	Frame-Average Power (dBm)			
TX Channel	128	189	251	128	189	251	
Frequency (MHz)	824.2	836.4	848.8	824.2	836.4	848.8	
GSM (GMSK, 1 Tx slot)	32.02	31.94	<mark>32.04</mark>	23.02	22.94	23.04	
GPRS (GMSK, 1 Tx slot) – CS1	32.03	31.92	32.03	23.03	22.92	23.03	
GPRS (GMSK, 2 Tx slots) – CS1	31.40	31.25	31.47	25.40	25.25	25.47	
GPRS (GMSK, 3 Tx slots) - CS1	29.77	29.64	29.85	25.51	25.38	25.59	
GPRS (GMSK, 4 Tx slots) - CS1	28.66	28.57	28.69	25.66	25.57	<mark>25.69</mark>	

Report No. : FA361702

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB
Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB
Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB
Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

Band GSM1900	Burst Average Power (dBm)			Frame-Average Power (dBm)			
TX Channel	512	661	810	512	661	810	
Frequency (MHz)	1850.2	1880	1909.8	1850.2	1880	1909.8	
GSM (GMSK, 1 Tx slot)	29.12	29.03	<mark>29.26</mark>	20.12	20.03	20.26	
GPRS (GMSK, 1 Tx slot) – CS1	29.11	29.03	29.25	20.11	20.03	20.25	
GPRS (GMSK, 2 Tx slots) – CS1	28.57	28.47	28.71	22.57	22.47	22.71	
GPRS (GMSK, 3 Tx slots) – CS1	27.04	26.92	27.16	22.78	22.66	22.90	
GPRS (GMSK, 4 Tx slots) - CS1	25.99	25.86	26.07	22.99	22.86	23.07	

Remark: The frame-averaged power is linearly scaled the maximum burst averaged power over 8 time slots.

The calculated method are shown as below:

Frame-averaged power = Maximum burst averaged power (1 Tx Slot) - 9 dB
Frame-averaged power = Maximum burst averaged power (2 Tx Slots) - 6 dB
Frame-averaged power = Maximum burst averaged power (3 Tx Slots) - 4.26 dB
Frame-averaged power = Maximum burst averaged power (4 Tx Slots) - 3 dB

<Bluetooth Conducted Power>

	Bluetooth Average Power (dBm)									
Ob and all	Frequency (MHz)	Data Rate								
Channel		DH1	DH3	DH5	2DH1	2DH3	2DH5	3DH1	3DH3	3DH5
CH 00	2402	<mark>8.67</mark>	8.60	8.61	7.26	6.99	6.94	7.30	7.10	6.94
CH 39	2441	8.15	7.88	8.14	6.65	6.49	6.30	6.69	6.47	6.32
CH 78	2480	8.49	8.65	8.50	6.96	6.72	6.53	6.98	6.70	6.53

Note:

1. Per KDB 447498 D01v05r01, the 1-g and 10-g SAR test exclusion thresholds for 100 MHz to 6 GHz at *test separation distances* ≤ 50 mm are determined by:

[(max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)] $\cdot [\sqrt{f(GHz)}] \le 3.0$ for 1-g SAR and ≤ 7.5 for 10-g extremity SAR

- f(GHz) is the RF channel transmit frequency in GHz
- Power and distance are rounded to the nearest mW and mm before calculation
- The result is rounded to one decimal place for comparison
- If the test separation distance (antenna-user) is < 5mm, 5mm is used for excluded SAR calculation

Bluetooth Max Power (dBm)	mW	Test Distance (mm)	Frequency (GHz)	exclusion thresholds	
9	7.94	0	2.48	2.50	

2. Per KDB 447498 D01v05r01 exclusion thresholds is 2.50 < 3, RF exposure evaluation is not required.

 SPORTON INTERNATIONAL (SHENZHEN) INC.
 Page Number
 : 27 of 36

 TEL: 86-755-8637-9589
 Report Issued Date
 : Jul. 18, 2013

 FAX: 86-755-8637-9595
 Report Version
 : Rev. 01

FCC ID: YHLBLUZOEY

11. SAR Test Results

Note:

Per KDB 447498 D01v05r01, the reported SAR is the measured SAR value adjusted for maximum tune-up tolerance. Scaling Factor = tune-up limit power (mW) / EUT RF power (mW), where tune-up limit is the maximum rated power among all production units.

Report No. : FA361702

: 28 of 36

: Rev. 01

Report Version

- Reported SAR(W/kg)= Measured SAR(W/kg)* Scaling Factor
- Per KDB 447498 D01v05r01, for each exposure position, if the highest output channel reported SAR ≤0.8W/kg, other channels SAR testing is not necessary.

11.1 Test Records for Head SAR Test

<GSM SAR>

Plot No.	Band	Mode	Test Position	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
01	GSM 850	GSM Voice	Right Cheek	251	848.8	32.07	32.5	1.104	-0.13	1.04	1.148
02	GSM 850	GSM Voice	RightTilted	251	848.8	32.07	32.5	1.104	-0.05	0.526	0.581
03	GSM 850	GSM Voice	Left Cheek	251	848.8	32.07	32.5	1.104	-0.02	0.792	0.874
04	GSM 850	GSM Voice	Left Tilted	251	848.8	32.07	32.5	1.104	-0.14	0.469	0.518
05	GSM 850	GSM Voice	Right Cheek	128	824.2	32.03	32.5	1.114	-0.11	0.814	0.907
06	GSM 850	GSM Voice	Right Cheek	189	836.4	31.98	32.5	1.127	-0.09	1.09	1.229
07	GSM 850	GSM Voice	Left Cheek	128	824.2	32.03	32.5	1.114	-0.18	0.705	0.786
80	GSM 850	GSM Voice	Left Cheek	189	836.4	31.98	32.5	1.127	-0.15	0.928	1.046
14	GSM 1900	GSM Voice	Right Cheek	810	1909.8	29.28	31	1.486	-0.09	0.361	0.536
15	GSM 1900	GSM Voice	RightTilted	810	1909.8	29.28	31	1.486	-0.04	0.230	0.342
16	GSM 1900	GSM Voice	Left Cheek	810	1909.8	29.28	31	1.486	-0.19	0.310	0.461
17	GSM 1900	GSM Voice	Left Tilted	810	1909.8	29.28	31	1.486	-0.13	0.277	0.412

11.2 Test Records for Body Worn SAR Test

Note:

- 1. Body-worn exposure conditions are intended to voice call operations, therefore GSM voice call mode is selected to
- 2. Per KDB 648474 D04v01, when the reported SAR for a body-worn accessory measured without a headset connected to the handset is ≤ 1.2 W/kg, SAR testing with a headset connected to the handset is not required.

<GSM SAR>

Plot No.	Band	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)	Average Power (dBm)	Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR _{1g} (W/kg)	Reported SAR _{1g} (W/kg)
12	GSM 850	GSM Voice	Front	1.5	251	848.8	32.07	32.5	1.104	-0.08	0.478	0.528
13	GSM 850	GSM Voice	Back	1.5	251	848.8	32.07	32.5	1.104	-0.05	0.603	<mark>0.666</mark>
10	GSM 1900	GSM Voice	Front	1.5	810	1909.8	29.28	31	1.486	-0.11	0.223	0.331
11	GSM 1900	GSM Voice	Back	1.5	810	1909.8	29.28	31	1.486	-0.07	0.450	<mark>0.669</mark>

SPORTON INTERNATIONAL (SHENZHEN) INC. Page Number TEL: 86-755-8637-9589 Report Issued Date: Jul. 18, 2013

FAX: 86-755-8637-9595 FCC ID: YHLBLUZOEY



11.3 Repeated SAR Measurement

Plot No.	ı Kannı	Mode	Test Position	Gap (cm)	Ch.	Freq. (MHz)		Tune-Up Limit (dBm)	Scaling Factor	Power Drift (dB)	Measured SAR _{1g} (W/kg)	Ratio	Reported SAR _{1g} (W/kg)
6	GSM 850	GSM Voice	Right Cheek	-	189	836.4	31.98	32.5	1.127	-0.09	1.09	1	1.229
9	GSM 850	GSM Voice	Right Cheek	-	189	836.4	31.98	32.5	1.127	-0.15	1.07	1.019	1.206

Note:

- 1. Per KDB 865664 D01v01, for each frequency band, repeated SAR measurement is required only when the measured SAR is ≥0.8W/kg
- 2. Per KDB 865664 D01v01, if the ratio among the repeated measurement is ≤ 1.2 and the measured SAR <1.45W/kg, only one repeated measurement is required.
- 3. The ratio is the difference in percentage between original and repeated *measured SAR*.
- 4. All measurement SAR result is scaled-up to account for tune-up tolerance and is compliant.

SPORTON INTERNATIONAL (SHENZHEN) INC.

FAX: 86-755-8637-9595 FCC ID: YHLBLUZOEY

TEL: 86-755-8637-9589

Page Number : 29 of 36
Report Issued Date : Jul. 18, 2013
Report Version : Rev. 01



11.4 Highest SAR Plot

Test Laboratory. Sporton International Inc. SAR/HAC Testing Lab Date: 24.06.2013

06 GSM850 GSM Voice Right Cheek Ch189

DUT: 361702

Communication System: Generic GSM; Frequency. 836.4 MHz; Duty Cycle: 1:8.3 Medium: HSL_835_130624 Medium parameters used: f=836.4 MHz; $\sigma=0.903$ mho/m; $\epsilon_r=41.588$;

 $\rho = 1000 \, \text{kg/m}^3$

Ambient Temperature : 23.5 °C; Liquid Temperature : 21.8 °C

DASY5 Configuration:

- Probe: EX3DV4 SN3819; ConvF(9.56, 9.56, 9.56); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)


Ch189/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 1.30 W/kg

Ch189/Zoom Scan (5x5x7)/CubeO: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 38.609 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.429 mW/g

SAR(1 g) = 1.09 mW/g; SAR(10 g) = 0.778 mW/g Maximum value of SAR (measured) = 1.29 W/kg

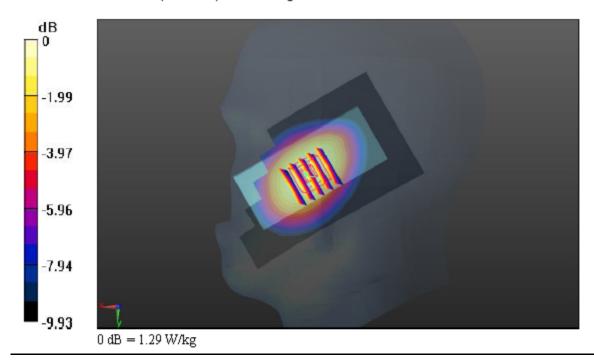

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUZOEY Page Number : 30 of 36
Report Issued Date : Jul. 18, 2013
Report Version : Rev. 01

Test Laboratory, Sporton International Inc. SAR/HAC Testing Lab Date: 25.06.2013

11 GSM1900_GSM Voice_Back_1.5cm_Ch810

DUT: 361702

Communication System: Generic GSM; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3 Medium: MSL_1900_130625 Medium parameters used: f = 1910 MHz; $\sigma = 1.54$ mho/m; $\epsilon_r = 54.651$;

 $\rho = 1000 \, \text{kg/m}^3$

Ambient Temperature : 23.1 °C; Liquid Temperature : 21.3 °C

DASY5 Configuration:

- Probe: EX3DV4 SN3819; ConvF(7.67, 7.67, 7.67); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch810/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 0.585 W/kg


Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.071 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.757 mW/g

SAR(1 g) = 0.450 mW/g; SAR(10 g) = 0.257 mW/g

Maximum value of SAR (measured) = 0.600 W/kg

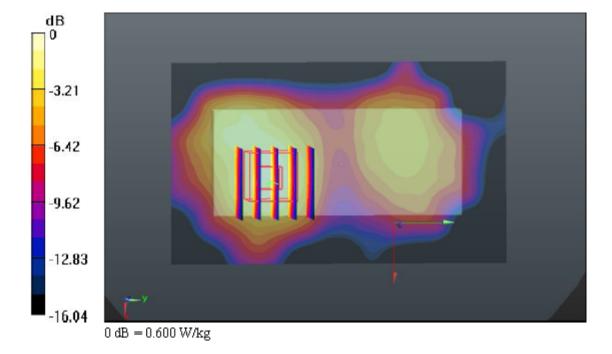

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUZOEY Page Number : 31 of 36
Report Issued Date : Jul. 18, 2013
Report Version : Rev. 01



12. Simultaneous Transmission Analysis

NO.	Simultaneous Transmission Configurations	Phon	ie	Note	
NO.	Simultaneous Transmission Comigurations	Head	Body-worn	Note	
1.	GSM(Voice) + Bluetooth(data)	Yes	Yes	Bluetooth P2P	

Note:

- The Repeated SAR summation is calculated based on the same configuration and test position.
- 2. Per KDB 447498 D01v05r01, simultaneous transmission SAR is compliant if,

 - i) Scalar SAR summation < 1.6W/kg.
 ii) SPLSR = (SAR₁ + SAR₂)^{1.5} / (min. separation distance, mm), and the peak separation distance is determined from the square root of [(x₁-x₂)² + (y₁-y₂)² + (z₁-z₂)²], where (x₁, y₁, z₁) and (x₂, y₂, z₂) are the coordinates of the extrapolated peak SAR locations in the zoom scan
 - If SPLSR ≤ 0.04, simultaneously transmission SAR measurement is not necessary
 - iii) Simultaneously transmission SAR measurement, and the reported multi-band SAR < 1.6W/kg
- For simultaneous transmission analysis, Bluetooth SAR is estimated per KDB 447498 D01v05r01 based on the formula below.
 - i) (max. power of channel, including tune-up tolerance, mW)/(min. test separation distance, mm)]·[√f(GHz)/x] W/kg for test separation distances \leq 50 mm; where x = 7.5 for 1-g SAR, and x = 18.75 for 10-g SAR.
 - ii) 0.4 W/kg for 1-g SAR and 1.0 W/kg for 10-g SAR, when the test separation distances is > 50 mm.

	Bluetooth								
	Exposure Position	Head	Body-worn						
Tune-up Maximum power (dBm)	Test separation (mm)	0	15						
	Antenna to user distance (mm)	0	15						
9	Estimated SAR (W/kg)	0.334	0.111						

SPORTON INTERNATIONAL (SHENZHEN) INC. TEL: 86-755-8637-9589 FAX: 86-755-8637-9595

FCC ID: YHLBLUZOEY

: 32 of 36 Page Number Report Issued Date: Jul. 18, 2013 Report Version : Rev. 01

12.1 <u>Head Exposure Conditions</u>

<WWAN-PCE+ Bluetooth-DSS>

	WWA	N-PCE		Bluetooth-DSS			
Position	WWAN Band	Plot No	Max. WWAN SAR (W/kg)	Estimated SAR (W/kg)	Summed SAR (W/kg)	SPLSR ≤ 0.04	Case No
Right Cheek	GSM850	06	1.229	0.334	1.563		
Right Cheek	GSM1900	14	0.536	0.334	0.870		
Right Tilted	GSM850	02	0.581	0.334	0.915		
Right Tilled	GSM1900	15	0.342	0.334	0.676		
Left Cheek	GSM850	80	1.046	0.334	1.380		
Left Cheek	GSM1900	16	0.461	0.334	0.795		
Left Tilted	GSM850	04	0.518	0.334	0.852		
Lent Tilled	GSM1900	17	0.412	0.334	0.746		

12.2 Body-Worn Exposure Conditions

<WWAN-PCE+ Bluetooth-DSS>

	WWAN-PCE		Bluetooth-DSS				
Position	WWAN Band	WWAN Band Plot No S		Estimated SAR (W/kg)	Summed SAR (W/kg)	SPLSR ≤ 0.04	Case No
Front	GSM850	12	0.528	0.111	0.64		
FIOIIL	GSM1900	10	0.331	0.111	0.44		
Back	GSM850	13	0.666	0.111	0.78		
Васк	GSM1900	11	0.669	0.111	<mark>0.78</mark>		

Test Engineer: Alden Liu

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUZOEY Page Number : 33 of 36
Report Issued Date : Jul. 18, 2013
Report Version : Rev. 01

13. <u>Uncertainty Assessment</u>

The component of uncertainly may generally be categorized according to the methods used to evaluate them. The evaluation of uncertainly by the statistical analysis of a series of observations is termed a Type An evaluation of uncertainty. The evaluation of uncertainty by means other than the statistical analysis of a series of observation is termed a Type B evaluation of uncertainty. Each component of uncertainty, however evaluated, is represented by an estimated standard deviation, termed standard uncertainty, which is determined by the positive square root of the estimated variance.

A Type A evaluation of standard uncertainty may be based on any valid statistical method for treating data. This includes calculating the standard deviation of the mean of a series of independent observations; using the method of least squares to fit a curve to the data in order to estimate the parameter of the curve and their standard deviations; or carrying out an analysis of variance in order to identify and quantify random effects in certain kinds of measurement.

A type B evaluation of standard uncertainty is typically based on scientific judgment using all of the relevant information available. These may include previous measurement data, experience, and knowledge of the behavior and properties of relevant materials and instruments, manufacture's specification, data provided in calibration reports and uncertainties assigned to reference data taken from handbooks. Broadly speaking, the uncertainty is either obtained from an outdoor source or obtained from an assumed distribution, such as the normal distribution, rectangular or triangular distributions indicated in Table 12.1

Uncertainty Distributions	Normal	Rectangular	Triangular	U-Shape
Multi-plying Factor ^(a)	1/k ^(b)	1/√3	1/√6	1/√2

- (a) standard uncertainty is determined as the product of the multiplying factor and the estimated range of variations in the measured quantity
- (b) κ is the coverage factor

Table 14.1 Standard Uncertainty for Assumed Distribution

The combined standard uncertainty of the measurement result represents the estimated standard deviation of the result. It is obtained by combining the individual standard uncertainties of both Type A and Type B evaluation using the usual "root-sum-squares" (RSS) methods of combining standard deviations by taking the positive square root of the estimated variances.

Expanded uncertainty is a measure of uncertainty that defines an interval about the measurement result within which the measured value is confidently believed to lie. It is obtained by multiplying the combined standard uncertainty by a coverage factor. Typically, the coverage factor ranges from 2 to 3. Using a coverage factor allows the true value of a measured quantity to be specified with a defined probability within the specified uncertainty range. For purpose of this document, a coverage factor two is used, which corresponds to confidence interval of about 95 %. The DASY uncertainty Budget is shown in the following tables.

SPORTON INTERNATIONAL (SHENZHEN) INC.

FAX: 86-755-8637-9595 FCC ID: YHLBLUZOEY

TFI: 86-755-8637-9589

Page Number : 34 of 36
Report Issued Date : Jul. 18, 2013
Report Version : Rev. 01

CC SAR Test Report	Report No. : FA361702

	Uncertainty	Probability		Ci	Ci	Standard	Standard		
Error Description	Value	Distribution	Divisor	(1g)	(10g)	Uncertainty	Uncertainty		
	(±%)					(1g)	(10g)		
Measurement System									
Probe Calibration	6.0	Normal	1	1	1	± 6.0 %	± 6.0 %		
Axial Isotropy	4.7	Rectangular	√3	0.7	0.7	± 1.9 %	± 1.9 %		
Hemispherical Isotropy	9.6	Rectangular	√3	0.7	0.7	± 3.9 %	± 3.9 %		
Boundary Effects	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %		
Linearity	4.7	Rectangular	√3	1	1	± 2.7 %	± 2.7 %		
System Detection Limits	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %		
Readout Electronics	0.3	Normal	1	1	1	± 0.3 %	± 0.3 %		
Response Time	0.8	Rectangular	√3	1	1	± 0.5 %	± 0.5 %		
Integration Time	2.6	Rectangular	√3	1	1	± 1.5 %	± 1.5 %		
RF Ambient Noise	3.0	Rectangular	√3	1	1	± 1.7 %	± 1.7 %		
RF Ambient Reflections	3.0	Rectangular	√3	1	1	± 1.7 %	± 1.7 %		
Probe Positioner	0.4	Rectangular	√3	1	1	± 0.2 %	± 0.2 %		
Probe Positioning	2.9	Rectangular	√3	1	1	± 1.7 %	± 1.7 %		
Max. SAR Eval.	1.0	Rectangular	√3	1	1	± 0.6 %	± 0.6 %		
Test Sample Related									
Device Positioning	2.9	Normal	1	1	1	± 2.9 %	± 2.9 %		
Device Holder	3.6	Normal	1	1	1	± 3.6 %	± 3.6 %		
Power Drift	5.0	Rectangular	√3	1	1	± 2.9 %	± 2.9 %		
Phantom and Setup									
Phantom Uncertainty	4.0	Rectangular	√3	1	1	± 2.3 %	± 2.3 %		
Liquid Conductivity (Target)	5.0	Rectangular	√3	0.64	0.43	± 1.8 %	± 1.2 %		
Liquid Conductivity (Meas.)	2.5	Normal	1	0.64	0.43	± 1.6 %	± 1.1 %		
Liquid Permittivity (Target)	5.0	Rectangular	√3	0.6	0.49	± 1.7 %	± 1.4 %		
Liquid Permittivity (Meas.)	2.5	Normal	1	0.6	0.49	± 1.5 %	± 1.2 %		
Combined Standard Uncertainty	± 11.0 %	± 10.8 %							
Coverage Factor for 95 %							K=2		
Expanded Uncertainty						± 22.0 %	± 21.5 %		

Table 14.2 Uncertainty Budget for frequency range 300 MHz to 3 GHz

SPORTON INTERNATIONAL (SHENZHEN) INC.

TEL: 86-755-8637-9589 FAX: 86-755-8637-9595 FCC ID: YHLBLUZOEY Page Number : 35 of 36
Report Issued Date : Jul. 18, 2013
Report Version : Rev. 01



14. References

- [1] FCC 47 CFR Part 2 "Frequency Allocations and Radio Treaty Matters; General Rules and Regulations"
- [2] ANSI/IEEE Std. C95.1-1992, "IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz", September 1992
- [3] IEEE Std. 1528-2003, "Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- [4] FCC OET Bulletin 65 (Edition 97-01) Supplement C (Edition 01-01), "Evaluating Compliance with FCC Guidelines for Human Exposure to Radiofrequency Electromagnetic Fields", June 2001
- [5] SPEAG DASY System Handbook
- [6] FCC KDB 447498 D01 v05r01, "Mobile and Portable Device RF Exposure Procedures and Equipment Authorization Policies", May 2013
- [7] FCC KDB 648474 D04 v01r01, "SAR Evaluation Considerations for Wireless Handsets", May 2013
- [8] FCC KDB 941225 D03 v01, "Recommended SAR Test Reduction Procedures for GSM / GPRS / EDGE", December 2008

SPORTON INTERNATIONAL (SHENZHEN) INC.

FAX: 86-755-8637-9595 FCC ID: YHLBLUZOEY

TEL: 86-755-8637-9589

Page Number : 36 of 36
Report Issued Date : Jul. 18, 2013
Report Version : Rev. 01



FCC SAR Test Report

Appendix A. Plots of System Performance Check

The plots are shown as follows.

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: YHLBLUZOEY

: A1 of A1 Page Number Report Issued Date: Jul. 18, 2013

Report No. : FA361702

Report Version : Rev. 01

System Check_Head_835MHz_130624

DUT: D835V2-SN:4d091

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: HSL_835_130624 Medium parameters used: f = 835 MHz; $\sigma = 0.901$ mho/m; $\epsilon_r = 41.605$; ρ

Date: 24.06.2013

 $= 1000 \text{ kg/m}^3$

Ambient Temperature : 23.5 °C; Liquid Temperature : 21.8 °C

DASY5 Configuration:

- Probe: EX3DV4 SN3819; ConvF(9.56, 9.56, 9.56); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 3.18 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 60.209 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 3.796 mW/g

SAR(1 g) = 2.51 mW/g; SAR(10 g) = 1.64 mW/g

Maximum value of SAR (measured) = 3.19 W/kg

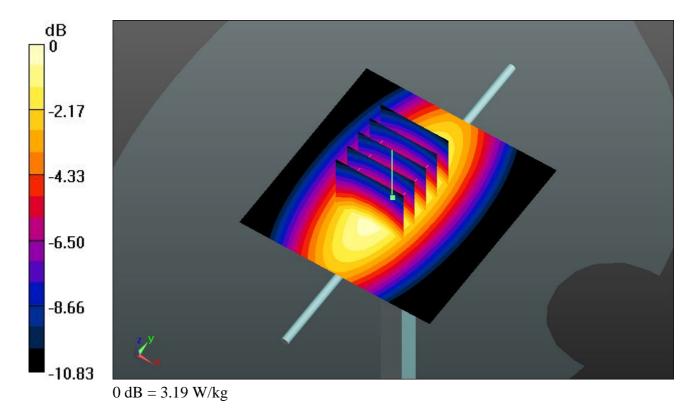

System Check_Head_1900MHz_130625

DUT: D1900V2-SN:5d118

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: HSL_1900_130625 Medium parameters used: f = 1900 MHz; $\sigma = 1.407$ mho/m; $\epsilon_r =$

Date: 25.06.2013

39.644; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 23.5 °C; Liquid Temperature: 21.9 °C

DASY5 Configuration:

- Probe: EX3DV4 SN3819; ConvF(7.84, 7.84, 7.84); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)


Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 14.3 W/kg

Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 101.6 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 18.493 mW/g

SAR(1 g) = 9.91 mW/g; SAR(10 g) = 5.1 mW/g

Maximum value of SAR (measured) = 13.9 W/kg

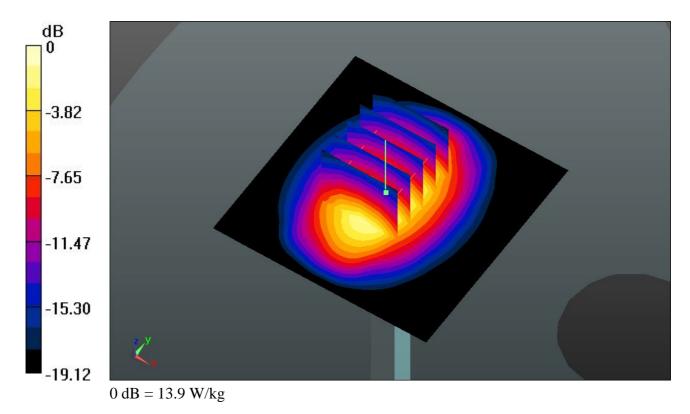

System Check_Body_835MHz_130625

DUT: D835V2-SN:4d091

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium: MSL_835_130625 Medium parameters used: f = 835 MHz; $\sigma = 0.978$ mho/m; $\epsilon_r = 54.413$;

Date: 25.06.2013

 $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 23.5 °C; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 SN3819; ConvF(9.5, 9.5, 9.5); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 2.50 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 50.614 V/m; Power Drift = 0.01 dB

Peak SAR (extrapolated) = 3.411 mW/g

SAR(1 g) = 2.32 mW/g; SAR(10 g) = 1.53 mW/g

Maximum value of SAR (measured) = 2.49 W/kg

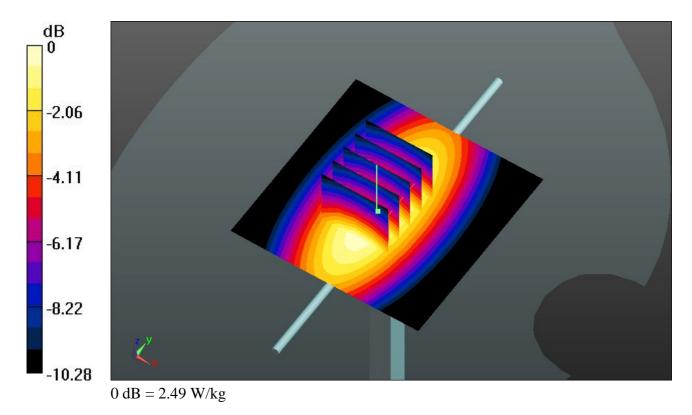

System Check_Body_1900MHz_130625

DUT: D1900V2-SN:5d118

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: MSL_1900_130625 Medium parameters used: f = 1900 MHz; $\sigma = 1.531$ mho/m; $\varepsilon_r =$

Date: 25.06.2013

54.671; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature: 23.1 °C; Liquid Temperature: 21.3 °C

DASY5 Configuration:

- Probe: EX3DV4 SN3819; ConvF(7.67, 7.67, 7.67); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Pin=250mW/Area Scan (61x61x1): Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 14.7 W/kg


Pin=250mW/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 86.897 V/m; Power Drift = 0.02 dB

Peak SAR (extrapolated) = 18.331 mW/g

SAR(1 g) = 10.3 mW/g; SAR(10 g) = 5.34 mW/g

Maximum value of SAR (measured) = 14.4 W/kg

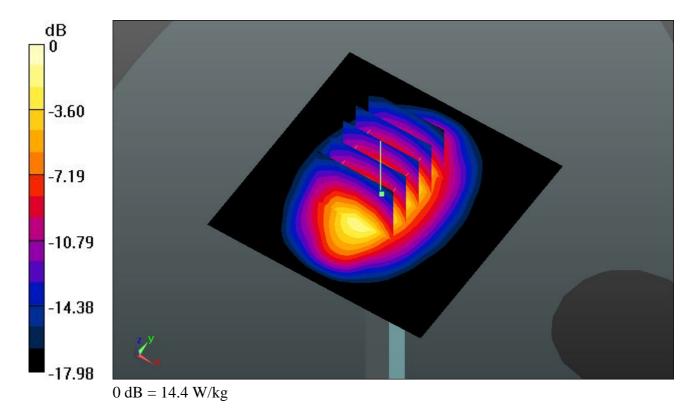



Appendix B. Plots of SAR Measurement

The plots are shown as follows.

SPORTON INTERNATIONAL INC.

TEL: 886-3-327-3456 FAX: 886-3-328-4978 FCC ID: YHLBLUZOEY

: B1 of B1 Page Number Report Issued Date: Jul. 18, 2013

Report No. : FA361702

Report Version : Rev. 01

01 GSM850_GSM Voice_Right Cheek_Ch251

DUT: 361702

Communication System: Generic GSM; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: HSL_835_130624 Medium parameters used: f = 849 MHz; $\sigma = 0.916$ mho/m; $\varepsilon_r = 41.423$; ρ

Date: 24.06.2013

 $= 1000 \text{ kg/m}^3$

Ambient Temperature : 23.5 °C; Liquid Temperature : 21.8 °C

DASY5 Configuration:

- Probe: EX3DV4 SN3819; ConvF(9.56, 9.56, 9.56); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch251/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 1.25 W/kg


Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 37.543 V/m; Power Drift = -0.13 dB

Peak SAR (extrapolated) = 1.364 mW/g

SAR(1 g) = 1.04 mW/g; SAR(10 g) = 0.741 mW/g

Maximum value of SAR (measured) = 1.23 W/kg

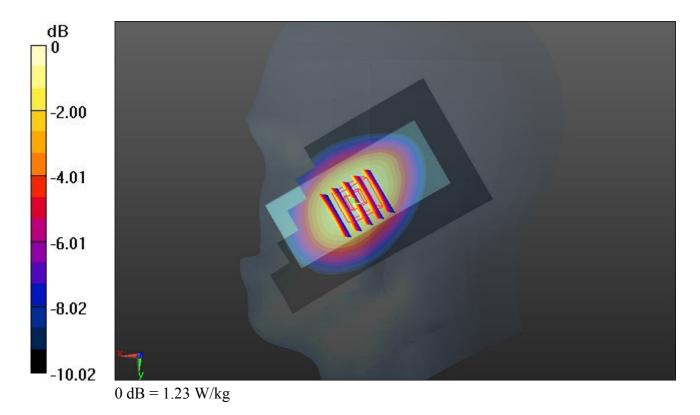

02 GSM850_GSM Voice_Right Tilted_Ch251

DUT: 361702

Communication System: Generic GSM; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: HSL_835_130624 Medium parameters used: f = 849 MHz; $\sigma = 0.916$ mho/m; $\varepsilon_r = 41.423$; ρ

Date: 24.06.2013

 $= 1000 \text{ kg/m}^3$

Ambient Temperature : 23.5 °C; Liquid Temperature : 21.8 °C


DASY5 Configuration:

- Probe: EX3DV4 SN3819; ConvF(9.56, 9.56, 9.56); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch251/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 0.611 W/kg

Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 26.336 V/m; Power Drift = -0.05 dB Peak SAR (extrapolated) = 0.690 mW/g SAR(1 g) = 0.526 mW/g; SAR(10 g) = 0.379 mW/g

SAR(1 g) = 0.526 mW/g; SAR(10 g) = 0.379 mW/g Maximum value of SAR (measured) = 0.616 W/kg

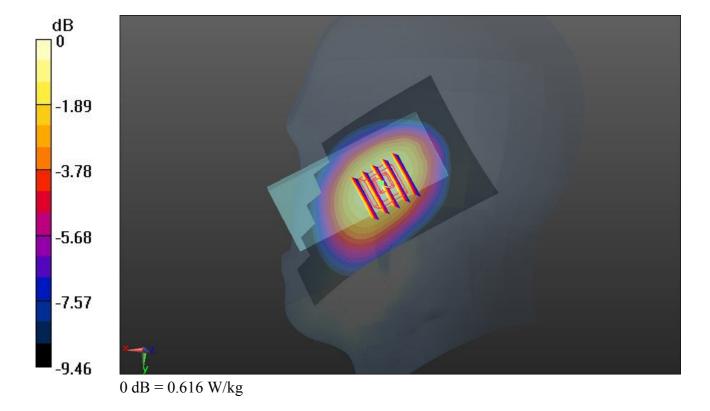

03 GSM850_GSM Voice_Left Cheek_Ch251

DUT: 361702

Communication System: Generic GSM; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: HSL_835_130624 Medium parameters used: f = 849 MHz; $\sigma = 0.916$ mho/m; $\varepsilon_r = 41.423$; ρ

Date: 24.06.2013

 $= 1000 \text{ kg/m}^3$

Ambient Temperature : 23.5 °C; Liquid Temperature : 21.8 °C

DASY5 Configuration:

- Probe: EX3DV4 SN3819; ConvF(9.56, 9.56, 9.56); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch251/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 0.941 W/kg


Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 32.146 V/m; Power Drift = -0.02 dB

Peak SAR (extrapolated) = 1.041 mW/g

SAR(1 g) = 0.792 mW/g; SAR(10 g) = 0.561 mW/g

Maximum value of SAR (measured) = 0.940 W/kg

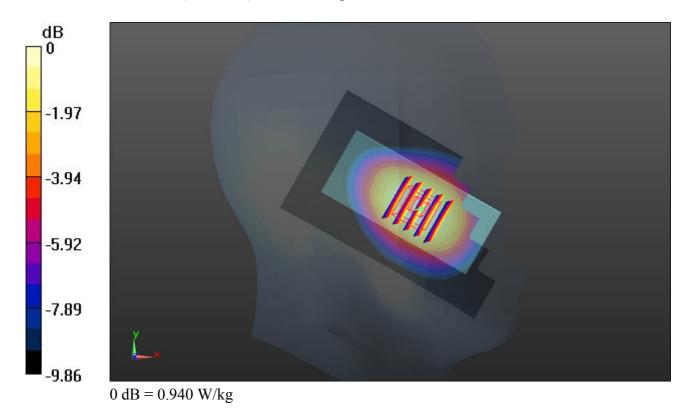

04 GSM850_GSM Voice_Left Tilted_Ch251

DUT: 361702

Communication System: Generic GSM; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: HSL_835_130624 Medium parameters used: f = 849 MHz; $\sigma = 0.916$ mho/m; $\varepsilon_r = 41.423$; ρ

Date: 24.06.2013

 $= 1000 \text{ kg/m}^3$

Ambient Temperature : 23.5 °C; Liquid Temperature : 21.8 °C

DASY5 Configuration:

- Probe: EX3DV4 SN3819; ConvF(9.56, 9.56, 9.56); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch251/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.565 W/kg


Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.516 V/m; Power Drift = -0.14 dB

Peak SAR (extrapolated) = 0.618 mW/g

SAR(1 g) = 0.469 mW/g; SAR(10 g) = 0.341 mW/g

Maximum value of SAR (measured) = 0.548 W/kg

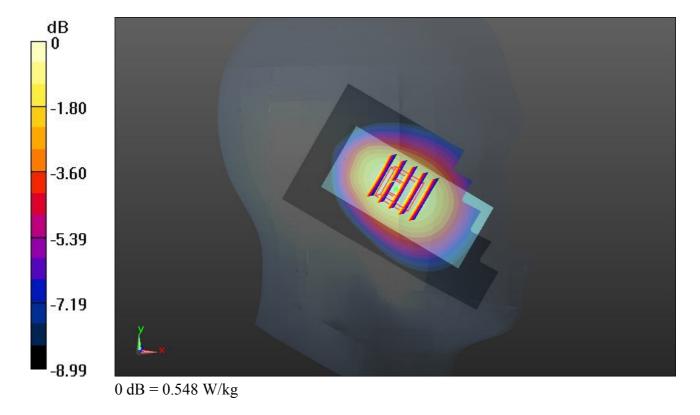

05 GSM850_GSM Voice_Right Cheek_Ch128

DUT: 361702

Communication System: Generic GSM; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium: HSL_835_130624 Medium parameters used: f = 824.2 MHz; $\sigma = 0.889$ mho/m; $\varepsilon_r = 41.748$;

Date: 24.06.2013

 $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 23.5 °C; Liquid Temperature : 21.8 °C

DASY5 Configuration:

- Probe: EX3DV4 SN3819; ConvF(9.56, 9.56, 9.56); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch128/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 0.963 W/kg


Ch128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 33.588 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 1.056 mW/g

SAR(1 g) = 0.814 mW/g; SAR(10 g) = 0.582 mW/g

Maximum value of SAR (measured) = 0.949 W/kg

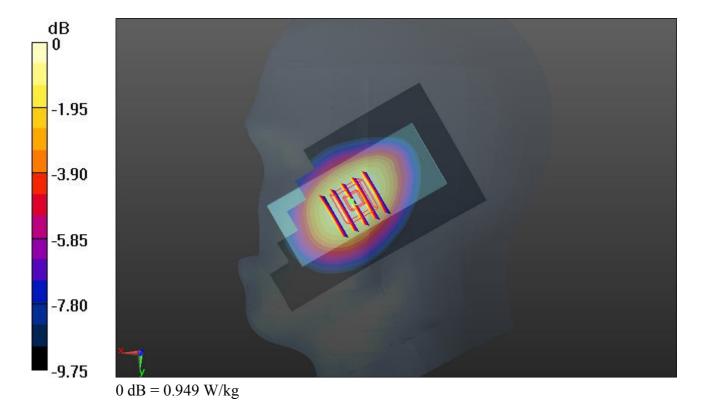

06 GSM850_GSM Voice_Right Cheek_Ch189

DUT: 361702

Communication System: Generic GSM; Frequency: 836.4 MHz; Duty Cycle: 1:8.3

Medium: HSL_835_130624 Medium parameters used: f = 836.4 MHz; $\sigma = 0.903$ mho/m; $\varepsilon_r = 41.588$;

Date: 24.06.2013

 $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 23.5 °C; Liquid Temperature : 21.8 °C

DASY5 Configuration:

- Probe: EX3DV4 SN3819; ConvF(9.56, 9.56, 9.56); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch189/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 1.30 W/kg


Ch189/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 38.609 V/m; Power Drift = -0.09 dB

Peak SAR (extrapolated) = 1.429 mW/g

SAR(1 g) = 1.09 mW/g; SAR(10 g) = 0.778 mW/g

Maximum value of SAR (measured) = 1.29 W/kg

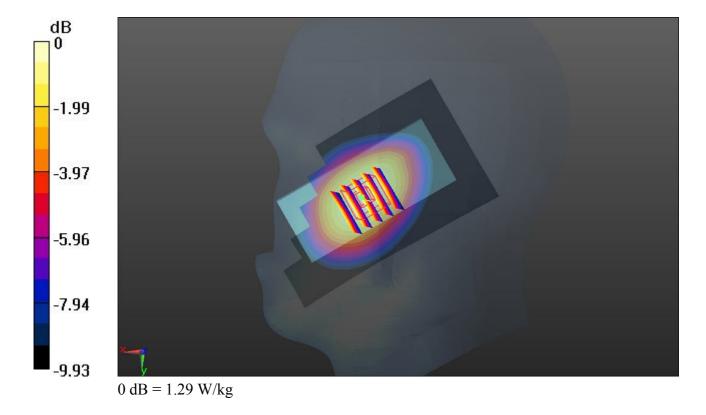

09 GSM850_GSM Voice_Right Cheek_Ch189_Repeat SAR

DUT: 361702

Communication System: Generic GSM; Frequency: 836.4 MHz; Duty Cycle: 1:8.3

Medium: HSL_835_130624 Medium parameters used: f = 836.4 MHz; $\sigma = 0.903$ mho/m; $\varepsilon_r = 41.588$;

Date: 24.06.2013

 $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 23.5 °C; Liquid Temperature : 21.8 °C

DASY5 Configuration:

- Probe: EX3DV4 SN3819; ConvF(9.56, 9.56, 9.56); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch189/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 1.26 W/kg


Ch189/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 37.764 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 1.386 mW/g

SAR(1 g) = 1.07 mW/g; SAR(10 g) = 0.764 mW/g

Maximum value of SAR (measured) = 1.25 W/kg

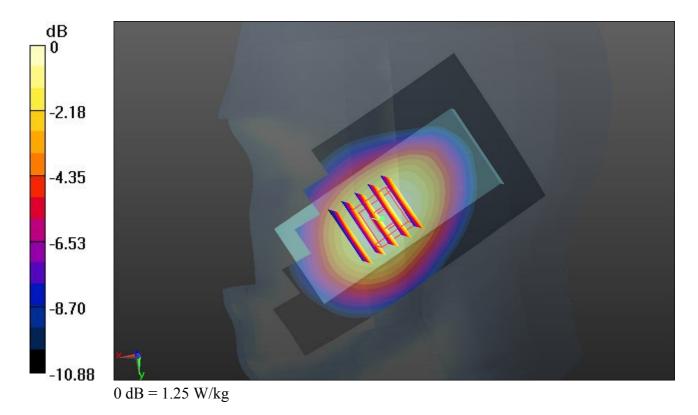

07 GSM850_GSM Voice_Left Cheek_Ch128

DUT: 361702

Communication System: Generic GSM; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium: HSL_835_130624 Medium parameters used: f = 824.2 MHz; $\sigma = 0.889$ mho/m; $\varepsilon_r = 41.748$;

Date: 24.06.2013

 $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 23.5 °C; Liquid Temperature : 21.8 °C

DASY5 Configuration:

- Probe: EX3DV4 SN3819; ConvF(9.56, 9.56, 9.56); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch128/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 0.845 W/kg


Ch128/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 30.901 V/m; Power Drift = -0.18 dB

Peak SAR (extrapolated) = 0.929 mW/g

SAR(1 g) = 0.705 mW/g; SAR(10 g) = 0.502 mW/g

Maximum value of SAR (measured) = 0.836 W/kg

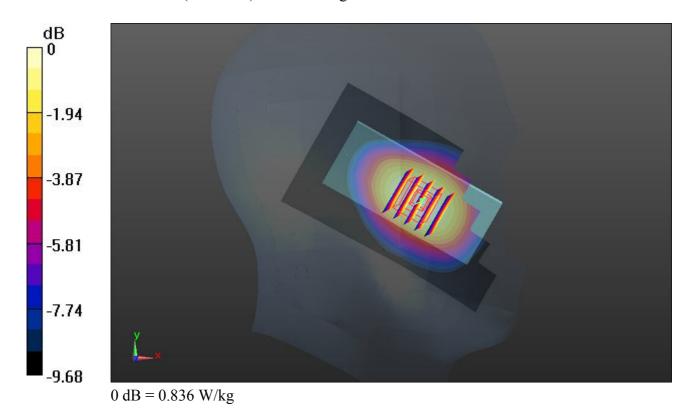

08 GSM850_GSM Voice_Left Cheek_Ch189

DUT: 361702

Communication System: Generic GSM; Frequency: 836.4 MHz; Duty Cycle: 1:8.3

Medium: HSL_835_130624 Medium parameters used: f = 836.4 MHz; $\sigma = 0.903$ mho/m; $\varepsilon_r = 41.588$;

Date: 24.06.2013

 $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 23.5 °C; Liquid Temperature : 21.8 °C

DASY5 Configuration:

- Probe: EX3DV4 SN3819; ConvF(9.56, 9.56, 9.56); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch189/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 1.10 W/kg


Ch189/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 35.013 V/m; Power Drift = -0.15 dB

Peak SAR (extrapolated) = 1.216 mW/g

SAR(1 g) = 0.928 mW/g; SAR(10 g) = 0.660 mW/g

Maximum value of SAR (measured) = 1.09 W/kg

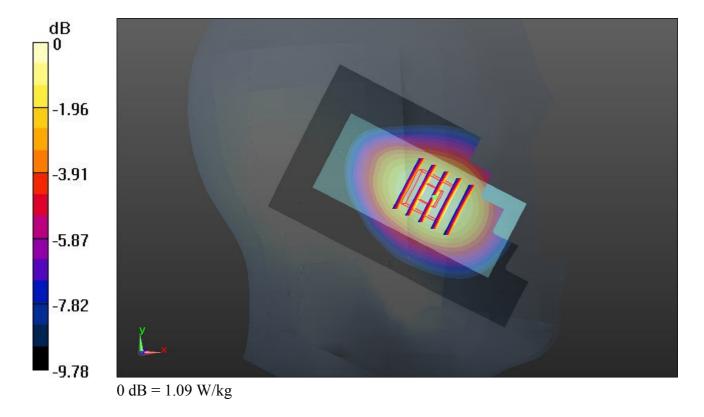

14 GSM1900_GSM Voice_Right Cheek_Ch810

DUT: 361702

Communication System: Generic GSM; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: HSL 1900 130625 Medium parameters used: f = 1910 MHz; $\sigma = 1.416$ mho/m; $\varepsilon_r =$

Date: 25.06.2013

39.605; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 23.5 °C; Liquid Temperature : 21.9 °C


DASY5 Configuration:

- Probe: EX3DV4 SN3819; ConvF(7.84, 7.84, 7.84); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch810/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 0.475 W/kg

Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 18.512 V/m; Power Drift = -0.09 dB Peak SAR (extrapolated) = 0.562 mW/g

SAR(1 g) = 0.361 mW/g; SAR(10 g) = 0.219 mW/gMaximum value of SAR (measured) = 0.456 W/kg

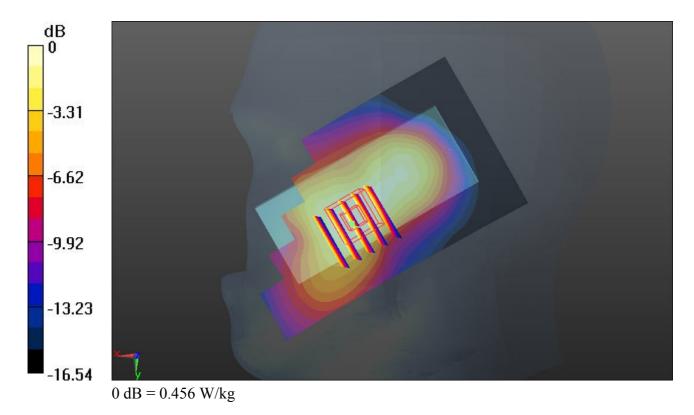

15 GSM1900_GSM Voice_Right Tilted_Ch810

DUT: 361702

Communication System: Generic GSM; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: HSL_1900_130625 Medium parameters used: f = 1910 MHz; $\sigma = 1.416$ mho/m; $\varepsilon_r =$

Date: 25.06.2013

39.605; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 23.5 °C; Liquid Temperature : 21.9 °C


DASY5 Configuration:

- Probe: EX3DV4 SN3819; ConvF(7.84, 7.84, 7.84); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch810/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 0.315 W/kg

Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 14.297 V/m; Power Drift = -0.04 dB Peak SAR (extrapolated) = 0.344 mW/g

SAR(1 g) = 0.230 mW/g; SAR(10 g) = 0.140 mW/gMaximum value of SAR (measured) = 0.287 W/kg

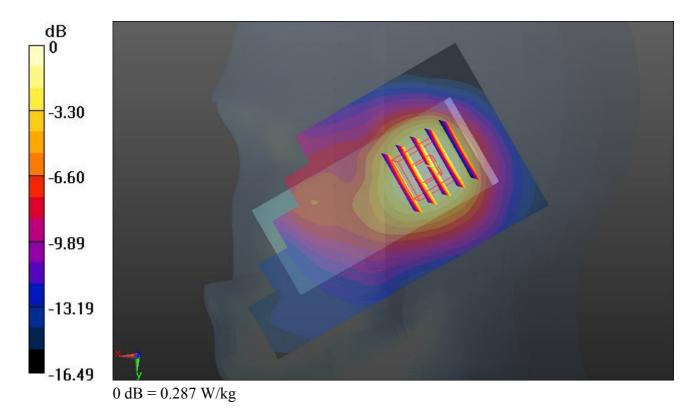

16 GSM1900 GSM Voice Left Cheek Ch810

DUT: 361702

Communication System: Generic GSM; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: HSL 1900 130625 Medium parameters used: f = 1910 MHz; $\sigma = 1.416$ mho/m; $\varepsilon_r =$

Date: 25.06.2013

39.605; $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 23.5 °C; Liquid Temperature : 21.9 °C


DASY5 Configuration:

- Probe: EX3DV4 SN3819; ConvF(7.84, 7.84, 7.84); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch810/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 0.396 W/kg

Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 16.825 V/m; Power Drift = -0.19 dB Peak SAR (extrapolated) = 0.454 mW/g SAR(1 g) = 0.310 mW/g; SAR(10 g) = 0.197 mW/g

Maximum value of SAR (measured) = 0.390 W/kg

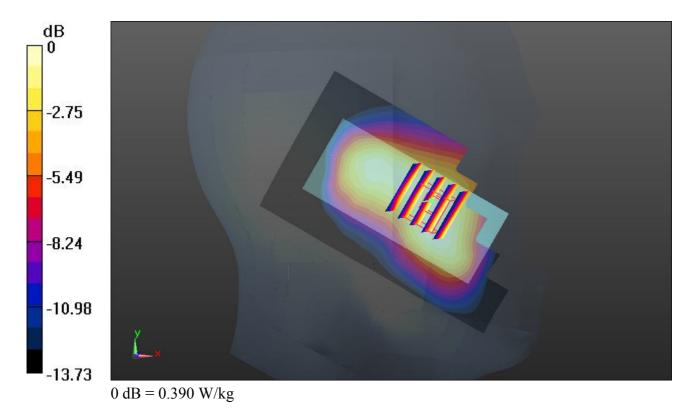

17 GSM1900 GSM Voice Left Tilted Ch810

DUT: 361702

Communication System: Generic GSM; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: HSL_1900_130625 Medium parameters used: f = 1910 MHz; $\sigma = 1.416$ mho/m; $\varepsilon_r =$

Date: 25.06.2013

39.605; $\rho = 1000 \text{ kg/m}^3$


Ambient Temperature : 23.5 °C; Liquid Temperature : 21.9 °C

DASY5 Configuration:

- Probe: EX3DV4 SN3819; ConvF(7.84, 7.84, 7.84); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch810/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 0.386 W/kg

Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm Reference Value = 15.949 V/m; Power Drift = -0.13 dB Peak SAR (extrapolated) = 0.422 mW/g SAR(1 g) = 0.277 mW/g; SAR(10 g) = 0.164 mW/g Maximum value of SAR (measured) = 0.358 W/kg

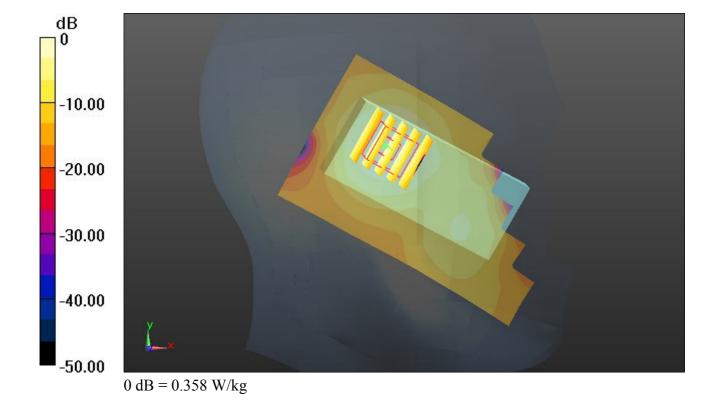

12 GSM850 GSM Voice Front 1.5cm Ch251

DUT: 361702

Communication System: Generic GSM; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: MSL_835_130625 Medium parameters used: f = 849 MHz; $\sigma = 0.991$ mho/m; $\varepsilon_r = 54.291$;

Date: 25.06.2013

 $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 23.5 °C; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 SN3819; ConvF(9.5, 9.5, 9.5); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch251/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.568 W/kg


Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 24.552 V/m; Power Drift = -0.08 dB

Peak SAR (extrapolated) = 0.634 mW/g

SAR(1 g) = 0.478 mW/g; SAR(10 g) = 0.343 mW/g

Maximum value of SAR (measured) = 0.565 W/kg

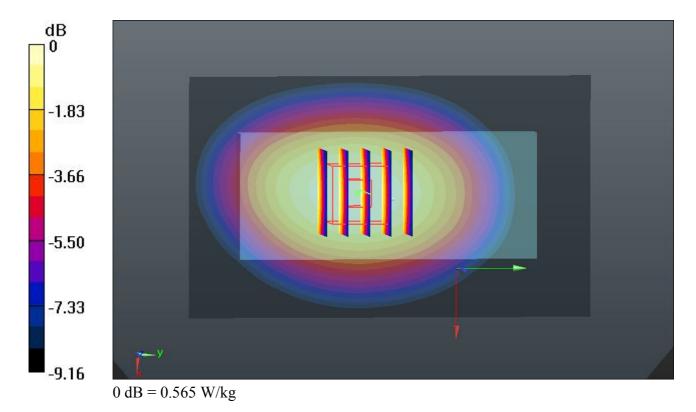

13 GSM850 GSM Voice Back 1.5cm Ch251

DUT: 361702

Communication System: Generic GSM; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium: MSL_835_130625 Medium parameters used: f = 849 MHz; $\sigma = 0.991$ mho/m; $\varepsilon_r = 54.291$;

Date: 25.06.2013

 $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 23.5 °C; Liquid Temperature : 21.5 °C

DASY5 Configuration:

- Probe: EX3DV4 SN3819; ConvF(9.5, 9.5, 9.5); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM1; Type: QD000P40CD; Serial: TP:1670
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch251/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.726 W/kg


Ch251/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 27.572 V/m; Power Drift = -0.05 dB

Peak SAR (extrapolated) = 0.802 mW/g

SAR(1 g) = 0.603 mW/g; SAR(10 g) = 0.434 mW/g

Maximum value of SAR (measured) = 0.714 W/kg

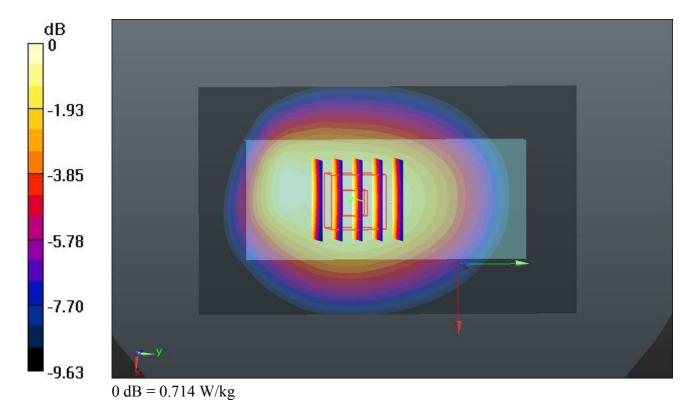

10 GSM1900 GSM Voice Front 1.5cm Ch810

DUT: 361702

Communication System: Generic GSM; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: MSL_1900_130625 Medium parameters used: f = 1910 MHz; $\sigma = 1.54$ mho/m; $\varepsilon_r = 54.651$;

Date: 25.06.2013

 $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 23.1 °C; Liquid Temperature : 21.3 °C

DASY5 Configuration:

- Probe: EX3DV4 SN3819; ConvF(7.67, 7.67, 7.67); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch810/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 0.317 W/kg


Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 14.193 V/m; Power Drift = -0.11 dB

Peak SAR (extrapolated) = 0.371 mW/g

SAR(1 g) = 0.223 mW/g; SAR(10 g) = 0.126 mW/g

Maximum value of SAR (measured) = 0.295 W/kg

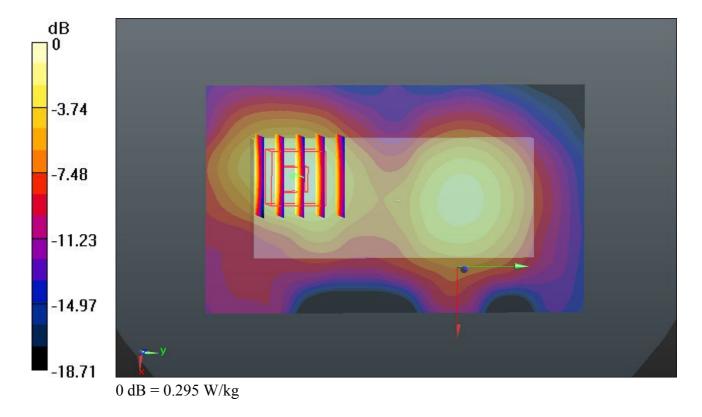

11 GSM1900_GSM Voice_Back_1.5cm_Ch810

DUT: 361702

Communication System: Generic GSM; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium: MSL_1900_130625 Medium parameters used: f = 1910 MHz; $\sigma = 1.54$ mho/m; $\varepsilon_r = 54.651$;

Date: 25.06.2013

 $\rho = 1000 \text{ kg/m}^3$

Ambient Temperature : 23.1 °C; Liquid Temperature : 21.3 °C

DASY5 Configuration:

- Probe: EX3DV4 SN3819; ConvF(7.67, 7.67, 7.67); Calibrated: 26.11.2012;
- Sensor-Surface: 2mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn1303; Calibrated: 22.11.2012
- Phantom: SAM2; Type: QD000P40CD; Serial: TP:1671
- Measurement SW: DASY52, Version 52.8 (2); SEMCAD X Version 14.6.6 (6824)

Ch810/Area Scan (61x101x1): Interpolated grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 0.585 W/kg

Ch810/Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.071 V/m; Power Drift = -0.07 dB

Peak SAR (extrapolated) = 0.757 mW/g

SAR(1 g) = 0.450 mW/g; SAR(10 g) = 0.257 mW/g

Maximum value of SAR (measured) = 0.600 W/kg

