

GSM850_GPRS10_Left Cheek_128**DUT: EUT**

Communication System: GPRS 850-2solt; Frequency: 824.2 MHz; Duty Cycle: 1:4

Medium: H835 Medium parameters used : $f = 824.2$ MHz; $\sigma = 0.876$ mho/m; $\epsilon_r = 42.1$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.2, 6.2, 6.2); Calibrated: 2024/3/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2024/3/18
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (61x71x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.339 mW/g



Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 5.49 V/m; Power Drift = 0.015 dB

Peak SAR (extrapolated) = 0.620 W/kg

SAR(1 g) = 0.410 mW/g; SAR(10 g) = 0.239 mW/g

Maximum value of SAR (measured) = 0.472 mW/g

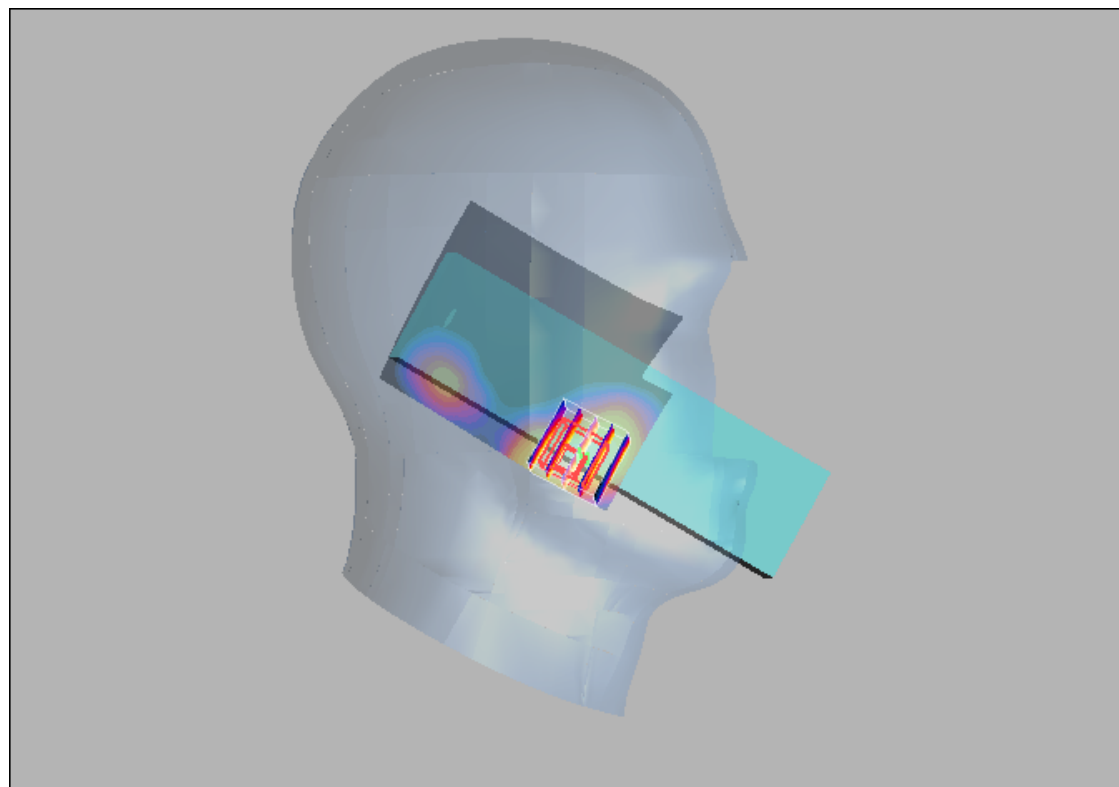

0 dB = 0.472mW/g

GSM1900_GPRS10_Left Cheek_512**DUT: EUT**

Communication System: GPRS1900-2slots; Frequency: 1850.2 MHz; Duty Cycle: 1:4
Medium: H1900 Medium parameters used : $f = 1850.2$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 40$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.12, 5.12, 5.12); Calibrated: 2024/3/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2024/3/18
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.857 mW/g



Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 9.23 V/m; Power Drift = -0.047 dB

Peak SAR (extrapolated) = 1.30 W/kg

SAR(1 g) = 0.698 mW/g; SAR(10 g) = 0.363 mW/g

Maximum value of SAR (measured) = 0.852 mW/g

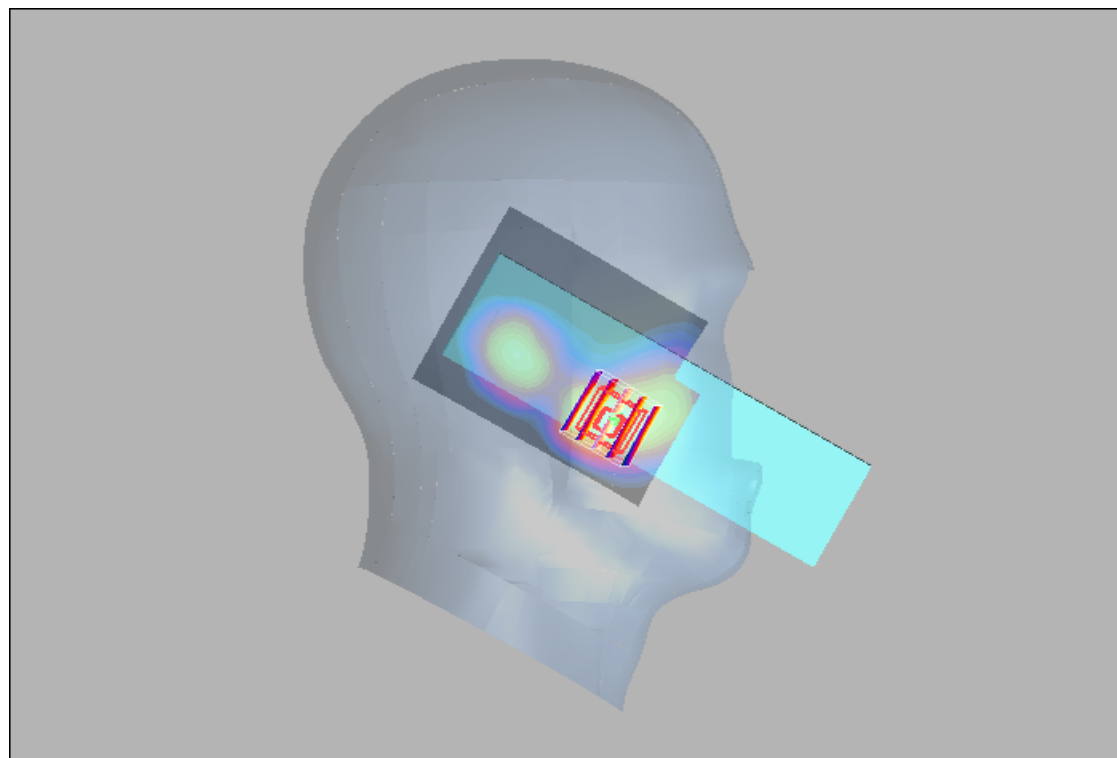

0 dB = 0.852mW/g

WCDMA II_RMC12.2K_Left Cheek_9262**DUT: EUT**

Communication System: WCDMA Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1
Medium: H1900 Medium parameters used : $f = 1852.4$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 40$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.12, 5.12, 5.12); Calibrated: 2024/3/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2024/3/18
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.474 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.37 V/m; Power Drift = 0.066 dB

Peak SAR (extrapolated) = 0.623 W/kg

SAR(1 g) = 0.386 mW/g; SAR(10 g) = 0.219 mW/g

Maximum value of SAR (measured) = 0.448 mW/g

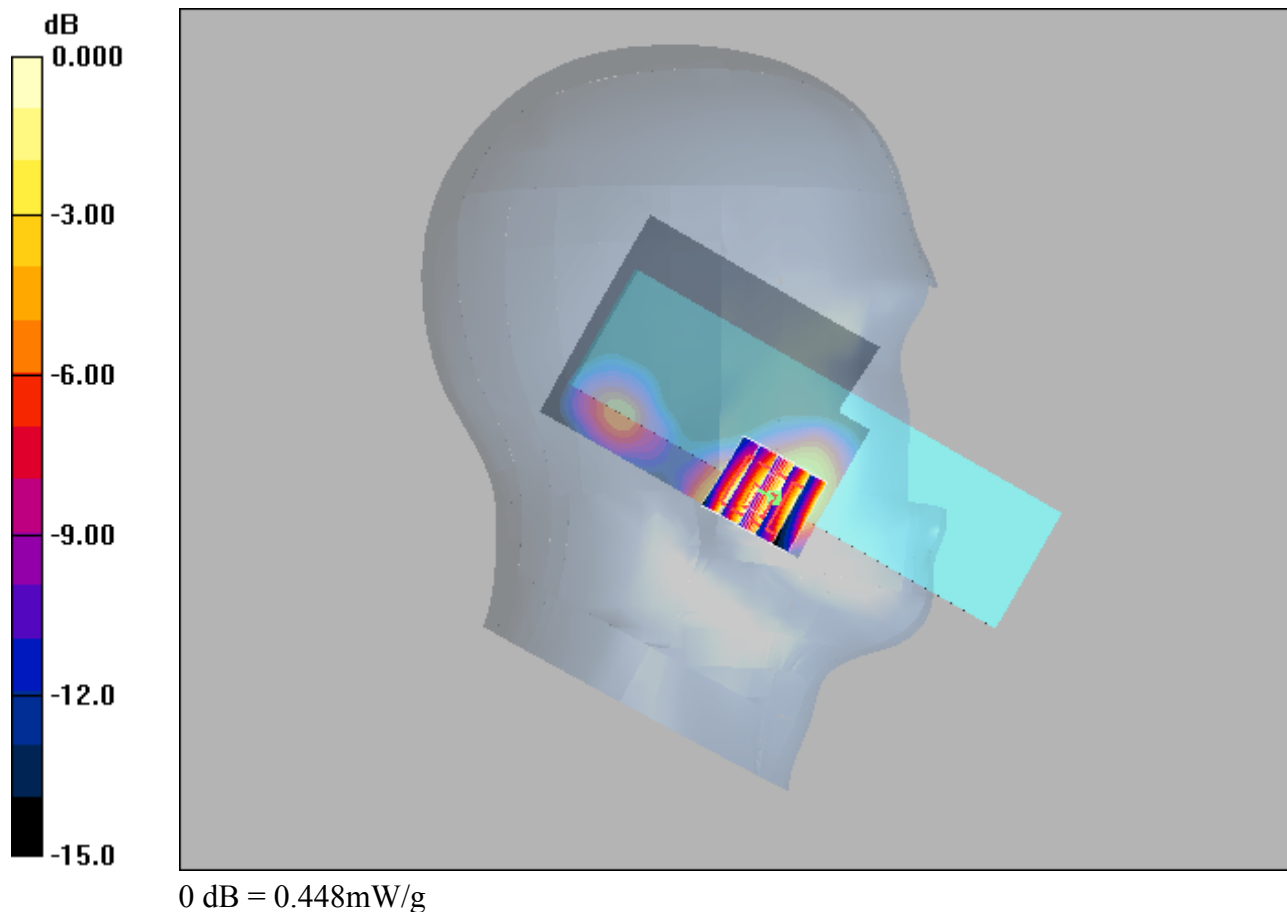

WCDMA V_RMC12.2K_Left Cheek_4233**DUT: EUT**

Communication System: WCDMA Band V; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: H835 Medium parameters used: $f = 847$ MHz; $\sigma = 0.897$ mho/m; $\epsilon_r = 41.9$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.2, 6.2, 6.2); Calibrated: 2024/3/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2024/3/18
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (61x71x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.338 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.28 V/m; Power Drift = -0.037 dB

Peak SAR (extrapolated) = 0.566 W/kg

SAR(1 g) = 0.364 mW/g; SAR(10 g) = 0.224 mW/g

Maximum value of SAR (measured) = 0.430 mW/g

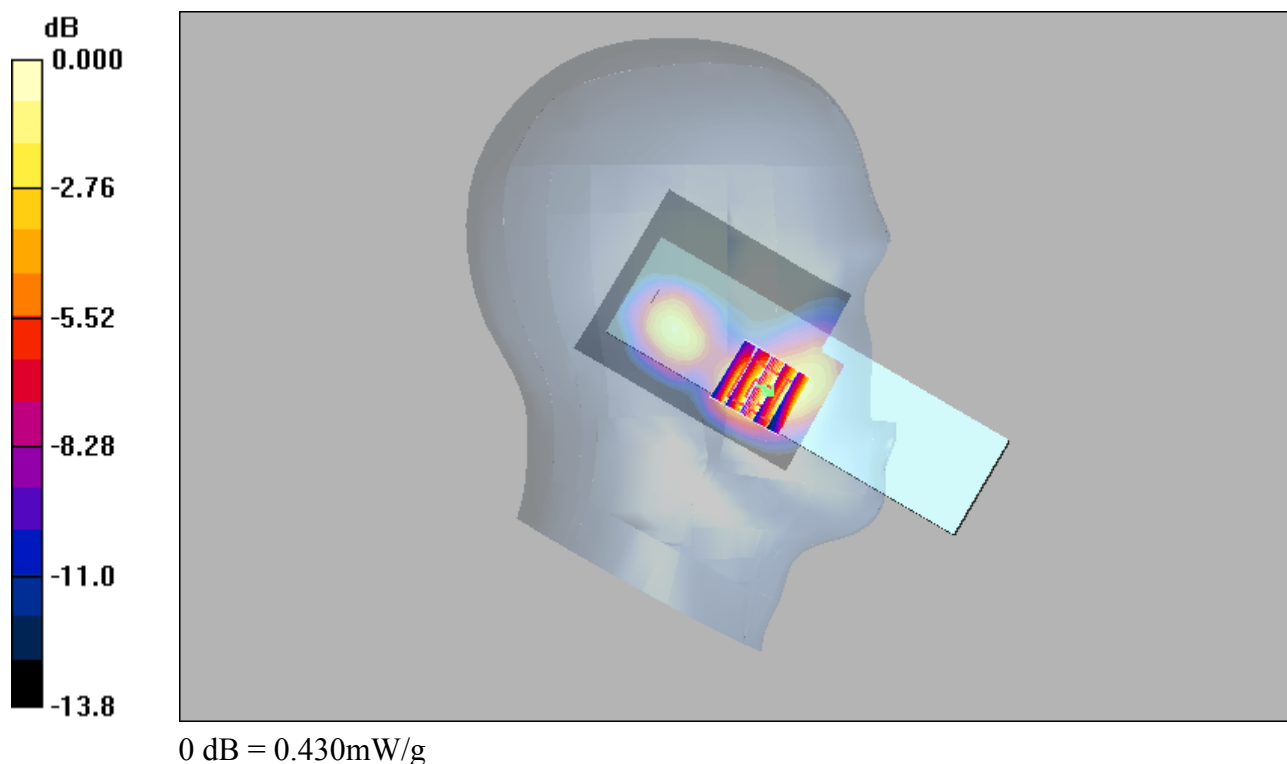

LTE 2_QPSK20M_50_25_Left Cheek_19100**DUT: EUT**

Communication System: LTE Band 2; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: H1900 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 40$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.12, 5.12, 5.12); Calibrated: 2024/3/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2024/3/18
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (61x81x1): Measurement grid: $dx=15$ mm, $dy=15$ mm

Maximum value of SAR (interpolated) = 1.43 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8$ mm, $dy=8$ mm, $dz=5$ mm

Reference Value = 7.10 V/m; Power Drift = -0.091 dB

Peak SAR (extrapolated) = 1.98 W/kg

SAR(1 g) = 1.06 mW/g; SAR(10 g) = 0.539 mW/g

Maximum value of SAR (measured) = 1.36 mW/g

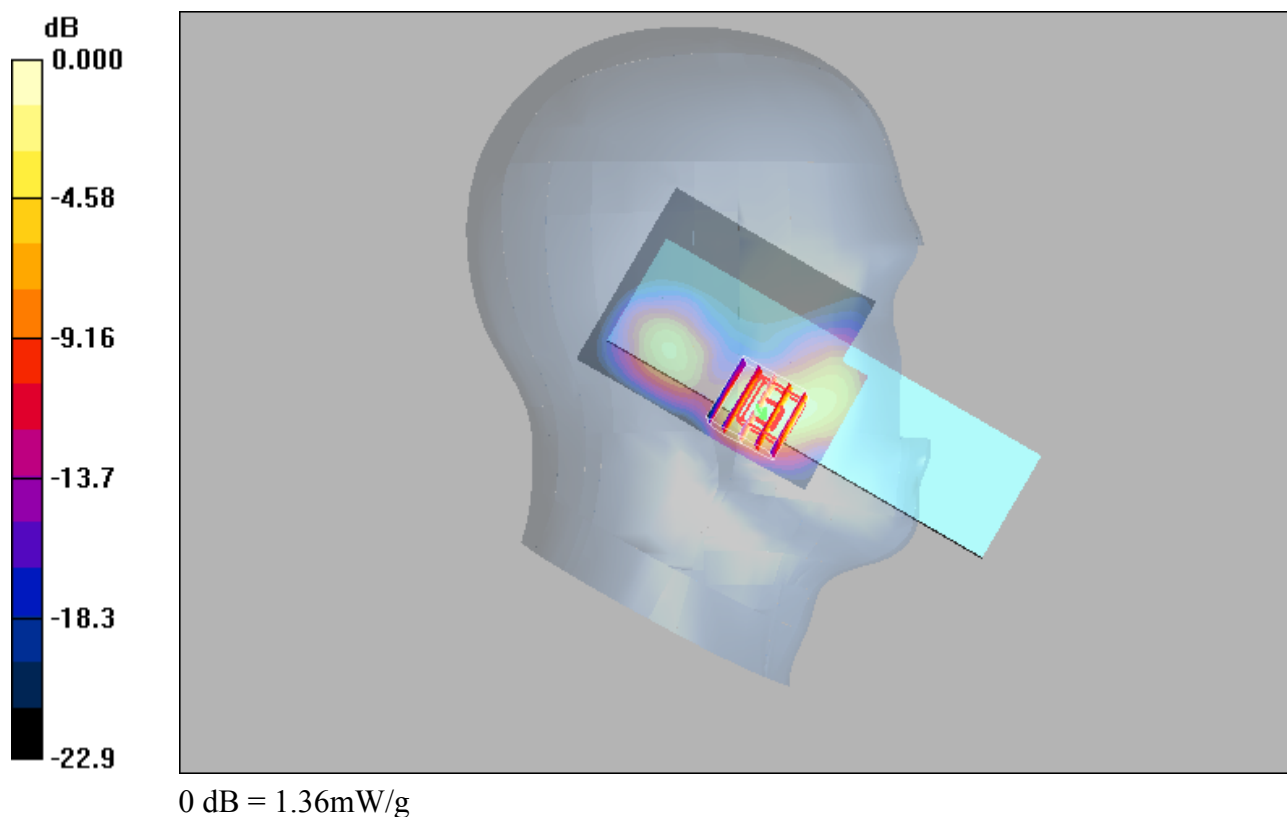

LTE 4_QPSK20M_1_0_Left Cheek_20300**DUT: EUT**

Communication System: LTE Band 4&20M; Frequency: 1745 MHz; Duty Cycle: 1:1

Medium: H1750 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 41$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.4, 5.4, 5.4); Calibrated: 2024/3/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2024/3/18
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (61x81x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.52 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 11.9 V/m; Power Drift = 0.025 dB

Peak SAR (extrapolated) = 2.58 W/kg

SAR(1 g) = 1.26 mW/g; SAR(10 g) = 0.604 mW/g

Maximum value of SAR (measured) = 1.63 mW/g

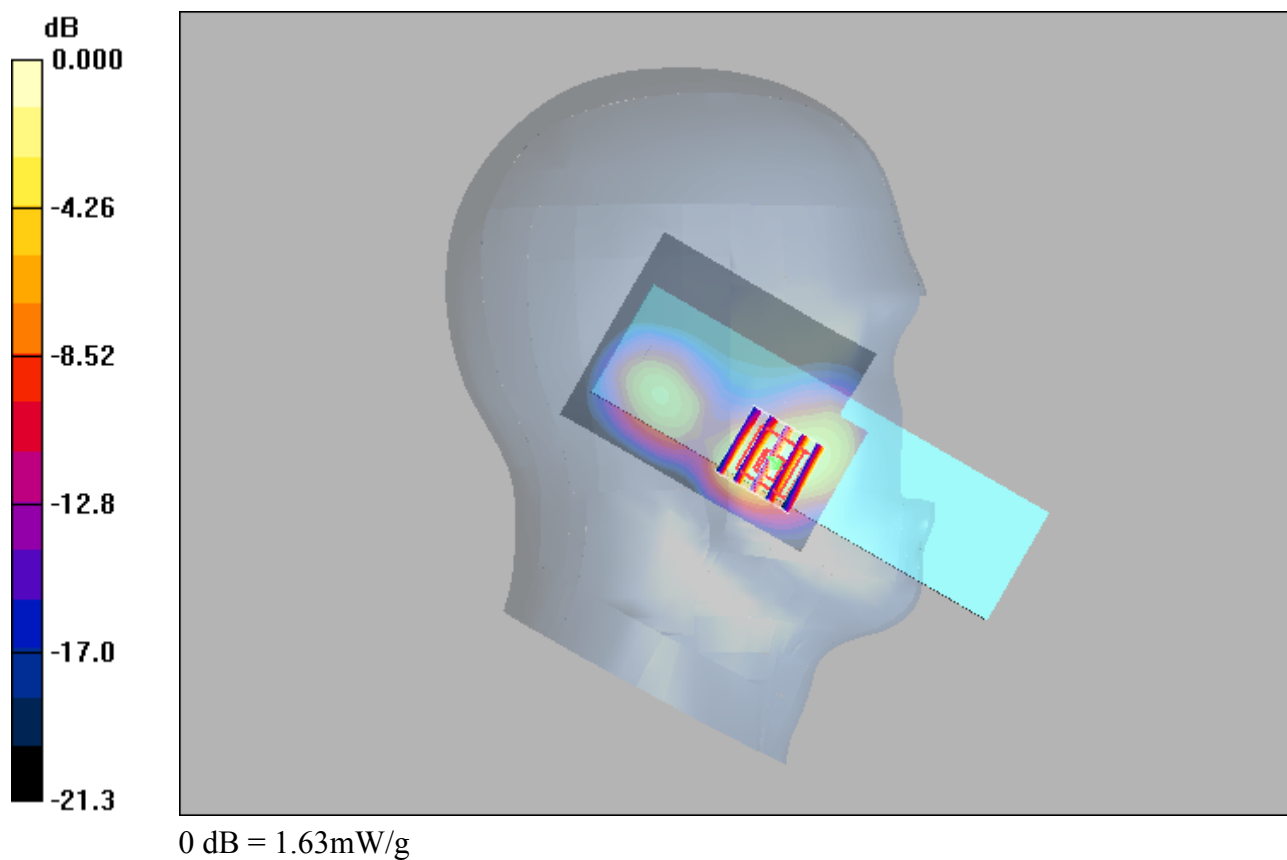

LTE 5_QPSK10M_1_49_Left Cheek_20600**DUT: EUT**

Communication System: LTE Band5; Frequency: 844 MHz; Duty Cycle: 1:1

Medium: H835 Medium parameters used: $f = 844 \text{ MHz}$; $\sigma = 0.894 \text{ mho/m}$; $\epsilon_r = 41.9$; $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.2, 6.2, 6.2); Calibrated: 2024/3/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2024/3/18
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (61x81x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.564 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 9.73 V/m ; Power Drift = -0.027 dB

Peak SAR (extrapolated) = 0.752 W/kg

SAR(1 g) = 0.475 mW/g ; SAR(10 g) = 0.304 mW/g

Maximum value of SAR (measured) = 0.557 mW/g

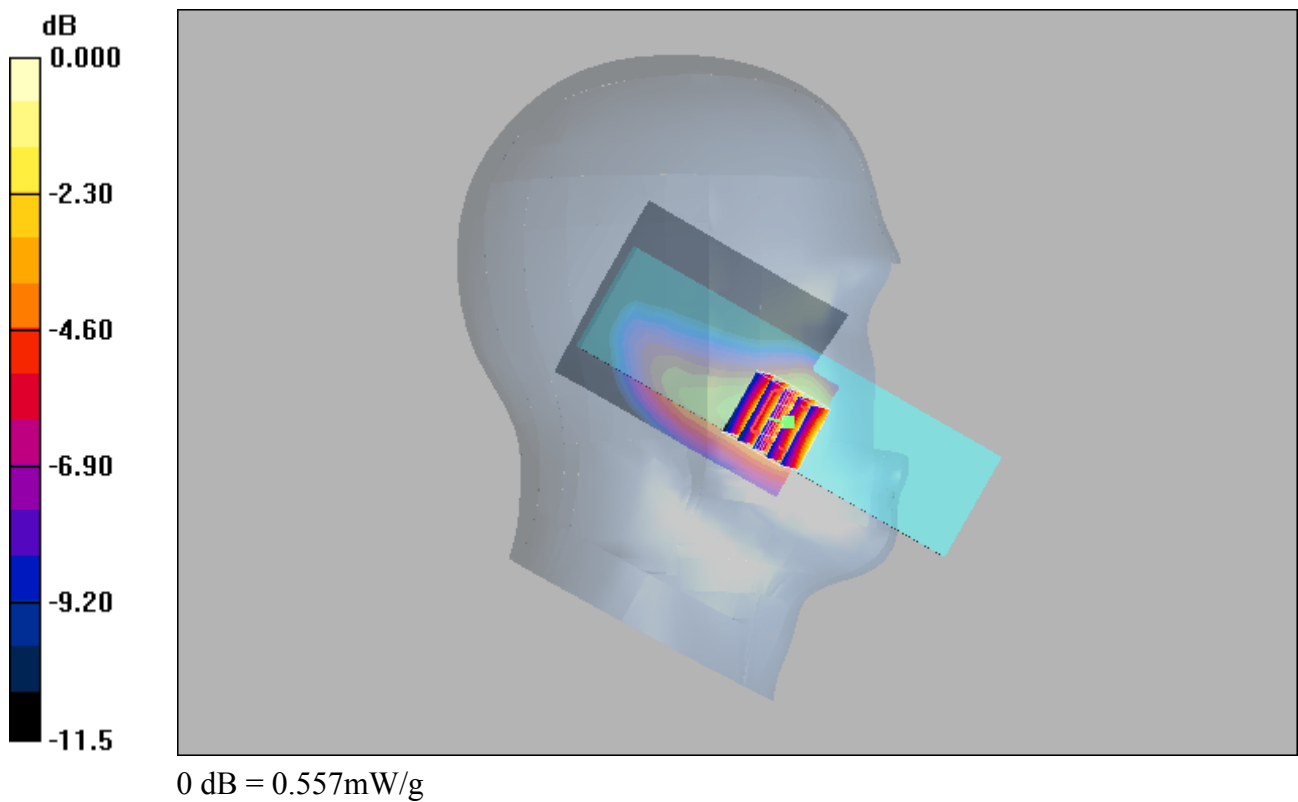

LTE 7_QPSK20M_50_50_Left Cheek_21100**DUT: EUT**


Communication System: LTE Band 7&20M; Frequency: 2535 MHz; Duty Cycle: 1:1
Medium: H2600 Medium parameters used: $f = 2535$ MHz; $\sigma = 1.88$ mho/m; $\epsilon_r = 38.1$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(4.63, 4.63, 4.63); Calibrated: 2024/3/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2024/3/18
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x91x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (interpolated) = 0.697 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 6.96 V/m; Power Drift = 0.031 dB
Peak SAR (extrapolated) = 0.983 W/kg
SAR(1 g) = 0.540 mW/g; SAR(10 g) = 0.285 mW/g
Maximum value of SAR (measured) = 0.685 mW/g

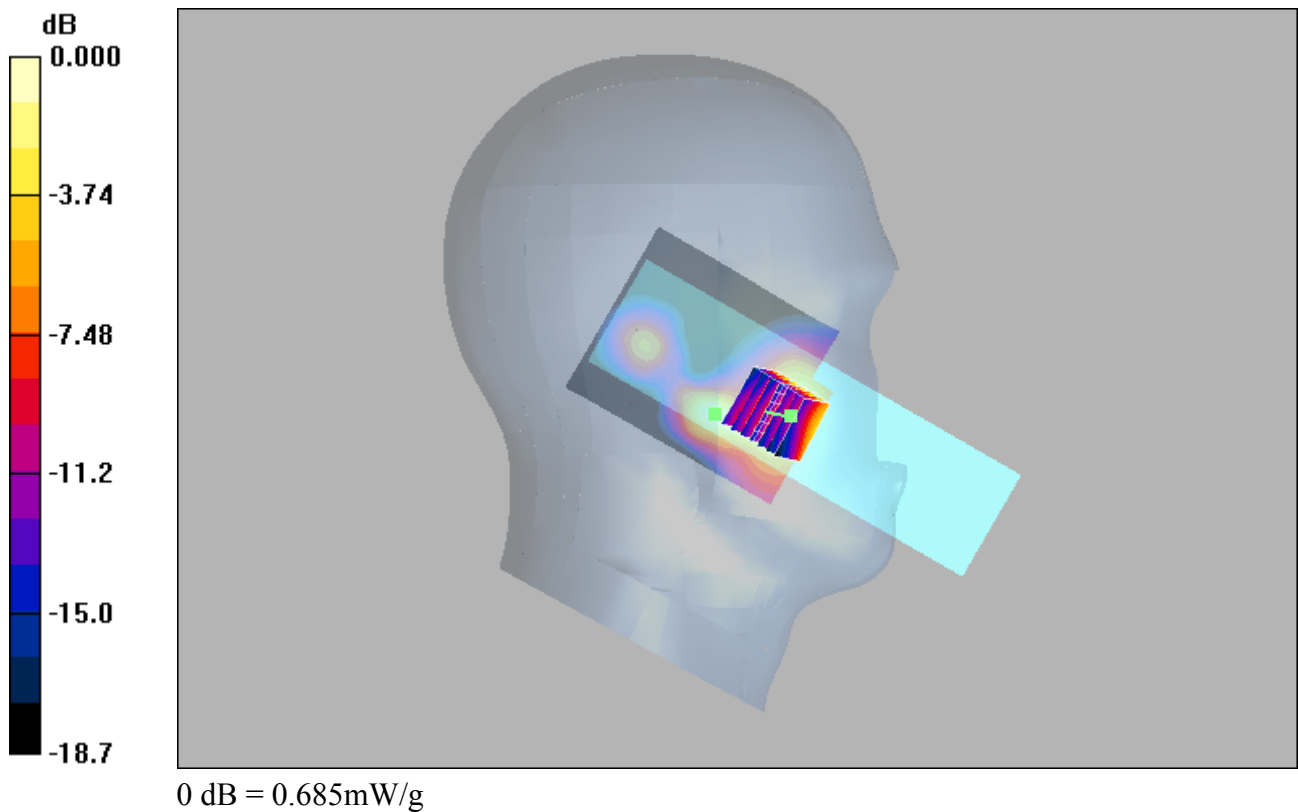

EDR_DH5_Right Cheek_39**DUT: EUT**

Communication System: Bluetooth; Frequency: 2441 MHz; Duty Cycle: 1:1

Medium: H2450 Medium parameters used: $f = 2441$ MHz; $\sigma = 1.83$ mho/m; $\epsilon_r = 38.1$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(4.63, 4.63, 4.63); Calibrated: 2024/3/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2024/3/18
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x81x1): Measurement grid: $dx=12$ mm, $dy=12$ mm
Maximum value of SAR (interpolated) = 0.013 mW/g


Zoom Scan (7x7x7)/Cube 0: Measurement grid: $dx=5$ mm, $dy=5$ mm, $dz=5$ mm

Reference Value = 1.25 V/m; Power Drift = 0.023 dB

Peak SAR (extrapolated) = 0.033 W/kg

SAR(1 g) = 0.0121 mW/g; SAR(10 g) = 0.00548 mW/g

Maximum value of SAR (measured) = 0.017 mW/g

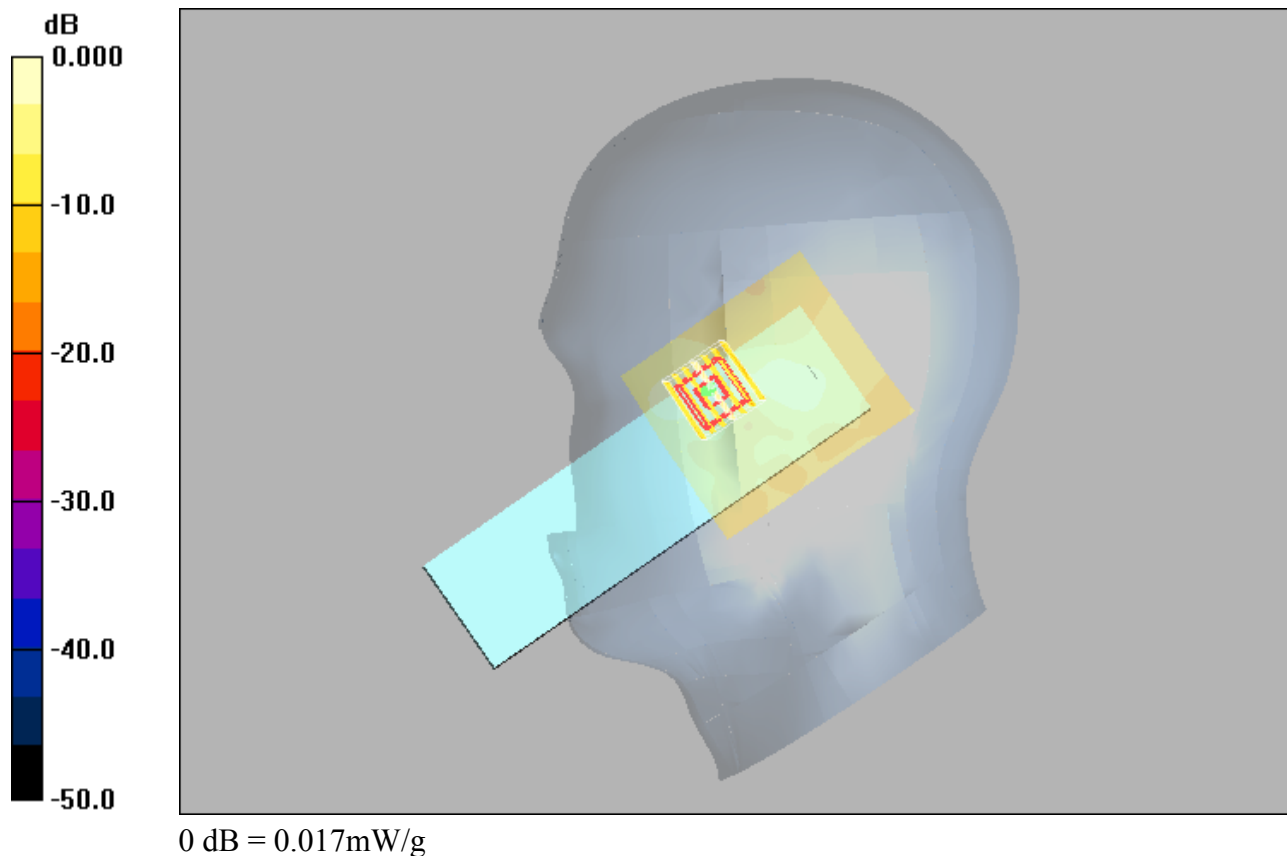

GSM850_GPRS10_Rear Face_10MM_128**DUT: EUT**

Communication System: GPRS 850-2solt; Frequency: 824.2 MHz; Duty Cycle: 1:4

Medium: H835 Medium parameters used (interpolated): $f = 824.2$ MHz; $\sigma = 0.876$ mho/m; $\epsilon_r = 42.1$;

$\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.2, 6.2, 6.2); Calibrated: 2024/3/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2024/3/18
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.806 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 30.3 V/m; Power Drift = 0.000 dB

Peak SAR (extrapolated) = 0.985 W/kg

SAR(1 g) = 0.707 mW/g; SAR(10 g) = 0.486 mW/g

Maximum value of SAR (measured) = 0.807 mW/g

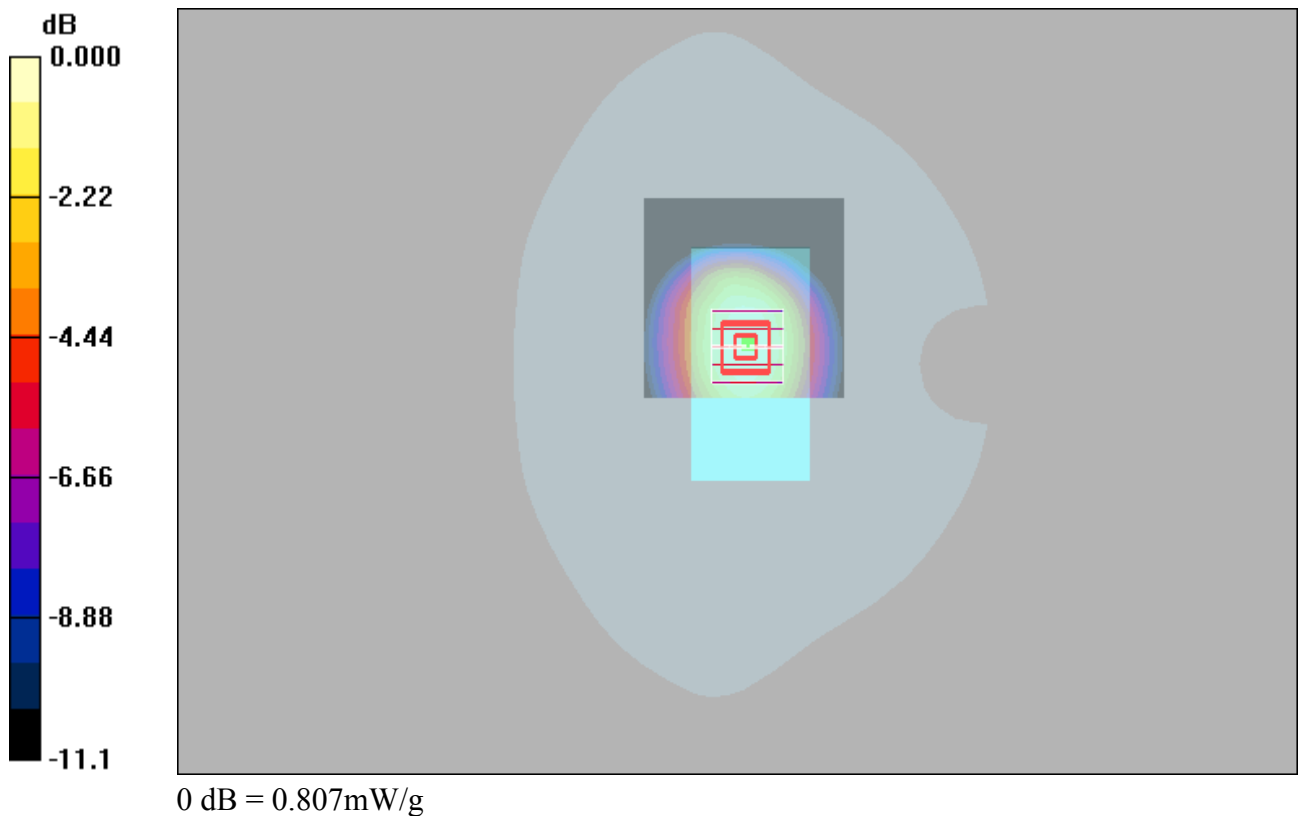

GSM1900_GPRS10_Rear Face_10MM_512**DUT: EUT**

Communication System: GPRS1900-2slots; Frequency: 1850.2 MHz; Duty Cycle: 1:4
Medium: H1900 Medium parameters used : $f = 1850.2$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 40$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.12, 5.12, 5.12); Calibrated: 2024/3/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2024/3/18
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.543 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 3.53 V/m; Power Drift = 0.099 dB

Peak SAR (extrapolated) = 0.718 W/kg

SAR(1 g) = 0.408 mW/g; SAR(10 g) = 0.219 mW/g

Maximum value of SAR (measured) = 0.503 mW/g

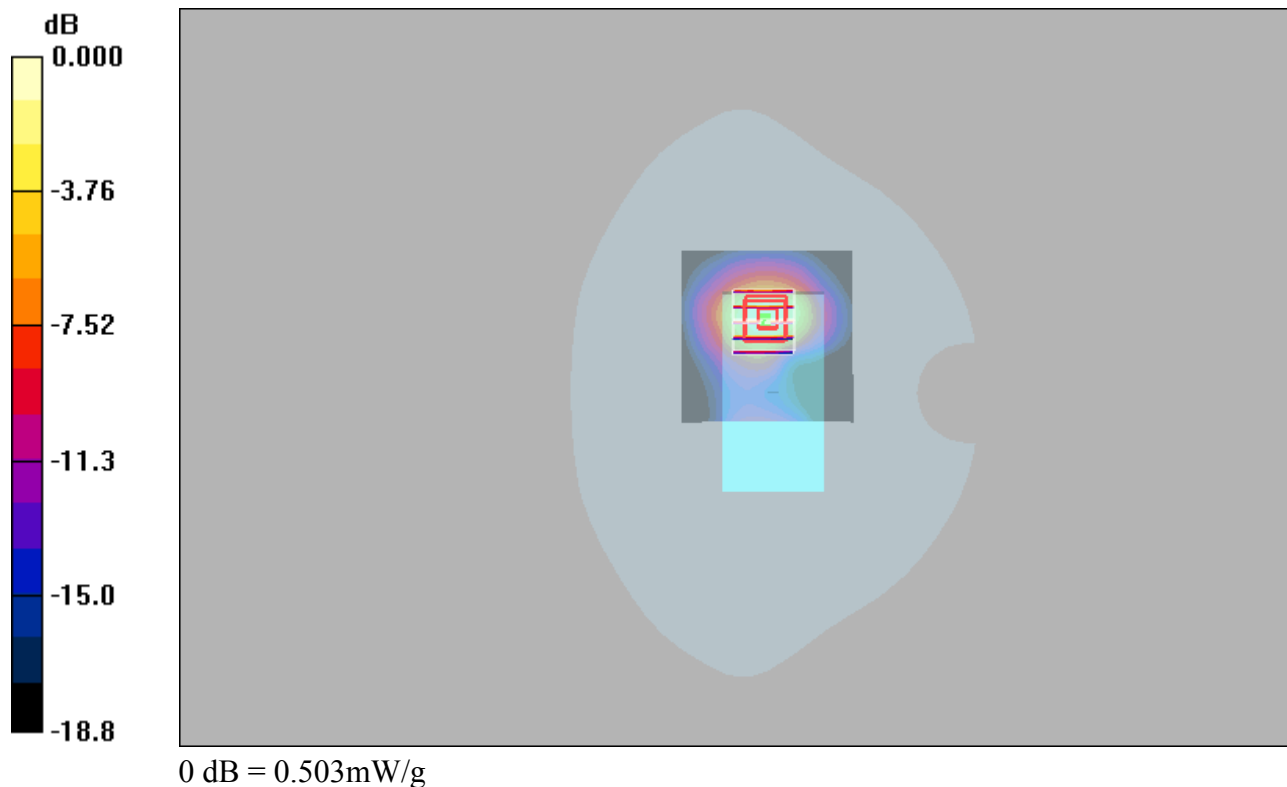

WCDMA II_RMC12.2K_Rear Face_10MM_9262**DUT: EUT**

Communication System: WCDMA Band II; Frequency: 1852.4 MHz; Duty Cycle: 1:1
Medium: H1900 Medium parameters used : $f = 1852.4$ MHz; $\sigma = 1.43$ mho/m; $\epsilon_r = 40$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.12, 5.12, 5.12); Calibrated: 2024/3/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2024/3/18
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm
Maximum value of SAR (interpolated) = 0.282 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 2.47 V/m; Power Drift = 0.023 dB

Peak SAR (extrapolated) = 0.336 W/kg

SAR(1 g) = 0.196 mW/g; SAR(10 g) = 0.107 mW/g

Maximum value of SAR (measured) = 0.241 mW/g

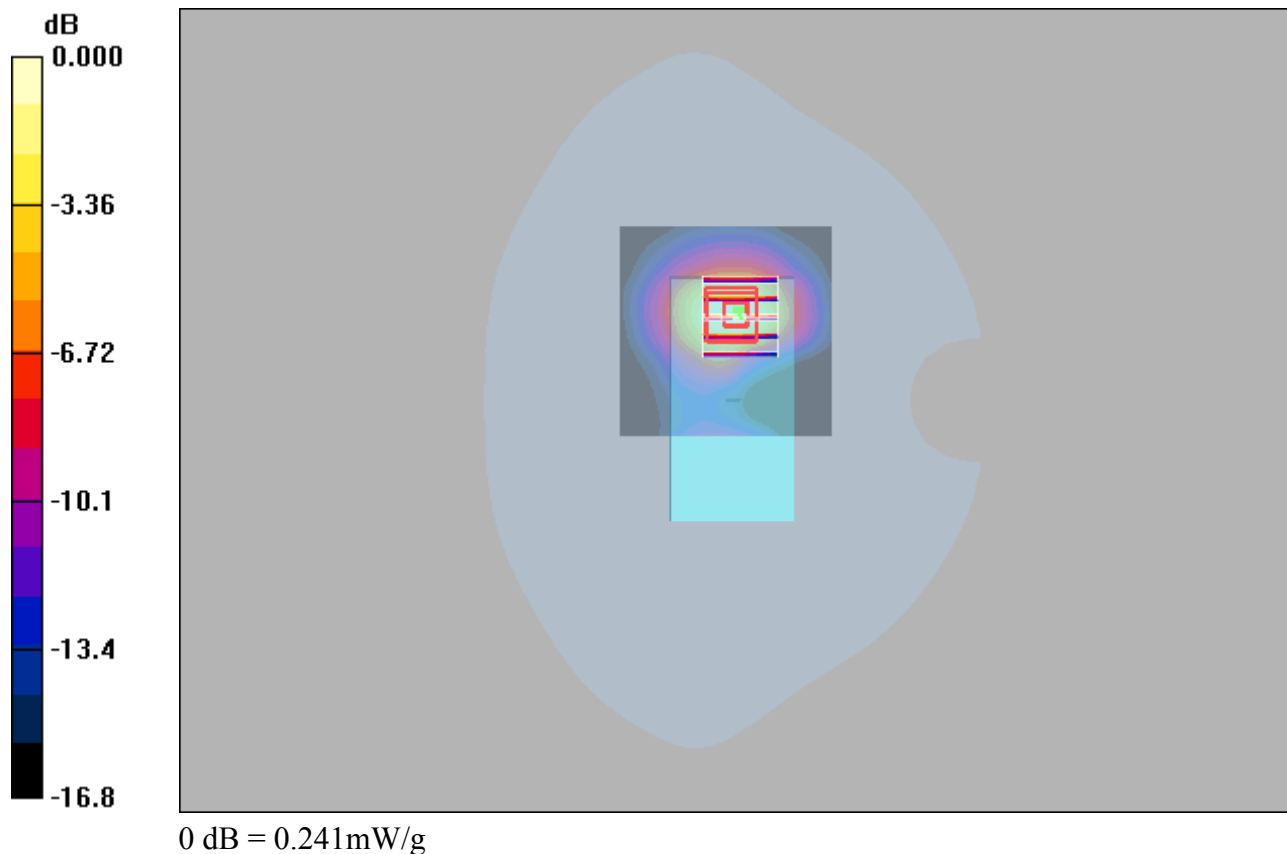

WCDMA V_RMC12.2K_Rear Face_10MM_4233**DUT: EUT**

Communication System: WCDMA Band V; Frequency: 846.6 MHz; Duty Cycle: 1:1

Medium: H835 Medium parameters used: $f = 847$ MHz; $\sigma = 0.897$ mho/m; $\epsilon_r = 41.9$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.2, 6.2, 6.2); Calibrated: 2024/3/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2024/3/18
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.370 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 20.9 V/m; Power Drift = 0.077 dB

Peak SAR (extrapolated) = 0.463 W/kg

SAR(1 g) = 0.330 mW/g; SAR(10 g) = 0.229 mW/g

Maximum value of SAR (measured) = 0.374 mW/g

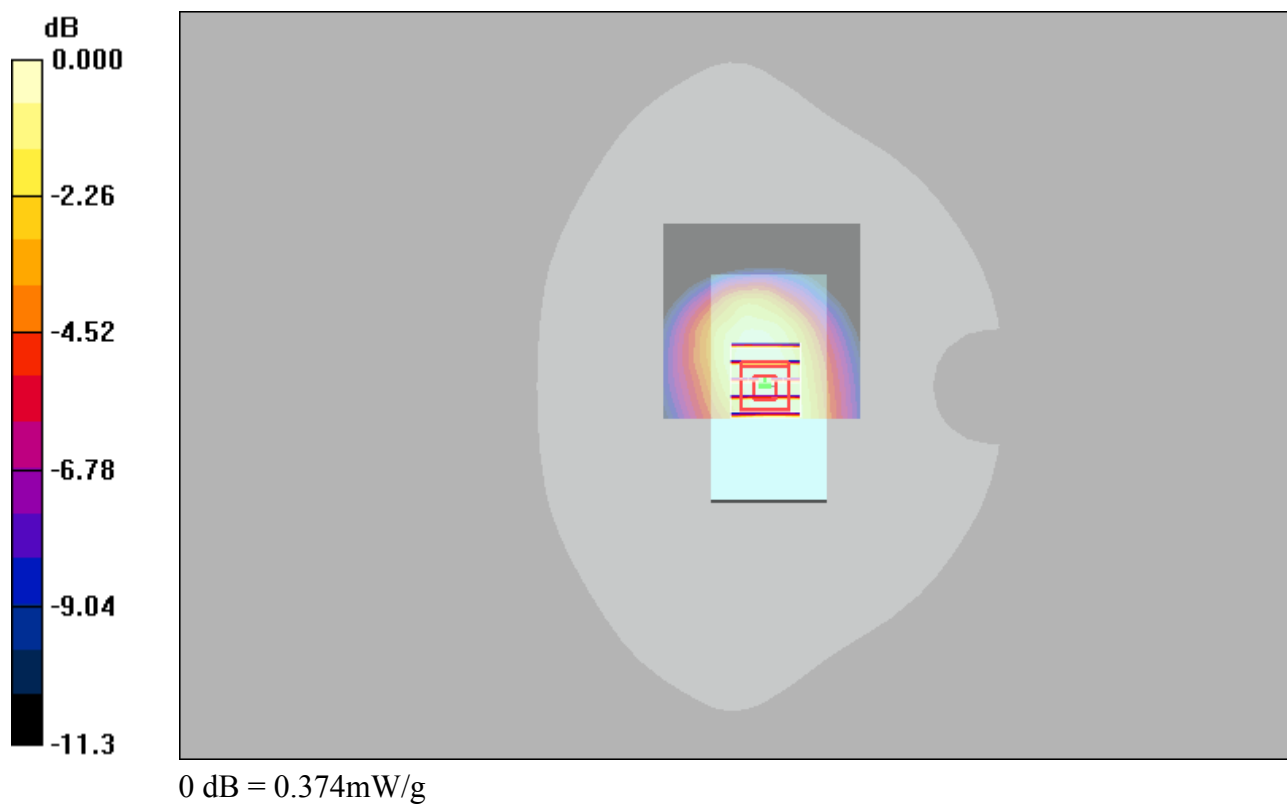

LTE 2_QPSK20M_50_25_Rear Face_10MM_19100**DUT: EUT**

Communication System: LTE Band 2; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium: H1900 Medium parameters used: $f = 1900$ MHz; $\sigma = 1.45$ mho/m; $\epsilon_r = 40$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.12, 5.12, 5.12); Calibrated: 2024/3/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2024/3/18
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 0.479 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 4.26 V/m; Power Drift = 0.034 dB

Peak SAR (extrapolated) = 0.600 W/kg

SAR(1 g) = 0.364 mW/g; SAR(10 g) = 0.211 mW/g

Maximum value of SAR (measured) = 0.441 mW/g

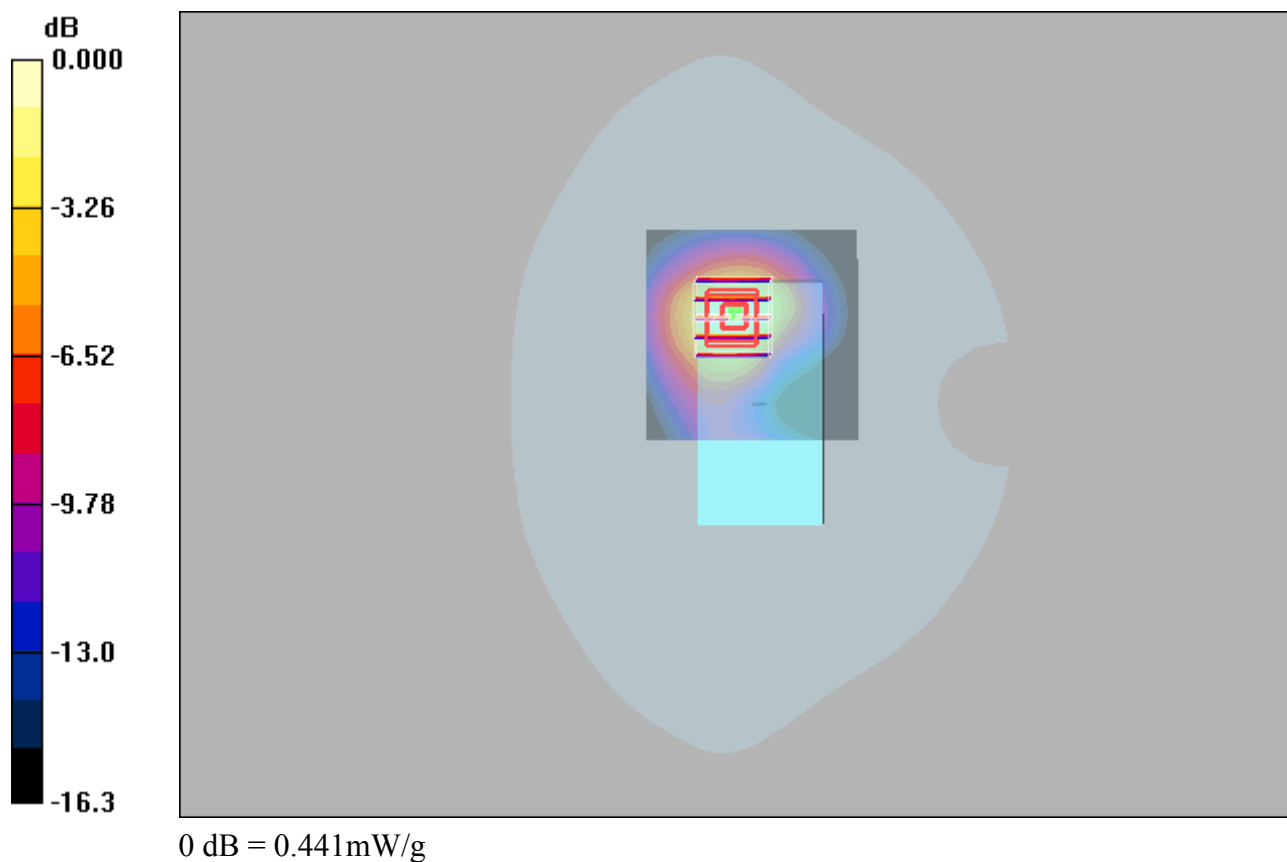

LTE 4_QPSK20M_1_0_Rear Face_10MM_20300**DUT: EUT**

Communication System: LTE Band 4&20M; Frequency: 1745 MHz;Duty Cycle: 1:1

Medium: H1750 Medium parameters used: $f = 1745$ MHz; $\sigma = 1.4$ mho/m; $\epsilon_r = 41$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(5.4, 5.4, 5.4); Calibrated: 2024/3/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2024/3/18
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- ; Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm

Maximum value of SAR (interpolated) = 1.76 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: dx=8mm, dy=8mm, dz=5mm

Reference Value = 8.90 V/m; Power Drift = 0.109 dB

Peak SAR (extrapolated) = 2.33 W/kg

SAR(1 g) = 1.14 mW/g; SAR(10 g) = 0.543 mW/g

Maximum value of SAR (measured) = 1.47 mW/g

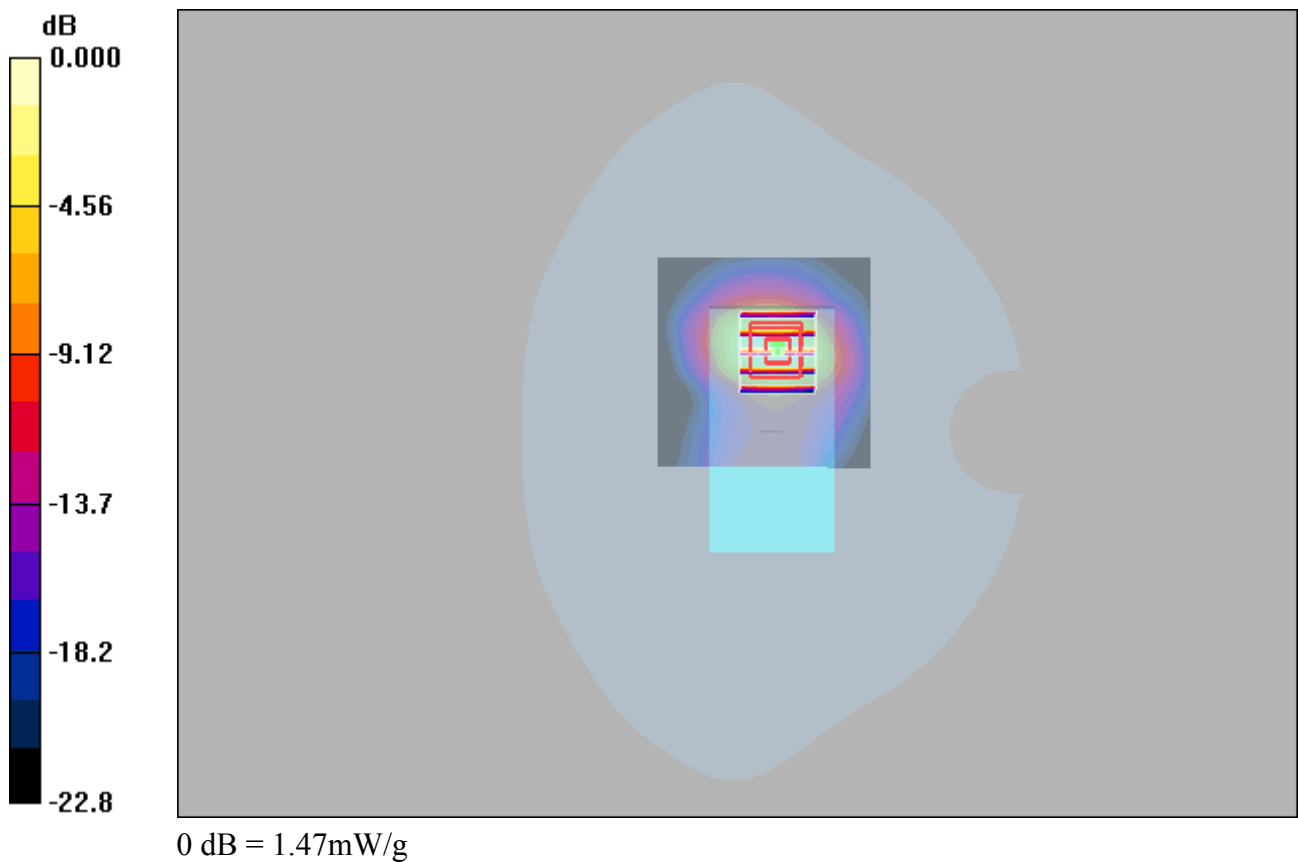

LTE 5_QPSK10M_1_49_Rear Face_10MM_20600**DUT: EUT**

Communication System: LTE Band5; Frequency: 844 MHz;Duty Cycle: 1:1

Medium: H835 Medium parameters used: $f = 844 \text{ MHz}$; $\sigma = 0.894 \text{ mho/m}$; $\epsilon_r = 41.9$; $\rho = 1000 \text{ kg/m}^3$

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(6.2, 6.2, 6.2); Calibrated: 2024/3/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2024/3/18
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (61x61x1): Measurement grid: $dx=15\text{mm}$, $dy=15\text{mm}$

Maximum value of SAR (interpolated) = 0.528 mW/g


Zoom Scan (5x5x7)/Cube 0: Measurement grid: $dx=8\text{mm}$, $dy=8\text{mm}$, $dz=5\text{mm}$

Reference Value = 24.2 V/m ; Power Drift = 0.024 dB

Peak SAR (extrapolated) = 0.638 W/kg

SAR(1 g) = 0.461 mW/g ; SAR(10 g) = 0.321 mW/g

Maximum value of SAR (measured) = 0.522 mW/g

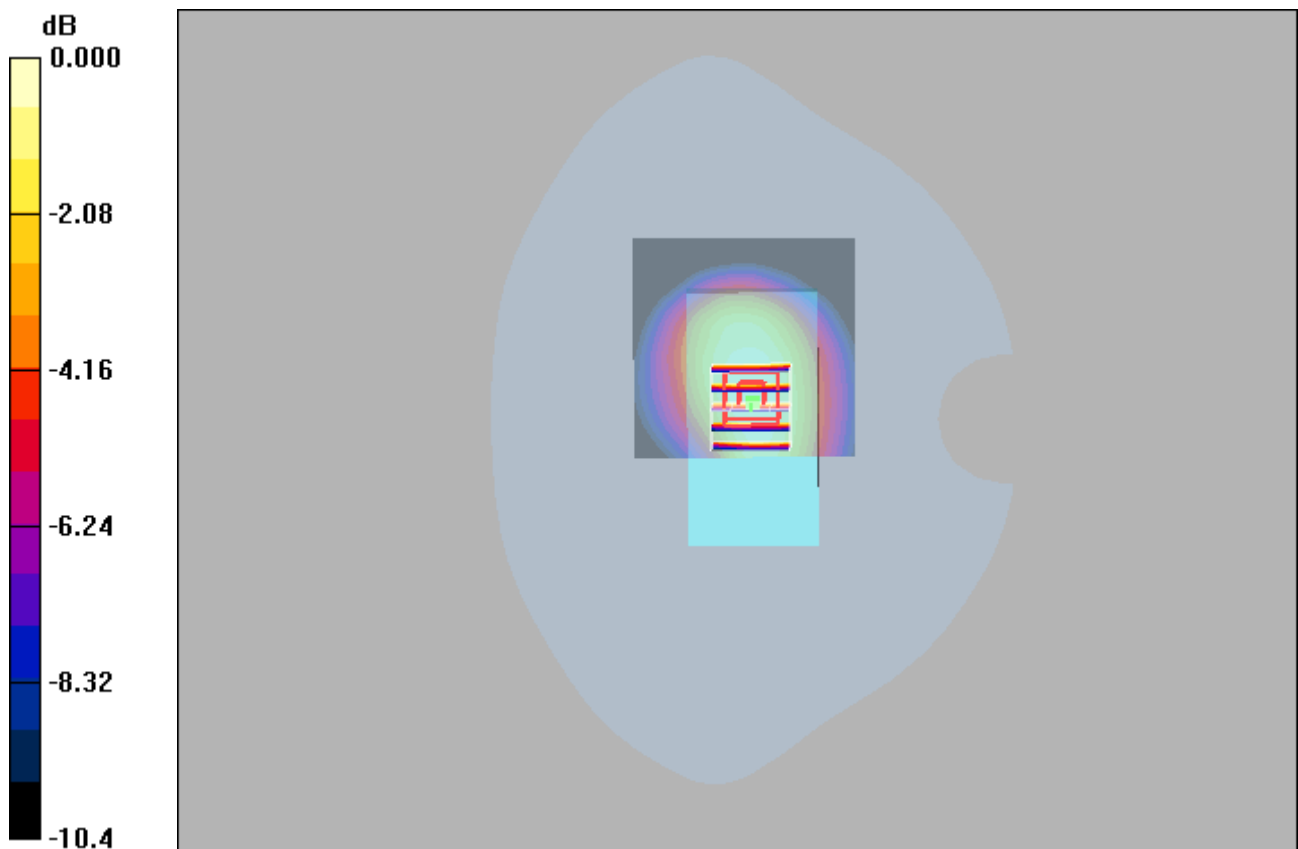

0 dB = 0.522mW/g

LTE 7_QPSK20M_50_50_Rear Face_10MM_21100**DUT: EUT**


Communication System: LTE Band 7&20M; Frequency: 2535 MHz; Duty Cycle: 1:1
Medium: H2600 Medium parameters used: $f = 2535$ MHz; $\sigma = 1.88$ mho/m; $\epsilon_r = 38.1$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(4.63, 4.63, 4.63); Calibrated: 2024/3/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2024/3/18
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (71x71x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (interpolated) = 1.11 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 4.31 V/m; Power Drift = 0.082 dB
Peak SAR (extrapolated) = 1.71 W/kg
SAR(1 g) = 0.881 mW/g; SAR(10 g) = 0.436 mW/g
Maximum value of SAR (measured) = 1.10 mW/g

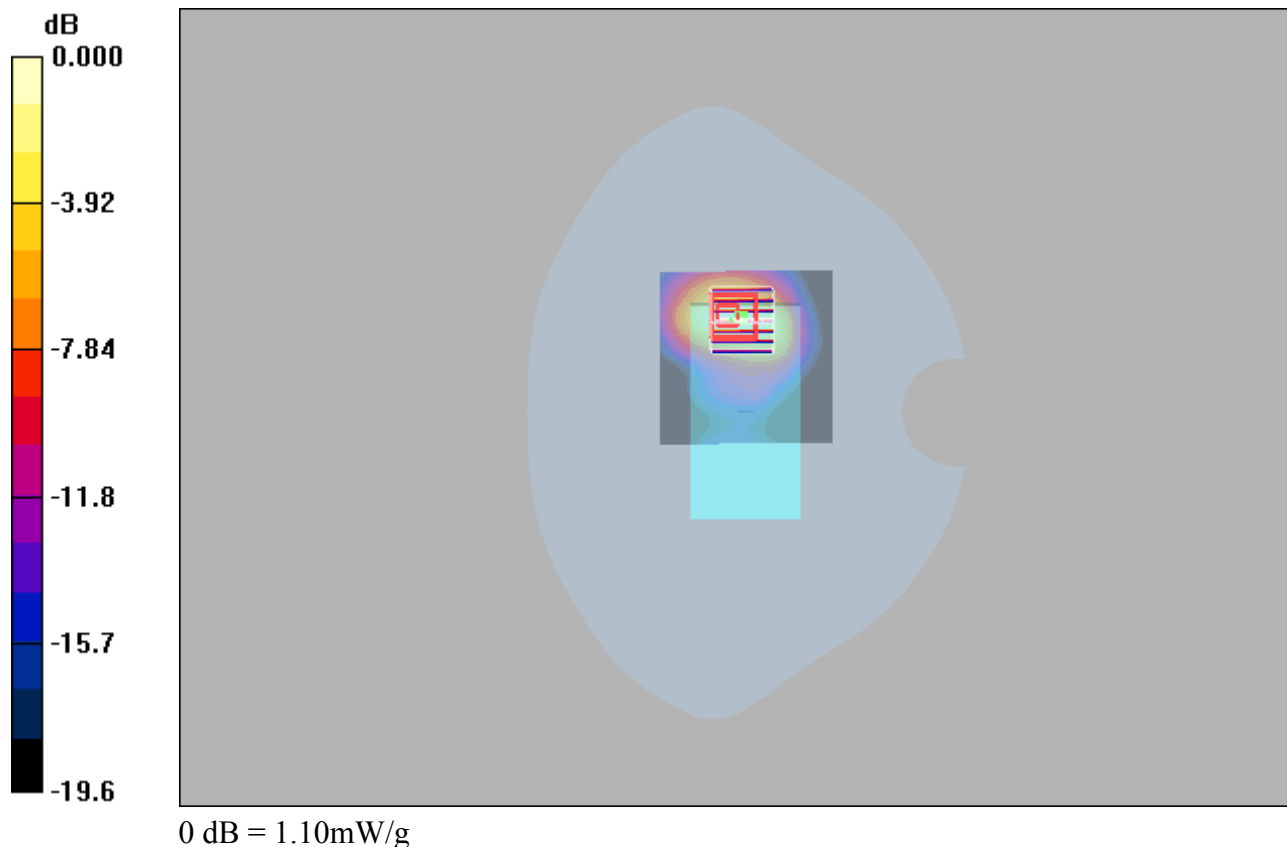

EDR_DH5_Rear Face_10MM_39**DUT: EUT**

Communication System: Bluetooth; Frequency: 2441 MHz; Duty Cycle: 1:1

Medium: H2450 Medium parameters used: $f = 2441$ MHz; $\sigma = 1.83$ mho/m; $\epsilon_r = 38.1$; $\rho = 1000$ kg/m³

DASY4 Configuration:

- Probe: ES3DV3 - SN3090; ConvF(4.63, 4.63, 4.63); Calibrated: 2024/3/26
- Sensor-Surface: 3mm (Mechanical Surface Detection)
- Electronics: DAE4 Sn662; Calibrated: 2024/3/18
- Phantom: SAM 1; Type: QD 000 P40 CB; Serial: TP/1378
- Postprocessing SW: SEMCAD, V1.8 Build 186

Area Scan (61x81x1): Measurement grid: dx=12mm, dy=12mm
Maximum value of SAR (interpolated) = 0.028 mW/g

Zoom Scan (7x7x7)/Cube 0: Measurement grid: dx=5mm, dy=5mm, dz=5mm
Reference Value = 2.35 V/m; Power Drift = 0.092 dB
Peak SAR (extrapolated) = 0.048 W/kg
SAR(1 g) = 0.026 mW/g; SAR(10 g) = 0.015 mW/g
Maximum value of SAR (measured) = 0.031 mW/g

