Celadon Inc.

TEST REPORT FOR

Tessonics RF Transceiver, FG-RCV3000-TES-01

Tested To The Following Standards:

FCC Part 15 Subpart C Sections 15.249 and RSS-210 Version 7

Report No.: 90470-11

Date of issue: June 23, 2010



TESTING CERT #803.01, 803.02, 803.05, 803.06 This test report bears the accreditation symbol indicating that the testing performed herein meets the test and reporting requirements of ISO/IEC 17025 under the applicable scope of EMC testing for CKC Laboratories, Inc.

We strive to create long-term, trust based relationships by providing sound, adaptive, customer first testing services. We embrace each of our customers' unique EMC challenges, not as an interruption to set processes, but rather as the reason we are in business.

This report contains a total of 37 pages and may be reproduced in full only. Partial reproduction may only be done with the written consent of CKC Laboratories, Inc.



TABLE OF CONTENTS

Administrative Information	3
Test Report Information	3
Report Authorization	3
Test Facility Information	4
Site Registration & Accreditation Information	4
Summary of Results	5
Conditions During Testing	5
Equipment Under Test	6
Peripheral Devices	6
FCC Part 15 Subpart C	7
15.31(m) Number Of Channels	7
15.33(a) Frequency Ranges Tested	7
15.203 Antenna Requirements	7
EUT Operating Frequency	7
15.207 AC Conducted Emissions	8
15.249(a) Carrier Output	17
Occupied Bandwidth -20dBc	21
Bandedge	23
15.249(a)(d) Field Strength of Spurious and Harmonics Emissions	25
RSS 210 99% Bandwidth	34
Supplemental Information	36
Measurement Uncertainty	36
Emissions Test Details	36



ADMINISTRATIVE INFORMATION

Test Report Information

REPORT PREPARED FOR: REPORT PREPARED BY:

Celadon Inc. Dianne Dudley
50 Mitchell Blvd. CKC Laboratories, Inc.
San Rafael, CA 94903 5046 Sierra Pines Drive
Mariposa, CA 95338

Representative: MIchael Griswold Project Number: 90470

Customer Reference Number: 4435

DATE OF EQUIPMENT RECEIPT: May 17, 2010

DATE(S) OF TESTING: May 17 -June 18, 2010

Report Authorization

The test data contained in this report documents the observed testing parameters pertaining to and are relevant for only the sample equipment tested in the agreed upon operational mode(s) and configuration(s) as identified herein. Compliance assessment remains the client's responsibility. This report may not be used to claim product endorsement by A2LA or any government agencies. This test report has been authorized for release under quality control from CKC Laboratories, Inc.

Steve Behm

Director of Quality Assurance & Engineering Services CKC Laboratories, Inc.

Steve J Be

Page 3 of 37 Report No.: 90470-11



Test Facility Information



Our laboratories are configured to effectively test a wide variety of product types. CKC utilizes first class test equipment, anechoic chambers, data acquisition and information services to create accurate, repeatable and affordable test results.

TEST LOCATION(S): CKC Laboratories, Inc. 1120 Fulton Place Fremont, CA 94539

Site Registration & Accreditation Information

Location	Japan	Canada	FCC
Fremont	R-2160, C2332 & T-228	3082B-1	958979

Page 4 of 37 Report No.: 90470-11



SUMMARY OF RESULTS

Standard / Specification: FCC Part 15 Subpart C

Description	Test Procedure/Method	Results
AC Mains Conducted Emissions	FCC Part 15 Subpart C Section 15.207/ ANSI C63.4 (2003)	Pass
Carrier Output	FCC Part 15 Subpart C Section 15.249(a)	Pass
Occupied Bandwidth-20dBc	FCC Part 15 Subpart C	Pass
Bandedge	FCC Part 15 Subpart C	Pass
Field Strength of Spurious & Harmonics Emissions	FCC Part 15 Subpart C Section 15.249(a)(d)	Pass
99% Bandwidth	RSS-210 Version 7	Pass

Conditions During Testing

This list is a summary of the conditions noted for or modifications made to the equipment during testing.

Sur	mmary of Conditions
Nor	ne

Page 5 of 37 Report No.: 90470-11



EQUIPMENT UNDER TEST (EUT)

EQUIPMENT UNDER TEST

<u>Tessonics RF Transceiver</u> <u>Tessonics RF Remote</u>

Manuf:Celadon Inc.Manuf:Celadon Inc.Model:FG-RCV3000-TES-01Model:FGSK18-TES-01

Serial: None Serial: None

PERIPHERAL DEVICES

The EUT was tested with the following peripheral device(s):

LaptopAC AdaptorManuf:DellManuf:Dell

Model: Latitude D620 Model: LA90PS0-00

Serial: PN PF329 A03 Serial: CN-0DF266-71615-735-B6DB

Page 6 of 37 Report No.: 90470-11



FCC PART 15 SUBPART C

This report contains EMC emissions test results under United States Federal Communications Commission (FCC) 47 CFR 15C requirements for Unlicensed Radio Frequency Devices, Subpart C - Intentional Radiators.

15.31(m) Number Of Channels

This device operates on a single channel.

15.33(a) Frequency Ranges Tested

15.207 Conducted Emissions: 150 kHz – 30 MHz 15.249 Radiated Emissions: 9 kHz – 25GHz

15.203 Antenna Requirements

The antenna is an integral part of the EUT and is non-removable; therefore the EUT complies with Section 15.203 of the FCC rules.

EUT Operating Frequency

The EUT was operating at 2.44234125GHz.

Page 7 of 37 Report No.: 90470-11



15.207 AC Conducted Emissions

Test Data Sheets

Test Location: CKC Laboratories, Inc. • 1120 Fulton Place. • Fremont, CA 94539 • (510) 249-1170

Customer: Celadon Inc.

Specification: 15.207 AC Mains - Average

Work Order #:90470Date:5/28/2010Test Type:Conducted EmissionsTime:19:24:56Equipment:Tessonics RF TransceiverSequence#:29Manufacturer:Celadon Inc.Tested By:N. Gamez

Model: FG-RCV3000-TES-01 120V 60Hz

S/N: None

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
T1	AN00493	50uH LISN-Line I Loss w/o	3816/NM	1/27/2010	1/27/2012
		Euro Adap			
	AN00493	50uH LISN-Neut I Loss w/o	3816/NM	1/27/2010	1/27/2012
		Euro Adap			
T2	ANP01211	Attenuator	23-10-34	5/18/2009	5/18/2011
T3	ANP05440	Cable		1/18/2010	1/18/2012
T4	ANP05300	Cable	RG214/U	3/6/2009	3/6/2011
T5	ANP05258	High Pass Filter	HE9615-150K-50-720B	12/18/2008	12/18/2010
	AN02668	Spectrum Analyzer	E4446A	3/9/2009	3/9/2011

Equipment Under Test (* = EUT):

	,		
Function	Manufacturer	Model #	S/N
Tessonics RF Remote	Celadon Inc.	FGSK18-TES-01	None
Tessonics RF Transceiver*	Celadon Inc.	FG-RCV3000-TES-01	None

Support Devices:

Function	Manufacturer	Model #	S/N
Laptop	Dell	Latitude D620	PN PF329 A03
AC Adaptor	Dell	LA90PS0-00	CN-0DF266-71615-735-B6DB

Test Conditions / Notes:

FC-3

Conducted Emissions 0.15-30MHz

EUT runs on single channel at 2.44234125GHz.

TX Mode

Temperature: 21°C Relative Humidity: 41% Atmospheric Pressure: 102.1kPa

> Page 8 of 37 Report No.: 90470-11



Ext Attn: 0 dB

	rement Data:	Re	ading lis	ted by ma	argin.	. Test Lead: Line					
#	Freq	Rdng	T1 T5	T2	T3	T4	Dist	Corr	Spec	Margin	Polar
	MHz	$dB\mu V$	dB	dB	dB	dB	Table	$dB\mu V$	$dB\mu V$	dB	Ant
1	2.710M	31.5	+0.1 +0.1	+9.9	+0.1	+0.2	+0.0	41.9	46.0	-4.1	Line
2	629.228k	31.3	+0.1 +0.0	+9.8	+0.0	+0.2	+0.0	41.4	46.0	-4.6	Line
3	1.706M	31.0	+0.1 +0.1	+10.0	+0.1	+0.1	+0.0	41.4	46.0	-4.6	Line
4	1.047M	31.1	+0.0 +0.1	+9.8	+0.1	+0.1	+0.0	41.2	46.0	-4.8	Line
5	816.847k	31.0	+0.0 +0.1	+9.8	+0.1	+0.1	+0.0	41.1	46.0	-4.9	Line
6	1.026M	31.0	+0.0 +0.1	+9.8	+0.1	+0.1	+0.0	41.1	46.0	-4.9	Line
7	1.634M	30.7	+0.1 +0.1	+9.9	+0.0	+0.2	+0.0	41.0	46.0	-5.0	Line
8	691.040k	31.1	$+0.0 \\ +0.0$	+9.8	+0.0	+0.1	+0.0	41.0	46.0	-5.0	Line
9	3.790M	30.5	+0.0 +0.1	+9.8	+0.1	+0.2	+0.0	40.7	46.0	-5.3	Line
10	824.846k	30.5	$+0.0 \\ +0.1$	+9.8	+0.1	+0.1	+0.0	40.6	46.0	-5.4	Line
11	2.689M	30.2	+0.1 +0.1	+9.9	+0.1	+0.2	+0.0	40.6	46.0	-5.4	Line
12	2.323M	30.1	+0.1 +0.1	+9.9	+0.1	+0.3	+0.0	40.6	46.0	-5.4	Line
13	1.319M	30.2	+0.0 +0.1	+9.9	+0.0	+0.2	+0.0	40.4	46.0	-5.6	Line
14	1.328M	30.1	+0.0 +0.1	+9.9	+0.1	+0.2	+0.0	40.4	46.0	-5.6	Line
15	2.395M	30.0	+0.1 +0.1	+9.9	+0.1	+0.2	+0.0	40.4	46.0	-5.6	Line
16	885.710k	30.1	+0.0 +0.1	+9.8	+0.1	+0.2	+0.0	40.3	46.0	-5.7	Line
17	1.009M	30.1	+0.0 +0.1	+9.8	+0.1	+0.1	+0.0	40.2	46.0	-5.8	Line
18	2.000M	29.6	+0.1 +0.1	+10.0	+0.1		+0.0	40.1	46.0	-5.9	Line
19	193.631k	37.3	+0.1 +0.2	+10.0	+0.1	+0.2		47.9	53.9	-6.0	Line
20	1.222M	29.7	+0.0 +0.1	+9.9	+0.1	+0.2	+0.0	40.0	46.0	-6.0	Line
21	527.419k	29.8	$^{+0.0}_{+0.0}$	+9.8	+0.0	+0.2	+0.0	39.8	46.0	-6.2	Line
22	783.395k	29.6	+0.0 +0.1	+9.8	+0.1	+0.1	+0.0	39.7	46.0	-6.3	Line
23	1.626M	29.3	+0.1 +0.1	+9.9	+0.0	+0.2	+0.0	39.6	46.0	-6.4	Line




24	2.170M	29.0	+0.1 +0.1	+10.0	+0.1	+0.2	+0.0	39.5	46.0	-6.5	Line
25	1.183M	29.2	+0.0 +0.1	+9.8	+0.1	+0.2	+0.0	39.4	46.0	-6.6	Line
26	1.787M	28.9	+0.1 +0.1	+10.0	+0.1	+0.2	+0.0	39.4	46.0	-6.6	Line
27	4.620M	29.0	+0.1	+9.9	+0.1	+0.2	+0.0	39.4	46.0	-6.6	Line
28	3.846M	29.2	+0.0 +0.1	+9.8	+0.1	+0.2	+0.0	39.4	46.0	-6.6	Line
29	3.595M	29.0	+0.0 +0.1	+9.8	+0.1	+0.2	+0.0	39.2	46.0	-6.8	Line
30	4.960M	28.7	+0.1 +0.1	+10.0	+0.1	+0.2	+0.0	39.2	46.0	-6.8	Line
31	2.408M	28.7	+0.1 +0.1	+9.9	+0.1	+0.2	+0.0	39.1	46.0	-6.9	Line
32	1.154M	28.9	+0.0 +0.1	+9.8	+0.1	+0.1	+0.0	39.0	46.0	-7.0	Line
33	1.196M	28.6	+0.0 +0.1	+9.9	+0.1	+0.2	+0.0	38.9	46.0	-7.1	Line
34	1.141M	28.7	+0.0 +0.1	+9.8	+0.1	+0.1	+0.0	38.8	46.0	-7.2	Line
35	1.894M	28.3	+0.1 +0.1	+10.0	+0.2	+0.1	+0.0	38.8	46.0	-7.2	Line
36	3.072M	28.6	+0.1 +0.1	+9.8	+0.1	+0.1	+0.0	38.8	46.0	-7.2	Line
37	393.613k	30.6	+0.0 +0.0	+9.8	+0.1	+0.2	+0.0	40.7	48.0	-7.3	Line
38	1.732M	28.3	+0.1 +0.1	+10.0	+0.1	+0.1	+0.0	38.7	46.0	-7.3	Line
39	792.849k	28.3	+0.0 +0.1	+9.8	+0.1	+0.1	+0.0	38.4	46.0	-7.6	Line
40	1.507M	28.0	+0.1 +0.1	+9.9	+0.2	+0.1	+0.0	38.4	46.0	-7.6	Line
41	2.093M	28.0	+0.1 +0.1	+10.0	+0.0	+0.2	+0.0	38.4	46.0	-7.6	Line
42	3.084M	28.1	+0.1 +0.1	+9.8	+0.1	+0.1	+0.0	38.3	46.0	-7.7	Line
43	439.783k Ave	29.2	+0.0 +0.0	+9.8	+0.1	+0.1	+0.0	39.2	47.1	-7.9	Line
	1.250M Ave	26.2	+0.0 +0.1	+9.9	+0.1	+0.2	+0.0	36.5	46.0	-9.5	Line
	439.783k QP	37.1	+0.0 +0.0	+9.8	+0.1	+0.1	+0.0	47.1	57.1	-10.0	Line
٨	439.783k	39.5	+0.0 +0.0	+9.8	+0.1	+0.1	+0.0	49.5	47.1	+2.4	Line
47	1.250M QP	33.3	+0.0 +0.1	+9.9	+0.1	+0.2	+0.0	43.6	56.0	-12.4	Line
٨	1.250M	38.7	+0.0 +0.1	+9.9	+0.1	+0.2	+0.0	49.0	46.0	+3.0	Line
49	554.521k QP	32.9	+0.0	+9.8	+0.0	+0.2	+0.0	42.9	56.0	-13.1	Line
_						•			•		

Page 10 of 37 Report No.: 90470-11



50	370.611k	23.5	+0.0	+9.9	+0.1	+0.2	+0.0	33.8	48.5	-14.7	Line
	Ave		+0.1								
51	370.611k	33.4	+0.0	+9.9	+0.1	+0.2	+0.0	43.7	58.5	-14.8	Line
	QP		+0.1								
٨	370.611k	36.5	+0.0	+9.9	+0.1	+0.2	+0.0	46.8	48.5	-1.7	Line
			+0.1								
53	554.521k	21.0	+0.0	+9.8	+0.0	+0.2	+0.0	31.0	46.0	-15.0	Line
	Ave		+0.0								
٨	554.521k	38.2	+0.0	+9.8	+0.0	+0.2	+0.0	48.2	46.0	+2.2	Line
			+0.0								
55	954.489k	29.3	+0.1	+9.8	+0.1	+0.1	+0.0	39.5	56.0	-16.5	Line
	QP		+0.1								
56	2.523M	17.9	+0.1	+9.9	+0.2	+0.1	+0.0	28.3	46.0	-17.7	Line
	Ave		+0.1								
57	2.523M	27.3	+0.1	+9.9	+0.2	+0.1	+0.0	37.7	56.0	-18.3	Line
	QP		+0.1								
٨	2.523M	34.2	+0.1	+9.9	+0.2	+0.1	+0.0	44.6	46.0	-1.4	Line
			+0.1								
59	954.489k	17.0	+0.1	+9.8	+0.1	+0.1	+0.0	27.2	46.0	-18.8	Line
	Ave		+0.1								
٨	954.489k	36.7	+0.1	+9.8	+0.1	+0.1	+0.0	46.9	46.0	+0.9	Line
			+0.1								

CKC Laboratories, Inc. Date: 5/28/2010 Time: 19:24:56 Celadon Inc. WO#. 90470 15.207 AC Mains - Average Test Lead: Line 120V 60Hz Sequence#: 29 Line

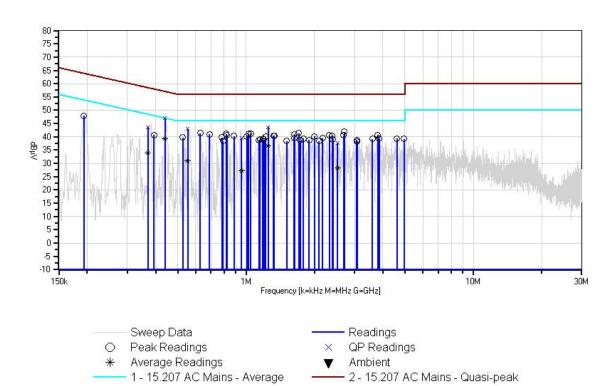



Test Location: CKC Laboratories, Inc. • 1120 Fulton Place. • Fremont, CA 94539 • (510) 249-1170

Customer: Celadon Inc.

Specification: 15.207 AC Mains - Average

Work Order #:90470Date:5/28/2010Test Type:Conducted EmissionsTime:19:14:58Equipment:Tessonics RF TransceiverSequence#:28Manufacturer:Celadon Inc.Tested By:N. GamezModel:FG-RCV3000-TES-01120V 60Hz

S/N: None

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
	AN00493	50uH LISN-Line I Loss w/o	3816/NM	1/27/2010	1/27/2012
		Euro Adap			
T1	AN00493	50uH LISN-Neut I Loss w/o	3816/NM	1/27/2010	1/27/2012
		Euro Adap			
T2	ANP01211	Attenuator	23-10-34	5/18/2009	5/18/2011
T3	ANP05440	Cable		1/18/2010	1/18/2012
T4	ANP05300	Cable	RG214/U	3/6/2009	3/6/2011
T5	ANP05258	High Pass Filter	HE9615-150K-50-720B	12/18/2008	12/18/2010
	AN02668	Spectrum Analyzer	E4446A	3/9/2009	3/9/2011

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
Tessonics RF Remote	Celadon Inc.	FGSK18-TES-01	None
Tessonics RF Transceiver*	Celadon Inc.	FG-RCV3000-TES-01	None

Support Devices:

Tr Tr Tr Tr Tr			
Function	Manufacturer	Model #	S/N
Laptop	Dell	Latitude D620	PN PF329 A03
AC Adaptor	Dell	LA90PS0-00	CN-0DF266-71615-735-B6DB

Test Conditions / Notes:

FC-3

Conducted Emissions 0.15-30MHz

EUT runs on single channel at 2.44234125GHz.

TX Mode

Temperature: 21°C
Relative Humidity: 41%
Atmospheric Pressure: 102.1kPa

Ext Attn: 0 dB

Measu	rement Data:	Re	eading lis	ted by ma	argin.			Test Lead	d: Neutral		
#	Freq	Rdng	T1	T2	T3	T4	Dist	Corr	Spec	Margin	Polar
			T5								
	MHz	dΒμV	dB	dB	dB	dB	Table	dΒμV	dΒμV	dB	Ant
1	439.049k	35.5	+0.1	+9.8	+0.1	+0.1	+0.0	45.6	47.1	-1.5	Neutr
	Ave		+0.0								
2	527.419k	32.0	+0.0	+9.8	+0.0	+0.2	+0.0	42.0	46.0	-4.0	Neutr
			+0.0								
3	375.433k	34.0	+0.0	+9.8	+0.1	+0.2	+0.0	44.1	48.4	-4.3	Neutr
			+0.0								
4	1.868M	31.1	+0.1	+10.0	+0.1	+0.2	+0.0	41.6	46.0	-4.4	Neutr
			+0.1								

Page 12 of 37 Report No.: 90470-11



5	805.939k	31.2	+0.1 +0.1	+9.8	+0.1	+0.1	+0.0	41.4	46.0	-4.6	Neutr
6	2.332M	30.8	+0.1 +0.1	+9.9	+0.1	+0.3	+0.0	41.3	46.0	-4.7	Neutr
7	657.589k	31.2	+0.0 +0.0	+9.8	+0.0	+0.2	+0.0	41.2	46.0	-4.8	Neutr
8	1.192M	30.8	+0.1	+9.9	+0.1	+0.2	+0.0	41.2	46.0	-4.8	Neutr
9	1.328M	30.7	+0.1	+9.9	+0.1	+0.2	+0.0	41.1	46.0	-4.9	Neutr
10	2.008M	30.6	+0.1	+10.0	+0.1	+0.2	+0.0	41.1	46.0	-4.9	Neutr
11	1.566M	30.6	+0.1	+9.9	+0.1	+0.1	+0.0	40.9	46.0	-5.1	Neutr
12	2.442M	30.4	+0.1	+9.9	+0.1	+0.2	+0.0	40.8	46.0	-5.2	Neutr
13	736.127k	30.6	+0.1	+9.8	+0.0	+0.2	+0.0	40.6	46.0	-5.4	Neutr
14	678.678k	30.6	+0.0	+9.8	+0.0	+0.1	+0.0	40.5	46.0	-5.5	Neutr
15	2.183M	30.0	+0.0	+10.0	+0.1	+0.2	+0.0	40.5	46.0	-5.5	Neutr
16	259.807k	35.3	+0.1	+10.0	+0.1	+0.2	+0.0	45.8	51.4	-5.6	Neutr
17	770.306k	30.2	+0.2	+9.8	+0.1	+0.1	+0.0	40.3	46.0	-5.7	Neutr
18	1.613M	30.0	+0.1	+9.9	+0.0	+0.2	+0.0	40.3	46.0	-5.7	Neutr
19	2.242M	29.7	+0.1	+9.9	+0.1	+0.3	+0.0	40.2	46.0	-5.8	Neutr
20	2.689M	29.8	+0.1	+9.9	+0.1	+0.2	+0.0	40.2	46.0	-5.8	Neutr
21	783.395k	29.9	+0.1	+9.8	+0.1	+0.1	+0.0	40.1	46.0	-5.9	Neutr
22	1.923M	29.6	+0.1	+10.0	+0.2	+0.1	+0.0	40.1	46.0	-5.9	Neutr
23	1.723M	29.6	+0.1	+10.0	+0.1	+0.1	+0.0	40.0	46.0	-6.0	Neutr
24	816.120k	29.7	+0.1	+9.8	+0.1	+0.1	+0.0	39.9	46.0	-6.1	Neutr
25	688.859k	29.8	+0.1	+9.8	+0.0	+0.1	+0.0	39.7	46.0	-6.3	Neutr
26	299.803k	33.4	+0.0	+10.0	+0.0	+0.2	+0.0	43.8	50.2	-6.4	Neutr
27	1.005M	29.3	+0.2	+9.8	+0.1	+0.1	+0.0	39.5	46.0	-6.5	Neutr
28	4.203M	29.3	+0.1	+9.8	+0.1	+0.2	+0.0	39.5	46.0	-6.5	Neutr
29	873.569k	29.3	+0.1	+9.8	+0.1	+0.1	+0.0	39.4	46.0	-6.6	Neutr
30	193.631k	36.7	+0.1	+10.0	+0.1	+0.2	+0.0	47.3	53.9	-6.6	Neutr
			+0.2								

Page 13 of 37 Report No.: 90470-11




-											
31	1.741M	29.0	$+0.1 \\ +0.1$	+10.0	+0.1	+0.1	+0.0	39.4	46.0	-6.6	Neutr
32	877.205k	29.3	+0.0	+9.8	+0.1	+0.1	+0.0	39.4	46.0	-6.6	Neutr
			+0.1								
33	3.403M	29.0	+0.1 +0.1	+9.8	+0.1	+0.2	+0.0	39.3	46.0	-6.7	Neutr
34	1.226M	28.8	+0.1	+9.9	+0.1	+0.2	+0.0	39.2	46.0	-6.8	Neutr
35	701.221k	29.0	+0.1	+9.8	+0.0	+0.1	+0.0	38.9	46.0	-7.1	Neutr
			+0.0								
36	1.949M	28.4	$+0.1 \\ +0.1$	+10.0	+0.2	+0.1	+0.0	38.9	46.0	-7.1	Neutr
37	834.300k	28.6	+0.0	+9.8	+0.1	+0.1	+0.0	38.7	46.0	-7.3	Neutr
37	05 1.500K	20.0	+0.1	17.0	10.1	10.1	10.0	30.7	10.0	7.3	rteati
38	2.468M	28.3	+0.1	+9.9	+0.1	+0.2	+0.0	38.7	46.0	-7.3	Neutr
	2.10011	20.5	+0.1	17.7	10.1	10.2	10.0	30.7	10.0	7.5	rteati
39	4.654M	28.4	+0.0	+9.9	+0.1	+0.2	+0.0	38.7	46.0	-7.3	Neutr
	4.054141	20.4	+0.1	17.7	10.1	10.2	10.0	30.7	40.0	7.5	ricuti
40	1.111M	28.3	+0.1	+9.8	+0.1	+0.2	+0.0	38.6	46.0	-7.4	Neutr
1	1.111111	20.5	+0.1	17.0	10.1	10.2	10.0	30.0	40.0	7.4	ricuti
41	1.630M	28.3	+0.1	+9.9	+0.0	+0.2	+0.0	38.6	46.0	-7.4	Neutr
71	1.030141	20.5	+0.1	17.7	10.0	10.2	10.0	30.0	40.0	7.4	ricuti
42	2.255M	28.1	+0.1	+9.9	+0.1	+0.3	+0.0	38.6	46.0	-7.4	Neutr
72	2.2331 v1	20.1	+0.1	17.7	10.1	10.5	10.0	30.0	40.0	-/. -	redu
43	841.572k	28.4	+0.0	+9.8	+0.1	+0.1	+0.0	38.5	46.0	-7.5	Neutr
13	0-1.572K	20.4	+0.1	17.0	10.1	10.1	10.0	30.3	40.0	-1.5	redu
44	1.689M	28.1	+0.1	+10.0	+0.1	+0.1	+0.0	38.5	46.0	-7.5	Neutr
7-7	1.0071	20.1	+0.1	110.0	10.1	10.1	10.0	30.3	40.0	-1.5	redu
45	439.049k	37.5	+0.1	+9.8	+0.1	+0.1	+0.0	47.6	57.1	-9.5	Neutr
	439.049K QP	31.3	+0.1	⊤ 7. 0	⊤0.1	+0.1	+0.0	47.0	37.1	-9.5	Neuti
^	439.049k	40.1	+0.1	+9.8	+0.1	+0.1	+0.0	50.2	47.1	+3.1	Neutr
	437.047K	70.1	+0.0	17.0	10.1	10.1	10.0	30.2	77.1	13.1	rveuti
٨	434.337k	32.8	+0.1	+9.8	+0.1	+0.1	+0.0	42.9	47.2	-4.3	Neutr
	434.337K	32.0	+0.0	17.0	10.1	10.1	10.0	72.7	77.2	-4.5	ricuti
48	550.745k	33.8	+0.0	+9.8	+0.0	+0.2	+0.0	43.8	56.0	-12.2	Neutr
	OP	55.0	+0.0 +0.0	⊤ 7.0	+0.0	± 0. ∠	+0.0	+3.0	50.0	-12.2	ricuu
49	550.745k	22.5	+0.0	+9.8	+0.0	+0.2	+0.0	32.5	46.0	-13.5	Neutr
	330.743K Ave	44.3	+0.0 +0.0	⊤ 7.0	+0.0	± 0. ∠	+0.0	34.3	+0.0	-13.3	ricuu
^	550.745k	39.8	+0.0	+9.8	+0.0	+0.2	+0.0	49.8	46.0	+3.8	Neutr
	330.743K	37.0	+0.0 +0.0	⊤ 7.0	+0.0	± 0. ∠	+0.0	4 2.0	+0.0	±3.0	ricuu
51	934.439k	21.8	+0.0	+9.8	+0.1	+0.2	+0.0	32.1	46.0	-13.9	Neutr
	934.439K Ave	21.0	+0.1	+7.0	⊤0.1	⊤∪. ∠	±0.0	$J \angle . 1$	+0.0	-13.7	rveuu
52	1.074M	30.5	+0.1	+9.8	+0.1	+0.2	+0.0	40.8	56.0	-15.2	Neutr
	QP	50.5	+0.1	1 2.0	10.1	10.4	10.0	7∪.0	50.0	-13.4	redu
53	934.439k	30.3	+0.1	+9.8	+0.1	+0.2	+0.0	40.6	56.0	-15.4	Neutr
	QP	50.5	+0.1	1 7.0	10.1	10.2	10.0	1 0.0	20.0	13.7	11000
^	934.439k	38.3	+0.1	+9.8	+0.1	+0.2	+0.0	48.6	46.0	+2.6	Neutr
	ノンサ・サングム	50.5	+0.1	1 2.0	10.1	10.4	10.0	70.0	70.0	1 4.0	redu
55	1.074M	14.0	+0.1	+9.8	+0.1	+0.2	+0.0	24.3	46.0	-21.7	Neutr
	Ave	11.0	+0.1	17.0	. 0.1	. 0.2	. 0.0	21.3	10.0	21.7	1,0411
٨	1.074M	36.3	+0.1	+9.8	+0.1	+0.2	+0.0	46.6	46.0	+0.6	Neutr
	1.07 1111	50.5	+0.1	17.0	. 0.1	. 0.2	. 0.0		10.0	10.0	
<u> </u>			10.1								

Page 14 of 37 Report No.: 90470-11



CKC Laboratories, Inc. Date: 5/28/2010 Time: 19:14:58 Celadon Inc. WO#: 90470 15.207 AC Mains - Average Test Lead: Neutral 120V 60Hz Sequence#: 28 Neutral

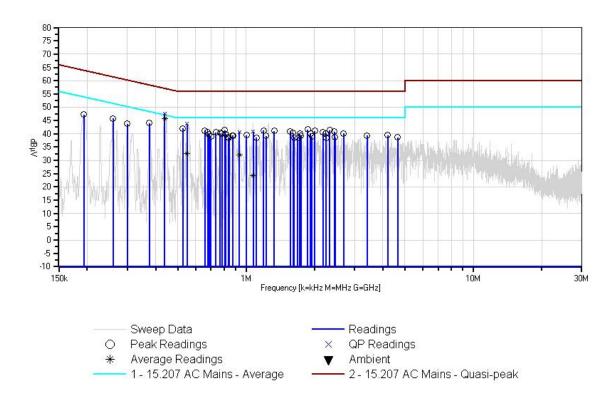



Test Setup Photos







15.249(a) Carrier Output

Test Data Sheets

Test Location: CKC Laboratories, Inc. • 1120 Fulton Place. • Fremont, CA 94539 • (510) 249-1170

Customer: Celadon Inc.

Specification: 15.249 Carrier and Spurious Emissions (2400-2483.5 MHz Transmitter)

Work Order #: 90470 Date: 6/18/2010
Test Type: Radiated Scan Time: 14:38:38
Equipment: Tessonics RF Transceiver Sequence#: 4
Manufacturer: Celadon Inc. Tested By: A. Brar

Model: FG-RCV3000-TES-01

S/N: None

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
	AN02668	Spectrum Analyzer	E4446A	3/9/2009	3/9/2011
T1	AN02061	Horn Antenna	DRG-118A	1/19/2009	1/19/2011
T2	ANP05138	Cable	FSJ1P-50A-4	3/19/2010	3/19/2012
Т3	ANP04241	Cable	FSJ1-50A	3/2/2010	3/2/2012
T4	ANdBm	Unit Conversion		4/12/2010	4/12/2012
T5	ANWO#90470 Duty	Duty Cycle Correction Factor		4/12/2010	4/12/2012
	Cycle Correction Factor				

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
Tessonics RF Transceiver*	Celadon Inc.	FG-RCV3000-TES-01	None

Support Devices:

Support Devices.			
Function	Manufacturer	Model #	S/N
Laptop	Dell	Latitude D620	PN PF329 A03
AC Adaptor	Dell	LA90PS0-00	CN-0DF266-71615-735-B6DB

Test Conditions / Notes:

RBW 1MHz

VBW 3MHz

EUT runs on single channel at 2.44234125GHz.

FCC 15.31(e) covered under this data sheet, the voltage of the laptop to which the EUT was connected to was varied from 85% to 115% of the nominal rated supply voltage while the peak readings were taken.

Temperature: 21°C Relative Humidity: 42% Atmospheric Pressure: 101.3kPa

The average readings are based on the following correction factor:

On Time: 0.14ms Cycle Time: 5.115ms

On Time per 100 ms: (100 ms/5.115 ms)*(0.14 ms) = 2.73 ms

20*Log(2.73/100 ms) = -31.25 dB

Page 17 of 37 Report No.: 90470-11




Ext Attn: 0 dB

Measurement Data:	Re	eading list	ted by ma	argin.		Те	est Distanc	e: 3 Meters	1	
# Freq	Rdng	T1 T5	T2	Т3	T4	Dist	Corr	Spec	Margin	Polar
MHz	dΒμV	dB	dB	dB	dB	Table	dBμV/m	$dB\muV/m$	dB	Ant
1 2442.350M Ave	-40.5	+28.7 -31.3	+2.3	+0.5	+107.0	+0.0 -7	66.7	94.0	-27.3	Horiz 100
2 2442.350M Ave	-43.1	+28.7 -31.3	+2.3	+0.5	+107.0	+0.0 -7	64.1	94.0	-29.9	Vert 100
3 2442.325M Ave	-44.2	+28.7 -31.3	+2.3	+0.5	+107.0	+0.0 -7	63.0	94.0	-31.0	Horiz 100
4 2442.333M Ave	-44.8	+28.7	+2.3	+0.5	+107.0	+0.0 -7	62.4	94.0	-31.6	Vert 100
5 2442.375M Ave	-45.7	+28.7	+2.3	+0.5	+107.0	+0.0	61.5	94.0	-32.5	Horiz 100
^ 2442.350M	-40.5	+28.7 +0.0	+2.3	+0.5	+107.0	+0.0 208	98.0	94.0 EUT is lyin	+4.0 ng flat on	Horiz 100
^ 2442.325M	-44.2	+28.7 +0.0	+2.3	+0.5	+107.0	+0.0 204	94.3	94.0 EUT is lying side, Z Axis	_	Horiz 110
^ 2442.375M	-45.7	+28.7 +0.0	+2.3	+0.5	+107.0	+0.0 210	92.8	94.0 EUT is lying side, Y Ax	-1.2 ng on its	Horiz 115
9 2442.400M Ave	-50.7	+28.7 -31.3	+2.3	+0.5	+107.0	+0.0 -7	56.5	94.0	-37.5	Vert 100
^ 2442.350M	-43.1	+28.7 +0.0	+2.3	+0.5	+107.0	+0.0 45	95.4	94.0 EUT is lying side, Y Ax	_	Vert 102
^ 2442.333M	-44.8	+28.7 +0.0	+2.3	+0.5	+107.0	+0.0 269	93.7	94.0 EUT is lying side, Z Ax	-0.3 ng on its	Vert 178
^ 2442.400M	-50.7	+28.7 +0.0	+2.3	+0.5	+107.0	+0.0 317	87.8	94.0 EUT is lyin X Axis.	-6.2	Vert 100



CKC Laboratories, Inc. Date: 6/18/2010 Time: 14:38:38 Celadon Inc. WO#: 90470 15.249 Carrier and Spurious Emissions (2400-2483.5 MHz Transmitter) Test Distance: 3 Meters Sequence#: 4 Horiz

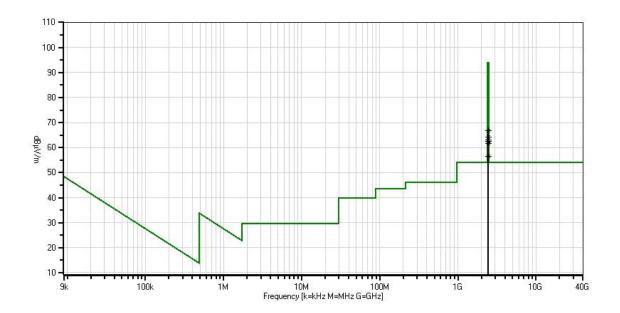

Readings

× QP Readings

▼ Ambient

O Peak Readings

* Average Readings

1 - 15.249 Carrier and Spurious Emissions (2400-2483.5 MHz Transmitter)



Test Setup Photo



Page 20 of 37 Report No.: 90470-11



Occupied Bandwidth -20dBc

Test Conditions

EUT runs on single channel at 2.44234125GHz. 100kHz RBW and 300kHz VBW.


Temperature: 21°C Relative Humidity: 42%

Atmospheric Pressure: 101.3kPa

Engineer Name: A. Brar

Test Equipment							
Equipment Serial Cal Date Cal Due Asset							
Spectrum Analyzer	US44300408	3/9/2009	3/9/2011	AN02668			
Horn Antenna	1064	1/19/2009	1/19/2011	AN02061			
Cable	HOL-HF-025-06	3/19/2010	3/19/2012	ANP05138			
Cable	26	3/2/2010	3/2/2012	ANP04241			

Test Plot

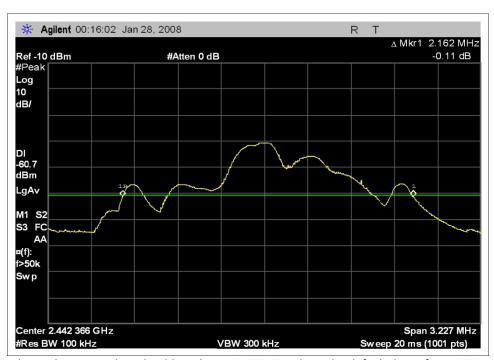

The above plot screen date should read May 24, 2010 and not the default date of Jan. 28, 2008. The plot screen capture was taken at the time of testing and cannot be changed.

Page 21 of 37 Report No.: 90470-11



Test Setup Photo





Bandedge

Test Conditions

EUT runs on single channel at 2.44234125GHz. 100kHz RBW and 300kHz VBW.


Temperature: 21°C Relative Humidity: 42%

Atmospheric Pressure: 101.3kPa

Engineer Name: A. Brar

Test Equipment							
Equipment Serial Cal Date Cal Due Asset							
Spectrum Analyzer	US44300408	3/9/2009	3/9/2011	AN02668			
Horn Antenna	1064	1/19/2009	1/19/2011	AN02061			
Cable	HOL-HF-025-06	3/19/2010	3/19/2012	ANP05138			
Cable	26	3/2/2010	3/2/2012	ANP04241			

Test Plot

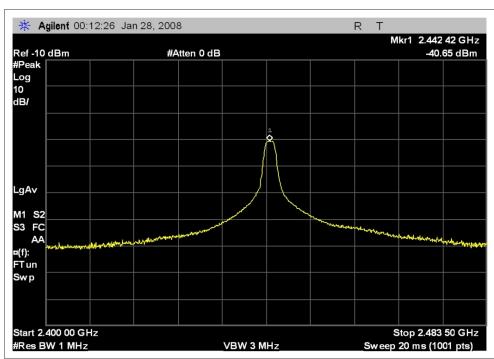

The above plot screen date should read May 24, 2010 and not the default date of Jan. 28, 2008. The plot screen capture was taken at the time of testing and cannot be changed.

Page 23 of 37 Report No.: 90470-11



Test Setup Photos



Page 24 of 37 Report No.: 90470-11



15.249(a)(d) Field Strength of Spurious and Harmonics Emissions

Test Data Sheets

Test Location: CKC Laboratories, Inc. • 1120 Fulton Place. • Fremont, CA 94539 • (510) 249-1170

Customer: Celadon Inc.

Specification: Work Order #: 90470 Date: 5/25/2010

Test Type: Radiated Scan Time: 15:51:45

Equipment: Tessonics RF Transceiver Sequence#: 34

Manufacturer: Celadon Inc. Tested By: A. Brar

Model: FG-RCV3000-TES-01

S/N: None

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
	AN02668	Spectrum Analyzer	E4446A	3/9/2009	3/9/2011
T1	ANP05299	Cable	RG214	3/6/2009	3/6/2011
T2	ANP05440	Cable		1/18/2010	1/18/2012
T3	AN00432	Loop Antenna	6502	5/18/2009	5/18/2011

Equipment Under Test (* = EUT):

1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	-):		
Function	Manufacturer	Model #	S/N
Tessonics RF Remote	Celadon Inc.	FGSK18-TES-01	None
Tessonics RF Transceiver*	Celadon Inc.	FG-RCV3000-TES-01	None

Support Devices:

Function	Manufacturer	Model #	S/N
Laptop	Dell	Latitude D620	PN PF329 A03
AC Adaptor	Dell	LA90PS0-00	CN-0DF266-71615-735-B6DB

Test Conditions / Notes:

FCC 15.249

0.09-30MHz

Both EUTs are transmitting and receiving.

FCC 15.209(c) covered by this data sheet because the 15.249 and 15.209 spurious emissions limits are equivalent.

EUT runs on single channel at 2.44234125GHz.

Temperature: 21°C Relative Humidity: 42%

Atmospheric Pressure: 101.3kPa

Page 25 of 37 Report No.: 90470-11




Ext Attn: 0 dB

Measu	rement Data:	Re	eading lis	ted by ma	argin.		Τe	est Distanc	e: 3 Meters	1	
#	Freq	Rdng	T1	T2	T3		Dist	Corr	Spec	Margin	Polar
	MHz	dΒμV	dB	dB	dB	dB	Table	$dB\muV/m$	$dB\mu V/m$	dB	Ant
1	657.370k	39.8	+0.1	+0.0	+10.1		-40.0	10.0	31.2	-21.2	Paral
							-5				250
2	548.648k	40.6	+0.1	+0.0	+9.9		-40.0	10.6	32.8	-22.2	Perpe
							-5				250
3	613.076k	39.1	+0.0	+0.0	+10.0		-40.0	9.1	31.8	-22.7	Paral
							-5				250
4	717.771k	37.4	+0.0	+0.0	+10.3		-40.0	7.7	30.5	-22.8	Perpe
	< = = 0 = = 1	27.0	0.1	0.0	10.1		-5	0.1	21.2	22.2	250
5	655.357k	37.9	+0.1	+0.0	+10.1		-40.0	8.1	31.3	-23.2	Perpe
	720 0721	26.0	.0.0	.00	. 10.2		-5	7.1	20.2	22.2	250
6	729.852k	36.8	+0.0	+0.0	+10.3		-40.0	7.1	30.3	-23.2	Perpe
7	504 05 <i>C</i> 1-	20.0	+ O O	٠, ٥, ٥	.0.0		-5	0.7	22.1	22.4	250
/	594.956k	38.8	+0.0	+0.0	+9.9		-40.0 -5	8.7	32.1	-23.4	Perpe 250
8	611.063k	38.5	+0.0	+0.0	+9.9		-40.0	8.4	31.9	-23.5	Perpe
0	011.003K	36.3	+0.0	+0.0	⊤ ∂.∂		- 4 0.0	0.4	31.9	-23.3	250
9	713.745k	36.6	+0.0	+0.0	+10.3		-40.0	6.9	30.5	-23.6	Paral
	/13./ 1 3K	30.0	10.0	10.0	110.5		- 4 0.0	0.7	30.3	-23.0	250
10	647.303k	37.6	+0.1	+0.0	+10.1		-40.0	7.8	31.4	-23.6	Perpe
10	017.505K	37.0	10.1	10.0	110.1		-5	7.0	31.1	23.0	250
11	498.314k	39.9	+0.1	+0.1	+9.9		-40.0	10.0	33.7	-23.7	Paral
							-5				250
12	54.780k	67.1	+0.0	+0.1	+10.5		-80.0	-2.3	32.8	-35.1	Paral
	Ambient						129		From Supp	ort	250
									Equipment	Only.	
13	54.780k	66.8	+0.0	+0.1	+10.5		-80.0	-2.6	32.8	-35.4	Paral
	Ambient						129		From Supp		250
									Equipment		
14		64.9	+0.0	+0.1	+10.5		-80.0	-4.5	32.8	-37.3	Perpe
	Ambient						-5		From Supp		250
1.7	27.4.0201	45.0	0.1	0.1	0.5		00.0	212	Equipment		ъ .
15	274.829k	45.8	+0.1	+0.1	+9.7		-80.0	-24.3	18.8	-43.1	Paral
1.0	274 0201	45.4	. 0.1	. 0.1	.0.7		-5	24.7	10.0	42.5	250
16	274.829k	45.4	+0.1	+0.1	+9.7		-80.0 -5	-24.7	18.8	-43.5	Perpe
17	220 2571-	12.2	ιO 1	+Ω 1	+0.8			26.7	17.0	12.7	250
17	339.257k	43.3	+0.1	+0.1	+9.8		-80.0 -5	-26.7	17.0	-43.7	Perpe 250
18	383.551k	42.1	+0.1	+0.1	+9.9		-80.0	-27.8	15.9	-43.7	Paral
10	303.331K	42.1	+0.1	+0.1	⊤ フ.フ		-80.0 -5	-21.0	13.7	-4 3./	250
19	166.107k	49.4	+0.1	+0.1	+9.8		-80.0	-20.6	23.2	-43.8	Perpe
17	100.107K	77.7	10.1	10.1	17.0		-50.0 -5	-20.0	23.2	-43.0	250
20	166.107k	49.4	+0.1	+0.1	+9.8		-80.0	-20.6	23.2	-43.8	Paral
	100.107R	17.1	. 0.1	10.1	1 7.0		-5	20.0	23.2	.5.0	250
21	486.233k	40.2	+0.0	+0.0	+9.9		-80.0	-29.9	13.9	-43.8	Paral
							-5		-2.,		250
22	482.207k	40.1	+0.0	+0.0	+9.9		-80.0	-30.0	13.9	-43.9	Perpe
1							-5				250
-											

Page 26 of 37 Report No.: 90470-11



CKC Laboratories, Inc. Date: 5/25/2010 Time: 15:51:45 Celadon Inc. WO#: 90470 15:249 Carrier and Spurious Emissions (2400-2483.5 MHz Transmitter) Test Distance: 3 Meters Sequence#: 34 Parallel

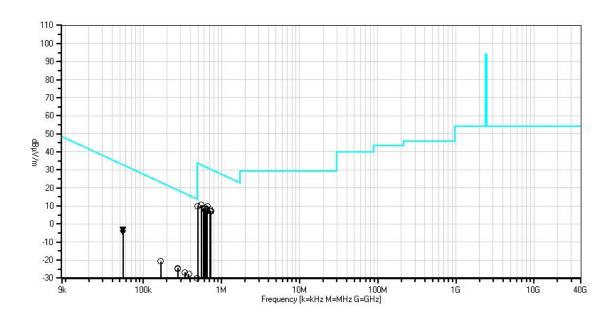

Readings

× QP Readings

▼ Ambient

O Peak Readings

* Average Readings

1 - 15,249 Carrier and Spurious Emissions (2400-2483,5 MHz Transmitter)



Test Location: CKC Laboratories, Inc. • 1120 Fulton Place. • Fremont, CA 94539 • (510) 249-1170

Customer: Celadon Inc.

Specification: 15.249 Carrier and Spurious Emissions (2400-2483.5 MHz Transmitter)

Work Order #: 90470 Date: 5/25/2010
Test Type: Maximized Emissions Time: 11:36:17
Equipment: Tessonics RF Transceiver Sequence#: 15
Manufacturer: Celadon Inc. Tested By: A. Brar

Model: FG-RCV3000-TES-01

S/N: None

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
	AN02668	Spectrum Analyzer	E4446A	3/9/2009	3/9/2011
T1	AN00730	Preamp	8447D	2/9/2009	2/9/2011
T2	AN00852	Biconilog Antenna	CBL 6111C	12/22/2008	12/22/2010
Т3	ANP05299	Cable	RG214	3/6/2009	3/6/2011
T4	ANP05300	Cable	RG214/U	3/6/2009	3/6/2011
T5	ANP05440	Cable		1/18/2010	1/18/2012

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
Tessonics RF Remote	Celadon Inc.	FGSK18-TES-01	None
Tessonics RF Transceiver*	Celadon Inc.	FG-RCV3000-TES-01	None

Support Devices:

Tr Tr Tr Tr Tr			
Function	Manufacturer	Model #	S/N
Laptop	Dell	Latitude D620	PN PF329 A03
AC Adaptor	Dell	LA90PS0-00	CN-0DF266-71615-735-B6DB

Test Conditions / Notes:

Spurious Emissions.

30-1000MHz.

The remote is transmitting and the transceiver is receiving and sending acknowledgements.

FCC 15.209(c) covered by this data sheet because the 15.249 and 15.209 spurious emissions limits are equivalent.

EUT runs on single channel at 2.44234125GHz.

Temperature: 21°C Relative Humidity: 42% Atmospheric Pressure: 101.3kPa

Ext Attn: 0 dB


Measurement Data: Reading listed by margin. Test Distance: 3 Meters											
#	Freq	Rdng	T1	T2	T3	T4	Dist	Corr	Spec	Margin	Polar
			T5								
	MHz	dΒμV	dB	dB	dB	dB	Table	$dB\muV/m$	$dB\muV/m$	dB	Ant
1	120.017M	55.5	-27.3	+11.5	+0.1	+0.5	+0.0	40.8	43.5	-2.7	Vert
	QP		+0.5				105				100
٨	120.017M	56.7	-27.3	+11.5	+0.1	+0.5	+0.0	42.0	43.5	-1.5	Vert
			+0.5				105				100
3	240.030M	56.8	-27.2	+11.8	+0.2	+0.6	+0.0	43.0	46.0	-3.0	Vert
	QP		+0.8				151				111
٨	240.030M	59.1	-27.2	+11.8	+0.2	+0.6	+0.0	45.3	46.0	-0.7	Vert
			+0.8				151				111
5	36.006M	47.4	-27.4	+16.2	+0.1	+0.3	+0.0	36.9	40.0	-3.1	Vert
	QP		+0.3				130				101

Page 28 of 37 Report No.: 90470-11



^ 36.006M	50.0	-27.4	+16.2	+0.1	+0.3	+0.0	39.5	40.0	-0.5	Vert
		+0.3				130				101
7 665.904M	44.6	-27.0	+20.0	+0.2	+0.9	+0.0	40.3	46.0	-5.7	Horiz
		+1.6				64				143
8 399.183M	49.0	-27.3	+16.0	+0.1	+0.6	+0.0	39.5	46.0	-6.5	Vert
QP		+1.1				138				100
^ 399.183M	59.1	-27.3	+16.0	+0.1	+0.6	+0.0	49.6	46.0	+3.6	Vert
		+1.1				138				100
10 398.786M	44.7	-27.3	+16.0	+0.1	+0.6	+0.0	35.2	46.0	-10.8	Horiz
QP		+1.1				64				143
^ 398.786M	53.0	-27.3	+16.0	+0.1	+0.6	+0.0	43.5	46.0	-2.5	Horiz
		+1.1				64				143

CKC Laboratories, Inc. Date: 5/25/2010 Time: 11:36:17 Celadon Inc. WO#: 90470 15.249 Carrier and Spurious Emissions (2400-2483.5 MHz Transmitter) Test Distance: 3 Meters Sequence#: 15 Horiz

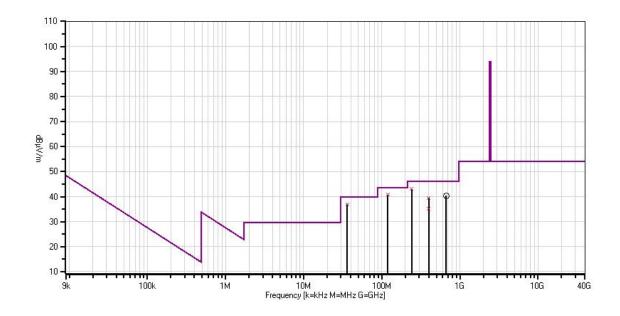

Readings QP Readings Ambient

O Peak Readings

Average Readings 1 - 15.249 Carrier and Spurious Emissions (2400-2483.5 MHz Transmitter)



Test Location: CKC Laboratories, Inc. • 1120 Fulton Place. • Fremont, CA 94539 • (510) 249-1170

Customer: Celadon Inc.

Specification: 15.249 Carrier and Spurious Emissions (2400-2483.5 MHz Transmitter)

Work Order #: 90470 Date: 6/7/2010
Test Type: Maximized Emissions Time: 10:57:41
Equipment: Tessonics RF Transceiver Sequence#: 36
Manufacturer: Celadon Inc. Tested By: A. Brar

Model: FG-RCV3000-TES-01

S/N: None

Test Equipment:

ID	Asset #	Description	Model	Calibration Date	Cal Due Date
	AN02668	Spectrum Analyzer	E4446A	3/9/2009	3/9/2011
T1	AN02061	Horn Antenna	DRG-118A	1/19/2009	1/19/2011
T2	ANP05138	Cable	FSJ1P-50A-4	3/19/2010	3/19/2012
Т3	ANP04241	Cable	FSJ1-50A	3/2/2010	3/2/2012
T4	AN03015	Cable	32022-2-29094K-24TC	2/4/2010	2/4/2012
T5	AN02812	Preamp	83017-69004	3/8/2009	3/8/2011
T6	AN03143	Cable	32022-29094K-144TC	9/10/2009	9/10/2011
T7	AN02694	Active Horn Antenna	AMFW-5F-18002650-20-10P	11/13/2008	11/13/2010

Equipment Under Test (* = EUT):

Function	Manufacturer	Model #	S/N
Tessonics RF Remote	Celadon Inc.	FGSK18-TES-01	None
Tessonics RF Transceiver*	Celadon Inc.	FG-RCV3000-TES-01	None

Support Devices:

Function	Manufacturer	Model #	S/N
Laptop	Dell	Latitude D620	PN PF329 A03
AC Adaptor	Dell	LA90PS0-00	CN-0DF266-71615-735-B6DB

Test Conditions / Notes:

Spurious Emissions.

1-25GHz.

The remote is transmitting continuously and the transceiver is receiving and sending acknowledgements.

FCC 15.209(c) covered by this data sheet because the 15.249 and 15.209 spurious emissions limits are equivalent.

EUT runs on single channel at 2.44234125GHz.

Temperature: 21°C Relative Humidity: 42%

Atmospheric Pressure: 101.3kPa

Page 30 of 37 Report No.: 90470-11




Ext Attn: 0 dB

Measu	rement Data:	Re	eading lis	ted by ma	ırgin.		Те	est Distance	e: 3 Meters	1	
#	Freq	Rdng	T1	T2	T3	T4	Dist	Corr	Spec	Margin	Polar
			T5	T6	T7						
	MHz	dΒμV	dB	dB	dB	dB	Table	$dB\muV/m$	$dB\muV/m$	dB	Ant
1	18000.000	28.2	+43.9	+7.2	+1.9	+1.2	+0.0	47.6	54.0	-6.4	Vert
	M		-34.8	+0.0	+0.0						
							100				150
2	24999.000	50.1	+0.0	+0.0	+0.0	+1.6	+0.0	43.5	54.0	-10.5	Vert
	M		+0.0	+7.2	-15.4						
							108				150
3	1920.000M	45.4	+27.4	+2.0	+0.5	+0.4	+0.0	41.7	54.0	-12.3	Vert
			-34.0	+0.0	+0.0						150
4	9209.000M	30.0	+38.1	+5.1	+1.2	+0.8	+0.0	40.0	54.0	-14.0	Vert
			-35.2	+0.0	+0.0		94				150
5	1919.900M	43.5	+27.4	+2.0	+0.5	+0.4	+0.0	39.8	54.0	-14.2	Horiz
			-34.0	+0.0	+0.0		-5				150
6	2794.000M	38.8	+29.9	+2.5	+0.6	+0.4	+0.0	38.9	54.0	-15.1	Horiz
			-33.3	+0.0	+0.0		322				150
7	6756.000M	30.0	+36.4	+4.3	+1.0	+0.7	+0.0	38.3	54.0	-15.7	Horiz
			-34.1	+0.0	+0.0		336				150
8	2794.000M	37.0	+29.9	+2.5	+0.6	+0.4	+0.0	37.1	54.0	-16.9	Vert
			-33.3	+0.0	+0.0		-4				150
9	3840.000M	34.1	+31.7	+3.0	+0.7	+0.5	+0.0	37.0	54.0	-17.0	Horiz
			-33.0	+0.0	+0.0		29				150
10	3840.000M	33.5	+31.7	+3.0	+0.7	+0.5	+0.0	36.4	54.0	-17.6	Vert
			-33.0	+0.0	+0.0						150
11	2459.000M	36.3	+28.7	+2.3	+0.5	+0.4	+0.0	34.7	94.0	-59.3	Horiz
			-33.5	+0.0	+0.0						150



CKC Laboratories, Inc. Date: 6/7/2010 Time: 10:57:41 Celadon Inc. WO#: 90470 15.249 Carrier and Spurious Emissions (2400-2483.5 MHz Transmitter) Test Distance: 3 Meters Sequence#: 36 Vert

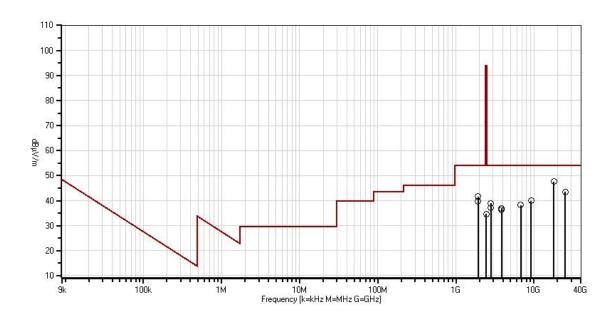

Readings
× QP Readings
▼ Ambient

O Peak Readings

* Average Readings

1 - 15.249 Carrier and Spurious Emissions (2400-2483.5 MHz Transmitter)



Test Setup Photos



Page 33 of 37 Report No.: 90470-11



RSS 210 99% Bandwidth

Test Conditions

EUT runs on single channel at 2.44234125GHz. 100kHz RBW and 300kHz VBW.


Temperature: 21°C Relative Humidity: 42%

Atmospheric Pressure: 101.3kPa

Engineer Name: A. Brar

Test Equipment									
Equipment Serial Cal Date Cal Due Asset									
Spectrum Analyzer	US44300408	3/9/2009	3/9/2011	AN02668					
Horn Antenna	1064	1/19/2009	1/19/2011	AN02061					
Cable	HOL-HF-025-06	3/19/2010	3/19/2012	ANP05138					
Cable	26	3/2/2010	3/2/2012	ANP04241					


Test Plot

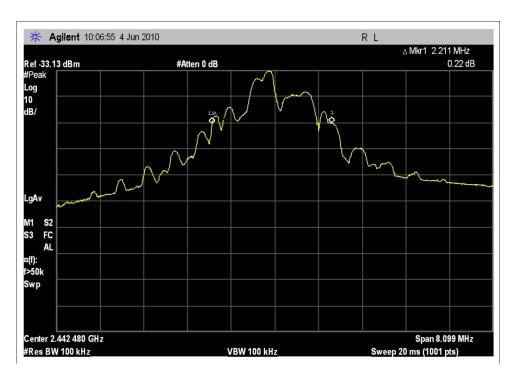

Page 34 of 37 Report No.: 90470-11



Test Setup Photos

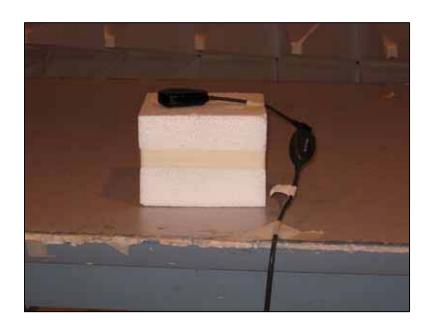

Page 35 of 37 Report No.: 90470-11



SUPPLEMENTAL INFORMATION

Measurement Uncertainty

Uncertainty Value	Parameter	
4.73 dB	Radiated Emissions	
3.34 dB	Mains Conducted Emissions	
3.30 dB	Disturbance Power	

The reported measurement uncertainties are calculated based on the worst case of all laboratory environments from CKC Laboratories, Inc. test sites. Only those parameters which require estimation of measurement uncertainty are reported. The reported worst case measurement uncertainty is less than the maximum values derived in CISPR 16-4-2. Reported uncertainties represent expanded uncertainties expressed at approximately the 95% confidence level using a coverage factor of k=2. Compliance is deemed to occur provided measurements are below the specified limits.

Emissions Test Details

TESTING PARAMETERS

The cables were routed consistent with the typical application by varying the configuration of the test sample. Interface cables were connected to the available ports of the test unit. The effect of varying the position of the cables was investigated to find the configuration that produced maximum emissions. Cables were of the type and length specified in the individual requirements. The length of cable that produced maximum emissions was selected.

The equipment under test (EUT) was set up in a manner that represented its normal use, as shown in the setup photographs. Any special conditions required for the EUT to operate normally are identified in the comments that accompany the emissions tables.

The emissions data was taken with a spectrum analyzer or receiver. Incorporating the applicable correction factors for distance, antenna, cable loss and amplifier gain, the data was reduced as shown in the table below. The corrected data was then compared to the applicable emission limits. Preliminary and final measurements were taken in order to ensure that all emissions from the EUT were found and maximized.

CORRECTION FACTORS

The basic spectrum analyzer reading was converted using correction factors as shown in the highest emissions readings in the tables. For radiated emissions in $dB\mu V/m$, the spectrum analyzer reading in $dB\mu V$ was corrected by using the following formula. This reading was then compared to the applicable specification limit.

Page 36 of 37 Report No.: 90470-11



SAMPLE CALCULATIONS				
	Meter reading	(dBμV)		
+	Antenna Factor	(dB)		
+	Cable Loss	(dB)		
-	Distance Correction	(dB)		
-	Preamplifier Gain	(dB)		
=	Corrected Reading	(dBµV/m)		

TEST INSTRUMENTATION AND ANALYZER SETTINGS

The test instrumentation and equipment listed were used to collect the emissions data. A spectrum analyzer or receiver was used for all measurements. The following table shows the measuring equipment bandwidth settings that were used in designated frequency bands. For testing emissions, an appropriate reference level and a vertical scale size of 10 dB per division were used. When conducted emissions testing was performed, a 10 dB external attenuator was used with internal offset correction in the analyzer.

MEASURING EQUIPMENT BANDWIDTH SETTINGS PER FREQUENCY RANGE					
TEST	BEGINNING FREQUENCY	ENDING FREQUENCY	BANDWIDTH SETTING		
CONDUCTED EMISSIONS	150 kHz	30 MHz	9 kHz		
RADIATED EMISSIONS	9kHz	150kHz	200Hz		
RADIATED EMISSIONS	150 kHz	30 MHz	9 kHz		
RADIATED EMISSIONS	30 MHz	1000 MHz	120 kHz		
RADIATED EMISSIONS	1000 MHz	>1 GHz	1 MHz		

SPECTRUM ANALYZER/RECEIVER DETECTOR FUNCTIONS

The notes that accompany the measurements contained in the emissions tables indicate the type of detector function used to obtain the given readings. Unless otherwise noted, all readings were made in the "Peak" mode. Whenever a "Quasi-Peak" or "Average" reading is listed as one of the highest readings, this is indicated as a "QP" or an "Ave" on the appropriate rows of the data sheets. The following paragraphs describe in more detail the detector functions and when they were used to obtain the emissions data.

Peak

In this mode, the spectrum analyzer/receiver readings recorded all emissions at their peak value as the frequency band selected was scanned. By combining this function with another feature of the measuring device called "peak hold," the measuring device had the ability to measure transients or low duty cycle transient emission peak levels. In this mode the measuring device made a slow scan across the frequency band selected and measured the peak emission value found at each frequency across the band.

Quasi-Peak

When the true peak values exceeded or were within 2 dB of the specification limit, quasi-peak measurements were taken using the quasi-peak detector.

Average

For certain frequencies, average measurements may be made using the spectrum analyzer/receiver. To make these measurements, the test engineer reduces the video bandwidth on the measuring device until the modulation of the signal is filtered out. At this point the measuring device is set into the linear mode and the scan time is reduced.

Page 37 of 37 Report No.: 90470-11