



For

# **Burg Realisation Hong Kong Limited**

Flat/Room 1002, 10/F Malaysia Building, 50 Gloucester Road, Wan Chai, Hong Kong

> FCC ID: YIABURG12 Model: Burg 12

| Report Type: Original Report |             | Product Type: Smart Watch Phone |
|------------------------------|-------------|---------------------------------|
| Prepared By                  | Ricky Wang  | P: dzy                          |
| Report Number                | R1206209-SA | R                               |
| Report Date                  | 2012-09-04  |                                 |
| Reviewed By                  |             | A 94089, USA<br>-9162           |

**Note**: This test report is prepared for the customer shown above and for the device described herein. It may not be duplicated or used in part without prior written consent from Bay Area Compliance Laboratories Corp. This report **must not** be used by the customer to claim product certification, approval, or endorsement by A2LA\* or any agency of the Federal Government.

<sup>\*</sup> This report may contain data that are not covered by the A2LA accreditation and are marked with an asterisk "\*" .....

| Summa                              | Summary of Test Results  |  |  |  |  |
|------------------------------------|--|--|--|--|--|
| Rule Part(s):                      | FCC §2.1093  |  |  |  |  |
| Test Procedure(s):                 | FCC OET Bulletin 65-C; IEEE 1528   |  |  |  |  |
| Device Type:<br>Exposure Category: | Portable Device<br>General Population/Uncontrolled Exposure  |  |  |  |  |
| Modulation:                        | GSM: GMSK<br>Bluetooth: GFSK, π/4-DQPSK, 8DPSK   |  |  |  |  |
| TX Frequency Range:                | Cellular Band: 824.2-848.8 MHz<br>PCS Band: 1850.2-1909.8 MHz<br>Bluetooth: 2402-2480 MHz  |  |  |  |  |
| Conducted RF Power:                | Cellular: 32.27 dBm<br>PCS: 30.66 dBm<br>BT: 1.85 dBm  |  |  |  |  |
| Antenna Type(s):                   | Integrated Antenna   |  |  |  |  |
| Battery Type(s):                   | DC 3.7V, 450mA   |  |  |  |  |
| Body-Worn Accessories:             | N/A  |  |  |  |  |
| Max. SAR Level(s) Measured:        | 0.169 W/Kg, 1g Head Tissue (Cellular Band)<br>0.694 W/Kg, 10g Body Tissue (Cellular Band)<br>0.193 W/Kg, 1g Head Tissue (PCS Band)<br>1.430 W/Kg, 10g Body Tissue (PCS Band) |  |  |  |  |

This wireless device has been shown to be capable of compliance for localized specific absorption rate (SAR) for General Population/Uncontrolled Exposure limits specified in ANSI/IEEE Standards and has been tested in accordance with the measurement procedures specified in FCC OET 65 Supplement C and IEEE 1528-2003.

The results and statements contained in this report pertain only to the device(s) evaluated.



**EUT Photo** 

# **TABLE OF CONTENTS**

| 1 RI               | EFERENCE, STANDARDS AND GUILDELINES                                       | 5  |
|--------------------|---|----|
| 2 EU               | JT DESCRIPTION  | 7  |
| 3 TI               | EST FACILITIES AND ACCREDITATION  | 8  |
|                    | ESCRIPTION OF TEST SYSTEM   |    |
|                    |   |    |
| 5 E(<br>5.1        | QUIPMENT LIST AND CALIBRATION   |    |
|                    | AR MEASUREMENT SYSTEM VERIFICATION  |    |
| <b>6 SA</b><br>6.1 | SYSTEM ACCURACY VERIFICATION  |    |
| 6.2                | SYSTEM ACCURACT VERIFICATION.  SYSTEM SETUP BLOCK DIAGRAM.                |    |
| 6.3                | LIQUID AND SYSTEM VALIDATION  | 21 |
| 7 EU               | JT TEST STRATEGY AND METHODOLOGY  | 22 |
| 8 DA               | ASY4 SAR EVALUATION PROCEDURE   | 26 |
| 9 RI               | FOUTPUT VERIFICATION  | 28 |
| 9.1                | TEST BLOCK DIAGRAM AND PROCEDURE  |    |
| 9.2                | TEST RESULTS  |    |
|                    | AR MEASUREMENT RESULTS  |    |
| 10.1               | SAR TEST DATA   |    |
| 11 AI              | PPENDIX A – MEASUREMENT UNCERTAINTY                                       | 33 |
| 12 AI              | PPENDIX B – PROBE CALIBRATION CERTIFICATES                                | 34 |
| 13 AI              | PPENDIX C - DIPOLE CALIBRATION CERTIFICATES                               | 45 |
| 14 AI              | PPENDIX D - TEST SYSTEM VERIFICATIONS SCANS                               | 61 |
| 15 AI              | PPENDIX E – SAR SCAN PLOTS  | 65 |
| 16 AF              | PPENDIX F – TEST SETUP PHOTOS   | 83 |
| 16.1               | POSITION A, EUT FACE TO FLAT PHANTOM WITH 1.0 CM DISTANCE ON SPEAKER MODE |    |
| 16.2               | POSITION B, EUT AND BAND TOUCH TO THE NECK AREA OF SAM PHANTOM            |    |
| 17 AI              | PPENDIX G – EUT PHOTOS  | 84 |
| 17.1               | EUT - TOP VIEW  |    |
| 17.2<br>17.3       | EUT - BOTTOM VIEWEUT - SIDE VIEW 1  |    |
| 17.3               | EUT – SIDE VIEW 1   |    |
| 17.5               | EUT - BATTERY VIEW  |    |
| 18 AF              | PPENDIX I - INFORMATIVE REFERENCES  | 87 |

# **DOCUMENT REVISION HISTORY**

| Revision Number | Report Number | Description of Revision | Date of Revision |  |
|-----------------|---------------|-------------------------|------------------|--|
| 0               | R1206209-SAR  | Original Report         | 2012-09-04       |  |

# 1 REFERENCE, STANDARDS AND GUILDELINES

### FCC:

The Report and Order requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For consumer products, the applicable limit is 1.6 mW/g as recommended by the ANSI/IEEE standard C95.1-1992 [6] for an uncontrolled environment (Paragraph 65). According to the Supplement C of OET Bulletin 65 "Evaluating Compliance with FCC Guide-lines for Human Exposure to Radio frequency Electromagnetic Fields", released on Jun 29, 2001 by the FCC, the device should be evaluated at maximum output power (radiated from the antenna) under "worst-case" conditions for normal or intended use, incorporating normal antenna operating positions, device peak performance frequencies and positions for maximum RF energy coupling.

This report describes the methodology and results of experiments performed on wireless data terminal. The objective was to determine if there is RF radiation and if radiation is found, what is the extent of radiation with respect to safety limits? SAR (Specific Absorption Rate) is the measure of RF exposure determined by the amount of RF energy absorbed by human body (or its parts) – to determine how the RF energy couples to the body or head which is a primary health concern for body worn devices. The limit below which the exposure to RF is considered safe by regulatory bodies in North America is 1.6 mW/g average over 1 gram of tissue mass.

# CE:

The CE requires routine SAR evaluation prior to equipment authorization of portable transmitter devices, including portable telephones. For consumer products, the applicable limit is 2 mW/g as recommended by the EN50360 for an uncontrolled environment. According to the Standard, the device should be evaluated at maximum output power (radiated from the antenna) under "worst-case" conditions for normal or intended use, incorporating normal antenna operating positions, device peak performance frequencies and positions for maximum RF energy coupling.

This report describes the methodology and results of experiments performed on wireless data terminal. The objective was to determine if there is RF radiation and if radiation is found, what is the extent of radiation with respect to safety limits? SAR (Specific Absorption Rate) is the measure of RF exposure determined by the amount of RF energy absorbed by human body (or its parts) – to determine how the RF energy couples to the body or head which is a primary health concern for body worn devices. The limit below which the exposure to RF is considered safe by regulatory bodies in Europe is 2 mW/g average over 10 gram of tissue mass.

The test configurations were laid out on a specially designed test fixture to ensure the reproducibility of measurements. Each configuration was scanned for SAR. Analysis of each scan was carried out to characterize the above effects in the device.

#### **SAR Limits**

# FCC Limit (1g Tissue)

|  | SAR (W/kg)   |  |  |  |
|--|--|--|--|--|
| EXPOSURE LIMITS  | (General Population /<br>Uncontrolled Exposure<br>Environment) | (Occupational /<br>Controlled Exposure<br>Environment) |  |  |
| Spatial Average (averaged over the whole body)                   | 0.08   | 0.4  |  |  |
| Spatial Peak (averaged over any 1 g of tissue)                   | 1.60   | 8.0  |  |  |
| Spatial Peak<br>(hands/wrists/feet/ankles<br>averaged over 10 g) | 4.0  | 20.0   |  |  |

# CE Limit (10g Tissue)

|  | SAR (W/kg)   |  |  |  |
|--|--|--|--|--|
| EXPOSURE LIMITS  | (General Population /<br>Uncontrolled Exposure<br>Environment) | (Occupational /<br>Controlled Exposure<br>Environment) |  |  |
| Spatial Average (averaged over the whole body)             | 0.08   | 0.4  |  |  |
| Spatial Peak (averaged over any 1 g of tissue)             | 2.0  | 10   |  |  |
| Spatial Peak (hands/wrists/feet/ankles averaged over 10 g) | 4.0  | 20.0   |  |  |

Population/Uncontrolled Environments are defined as locations where there is the exposure of individual who have no knowledge or control of their exposure.

Occupational/Controlled Environments are defined as locations where there is exposure that may be incurred by people who are aware of the potential for exposure (i.e. as a result of employment or occupation).

# 2 EUT DESCRIPTION

This measurement and test report has been compiled on behalf of *Burg Realisation Hong Kong Limited* and their product, FCC ID: YIABURG12, model: Burg 12, which will henceforth in this report be referred to as the EUT. The EUT is a Smart Watch Phone that operates in the GSM850 and PCS1900 band with Bluetooth functionality.

# **EUT Technical Specification**

| Item                | Description   |
|---------------------|---|
| Modulation:         | GSM: GMSK<br>Bluetooth: GFSK, π/4-DQPSK, 8DPSK  |
| Frequency Range:    | Cellular Band: 824.2-848.8 MHz<br>PCS Band: 1850.2-1909.8 MHz<br>Bluetooth: 2402-2480 MHz |
| Output Power:       | Cellular: 32.27 dBm<br>PCS: 30.66 dBm<br>Bluetooth: 1.85 dBm                              |
| Dimensions (L*W*H): | 50mm (L) × 42mm (W) × 15mm (H)  |
| Power Source:       | DC 3.7, 450mA   |
| Weight:             | 58 g  |
| Normal Operation:   | Speaker and Wrist-worn  |

<sup>\*</sup>The data gathered are from a typical production sample provided by the manufacturer, serial number: R1206209 assigned by BACL.

### 3 TEST FACILITIES AND ACCREDITATION

The test site used by BACL Corp. to collect radiated and conducted emissions measurement data is located at its facility in Sunnyvale, California, USA.

The test site at BACL Corp. has been fully described in reports submitted to the Federal Communication Commission (FCC) and Voluntary Control Council for Interference (VCCI). The details of these reports have been found to be in compliance with the requirements of Section 2.948 of the FCC Rules on February 11 and December 10, 1997, and Article 8 of the VCCI regulations on December 25, 1997. The test site also complies with the test methods and procedures set forth in CISPR 22:2008 §10.4 for measurements below 1 GHz and §10.6 for measurements above 1 GHz as well as ANSI C63.4-2003, ANSI C63.4-2009, TIA/EIA-603 & CISPR 24:2010.

The Federal Communications Commission and Voluntary Control Council for Interference have the reports on file and they are listed under FCC registration number: 90464 and VCCI Registration No.: R-3729, C-4176, G-469, and T-1206. The test site has been approved by the FCC and VCCI for public use and is listed in the FCC Public Access Link (PAL) database.

Additionally, BACL Corp. is an American Association for laboratory Accreditation (A2LA) accredited laboratory (Lab Code 3297-02). The current scope of accreditations can be found at

http://www.a2la.org/scopepdf/3297-02.pdf?CFID=1132286&CFTOKEN=e42a3240dac3f6ba-6DE17DCB-1851-9E57-477422F667031258&jsessionid=8430d44f1f47cf2996124343c704b367816b

# 4 DESCRIPTION OF TEST SYSTEM

These measurements were performed with the automated near-field scanning system DASY4 from Schmid & Partner Engineering AG (SPEAG), which is the fourth generation of the system shown in the figure hereinafter:



The system is based on a high precision robot (working range greater than 0.9m), which positions the probes with a positional repeatability of better than  $\pm 0.02mm$ . Special E- and H-field probes have been developed for measurements close to material discontinuity, the sensors of which are directly loaded with a Schottky diode and connected via highly resistive lines to the data acquisition unit.

The SAR measurements were conducted with the dosimetric probe ET3DV6 SN: 1604 (manufactured by SPEAG), designed in the classical triangular configuration and optimized for dosimetric evaluation. The probe has been calibrated according to the procedure with accuracy of better than  $\pm 10\%$ . The spherical isotropy was evaluated with the procedure and found to be better than  $\pm 0.25$ dB.


The phantom used was "the Generic Twin Phantom". The ear was simulated as a spacer of 4 mm thickness between the earpiece of the phone and the tissue simulating liquid. The Tissue simulation liquid used for each test is in according with the FCC OET65 supplement C as listed below.

| Ingredients         | Frequency (MHz) |       |       |      |       |       |       |      |      |      |
|---------------------|-----------------|-------|-------|------|-------|-------|-------|------|------|------|
| (% by weight)       | 450             |       | 835   |      | 915   |       | 1900  |      | 2450 |      |
| Tissue Type         | Head            | Body  | Head  | Body | Head  | Body  | Head  | Body | Head | Body |
| Water               | 38.56           | 51.16 | 41.45 | 52.4 | 41.05 | 56.0  | 54.9  | 40.4 | 62.7 | 73.2 |
| Salt (NaCl)         | 3.95            | 1.49  | 1.45  | 1.4  | 1.35  | 0.76  | 0.18  | 0.5  | 0.5  | 0.04 |
| Sugar               | 56.32           | 46.78 | 56.0  | 45.0 | 56.5  | 41.76 | 0.0   | 58.0 | 0.0  | 0.0  |
| HEC                 | 0.98            | 0.52  | 1.0   | 1.0  | 1.0   | 1.21  | 0.0   | 1.0  | 0.0  | 0.0  |
| Bactericide         | 0.19            | 0.05  | 0.1   | 0.1  | 0.1   | 0.27  | 0.0   | 0.1  | 0.0  | 0.0  |
| Triton x-100        | 0.0             | 0.0   | 0.0   | 0.0  | 0.0   | 0.0   | 0.0   | 0.0  | 36.8 | 0.0  |
| DGBE                | 0.0             | 0.0   | 0.0   | 0.0  | 0.0   | 0.0   | 44.92 | 0.0  | 0.0  | 26.7 |
| Dielectric Constant | 43.42           | 58.0  | 42.54 | 56.1 | 42.0  | 56.8  | 39.9  | 54.0 | 39.8 | 52.5 |
| Conductivity (S/m)  | 0.85            | 0.83  | 0.91  | 0.95 | 1.0   | 1.07  | 1.42  | 1.45 | 1.88 | 1.78 |

**IEEE SCC-34/SC-2 P1528 Recommended Tissue Dielectric Parameters** 

| Frequency | Head 7 | Γissue   | Body | Tissue  |
|-----------|--------|----------|------|---------|
| (MHz)     | εr     | O' (S/m) | εr   | O (S/m) |
| 150       | 52.3   | 0.76     | 61.9 | 0.80    |
| 300       | 45.3   | 0.87     | 58.2 | 0.92    |
| 450       | 43.5   | 0.87     | 56.7 | 0.94    |
| 835       | 41.5   | 0.90     | 55.2 | 0.97    |
| 900       | 41.5   | 0.97     | 55.0 | 1.05    |
| 915       | 41.5   | 0.98     | 55.0 | 1.06    |
| 1450      | 40.5   | 1.20     | 54.0 | 1.30    |
| 1610      | 40.3   | 1.29     | 53.8 | 1.40    |
| 1800-2000 | 40.0   | 1.40     | 53.3 | 1.52    |
| 2450      | 39.2   | 1.80     | 52.7 | 1.95    |
| 3000      | 38.5   | 2.40     | 52.0 | 2.73    |
| 5800      | 35.3   | 5.27     | 48.2 | 6.00    |

#### **Measurement System Diagram**

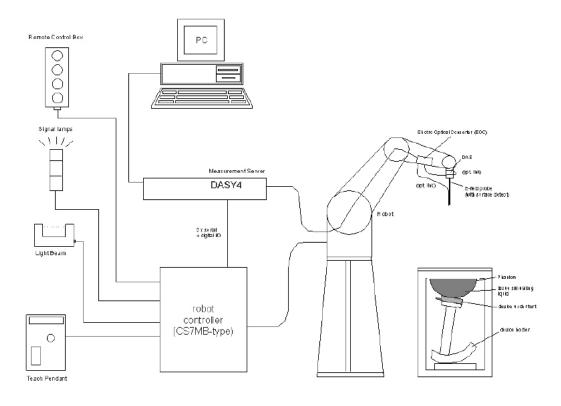

The DASY4 system for performing compliance tests consists of the following items:

- A standard high precision 6-axis robot (Stäubli RX family) with controller, teach pendant and software. An arm extension for accommodating the data acquisition electronics (DAE).
- A dosimetric probe, i.e., an isotropic E-field probe optimized and calibrated for usage in tissue simulating liquid. The probe is equipped with an optical surface detector system.
- A data acquisition electronics (DAE) which performs the signal amplification, signal multiplexing, AD-conversion, offset measurements, mechanical surface detection, collision detection, etc. The unit is battery powered with standard or rechargeable batteries. The signal is optically transmitted to the EOC.
- The Electro-optical converter (EOC) performs the conversion between optical and electrical of the signals for the digital communication to the DAE and for the analog signal from the optical surface detection. The EOC is connected to the measurement server.
- The function of the measurement server is to perform the time critical tasks such as signal filtering, control of the robot operation and fast movement interrupts.
- A probe alignment unit which improves the (absolute) accuracy of the probe positioning.
- A computer operating Windows 2000 or Windows XP.

- DASY4 software
- Remote control with teach pendant and additional circuitry for robot safety such as warning lamps, etc.
- The SAM twin phantom enabling testing left-hand and right-hand usage.
- The device holder for handheld mobile phones.
- Tissue simulating liquid mixed according to the given recipes.
- Validation dipole kits allowing system validation.

#### **System Components**

- DASY4 Measurement Server
- Data Acquisition Electronics
- Probes
- Light Beam Unit
- SAM Twin Phantom
- Device Holder for SAM Twin Phantom
- System Validation Kits
- Robot

#### **DASY4 Measurement Server**

The DASY4 measurement server is based on a PC/104 CPU board with a 166MHz low-power Pentium, 32MB chip disk and 64MB RAM. The necessary circuits for communication with either the DAE4 (or DAE3) electronic box as well as the 16-bit AD-converter system for optical detection and digital I/O interface are contained on the DASY4 I/O-board, which is directly connected to the PC/104 bus of the CPU board



The measurement server performs all real-time data evaluation for field measurements and surface detection, controls robot movements and handles safety operation. The PC-operating system cannot interfere with these time critical processes. All connections are supervised by a watchdog, and disconnection of any of the cables to the measurement server will automatically disarm the robot and disable all program-controlled robot movements. Furthermore, the measurement server is equipped with two expansion slots which are reserved for future applications. Please note that the expansion slots do not have a standardized pin out and therefore only the expansion cards provided by SPEAG can be inserted. Expansion cards from any other supplier could seriously damage the measurement server.

# **Data Acquisition Electronics**

The data acquisition electronics DAE3 consists of a highly sensitive electrometer grade preamplifier with auto-zeroing, a channel and gain-switching multiplexer, a fast 16 bit AD-converter and a command decoder and control logic unit. Transmission to the measurement server is accomplished through an optical downlink for data and status information as well as an optical uplink for commands and the clock.



#### **Probes**

The DASY system can support many different probe types.

**Dosimetric Probes:** These probes are specially designed and calibrated for use in liquids with high permittivities. They should not be used in air, since the spherical isotropy in air is poor (±2 dB). The dosimetric probes have special calibrations in various liquids at different frequencies.

**Free Space Probes:** These are electric and magnetic field probes specially designed for measurements in free space. The z-sensor is aligned to the probe axis and the rotation angle of the x-sensor is specified. This allows the DASY system to automatically align the probe to the measurement grid for field component measurement. The free space probes are generally not calibrated in liquid. (The H-field probes can be used in liquids without any change of parameters.)

**Temperature Probes:** Small and sensitive temperature probes for general use. They use a completely different parameter set and different evaluation procedures. Temperature rise features allow direct SAR evaluations with these probes.

#### ET3DV6 Probe Specification

Construction Symmetrical design with triangular core Built-in optical fiber for surface detection System Built-in shielding against static charges Calibration In air from 10 MHz to 2.5 GHz In brain and muscle simulating tissue at Frequencies of 450 MHz, 900 MHz and 1.8 GHz (accuracy ± 8%)

Frequency 10 MHz to > 6 GHz; Linearity: + 0.2 dB

Frequency 10 MHz to > 6 GHz; Linearity: ± 0.2 dB (30 MHz to 3 GHz)

Directivity  $\pm$  0.2 dB in brain tissue (rotation around probe axis)

 $\pm$  0.4 dB in brain tissue (rotation normal probe axis)


Dynamic 5 mW/g to > 100 mW/g;

Range Linearity:  $\pm 0.2 \text{ dB}$ 

Surface  $\pm$  0.2 mm repeatability in air and clear liquids

Detection over diffuse reflecting surfaces. Dimensions Overall length: 330 mm

Tip length: 16 mm




Distance from probe tip to dipole centers: 2.7 mm Application General dosimetric up to 3 GHz


Compliance tests of mobile phones

Fast automatic scanning in arbitrary phantoms

The SAR measurements were conducted with the dosimetric probe ET3DV6 designed in the classical triangular configuration and optimized for dosimetric evaluation. The probe is constructed using the thick film technique; with printed resistive lines on ceramic substrates. The probe is equipped with an optical multi-fiber line ending at the front of the probe tip. It is connected to the EOC box on the robot arm and provides an automatic detection of the phantom surface. Half of the fibers are connected to a pulsed infrared transmitter, the other half to a synchronized receiver. As the probe approaches the surface, the reflection from the surface produces a coupling from the transmitting to the receiving fibers. This reflection increases first during the approach, reaches maximum and then decreases. If the probe is flatly touching the surface, the coupling is zero. The distance of the coupling maximum to the surface is independent of the surface reflectivity and largely independent of the surface to probe angle. The DASY3 software reads the reflection during a software approach and looks for the maximum using a 2nd order fitting. The approach is stopped when reaching the maximum.



Photograph of the probe

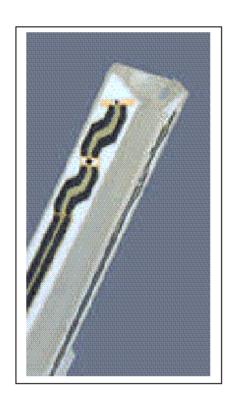

Inside view of ET3DV6 E-field Probe

#### **E-Field Probe Calibration Process**

Each probe is calibrated according to a dosimetric assessment procedure described in [6] with accuracy better than +/- 10%. The spherical isotropy was evaluated with the procedure described in [7] and found to be better than +/-0.25dB. The sensitivity parameters (NormX, NormY, NormZ), the diode compression parameter (DCP) and the conversion factor (ConvF) of the probe are tested.

The free space E-field from amplified probe outputs is determined in a test chamber. This is performed in a TEM cell for frequencies bellow 1 GHz, and in a waveguide above 1 GHz for free space. For the free space calibration, the probe is placed in the volumetric center of the cavity and at the proper orientation with the field. The probe is then rotated 360 degrees.

E-field temperature correlation calibration is performed in a flat phantom filled with the appropriate simulated brain tissue. The measured free space E-field in the medium correlates to temperature rise in dielectric medium. For temperature correlation calibration a RF transparent thermistor-based temperature probe is used in conjunction with the E-field probe.

#### **Data Evaluation**

The DASY4 Post processing software (SEMCAD) automatically executes the following procedures to calculate the field units from the microvolt readings at the probe connector. The parameters used in the evaluation are stored in the configuration modules of the software:

Probe parameters: - Sensitivity Normi, ai0, ai1, ai2

Conversion factor ConvFiDiode compression point dcpi

Device parameters: - Frequency f

- Crest factor cf

Media parameters: - Conductivity σ

- Density ρ

These parameters must be set correctly in the software. They can be found in the component documents or they can be imported into the software from the configuration files issued for the DASY components. In the direct measuring mode of the multimeter option, the parameters of the actual system setup are used. In the scan visualization and export modes, the parameters stored in the corresponding document files are used.

The first step of the evaluation is a linearization of the filtered input signal to account for the compression characteristics of the detector diode. The compensation depends on the input signal, the diode type and the DC-transmission factor from the diode to the evaluation electronics. If the exciting field is pulsed, the crest factor of the signal must be known to correctly compensate for peak power. The formula for each channel can be given as:

$$V_i = U_i + U_i^2 \cdot \frac{cf}{dcp_i}$$

With Vi = compensated signal of channel i (i = x, y, z)

Ui = input signal of channel i (i = x, y, z)

cf = crest factor of exciting field (DASY parameter)

dcp<sub>i</sub> = diode compression point (DASY parameter)

From the compensated input signals the primary field data for each channel can be evaluated:

E – field  
probes : 
$$E_i = \sqrt{\frac{V_i}{Norm_i \cdot ConvF}}$$

H – field  
probes : 
$$H_i = \sqrt{V_i} \cdot \frac{a_{i0} + a_{i1}f + a_{i2}f^2}{f}$$

With Vi = compensated signal of channel i (i = x, y, z)

 $Norm_i = sensor sensitivity of channel i (i = x, y, z)$ 

 $\mu V/(V/m)^2$  for E-field probes

ConF = sensitivity enhancement in solution

a<sub>ij</sub> = sensor sensitivity factors for H-field probes

f = carrier frequency [GHz]

Ei = electric field strenggy of channel i in V/m H<sub>i</sub> = diode compression point (DASY parameter)

The RSS value of the field components gives the total field strength (Hermitian magnitude):

$$E_{tot} = \sqrt{E_x^2 + E_y^2 + E_z^2}$$

The primary field data are used to calculate the derived field units.

$$SAR = E_{tot}^2 \cdot \frac{\sigma}{\rho \cdot 1'000}$$

With

SAR = local specific absorption rate in mW/g

Etot = total field strength in V/m

 $\sigma$  = conductivity in [mho/meter] or [Siemens/meter]

 $\rho$  = equivalent tissue density in g/cm<sup>3</sup>

Note that the density is normally set to 1, to account for actual brain density rather than the density of the simulation liquid.

#### **Light Beam Unit**

The light beam switch allows automatic "tooling" of the probe. During the process, the actual position of the probe tip with respect to the robot arm is measured, as well as the probe length and the horizontal probe offset. The software then corrects all movements, so that the robot coordinates are valid for the probe tip. The repeatability of this process is better than 0.1 mm. If a position has been taught with an aligned probe, the same position will be reached with another aligned probe within 0.1 mm, even if the other probe has different dimensions. During probe rotations, the probe tip will keep its actual position.

#### Medium

#### **Parameters**

The parameters of the tissue simulating liquid strongly influence the SAR in the liquid. The parameters for the different frequencies are defined in the corresponding compliance standards (e.g., EN 50361, IEEE 1528-2003).

#### Parameter measurements

Several measurement systems are available for measuring the dielectric parameters of liquids:

- The open coax test method (e.g., HP85070 dielectric probe kit) is easy to use, but has only moderate accuracy. It is calibrated with open, short, and deionized water and the calibrations a critical process.
- The transmission line method (e.g., model 1500T from DAMASKOS, INC.) measures the transmission and reflection in a liquid filled high precision line. It needs standard two port calibration and is probably more accurate than the open coax method.
- The reflection line method measures the reflection in a liquid filled shorted precision lined. The method is not suitable for these liquids because of its low sensitivity.
- The slotted line method scans the field magnitude and phase along a liquid filled line. The evaluation is straight forward and only needs a simple response calibration. The method is very accurate, but can only be used in high loss liquids and at frequencies above 100 to 200MHz. Cleaning the line can be tedious.

#### **SAM Twin Phantom**

The SAM twin phantom is a fiberglass shell phantom with 2mm shell thickness (except the ear region where shell thickness increases to 6mm). It has three measurement areas:

- Left hand
- Right hand
- Flat phantom

The phantom table comes in two sizes: A  $100 \times 50 \times 85$  cm (L x W x H) table for use with free standing robots (DASY4 professional system option) or as a second phantom and a  $100 \times 75 \times 85$  cm(L x W x H) table with reinforcements for table mounted robots (DASY4 compact system option).



The bottom plate contains three pair of bolts for locking the device holder. The device holder positions are adjusted to the standard measurement positions in the three sections. Only one device holder is necessary if two phantoms are used (e.g., for different liquids) A white cover is provided to tap the phantom during o\_-periods to prevent water evaporation and changes in the liquid parameters. Free space scans of devices on the cover are possible. On the phantom top, three reference markers are provided to identify the phantom position with respect to the robot.

The phantom can be used with the following tissue simulating liquids:

- Water-sugar based liquids can be left permanently in the phantom. Always cover the liquid if the system is not used, otherwise the parameters will change due to water evaporation.
- Glycol based liquids should be used with care. As glycol is a softener for most plastics, the liquid should be taken out of the phantom and the phantom should be dried when the system is not used (desirable at least once a week).
- Do not use other organic solvents without previously testing the phantom's compatibility.

#### **Device Holder for SAM Twin Phantom**

The SAR in the phantom is approximately inversely proportional to the square of the distance between the source and the liquid surface. For a source in 5mm distance, a positioning uncertainty of  $\pm 0.5$ mm would produce a SAR uncertainty of  $\pm 20\%$ . An accurate device positioning is therefore crucial for accurate and repeatable measurements. The positions, in which the devices must be measured, are defined by the standards.

The DASY device holder is designed to cope with different positions given in the standard. It has two scales for the device rotation (with respect to the body axis) and the device inclination (with respect to the line between the ear reference points). The rotation center for both scales is the ear reference point ERP). Thus the device needs no repositioning when changing the angles.





The DASY device holder has been made out of low-loss POM material having the following dielectric parameters: relative permittivity "=3 and loss tangent \_=0.02. The amount of dielectric material has been reduced in the closest vicinity of the device, since measurements have suggested that the influence of the clamp on the test results could thus be lowered.

# **System Validation Kits**

Each DASY system is equipped with one or more system validation kits. These units, together with the predefined measurement procedures within the DASY software, enable the user to conduct the system performance check and system validation. For that purpose a well defined SAR distribution in the flat section of the SAM twin phantom is produced.

System validation kit includes a dipole, tripod holder to fix it underneath the flat phantom and a corresponding distance holder. Dipoles are available for the variety of frequencies between 300 MHz and 6 GHz (dipoles for other frequencies or media and other calibration conditions are available upon request).

The dipoles are highly symmetric and matched at the center frequency for the specified liquid and distance to the flat phantom (or flat section of the SAM-twin phantom). The accurate distance between the liquid surface and the dipole center is achieved with a distance holder that snaps on the dipole.

#### Robot

The DASY4 system uses the high precision industrial robots RX60L, RX90 and RX90L, as well as the RX60BL and RX90BL types out of the newer series from Stäubli SA (France). The RX robot series offers many features that are important for our application:

- High precision (repeatability 0.02mm)
- High reliability (industrial design)
- Low maintenance costs (virtually maintenance-free due to direct drive gears; no belt drives)
- Jerk-free straight movements (brushless synchronous motors; no stepper motors)
- Low ELF interference (the closed metallic construction shields against motor control fields)

For the newly delivered DASY4 systems as well as for the older DASY3 systems delivered since 1999, the CS7MB robot controller version from Stäubli is used. Previously delivered systems have either a CS7 or CS7M controller; the differences to the CS7MB are mainly in the hardware, but some procedures in the robot software from Stäubli are also not completely the same. The following descriptions about robot hard- and software correspond to CS7MB controller with software version 13.1 (edit S5). The actual commands, procedures and configurations, also including details in hardware, might differ if an older robot controller is in use. In this case please also refer to the Stäubli manuals for further information.



# 5 EQUIPMENT LIST AND CALIBRATION

# **5.1** Equipments List & Calibration Info


| Type/Model  | Calibration<br>Due Date | S/N:            |
|---|-------------------------|-----------------|
| DASY4 Professional Dissymmetric System              | N/A                     | N/A             |
| Robot RX60L   | N/A                     | CS7MBSP / 467   |
| Robot Controller                                    | N/A                     | F01/5J72A1/A/01 |
| Dell Computer Dimension 3000                        | N/A                     | N/A             |
| SPEAG EDC3  | N/A                     | N/A             |
| SPEAG DAE3  | 2012-12-07              | 456             |
| DASY4 Measurement Server                            | N/A                     | 1176            |
| Schmid & Partner ES3DV2                             | 2012-08-25              | 3019            |
| Antenna, Dipole, ALS-D-835-S-2                      | 2012-10-25              | 180-00564       |
| Antenna, Dipole, ALS-D-1900-S-2                     | 2012-10-25              | 210-00715       |
| Brain Equivalent Matter (835 MHz)                   | Each Time               | N/A             |
| Muscle Equivalent Matter (835 MHz)                  | Each Time               | N/A             |
| Brain Equivalent Matter (1900 MHz)                  | Each Time               | N/A             |
| Muscle Equivalent Matter (1900 MHz)                 | Each Time               | N/A             |
| Agilent, Spectrum Analyzer E4440A                   | 2013-05-09              | MY44303352      |
| Microwave Amp. 8349A                                | N/A                     | 2644A02662      |
| Power Meter Agilent E4419B                          | 2013-05-09              | MY4121511       |
| Agilent 8960 (E5515C) Wireless Communication Tester | 2014-06-28              | GB44051221      |
| Dielectric Probe Kit HP85070A                       | N/A                     | US99360201      |
| Amplifier, ST181-20                                 | N/A                     | E012-0101       |
| Antenna, Horn DRH-118                               | N/A                     | A052704         |

# 6 SAR MEASUREMENT SYSTEM VERIFICATION

# 6.1 System Accuracy Verification

Prior to the assessment, the system validation kit was used to test whether the system was operating within its specifications of  $\pm 10\%$ . The validation results are tabulated below. And also the corresponding SAR plot is attached as well in the SAR plots files.

# 6.2 System Setup Block Diagram

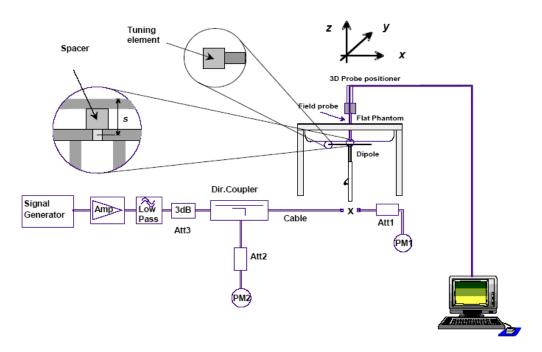

# 6.3 Liquid and System Validation

| Measured<br>Date | Simulant            | Freq.<br>[MHz] | Parameters | Liquid<br>Temp<br>[°C] | Target<br>Value | Measured<br>Value | Deviation [%] | Limits [%] |
|------------------|---------------------|----------------|------------|------------------------|-----------------|-------------------|---------------|------------|
|                  |                     |                | ερ         | 21                     | 55.2            | 55.9              | 1.27          | ±5         |
| 2012-07-19       | Body                | 835            | σ          | 21                     | 0.97            | 0.96              | -1.03         | ±5         |
|                  |                     |                | 10g SAR    | 21                     | 6.006           | 6.18              | 2.90          | ±10        |
|                  | 2012-07-19 Head 835 |                | ερ         | 21                     | 41.5            | 41.5              | 0.00          | ±5         |
| 2012-07-19       |                     | 835            | σ          | 21                     | 0.90            | 0.89              | -1.11         | ±5         |
|                  |                     |                | 1g SAR     | 21                     | 9.59            | 9.70              | 1.15          | ±10        |
|                  |                     |                | ερ         | 21                     | 53.3            | 52.4              | -1.69         | ±5         |
| 2012-07-19       | Body                | 1900           | σ          | 21                     | 1.52            | 1.5               | -1.32         | ±5         |
|                  |                     |                | 10g SAR    | 21                     | 19.668          | 19.12             | -2.79         | ±10        |
|                  |                     | ερ             | 21         | 40                     | 39.9            | -0.25             | ±5            |            |
| 2012-07-19       | Head                | 1900           | σ          | 21                     | 1.4             | 1.38              | -1.43         | ±5         |
|                  |                     |                | 1g SAR     | 21                     | 39.378          | 39.8              | 1.07          | ±10        |


 $\varepsilon r = relative \ permittivity, \ \sigma = conductivity \ and \ \rho = 1000 \ kg/m3$ 


### 7 EUT TEST STRATEGY AND METHODOLOGY

### Test Positions for Device Operating Next to a Person's Ear

This category includes most wireless handsets with fixed, retractable or internal antennas located toward the top half of the device, with or without a foldout, sliding or similar keypad cover. The handset should have its earpiece located within the upper ¼ of the device, either along the centerline or off-centered, as perceived by its users. This type of handset should be positioned in a normal operating position with the "test device reference point" located along the "vertical centerline" on the front of the device aligned to the "ear reference point". The "test device reference point" should be located at the same level as the center of the earpiece region. The "vertical centerline" should bisect the front surface of the handset at its top and bottom edges. An "ear reference point" is located on the outer surface of the head phantom on each ear spacer. It is located 1.5 cm above the center of the ear canal entrance in the "phantom reference plane" defined by the three lines joining the center of each "ear reference point" (left and right) and the tip of the mouth.

A handset should be initially positioned with the earpiece region pressed against the ear spacer of a head phantom. For the SCC-34/SC-2 head phantom, the device should be positioned parallel to the "N-F" line defined along the base of the ear spacer that contains the "ear reference point". For interim head phantoms, the device should be positioned parallel to the cheek for maximum RF energy coupling. The "test device reference point" is aligned to the "ear reference point" on the head phantom and the "vertical centerline" is aligned to the "phantom reference plane". This is called the "initial ear position". While maintaining these three alignments, the body of the handset is gradually adjusted to each of the following positions for evaluating SAR:





#### **Cheek/Touch Position**


The device is brought toward the mouth of the head phantom by pivoting against the "ear reference point" or along the "N-F" line for the SCC-34/SC-2 head phantom.

This test position is established:

- When any point on the display, keypad or mouthpiece portions of the handset is in contact with the phantom.
- o (or) When any portion of a foldout, sliding or similar keypad cover opened to its intended self-adjusting normal use position is in contact with the cheek or mouth of the phantom.

For existing head phantoms – when the handset loses contact with the phantom at the pivoting point, rotation should continue until the device touches the cheek of the phantom or breaks its last contact from the ear spacer.

# **Cheek /Touch Position**

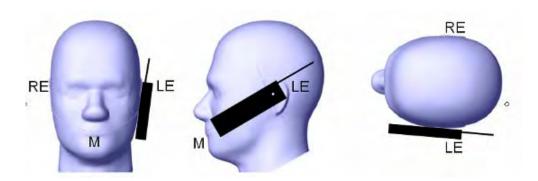

#### **Ear/Tilt Position**


With the handset aligned in the "Cheek/Touch Position":

- 1) If the earpiece of the handset is not in full contact with the phantom's ear spacer (in the "Cheek/Touch position") and the peak SAR location for the "Cheek/Touch" position is located at the ear spacer region or corresponds to the earpiece region of the handset, the device should be returned to the "initial ear position" by rotating it away from the mouth until the earpiece is in full contact with the ear spacer.
- 2) (otherwise) The handset should be moved (translated) away from the cheek perpendicular to the line passes through both "ear reference points" (note: one of these ear reference points may not physically exist on a split head model) for approximate 2-3 cm. While it is in this position, the device handset is tilted away from the mouth with respect to the "test device reference point" until the inside angle between the vertical centerline on the front surface of the phone and the horizontal line passing through the ear reference point isby 15 80°. After the tilt, it is then moved (translated) back toward the head perpendicular to the line passes through both "ear reference points" until the device touches the phantom or the ear spacer. If the antenna touches the head first, the positioning process should be repeated with a tilt angle less than 15° so that the device and its antenna would touch the phantom simultaneously. This test position may require a device holder or positioner to achieve the translation and tilting with acceptable positioning repeatability.

If a device is also designed to transmit with its keypad cover closed for operating in the head position, such positions should also be considered in the SAR evaluation. The device should be tested on the left and right side of the head phantom in the "Cheek/Touch" and "Ear/Tilt" positions. When applicable, each configuration should be tested with the antenna in its fully extended and fully retracted positions. These test configurations should be tested at the high, middle and low frequency channels of each operating mode; for example, AMPS, CDMA, and TDMA. If the SAR measured at the middle channel for each test configuration (left, right, Cheek/Touch, Tile/Ear, extended and retracted) is at least 2.0 dB lower than the SAR limit, testing at the high

and low channels is optional for such test configuration(s). If the transmission band of the test device is less than 10 MHz, testing at the high and low frequency channels is optional.


#### Ear /Tilt 15° Position

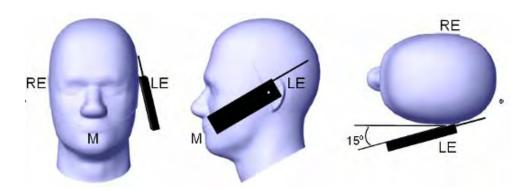

#### Test positions for body-worn and other configurations

Body-worn operating configurations should be tested with the belt-clips and holsters attached to the device and positioned against a flat phantom in normal use configurations. Devices with a headset output should be tested with a headset connected to the device. When multiple accessories that do not contain metallic components are supplied with the device, the device may be tested with only the accessory that dictates the closest spacing to the body. When multiple accessories that contain metallic components are supplied with the device, the device must be tested with each accessory that contains a unique metallic component. If multiple accessories share an identical metallic component (e.g., the same metallic belt-clip used with different holsters with no other metallic components), only the accessory that dictates the closest spacing to the body must be tested.

Body-worn accessories may not always be supplied or available as options for some devices that are intended to be authorized for body-worn use. A separation distance of 1.5 cm between the back of the device and a flat phantom is recommended for testing body-worn SAR compliance under such circumstances. Other separation distances may be used, but they should not exceed 2.5 cm. In these cases, the device may use body-worn accessories that provide a separation distance greater than that tested for the device provided however that the accessory contains no metallic components.

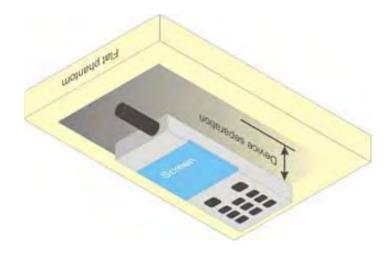

#### **SAR Evaluation Procedure**

The evaluation was performed with the following procedure:

- **Step 1:** Measurement of the SAR value at a fixed location above the ear point or central position was used as a reference value for assessing the power drop. The SAR at this point is measured at the start of the test and then again at the end of the testing.
- **Step 2:** The SAR distribution at the exposed side of the head was measured at a distance of 4 mm from the inner surface of the shell. The area covered the entire dimension of the head or EUT and the horizontal grid spacing was 15 mm x 15 mm. Based on these data, the area of the maximum absorption was determined by line interpolation. The first Area Scan covers the entire dimension of the EUT to ensure that the hotspot was correctly identified.
- **Step 3**: Around this point, a volume of 30 mm x 30 mm x 21 mm was assessed by measuring 5 x 5 x 7 points. On the basis of this data set, the spatial peak SAR value was evaluated under the following procedure:
  - 1. The data at the surface were extrapolated, since the center of the dipoles is 1.2 mm away from the tip of the probe and the distance between the surface and the lowest measuring point is 1.3 mm. The extrapolation was based on a least square algorithm. A polynomial of the fourth order was calculated through the points in z-axes. This polynomial was then used to evaluate the points between the surface and the probe tip.
  - 2. The maximum interpolated value was searched with a straightforward algorithm. Around this maximum the SAR values averaged over the spatial volumes (1 g or 10 g) were computed by the 3D-Spline interpolation algorithm. The 3D-Spline is composed of three one dimensional splines with the "Not a knot"-condition (in x, y and z-directions). The volume was integrated with the trapezoidal-algorithm. One thousand points (10 x 10 x 10) were interpolated to calculate the averages.
  - 3. All neighboring volumes were evaluated until no neighboring volume with a higher average value was found.
- **Step 4**: Re-measurement of the SAR value at the same location as in Step 1. If the value changed by more than 5%, the evaluation was repeated.

### 8 DASY4 SAR EVALUATION PROCEDURE

#### **Step 1: Power Reference Measurement**

The Power Reference Measurement and Power Drift Measurement jobs are useful jobs for monitoring the power drift of the device under test in the batch process. Both jobs measure the field at a specified reference position, at a selectable distance from the phantom surface. The reference position can be either the selected section's grid reference point or a user point in this section. The reference job projects the selected point onto the phantom surface, orients the probe perpendicularly to the surface, and approaches the surface using the selected detection method. The Minimum distance of probe sensors to surface determines the closest measurement point to phantom surface. By default, the Minimum distance of probe sensors to surface is 4mm. This distance can be modified by the user, but cannot be smaller than the Distance of sensor calibration points to probe tip as defined in the probe properties (for example, 2.7mm for an ET3DV6 probe type).


#### Step 2: Area Scan


The Area Scan is used as a fast scan in two dimensions to find the area of high field values, before doing a finer measurement around the hot spot. The sophisticated interpolation routines implemented in DASY4 software can find the maximum locations even in relatively coarse grids.

The scanning area is defined by an editable grid. This grid is anchored at the grid reference point of the selected section in the phantom. When the Area Scan's property sheet is brought-up, grid settings can be edited by a user.

When an Area Scan has measured all reachable points, it computes the field maxima found in the scanned area, within a range of the global maximum. The range (in dB) is specified in the standards for compliance testing. For example, a 2 dB range is required in IEEE 1528-2003, EN 50361 and IEC 62209 standards, whereby 3 dB is a requirement when compliance is assessed in accordance with the ARIB standard (Japan). If only one Zoom Scan follows the Area Scan, then only the absolute maximum will be taken as reference. For cases where multiple maximums are detected, the number of Zoom Scans has to be increased accordingly.

After measurement is completed, all maxima and their coordinates are listed in the Results property page. The maximum selected in the list is highlighted in the 3-D view. For the secondary maxima returned from an Area Scan, the user can specify a lower limit (peak SAR value), in addition to the Find secondary maxima within x dB condition. Only the primary maximum and any secondary maxima within x dB from the primary maximum and above this limit will be measured.





#### Step 3: Zoom Scan


Zoom Scans are used to assess the peak spatial SAR values within a cubic averaging volume containing 1 g and 10 g of simulated tissue. The default Zoom Scan measures 5 x 5 x 7 points within a cube whose base faces are centered around the maxima found in a preceding area scan job within the same procedure. When the measurement is done, the Zoom Scan evaluates the averaged SAR for 1 g and 10 g and displays these values next to the job's label.

#### **Step 4: Power drift measurement**

The Power Drift Measurement job measures the field at the same location as the most recent power reference measurement job within the same procedure, and with the same settings. The Power Drift Measurement gives the field difference in dB from the reading conducted within the last Power Reference Measurement. Several drift measurements are possible for one reference measurement. This allows a user to monitor the power drift of the device under test within a batch process. The measurement procedure is the same as Step 1.

### Step 5: Z-Scan


The Z Scan job measures points along a vertical straight line. The line runs along the Z axis of a one-dimensional grid. A user can anchor the grid to the section reference point, to any defined user point or to the current probe location. As with any other grids, the local Z axis of the anchor location establishes the Z axis of the grid.

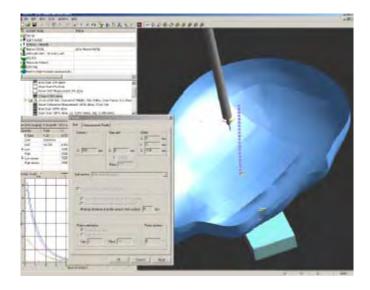

# 9 RF OUTPUT VERIFICATION

# 9.1 Test Block Diagram and Procedure

The RF output of the transmitter was connected to the input of the spectrum analyzer through sufficient attenuation and the combiner.

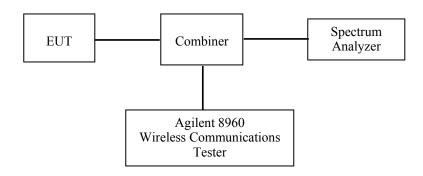

### 9.2 Test Results

| Mode      | Channel No. | Frequency | Conducted Output Power(dBm) Note 1 |        |        |        |  |
|-----------|-------------|-----------|------------------------------------|--------|--------|--------|--|
|           | Chamiei No. | (MHz)     | 1slot                              | 2slots | 3slots | 4slots |  |
|           | Channel 128 | 824.2     | 32.10                              | 31.16  | 29.31  | 28.19  |  |
| GPRS 850  | Channel 190 | 836.6     | 32.11                              | 31.25  | 29.44  | 28.37  |  |
|           | Channel 251 | 848.8     | 32.18                              | 31.26  | 29.45  | 28.35  |  |
| GPRS 1900 | Channel 512 | 1850.2    | 30.21                              | 29.72  | 28.11  | 26.88  |  |
|           | Channel 661 | 1880      | 29.90                              | 29.43  | 27.78  | 26.62  |  |
|           | Channel 810 | 1909.8    | 29.53                              | 29.21  | 27.41  | 26.30  |  |

| Mode     | Channel     | Frequency<br>(MHz) | Conducted Output Power (dBm) |
|----------|-------------|--------------------|------------------------------|
|          | Channel 128 | 824.2              | 32.16                        |
| GSM 850  | Channel 190 | 836.6              | 32.22                        |
|          | Channel 251 | 848.8              | 32.27                        |
|          | Channel 512 | 1850.2             | 30.66                        |
| PCS 1900 | Channel 661 | 1880               | 30.47                        |
|          | Channel 810 | 1909.8             | 30.25                        |

| Mode Channel |         | Frequency | Conducted Output Power(dBm) Note 2 |           |        |  |  |
|--------------|---------|-----------|------------------------------------|-----------|--------|--|--|
| Mode         | Chamiei | (MHz)     | GFSK                               | π/4-DQPSK | 8DQPSK |  |  |
|              | 1       | 2402      | 1.14                               | 0.98      | 1.16   |  |  |
| Bluetooth    | 40      | 2441      | 1.33                               | 1.06      | 1.40   |  |  |
|              | 79      | 2480      | 1.81                               | 1.48      | 1.85   |  |  |

**Note 1:** Agilent 8960 measures the average output power for active timeslots. For SAR the time-based average power is relevant. The difference in between depends on the duty cycle of the TDMA signal:

| Number of Timeslots                                  | 1         | 2         | 3         | 4         |
|--|-----------|-----------|-----------|-----------|
| Duty Cycle   | 1:8       | 1:4       | 1:2.67    | 1:2       |
| Time based Ave. power compared to slotted Ave. power | - 9.03 dB | - 6.02 dB | - 4.26 dB | - 3.01 dB |

Base on the Power result above the time average of GPRS multiple slots are shown below:


| Mode      | Channel No. | Frequency | Time-Based Average Power (dBm) |        |        |        |  |
|-----------|-------------|-----------|--------------------------------|--------|--------|--------|--|
|           |             | (MHz)     | 1slot                          | 2slots | 3slots | 4slots |  |
| GPRS 850  | Channel 128 | 824.2     | 23.07                          | 25.14  | 25.05  | 25.18  |  |
|           | Channel 190 | 836.6     | 23.08                          | 25.23  | 25.18  | 25.36  |  |
|           | Channel 251 | 848.8     | 23.15                          | 25.24  | 25.19  | 25.34  |  |
|           | Channel 512 | 1850.2    | 21.18                          | 23.7   | 23.85  | 23.87  |  |
| GPRS 1900 | Channel 661 | 1880      | 20.87                          | 23.41  | 23.52  | 23.61  |  |
|           | Channel 810 | 1909.8    | 20.5                           | 23.19  | 23.15  | 23.29  |  |

Therefore, 4 slots have the worst time average power output, all GPRS SAR result are base on the 4 slots configurations.

#### Note 2:

According to KDB 648474, when simultaneous transmission applies and the sum of the 1-g SAR measured for all simultaneous transmitting antennas is less than the SAR limit, SAR evaluation for simultaneous transmission is not required for all transmitters and antennas. When stand-alone 1-g SAR is not required for a transmitter or antenna, when the antenna is between 2.5 and 5.0cm from other antennas, its SAR is considered zero in the 1-g summing process.

Two antennas are available for the EUT, one is GSM antenna, and the other is Bluetooth antenna The Max Output Power of Bluetooth (1.53 mW)< PRef (12 mW), the stand alone SAR for Bluetooth is not required. The sum of 1-g SAR of Bluetooth is 0. The sum of 1-g SAR measured for all transmitting antennas is less than the SAR; therefore simultaneous transmission is not required.

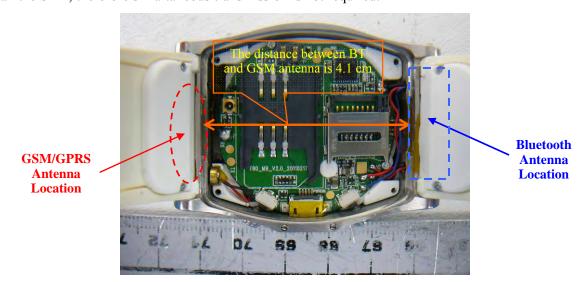

# 10 SAR MEASUREMENT RESULTS

This page summarizes the results of the performed dosimetric evaluation. The plots with the corresponding SAR distributions, which reveal information about the location of the maximum SAR with respect to the device, could be found in Appendix E.

### 10.1 SAR Test Data

### **Test Environmental Conditions**

| Temperature:       | 21-24 °C    |  |  |
|--------------------|-------------|--|--|
| Relative Humidity: | 40-50%      |  |  |
| ATM Pressure:      | 101-103 kPa |  |  |

Testing was performed by Ricky Wang on 2012-07-19 in SAR chamber.

#### **GSM 850:**

| EUT<br>Position | Frequency (MHz)    | Radio<br>Mode          | Antenna<br>Type | Liquid | Phantom   | Accessories | SAR Value<br>(W/Kg)<br>1g Tissue  | Limit<br>(W/Kg)<br>1g Tissue  | Plot<br># |
|-----------------|--------------------|------------------------|-----------------|--------|-----------|-------------|-----------------------------------|-------------------------------|-----------|
| A               | 824.2              | GSM                    | Integral        | Head   | Flat      | /           | 0.156                             | 1.6                           | 1         |
| A               | 836.6              | GSM                    | Integral        | Head   | Flat      | /           | 0.169                             | 1.6                           | 2         |
| A               | 848.8              | GSM                    | Integral        | Head   | Flat      | /           | 0.162                             | 1.6                           | 3         |
| EUT<br>Position | Frequency<br>(MHz) | Test Type              | Antenna<br>Type | Liquid | Phantom   | Accessories | SAR Value<br>(W/Kg)<br>10g Tissue | Limit<br>(W/Kg)<br>10g Tissue | Plot<br># |
| В               | 824.2              | GSM                    | Integral        | Body   | Neck Area | Headset     | 0.474                             | 4.0                           | 4         |
| В               | 836.6              | GSM                    | Integral        | Body   | Neck Area | Headset     | 0.490                             | 4.0                           | 5         |
| В               | 848.8              | GSM                    | Integral        | Body   | Neck Area | Headset     | 0.464                             | 4.0                           | 6         |
| В               | 824.2              | GPRS <sup>Note 1</sup> | Integral        | Body   | Neck Area | /           | 0.672                             | 4.0                           | 7         |
| В               | 836.6              | GPRS <sup>Note 1</sup> | Integral        | Body   | Neck Area | /           | 0.694                             | 4.0                           | 8         |
| В               | 848.8              | GPRS <sup>Note 1</sup> | Integral        | Body   | Neck Area | /           | 0.688                             | 4.0                           | 9         |

#### **PCS 1900:**

| EUT<br>Position | Frequency<br>(MHz) | Radio<br>Mode          | Antenna<br>Type | Liquid | Phantom   | Accessories | SAR Value<br>(W/Kg)<br>1g Tissue  | Limit<br>(W/Kg)<br>1g Tissue  | Plot<br># |
|-----------------|--------------------|------------------------|-----------------|--------|-----------|-------------|-----------------------------------|-------------------------------|-----------|
| A               | 1850.2             | GSM                    | Integral        | Head   | Flat      | /           | 0.173                             | 1.6                           | 10        |
| A               | 1880               | GSM                    | Integral        | Head   | Flat      | /           | 0.193                             | 1.6                           | 11        |
| A               | 1909.8             | GSM                    | Integral        | Head   | Flat      | /           | 0.172                             | 1.6                           | 12        |
| EUT<br>Position | Frequency<br>(MHz) | Test Type              | Antenna<br>Type | Liquid | Phantom   | Accessories | SAR Value<br>(W/Kg)<br>10g Tissue | Limit<br>(W/Kg)<br>10g Tissue | Plot<br># |
| В               | 1850.2             | GSM                    | Integral        | Body   | Neck Area | Headset     | 0.882                             | 4.0                           | 13        |
| В               | 1880               | GSM                    | Integral        | Body   | Neck Area | Headset     | 1.01                              | 4.0                           | 14        |
| В               | 1909.8             | GSM                    | Integral        | Body   | Neck Area | Headset     | 0.904                             | 4.0                           | 15        |
| В               | 1850.2             | GPRS <sup>Note 1</sup> | Integral        | Body   | Neck Area | /           | 1.24                              | 4.0                           | 16        |
| В               | 1880               | GPRS <sup>Note 1</sup> | Integral        | Body   | Neck Area | /           | 1.43                              | 4.0                           | 17        |
| В               | 1909.8             | GPRS <sup>Note 1</sup> | Integral        | Body   | Neck Area | /           | 1.38                              | 4.0                           | 18        |


#### Note 1:

- 1) Position A: Speak mode, EUT front side face to the flat phantom with 10 mm distance.
- 2) Position B: EUT back side touch to the neck area of SAM phantom with headset. 3) GPRS<sup>Note 1</sup>: The worst case for 4 slots.


Note 2: SAR probe accessibility for the phantom regions used to test the SAR of the wrist has been provided, based on the verifications of the different positions of right head of SAM phantom, it was determined that the result of neck area of SAM phantom (position B) has the worst reading of all over applicable positions, and the neck area is the best location for the specific SAR evaluation.

Please refer to the probe trajectories as below:

# **Probe Trajectories Plot (Right Head of SAM Phantom)**

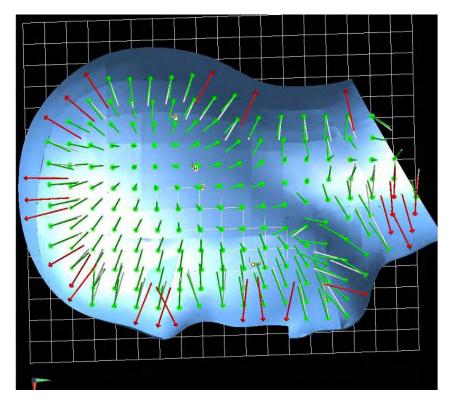

**Probe Trajectories Plot (Position B)** 

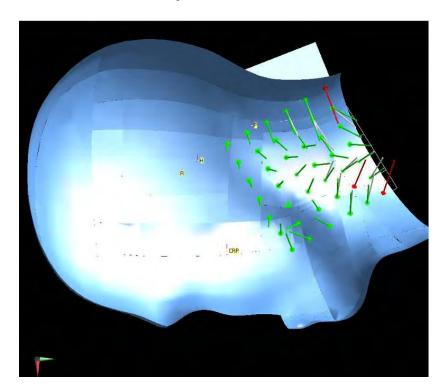

# 11 APPENDIX A – MEASUREMENT UNCERTAINTY

The uncertainty budget has been determined for the DASY4 measurement system and is given in the following Table.

Measurement uncertainty for 300 MHz to 3 GHz

| SASY4 Uncertainty Budget According to IEEE 1528 |                      |                |          |             |              |                |                 |               |
|---|----------------------|----------------|----------|-------------|--------------|----------------|-----------------|---------------|
| Error Description                               | Uncertainty<br>Value | Prob.<br>Dist. | Div.     | (c i)<br>1g | (c i)<br>10g | Std. Unc. (1g) | Std. Unc. (10g) | (v i)<br>veff |
|   |                      | Measur         | ement Sy | ystem       |              |                |                 |               |
| Probe Calibration                               | ± 6.0 %              | N              | 1        | 1           | 1            | ± 6.0 %        | ± 6.0 %         | $\infty$      |
| Axial Isotropy                                  | ± 4.7 %              | R              | √3       | 0.7         | 0.7          | ± 1.9 %        | ± 1.9 %         | $\infty$      |
| Hemispherical Isotropy                          | ± 9.6 %              | R              | √3       | 0.7         | 0.7          | ± 3.9 %        | ± 3.9 %         | $\infty$      |
| Boundary Effects                                | ± 1.0 %              | R              | √3       | 1           | 1            | ± 0.6 %        | ± 0.6 %         | $\infty$      |
| Linearity                                       | ± 4.7 %              | R              | √3       | 1           | 1            | ± 2.7 %        | ± 2.7 %         | $\infty$      |
| System Detection Limits                         | ± 1.0 %              | R              | √3       | 1           | 1            | ± 0.6 %        | ± 0.6 %         | $\infty$      |
| Readout Electronics                             | ± 0.3 %              | N              | 1        | 1           | 1            | ± 0.3 %        | ± 0.3 %         | $\infty$      |
| Response Time                                   | ± 0.8 %              | R              | √3       | 1           | 1            | ± 0.5 %        | ± 0.5 %         | $\infty$      |
| Integration Time                                | ± 2.6 %              | R              | √3       | 1           | 1            | ± 1.5 %        | ± 1.5 %         | $\infty$      |
| RF Ambient Conditions                           | ± 3.0 %              | R              | √3       | 1           | 1            | ± 1.7 %        | ± 1.7 %         | $\infty$      |
| Probe Positioner                                | ± 0.4 %              | R              | √3       | 1           | 1            | ± 0.2 %        | ± 0.2 %         | $\infty$      |
| Probe Positioning                               | ± 2.9 %              | R              | √3       | 1           | 1            | ± 1.7 %        | ± 1.7 %         | $\infty$      |
| Max. SAR Eval.                                  | ± 1.0 %              | R              | √3       | 1           | 1            | ± 0.6 %        | ± 0.6 %         | $\propto$     |
|   |                      | Test Sa        | mple Re  | lated       |              |                |                 |               |
| Device Positioning                              | ± 2.9 %              | N              | 1        | 1           | 1            | ± 2.9 %        | ± 2.9 %         | 145           |
| Device Holder                                   | ± 3.6 %              | N              | 1        | 1           | 1            | ± 3.6 %        | ± 2.6 %         | 5             |
| Power Drift                                     | ± 5.0 %              | R              |          | 1           | 1            | ± 2.9 %        | ± 2.9 %         | $\infty$      |
|   | Phantom and Setup    |                |          |             |              |                |                 |               |
| Phantom Uncertainty                             | ± 4.0 %              | R              | √3       | 1           | 1            | ± 2.3 %        | ± 2.3 %         | $\infty$      |
| Liquid Conductivity (Target)                    | ± 5.0 %              | R              | √3       | 0.64        | 0.43         | ± 1.8 %        | ± 1.2 %         | œ             |
| Liquid Conductivity (meas.)                     | ± 2.5 %              | N              | 1        | 0.64        | 0.43         | ± 1.6 %        | ± 1.1 %         | œ             |
| Liquid Permittivity (Target)                    | ± 5.0 %              | R              | √3       | 0.6         | 0.49         | ± 1.7 %        | ± 1.4 %         | œ             |
| Liquid Permittivity (Target)                    | ± 2.5 %              | N              | 1        | 0.6         | 0.49         | ± 1.5 %        | ± 1.0 %         | œ             |
| Combined Std. Uncertainty                       | -                    | -              | -        | -           | -            | ± 10.8 %       | ± 10.6 %        | 330           |
| Expanded STD Uncertainty                        | -                    | -              | -        | -           | -            | ± 21.6 %       | ± 21.1 %        | -             |

### 12 APPENDIX B – PROBE CALIBRATION CERTIFICATES

Calibration Laboratory of Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
Servizio svizzero di taratura
Swiss Calibration Service

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

Client

BACL

Certificate No: ES3-3019\_Aug11

Accreditation No.: SCS 108

# CALIBRATION CERTIFICATE

Object

ES3DV2 - SN:3019

Calibration procedure(s)

QA CAL-01.v8, QA CAL-12.v7, QA CAL-23.v4, QA CAL-25.v4

Calibration procedure for dosimetric E-field probes

Calibration date:

August 25, 2011

This calibration certificate documents the traceability to national standards, which realize the physical units of measurements (SI). The measurements and the uncertainties with confidence probability are given on the following pages and are part of the certificate.

All calibrations have been conducted in the closed laboratory facility: environment temperature (22 ± 3)°C and humidity < 70%.

Calibration Equipment used (M&TE critical for calibration)

| Primary Standards          | ID              | Cal Date (Certificate No.)        | Scheduled Calibration  |
|----------------------------|-----------------|-----------------------------------|------------------------|
| Power meter E4419B         | GB41293874      | 31-Mar-11 (No. 217-01372)         | Apr-12                 |
| Power sensor E4412A        | MY41498087      | 31-Mar-11 (No. 217-01372)         | Apr-12                 |
| Reference 3 dB Attenuator  | SN: S5054 (3c)  | 29-Mar-11 (No. 217-01369)         | Apr-12                 |
| Reference 20 dB Attenuator | SN: S5086 (20b) | 29-Mar-11 (No. 217-01367)         | Apr-12                 |
| Reference 30 dB Attenuator | SN: S5129 (30b) | 29-Mar-11 (No. 217-01370)         | Apr-12                 |
| Reference Probe ES3DV2     | SN: 3013        | 29-Dec-10 (No. ES3-3013_Dec10)    | Dec-11                 |
| DAE4                       | SN: 654         | 3-May-11 (No. DAE4-654_May11)     | May-12                 |
| Secondary Standards        | ID              | Check Date (in house)             | Scheduled Check        |
| RF generator HP 8648C      | US3642U01700    | 4-Aug-99 (in house check Oct-09)  | In house check: Oct-11 |
| Network Analyzer HP 8753E  | US37390585      | 18-Oct-01 (in house check Oct-10) | In house check: Oct-11 |

Calibrated by:

Claudio Leubler

Claudio Leubler

Eaboratory Technician

Approved by:

Katja Pokovic

Technical Manager

This calibration certificate shall not be reproduced except in full without written approval of the laboratory

Issued: August 27, 2011

Certificate No: ES3-3019\_Aug11

Page 1 of 11

### Calibration Laboratory of

Schmid & Partner Engineering AG Zeughausstrasse 43, 8004 Zurich, Switzerland





S Schweizerischer Kalibrierdienst
C Service suisse d'étalonnage
Servizio svizzero di taratura
Swiss Calibration Service

Accreditation No.: SCS 108

Accredited by the Swiss Accreditation Service (SAS)

The Swiss Accreditation Service is one of the signatories to the EA Multilateral Agreement for the recognition of calibration certificates

#### Glossary:

TSL tissue simulating liquid
NORMx,y,z sensitivity in free space
ConvF sensitivity in TSL / NORMx,y,z
DCP diode compression point

CF crest factor (1/duty\_cycle) of the RF signal A, B, C modulation dependent linearization parameters

Polarization  $\varphi$   $\varphi$  rotation around probe axis

Polarization 9 9 rotation around an axis that is in the plane normal to probe axis (at measurement center),

i.e., 9 = 0 is normal to probe axis

#### Calibration is Performed According to the Following Standards:

- IEEE Std 1528-2003, "IEEE Recommended Practice for Determining the Peak Spatial-Averaged Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques", December 2003
- IEC 62209-1, "Procedure to measure the Specific Absorption Rate (SAR) for hand-held devices used in close proximity to the ear (frequency range of 300 MHz to 3 GHz)", February 2005

#### Methods Applied and Interpretation of Parameters:

- NORMx,y,z: Assessed for E-field polarization 9 = 0 (f ≤ 900 MHz in TEM-cell; f > 1800 MHz: R22 waveguide).
   NORMx,y,z are only intermediate values, i.e., the uncertainties of NORMx,y,z does not affect the E²-field uncertainty inside TSL (see below ConvF).
- NORM(f)x,y,z = NORMx,y,z \* frequency\_response (see Frequency Response Chart). This linearization is
  implemented in DASY4 software versions later than 4.2. The uncertainty of the frequency response is included
  in the stated uncertainty of ConvF.
- DCPx,y,z: DCP are numerical linearization parameters assessed based on the data of power sweep with CW signal (no uncertainty required). DCP does not depend on frequency nor media.
- PAR: PAR is the Peak to Average Ratio that is not calibrated but determined based on the signal characteristics
- Ax,y,z; Bx,y,z; Cx,y,z, VRx,y,z: A, B, C are numerical linearization parameters assessed based on the data of
  power sweep for specific modulation signal. The parameters do not depend on frequency nor media. VR is the
  maximum calibration range expressed in RMS voltage across the diode.
- ConvF and Boundary Effect Parameters: Assessed in flat phantom using E-field (or Temperature Transfer Standard for f ≤ 800 MHz) and inside waveguide using analytical field distributions based on power measurements for f > 800 MHz. The same setups are used for assessment of the parameters applied for boundary compensation (alpha, depth) of which typical uncertainty values are given. These parameters are used in DASY4 software to improve probe accuracy close to the boundary. The sensitivity in TSL corresponds to NORMx,y,z \* ConvF whereby the uncertainty corresponds to that given for ConvF. A frequency dependent ConvF is used in DASY version 4.4 and higher which allows extending the validity from ± 50 MHz to ± 100 MHz.
- Spherical isotropy (3D deviation from isotropy): in a field of low gradients realized using a flat phantom
  exposed by a patch antenna.
- Sensor Offset: The sensor offset corresponds to the offset of virtual measurement center from the probe tip (on probe axis). No tolerance required.

Certificate No: ES3-3019\_Aug11

Page 2 of 11

ES3DV2 - SN:3019

August 25, 2011

# Probe ES3DV2

SN:3019

Manufactured: Calibrated:

December 5, 2002 August 25, 2011

Calibrated for DASY/EASY Systems (Note: non-compatible with DASY2 system!)

Certificate No: ES3-3019\_Aug11

Page 3 of 11

ES3DV2-SN:3019 August 25, 2011

# DASY/EASY - Parameters of Probe: ES3DV2 - SN:3019

#### **Basic Calibration Parameters**

|  | Sensor X | Sensor Y | Sensor Z | Unc (k=2) |
|--|----------|----------|----------|-----------|
| Norm (μV/(V/m) <sup>2</sup> ) <sup>A</sup> | 1.03     | 1.15     | 0.96     | ± 10.1 %  |
| DCP (mV) <sup>B</sup>                      | 101.8    | 103.0    | 105.1    |           |

#### **Modulation Calibration Parameters**

| UID   | Communication System Name | PAR  |   | A<br>dB | B<br>dB | C<br>dB | VR<br>mV | Unc <sup>E</sup><br>(k=2) |
|-------|---------------------------|------|---|---------|---------|---------|----------|---------------------------|
| 10000 | CW                        | 0.00 | X | 0.00    | 0.00    | 1.00    | 128.3    | ±3.0 %                    |
|       |                           |      | Y | 0.00    | 0.00    | 1.00    | 147.1    |                           |
|       |                           |      | Z | 0.00    | 0.00    | 1.00    | 122.4    |                           |

The reported uncertainty of measurement is stated as the standard uncertainty of measurement multiplied by the coverage factor k=2, which for a normal distribution corresponds to a coverage probability of approximately 95%.

Certificate No: ES3-3019\_Aug11

A The uncertainties of NormX,Y,Z do not affect the E²-field uncertainty inside TSL (see Pages 5 and 6).

B Numerical linearization parameter: uncertainty not required.

E Uncertainty is determined using the max. deviation from linear response applying rectangular distribution and is expressed for the square of the field value.

ES3DV2-SN:3019 August 25, 2011

# DASY/EASY - Parameters of Probe: ES3DV2 - SN:3019

#### Calibration Parameter Determined in Head Tissue Simulating Media

| f (MHz) <sup>c</sup> | Relative<br>Permittivity <sup>F</sup> | Conductivity<br>(S/m) <sup>F</sup> | ConvF X | ConvF Y | ConvF Z | Alpha | Depth<br>(mm) | Unct.<br>(k=2) |
|----------------------|---------------------------------------|------------------------------------|---------|---------|---------|-------|---------------|----------------|
| 450                  | 43.5                                  | 0.87                               | 6.76    | 6.76    | 6.76    | 0.13  | 1.20          | ± 13.4 %       |
| 835                  | 41.5                                  | 0.90                               | 6.22    | 6.22    | 6.22    | 0.76  | 1.09          | ± 12.0 %       |
| 900                  | 41.5                                  | 0.97                               | 6.07    | 6.07    | 6.07    | 0.63  | 1.16          | ± 12.0 %       |
| 1810                 | 40.0                                  | 1.40                               | 4.93    | 4.93    | 4.93    | 0.41  | 1.54          | ± 12.0 %       |
| 1900                 | 40.0                                  | 1.40                               | 4.87    | 4.87    | 4.87    | 0.45  | 1.40          | ± 12.0 %       |
| 2450                 | 39.2                                  | 1.80                               | 4.12    | 4.12    | 4.12    | 0.44  | 1.40          | ± 12.0 %       |

Certificate No: ES3-3019\_Aug11 Page 5 of 11

<sup>&</sup>lt;sup>c</sup> Frequency validity of  $\pm$  100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to  $\pm$  50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

F At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to  $\pm$  10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to  $\pm$  5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

ES3DV2-SN:3019

August 25, 2011

# DASY/EASY - Parameters of Probe: ES3DV2- SN:3019

# Calibration Parameter Determined in Body Tissue Simulating Media

| f (MHz) <sup>c</sup> | Relative<br>Permittivity <sup>F</sup> | Conductivity<br>(S/m) F | ConvF X | ConvF Y | ConvF Z | Alpha | Depth<br>(mm) | Unct.<br>(k=2) |
|----------------------|---------------------------------------|-------------------------|---------|---------|---------|-------|---------------|----------------|
| 450                  | 56.7                                  | 0.94                    | 7.19    | 7.19    | 7.19    | 0.06  | 1.20          | ± 13.4 %       |
| 835                  | 55.2                                  | 0.97                    | 6.19    | 6.19    | 6.19    | 0.76  | 1.11          | ± 12.0 %       |
| 900                  | 55.0                                  | 1.05                    | 6.07    | 6.07    | 6.07    | 0.73  | 1.13          | ± 12.0 %       |
| 1810                 | 53.3                                  | 1.52                    | 4.57    | 4.57    | 4.57    | 0.49  | 1.57          | ± 12.0 %       |
| 1900                 | 53.3                                  | 1.52                    | 4.38    | 4.38    | 4.38    | 0.41  | 1.81          | ± 12.0 %       |
| 2450                 | 52.7                                  | 1.95                    | 3.87    | 3.87    | 3.87    | 0.46  | 1.30          | ± 12.0 %       |

Certificate No: ES3-3019\_Aug11


<sup>&</sup>lt;sup>c</sup> Frequency validity of  $\pm$  100 MHz only applies for DASY v4.4 and higher (see Page 2), else it is restricted to  $\pm$  50 MHz. The uncertainty is the RSS of the ConvF uncertainty at calibration frequency and the uncertainty for the indicated frequency band.

F At frequencies below 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) can be relaxed to  $\pm$  10% if liquid compensation formula is applied to measured SAR values. At frequencies above 3 GHz, the validity of tissue parameters ( $\epsilon$  and  $\sigma$ ) is restricted to  $\pm$  5%. The uncertainty is the RSS of the ConvF uncertainty for indicated target tissue parameters.

ES3DV2-SN:3019

August 25, 2011

# Frequency Response of E-Field (TEM-Cell:ifi110 EXX, Waveguide: R22)

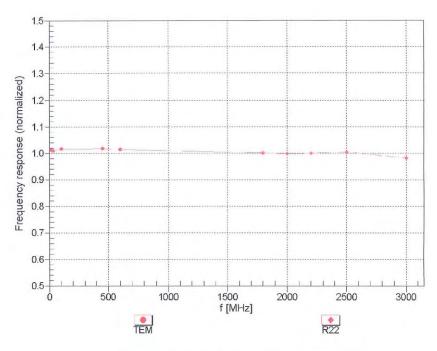

Uncertainty of Frequency Response of E-field: ± 6.3% (k=2)


Certificate No: ES3-3019\_Aug11


Page 7 of 11

ES3DV2- SN:3019 August 25, 2011

# Receiving Pattern ( $\phi$ ), $\vartheta = 0^{\circ}$



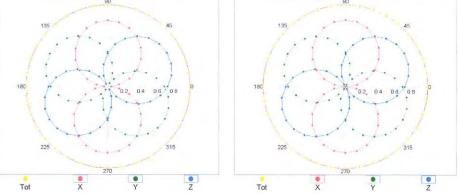


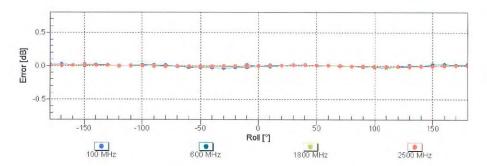


Uncertainty of Axial Isotropy Assessment: ± 0.5% (k=2)

ES3DV2- SN:3019 August 25, 2011

# Dynamic Range f(SAR<sub>head</sub>) (TEM cell , f = 900 MHz)

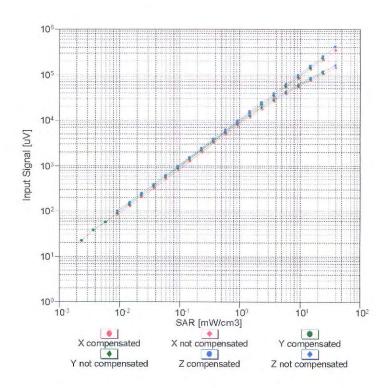




Uncertainty of Linearity Assessment: ± 0.6% (k=2)

Certificate No: ES3-3019\_Aug11


Page 9 of 11

ES3DV2- SN:3019 August 25, 2011

# **Conversion Factor Assessment**

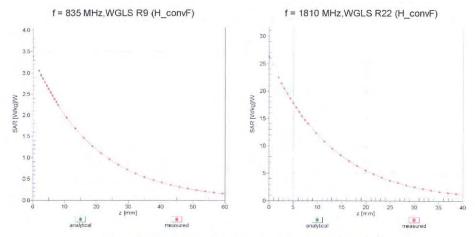

# Deviation from Isotropy in Liquid Error ( $\phi$ , $\vartheta$ ), f = 900 MHz



-1.0 -0.8 -0.6 -0.4 -0.2 0.0 0.2 0.4 0.6 0.8 1.
Uncertainty of Spherical Isotropy Assessment: ± 2.6% (k=2)

Certificate No: ES3-3019\_Aug11

Page 10 of 11

ES3DV2- SN:3019

August 25, 2011

# DASY/EASY - Parameters of Probe: ES3DV2 - SN:3019

#### Other Probe Parameters

| Sensor Arrangement                            | Triangular     |
|---|----------------|
| Connector Angle (°)                           | Not applicable |
| Mechanical Surface Detection Mode             | enabled        |
| Optical Surface Detection Mode                | disabled       |
| Probe Overall Length                          | 337 mm         |
| Probe Body Diameter                           | 10 mm          |
| Tip Length                                    | 10 mm          |
| Tip Diameter                                  | 4 mm           |
| Probe Tip to Sensor X Calibration Point       | 2 mm           |
| Probe Tip to Sensor Y Calibration Point       | 2 mm           |
| Probe Tip to Sensor Z Calibration Point       | 2 mm           |
| Recommended Measurement Distance from Surface | 3 mm           |

Certificate No: ES3-3019\_Aug11

Page 11 of 11

# 13 APPENDIX C - DIPOLE CALIBRATION CERTIFICATES

# **NCL CALIBRATION LABORATORIES**

Calibration File No: DC-1384 Project Number: BAC-835-dipole-cal-5626

# CERTIFICATE OF CALIBRATION

It is certified that the equipment identified below has been calibrated in the NCL CALIBRATION LABORATORIES by qualified personnel following recognized procedures and using transfer standards traceable to NRC/NIST.

> Validation Dipole 835MHz Head & Body

Manufacturer: APREL Laboratories Part number: ALS-D-835-S-2 Frequency: 835MHz Serial No: 180-00564

Customer: Bay Area Compliance

Calibrated: 24<sup>th</sup> October 2011 Released on: 27<sup>h</sup> October 2011

This Calibration Certificate is Incomplete Unless Adrompanied with the Calibration Results Summary

Released By:

NCL CALIBRATION LABORATORIES

303 Terry Fox Drive, Suite 102 Kanata, Ontario CANADA K2K 3J1 Division of APREL TEL: (613) 435-8300 FAX: (613) 435-8306

Division of APREL Inc.

#### **Conditions**

Dipole 180-00565 was a recalibration.

Ambient Temperature of the Laboratory: 22 °C +/- 0.5 °C Temperature of the Tissue: 21 °C +/- 0.5 °C 21 °C +/- 0.5 °C

We the undersigned attest that to the best of our knowledge the calibration of this device has been accurately conducted and that all information contained within this report has been reviewed for accuracy.

Stuart Nicol

C. Teodorian

#### **Primary Measurement Standards**

| Instrument                      | Serial Number | Cal due date   |
|---------------------------------|---------------|----------------|
| Power meter Anritsu MA2408A     | 90025437      | Nov.4, 2011    |
| Power Sensor Anritsu MA2481D    | 103555        | Nov 4, 2011    |
| Attenuator HP 8495A (70dB)      | 1944A10711    | Sept. 14, 2012 |
| Network Analyzer Agilent E5071C | 1334746J      | Aug. 8, 2012   |

### **Secondary Measurement Standards**

Signal Generator Agilent E4438C -506 MY55182336 June 7, 2012

This page has been reviewed for content and attested to by signature within this document.

# NCL Calibration Laboratories Division of APREL Inc.

# **Calibration Results Summary**

The following results relate the Calibrated Dipole and should be used as a quick reference for the user.

#### **Mechanical Dimensions**

161.0 mm Length: 89.8 mm Height:


#### **Electrical Specification 835MHz**

| Tissue Type | Return Loss: | Impedance: | SWR:    |
|-------------|--------------|------------|---------|
| Head        | -32.132      | 48.897     | 1.0621U |
| Body        | -24.800      | 53.311     | 1.1206U |

# **System Validation Results**

| Tissue | Frequency | 1 Gram | 10 Gram | Peak   |
|--------|-----------|--------|---------|--------|
| Head   | 835 MHz   | 9.590  | 6.003   | 15.013 |
| Body   | 835 MHz   | 9.981  | 6.006   | 15.013 |

#### 835MHz



This page has been reviewed for content and attested to by signature within this document.

Division of APREL Inc.

#### Introduction

This Calibration Report has been produced in line with the SSI Dipole Calibration Procedure SSI-TP-018-ALSAS. The results contained within this report are for Validation Dipole 180-00565. The calibration routine consisted of a three-step process. Step 1 was a mechanical verification of the dipole to ensure that it meets the mechanical specifications. Step 2 was an Electrical Calibration for the Validation Dipole, where the SWR, Impedance, and the Return loss were assessed. Step 3 involved a System Validation using the ALSAS-10U, along with APREL E-030 130 MHz to 26 GHz E-Field Probe Serial Number 215.

#### References

- IEEE Standard 1528 (2003) including Amendment 1
   IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
- EN 62209-1 (2006)

Human Exposure to RF Fields from hand-held and body-mounted wireless communication devices - Human models. instrumentation, and procedures-Part 1: Procedure to measure the Specific Absorption Rate (SAR) for hand-held mobile wireless devices

- IEC 62209-2 Ed. 1.0 (2010-03)
   Human exposure to RF fields from hand-held and body-mounted wireless devices Human models, instrumentation, and procedures - Part 2: specific absorption rate (SAR) for wireless communication devices (30 MHz - 6 GHz)
- TP-D01-032-E020-V2 E-Field probe calibration procedure
- D22-012-Tissue dielectric tissue calibration procedure
- o D28-002-Dipole procedure for validation of SAR system using a dipole
- IEEE 1309 Draft Standard for Calibration of Electromagnetic Field Sensors and Probes, Excluding Antennas, from 9kHz to 40GHz

#### **Conditions**

Dipole 180-00564 was a recalibration.

Ambient Temperature of the Laboratory:  $22 \,^{\circ}\text{C}$  +/-  $0.5 \,^{\circ}\text{C}$  Temperature of the Tissue:  $20 \,^{\circ}\text{C}$  +/-  $0.5 \,^{\circ}\text{C}$ 

#### **Dipole Calibration uncertainty**

The calibration uncertainty for the dipole is made up of various parameters presented below.

Mechanical1%Positioning Error1.22%Electrical1.7%Tissue2.2%Dipole Validation2.2%

TOTAL 8.32% (16.64% K=2)

This page has been reviewed for content and attested to by signature within this document.

Division of APREL Inc.


#### **Electrical Calibration**


#### **Electrical Specification 835MHz**

| Tissue Type | Measured Epsilon | Measured Sigma |
|-------------|------------------|----------------|
| Head        | 41.09            | 0.89           |
| Body        | 53.15            | 0.95           |

# Forward Reflection

#### **Head Tissue**







This page has been reviewed for content and attested to by signature within this document.

Division of APREL Inc.

# Electrical Specification 835MHz Impedance

| Tissue Type | Measured Epsilon | Measured Sigma |
|-------------|------------------|----------------|
| Head        | 41.09            | 0.89           |
| Body        | 53.15            | 0.95           |






This page has been reviewed for content and attested to by signature within this document.

Division of APREL Inc.


## **Electrical Specification 835MHz Standing Wave Ratio**

| Tissue Type | Measured Epsilon | Measured Sigma |
|-------------|------------------|----------------|
| Head        | 41.09            | 0.89           |
| Body        | 53.15            | 0.95           |





## **Body Tissue**



This page has been reviewed for content and attested to by signature within this document.

# NCL Calibration Laboratories Division of APREL Inc.

#### **Test Equipment**

The test equipment used during Probe Calibration, manufacturer, model number and, current calibration status are listed and located on the main APREL server R:\NCL\Calibration Equipment\Instrument List May 2011.

8

This page has been reviewed for content and attested to by signature within this document.

#### **NCL CALIBRATION LABORATORIES**

Calibration File No: DC-1385
Project Number: BAC-1900-dipole-cal-5627

# CERTIFICATE OF CALIBRATION

It is certified that the equipment identified below has been calibrated in the NCL CALIBRATION LABORATORIES by qualified personnel following recognized procedures and using transfer standards traceable to NRC/NIST.

> Validation Dipole 1900MHz Head & Body

Manufacturer: APREL Laboratories
Part number: ALS-D-1900-S-2
Frequency: 1900MHz
Serial No: 210-00715

Customer:Bay Area Compliance

Calibrated: 24th October 2011 Released on: 27th October 2011

This Calibration Certificate is Incomplete Unless Adompanied with the Calibration Results Summary

Released By:

NCL CALIBRATION LABORATORIES

303 Terry Fox Drive, Suite 102 Kanata, Ontario CANADA K2K 3J1 Division of APREL TEL: (613) 435-8300 FAX: (613) 435-8306

Division of APREL Inc.

# **Conditions**

Dipole 210-00715 was a recalibration.

Ambient Temperature of the Laboratory: 22 °C +/- 0.5 °C Temperature of the Tissue: 22 °C +/- 0.5 °C 21 °C +/- 0.5 °C

We the undersigned attest that to the best of our knowledge the calibration of this device has been accurately conducted and that all information contained within this report has been reviewed for accuracy.

**Stuart Nicol** 

C. Teodorian

#### **Primary Measurement Standards**

| Instrument                      | Serial Number | Cal due date   |
|---------------------------------|---------------|----------------|
| Power meter Anritsu MA2408A     | 190025437     | Nov.4, 2011    |
| Power Sensor Anritsu MA2481D    | 103555        | Nov 4, 2011    |
| Attenuator HP 8495A (70dB)      | 1944A10711    | Sept. 14, 2012 |
| Network Analyzer Agilent E5071C | 1334746J      | Aug. 8, 2012   |

#### Secondary Measurement Standards

Signal Generator Agilent E4438C -506 MY55182336 June 7, 2012

This page has been reviewed for content and attested to by signature within this document.

Division of APREL Inc.

# **Calibration Results Summary**

The following results relate the Calibrated Dipole and should be used as a quick reference for the user.

#### **Mechanical Dimensions**

**Length:** 67.1 mm Height: 38.9 mm


#### **Electrical Specification 1900MHz**

| Tissue Type | Return Loss: | Impedance: | SWR:    |
|-------------|--------------|------------|---------|
| Head        | -28.634      | 46.965     | 1.0813U |
| Body        | -23.129      | 47.664     | 1.1520U |

#### **System Validation Results**

| ſ | Tissue | Frequency | 1 Gram | 10 Gram | Peak   |
|---|--------|-----------|--------|---------|--------|
| ſ | Head   | 1900 MHz  | 39.378 | 19.668  | 77.268 |
| ſ | Body   | 1900 MHz  | 39.654 | 19.668  | 77.268 |

#### 1900MHz



This page has been reviewed for content and attested to by signature within this document.

Division of APREL Inc.

#### Introduction

This Calibration Report has been produced in line with the SSI Dipole Calibration Procedure SSI-TP-018-ALSAS. The results contained within this report are for Validation Dipole 210-00716. The calibration routine consisted of a three-step process. Step 1 was a mechanical verification of the dipole to ensure that it meets the mechanical specifications. Step 2 was an Electrical Calibration for the Validation Dipole, where the SWR, Impedance, and the Return loss were assessed. Step 3 involved a System Validation using the ALSAS-10U, along with APREL E-030 130 MHz to 26 GHz E-Field Probe Serial Number 215.

#### References

- o IEEE Standard 1528 (2003) including Amendment 1 IEEE Recommended Practice for Determining the Peak Spatial-Average Specific Absorption Rate (SAR) in the Human Head from Wireless Communications Devices: Measurement Techniques
- EN 62209-1 (2006) Human Exposure to RF Fields from hand-held and body-mounted wireless communication devices - Human models. instrumentation, and procedures-Part 1: Procedure to measure the Specific Absorption Rate (SAR) for hand-held mobile wireless devices
- IEC 62209-2 Ed. 1.0 (2010-03) Human exposure to RF fields from hand-held and body-mounted wireless devices - Human models, instrumentation, and procedures - Part 2: specific absorption rate (SAR) for wireless communication devices (30 MHz - 6 GHz)
  TP-D01-032-E020-V2 E-Field probe calibration procedure
- D22-012-Tissue dielectric tissue calibration procedure
- D28-002-Dipole procedure for validation of SAR system using a dipole
- IEEE 1309 Draft Standard for Calibration of Electromagnetic Field Sensors and Probes, Excluding Antennas, from 9kHz to 40GHz

#### Conditions

Dipole 210-00715 was a recalibration.

Ambient Temperature of the Laboratory: 22 °C +/- 0.5°C Temperature of the Tissue: 20 °C +/- 0.5°C

#### **Dipole Calibration uncertainty**

The calibration uncertainty for the dipole is made up of various parameters presented below.

Mechanical 1.22% **Positioning Error Electrical** 1.7% 2.2% Tissue **Dipole Validation** 2.2%

**TOTAL** 8.32% (16.64% K=2)

This page has been reviewed for content and attested to by signature within this document.

# NCL Calibration Laboratories Division of APREL Inc.


# **Electrical Calibration**

## **Electrical Specification 1900MHz**


Forward Reflection

| Tissue Type | Measured Epsilon | Measured Sigma |
|-------------|------------------|----------------|
| Head        | 38.12            | 1.41           |
| Body        | 51.52            | 1.57           |





#### **Body Tissue**




This page has been reviewed for content and attested to by signature within this document.


# NCL Calibration Laboratories Division of APREL Inc.

## **Electrical Specification 1900MHz** Impedance

| Tissue Type | Measured Epsilon | Measured Sigma |
|-------------|------------------|----------------|
| Head        | 38.12            | 1.41           |
| Body        | 51.52            | 1.57           |

#### **Head Tissue**






This page has been reviewed for content and attested to by signature within this document.

Division of APREL Inc.


#### Electrical Specification 1900MHz Standing Wave Ratio

| Tissue Type | Measured Epsilon | Measured Sigma |
|-------------|------------------|----------------|
| Head        | 38.12            | 1.41           |
| Body        | 51.52            | 1.57           |





# **Body Tissue**



This page has been reviewed for content and attested to by signature within this document.

Division of APREL Inc.

#### **Test Equipment**

The test equipment used during Probe Calibration, manufacturer, model number and, current calibration status are listed and located on the main APREL server R:\NCL\Calibration Equipment\Instrument List May 2011.

This page has been reviewed for content and attested to by signature within this document.

# 14 APPENDIX D - TEST SYSTEM VERIFICATIONS SCANS

Test Laboratory: Bay Area Compliance Laboratories Corp. (BACL)

System Performance Test (835 MHz, Body Tissue)

DUT: Dipole 835 MHz; Type: ALS-D-835-S-2; Serial: 180-00564

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: f = 835 MHz;  $\sigma = 0.96$  mho/m;  $\varepsilon_r = 55.9$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

### DASY4 Configuration:

Probe: ES3DV2 - SN3019; ConvF(6.19, 6.19, 6.19); Calibrated: 8/25/2011

• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Electronics: DAE3 Sn456; Calibrated: 3/16/2012


• Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032

Measurement SW: DASY4, V4.7 Build 80; Post processing SW: SEMCAD, V1.8 Build 186

**d =15 mm, Pin = 0.5 W/Area Scan (81x121x1):** Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 5.03 mW/g

**d =15 mm, Pin = 0.5 W/Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 71.2 V/m; Power Drift = -0.131 dB Peak SAR (extrapolated) = 6.87 W/kg

SAR (1 g) = 4.77 mW/g; SAR (10 g) = 3.09 mW/gMaximum value of SAR (measured) = 5.10 mW/g

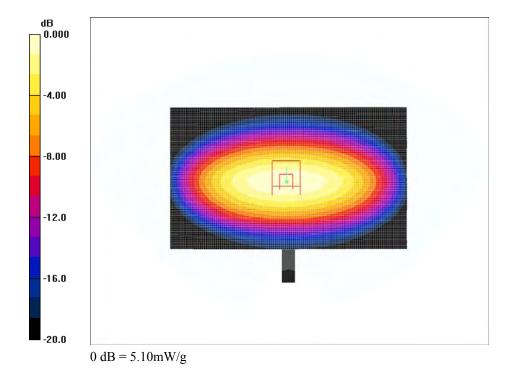

835 MHz Body System Validation

Test Laboratory: Bay Area Compliance Laboratories Corp. (BACL) System Performance Test (835 MHz, Head Tissue)

DUT: Dipole 835 MHz; Type: ALS-D-835-S-2; Serial: 180-00564

Communication System: CW; Frequency: 835 MHz; Duty Cycle: 1:1

Medium parameters used: f = 835 MHz;  $\sigma = 0.89$  mho/m;  $\varepsilon_r = 41.5$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

#### DASY4 Configuration:

• Probe: ES3DV2 - SN3019; ConvF(6.22, 6.22, 6.22); Calibrated: 8/25/2011

• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Electronics: DAE3 Sn456; Calibrated: 3/16/2012


• Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032

Measurement SW: DASY4, V4.7 Build 80; Post processing SW: SEMCAD, V1.8 Build 186

**d =15 mm, Pin = 0.5 W/Area Scan (81x121x1):** Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 5.11 mW/g

**d =15 mm, Pin = 0.5 W/Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 72.5 V/m; Power Drift = -0.135 dB Peak SAR (extrapolated) = 7.03 W/kg

SAR (1 g) = 4.85 mW/g; SAR (10 g) = 3.22 mW/gMaximum value of SAR (measured) = 5.16 mW/g

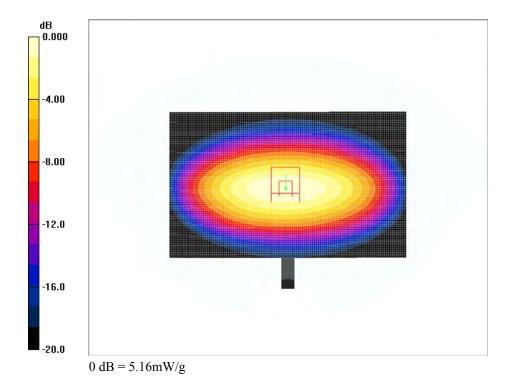

835 MHz Head System Validation

Test Laboratory: Bay Area Compliance Laboratories Corp. (BACL) System Performance Test (1900 MHz, Body Tissue)

DUT: Dipole 1900 MHz; Type: ALS-D-1900-S-2; Serial: 210-00715

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: f = 1900 MHz;  $\sigma = 1.5$  mho/m;  $\varepsilon_r = 52.4$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Flat Section

#### DASY4 Configuration:

Probe: ES3DV2 - SN3019; ConvF(4.38, 4.38, 4.38); Calibrated: 8/25/2011

• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Electronics: DAE3 Sn456; Calibrated: 3/16/2012


• Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032

Measurement SW: DASY4, V4.7 Build 80; Post processing SW: SEMCAD, V1.8 Build 186

**d =10 mm, Pin = 0.5 W/Area Scan (81x121x1):** Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 20.6mW/g

**d =10 mm, Pin = 0.5 W/Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 130.5 V/m; Power Drift = -0.285 dB Peak SAR (extrapolated) = 39.8W/kg

# SAR (1 g) = 19.9 mW/g; SAR (10 g) = 9.56 mW/g Maximum value of SAR (measured) = 21.7 mW/g

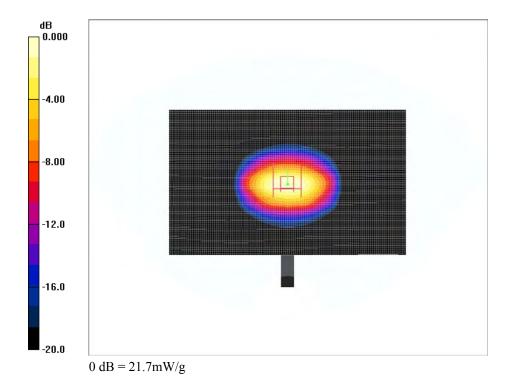

1900 MHz Body System Validation

Test Laboratory: Bay Area Compliance Laboratories Corp. (BACL) System Performance Test (1900 MHz, Head Tissue)

DUT: Dipole 1900 MHz; Type: ALS-D-1900-S-2; Serial: 210-00715

Communication System: CW; Frequency: 1900 MHz; Duty Cycle: 1:1

Medium parameters used: f = 1900 MHz;  $\sigma = 1.38 \text{ mho/m}$ ;  $\varepsilon_r = 39.9$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

#### DASY4 Configuration:

• Probe: ES3DV2 - SN3019; ConvF(4.87, 4.87, 4.87); Calibrated: 8/25/2011

• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Electronics: DAE3 Sn456; Calibrated: 3/16/2012


• Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032

Measurement SW: DASY4, V4.7 Build 80; Post processing SW: SEMCAD, V1.8 Build 186

**d =10 mm, Pin = 0.5 W/Area Scan (81x121x1):** Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 21.9 mW/g

**d =10 mm, Pin = 0.5 W/Zoom Scan (8x8x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 125.9 V/m; Power Drift = -0.255 dB Peak SAR (extrapolated) = 42.8 W/kg

SAR (1 g) = 19.9mW/g; SAR (10 g) = 9.59 mW/g Maximum value of SAR (measured) = 21.2 mW/g

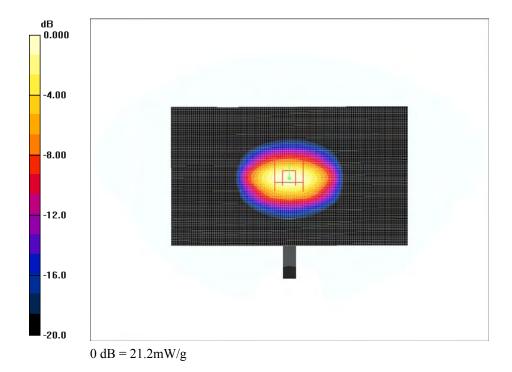

#### 1900 MHz Head System Validation

#### 15 APPENDIX E – SAR SCAN PLOTS

Test Laboratory: Bay Area Compliance Lab Corp. (BACL)

Position A, EUT 1.0 cm Separation to the Flat Phantom (Low Channel)

DUT: Burg Realisation Hong Kong Limited; Type: Watch Phone; Serial: R1206209

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): f = 824.2 MHz;  $\sigma = 0.88 \text{ mho/m}$ ;  $\varepsilon_r = 41.6$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

# DASY4 Configuration:

• Probe: ES3DV2 - SN3019; ConvF(6.22, 6.22, 6.22); Calibrated: 8/25/2011

• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Electronics: DAE3 Sn456; Calibrated: 3/16/2012


• Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032

Measurement SW: DASY4, V4.7 Build 80; Post processing SW: SEMCAD, V1.8 Build 186

**EUT 1.0 cm Separation to Flat Phantom/Area Scan (61x61x1):** Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 0.174 mW/g

**EUT 1.0 cm Separation to Flat Phantom/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 11.6 V/m; Power Drift = 0.005 dB Peak SAR (extrapolated) = 0.231 W/kg

SAR (1 g) = 0.156 mW/g; SAR (10 g) = 0.102 mW/g Maximum value of SAR (measured) = 0.169 mW/g

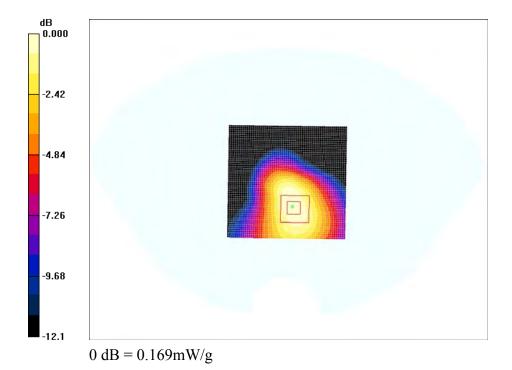

**Plot #1** 

# Position A, EUT 1.0 cm Separation to the Flat Phantom (Middle Channel)

# DUT: Burg Realisation Hong Kong Limited; Type: Watch Phone; Serial: R1206209

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): f = 836.6 MHz;  $\sigma = 0.89 \text{ mho/m}$ ;  $\varepsilon_r = 41.5$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

#### DASY4 Configuration:

• Probe: ES3DV2 - SN3019; ConvF(6.22, 6.22, 6.22); Calibrated: 8/25/2011

• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Electronics: DAE3 Sn456; Calibrated: 3/16/2012


• Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032

Measurement SW: DASY4, V4.7 Build 80; Post processing SW: SEMCAD, V1.8 Build 186

**EUT 1.0 cm Separation to Flat Phantom/Area Scan (61x61x1):** Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 0.188 mW/g

**EUT 1.0 cm Separation to Flat Phantom/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 12.0 V/m; Power Drift = -0.585 dB Peak SAR (extrapolated) = 0.255 W/kg

# SAR (1 g) = 0.169 mW/g; SAR (10 g) = 0.111 mW/gMaximum value of SAR (measured) = 0.182 mW/g

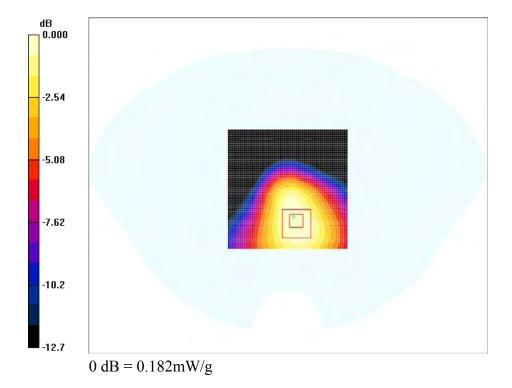

Plot #2

Position A, EUT 1.0 cm Separation to the Flat Phantom (High Channel)

# DUT: Burg Realisation Hong Kong Limited; Type: Watch Phone; Serial: R1206209

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): f = 848.8 MHz;  $\sigma = 0.899 \text{ mho/m}$ ;  $\varepsilon_r = 41.3$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

#### DASY4 Configuration:

• Probe: ES3DV2 - SN3019; ConvF(6.22, 6.22, 6.22); Calibrated: 8/25/2011

• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Electronics: DAE3 Sn456; Calibrated: 3/16/2012


• Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032

Measurement SW: DASY4, V4.7 Build 80; Post processing SW: SEMCAD, V1.8 Build 186

**EUT 1.0 cm Separation to Flat Phantom/Area Scan (61x61x1):** Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 0.179 mW/g

**EUT 1.0 cm Separation to Flat Phantom/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 12.0 V/m; Power Drift = -0.254 dB Peak SAR (extrapolated) = 0.235 W/kg

# SAR (1 g) = 0.162 mW/g; SAR (10 g) = 0.106 mW/gMaximum value of SAR (measured) = 0.174 mW/g

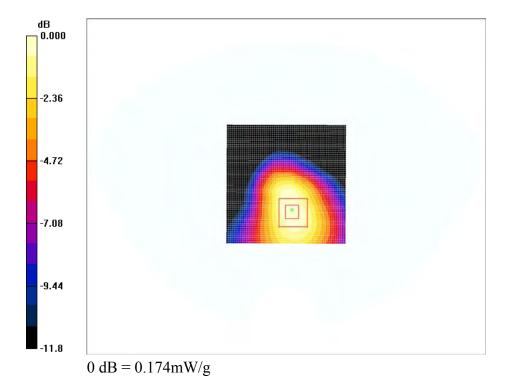

Plot #3

Position B, EUT Back Touch to the Phantom Neck Area (Low Channel)

# DUT: Burg Realisation Hong Kong Limited; Type: Watch Phone; Serial: R1206209

Communication System: GSM 850; Frequency: 824.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): f = 824.2 MHz;  $\sigma = 0.95 \text{ mho/m}$ ;  $\varepsilon_r = 56$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Right Section

#### DASY4 Configuration:

Probe: ES3DV2 - SN3019; ConvF(6.19, 6.19, 6.19); Calibrated: 8/25/2011

• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Electronics: DAE3 Sn456; Calibrated: 3/16/2012


• Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032

Measurement SW: DASY4, V4.7 Build 80; Post processing SW: SEMCAD, V1.8 Build 186

Back Touch to the Phantom/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 1.13 mW/g

**Back Touch to the Phantom/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 0.628 V/m; Power Drift = 4.43 dB Peak SAR (extrapolated) = 2.03 W/kg

SAR (1 g) = 0.880 mW/g; SAR (10 g) = 0.474 mW/gMaximum value of SAR (measured) = 0.955 mW/g

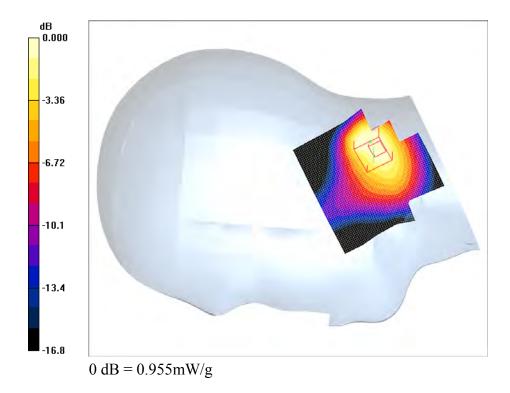

Plot #4

Position B, EUT Back Touch to the Phantom Neck Area (Middle Channel)

# DUT: Burg Realisation Hong Kong Limited; Type: Watch Phone; Serial: R1206209

Communication System: GSM 850; Frequency: 836.6 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): f = 836.6 MHz;  $\sigma = 0.96 \text{ mho/m}$ ;  $\varepsilon_r = 55.9$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Right Section

#### DASY4 Configuration:

Probe: ES3DV2 - SN3019; ConvF(6.19, 6.19, 6.19); Calibrated: 8/25/2011

• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Electronics: DAE3 Sn456; Calibrated: 3/16/2012


• Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032

Measurement SW: DASY4, V4.7 Build 80; Post processing SW: SEMCAD, V1.8 Build 186

Back Touch to the Phantom/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 1.11 mW/g

**Back Touch to the Phantom/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 1.08 V/m; Power Drift = 0.744 dB Peak SAR (extrapolated) = 2.20 W/kg

# SAR (1 g) = 0.922 mW/g; SAR (10 g) = 0.490 mW/gMaximum value of SAR (measured) = 1.07 mW/g

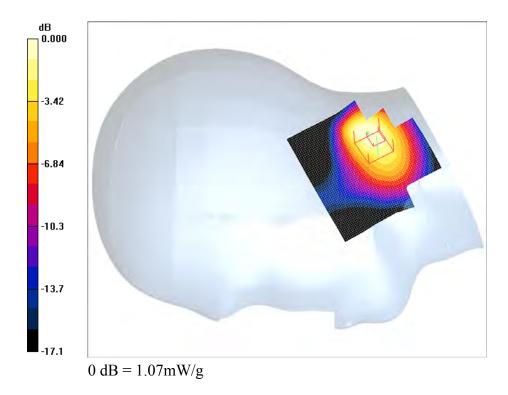

Plot #5

#### Position B, EUT Back Touch to the Phantom Neck Area (High Channel)

# DUT: Burg Realisation Hong Kong Limited; Type: Watch Phone; Serial: R1206209

Communication System: GSM 850; Frequency: 848.8 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): f = 848.8 MHz;  $\sigma = 0.969 \text{ mho/m}$ ;  $\varepsilon_r = 55.8$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Right Section

#### DASY4 Configuration:

Probe: ES3DV2 - SN3019; ConvF(6.19, 6.19, 6.19); Calibrated: 8/25/2011

• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Electronics: DAE3 Sn456; Calibrated: 3/16/2012


• Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032

Measurement SW: DASY4, V4.7 Build 80; Post processing SW: SEMCAD, V1.8 Build 186

Back Touch to the Phantom/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 1.06 mW/g

**Back Touch to the Phantom/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 0.744 V/m; Power Drift = 3.37 dB Peak SAR (extrapolated) = 2.16 W/kg

# SAR (1 g) = 0.893 mW/g; SAR (10 g) = 0.464 mW/gMaximum value of SAR (measured) = 1.03 mW/g

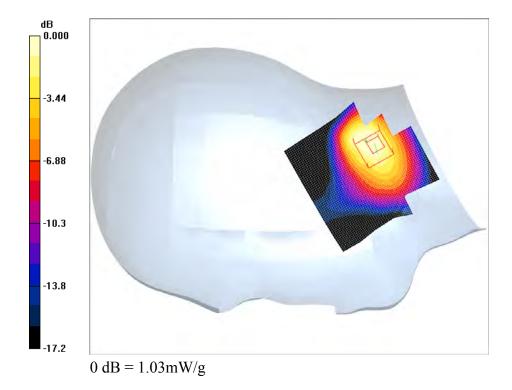

Plot #6

# Test Laboratory: Bay Area Compliance Lab Corp. (BACL) Position B, EUT Back Touch to the Phantom Neck Area (Low Channel) - GPRS 4 Slot DUT: Burg Realisation Hong Kong Limited; Type: Watch Phone; Serial: R1206209

Communication System: GSM 850 4 Slot; Frequency: 824.2 MHz; Duty Cycle: 1:2

Medium parameters used (interpolated): f = 824.2 MHz;  $\sigma = 0.95 \text{ mho/m}$ ;  $\varepsilon_r = 56$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Right Section

#### DASY4 Configuration:

Probe: ES3DV2 - SN3019; ConvF(6.19, 6.19, 6.19); Calibrated: 8/25/2011

• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Electronics: DAE3 Sn456; Calibrated: 3/16/2012


• Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032

Measurement SW: DASY4, V4.7 Build 80; Post processing SW: SEMCAD, V1.8 Build 186

Back Touch to the Phantom/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 1.65 mW/g

**Back Touch to the Phantom/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 2.11V/m; Power Drift = 2.33 dB Peak SAR (extrapolated) = 3.40 W/kg

# SAR (1 g) = 1.42 mW/g; SAR (10 g) = 0.672 mW/gMaximum value of SAR (measured) = 1.61 mW/g

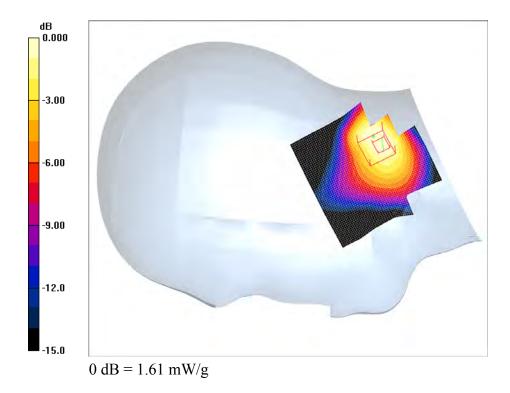

**Plot #7** 

# Test Laboratory: Bay Area Compliance Lab Corp. (BACL) Position B, EUT Back Touch to the Phantom Neck Area (Middle Channel) - GPRS 4 Slot DUT: Burg Realisation Hong Kong Limited; Type: Watch Phone; Serial: R1206209

Communication System: GSM 850 4 Slot; Frequency: 836.6 MHz; Duty Cycle: 1:2

Medium parameters used (interpolated): f = 836.6 MHz;  $\sigma = 0.96 \text{ mho/m}$ ;  $\varepsilon_r = 55.9$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Right Section

#### DASY4 Configuration:

Probe: ES3DV2 - SN3019; ConvF(6.19, 6.19, 6.19); Calibrated: 8/25/2011

• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Electronics: DAE3 Sn456; Calibrated: 3/16/2012


• Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032

Measurement SW: DASY4, V4.7 Build 80; Post processing SW: SEMCAD, V1.8 Build 186

**Back Touch to the Phantom/Area Scan (61x61x1):** Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 1.82 mW/g

**Back Touch to the Phantom/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 2.08 V/m; Power Drift = 0.574 dB Peak SAR (extrapolated) = 3.81 W/kg

# SAR (1 g) = 1.61 mW/g; SAR (10 g) = 0.694 mW/gMaximum value of SAR (measured) = 1.85 mW/g

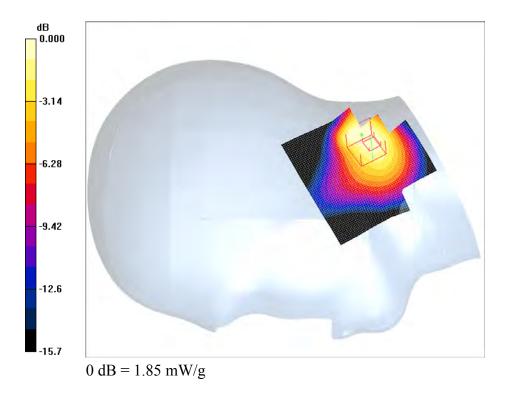

Plot #8

# Test Laboratory: Bay Area Compliance Lab Corp. (BACL) Position B, EUT Back Touch to the Phantom Neck Area (High Channel) - GPRS 4 Slot DUT: Burg Realisation Hong Kong Limited; Type: Watch Phone; Serial: R1206209

Communication System: GSM 850 4 Slot; Frequency: 848.8 MHz; Duty Cycle: 1:2 Medium parameters used (interpolated): f = 848.8 MHz;  $\sigma = 0.969$  mho/m;  $\epsilon_r = 55.8$ ;  $\rho = 1000$  kg/m<sup>3</sup> Phantom section: Right Section


#### DASY4 Configuration:

- Probe: ES3DV2 SN3019; ConvF(6.19, 6.19, 6.19); Calibrated: 8/25/2011
- Sensor-Surface: 4mm (Mechanical Surface Detection)
- Electronics: DAE3 Sn456; Calibrated: 3/16/2012
- Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032
- Measurement SW: DASY4, V4.7 Build 80; Post processing SW: SEMCAD, V1.8 Build 186

Back Touch to the Phantom/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 1.75mW/g

**Back Touch to the Phantom/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 2.38 V/m; Power Drift = 0.216 dB Peak SAR (extrapolated) = 3.69 W/kg

## SAR (1 g) = 1.51 mW/g; SAR (10 g) = 0.688 mW/gMaximum value of SAR (measured) = 1.71 mW/g

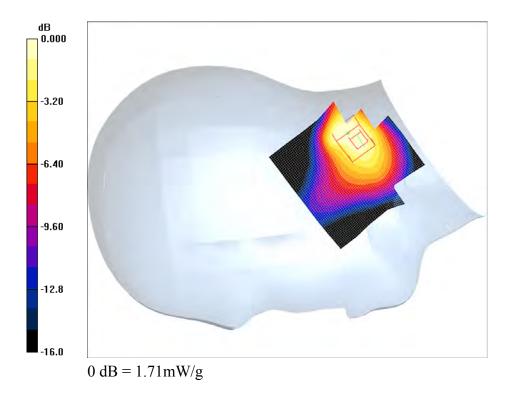

**Plot #9** 

Position A, EUT 1.0 cm Separation to the Flat Phantom (Low Channel)

# DUT: Burg Realisation Hong Kong Limited; Type: Watch Phone; Serial: R1206209

Communication System: PCS 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3

Medium parameters used (extrapolated): f = 1850.2 MHz;  $\sigma = 1.35 \text{ mho/m}$ ;  $\varepsilon_r = 40.1$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

#### DASY4 Configuration:

• Probe: ES3DV2 - SN3019; ConvF(4.87, 4.87, 4.87); Calibrated: 8/25/2011

• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Electronics: DAE3 Sn456; Calibrated: 3/16/2012


• Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032

Measurement SW: DASY4, V4.7 Build 80; Post processing SW: SEMCAD, V1.8 Build 186

**EUT 1.0 cm Separation to Flat Phantom/Area Scan (61x61x1):** Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 0.202 mW/g

**EUT 1.0 cm Separation to Flat Phantom/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 11.3 V/m; Power Drift = -0.114 dB Peak SAR (extrapolated) = 0.331 W/kg

## SAR (1 g) = 0.173 mW/g; SAR (10 g) = 0.093 mW/g Maximum value of SAR (measured) = 0.188 mW/g

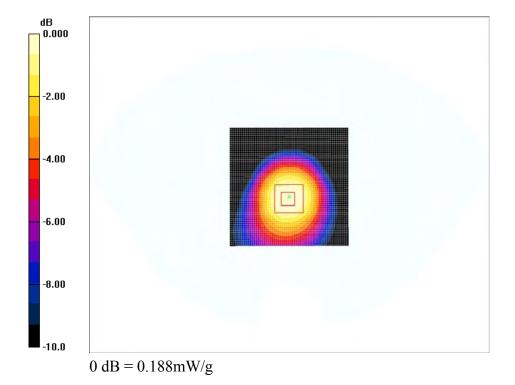

**Plot #10** 

Position A, EUT 1.0 cm Separation to the Flat Phantom (Middle Channel)

# DUT: Burg Realisation Hong Kong Limited; Type: Watch Phone; Serial: R1206209

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3

Medium parameters used (extrapolated): f = 1880 MHz;  $\sigma = 1.37 \text{ mho/m}$ ;  $\varepsilon_r = 40$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

#### DASY4 Configuration:

• Probe: ES3DV2 - SN3019; ConvF(4.87, 4.87, 4.87); Calibrated: 8/25/2011

• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Electronics: DAE3 Sn456; Calibrated: 3/16/2012


• Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032

Measurement SW: DASY4, V4.7 Build 80; Post processing SW: SEMCAD, V1.8 Build 186

**EUT 1.0 cm Separation to Flat Phantom/Area Scan (61x61x1):** Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 0.222 mW/g

**EUT 1.0 cm Separation to Flat Phantom/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 11.8 V/m; Power Drift = -0.022 dB Peak SAR (extrapolated) = 0.365 W/kg

SAR(1 g) = 0.193 mW/g; SAR(10 g) = 0.104 mW/gMaximum value of SAR (measured) = 0.210 mW/g

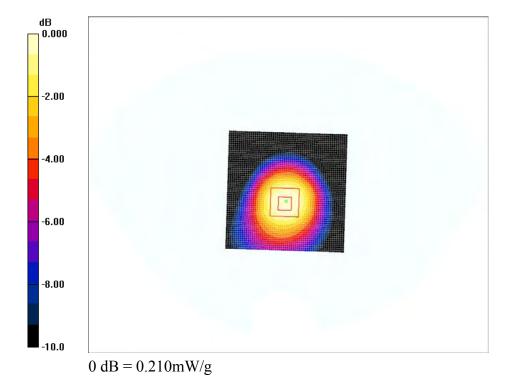

**Plot #11** 

Position A, EUT 1.0cm Separation to the Flat Phantom (High Channel)

## DUT: Burg Realisation Hong Kong Limited; Type: Watch Phone; Serial: R1206209

Communication System: PCS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3

Medium parameters used (interpolated): f = 1909.8 MHz;  $\sigma = 1.39 \text{ mho/m}$ ;  $\varepsilon_r = 39.9$ ;  $\rho = 1000 \text{ kg/m}^3$ 

Phantom section: Flat Section

#### DASY4 Configuration:

• Probe: ES3DV2 - SN3019; ConvF(4.87, 4.87, 4.87); Calibrated: 8/25/2011

• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Electronics: DAE3 Sn456; Calibrated: 3/16/2012


• Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032

Measurement SW: DASY4, V4.7 Build 80; Post processing SW: SEMCAD, V1.8 Build 186

**EUT 1.0 cm Separation to Flat Phantom/Area Scan (61x61x1):** Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 0.197 mW/g

**EUT 1.0 cm Separation to Flat Phantom/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 11.1 V/m; Power Drift = 0.024 dB Peak SAR (extrapolated) = 0.330 W/kg

## SAR (1 g) = 0.172 mW/g; SAR (10 g) = 0.092 mW/gMaximum value of SAR (measured) = 0.186 mW/g

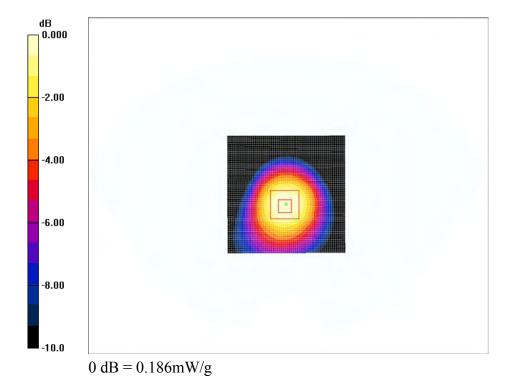

**Plot #12** 

Position B, EUT Back Touch to the Phantom Neck Area (Low Channel)

# DUT: Burg Realisation Hong Kong Limited; Type: Watch Phone; Serial: R1206209

Communication System: PCS 1900; Frequency: 1850.2 MHz; Duty Cycle: 1:8.3 Medium parameters used: f = 1850.2 MHz;  $\sigma = 1.53$  mho/m;  $\epsilon_r = 51.2$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

#### DASY4 Configuration:

• Probe: ES3DV2 - SN3019; ConvF(4.38, 4.38, 4.38); Calibrated: 8/25/2011

• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Electronics: DAE3 Sn456; Calibrated: 3/16/2012


• Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032

Measurement SW: DASY4, V4.7 Build 80; Post processing SW: SEMCAD, V1.8 Build 186

Back Touch to the Phantom/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 2.57 mW/g

**Back Touch to the Phantom/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 1.27 V/m; Power Drift = -3.15 dB Peak SAR (extrapolated) = 4.88 W/kg

## SAR (1 g) = 1.99 mW/g; SAR (10 g) = 0.882 mW/g Maximum value of SAR (measured) = 2.23 mW/g

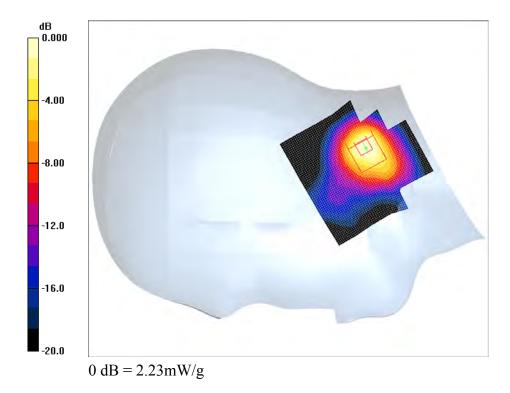

**Plot #13** 

Position B, EUT Back Touch to the Phantom Neck Area (Middle Channel)

# DUT: Burg Realisation Hong Kong Limited; Type: Watch Phone; Serial: R1206209

Communication System: PCS 1900; Frequency: 1880 MHz; Duty Cycle: 1:8.3 Medium parameters used: f = 1880 MHz;  $\sigma$  = 1.57 mho/m;  $\epsilon_r$  = 51.1;  $\rho$  = 1000 kg/m³

Phantom section: Right Section

#### DASY4 Configuration:

Probe: ES3DV2 - SN3019; ConvF(4.38, 4.38, 4.38); Calibrated: 8/25/2011

• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Electronics: DAE3 Sn456; Calibrated: 3/16/2012


• Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032

Measurement SW: DASY4, V4.7 Build 80; Post processing SW: SEMCAD, V1.8 Build 186

Back Touch to the Phantom/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 3.00 mW/g

**Back Touch to the Phantom/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 1.79 V/m; Power Drift = -3.83 dB Peak SAR (extrapolated) = 5.67 W/kg

## SAR (1 g) = 2.28 mW/g; SAR (10 g) = 1.01 mW/gMaximum value of SAR (measured) = 2.53 mW/g

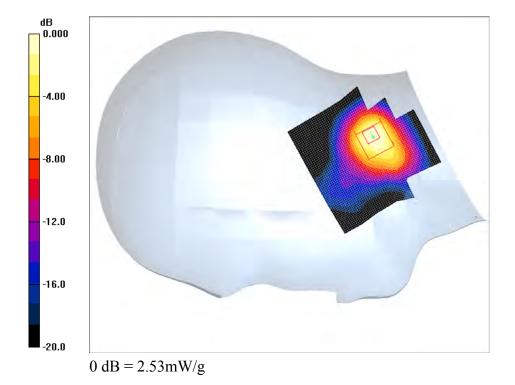

**Plot #14** 

Position B, EUT Back Touch to the Phantom Neck Area (High Channel)

DUT: Burg Realisation Hong Kong Limited; Type: Watch Phone; Serial: R1206209

Communication System: PCS 1900; Frequency: 1909.8 MHz; Duty Cycle: 1:8.3 Medium parameters used: f = 1909.8 MHz;  $\sigma = 1.6$  mho/m;  $\epsilon_r = 51$ ;  $\rho = 1000$  kg/m<sup>3</sup>

Phantom section: Right Section

#### DASY4 Configuration:

• Probe: ES3DV2 - SN3019; ConvF(4.38, 4.38, 4.38); Calibrated: 8/25/2011

• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Electronics: DAE3 Sn456; Calibrated: 3/16/2012


• Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032

Measurement SW: DASY4, V4.7 Build 80; Post processing SW: SEMCAD, V1.8 Build 186

Back Touch to the Phantom/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 2.66 mW/g

**Back Touch to the Phantom/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 1.49 V/m; Power Drift = -4.14 dB Peak SAR (extrapolated) = 5.09 W/kg

## SAR (1 g) = 2.04 mW/g; SAR (10 g) = 0.904 mW/gMaximum value of SAR (measured) = 2.28 mW/g

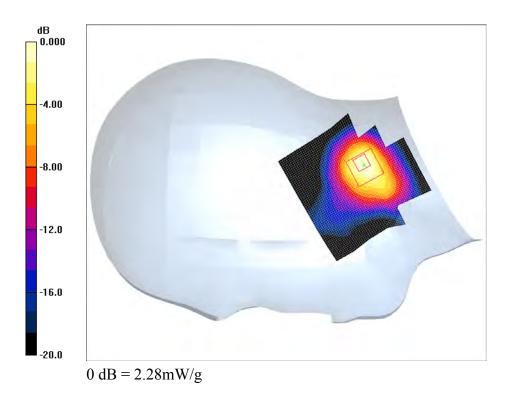

**Plot #15** 

# Test Laboratory: Bay Area Compliance Lab Corp. (BACL) Position B, EUT Back Touch to the Phantom Neck Area (Low Channel) - GPRS 4 Slot DUT: Burg Realisation Hong Kong Limited; Type: Watch Phone; Serial: R1206209

Communication System: PCS 1900 4 Slots; Frequency: 1850.2 MHz; Duty Cycle: 1:2 Medium parameters used: f = 1850.2 MHz;  $\sigma = 1.53$  mho/m;  $\epsilon_r = 51.2$ ;  $\rho = 1000$  kg/m<sup>3</sup> Phantom section: Right Section

#### DASY4 Configuration:

• Probe: ES3DV2 - SN3019; ConvF(4.38, 4.38, 4.38); Calibrated: 8/25/2011

• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Electronics: DAE3 Sn456; Calibrated: 3/16/2012


• Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032

Measurement SW: DASY4, V4.7 Build 80; Post processing SW: SEMCAD, V1.8 Build 186

Back Touch to the Phantom/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 2.94mW/g

**Back Touch to the Phantom/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 1.88 V/m; Power Drift = 1.33 dB Peak SAR (extrapolated) = 5.82 W/kg

SAR (1 g) = 2.72 mW/g; SAR (10 g) = 1.24 mW/gMaximum value of SAR (measured) = 2.96 mW/g

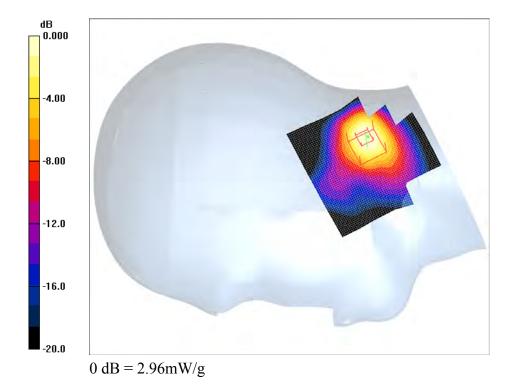

**Plot #16** 

# Test Laboratory: Bay Area Compliance Lab Corp. (BACL) Position B, EUT Back Touch to the Phantom Neck Area (Middle Channel) - GPRS 4 Slot DUT: Burg Realisation Hong Kong Limited; Type: Watch Phone; Serial: R1206209

Communication System: PCS 1900 4 Slots; Frequency: 1880 MHz; Duty Cycle: 1:2 Medium parameters used: f = 1880 MHz;  $\sigma = 1.57$  mho/m;  $\epsilon_r = 51.1$ ;  $\rho = 1000$  kg/m<sup>3</sup> Phantom section: Right Section

#### DASY4 Configuration:

Probe: ES3DV2 - SN3019; ConvF(4.38, 4.38, 4.38); Calibrated: 8/25/2011

• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Electronics: DAE3 Sn456; Calibrated: 3/16/2012


• Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032

Measurement SW: DASY4, V4.7 Build 80; Post processing SW: SEMCAD, V1.8 Build 186

Back Touch to the Phantom/Area Scan (61x61x1): Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 3.18 mW/g

**Back Touch to the Phantom/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 1.26V/m; Power Drift = 3.85 dB Peak SAR (extrapolated) = 6.24 W/kg

SAR (1 g) = 2.95 mW/g; SAR (10 g) = 1.43 mW/g Maximum value of SAR (measured) = 3.24 mW/g

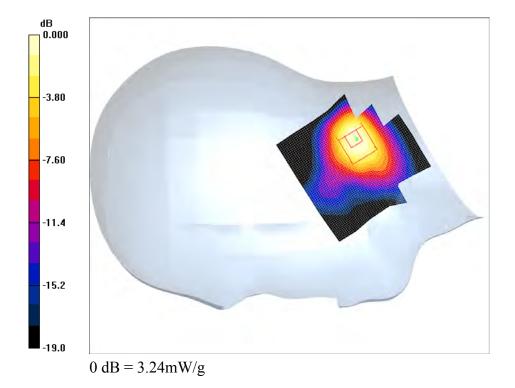

**Plot #17** 

# Test Laboratory: Bay Area Compliance Lab Corp. (BACL) Position B, EUT Back Touch to the Phantom Neck Area (High Channel) - GPRS 4 Slot DUT: Burg Realisation Hong Kong Limited; Type: Watch Phone; Serial: R1206209

Communication System: PCS 1900 4 Slots; Frequency: 1909.8 MHz; Duty Cycle: 1:2 Medium parameters used: f = 1909.8 MHz;  $\sigma = 1.6$  mho/m;  $\epsilon_r = 51$ ;  $\rho = 1000$  kg/m<sup>3</sup> Phantom section: Right Section

## DASY4 Configuration:

• Probe: ES3DV2 - SN3019; ConvF(4.38, 4.38, 4.38); Calibrated: 8/25/2011

• Sensor-Surface: 4mm (Mechanical Surface Detection)

• Electronics: DAE3 Sn456; Calibrated: 3/16/2012


• Phantom: SAM with CRP; Type: Twin SAM; Serial: TP-1032

Measurement SW: DASY4, V4.7 Build 80; Post processing SW: SEMCAD, V1.8 Build 186

**Back Touch to the Phantom/Area Scan (61x61x1):** Measurement grid: dx=15mm, dy=15mm Maximum value of SAR (interpolated) = 2.83 mW/g

**Back Touch to the Phantom/Zoom Scan (7x7x7)/Cube 0:** Measurement grid: dx=5mm, dy=5mm, dz=5mm Reference Value = 1.35V/m; Power Drift = 3.08 dB Peak SAR (extrapolated) = 5.99 W/kg

SAR (1 g) = 2.79 mW/g; SAR (10 g) = 1.38 mW/gMaximum value of SAR (measured) = 2.92 mW/g

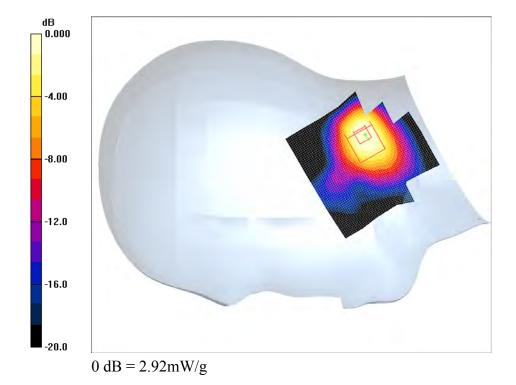


**Plot #18** 

# 16 APPENDIX F – TEST SETUP PHOTOS

# 16.1 Position A, EUT Face to flat phantom with 1.0 cm distance on Speaker mode



# 16.2 Position B, EUT and Band Touch to the Neck Area of SAM Phantom

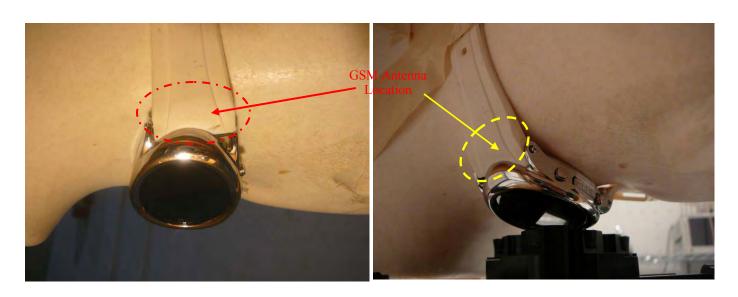


# 17 APPENDIX G – EUT PHOTOS

# 17.1 EUT - Top View



# 17.2 EUT - Bottom View

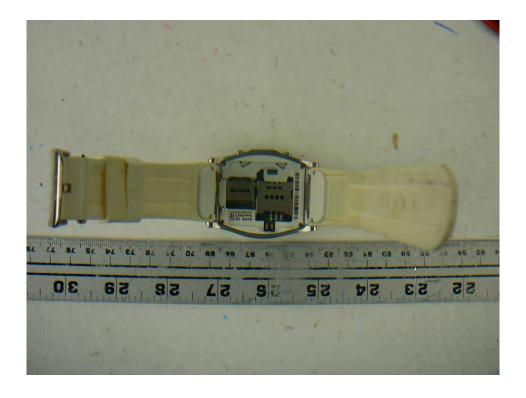

# **17.3 EUT – Side View 1**



# **17.4** EUT – Side View 2



# 17.5 EUT - Battery View



## 18 APPENDIX I - INFORMATIVE REFERENCES

- [1] Federal Communications Commission, \Report and order: Guidelines for evaluating the environmental effects of radiofrequency radiation", Tech. Rep. FCC 96-326, FCC, Washington, D.C. 20554, 1996.
- [2] David L. Means Kwok Chan, Robert F. Cleveland, \Evaluating compliance with FCC guidelines for human exposure to radiofrequency electromagnetic fields", Tech. Rep., Federal Communication Commission, O\_ce of Engineering & Technology, Washington, DC, 1997.
- [3] Thomas Schmid, Oliver Egger, and Niels Kuster, \Automated E-\_eld scanning system for dosimetric assessments", IEEE Transactions on Microwave Theory and Techniques, vol. 44, pp. 105{113, Jan. 1996.
- [4] Niels Kuster, Ralph K.astle, and Thomas Schmid, \Dosimetric evaluation of mobile communications equipment with known precision", IEICE Transactions on Communications, vol. E80-B, no. 5, pp. 645 (652, May 1997.
- [5] CENELEC, \Considerations for evaluating of human exposure to electromagnetic fields (EMFs) from mobile telecommunication equipment (MTE) in the frequency range 30MHz 6GHz", Tech. Rep., CENELEC, European Committee for Electrotechnical Standardization, Brussels, 1997.
- [6] ANSI, ANSI/IEEE C95.1-1992: IEEE Standard for Safety Levels with Respect to Human Exposure to Radio Frequency Electromagnetic Fields, 3 kHz to 300 GHz, The Institute of Electrical and Electronics Engineers, Inc., New York, NY 10017, 1992.
- [7] Katja Pokovic, Thomas Schmid, and Niels Kuster, \Robust setup for precise calibration of E-field probes in tissue simulating liquids at mobile communications frequencies", in ICECOM 97, Dubrovnik, October 15{17, 1997, pp. 120-24.
- [8] Katja Pokovic, Thomas Schmid, and Niels Kuster, \E-field probe with improved isotropy in brain simulating liquids", in Proceedings of the ELMAR, Zadar, Croatia, 23 {25 June, 1996, pp. 172-175.
- [9] Volker Hombach, Klaus Meier, Michael Burkhardt, Eberhard K. uhn, and Niels Kuster, \The depen-dence of EM energy absorption upon human head modeling at 900 MHz", IEEE Transactions on Microwave Theory and Techniques, vol. 44, no. 10, pp. 1865-1873, Oct. 1996.
- [10] Klaus Meier, Ralf Kastle, Volker Hombach, Roger Tay, and Niels Kuster, \The dependence of EM energy absorption upon human head modeling at 1800 MHz", IEEE Transactions on Microwave Theory and Techniques, Oct. 1997, in press.
- [11] W. Gander, Computermathematik, Birkhaeuser, Basel, 1992.
- [12] W. H. Press, S. A. Teukolsky, W. T. Vetterling, and B. P. Flannery, Numerical Recepies in C, The Art of Scientific Computing, Second Edition, Cambridge University Press, 1992. Dosimetric Evaluation of Sample device, month 1998 9
- [13] NIS81 NAMAS, \The treatment of uncertainty in EMC measurement", Tech. Rep., NAMAS Executive, National Physical Laboratory, Teddington, Middlesex, England, 1994.
- [14] Barry N. Taylor and Christ E. Kuyatt, \Guidelines for evaluating and expressing the uncertainty of NIST measurement results", Tech. Rep., National Institute of Standards and Technology, 1994. Dosimetric Evaluation of Sample device, month 1998 10.
- [15] FCC KDB 648474

#### --- END OF REPORT ---