

FCC TEST REPORT
FOR
SHENZHEN JIAYIYANG ELECTRONICS CO.,LTD
Rechargeable and Waterproof Remote Training Collar
Test Model: PET620

List Model No.: /

Prepared for : SHENZHEN JIAYIYANG ELECTRONICS CO.,LTD
Address : Room 1226, No.4, Hongfa Centre Building, (West)
: No,ShenZhen,China

Prepared by : Shenzhen LCS Compliance Testing Laboratory Ltd
Address : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue,
: Bao'an District, Shenzhen, Guangdong , China

Tel : (+86)755-82591330
Fax : (+86)755-82591332
Web : www.LCS-cert.com
Mail : webmaster@LCS-cert.com

Date of receipt of test sample : October 27, 2017
Number of tested samples : 1
Serial number : Prototype
Date of Test : October 27, 2017~ November 09, 2017
Date of Report : November 09, 2017

FCC TEST REPORT**FCC CFR 47 PART 15 C(15.249): 2015****Report Reference No. : LCS171019004AE1**

Date of Issue : November 09, 2017

Testing Laboratory Name..... : Shenzhen LCS Compliance Testing Laboratory Ltd.

Address : 1/F., Xingyuan Industrial Park, Tongda Road, Bao'an Avenue, Bao'an District, Shenzhen, Guangdong, China

Full application of Harmonised standards Testing Location/ Procedure..... : Partial application of Harmonised standards Other standard testing method **Applicant's Name : SHENZHEN JIAYIYANG ELECTRONICS CO.,LTD**

Address : Room 1226, No.4, Hongfa Centre Building, (West) No,ShenZhen,China

Test Specification

Standard..... : FCC CFR 47 PART 15 C(15.249): 2015

Test Report Form No. : LCSEMC-1.0

TRF Originator : Shenzhen LCS Compliance Testing Laboratory Ltd.

Master TRF..... : Dated 2011-03

Shenzhen LCS Compliance Testing Laboratory Ltd. All rights reserved.

This publication may be reproduced in whole or in part for non-commercial purposes as long as the Shenzhen LCS Compliance Testing Laboratory Ltd. is acknowledged as copyright owner and source of the material. Shenzhen LCS Compliance Testing Laboratory Ltd. takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

Test Item Description. : Rechargeable and Waterproof Remote Training Collar

Trade Mark : N/A


Model/ Type reference..... : PET620

Ratings..... : DC 3.7V by li-ion battery(500mAh)
Recharge input: 5V/300mA by adapter**Result : Positive****Compiled by:**

Peter Xiao/ File administrators

Supervised by:

Dick Su/ Technique principal

Approved by:

Gavin Liang/ Manager

FCC -- TEST REPORT

Test Report No. : LCS171019004AE1	<u>November 09, 2017</u> Date of issue
--	---

Type / Model..... : PET620

EUT..... : Rechargeable and Waterproof Remote Training Collar

Applicant..... : SHENZHEN JIAYIYANG ELECTRONICS CO.,LTD

Address..... : Room 1226, No.4, Hongfa Centre Building, (West)
No,ShenZhen,China

Telephone..... : /

Fax..... : /

Manufacturer..... : SHENZHEN ECARE ELECTRONICS CO., LTD

Address..... : 5-6/F., Block B, Huali Industrial Building District 28, Bao An,
Shenzhen Guangdong 518133, China

Telephone..... : /

Fax..... : /

Factory..... : SHENZHEN ECARE ELECTRONICS CO., LTD

Address..... : 5-6/F., Block B, Huali Industrial Building District 28, Bao An,
Shenzhen Guangdong 518133, China

Telephone..... : /

Fax..... : /

Test Result	Positive
--------------------	-----------------

The test report merely corresponds to the test sample.

It is not permitted to copy extracts of these test result without the written permission of the test laboratory.

Revision History

Revision	Issue Date	Revisions	Revised By
000	November 09, 2017	Initial Issue	Gavin Liang

TABLE OF CONTENTS

1. GENERAL INFORMATION	7
1.1. Description of Device (EUT)	7
1.2. Host System Configuration List and Details	7
1.3. External I/O	7
1.4. Description of Test Facility	7
1.5. Statement of the measurement uncertainty.....	7
1.6. Measurement Uncertainty	8
1.7. Description of Test Modes	8
2. TEST METHODOLOGY	9
2.1. EUT Configuration	9
2.2. EUT Exercise.....	9
2.3. General Test Procedures.....	9
3. CONNECTION DIAGRAM OF TEST SYSTEM	10
3.1. Justification	10
3.2. EUT Exercise Software	10
3.3. Special Accessories	10
3.4. Block Diagram/Schematics	10
3.5. Equipment Modifications	10
3.6. Test Setup	10
4. SUMMARY OF TEST RESULTS	11
5. SUMMARY OF TEST EQUIPMENT	12
6. ANTENNA REQUIREMENT	13
6.1. Standard Applicable	13
6.2. Antenna Connected Construction.....	13
7. RADIATED EMISSION MEASUREMENT	14
7.1. Standard Applicable	14
7.2. Measuring Instruments and Setting	15
7.3. Test Procedure	15
7.4. Block Diagram of Test Setup	19
7.5. EUT Operation during Test.....	19
7.6. Test Results	20
8. BANDEGES MEASUREMENT	23
8.1. Standard Applicable	23
8.2. Block Diagram of Test Setup	23
8.3. Test Procedure	23
8.4. Test Results	24
9. 20 DB BANDWIDTH MEASUREMENT	25
9.1. Standard Applicable	25
9.2. Block Diagram of Test Setup	25
9.3. Test Procedure	25
9.4. Test Results	25
10.AC POWER LINE CONDUCTED EMISSIONS	27
10.1 Standard Applicable	27
10.2. Block Diagram of Test Setup	27
10.3. Test Results	27
11. TEST SETUP PHOTOGRAPHS OF EUT	29
12. EXTERIOR PHOTOGRAPHS OF THE EUT	29

13. INTERIOR PHOTOGRAPHS OF THE EUT29

1. GENERAL INFORMATION

1.1. Description of Device (EUT)

EUT	: Rechargeable and Waterproof Remote Training Collar
Test Model	: PET620
Additional Model No.	: /
Model Declaration	: /
Hardware Version	: PET 620V0
Software Version	: HCM620T
Power Supply	: DC 3.7V by battery (500mAh) Recharge Voltage: 5V⎓, 300mA
Channel frequency	: 915MHz
Channel number	: 1 Channel
Modulation Technology	: FSK
Antenna Type and Gain	: External Antenna, 0 dBi(Max.)

1.2. Host System Configuration List and Details

Manufacturer	Description	Model	Serial Number	Certificate
TNS	Adapter	TNS-0503	---	CE

Note: product sales without adapter

1.3. External I/O

I/O Port Description	Quantity	Cable
DC in Port	1	N/A

1.4. Description of Test Facility

Site Description

EMC Lab.

- CNAS Registration Number. is L4595.
- FCC Registration Number. is 254912.
- Industry Canada Registration Number. is 9642A-1.
- ESMD Registration Number. is ARCB0108.
- UL Registration Number. is 100571-492.
- TUV SUD Registration Number. is SCN1081.
- TUV RH Registration Number. is UA 50296516-001
- NVLAP Registration Code is 600167-0
- The 3m-Semi anechoic test site fulfils CISPR 16-1-4 according to ANSI C63.4:2014 and CISPR 16-1-4:2010 SVSWR requirement for radiated emission above 1GHz.

1.5. Statement of the measurement uncertainty

The data and results referenced in this document are true and accurate. The reader is cautioned that there may be errors within the calibration limits of the equipment and facilities. The measurement uncertainty was calculated for all measurements listed in this test report acc. To CISPR 16 – 4 “Specification for radio disturbance and immunity measuring apparatus and methods – Part 4: Uncertainty in EMC Measurements” and is documented in the LCS quality system acc. To DIN EN ISO/IEC 17025. Furthermore, component and process variability of devices similar to that tested may result in additional deviation. The manufacturer has the sole responsibility of continued compliance of the device.

1.6. Measurement Uncertainty

Test Item	Frequency Range	Uncertainty	Note
Radiation Uncertainty :	9KHz~30MHz	±3.10dB	(1)
	30MHz~200MHz	±2.96dB	(1)
	200MHz~1000MHz	±3.10dB	(1)
	1GHz~26.5GHz	±4.00dB	(1)
Conduction Uncertainty :	150kHz~30MHz	±1.63dB	(1)
Power disturbance :	30MHz~300MHz	±1.60dB	(1)

(1). This uncertainty represents an expanded uncertainty expressed at approximately the 95% confidence level using a coverage factor of k=2.

1.7. Description of Test Modes

The EUT operates in the unlicensed ISM band at 902~928MHz. The following operating modes were applied for the related test items. And the new battery is used during the measurement.

The EUT received DC 5.0V by new battery.

All test modes were tested, only the result of the worst case was recorded in the report.

The EUT is considered a portable unit; it was pre-tested on the positioned of each 3 axis. The worst case was found positioned on X-plane. Therefore only the test data of this X-plane was used for radiated emission measurement test.

Mode of Operations	Transmitting Frequency (MHz)
OQPSK	915MHz
For Conducted Emission	
Test Mode	TX Mode
For Radiated Emission	
Test Mode	TX Mode

2. TEST METHODOLOGY

All measurements contained in this report were conducted with ANSI C63.10-2013, American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices

The radiated testing was performed at an antenna-to-EUT distance of 3 meters. All radiated and conducted emissions measurement was performed at Shenzhen LCS Compliance Testing Laboratory Ltd.

2.1. EUT Configuration

The EUT configuration for testing is installed on RF field strength measurement to meet the Commissions requirement and operating in a manner that intends to maximize its emission characteristics in a continuous normal application.

2.2. EUT Exercise

The EUT was operated in the engineering mode to fix the TX frequency that was for the purpose of the measurements.

According to its specifications, the EUT must comply with the requirements of the Section 15.203, 15.205, 15.207, 15.209 and 15.249 under the FCC Rules Part 15 Subpart C.

2.3. General Test Procedures

2.3.1 Conducted Emissions (N/A)

The EUT is placed on the turntable, which is 0.8 m above ground plane. According to the requirements in Section 6.2.1 of ANSI C63.10-2013 Conducted emissions from the EUT measured in the frequency range between 0.15 MHz and 30MHz using Quasi-peak and average detector modes.

2.3.2 Radiated Emissions

The EUT is placed on a turn table, which is 0.8 m above ground plane. The turntable shall rotate 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which varied from 1m to 4m to find out the highest emission. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical. In order to find out the maximum emissions, exploratory radiated emission measurements were made according to the requirements in Section 6.3 of ANSI C63.10-2013

3. CONNECTION DIAGRAM OF TEST SYSTEM

3.1. Justification

The system was configured for testing in a continuous transmit condition.

3.2. EUT Exercise Software

EUT will transmit while power on.

3.3. Special Accessories

N/A

3.4. Block Diagram/Schematics

Please refer to the related document

3.5. Equipment Modifications

Shenzhen LCS Compliance Testing Laboratory Ltd. has not done any modification on the EUT.

3.6. Test Setup

Please refer to the test setup photo.

4. SUMMARY OF TEST RESULTS

FCC Rules	Description Of Test	Result
§15.203	Antenna Requirement	Compliant
§15.207(a)	Conduction Emissions	Compliant
§15.205(a), §15.209(a), §15.249(a), §15.249(c)	Radiated Emissions Measurement	Compliant
§15.249	Band Edges Measurement	Compliant
§15.249, §15.215	20 dB Bandwidth	Compliant

5. SUMMARY OF TEST EQUIPMENT

Instrument	Manufacturer	Model No.	Serial No.	Characteristics	Cal Date	Due Date
EMC Receiver	R&S	ESCS 30	100174	9kHz – 2.75GHz	June 18,2017	June 17,2018
Signal analyzer	Agilent	E4448A(External mixers to 40GHz)	US44300469	9kHz~40GHz	July 16,2017	July 15,2018
LISN	MESS Tec	NNB-2/16Z	99079	9KHz-30MHz	June 18,2017	June 17,2018
LISN (Support Unit)	EMCO	3819/2NM	9703-1839	9KHz-30MHz	June 18,2017	June 17,2018
RF Cable-CON	UTIFLEX	3102-26886-4	CB049	9KHz-30MHz	June 18,2017	June 17,2018
ISN	SCHAFFNER	ISN ST08	21653	9KHz-30MHz	June 18,2017	June 17,2018
3m Semi Anechoic Chamber	SIDT FRANKONIA	SAC-3M	03CH03-HY	30M-1GHz 3m	June 18,2017	June 17,2018
Amplifier	SCHAFFNER	COA9231A	18667	9kHz-2GHz	June 18,2017	June 17,2018
Amplifier	Agilent	8449B	3008A02120	1GHz-26.5GHz	July 16,2017	July 15,2018
Amplifier	MITEQ	AMF-6F-260400	9121372	26.5GHz-40GHz	July 16,2017	July 15,2018
Spectrum Analyzer	Agilent	E4407B	MY41440292	9k-26.5GHz	July 16,2017	July 15,2018
MAX Signal Analyzer	Agilent	N9020A	MY50510140	20Hz~26.5GHz	Oct. 27, 2017	Oct. 26, 2018
Loop Antenna	R&S	HFH2-Z2	860004/001	9k-30MHz	June 18,2017	June 17,2018
By-log Antenna	SCHWARZBECK	VULB9163	9163-470	30MHz-1GHz	June 10,2017	June 09,2018
Horn Antenna	EMCO	3115	6741	1GHz-18GHz	June 10,2017	June 09,2018
Horn Antenna	SCHWARZBECK	BBHA9170	BBHA9170154	15GHz-40GHz	June 10,2017	June 09,2018
RF Cable-R03m	Jye Bao	RG142	CB021	30MHz-1GHz	June 18,2017	June 17,2018
RF Cable-HIGH	SUHNER	SUCOFLEX 106	03CH03-HY	1GHz-40GHz	June 18,2017	June 17,2018
Power Meter	R&S	NRVS	100444	DC-40GHz	June 18,2017	June 17,2018
Power Sensor	R&S	NRV-Z51	100458	DC-30GHz	June 18,2017	June 17,2018
Power Sensor	R&S	NRV-Z32	10057	30MHz-6GHz	June 18,2017	June 17,2018
RF CABLE-1m	JYE Bao	RG142	CB034-1m	20MHz-7GHz	June 18,2017	June 17,2018
RF CABLE-2m	JYE Bao	RG142	CB035-2m	20MHz-1GHz	June 18,2017	June 17,2018
EMC Test software	Audix	E3	N/A	N/A	N/A	N/A

Note: All equipment through GRGT EST calibration

6. ANTENNA REQUIREMENT

6.1. Standard Applicable

According to antenna requirement of §15.203.

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device. The use of a permanently attached antenna or of an antenna that uses a unique coupling to the intentional radiator shall be considered sufficient to comply with the provisions of this Section. The manufacturer may design the unit so that a broken antenna can be re-placed by the user, but the use of a standard antenna jack or electrical connector is prohibited. This requirement does not apply to carrier current devices or to devices operated under the provisions of Sections 15.211, 15.213, 15.217, 15.219, or 15.221. Further, this requirement does not apply to intentional radiators that must be professionally installed, such as perimeter protection systems and some field disturbance sensors, or to other intentional radiators which, in accordance with Section 15.31(d), must be measured at the installation site. However, the installer shall be responsible for ensuring that the proper antenna is employed so that the limits in this Part are not exceeded.

6.2. Antenna Connected Construction

6.2.1. Standard Applicable

According to § 15.203, an intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

6.2.2. Antenna Connector Construction

The directional gains of antenna used for transmitting is 0 dBi, and the antenna is connect to PCB board and no consideration of replacement. Please see EUT photo for details.

6.2.3. Results: Compliance.

7. RADIATED EMISSION MEASUREMENT

7.1. Standard Applicable

15.205 (a) Except as shown in paragraph (d) of this section, only spurious emissions are permitted in any of the frequency bands listed below:

MHz	M Hz	M Hz	G Hz
0.090-0.110	16.42-16.423	399.9-410	4.5-5.15
\1\ 0.495-0.505	16.69475-16.69525	608-614	5.35-5.46
2.1735-2.1905	16.80425-16.80475	960-1240	7.25-7.75
4.125-4.128	25.5-25.67	1300-1427	8.025-8.5
4.17725-4.17775	37.5-38.25	1435-1626.5	9.0-9.2
4.20725-4.20775	73-74.6	1645.5-1646.5	9.3-9.5
6.215-6.218	74.8-75.2	1660-1710	10.6-12.7
6.26775-6.26825	108-121.94	1718.8-1722.2	13.25-13.4
6.31175-6.31225	123-138	2200-2300	14.47-14.5
8.291-8.294	149.9-150.05	2310-2390	15.35-16.2
8.362-8.366	156.52475-156.52525	2483.5-2500	17.7-21.4
8.37625-8.38675	156.7-156.9	2690-2900	22.01-23.12
8.41425-8.41475	162.0125-167.17	3260-3267	23.6-24.0
12.29-12.293.	167.72-173.2	3332-3339	31.2-31.8
12.51975-12.52025	240-285	3345.8-3358	36.43-36.5
12.57675-12.57725	322-335.4	3600-4400	(\2\)
13.36-13.41			

\1\ Until February 1, 1999, this restricted band shall be 0.490-0.510 MHz.

\2\ Above 38.6

According to §15.249 (a): Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental frequency	Field strength of fundamental (millivolts/meter)	Field strength of harmonics (microvolts/meter)
902-928 MHz	50	500
2400-2483.5 MHz	50	500
5725-5875 MHz	50	500
24.0-24.25 GHz	250	2500

* Field strength limits are specified at a distance of 3 meters.

* As shown in §15.35(b), for frequencies above 1000 MHz, the field strength limits in paragraphs (a) and (b) of this section are based on average limits. However, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any condition of modulation. For point-to-point operation under paragraph (b) of this section, the peak field strength shall not exceed 2500 millivolts/meter at 3 meters along the antenna azimuth.

* Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in §15.209, whichever is the lesser attenuation.

7.2. Measuring Instruments and Setting

Please refer to equipment list in this report. The following table is the setting of spectrum analyzer and receiver.

Spectrum Parameter	Setting
Attenuation	Auto
Start Frequency	1000 MHz
Stop Frequency	10 th carrier harmonic
RB / VB (Emission in restricted band)	1MHz / 1MHz for Peak, 1 MHz / 1/B kHz for Average
RB / VB (Emission in non-restricted band)	1MHz / 1MHz for Peak, 1 MHz / 1/B kHz for Average

Receiver Parameter	Setting
Attenuation	Auto
Start ~ Stop Frequency	9kHz~150kHz / RB/VB 200Hz/1KHz for QP/AVG
Start ~ Stop Frequency	150kHz~30MHz / RB/VB 9kHz/30KHz for QP/AVG
Start ~ Stop Frequency	30MHz~1000MHz / RB/VB 120kHz/1MHz for QP

7.3. Test Procedure

1) Sequence of testing 9 kHz to 30 MHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 0.8 m height is used.
- If the EUT is a floor standing device, it is placed on the ground.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions.
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premereasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna height is 0.8 meter.
- At each turntable position the analyzer sweeps with peak detection to find the maximum of all emissions

Final measurement:

- Identified emissions during the premeasurement the software maximizes by rotating the turntable position (0° to 360°) and by rotating the elevation axes (0° to 360°).
- The final measurement will be done in the position (turntable and elevation) causing the highest emissions with QPK detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

2) Sequence of testing 30 MHz to 1 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a table with 0.8 m height is used, which is placed on the ground plane.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height changes from 1 to 3 meter.
- At each turntable position, antenna polarization and height the analyzer sweeps three times in peak to find the maximum of all emissions.

Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter.
- The final measurement will be done with QP detector with an EMI receiver.
- The final levels, frequency, measuring time, bandwidth, antenna height, antenna polarization, turntable angle, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

3) Sequence of testing 1 GHz to 18 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 3 meter.
- The EUT was set into operation.

Premeasurement:

- The turntable rotates from 0° to 315° using 45° steps.
- The antenna is polarized vertical and horizontal.
- The antenna height scan range is 1 meter to 2.5 meter.
- At each turntable position and antenna polarization the analyzer sweeps with peak detection to find the maximum of all emissions.

Final measurement:

- The final measurement will be performed with minimum the six highest peaks.
- According to the maximum antenna and turntable positions of premeasurement the software maximize the peaks by changing turntable position ($\pm 45^\circ$) and antenna movement between 1 and 4 meter. This procedure is repeated for both antenna polarizations.
- The final measurement will be done in the position (turntable, EUT-table and antenna polarization) causing the highest emissions with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, turntable position, EUT-table position, antenna polarization, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement with marked maximum final measurements and the limit will be stored.

4) Sequence of testing above 18 GHz

Setup:

- The equipment was set up to simulate a typical usage like described in the user manual or described by manufacturer.
- If the EUT is a tabletop system, a rotatable table with 1.5 m height is used.
- If the EUT is a floor standing device, it is placed on the ground plane with insulation between both.
- Auxiliary equipment and cables were positioned to simulate normal operation conditions
- The AC power port of the EUT (if available) is connected to a power outlet below the turntable.
- The measurement distance is 1 meter.
- The EUT was set into operation.


Premeasurement:

- The antenna is moved spherical over the EUT in different polarisations of the antenna.

Final measurement:

- The final measurement will be performed at the position and antenna orientation for all detected emissions that were found during the premeasurements with Peak and Average detector.
- The final levels, frequency, measuring time, bandwidth, correction factor, margin to the limit and limit will be recorded. Also a plot with the graph of the premeasurement and the limit will be stored.

7.4. Block Diagram of Test Setup

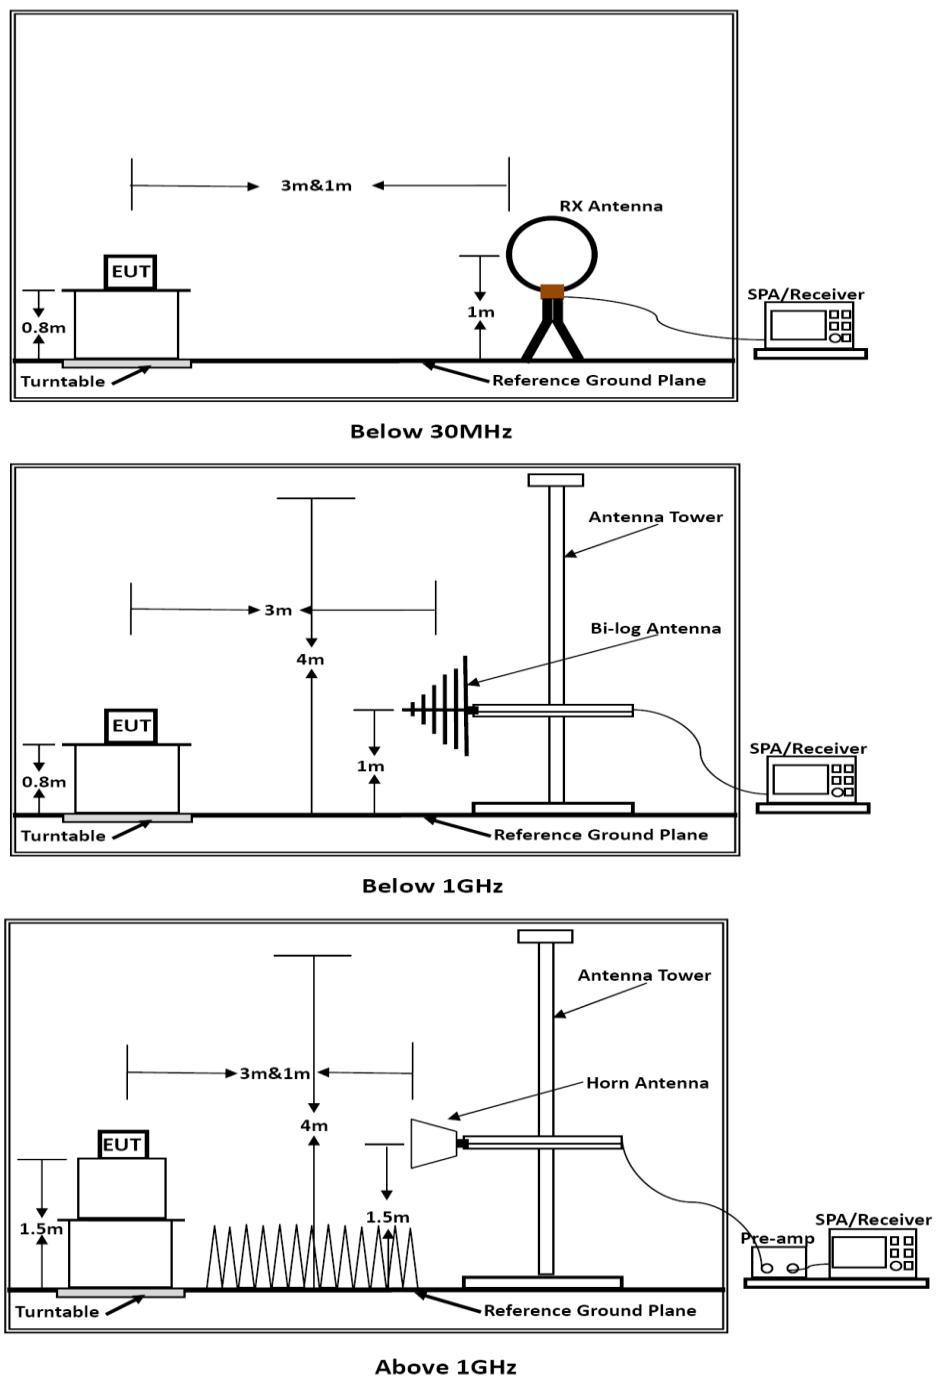

Above 18 GHz shall be extrapolated to the specified distance using an extrapolation factor of 20 dB/decade from 3m to 1m.

Distance extrapolation factor = $20 \log (\text{specific distance [3m]} / \text{test distance [1m]})$ (dB);
 Limit line = specific limits (dBuV) + distance extrapolation factor [6 dB].

7.5. EUT Operation during Test

The EUT was programmed to be in continuously transmitting mode.

7.6. Test Results

Results of Radiated Emissions (9 KHz~30MHz)

Frequency (MHz)	Level (dBuV)	Over Limit (dB)	Over Limit (dBuV)	Remark
---	--	---	---	See Note


Note:

The amplitude of spurious emissions which are attenuated by more than 20 dB below the permissible value has no need to be reported.


Distance extrapolation factor = $40 \log (\text{specific distance} / \text{test distance})$ (dB);
 Limit line = specific limits (dBuV) + distance extrapolation factor.

Results of Radiated Emissions (30MHz~1000MHz)

Horizontal

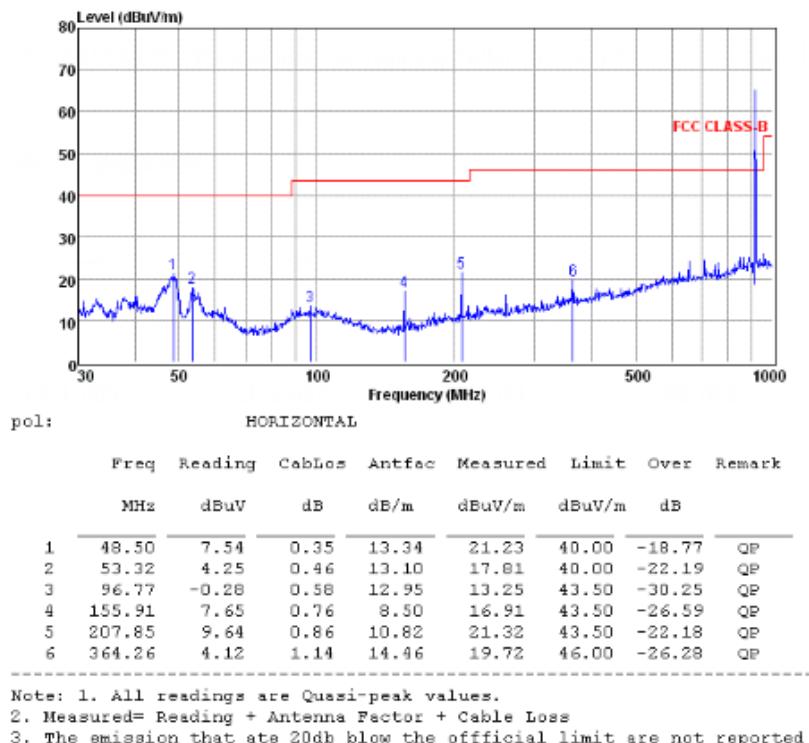

Vertical

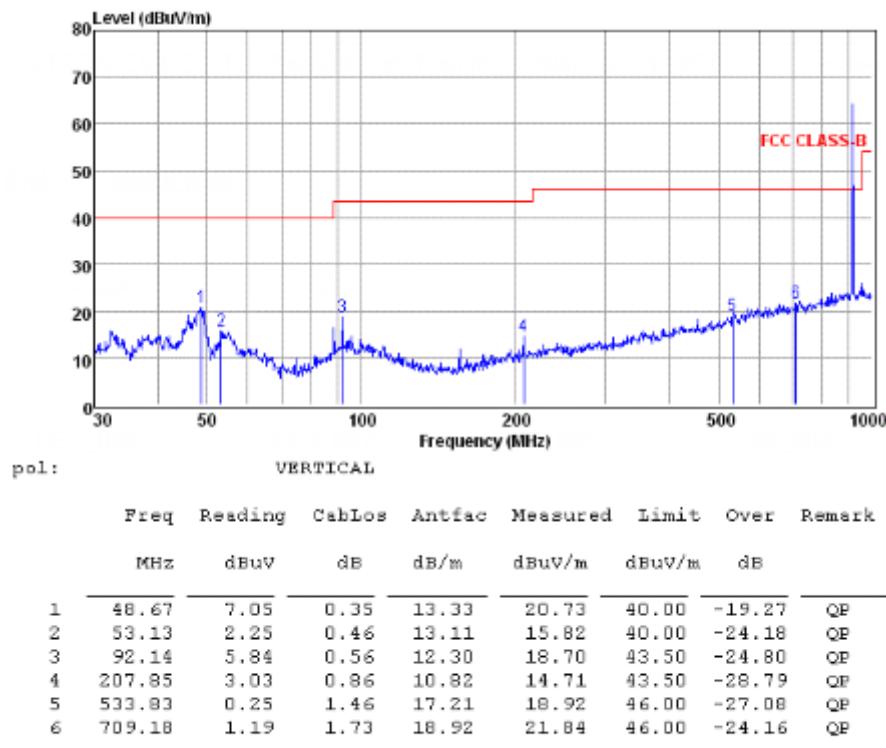

Note: 1. All readings are Quasi-peak values.

2. Measured = Reading + Antenna Factor + Cable Loss

3. The emission that are 20db below the official limit are not reported

Field strength of fundamental:

Frequency (MHz)	Pol.	Measure Result (QP, dBuV/m)	Limit (dBuV/m)	Result
915	H	65.47	94	Pass
915	V	64.52	94	Pass

The worst test result for Tx:

Freq. MHz	Reading dBuv	Ant. Fac dB/m	Pre. Fac. dB	Cab. Loss dB	Measured dBuv/m	Limit dBuv/m	Margin dB	Remark	Pol.
1830.0	47.77	33.01	35.00	3.86	49.64	74	-24.36	Peak	Horizontal
1830.0	32.97	33.01	35.00	3.86	34.84	54	-19.16	Average	Horizontal
2745.0	53.69	33.03	35.02	3.91	55.61	74	-18.39	Peak	Horizontal
2745.0	36.63	33.03	35.02	3.91	38.55	54	-15.45	Average	Horizontal
1830.0	48.65	33.01	35.00	3.86	50.52	74	23.48	Peak	Vertical
1830.0	34.05	33.01	35.00	3.86	35.92	54	18.08	Average	Vertical
2745.0	52.18	33.03	35.02	3.91	54.10	74	19.90	Peak	Vertical
2745.0	36.06	33.03	35.02	3.91	37.98	54	16.02	Average	Vertical

Notes:


1. Measuring frequencies from 9k~10th harmonic (ex. 10GHz), No emission found between lowest internal used/generated frequency to 30 MHz.
2. Radiated emissions measured in frequency range from 9k~10th harmonic (ex. 10GHz) were made with an instrument using Peak detector mode.

8. BANDEDGES MEASUREMENT

8.1. Standard Applicable

Emissions radiated outside of the specified frequency bands, except for harmonics, shall be attenuated by at least 50 dB below the level of the fundamental or to the general radiated emission limits in Section 15.209, whichever is the lesser attenuation.

8.2. Block Diagram of Test Setup

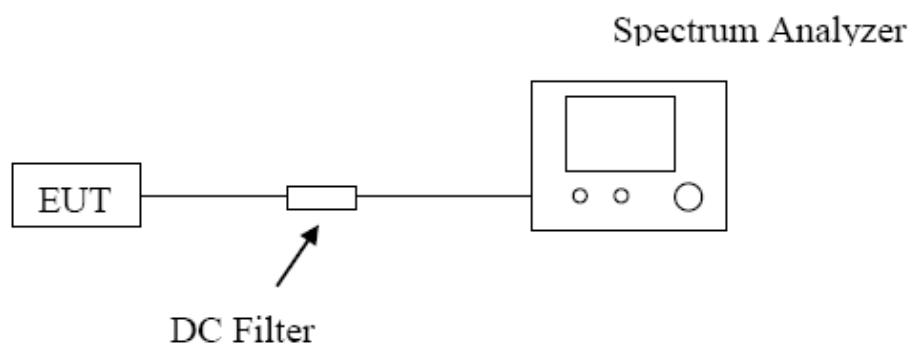

8.3. Test Procedure

The EUT is placed on a turntable, which is 0.8m above the ground plane. The turntable shall be rotated for 360 degrees to determine the position of maximum emission level. EUT is set 3m away from the receiving antenna, which is varied from 1m to 4m to find out the highest emission. Set the spectrum analyzer in the following setting in order to capture the lower and upper band-edges of the emission:

Peak: RBW=120MHz, RBW=300MHz / Sweep=AUTO


Repeat the procedures until the peak versus polarization are measured.

8.4. Test Results

Test Mode	Frequency	Limit	Result
	MHz	dBuV/dBc	
Lowest	902.0	<46dBuV	Pass
Highest	928.0	<46dBuV	Pass

Test Result of Worst Case:

Horizontal and Vertical:

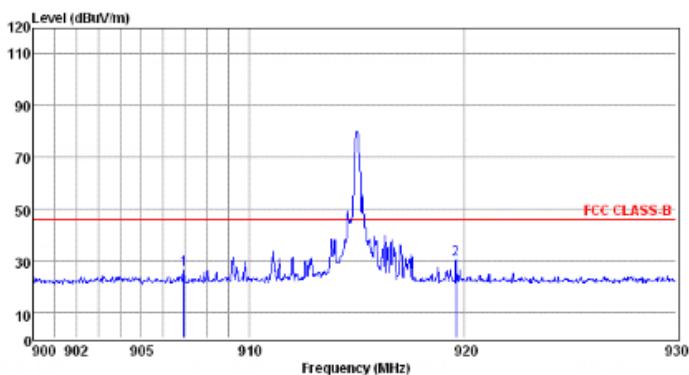


EUT: **915MHz**
pol: HORIZONTAL

	Freq	Reading	CabLoss	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	906.96	3.17	2.03	21.14	26.34	46.00	-19.66	QP
2	919.63	7.23	1.90	21.22	30.35	46.00	-15.65	QP

Note: 1. All readings are Quasi-peak values.
2. Measured= Reading + Antenna Factor + Cable Loss
3. The emission that ate 20db blow the official limit are not reported

Horizontal and Vertical:

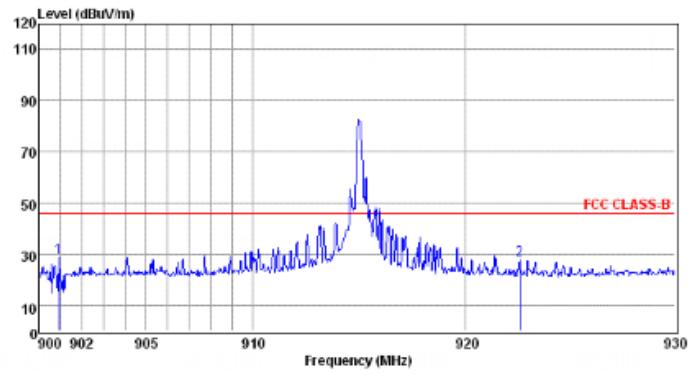

EUT: **915MHz**
pol: VERTICAL

	Freq	Reading	CabLoss	Antfac	Measured	Limit	Over	Remark
	MHz	dBuV	dB	dB/m	dBuV/m	dBuV/m	dB	
1	900.94	5.43	1.88	21.10	28.41	46.00	-17.59	QP
2	922.59	4.39	1.99	21.24	27.62	46.00	-18.38	QP


Note: 1. All readings are Quasi-peak values.
2. Measured= Reading + Antenna Factor + Cable Loss
3. The emission that ate 20db blow the official limit are not reported

9. 20 DB BANDWIDTH MEASUREMENT

9.1. Standard Applicable

According to §15.215

9.2. Block Diagram of Test Setup

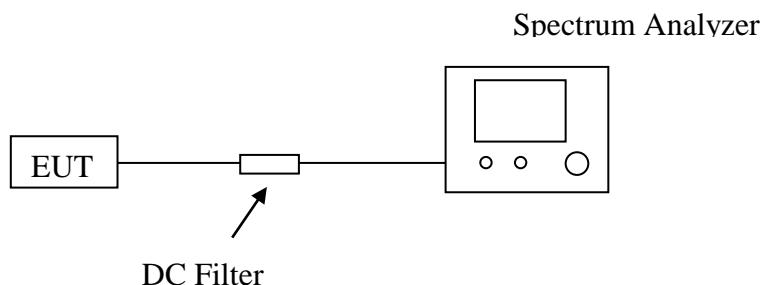

9.3. Test Procedure

Use the following spectrum analyzer settings:

Span = approximately 2 to 3 times the 20 dB bandwidth, centered on a hopping channel

RBW \geq 1% of the 20 dB bandwidth

VBW \geq RBW

Sweep = auto

Detector function = peak

Trace = max hold


The EUT should be transmitting at its maximum data rate. Allow the trace to stabilize. Use the marker-to-peak function to set the marker to the peak of the emission. Use the marker-delta function to measure 20 dB down one side of the emission. Reset the marker-delta function, and move the marker to the other side of the emission, until it is (as close as possible to) even with the reference marker level. The marker-delta reading at this point is the 20 dB bandwidth of the emission. If this value varies with different modes of operation (e.g., data rate, modulation format, etc.), repeat this test for each variation. The limit is specified in one of the subparagraphs of this Section. Submit this plot(s).

9.4. Test Results

Please refer to the following page.

Result: Pass

Test Result Of 20dB Bandwidth Measurement		
Test Frequency (MHz)	20dB Bandwidth (kHz)	Limit (MHz)
915.0	177.8	Non-Specified

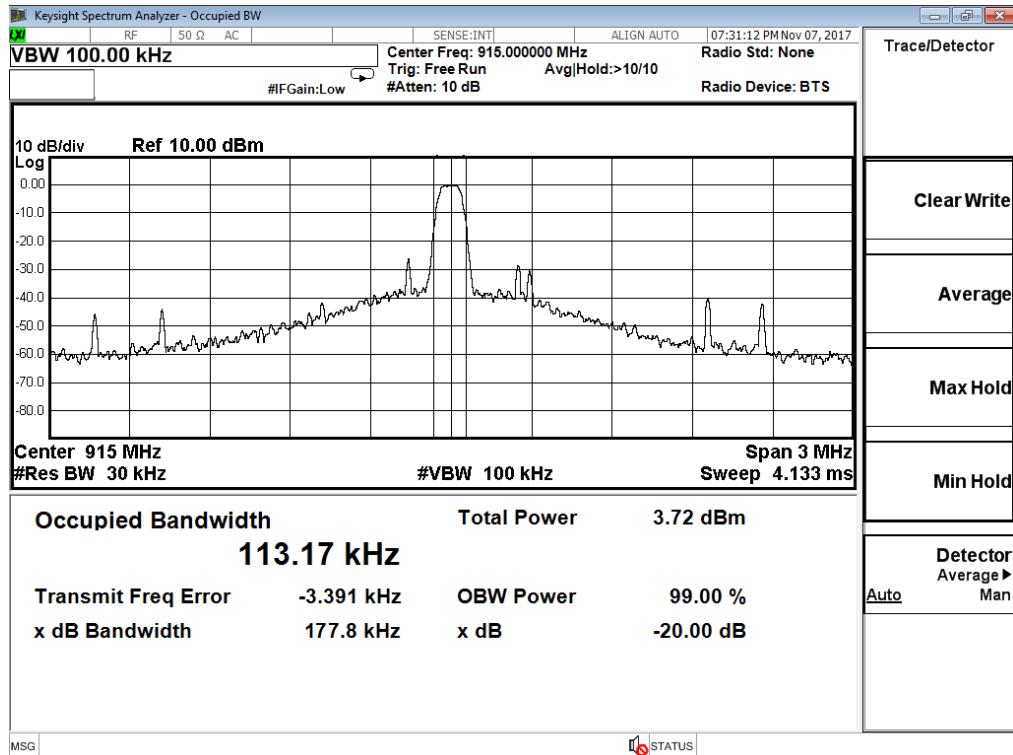

10.AC Power line conducted emissions


10.1 Standard Applicable

According to §15.207 (a): For an intentional radiator which is designed to be connected to the public utility (AC) power line, the radio frequency voltage that is conducted back onto the AC power line on any frequency or frequencies within the band 150 kHz to 30 MHz shall not exceed 250 microvolts (The limit decreases linearly with the logarithm of the frequency in the range 0.15 MHz to 0.50 MHz). The limits at specific frequency range is listed as follows:

Frequency Range (MHz)	Limits (dB μ V)	
	Quasi-peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5	56	46
5 to 30	60	50

* Decreasing linearly with the logarithm of the frequency

10.2. Block Diagram of Test Setup

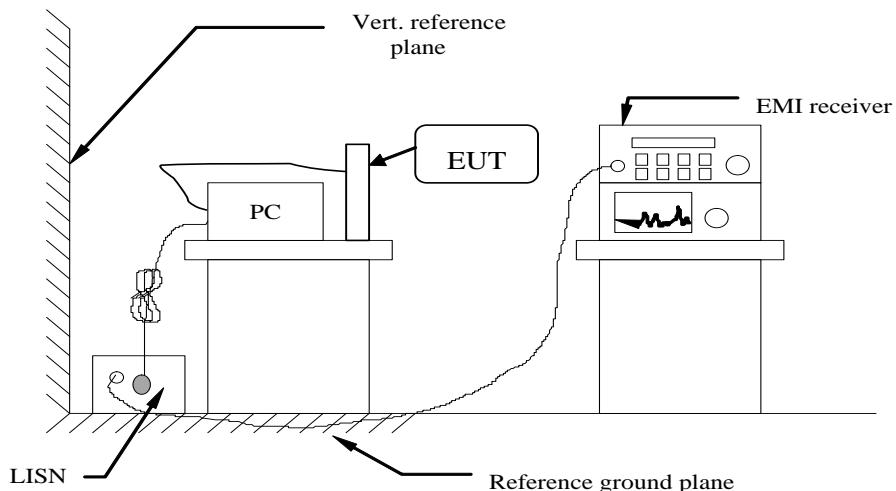


10.3. Test Results

PASS.

The test data please refer to following page.


Test Results for AC 120V/60Hz @ GFSK (worst case)

Temperature	25.3°C	Humidity	52.1%
Test Engineer	Peter Xiao	Configurations	BT

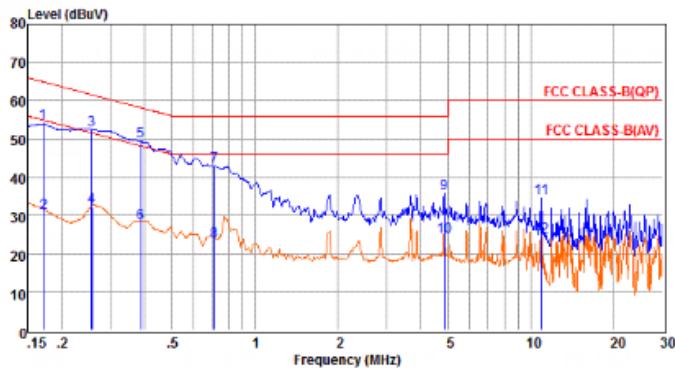

	Freq	Reading	LisnFac	CabLoss	Measured	Limit	Over	Remark
	MHz	dB _{pW}	dB	dB	dB _{pW}	dB _{pW}	dB	
1	0.17	34.37	9.60	0.02	53.99	64.90	-10.91	QP
2	0.17	10.99	9.60	0.02	30.61	64.89	-34.28	Average
3	0.26	32.79	9.63	0.03	52.45	61.56	-9.11	QP
4	0.26	12.54	9.63	0.03	32.20	61.55	-29.35	Average
5	0.39	29.63	9.62	0.04	49.29	58.17	-8.88	QP
6	0.39	8.36	9.62	0.04	28.02	58.16	-30.14	Average
7	0.71	23.25	9.64	0.04	42.93	56.00	-13.07	QP
8	0.71	3.37	9.64	0.04	23.05	56.00	-32.95	Average
9	4.85	16.01	9.65	0.06	35.72	56.00	-20.28	QP
10	4.85	4.74	9.65	0.06	24.45	56.00	-31.55	Average
11	10.90	14.79	9.69	0.08	34.56	60.00	-25.44	QP
12	10.91	4.55	9.69	0.08	24.32	60.00	-35.68	Average

Remarks: 1. Measured = Reading + Lisn Factor +Cable Loss.
 2. The emission levels that are 20dB below the official limit are not reported.

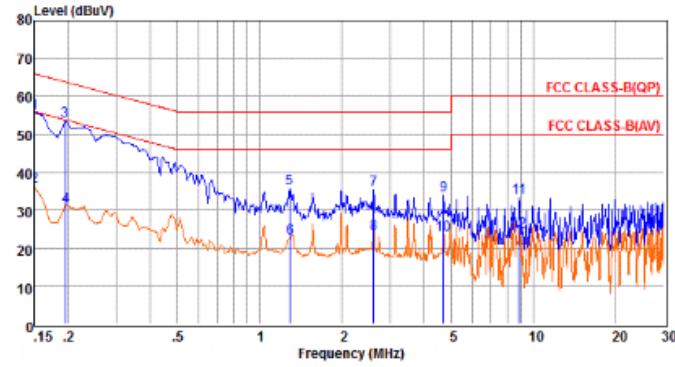

	Freq	Reading	LisnFac	CabLoss	Measured	Limit	Over	Remark
	MHz	dB _{pW}	dB	dB	dB _{pW}	dB _{pW}	dB	
1	0.15	36.00	9.70	0.02	55.72	66.00	-10.28	QP
2	0.15	16.52	9.70	0.02	36.24	65.99	-29.75	Average
3	0.20	33.98	9.60	0.02	53.60	63.80	-10.20	QP
4	0.20	11.39	9.60	0.02	31.01	63.80	-32.79	Average
5	1.29	16.03	9.63	0.05	35.71	56.00	-20.29	QP
6	1.29	2.85	9.63	0.05	22.53	56.00	-33.47	Average
7	2.61	15.56	9.64	0.05	35.25	56.00	-20.75	QP
8	2.61	4.15	9.64	0.05	23.84	56.00	-32.16	Average
9	4.70	14.07	9.66	0.06	33.79	56.00	-22.21	QP
10	4.70	3.85	9.66	0.06	23.57	56.00	-32.43	Average
11	8.87	13.46	9.71	0.08	33.25	60.00	-26.75	QP
12	8.87	4.69	9.71	0.08	24.48	60.00	-35.52	Average

Remarks: 1. Measured = Reading + Lisn Factor +Cable Loss.
 2. The emission levels that are 20dB below the official limit are not reported.

11. TEST SETUP PhotographS of eut

Please refer to separated files for Test Setup Photos of the EUT.

12. EXTERIOR PHOTOGRAPHS OF THE EUT

Please refer to separated files for External Photos of the EUT.

13. INTERIOR PHOTOGRAPHS OF THE EUT

Please refer to separated files for Internal Photos of the EUT.

-----THE END OF REPORT-----