

TRaC Wireless Test Report : 0F3086WUS1

Applicant : Enecsys Ltd

Apparatus : Double Ended Repeater (DER)

Specification(s) : CFR47 Part 15 C :2008 15.247

FCCID : YIWDEREPEATER0001

Purpose of Test : Certification



Authorised by :

: Radio Product Manager

Issue Date : 29th July 2010

Authorised Copy Number : PDF

Contents

Section 1: Introduction	3
1.1 General	3
1.2 Tests Requested By	4
1.3 Apparatus Assessed	5
1.4 Test Result Summary	6
1.5 Notes Relating To The Assessment	7
1.6 Deviations from Test Standards	7
Section 2: Measurement Uncertainty	8
2.1 Application of Measurement Uncertainty	8
2.2 Measurement Uncertainty Values	9
Section 3: Modifications	10
3.1 Modifications Performed During Assessment	10
Appendix A: Formal Emission Test Results	11
A1 6 dB Bandwidth	12
A2 Transmitter Peak Output Power	13
A3 Transmitter Power Spectral Density	14
A4 RF Antenna Conducted Spurious Emissions	15
A5 Transmit Radiated Electric Field Emissions 15.209 and within the Restricted Bands of 15.205	19
A6 Power Line Conducted Emissions	26
A7 Antenna Gain	29
A8 Unintentional Radiated Electric Field Emissions - 15.109	30
Appendix B: Supporting Graphical Data	32
Appendix C: Additional Test and Sample Details	65
Appendix D: Additional Information	71
Appendix E: Calculation of the duty cycle correction factor	73
Appendix F: Photographs and Figures	75
Appendix G: MPE Calculation	83

Section 1:

Introduction

1.1 General

This report contains an assessment of an apparatus against Electromagnetic Compatibility Standards based upon tests carried out on samples submitted to the Laboratory.

Test performed at: TRaC Telecoms & Radio [X]

Unit E
South Orbital Trading Park
Hedon Road
Hull, HU9 1NJ.
United Kingdom.

Telephone: +44 (0) 1482 801801
Fax: +44 (0) 1482 801806

TRaC Telecoms & Radio []

Moss View
Nipe Lane
Up Holland
West Lancashire, WN8 9PY
United Kingdom

Telephone: +44 (0) 1695 556666
Fax: +44 (0) 1695 577077

Email: test@tracglobal.com
Web site: <http://www.tracglobal.com>

Tests performed by: M. E. Leach



Report author: M. E. Leach

This report must not be reproduced except in full without prior written permission from TRaC Telecoms & Radio.

1.2 Tests Requested By

This testing in this report was requested by :

Enecsys Ltd.
Harston Mill
Royston Road
Cambridge
CB22 7GG
United Kingdom

1.3 Apparatus Assessed

The following apparatus was assessed between 26/05/10 and 10/07/10:

Enecsys Double Ended Repeater (DER)

The above equipment was a variant of the Enecsys Double Ended Repeater (DER) that uses the Zigbee standard to communicate with the Enecsys Gateway (GW).

1.4 Test Result Summary

Full details of test results are contained within Appendix A. The following table summarises the results of the assessment.

The statements relating to compliance with the standards below apply ONLY as qualified in the notes and deviations stated in sections 1.5 to 1.6 of this test report.

Full details of test results are contained within Appendix A. The following table summarises the results of the assessment.

Test Type	Regulation	Measurement standard	Result
Radiated spurious emissions (Restricted bands)	Title 47 of the CFR: Part 15 Subpart C; 15.247	ANSI C63.10	Pass
Conducted spurious emissions (Non-restricted bands)	Title 47 of the CFR: Part 15 Subpart C; 15.247	ANSI C63.10	Pass
AC Power conducted emissions	Title 47 of the CFR: Part 15 Subpart C; 15.207	ANSI C63.10	Pass
Occupied Bandwidth	Title 47 of the CFR : Part 15 Subpart C; 15.247(a)(2)	ANSI C63.10	Pass
Conducted Carrier Power	Title 47 of the CFR : Part 15 Subpart C; 15.247(b)	ANSI C63.10	Pass
Power Spectral Density	Title 47 of the CFR : Part 15 Subpart C; 15.247(d)	ANSI C63.10	Pass
Unintentional Radiated Spurious Emissions	Title 47 of the CFR: Part 15 Subpart C; 15.109	ANSI C63.10	Pass
Digital Modulation	Title 47 of the CFR: Part 15 Subpart C; 15.403	-	Pass
RF Safety	Title 47 of the CFR : Part 15 Subpart C; 15.247(b)(5)	-	Pass

1.5 Notes Relating To The Assessment

With regard to this assessment, the following points should be noted:

The results contained in this report relate only to the items tested and were obtained in the period between the date of initial receipt of samples and the date of issue of the report.

The apparatus was set up and exercised using the configurations, modes of operation and arrangements defined in this report only.

Particular operating modes, apparatus monitoring methods and performance criteria required by the standards tested to have been performed except where identified in Section 1.7 of this test report (Deviations from Test Standards).

For emissions testing, throughout this test report, "Pass" indicates that the results for the sample as tested were below the specified limit (refer also to Section 2, Measurement Uncertainty).

Where relevant, the apparatus was only assessed using the monitoring methods and susceptibility criteria defined in this report.

All testing with the exception of testing at the Open Area Test Site was performed under the following environmental conditions:

Temperature	: 17 to 23 °C
Humidity	: 45 to 75 %
Barometric Pressure	: 86 to 106 kPa

All dates used in this report are in the format dd/mm/yy.

This assessment has been performed in accordance with the requirements of ISO/IEC 17025.

1.6 Deviations from Test Standards

There were no deviations from the standards tested to.

Section 2:**Measurement Uncertainty****2.1 Application of Measurement Uncertainty**

The following table contains the measurement uncertainties for measurements

The following procedure is used when determining the result of a measurement :

- (i) If specification limits are not exceeded by the measured result, extended by the positive component of the expanded uncertainty interval at a confidence level of 95%, then a pass result is recorded.
- (ii) Where a specification limit is exceeded by the result even when the result is decreased by the negative component of the expanded uncertainty interval, a fail result is recorded.
- (iii) Where a measured result is below a limit, but by a margin less than the positive measurement uncertainty component, it is not possible to record a pass based on a 95% confidence level. However, the result indicates that a pass result is more probable than a fail result.
- (iv) Where a measured result is above a limit, but by a margin less than the negative measurement uncertainty component, it is not possible to record a fail based on a 95% confidence level. However the result indicates that a fail is more probable than a pass.

2.2 Measurement Uncertainty Values

For test data recorded in accordance with note (iii) of Section 2.1 the following measurement uncertainty was calculated:

Radiated Electric Field Emissions

Quantity Range	Quantity	Expanded Uncertainty
9kHz to 150 kHz	Amplitude dB(μ V/m)	± 1.6 dB
150 kHz to 30 MHz	Amplitude dB(μ V/m)	± 2.1 dB
30MHz to 300MHz Horizontal	Amplitude dB(μ V/m)	± 5.1 dB
30MHz to 300MHz Vertical	Amplitude dB(μ V/m)	± 5.2 dB
300MHz to 1GHz Horizontal	Amplitude dB(μ V/m)	± 5.4 dB
300MHz to 1GHz Vertical	Amplitude dB(μ V/m)	± 5.2 dB
1GHz to 18GHz Horizontal	Amplitude dB(μ V/m)	± 4.4 dB
1GHz to 18GHz Vertical	Amplitude dB(μ V/m)	± 4.4 dB
18GHz to 26.5GHz Horizontal	Amplitude dB(μ V/m)	± 4.2 dB
18GHz to 26.5GHz Vertical	Amplitude dB(μ V/m)	± 4.2 dB
26.5GHz to 40GHz Horizontal	Amplitude dB(μ V/m)	± 4.3 dB
26.5GHz to 40GHz Vertical	Amplitude dB(μ V/m)	± 4.3 dB

Power Line Conducted Emissions

Quantity Range	Quantity	Expanded Uncertainty
9kHz to 150kHz	Amplitude dB(μ V)	± 4.2 dB
150kHz to 30MHz	Amplitude dB(μ V)	± 3.1 dB

Section 3:

Modifications

3.1 Modifications Performed During Assessment

No modifications were performed during the assessment

Appendix A:**Formal Emission Test Results**

Abbreviations used in the tables in this appendix:

Spec	: Specification	ALSR	: Absorber Lined Screened Room
Mod	: Modification	OATS	: Open Area Test Site
		ATS	: Alternative Test Site
EUT	: Equipment Under Test		
SE	: Support Equipment	Ref	: Reference
L	: Live Power Line	Freq	: Frequency
N	: Neutral Power Line	MD	: Measurement Distance
E	: Earth Power Line	SD	: Spec Distance
Pk	: Peak Detector	Pol	: Polarisation
QP	: Quasi-Peak Detector	H	: Horizontal Polarisation
Av	: Average Detector	V	: Vertical Polarisation
CDN	: Coupling & decoupling network		

A1 6 dB Bandwidth

Title 47 of the CFR: Part 15 Subpart (c) 15.247(a)(2) requires the measurement of the bandwidth of the transmission between the -6 dB points on the transmitted spectrum.

Test Details:	
Regulation	Title 47 of the CFR: Part 15 Subpart (c) 15.247(a)(2)
EUT sample number	S01 and S05
Modification state	0
SE in test environment	RFG109
SE isolated from EUT	None
EUT set up	Refer to Appendix C

Channel Frequency (MHz)	Measured 6dB Bandwidth (MHz)	Limit (kHz)	Result
2405	1.622	>500	Pass
2440	1.564	>500	Pass
2475	1.597	>500	Pass

Plots of the 6 dB bandwidth are contained in Appendix B of this test report.

A2 Transmitter Peak Output Power

Carrier power was verified with the EUT transmitting on its lowest, centre and highest carrier frequency in turn.

Test Details:	
Regulation	Title 47 of the CFR: Part15 Subpart (c) 15.247(b)(3)
Measurement standard	ANSI C63.10
EUT sample number	S01 and S05
Modification state	0
SE in test environment	RFG109
SE isolated from EUT	None
EUT set up	Refer to Appendix C

Channel Frequency (MHz)	Peak Carrier Power (W)	Antenna Gain dBi	Radiated Power (W) (EIRP)	Limit (W)	Result
2405	0.022387211	2.0	0.035481338	1.0	Pass
2440	0.021777098	2.0	0.034514374	1.0	Pass
2475	0.020606299	2.0	0.032658783	1.0	Pass

Notes:

Conducted Measurement

Measured Peak Carrier power includes highest gain of any antenna to be used.

Highest Gain of any antenna to be used = 2 dBi

Conducted measurements were performed with a temporary antenna connector provided by the client.

A3 Transmitter Power Spectral Density

Transmitter Power Spectral Density was verified with the EUT transmitting on its lowest, centre and highest carrier frequency in turn.

Test Details:	
Regulation	Title 47 of the CFR: Part15 Subpart (c) 15.247(e)
Measurement standard	ANSI C63.10
EUT sample number	S01 and S05
Modification state	0
SE in test environment	RFG109
SE isolated from EUT	None
EUT set up	Refer to Appendix C

Channel Frequency (MHz)	Antenna port Peak Power Spectral Density (dBm/3kHz)	Antenna Gain dBi	Peak Power Spectral Density (dBm/3kHz)	Limit (dBm/3kHz)	Result
2405	-1.781	2.0	0.219	8.0	Pass
2440	-1.893	2.0	0.107	8.0	Pass
2475	-2.504	2.0	-0.504	8.0	Pass

Notes:

Conducted Measurement

Measured Power Spectral Density includes highest gain of any antenna to be used.

Highest Gain of any antenna to be used = 2 dBi

Conducted measurements were performed with a temporary antenna connector provided by the client.

The resolution bandwidth on the analyser was set to 3kHz and trace set to max hold.

The span is set to 2MHz

The sweep time is 680 seconds (Span/3kHz).

A4 RF Antenna Conducted Spurious Emissions

Measurement of conducted spurious emissions at the antenna port was performed using a peak detector with the RBW set to 100kHz and the VBW>RBW. Frequencies were scanned up through to the 10th harmonic with the EUT transmitting on its lowest, centre and highest carrier frequency in turn.

Test Details: 2405 MHz	
Regulation	Title 47 of the CFR: Part 15 Subpart (c) Clause 15.247(d) and Clause 15.205
Measurement standard	ANSI C63.10
Frequency range	9 kHz to 25 GHz
EUT sample number	S01 and S05
Modification state	0
SE in test environment	RFG109
SE isolated from EUT	None
EUT set up	Refer to Appendix C

The worst case conducted upper band edge emission measurements at the antenna port are listed below with the transmitter at 2405MHz (CH11) :

Ref No.	Measured Freq (MHz)	Det.	Is measured Frequency within the Restricted bands (Y/N)	Measured Peak Conducted power (RBW =100kHz) (dBuV)	15.247(d) Limit (dBuV)	Summary
1	9kHz to 25GHz	Pk	N	No Significant Emissions Within 20dB of the limit	95.2	Pass
2	2400.00	Pk	N	73.28	95.2	Pass
3	2399.917	Pk	N	74.78	95.2	Pass
4	2399.917	(In-band Pk)-(ΔPk Outside the band or band edge)		-41.1dB	54.0	Pass

No further emissions were detected within 20 dB of the test limit.

RF Antenna Conducted Spurious Emissions continued:

Test Details: 2440 MHz	
Regulation	Title 47 of the CFR: Part 15 Subpart (c) Clause 15.247(d) and Clause 15.205
Measurement standard	ANSI C63.10
Frequency range	9 kHz to 25 GHz
EUT sample number	S01 and S05
Modification state	0
SE in test environment	RFG109
SE isolated from EUT	None
EUT set up	Refer to Appendix C

The worst case conducted upper band edge emission measurements at the antenna port are listed below with the transmitter at 2440MHz (CH18) :

Ref No.	Measured Freq (MHz)	Det.	Is measured Frequency within the Restricted bands (Y/N)	Measured Peak Conducted power (RBW =100kHz) (dBuV)	15.247(d) Limit (dBuV)	Summary
1	9kHz to 25GHz	Pk	N	No Significant Emissions Within 20dB of the limit	95.4	Pass

No further emissions were detected within 20 dB of the test limit.

RF Antenna Conducted Spurious Emissions continued:

Test Details: 2475 MHz	
Regulation	Title 47 of the CFR: Part 15 Subpart (c) Clause 15.247(d) and Clause 15.205
Measurement standard	ANSI C63.10
Frequency range	9 kHz to 25 GHz
EUT sample number	S01 and S05
Modification state	0
SE in test environment	RFG109
SE isolated from EUT	None
EUT set up	Refer to Appendix C

The worst case conducted upper band edge emission measurements at the antenna port are listed below with the transmitter at 2475MHz (CH25) :

Ref No.	Measured Freq (MHz)	Det.	Is measured Frequency within the Restricted bands (Y/N)	Measured Peak Conducted power (RBW =100kHz) (dBuV)	15.247(d) Limit (dBuV)	Summary
1	9kHz to 25GHz	Pk	N	No Significant Emissions Within 20dB of the limit	95.8	Pass
2	2483.500	Pk	Y	58.9	95.8	Pass
3	2483.900	Pk	Y	65.3	95.8	Pass
4	2483.900	(In-band Pk)-(ΔPk Outside the band or band edge)		-50.16	54.0	Pass

No further emissions were detected within 20 dB of the test limit.

Notes:

1. The conducted emission limit for emissions outside the restricted bands, defined in 47CFR15.205(a) are based on a transmitted carrier level of 15.247(b). With the EUT transmitting on its lowest, centre and highest carrier frequencies in turn, emissions from the EUT are required to be 20 dB below the level of the highest fundamental as measured within a 100 kHz RBW in accordance with 15.247(d) using a peak detector.
2. The RBW = 100 kHz, Video bandwidth (VBW) > RBW and the radio spectrum was investigated up to the 10th harmonic in accordance 15.33 (a)(1).
3. The measurements at 2400 MHz and 2483.5 MHz were made to ensure band edge compliance.
4. The carrier level was measured whilst varying the supply voltage between 85% and 105% of the nominal supply voltage as required by 15.31(e). No variation in carrier level was observed. All other emissions were at least 20dB below the test limit

The limit outside the restricted band in 100 kHz RBW is defined using the following formula in accordance with 15.247(d):

$$\text{The limit in 100 kHz RBW} = \\ (\text{Maximum Peak Conducted Carrier measured in 100kHz RBW}) - 20\text{dB}$$

Where:

The maximum peak conducted power was measured using a spectrum analyser using a 100kHz resolution bandwidth.

Channel No.	Channel Frequency (MHz)	Measured Peak Carrier (dB μ V)	Measured Peak Carrier -20dB (dB μ V)	Emission Limit In a 100 kHz RBW (dB μ V)
11	2405	115.2	115.2-20	95.2
18	2440	115.4	115.4-20	95.4
25	2475	115.8	115.8-20	95.8

A5 Transmit Radiated Electric Field Emissions 15.209 and within the Restricted Bands of 15.205

Preliminary scans were performed using a peak detector with the RBW = 100kHz below 1GHz and a RBW = 1MHz >1GHz. The radiated electric field emission test applies to spurious emissions and harmonics that fall within the restricted bands listed in Section 15.205. The maximum permitted field strength is listed in Section 15.209. The EUT was set to transmit on its lowest, centre and highest carrier frequency.

The following test site was used for final measurements as specified by the standard tested to:

3m open area test site :

3m alternative test site :

The effect of the EUT set-up on the measurements is summarised in note (c) below.

Test Details: 2405 MHz	
Regulation	Title 47 of the CFR: Part 15 Subpart C; 15.247 Clause 15.205 and 15.209
Measurement standard	ANSI C63.10
Frequency range	30MHz to 25GHz
EUT sample number	S01 and S05
Modification state	0
SE in test environment	None
SE isolated from EUT	RFG636
EUT set up	Refer to Appendix C
Photographs (Appendix F)	Photographs 1 and 2

The worst case radiated emission measurements for spurious emissions:

Ref No.	FREQ. (MHz)	DET	MEAS Rx (dB μ V)	CABLE LOSS (dB)	ANT FACT. (dB/m)	PRE AMP (dB)	FIELD ST'GH (dB μ V/m)	EXTRAP FACT (dB)	FIELD ST'GH (dB μ V/m)	LIMIT (dB μ V/m)
1.	153.440	Pk	41.7	0.6	10.53	26.79	26.04	0	26.04	63.5
2.	153.440	QP	38.8	0.6	10.5	26.79	23.11	0	11.71	43.5
3.	934.000	Pk	27.6	1.6	25.2	27.61	26.79	0	26.79	66.0
4.	934.000	QP	22.0	1.6	25.2	27.61	21.19	0	9.79	46.0
5.	2389.375	Pk	63.62	3.2	28.4	33.75	61.5	0	61.5	74.0
6.	2389.375	Av	52.9	3.2	28.4	33.75	50.8	0	39.4	54.0
7.	2390.000	Pk	32.74	3.2	28.4	0	64.3	0	64.3	74.0
8.	2390.000	Av	22.46	3.2	28.4	0	54.1	0	42.7	54.0
9.	2400.000	Pk	47.24	3.2	28.4	0	78.8	0	78.8	97.3
10.	2400.000	Av	37.27	3.2	28.4	0	68.9	0	57.5	77.3

Note: Average detector field strength values corrected of duty cycle. Please refer to Note 3 and Appendix E.

The worst case radiated emission measurements for spurious emissions continued:

Ref No.	FREQ. (MHz)	DET	MEAS Rx (dB μ V)	CABLE LOSS (dB)	ANT FACT. (dB/m)	PRE AMP (dB)	FIELD ST'GH (dB μ V/m)	EXTRAP FACT (dB)	FIELD ST'GH (dB μ V/m)	LIMIT (dB μ V/m)
11	4808.750	Pk	69.36	3.6	33.2	34.04	72.1	0	72.1	74.0
12	4808.750	Av	59.4	3.6	33.2	34.04	62.2	0	50.8	54.0
13	7213.830	Pk	71.46	4.4	36.0	34.38	77.5	-9.5	68.0	97.3
14	7213.830	Av	62.85	4.4	36.0	34.38	68.9	-9.5	48.0	77.3
15.	9621.976	Pk	65.98	4.7	37.9	34.84	73.7	-9.5	64.2	97.3
16.	9621.976	Av	56.39	4.7	37.9	34.84	64.2	-9.5	43.3	77.3
17.	12027.414	Pk	65.26	5.5	39.0	34.43	75.3	-9.5	65.8	74.0
18.	12027.414	Av	54.98	5.5	39.0	34.43	65.1	-9.5	44.2	54.0
19.	14432.910	Pk	54.67	7.1	41.7	33.53	69.9	-9.5	60.4	97.3
20.	14432.910	Av	44.6	7.1	41.7	33.53	59.9	-9.5	39.0	77.3

Note: Average detector field strength values corrected of duty cycle. Please refer to Note 3 and Appendix E.

Test Details: 2440 MHz	
Regulation	Title 47 of the CFR: Part 15 Subpart (b) Clause 15.209
Measurement standard	ANSI C63.10
Frequency range	30MHz to 25 GHz
EUT sample number	S01 and S05
Modification state	0
SE in test environment	None
SE isolated from EUT	RFG636
EUT set up	Refer to Appendix C
Photographs (Appendix F)	Photographs 1 and 2

The worst case radiated emission measurements for spurious emissions:

Ref No.	FREQ. (MHz)	DET	MEAS Rx (dB μ V)	CABLE LOSS (dB)	ANT FACT. (dB/m)	PRE AMP (dB)	FIELD ST'GH (dB μ V/m)	EXTRAP FACT (dB)	FIELD ST'GH (dB μ V/m)	LIMIT (dB μ V/m)
1.	153.332	Pk	42.2	0.6	10.53	26.79	26.54	0	26.5	63.5
2.	153.332	Qp	38.77	0.6	10.5	26.79	23.08	0	11.7	43.5
3.	942.000	Pk	27.4	1.6	25.4	27.61	26.79	0	26.8	66.0
4.	942.000	Qp	21.71	1.6	25.4	27.61	21.1	0	9.7	46.0
5.	4878.846	Pk	69.55	4.6	33.4	34.06	73.5	0	73.5	74.0
6.	4878.846	Av	60.3	4.6	33.4	34.06	64.2	0	52.8	54.0
7.	7321.511	Pk	64.1	5.9	36.2	34.42	71.8	-9.5	62.3	74.0
8.	7321.511	Av	53.99	5.9	36.2	34.42	61.7	-9.5	40.8	54.0
9.	9757.961	Pk	61.59	6.6	38	34.88	71.3	-9.5	61.8	96.8
10.	9757.961	Av	51.74	6.6	38	34.88	61.5	-9.5	40.6	76.8
11.	12197.539	Pk	64.21	7.8	38.9	34.32	76.6	-9.5	67.1	74.0
12.	12197.539	Av	53.22	7.8	38.9	34.32	65.6	-9.5	44.7	54.0
13.	14637.169	Pk	49.49	9	41.5	33.73	66.3	-9.5	56.8	96.8
14.	14637.169	Av	35.51	9	41.5	33.73	52.3	-9.5	31.4	76.8

Note: Average detector field strength values corrected of duty cycle. Please refer to Note 3 and Appendix E.

Test Details: 2475 MHz	
Regulation	Title 47 of the CFR: Part 15 Subpart (b) Clause 15.209
Measurement standard	ANSI C63.10
Frequency range	30MHz to 25 GHz
EUT sample number	S01 and S05
Modification state	0
SE in test environment	None
SE isolated from EUT	RFG636
EUT set up	Refer to Appendix C
Photographs (Appendix F)	Photographs 1 and 2

The worst case radiated emission measurements for spurious emissions:

Ref No.	FREQ. (MHz)	DET	MEAS Rx (dB μ V)	CABLE LOSS (dB)	ANT FACT. (dB/m)	PRE AMP (dB)	FIELD ST'GH (dB μ V/m)	EXTRAP FACT (dB)	FIELD ST'GH (dB μ V/m)	LIMIT (dB μ V/m)
1.	153.323	Pk	42.5	0.6	10.53	26.79	26.84	0	26.8	63.5
2.	153.323	Qp	39.1	0.6	10.5	26.79	23.41	0	12.0	43.5
3.	930.000	Pk	26.5	1.6	25.1	27.61	25.59	0	25.6	66.0
4.	930.000	Qp	20.7	1.6	25.1	27.61	19.79	0	8.4	46.0
5.	2483.500	Pk	38.72	3.9	28.5	0	71.1	0	71.1	74.0
6.	2483.500	Av	28.03	3.9	28.5	0	60.4	0	49.0	54.0
7.	2487.850	Pk	32.9	4	28.5	0	65.4	0	65.4	74.0
8.	2487.850	Av	22.1	4	28.5	0	54.6	0	43.2	54.0
9.	4954.350	Pk	69.3	4.7	33.6	34.09	73.5	0	73.5	74.0
10.	4954.350	Av	60.4	4.7	33.6	34.09	64.6	0	53.2	54.0
11.	7423.572	Pk	62.14	5.8	36.5	34.45	70	-9.5	60.5	74.0
12.	7423.572	Av	51.57	5.8	36.5	34.45	59.4	-9.5	38.5	54.0
13.	9901.983	Pk	59.9	7.2	38	34.92	70.2	-9.5	60.7	95.9
14.	9901.983	Av	49.56	7.2	38	34.92	59.8	-9.5	38.9	75.9
15.	12377.606	Pk	63.46	6.5	38.8	34.2	74.6	-9.5	65.1	74.0
16.	12377.606	Av	53.3	6.5	38.8	34.2	64.4	-9.5	43.5	54.0
17.	14853.211	Pk	49.74	9.3	41	33.9	66.1	-9.5	56.6	95.9
18.	14853.211	Av	38.94	9.3	41	33.9	55.3	-9.5	34.4	75.9

Note: Average detector field strength values corrected of duty cycle. Please refer to Note 3 and Appendix E.

Test Details: Radiated Carrier (dB μ V/m)	
Regulation	Title 47 of the CFR: Part 15 Subpart (b) Clause 15.209
Measurement standard	ANSI C63.10
Frequency range	2405MHz, 2440MHz and 2475MHz
EUT sample number	S01 and S05
Modification state	0
SE in test environment	None
SE isolated from EUT	RFG636
EUT set up	Refer to Appendix C
Photographs (Appendix F)	Photographs 1 and 2

Ref No.	FREQ. (MHz)	DET	MEAS Rx (dB μ V)	CABLE LOSS (dB)	ANT FACT. (dB/m)	PRE AMP (dB)	FIELD ST'GH (dB μ V/m)	EXTRAP FACT (dB)	FIELD ST'GH (dB μ V/m)	LIMIT (dB μ V/m)
1	2404.487	Pk	85.71	3.2	28.4	0	117.3	0	117.3	137.0
2	2440.500	Pk	84.96	3.3	28.5	0	116.8	0	116.8	137.0
3	2475.525	Pk	84.02	3.4	28.5	0	115.9	0	115.9	137.0

Notes:

- 1 Any testing performed below 30 MHz was performed using a magnetic loop antenna in accordance with ANSI C63.10: section 4.5, Table 1
- 2 In accordance with 15.35(b), above 1 GHz, emissions measured using a peak detector shall not exceed a level 20 dB above the average limit.
- 3 For all the above tables, the average emissions results can be reduced by the 11.4 dB duty cycle correction factor calculated in Appendix E for comparison with the test limit.
- 4 Testing was performed with the EUT orientated in three orthogonal planes and the maximum emissions level recorded. In addition, the EUT antenna was varied within its range of motion in order to maximise emissions.
- 5 For Frequencies below 1 GHz, RBW= 100 kHz, testing was performed with CISPR16 compliant test receiver with QP detector. Above 1 GHz tests were performed using a spectrum analyser using the following settings:

Peak	RBW=VBW= 1MHz
Average	RBW=VBW= 1MHz

These settings as per ANSI C63.10

The upper and lower frequency of the measurement range was decided according to 47 CFR 15:2008 Clause 15.33(a) and 15.33(a)(1).

Limits

Radiated emission limits (47 CFR 15: Clause 15.209) for emissions falling within the restricted bands defined in 15.205(a):

Frequency of emission (MHz)	Field strength μ V/m	Measurement Distance m	Field strength $\text{dB}\mu\text{V/m}$
0.009-0.490	2400/F(kHz)	300	67.6/F (kHz)
0.490-1.705	24000/F(kHz)	30	87.6/F (kHz)
1.705-30	30	30	29.5
30-88	100	3	40.0
88-216	150	3	43.5
216-960	200	3	46.0
Above 960	500	3	54.0

(a) Where results have been measured at one distance, and a signal level displayed at another, the results have been extrapolated using the following formula:

$$\text{Extrapolation (dB)} = 20 \log_{10} \left(\frac{\text{measurement distance}}{\text{specification distance}} \right)$$

The results displayed take into account applicable antenna factors and cable losses.

(b) The levels may have been rounded for display purposes.

(c) The following table summarises the effect of the EUT operating mode, internal configuration and arrangement of cables / samples on the measured emission levels :

	See (i)	See (ii)	See (iii)	See (iv)
Effect of EUT operating mode on emission levels		✓		
Effect of EUT internal configuration on emission levels		✓		
Effect of Position of EUT cables & samples on emission levels		✓		
(i) Parameter defined by standard and / or single possible, refer to Appendix D (ii) Parameter defined by client and / or single possible, refer to Appendix D (iii) Parameter had a negligible effect on emission levels, refer to Appendix D (iv) Worst case determined by initial measurement, refer to Appendix D				

A6 Power Line Conducted Emissions

Previous power line conducted emission measurements were performed with a peak detector in a screened room. The effect of the EUT set-up on the measurements is summarised in note (b).

Where applicable formal measurements of the emissions were performed with a peak, average and/or quasi peak detector. The EUT was set to transmit on its lowest, centre and highest carrier frequency in turn. The formal measurements are detailed below:

Test Details: Transmit mode	
Regulation	Title 47 of the CFR: Part 15 Subpart (c) Clause 15.207
Measurement standard	ANSI C63.10
Frequency range	150kHz to 30MHz
EUT sample number	S01 and S05
Modification state	0
SE in test environment	RFG636
SE isolated from EUT	None
EUT set up	Refer to Appendix C
Photographs (Appendix F)	Photograph 3

The worst-case power line conducted emission measurements are listed below:

Results measured using the peak detector compared to the average limit

Ref No.	Conductor	Freq (MHz)	Result (dBuV)	Spec Limit (dBuV)	Margin (dB)	Result Summary
1	L	0.184	40.1	54.3	-14.2	Pass
2	L	0.242	41.6	52.0	-10.4	Pass
3	L	0.315	38.9	49.8	-10.9	Pass
4	L	0.342	38.1	49.1	-11.0	Pass
5	L	0.600	32.5	46.0	-13.5	Pass
6	L	18.334	27.6	50.0	-22.4	Pass
7	N	0.184	38.4	54.3	-15.9	Pass
8	N	0.242	41.8	52.0	-10.2	Pass
9	N	0.315	35.0	49.8	-14.8	Pass
10	N	0.342	35.4	49.1	-13.7	Pass
11	N	0.600	30.4	46.0	-15.6	Pass
12	N	18.334	32.3	50.0	-17.7	Pass

Test Details: Receive mode	
Regulation	Title 47 of the CFR: Part 15 Subpart (c) Clause 15.107
Measurement standard	ANSI C63.10
Frequency range	150kHz to 30MHz
EUT sample number	S01 and S05
Modification state	0
SE in test environment	RFG636
SE isolated from EUT	None
EUT set up	Refer to Appendix C
Photographs (Appendix F)	Photograph 3

The worst-case power line conducted emission measurements are listed below:

Results measured using the peak detector compared to the average limit

Ref No.	Conductor	Freq (MHz)	Result (dBuV)	Spec Limit (dBuV)	Margin (dB)	Result Summary
1	L	0.184	38.2	54.3	-16.1	Pass
2	L	0.242	40.5	52.0	-11.5	Pass
3	L	0.310	38.4	50.0	-11.6	Pass
4	L	0.347	37.3	49.0	-11.7	Pass
5	L	0.452	30.9	46.8	-15.9	Pass
6	L	9.602	26.8	50.0	-23.2	Pass
7	N	0.184	36.2	54.3	-18.1	Pass
8	N	0.242	41.2	52.0	-10.8	Pass
9	N	0.310	35.1	50.0	-14.9	Pass
10	N	0.347	35.0	49.0	-14.0	Pass
11	N	0.452	28.7	46.8	-18.1	Pass
12	N	9.602	22.3	50.0	-27.7	Pass

Specification limits :

Conducted emission limits (47 CFR 15: Clause 15.207 and 15.107):

Conducted disturbance at the mains ports.

Frequency range MHz	Limits dB μ V	
	Quasi-peak	Average
0.15 to 0.5	66 to 56 ²	56 to 46 ²
0.5 to 5	56	46
5 to 30	60	50

Notes:

1. The lower limit shall apply at the transition frequency.
2. The limit decreases linearly with the logarithm of the frequency in the range 0.15MHz to 0.5MHz.

Notes:

- (a) The levels may have been rounded for display purposes.
- (b) The following table summarises the effect of the EUT operating mode and internal configuration on the measured emission levels :

	See (i)	See (ii)	See (iii)	See (iv)
Effect of EUT operating mode on emission levels		✓		
Effect of EUT internal configuration on emission levels		✓		
(i) Parameter defined by standard and / or single possible, refer to Appendix C (ii) Parameter defined by client and / or single possible, refer to Appendix C (iii) Parameter had a negligible effect on emission levels, refer to Appendix C (iv) Worst case determined by initial measurement, refer to Appendix C				

A7 Antenna Gain

The maximum antenna gain for the antenna types to be used with the EUT, as declared by the client, is 2dBi. (see Appendix D for data sheets)

A8 Unintentional Radiated Electric Field Emissions - 15.109

Preliminary scans were performed using a peak detector with the RBW = 100kHz. The maximum permitted field strength is listed in Section 15.109. The EUT was set to receive mode only on its lowest, centre and highest carrier frequency in turn.

The following test site was used for final measurements as specified by the standard tested to :

3m open area test site :

3m alternative test site :

Test Details: Receive mode	
Regulation	Title 47 of the CFR: Part 15 Subpart (b) Clause 15.109
Measurement standard	ANSI C63.10
Frequency range	30MHz to 25 GHz
EUT sample number	S01 and S05
Modification state	0
SE in test environment	RFG636
SE isolated from EUT	None
EUT set up	Refer to Appendix C
Photographs (Appendix F)	Photographs 1 and 2

Ref No.	FREQ. (MHz)	DET	MEAS Rx (dB μ V)	CABLE LOSS (dB)	ANT FACT. (dB/m)	PRE AMP (dB)	FIELD ST'GH (dB μ V/m)	EXTRAP FACT (dB)	FIELD ST'GH (dB μ V/m)	LIMIT (dB μ V/m)
1.	153.441	Pk	41.2	0.6	10.53	26.79	25.54	0	25.54	63.5
2.	153.441	Qp	39.3	0.6	10.5	26.79	23.61	0	23.61	43.5
3	929.000	Pk	26.7	1.6	25	27.61	25.69	0	25.69	66.0
4	929.000	Qp	20.4	1.6	25	27.61	19.39	0	19.39	46.0
5	4838.252	Pk	42.59	4.5	33.3	34.05	46.3	-9.5	36.8	74.0
6	4838.252	Av	33.41	4.5	33.3	34.05	37.2	-9.5	27.7	54.0

No further spurious emissions within 20 dB of the test limit were detected.

Specification limits :

The upper frequency of the measurement range was decided according to 47 CFR 15:2008 Clause 15.33.

Radiated emission limits (47 CFR 15:2008 Clause 15.109):

Except for a Class A digital device, the field strength of radiated emissions from unintentional radiators at a distance of 3m shall not exceed the following values:

Frequency of emission (MHz)	Field strength $\mu\text{V/m}$	Field strength $\text{dB}\mu\text{V/m}$
30-88	100	40.0 (quasi-peak)
88-216	150	43.5 (quasi-peak)
216-960	200	46.0 (quasi-peak)
960-1000	500	54.0 (quasi-peak)
Above 1000	500	54.0 (average)
Above 1000	-	74.0 (peak)

Notes:

(a) Where results have been measured at one distance, and a signal level displayed at another, the results have been extrapolated using the following formula:

$$\text{Extrapolation (dB)} = 20 \log_{10} \left(\frac{\text{measurement distance}}{\text{specification distance}} \right)$$

The results displayed take into account applicable antenna factors and cable losses.

(b) The levels may have been rounded for display purposes.

(c) The following table summarises the effect of the EUT operating mode, internal configuration and arrangement of cables / samples on the measured emission levels :

	See 1)	See 2)	See 3)	See 4)
Effect of EUT operating mode on emission levels		✓		
Effect of EUT internal configuration on emission levels		✓		
Effect of Position of EUT cables & samples on emission levels		✓		
1) Parameter defined by standard and / or single possible. 2) Parameter defined by client and / or single possible. 3) Parameter had a negligible effect on emission levels. 4) Worst case determined by initial measurement.				


Appendix B:

Supporting Graphical Data


This appendix contains graphical data obtained during testing.


Notes:

- (a) The radiated electric field emissions and conducted emissions graphical data in this appendix is preview data. For details of formal results, refer to Appendix A and Appendix B.
- (b) The time and date on the plots do not necessarily equate to the time of the test.
- (c) Where relevant, on power line conducted emission plots, the limit displayed is the average limit, which is stricter than the quasi peak limit.
- (d) Appendix C details the numbering system used to identify the sample and its modification state.
- (e) The plots presented in this appendix may not be a complete record of the measurements performed, but are a representative sample, relative to the final assessment.

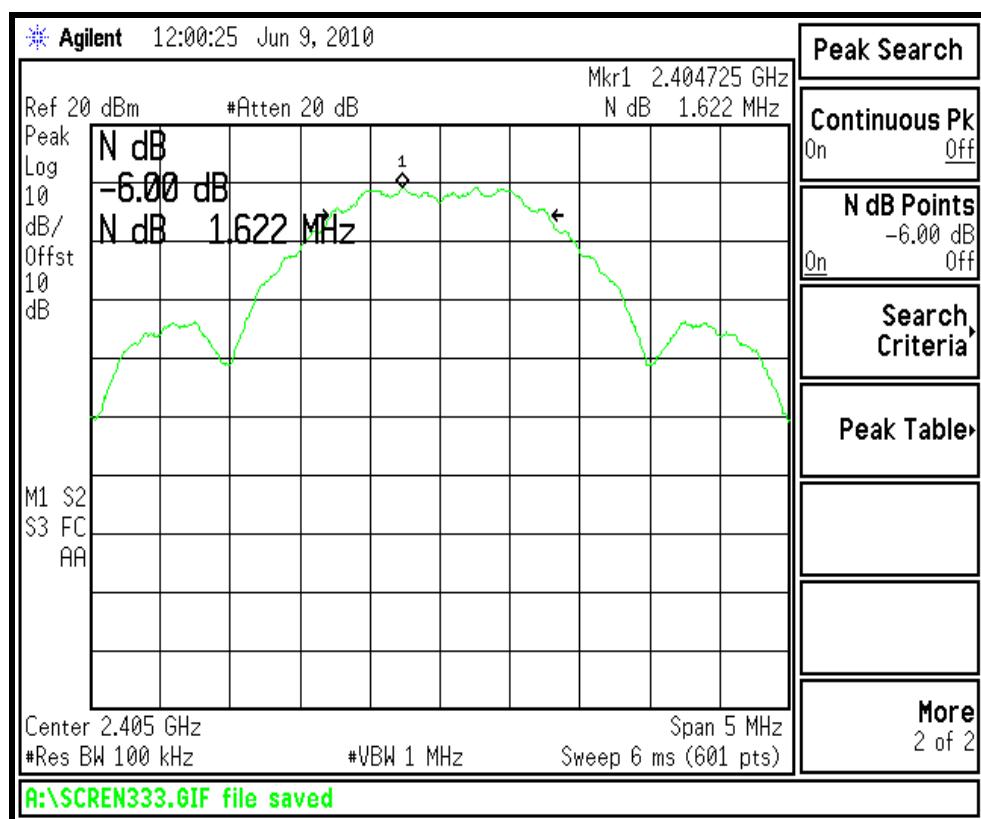


6dB Bandwidth: Channel 11 2405MHz

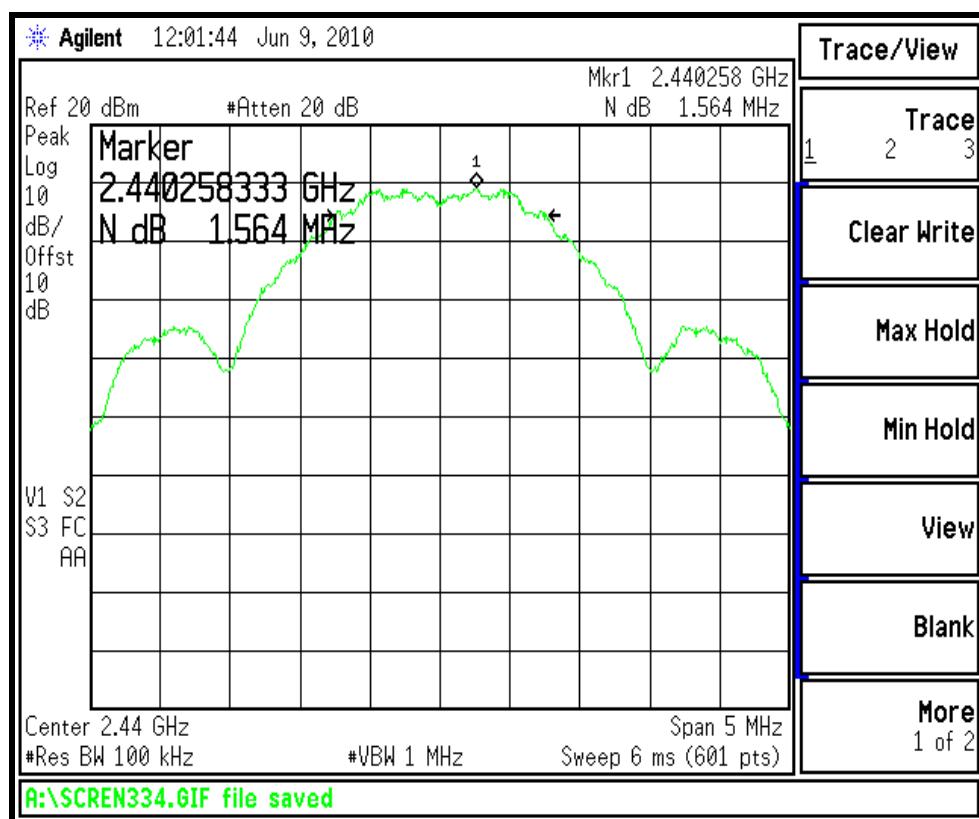


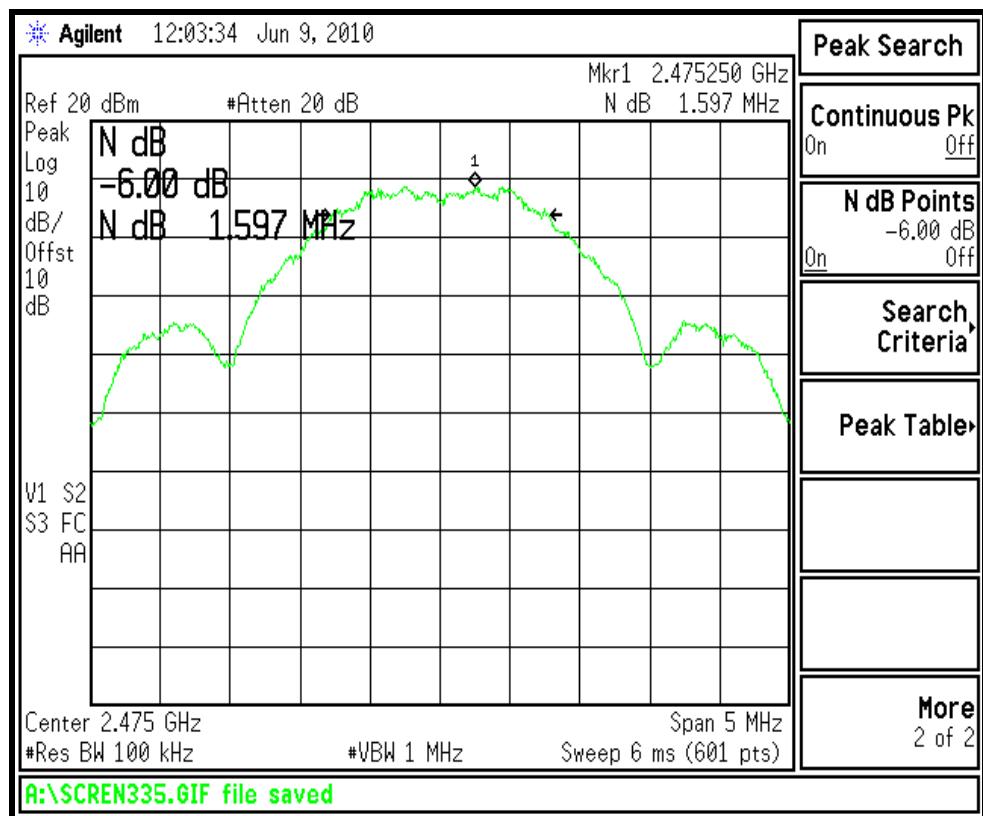


6dB Bandwidth: Channel 2475MHz

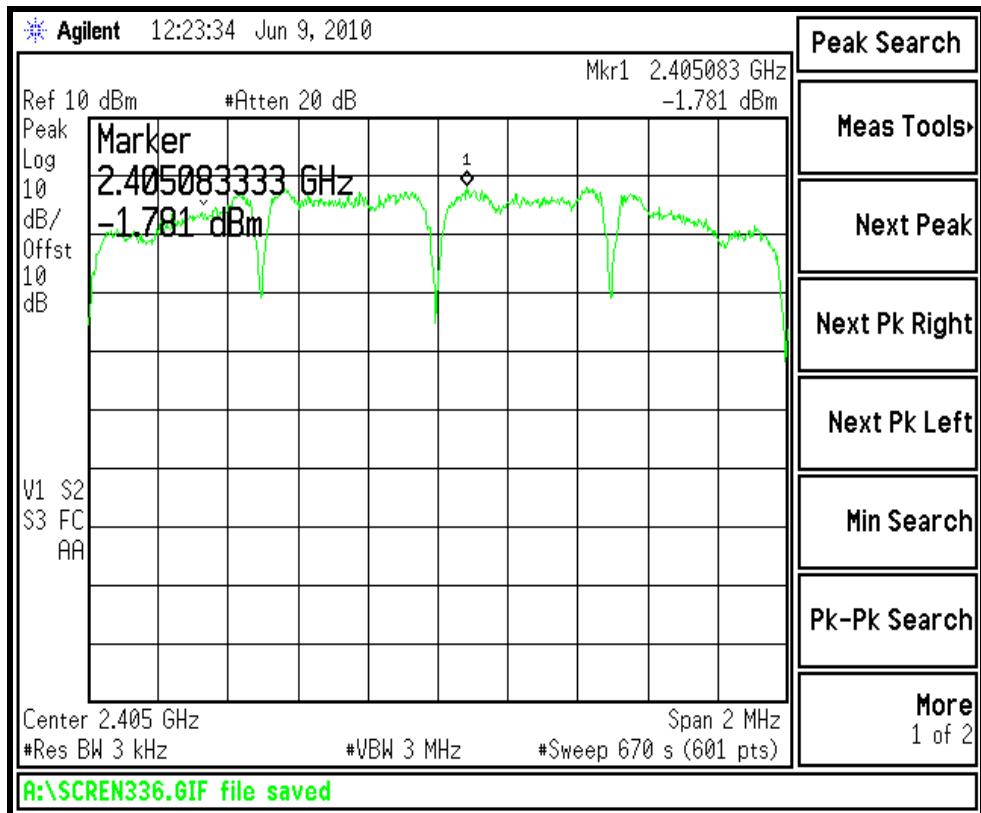


Power Spectral Density: Channel 11 2405MHz

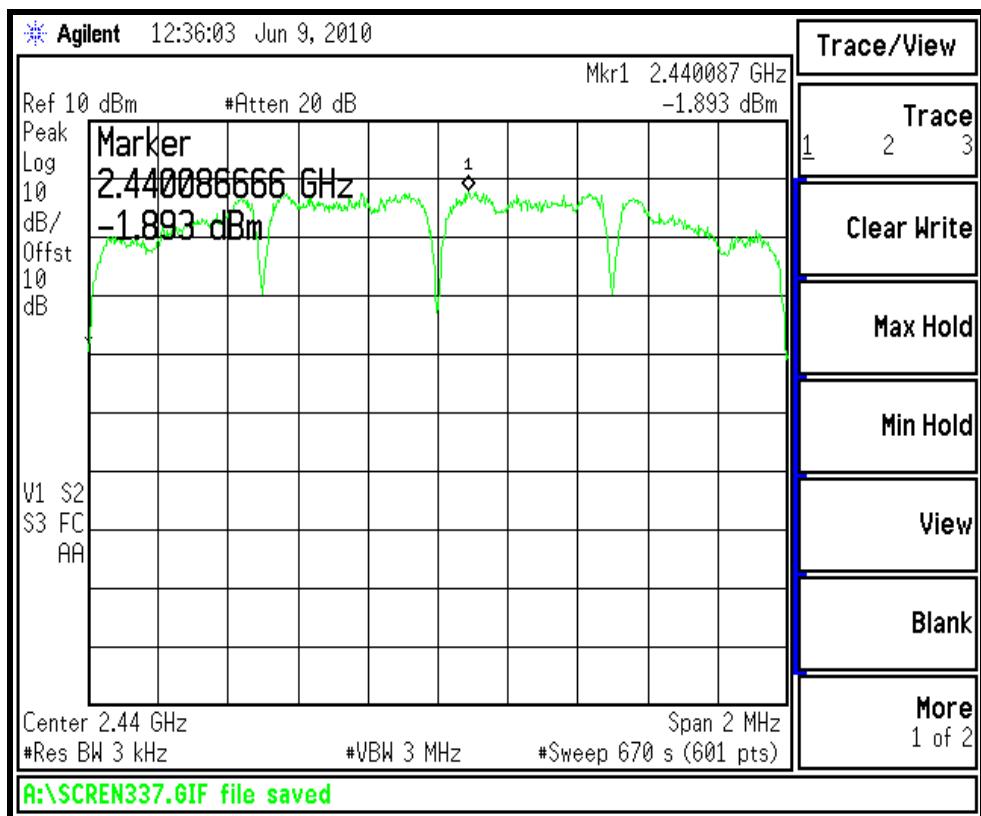


Power Spectral Density: Channel 18 2440MHz

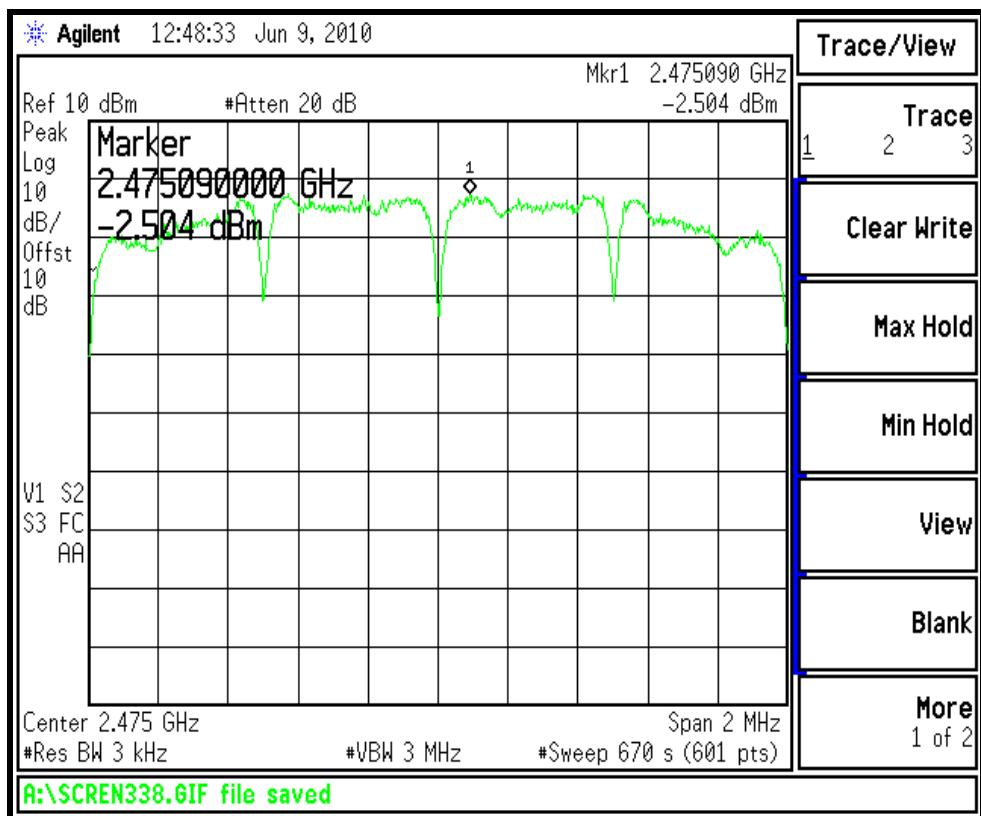


Power Spectral Density: Channel 25 2475MHz

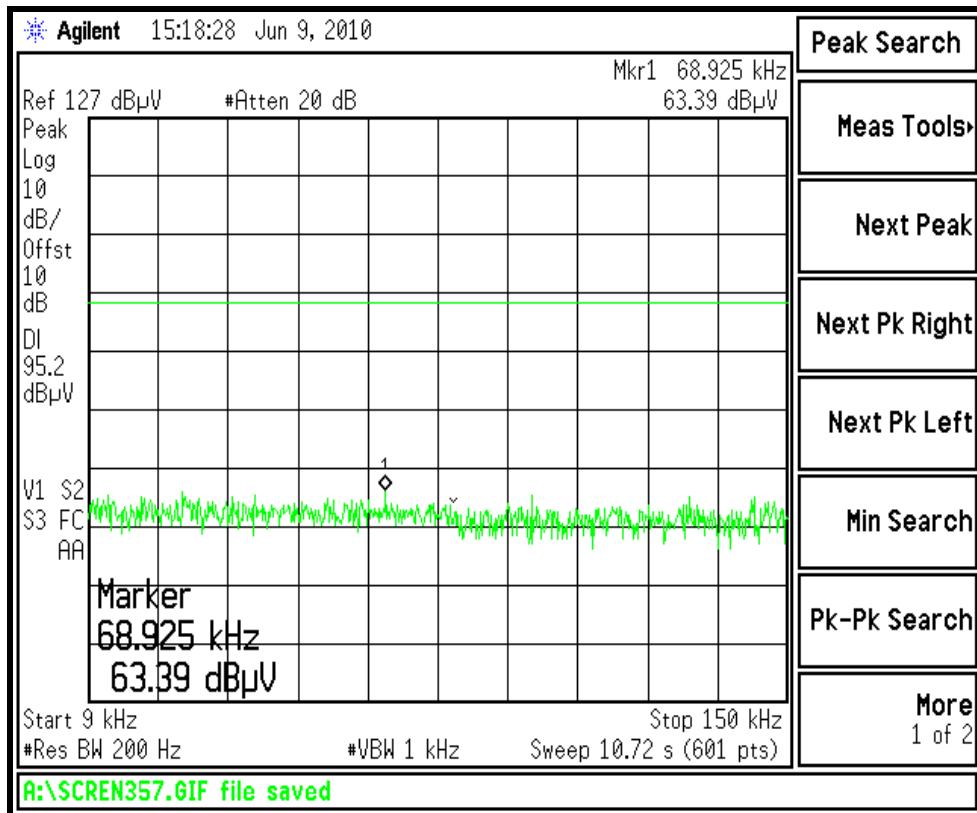


Conducted Emissions Channel 11 2405MHz

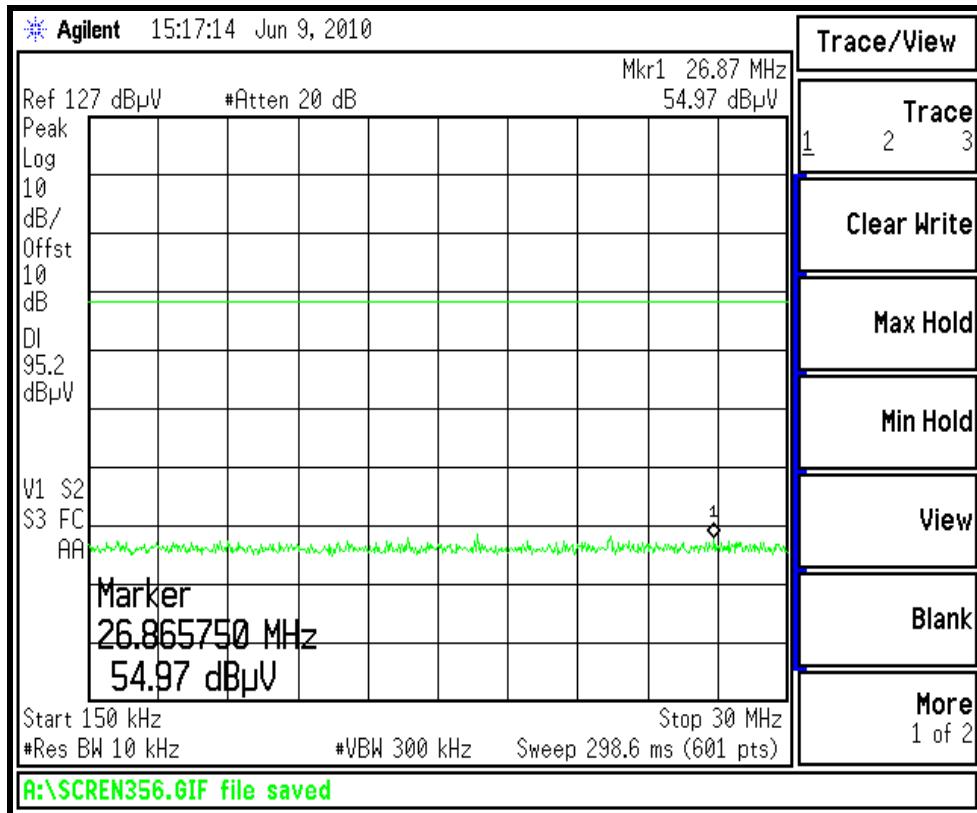


Conducted Emissions Channel 11 2405MHz

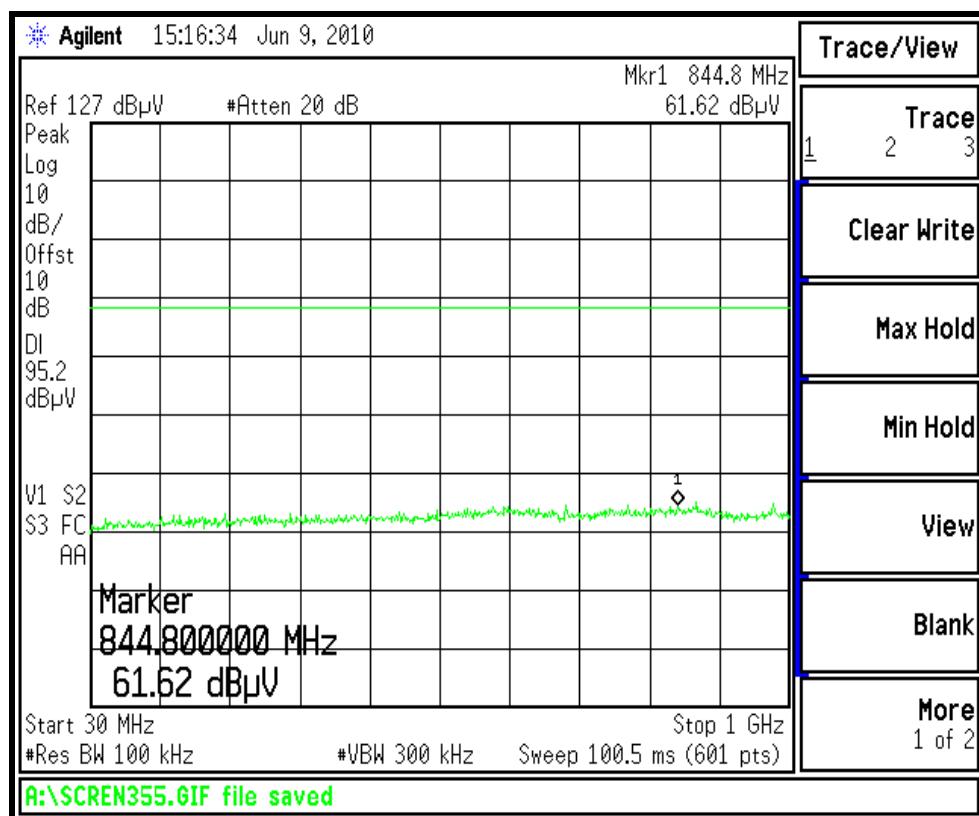


Conducted Emissions Channel 11 2405MHz

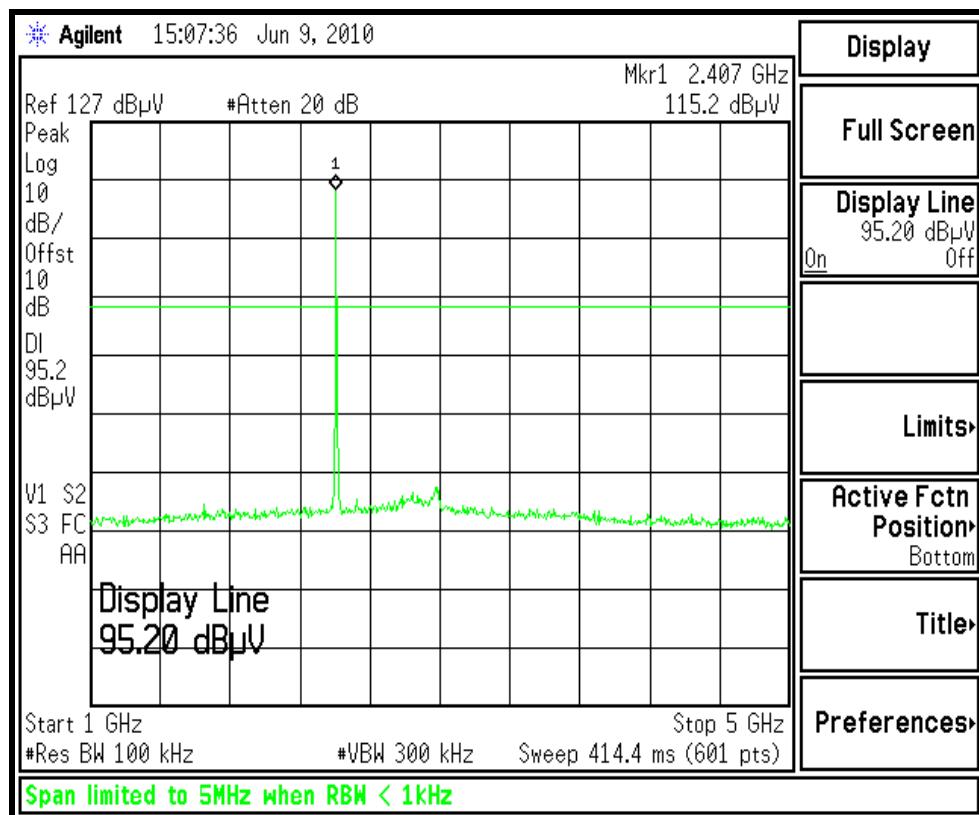


Conducted Emissions Channel 11 2405MHz

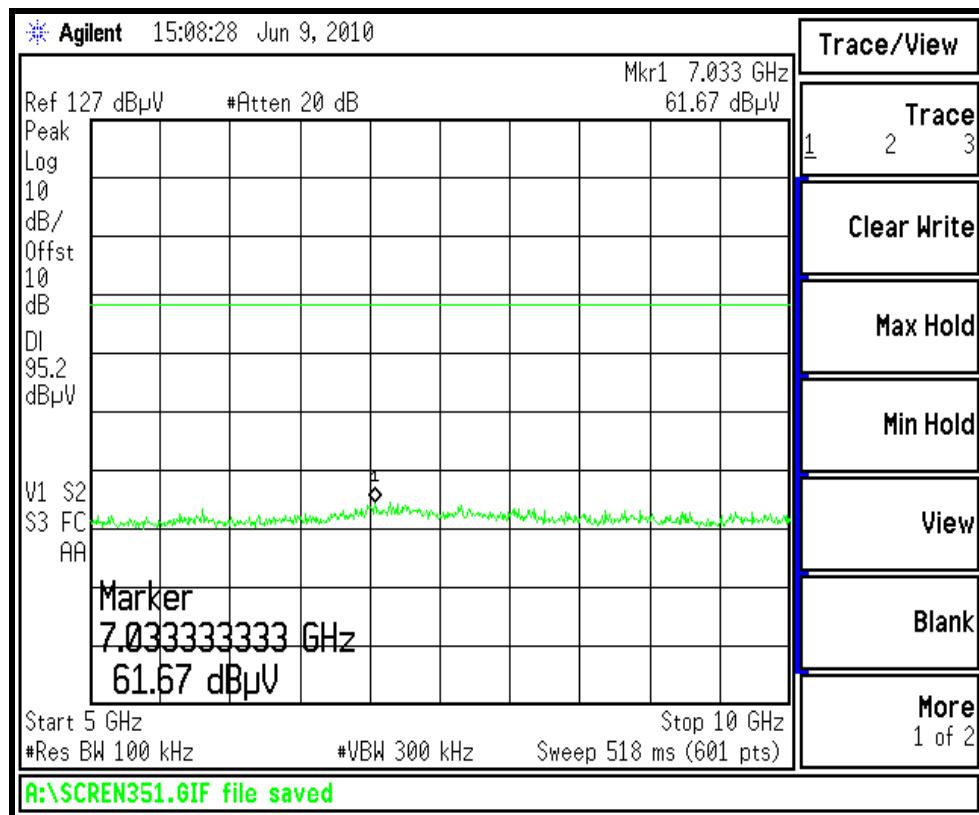


Conducted Emissions Channel 11 2405MHz

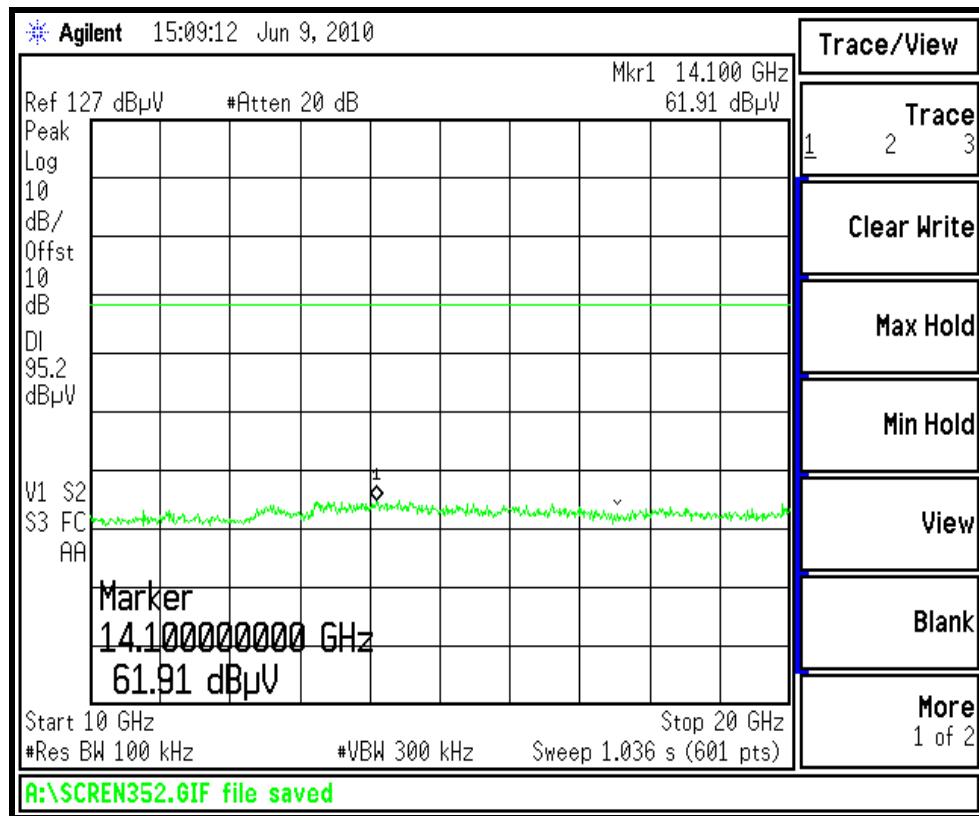


Conducted Emissions Channel 11 2405MHz

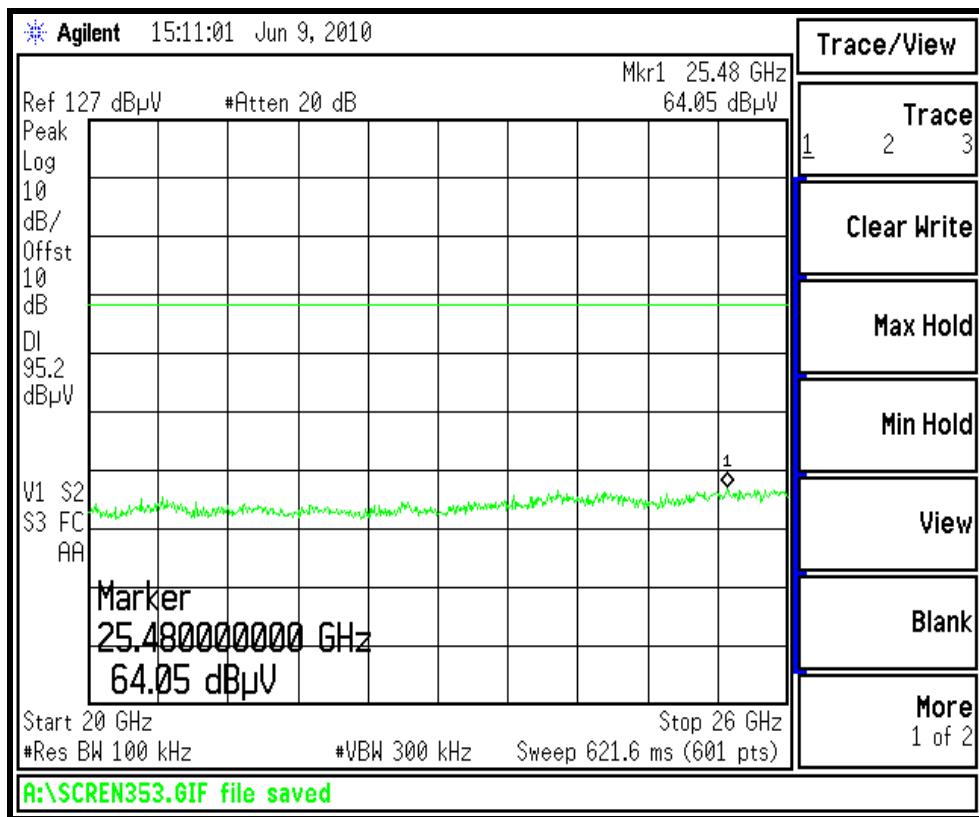


Conducted Emissions Channel 11 2405MHz

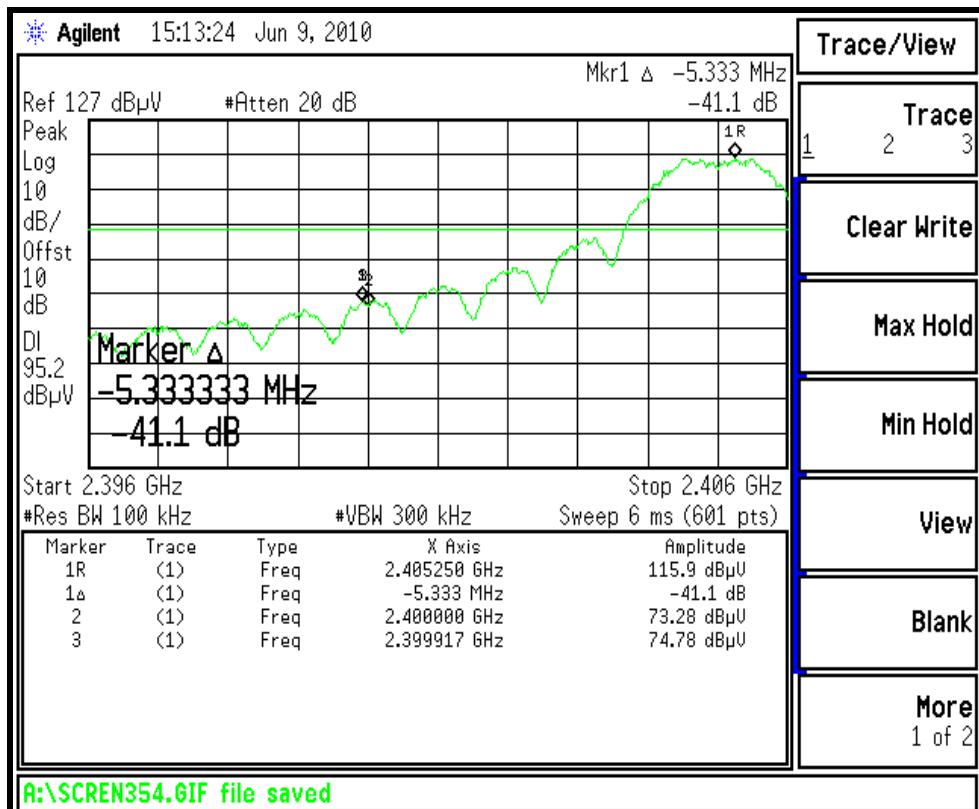


Conducted Emissions Channel 11 2405MHz: Lower-Band edge

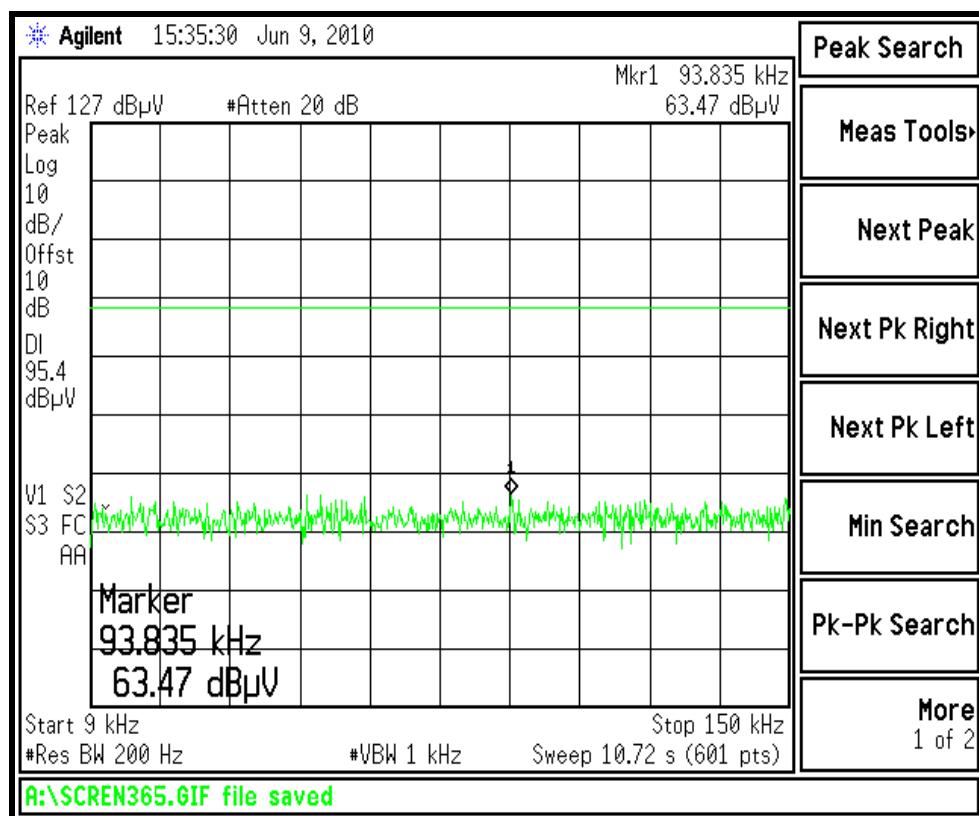


Conducted Emissions Channel 18 2440MHz

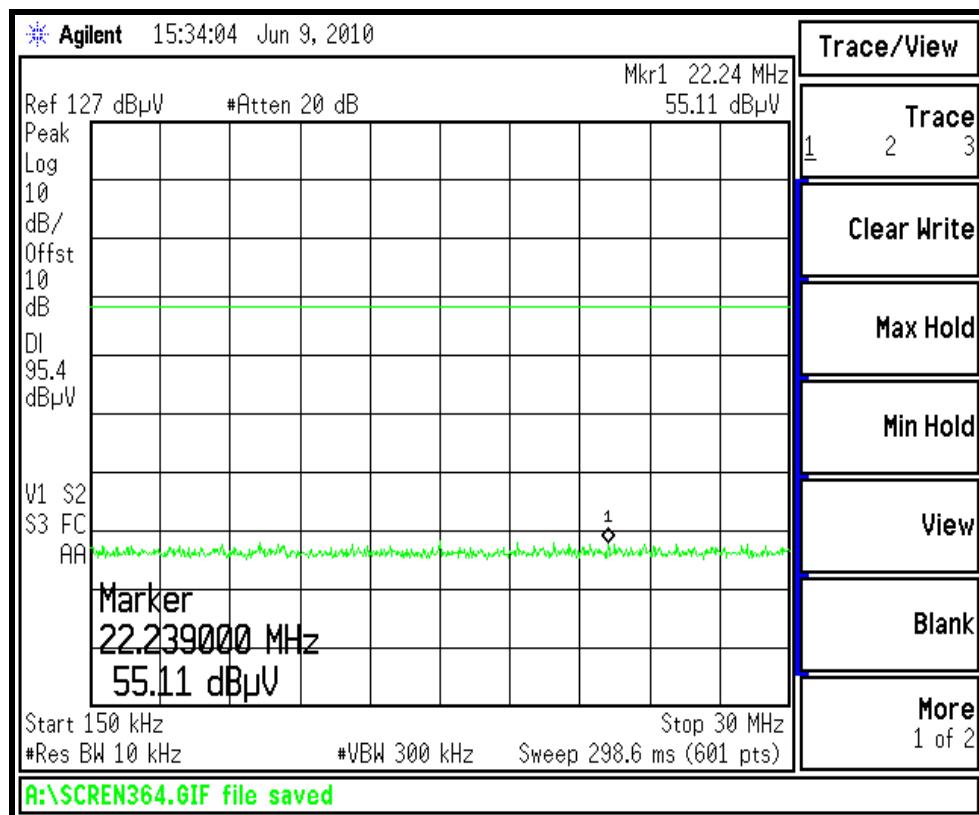


Conducted Emissions Channel 18 2440MHz

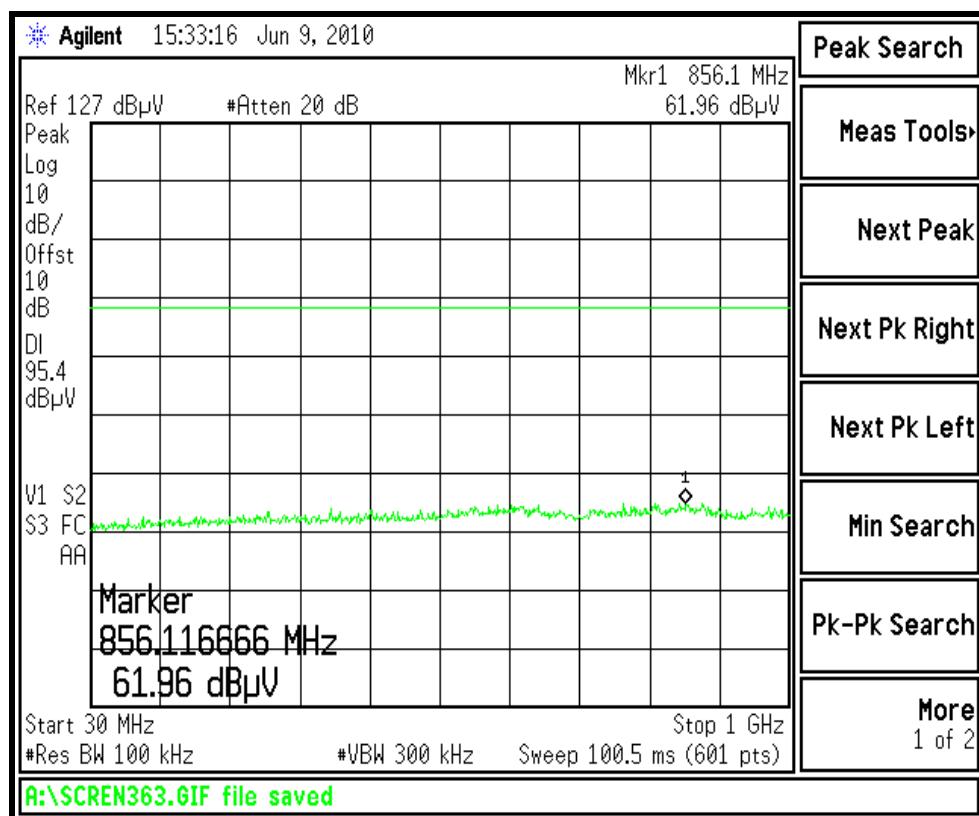


Conducted Emissions Channel 18 2440MHz

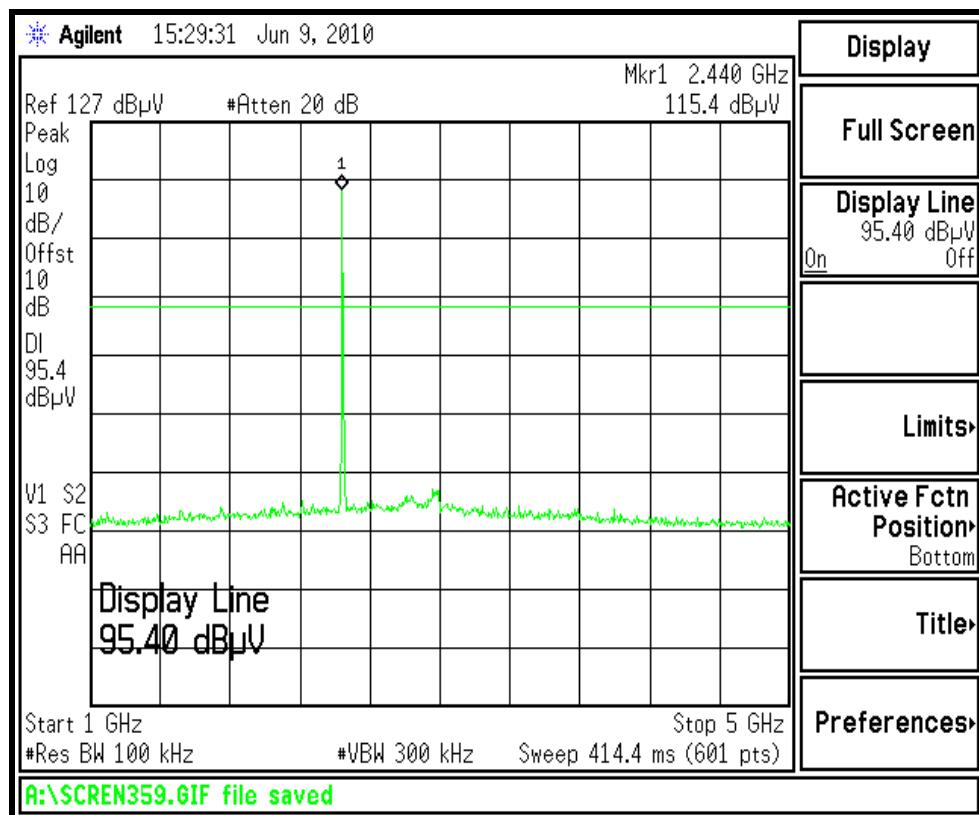


Conducted Emissions Channel 18 2440MHz

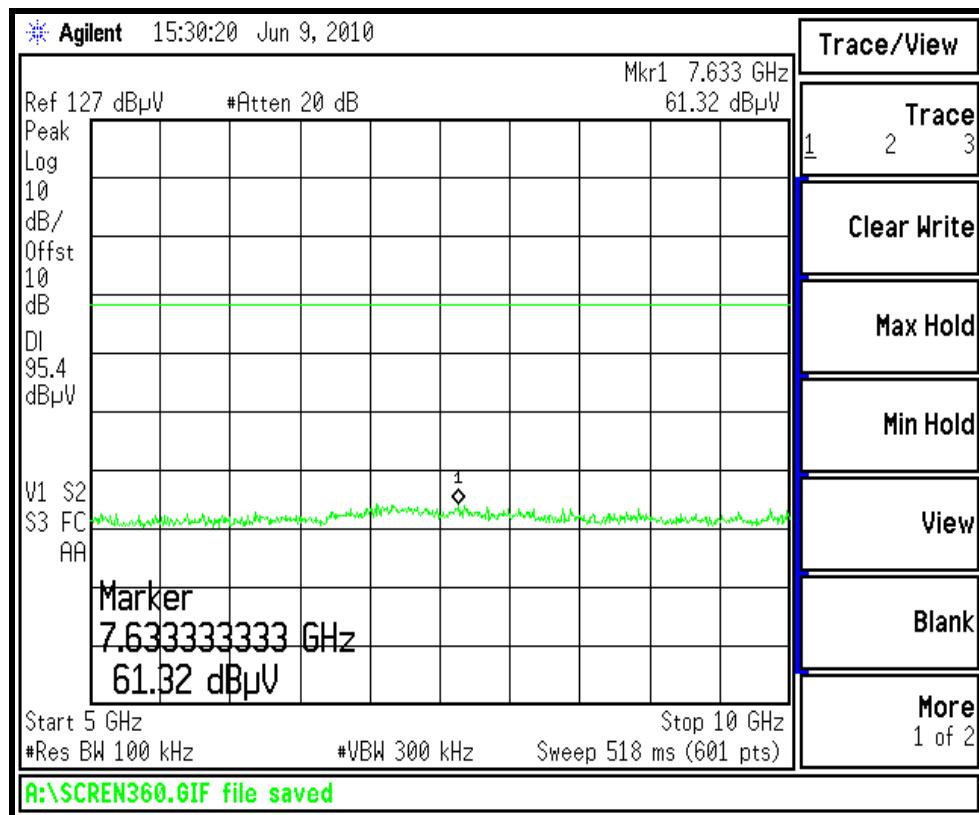


Conducted Emissions Channel 18 2440MHz

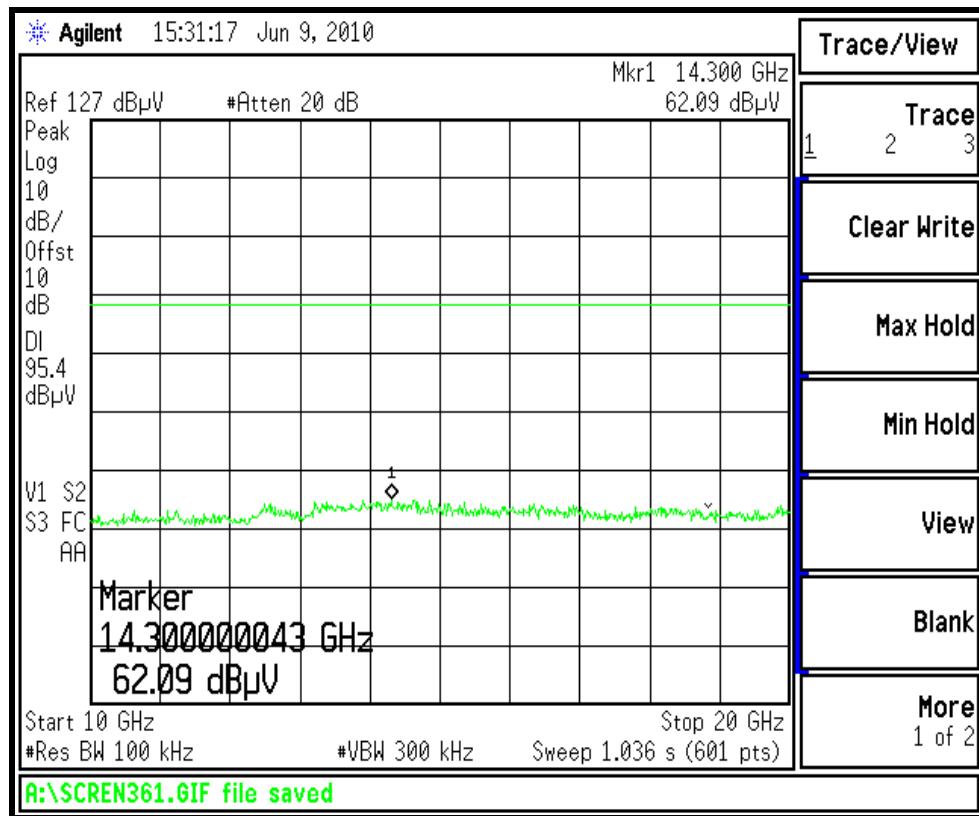


Conducted Emissions Channel 18 2440MHz

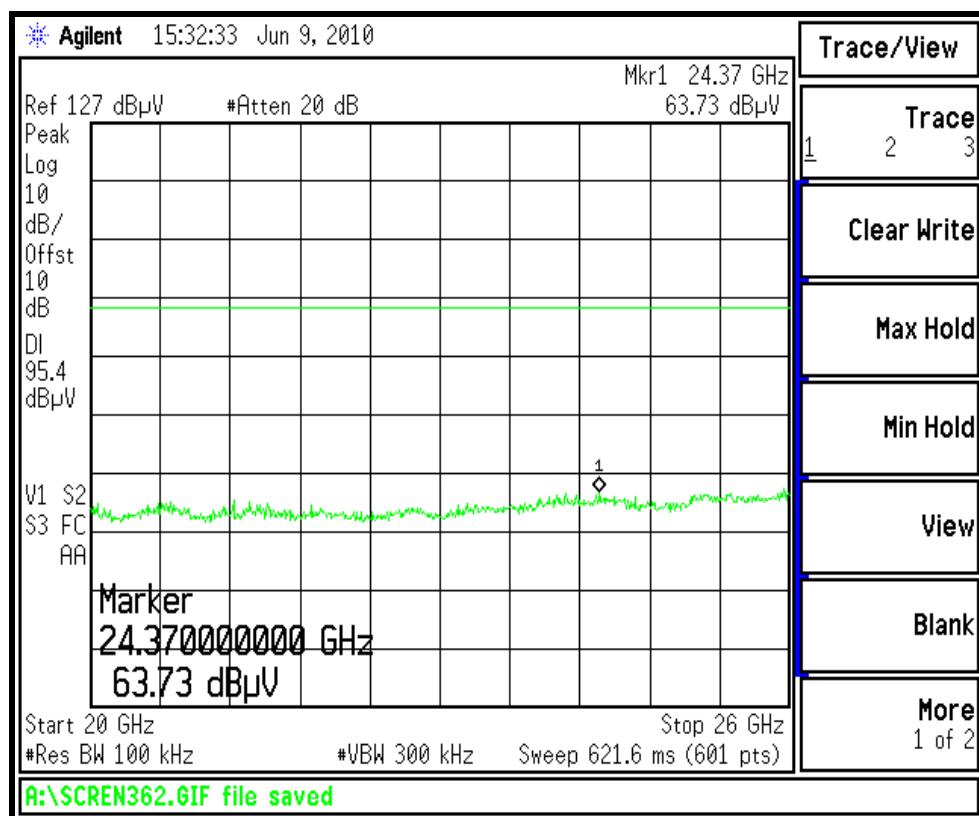


Conducted Emissions Channel 18 2440MHz

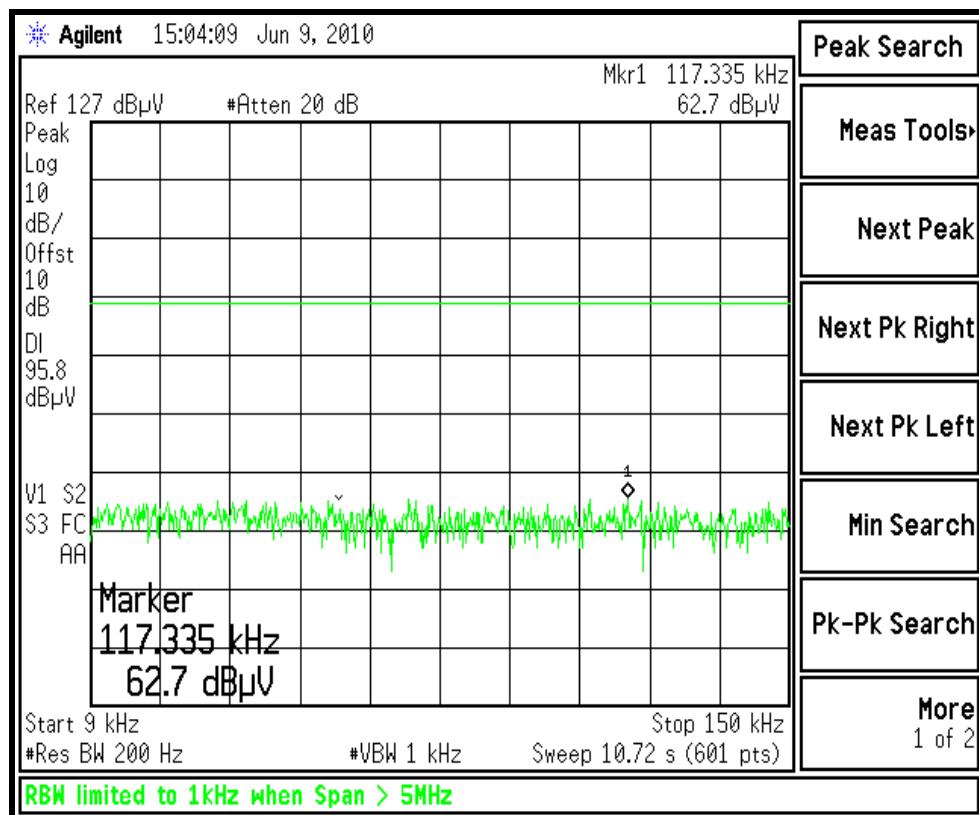


Conducted Emissions Channel 25 2475MHz

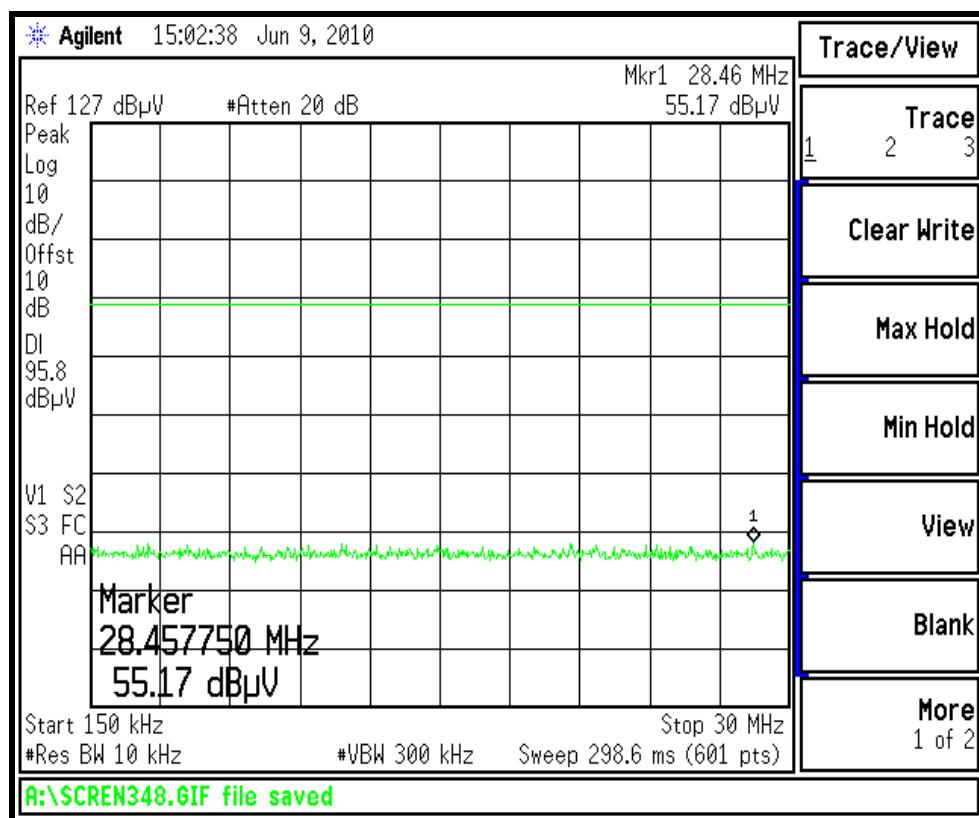


Conducted Emissions Channel 25 2475MHz

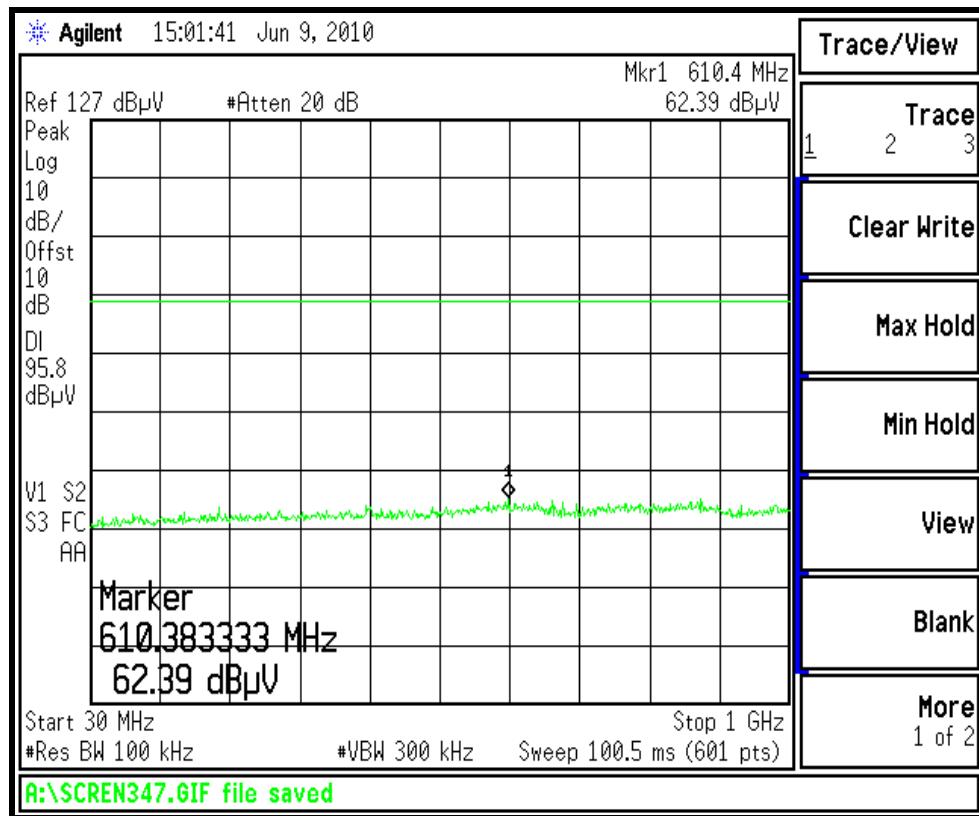


Conducted Emissions Channel 25 2475MHz

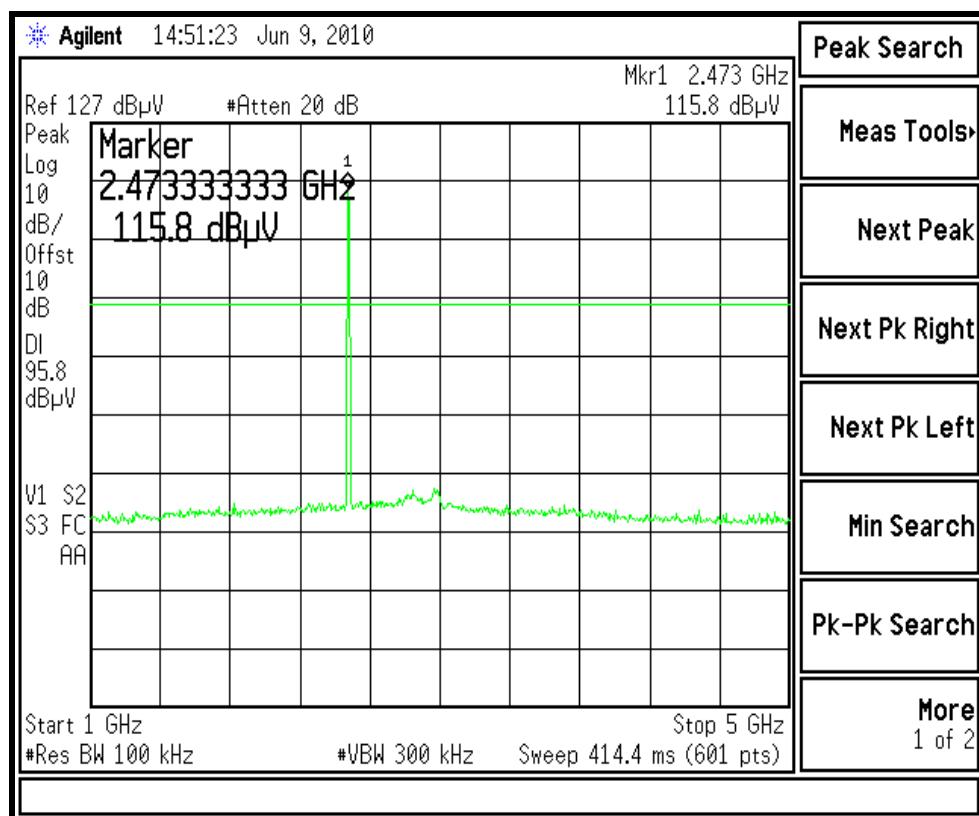


Conducted Emissions Channel 25 2475MHz

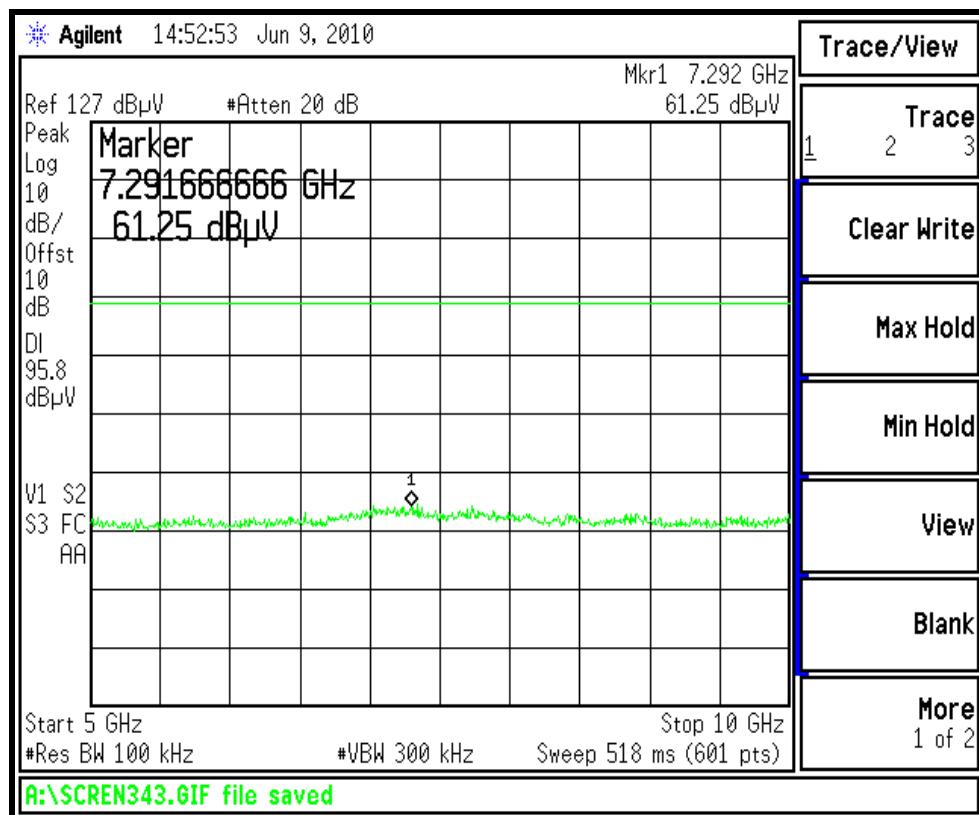


Conducted Emissions Channel 25 2475MHz

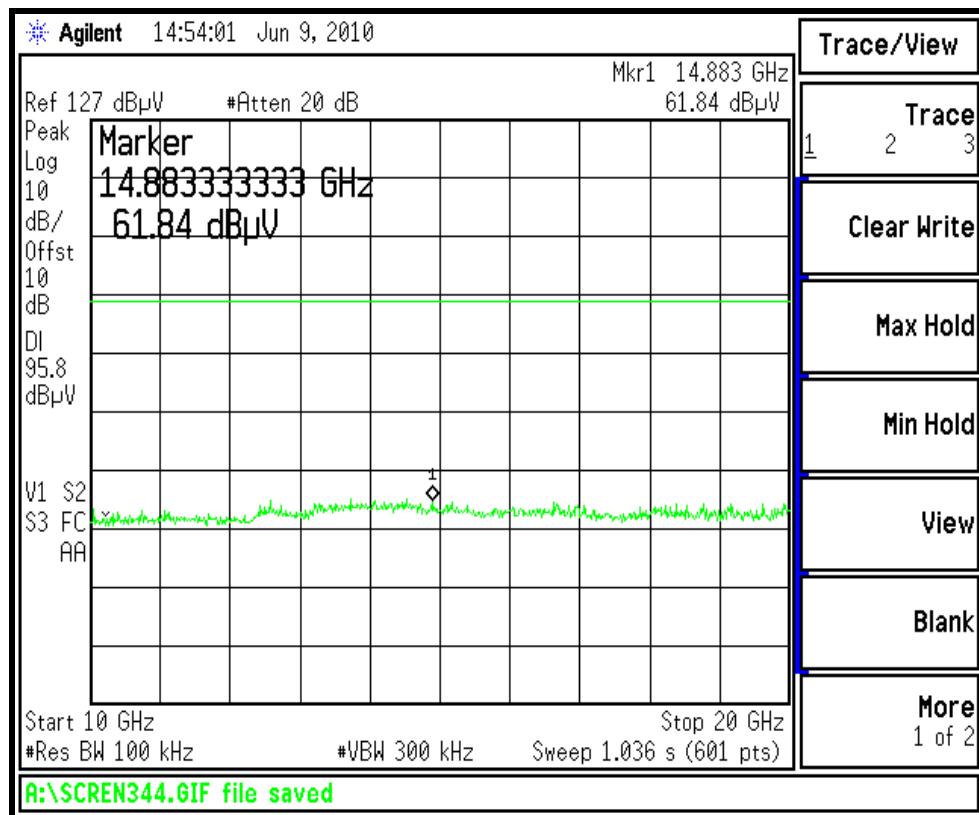


Conducted Emissions Channel 25 2475MHz

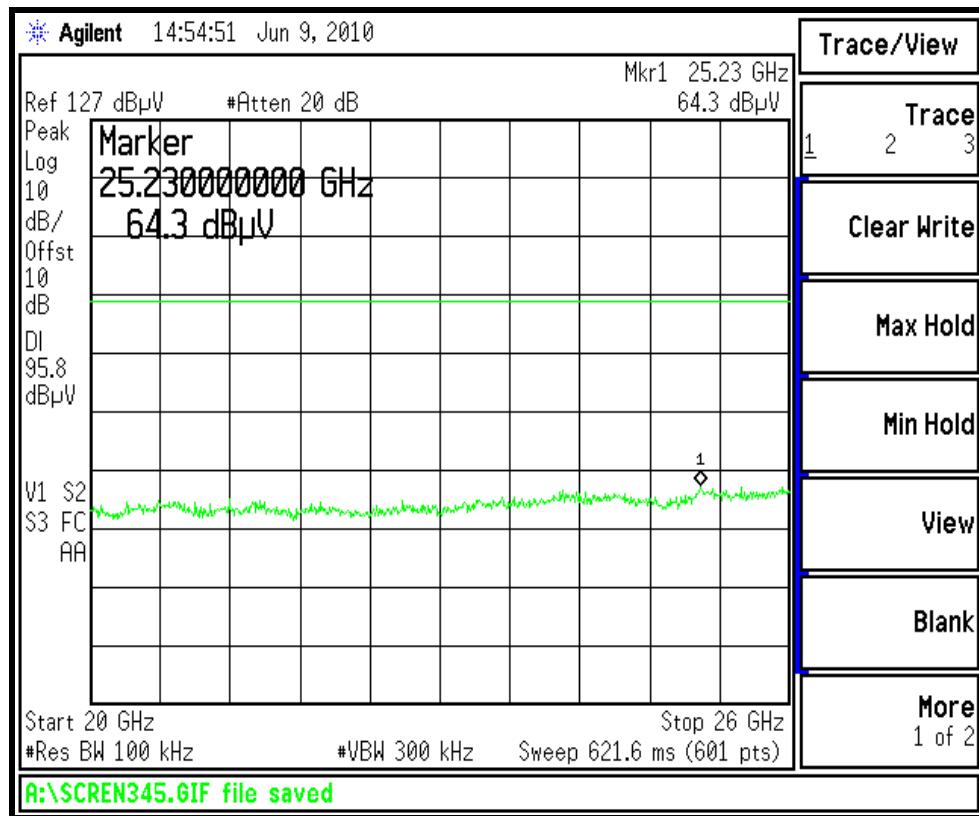


Conducted Emissions Channel 25 2475MHz

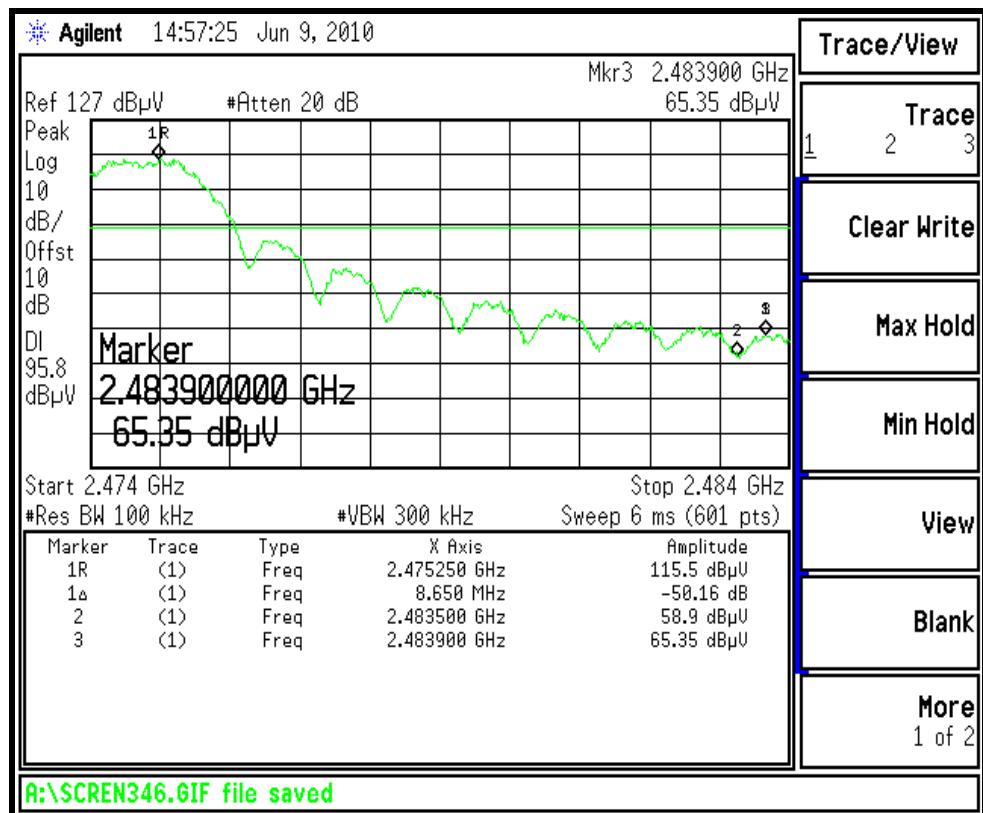


Conducted Emissions Channel 25 2475MHz: Upper-Band edge

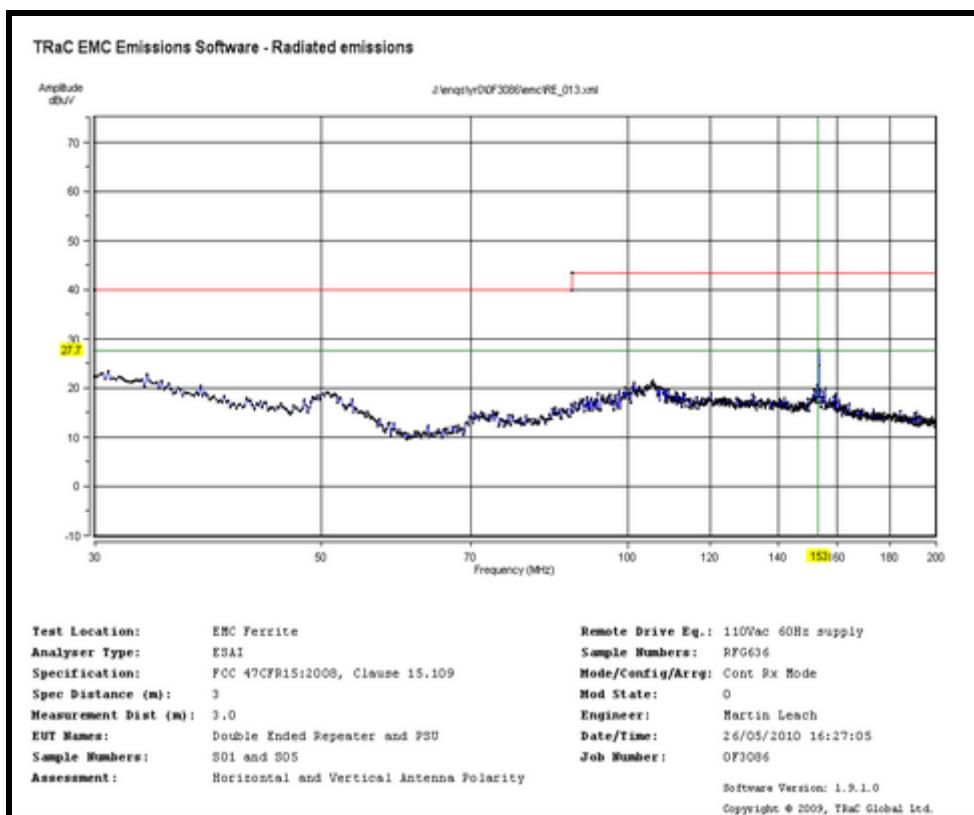


Radiated RX Mode Emissions (15.109)

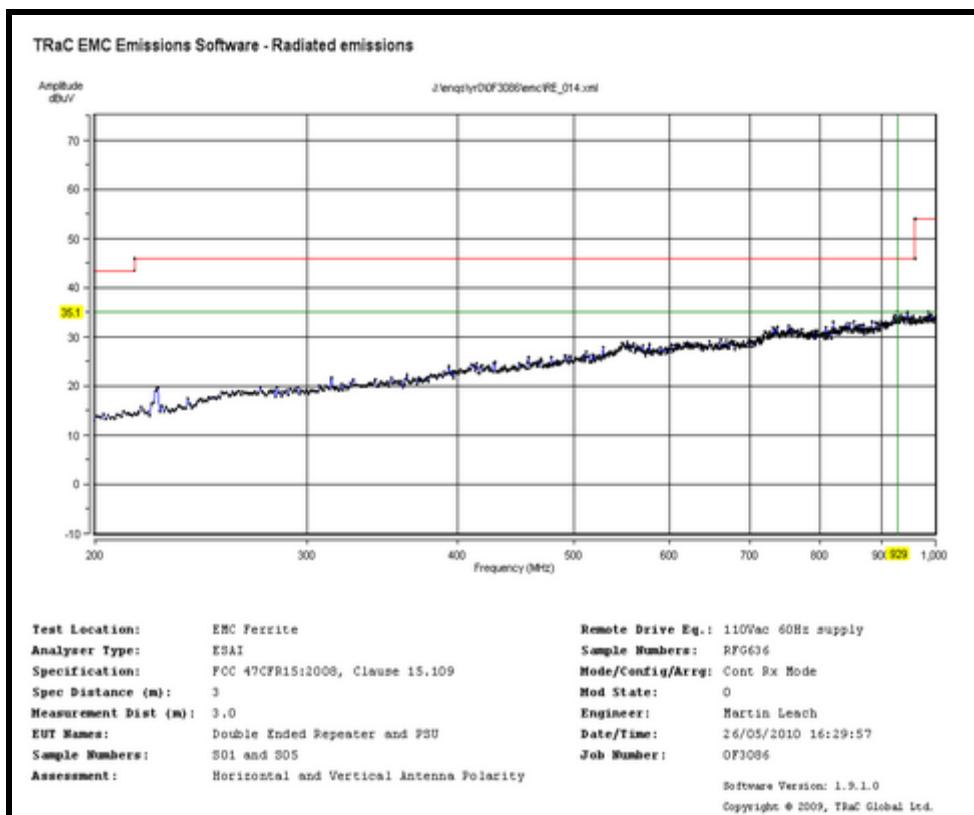


Radiated RX Mode Emissions (15.109)

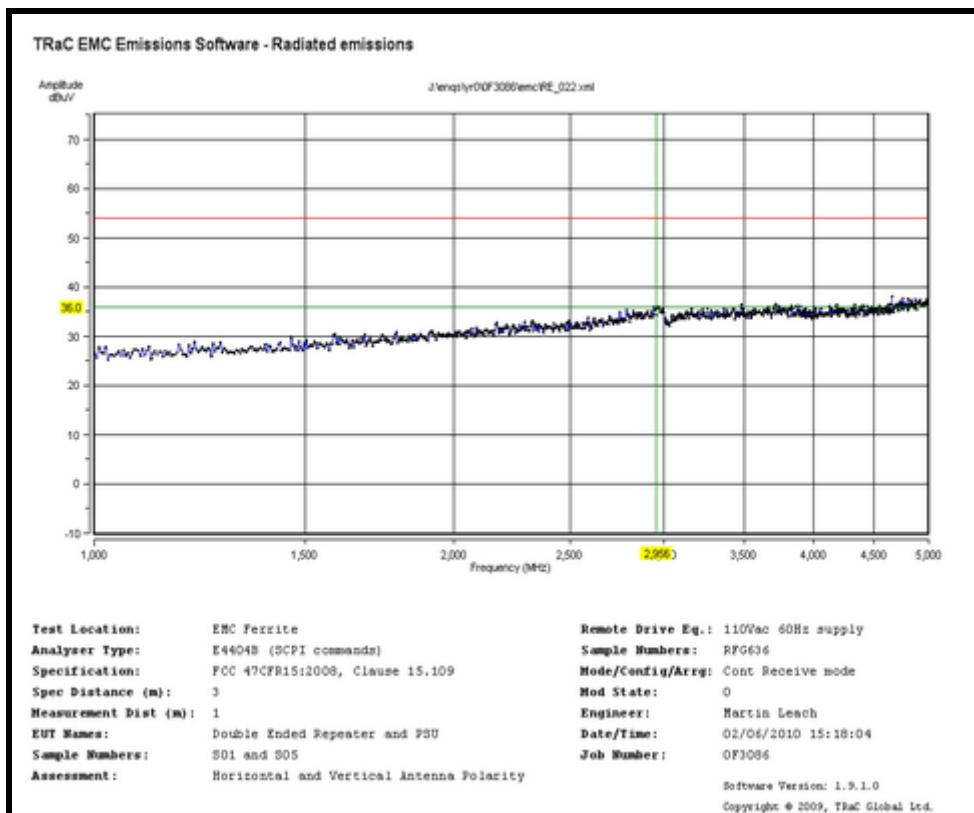


Radiated RX Mode Emissions (15.109)

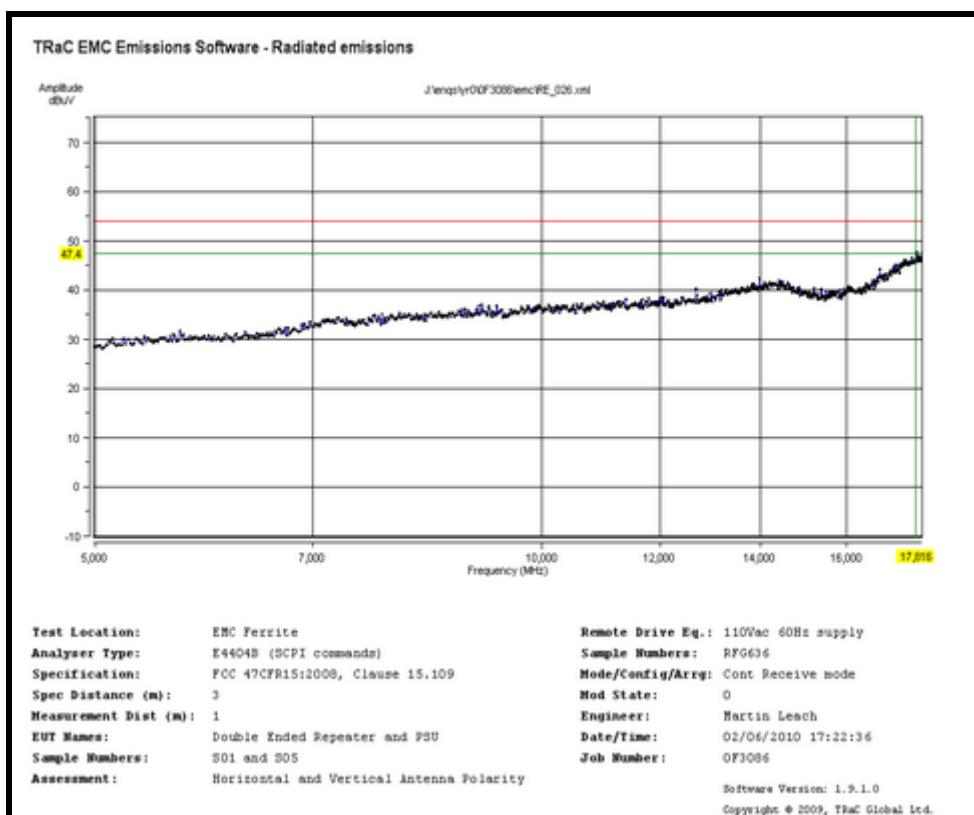


Radiated RX Mode Emissions (15.109)

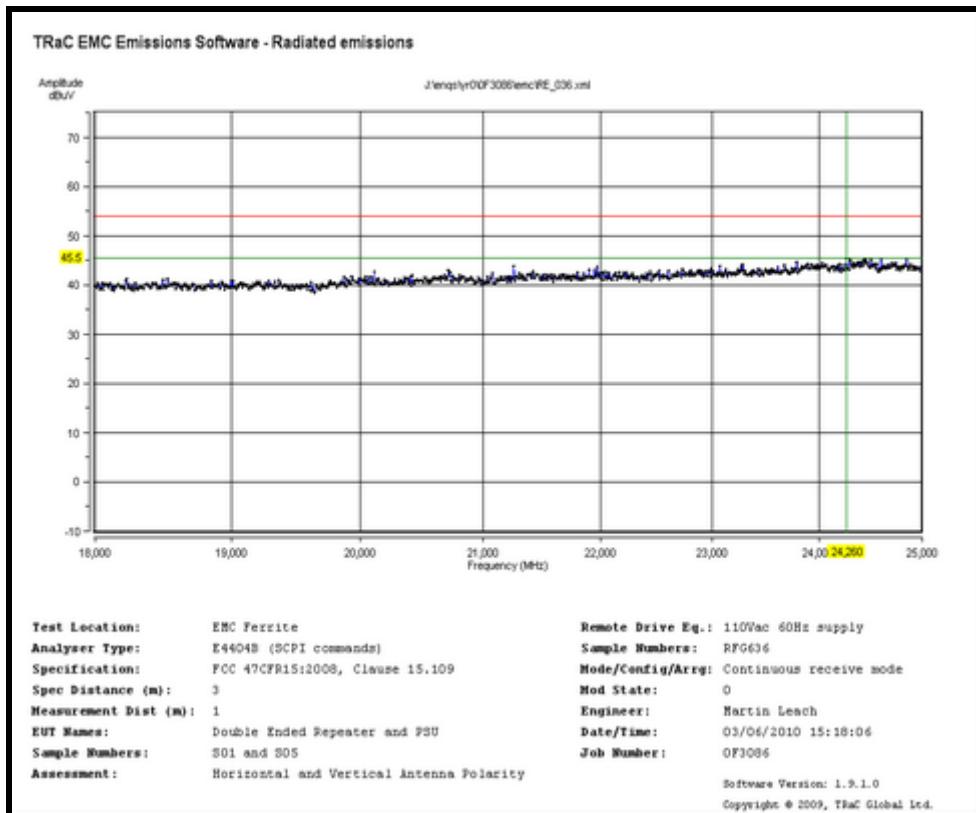


Radiated RX Mode Emissions (15.109)

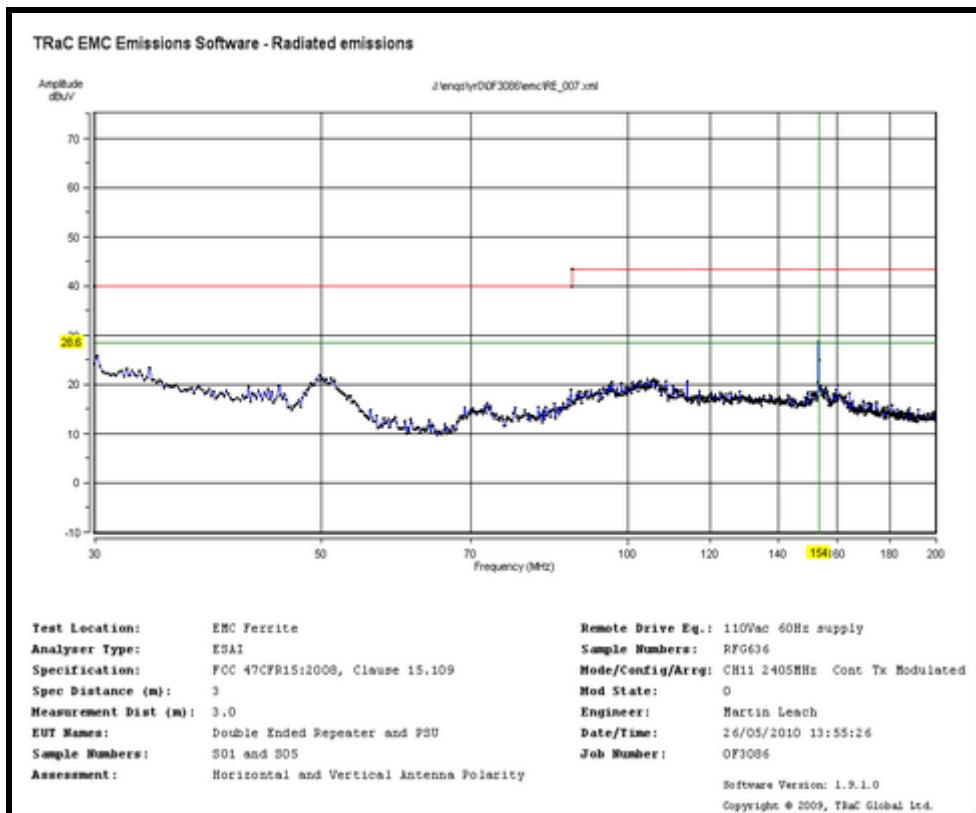


Radiated Transmitter Emissions Channel 11 2405MHz (15.209)

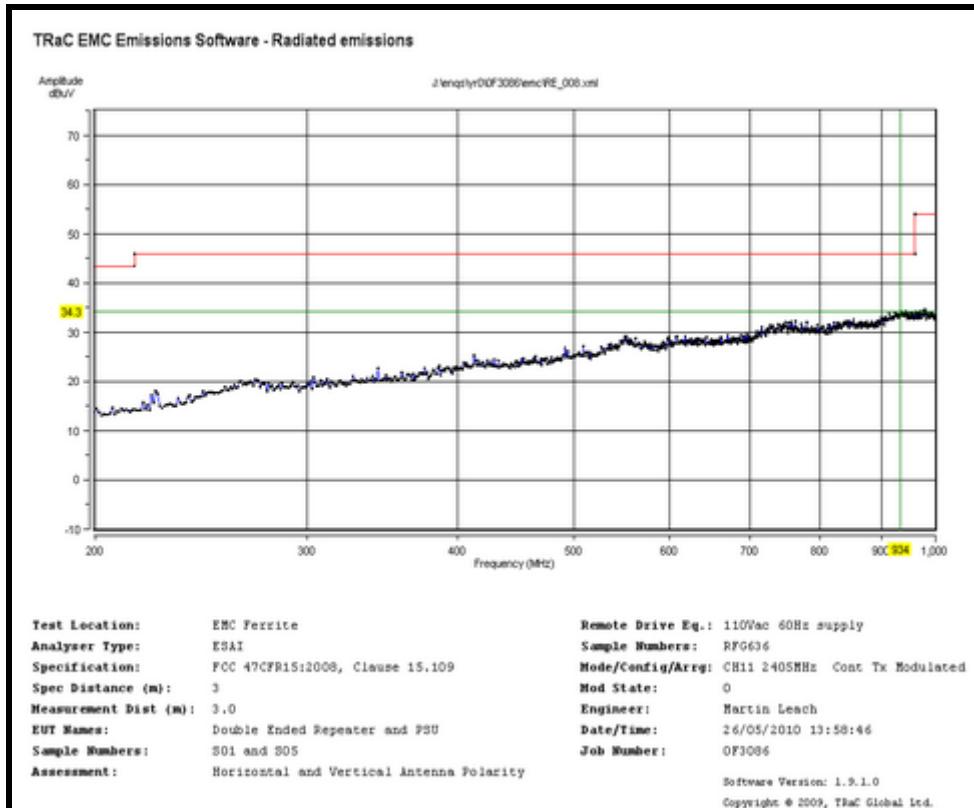


Radiated Transmitter Emissions Channel 11 2405MHz (15.209)

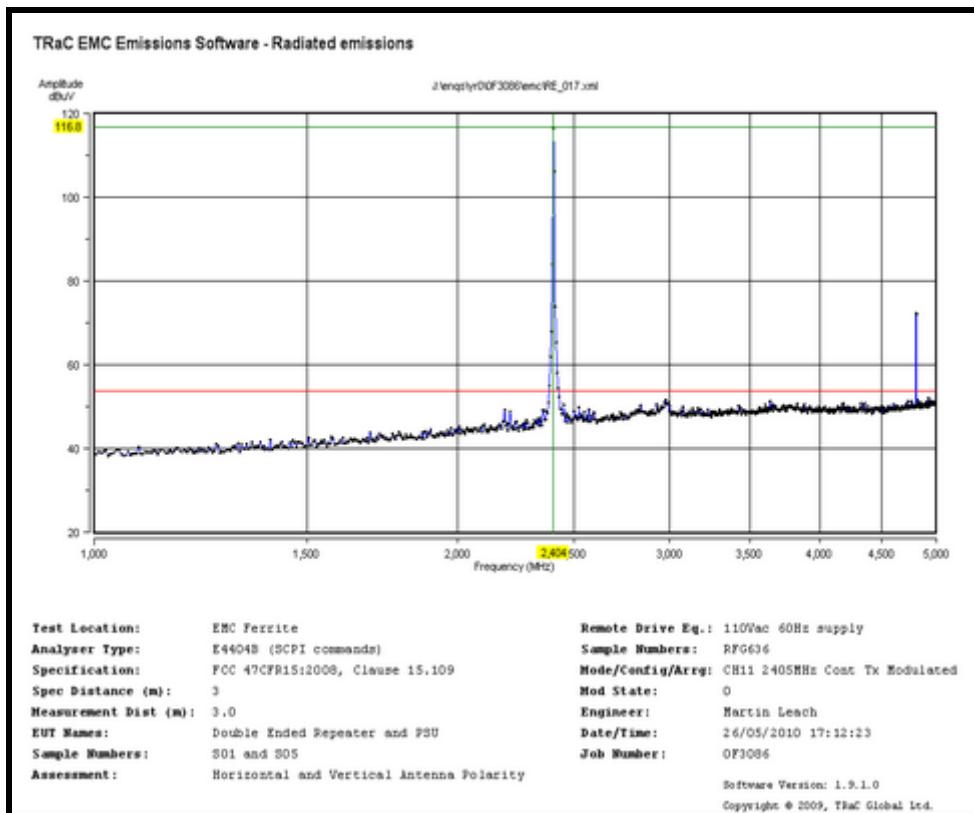


Radiated Transmitter Emissions Channel 11 2405MHz (15.209)

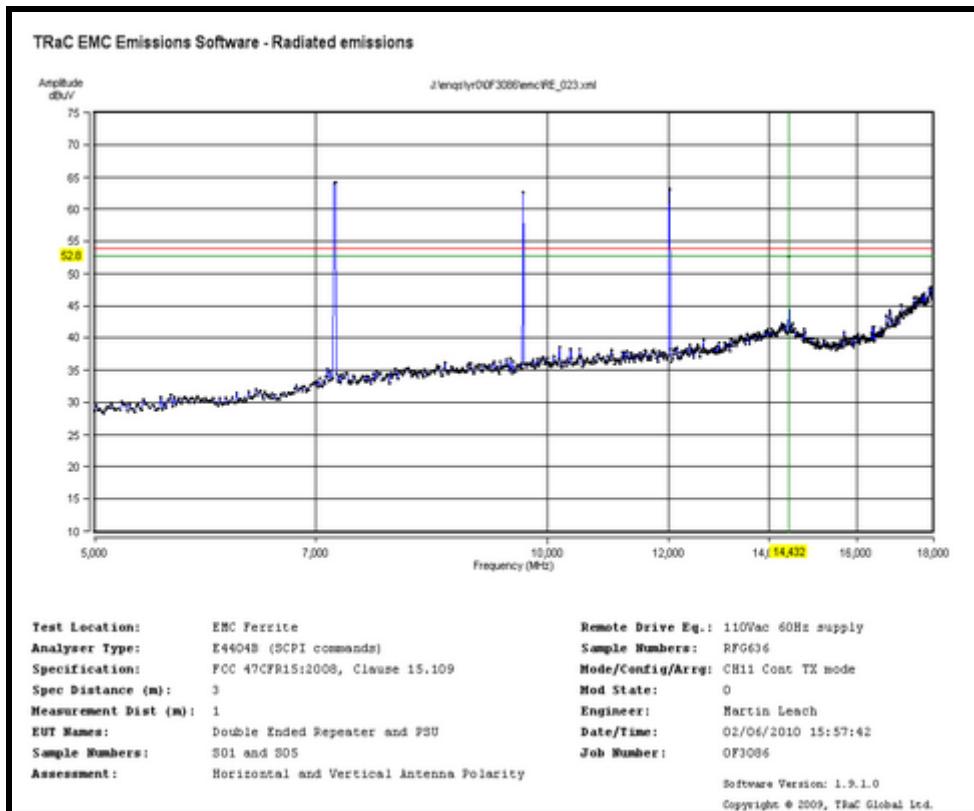


Radiated Transmitter Emissions Channel 11 2405MHz (15.209)

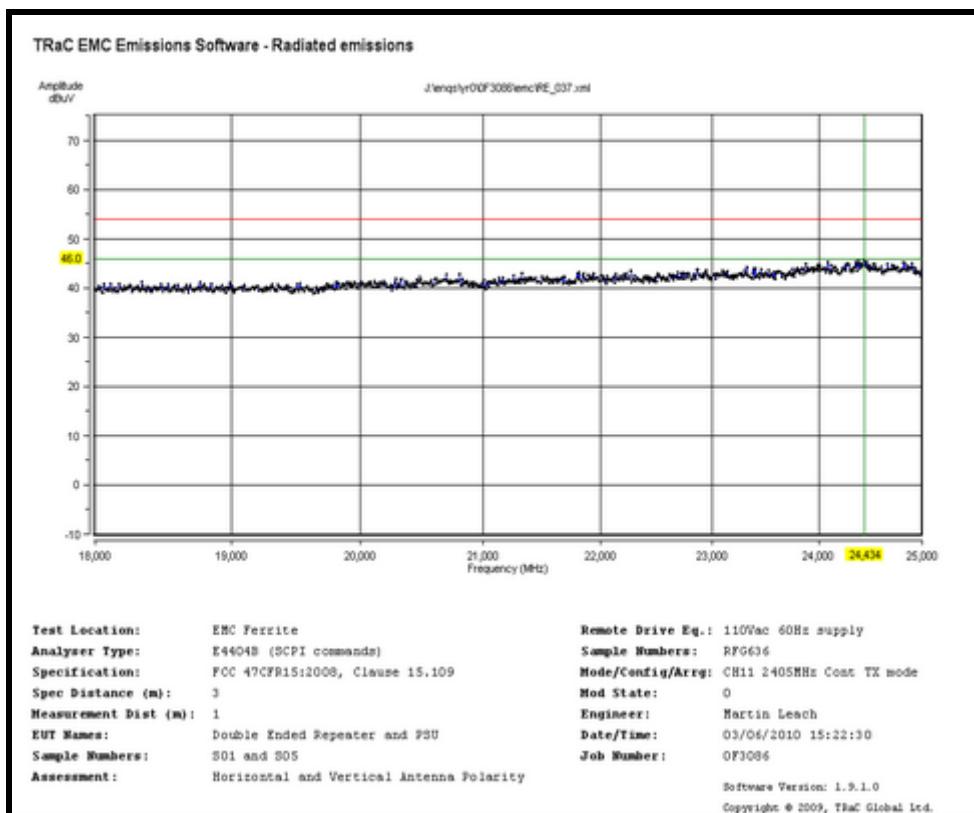


Radiated Transmitter Emissions Channel 11 2405MHz (15.209)

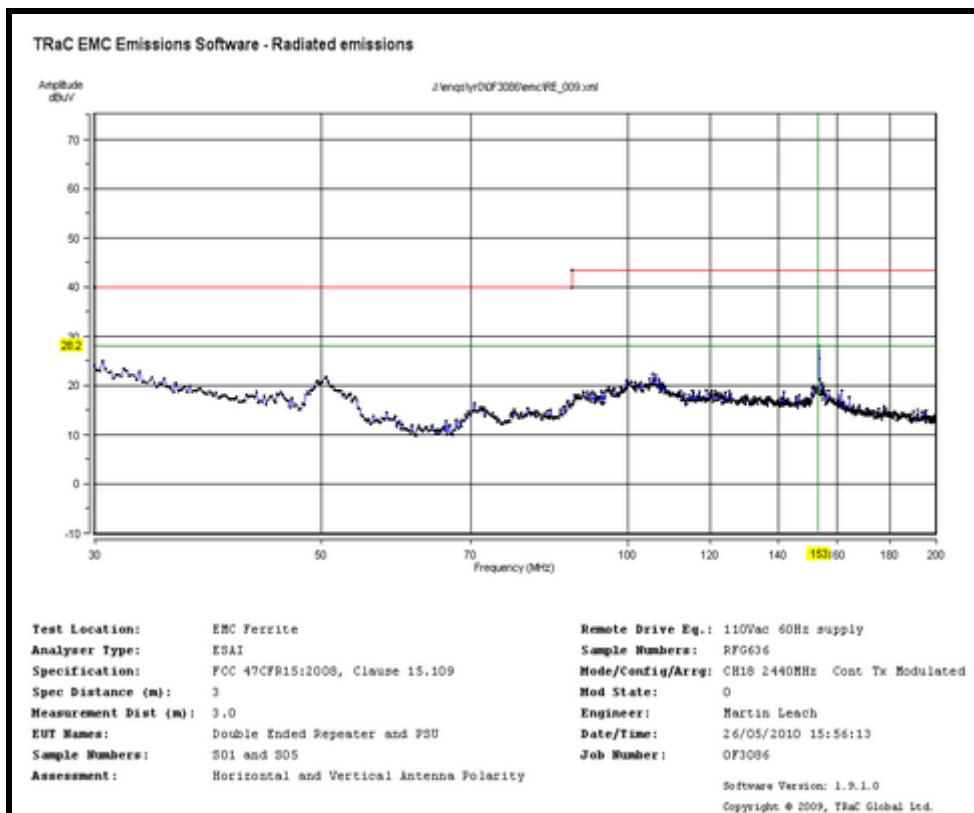


Radiated Transmitter Emissions Channel 18 2440MHz (15.209)

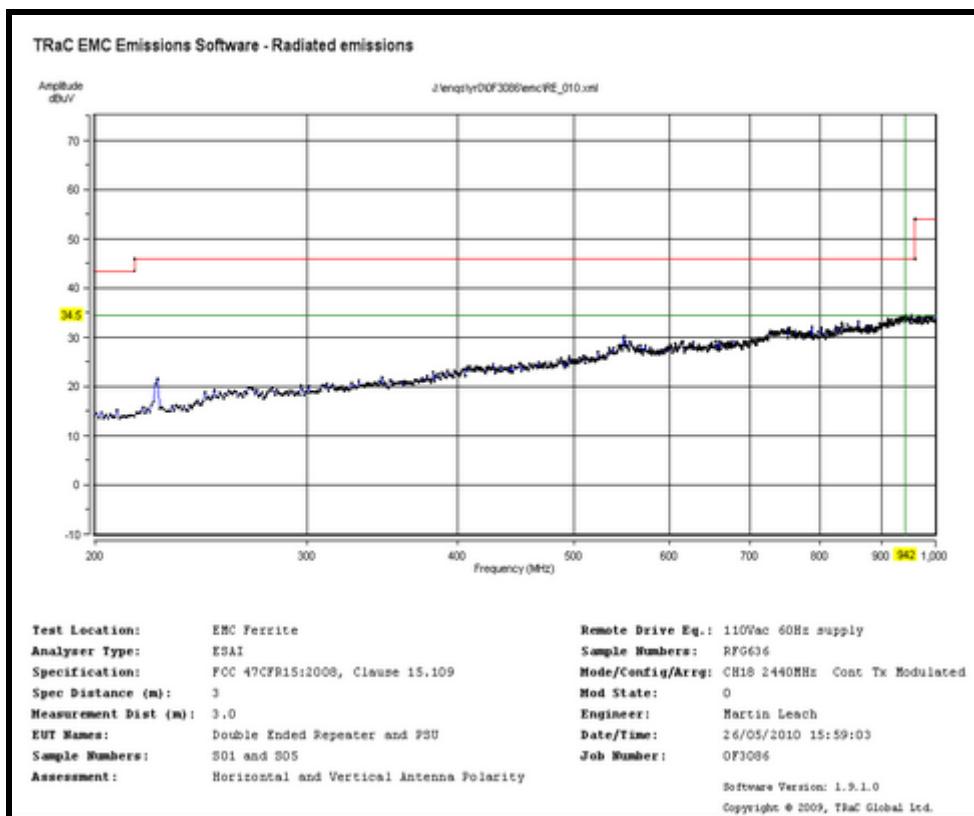


Radiated Transmitter Emissions Channel 18 2440MHz (15.209)

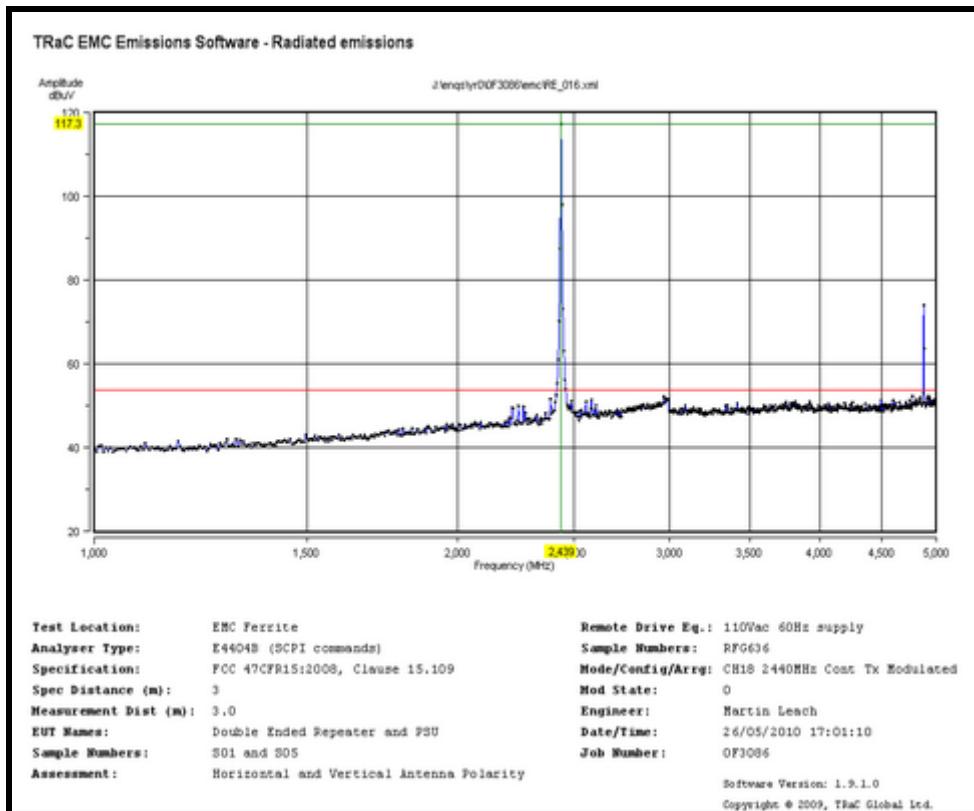


Radiated Transmitter Emissions Channel 18 2440MHz (15.209)

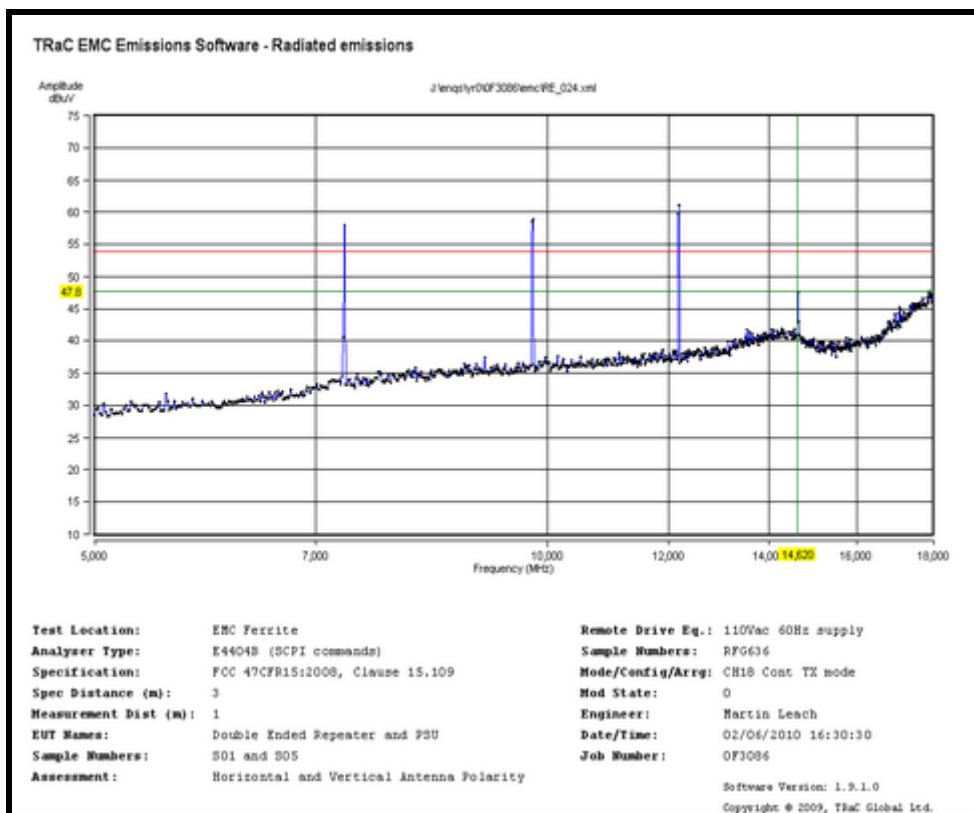


Radiated Transmitter Emissions Channel 18 2440MHz (15.209)

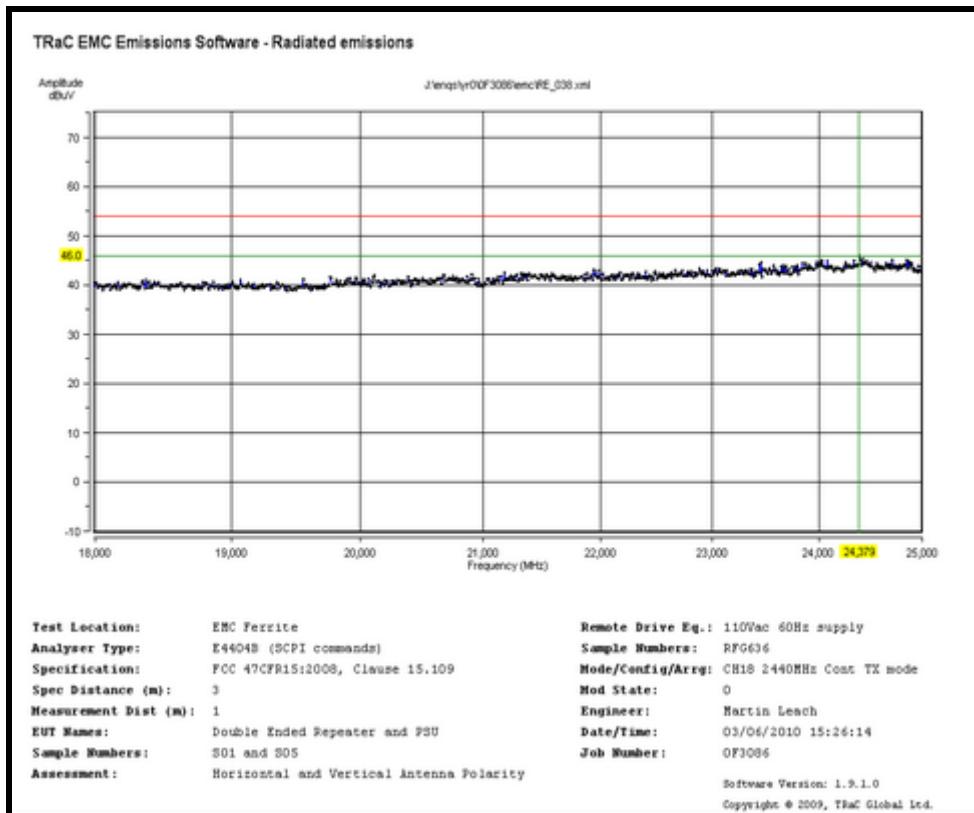


Radiated Transmitter Emissions Channel 18 2440MHz (15.209)

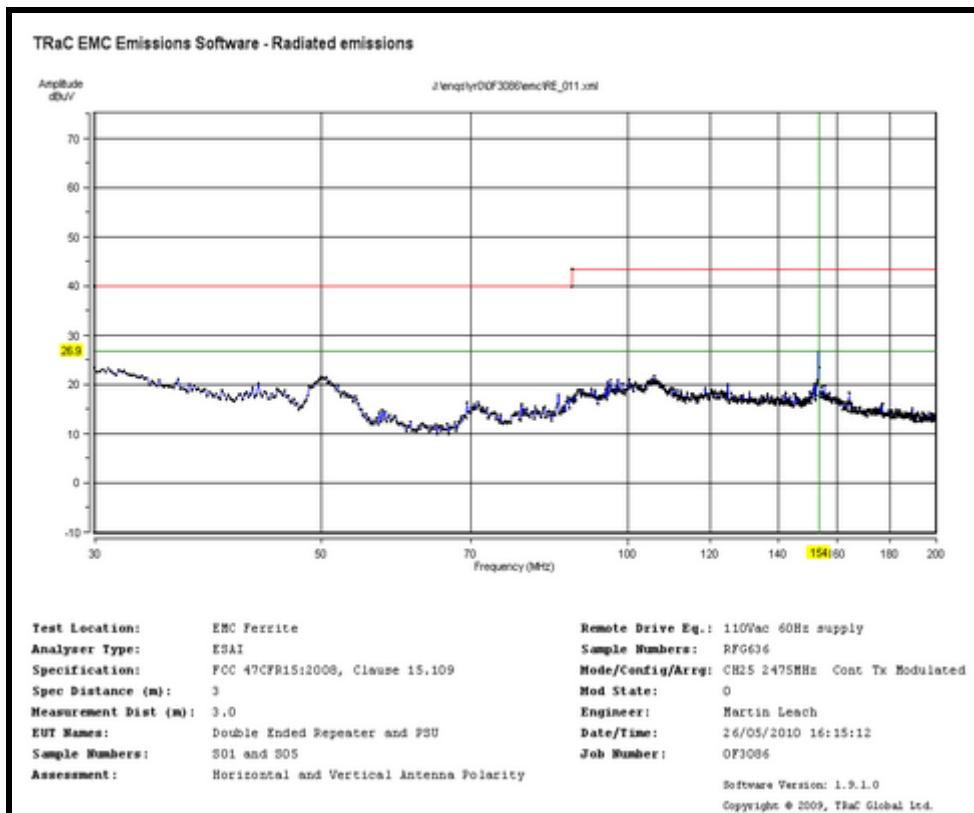


Radiated Transmitter Emissions Channel 25 2475MHz (15.209)

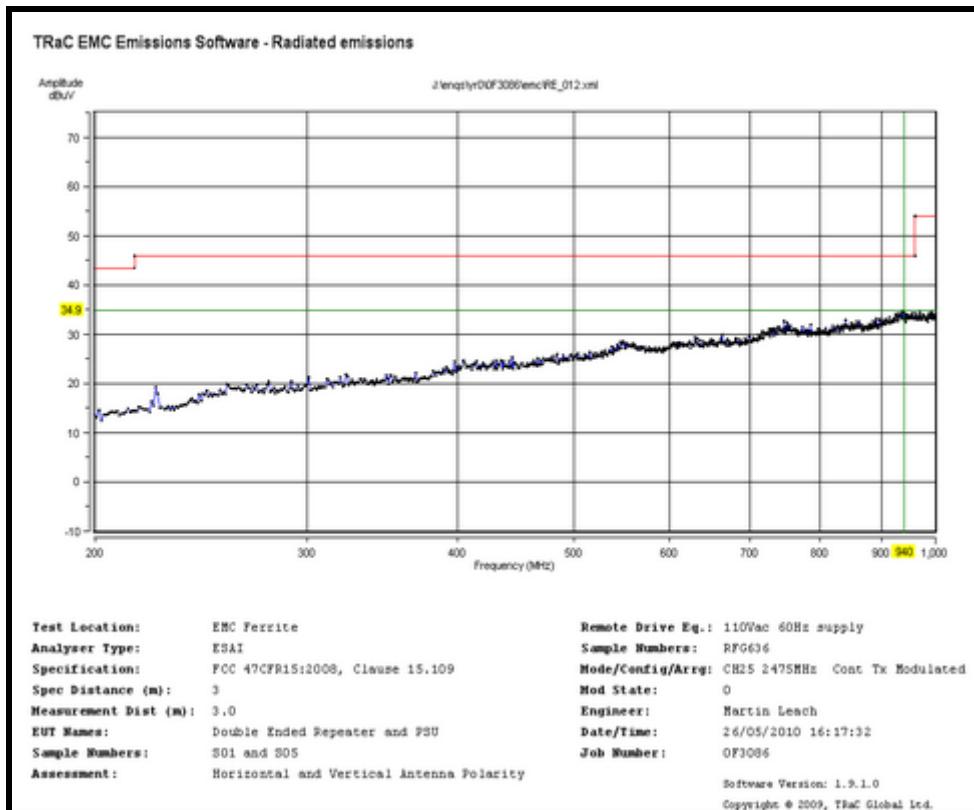


Radiated Transmitter Emissions Channel 25 2475MHz (15.209)

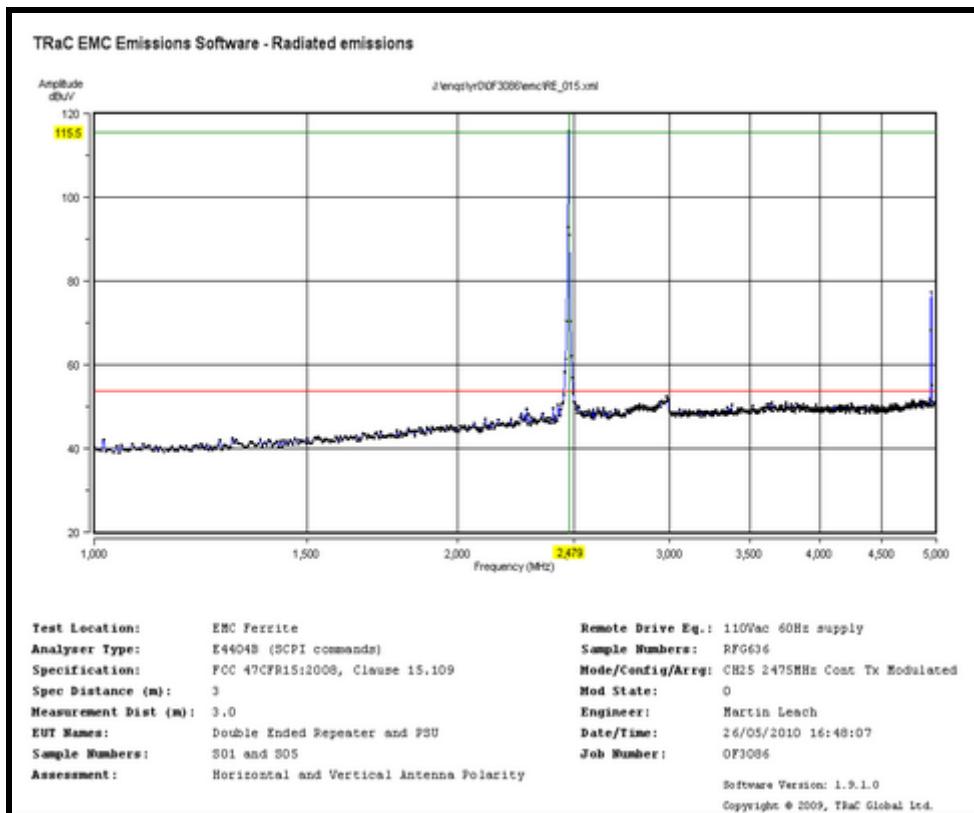


Radiated Transmitter Emissions Channel 25 2475MHz (15.209)

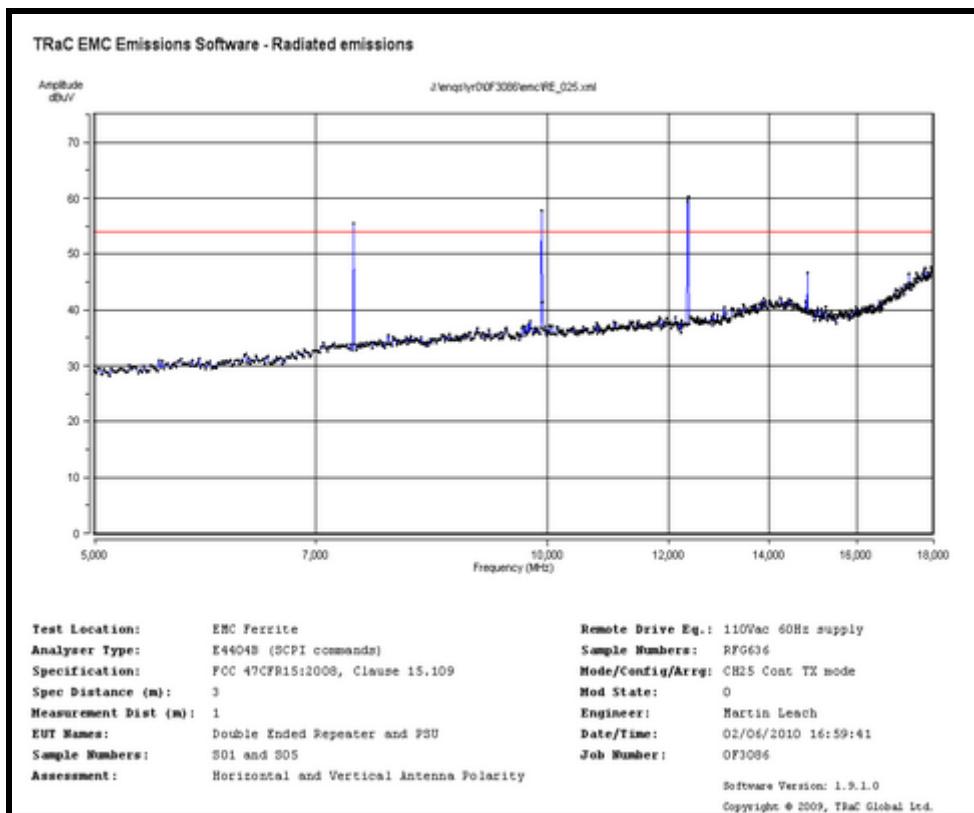

Radiated Transmitter Emissions Channel 25 2475MHz (15.209)

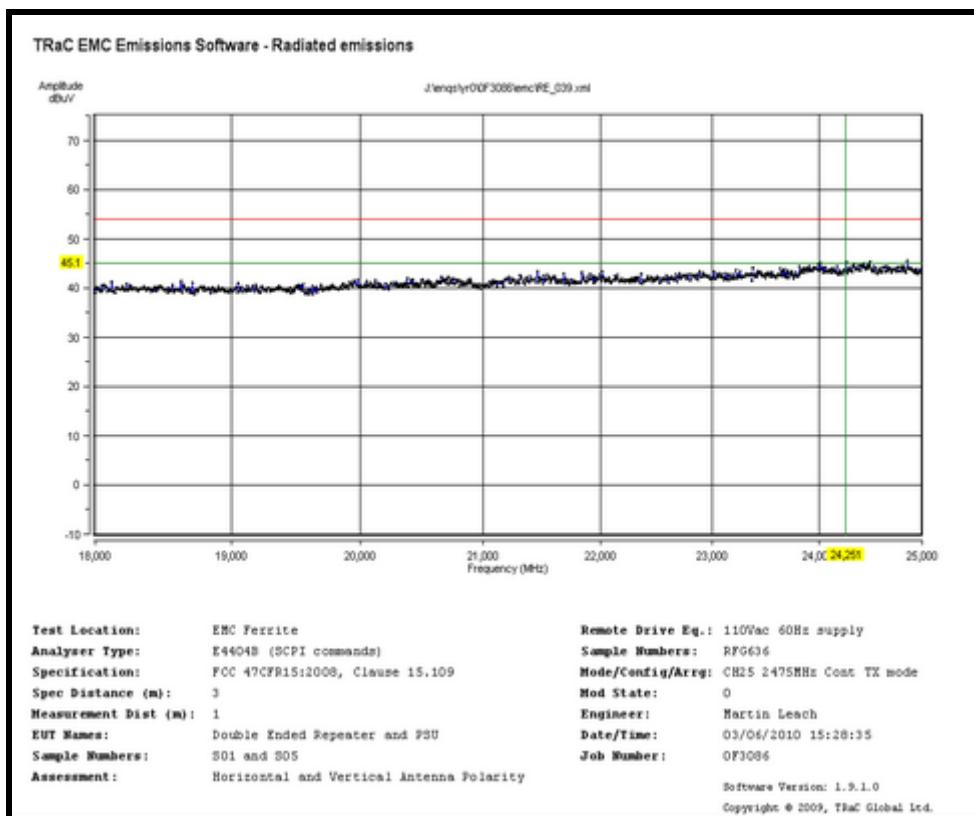


Radiated Transmitter Emissions Channel 25 2475MHz (15.209)

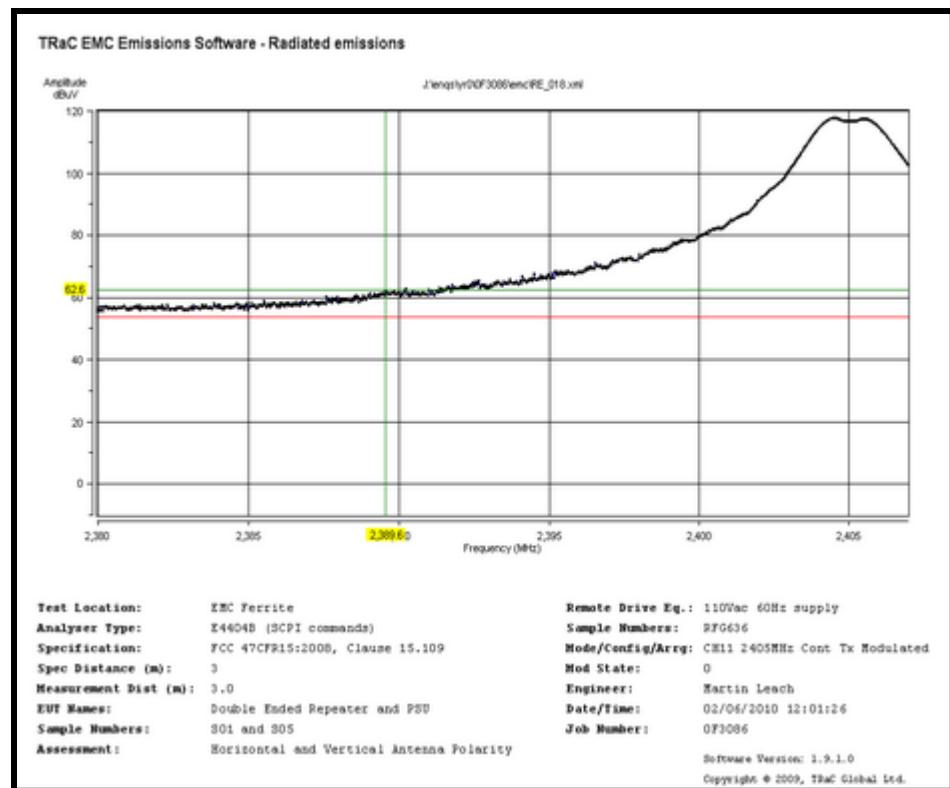


Radiated Transmitter Emissions Channel 11 2405MHz (15.209) Band Edge Compliance RBW 1MHz

The 27% duty cycle was tested for the lower band edge compliance

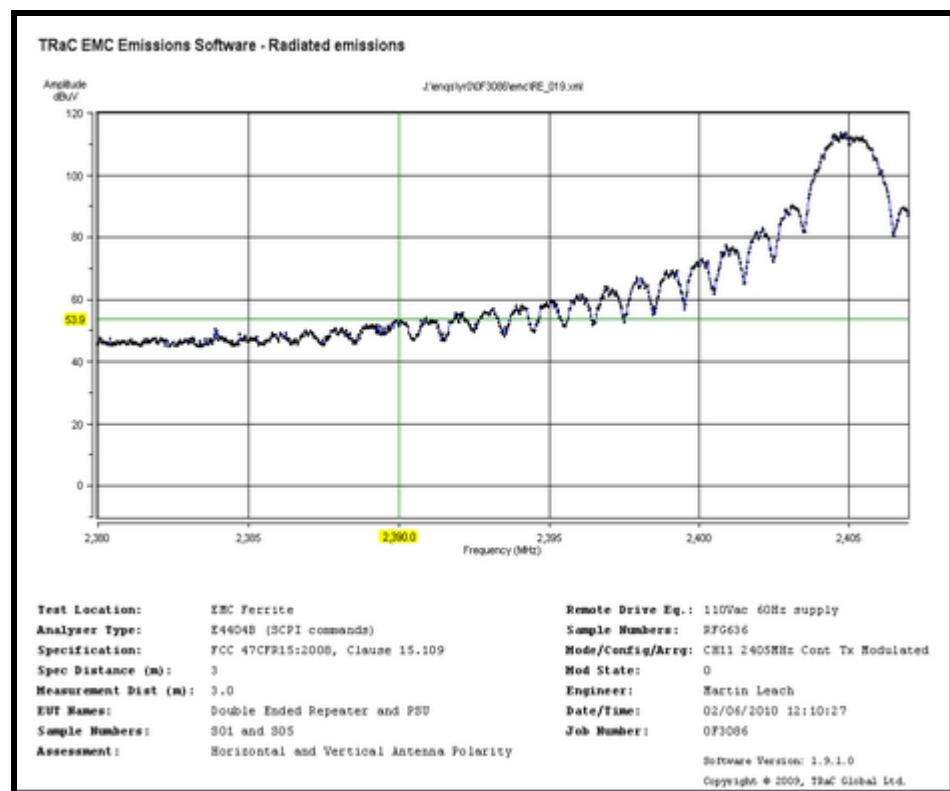


Radiated Transmitter Emissions Channel 11 2405MHz (15.209) Band Edge Compliance RBW 100kHz

The 27% duty cycle was tested for the lower band edge compliance

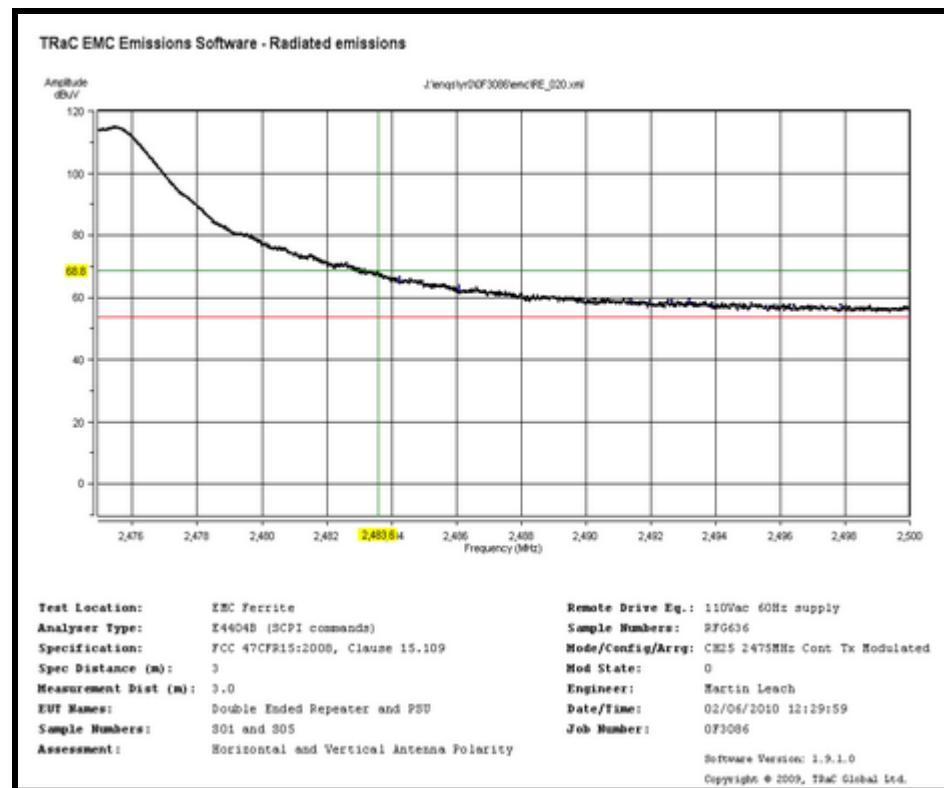


Radiated Transmitter Emissions Channel 25 2475MHz (15.209) Band Edge Compliance
RBW 1MHz

The 27% duty cycle was tested for the upper band edge compliance

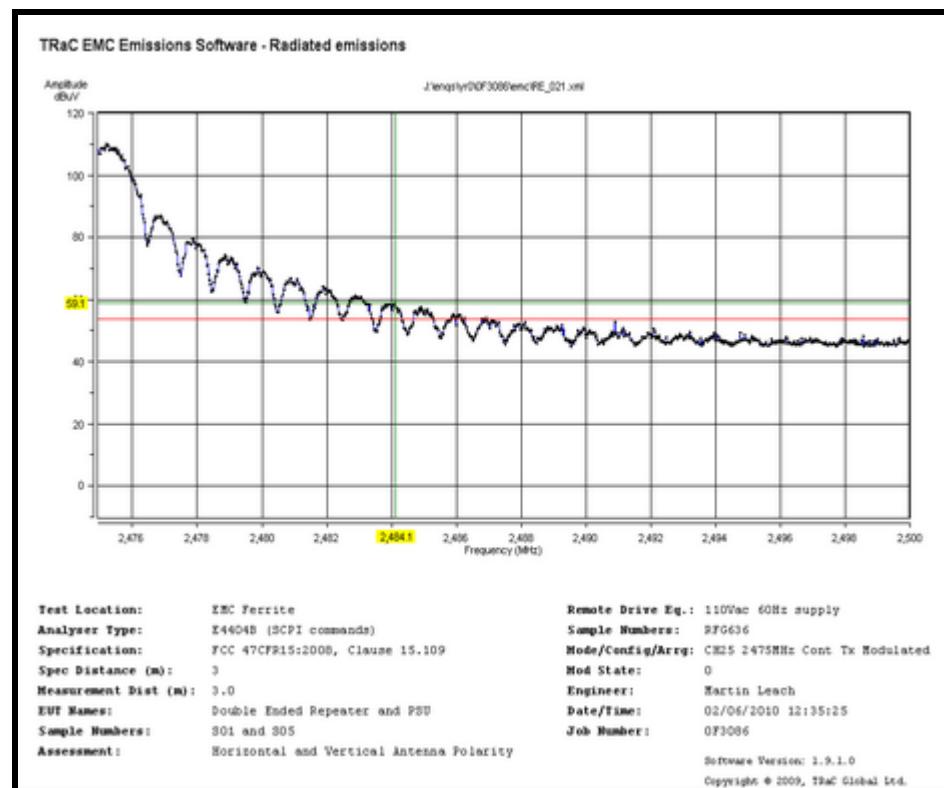


Radiated Transmitter Emissions Channel 25 2475MHz (15.209) Band Edge Compliance
RBW 100kHz


The 27% duty cycle was tested for the upper band edge compliance

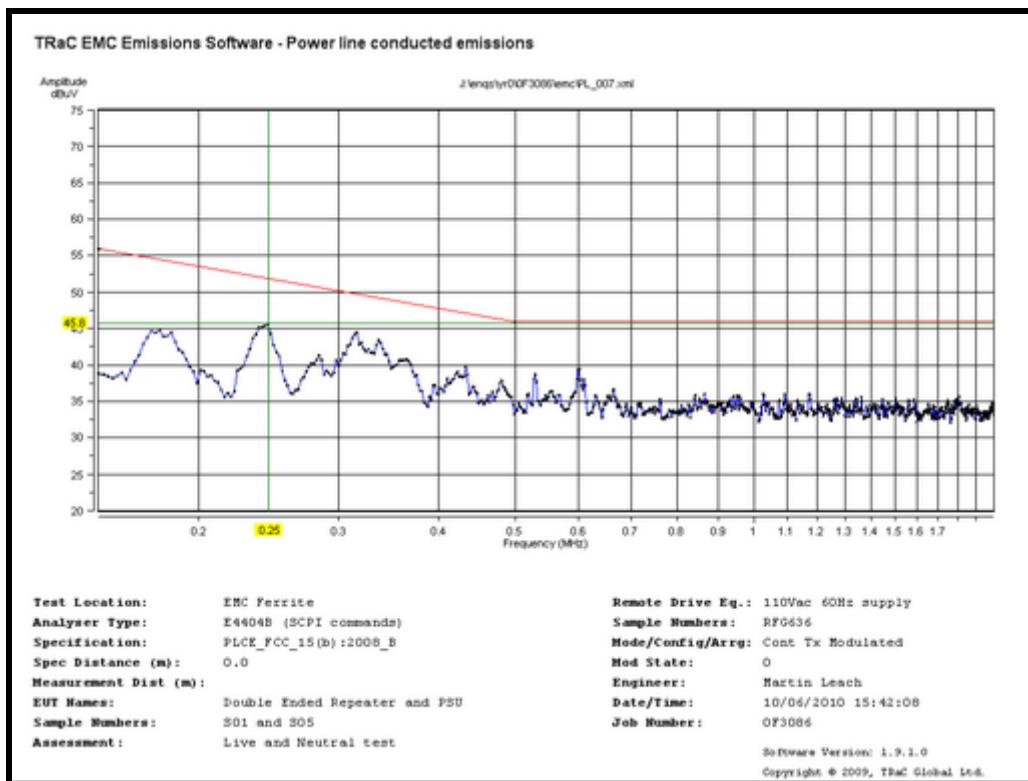


PLCE- EUT transmitting Live and Neutral Lines

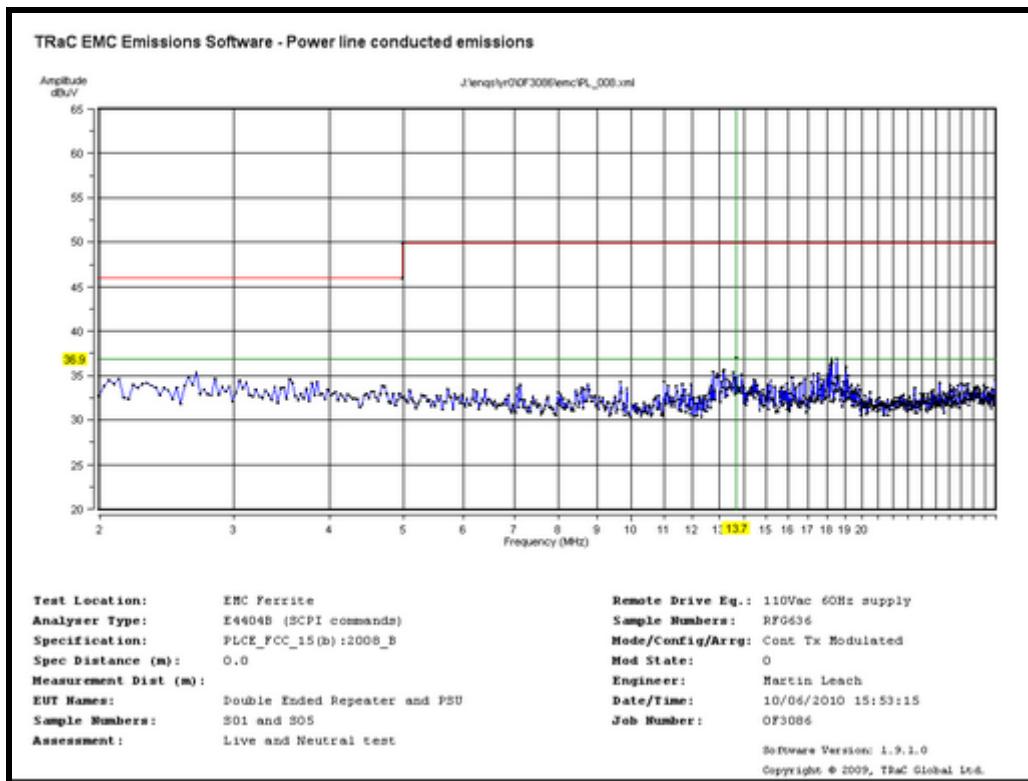

PLCE- EUT transmitting Live and Neutral Lines

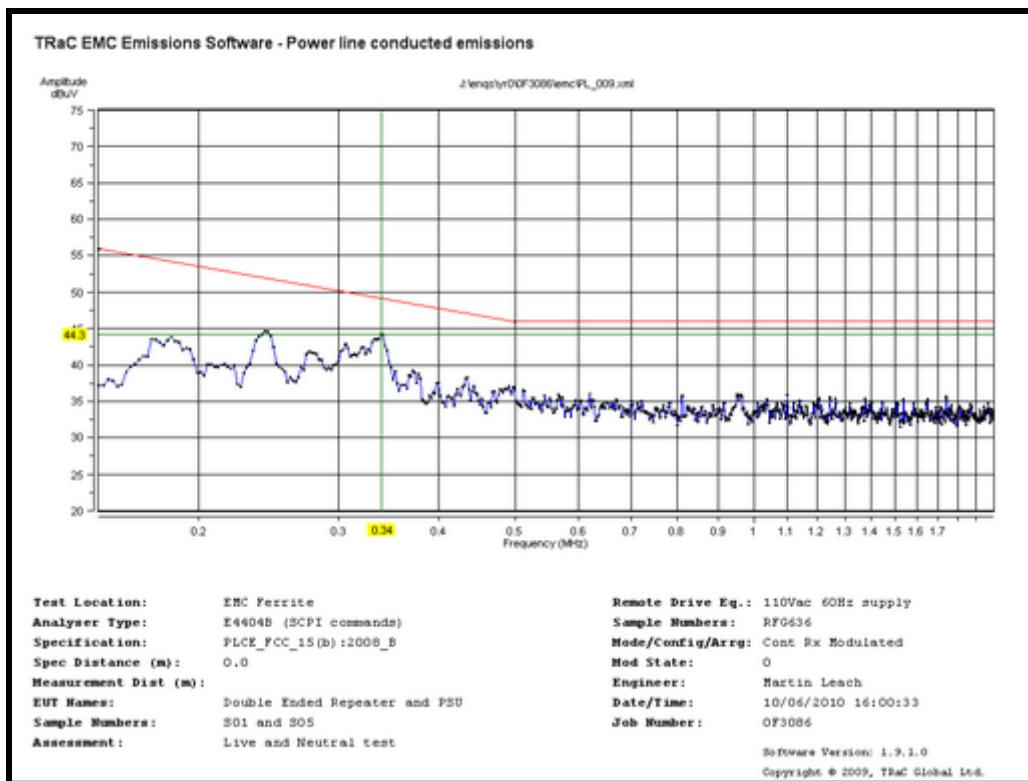

PLCE - EUT Receiving Live and Neutral Lines

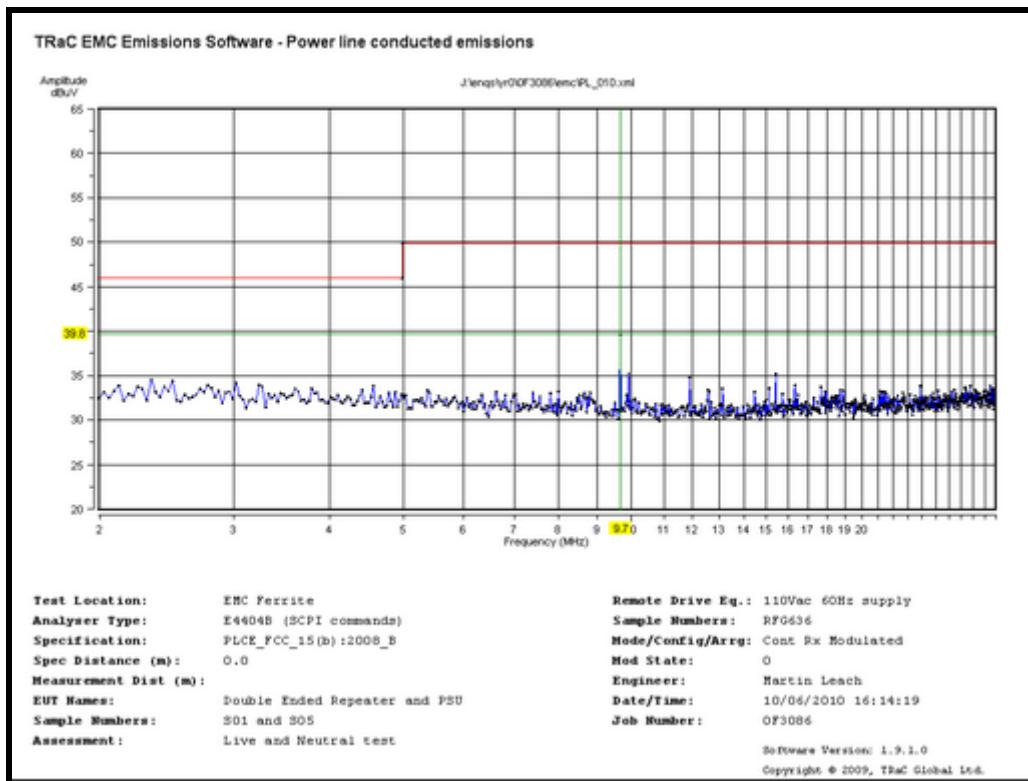

PLCE - EUT Receiving Live and Neutral Lines

Appendix C:**Additional Test and Sample Details**

This appendix contains details of:

1. The samples submitted for testing.
2. Details of EUT operating mode(s)
3. Details of EUT configuration(s) (see below).
4. EUT arrangement (see below).

Throughout testing, the following numbering system is used to identify the sample and its modification state:

Sample No: Sxx Mod w

where:

xx	= sample number	eg. S01
w	= modification number	eg. Mod 2

The following terminology is used throughout the test report:

Support Equipment (SE) is any additional equipment required to exercise the EUT in the applicable operating mode. Where relevant SE is divided into two categories:

SE in test environment: The SE is positioned in the test environment and is not isolated from the EUT (e.g. on the table top during REFE testing).

SE isolated from the EUT: The SE is isolated via filtering from the EUT. (e.g. equipment placed externally to the ALSR during REFE testing).

EUT configuration refers to the internal set-up of the EUT. It may include for example:

- Positioning of cards in a chassis.
- Setting of any internal switches.
- Circuit board jumper settings.
- Alternative internal power supplies.

Where no change in EUT configuration is **possible**, the configuration is described as "single possible configuration".

EUT arrangement refers to the termination of EUT ports / connection of support equipment, and where relevant, the relative positioning of samples (EUT and SE) in the test environment.

For further details of the test procedures and general test set ups used during testing please refer to the related document "EMC Test Methods - An Overview", which can be supplied by TRaC Telecoms & Radio upon request.

C1) Test samples

The following samples of the apparatus were submitted by the client for testing :

Sample No.	Description	Identification
S01	Double Ended Repeater (DER)	None
S05	V-Infinity Switch-Mode Power Supply (Ac-dc plug top power supply) Modle: 3A-061WP05	EMS050120-P5P-SZ

The following samples of apparatus were supplied by TRaC as support or drive equipment (auxiliary equipment):

TRaC Identification	Description
RFG636	110Vac 60Hz power supply
RFG109	110Vac 60Hz power supply

C2) EUT Operating Mode During Testing.

During testing, the EUT was exercised as described in the following tables :

Test	Description of Operating Mode: TX
All tests, except as described below	The EUT was powered via RFG109 ac power supply. The EUT was transmitting on maximum power, 100% duty cycle using O-QPSK with half-sine pulse-shaping - 8-symbol listen-before send for CSMA-CA - Bit rate 250kb/s, symbol rate 62.5ksymbol/s with 4-bit 16-ary orthogonal symbols, chip rate 2000kchip/s) modulation at centre frequencies $F_c = 2405 + (5x(k - 11))$ in MHz, where $k = 11, 18$ and 25

Test	Description of Operating Mode: TX
Radiated Electric Field Emissions Restricted band 15.209 and 15.205	The EUT was powered via RFG636 ac power supply. The EUT was transmitting on maximum power, 100% duty cycle using O-QPSK with half-sine pulse-shaping - 8-symbol listen-before send for CSMA-CA - Bit rate 250kb/s, symbol rate 62.5ksymbol/s with 4-bit 16-ary orthogonal symbols, chip rate 2000kchip/s) modulation at centre frequencies $F_c = 2405 + (5x(k - 11))$ in MHz, where $k = 11, 18$ and 25

Test	Description of Operating Mode RX
Radiated Electric Field Emissions 15.109 digital circuitry	The EUT was powered via RFG636. The EUT was in continuous Receive mode

Test	Description of Operating Mode TX (15.207)
PLCE	The EUT was powered via RFG109. The EUT was transmitting on maximum power, 100% duty cycle using O-QPSK with half-sine pulse-shaping - 8-symbol listen-before send for CSMA-CA - Bit rate 250kb/s, symbol rate 62.5ksymbol/s with 4-bit 16-ary orthogonal symbols, chip rate 2000kchip/s) modulation at centre frequencies $F_c = 2405 + (5x(k - 11))$ in MHz, where $k = 11, 18$ and 25

Test	Description of Operating Mode: Receive (15.107)
PLCE	The EUT was powered via RFG109. The EUT was in continuous Receive mode

C3) EUT Configuration Information.

Sample	Internal Configuration Details
S01	Single possible internal configuration
S05	Single possible internal configuration

C4) List of EUT Ports

Sample : S01
 Tests : RF Antenna Port Conducted Spurious Emissions, 6dB Bandwidth, Power Spectral Density and Conducted Fundamental Carrier Power

Port	Description of Cable Attached	Cable length	Equipment Connected
Antenna port 1	50Ohm coax	N/A	RFG404/REF83 5
Antenna port 2	None	N/A	50Ohm load
dc power port	2 core unscreened	1m	REF112

Sample : S01
 Tests : Radiated Electric Field Emissions Restricted band 15.209 (15.205) and 15.109 digital circuitry

Port	Description of Cable Attached	Cable length	Equipment Connected
Antenna port 1	None	N/A	Antenna
Antenna port 2	None	N/A	Antenna
dc power port	2 core unscreened	1.87m	S05

Sample : S05
 Tests : Radiated Electric Field Emissions Restricted band 15.209 (15.205) and 15.109 digital circuitry

Port	Description of Cable Attached	Cable length	Equipment Connected
ac power port	Plug top ac –dc power supply	N/A	RFG636
dc power port	2 core unscreened	1.87m	S01

Sample : S01
 Tests : Power Line Conducted Emissions 15.207

Port	Description of Cable Attached	Cable length	Equipment Connected
dc power port	2 core unscreened	1.87m	S05
Antenna port 1	None	N/A	Antenna
Antenna port 2	None	N/A	Antenna

Sample : S05
 Tests : Power Line Conducted Emissions 15.207

Port	Description of Cable Attached	Cable length	Equipment Connected
ac power port	Plug top ac –dc power supply	N/A	RFG636
dc power port	2 core unscreened	1.87m	S01

C5 Details of Equipment Used

For Radiated Measurements:

TRAC REF/RFG No.	Type	Description	Manufacturer	Date Calibrated.
274	Lab 10	Large anechoic chamber	TRaC	29/02/08
231	CBL6111	BILOG Antenna	Chase	12/08/08
129	3115	1-18GHz Horn Antenna	EMCO	11/08/08
630	QSH20S20S	18-26GHz Horn antenna	Q-PAR	02/11/06
008	8447D	Pre Amp (30 to 1000MHz)	HP	16/02/10
307	8449B	Microwave pre amp (1 to 26.5GHz)	HP	01/03/10
214	ESAI	Spec Analyser/Test Receiver (LF/HF)	Rhode & Schwarz	22/03/10
RFG404	ESA-E	E4407B Spectrum Analyser	Agilent	10/05/10
REF847	ESU40	Spectrum Analyser/Receiver	Rhode & Schwarz	14/06/10
RFG109	-	110Vac/60Hz supply	Farnell	CAL date N/A
246	07212BD	4.5m N-Type cable	TRaC	22/09/09
270	30-05151-10	3m N-Type cable	TRaC	22/09/09
278	30-05156-10	1m N-Type cable	TRaC	22/09/09
643	ST18/Nm/Nm/48	48 inch Sucoflex cable	Huber & Suhner	22/09/09
650	N-106	3 meter HF Sucoflex cable	Huber & Suhner	22/09/09
651	N-106	7 meter HF Sucoflex cable	Huber & Suhner	22/09/09
REF831		5m K-Type M-M	Teledyne Reynolds	04/05/10
REF833		2m K-Type M-M	Teledyne Reynolds	09/07/10

For Conducted Measurements

TRAC REF/RFG No.	Type	Description	Manufacturer	Date Calibrated.
REF847	ESU40	Spectrum Analyser/Receiver	Rhode & Schwarz	14/06/10
RFG404	E4407B	Spectrum Analyser	Agilent	10/05/10
RFG109	-	110Vac/60Hz supply	Farnell	CAL date N/A
835/836	N10149 N1911A	Power head and meter	Agilent	03/08/09

For Power Line Conducted Emissions

TRAC REF/RFG No.	Type	Description	Manufacturer	Date Calibrated.
REF847	ESU40	Spectrum Analyser/Receiver	Rhode & Schwarz	14/06/10
n/a	Lab 7	Screened room 1	TRaC	CAL date N/A
233	ESH2-Z5	3-phase LISN	Rhode & Schwarz	22/05/10
232	ESH3-Z2	Pulse Limiter	Rhode & Schwarz	16/02/10
404	E4407B	Spectrum Analyser	Agilent	10/05/10
RFG636		110Vac/60Hz supply	Farnell	CAL date N/A

Appendix D:**Additional Information**

The following additional information is included within this test report.

D.1 Data sheet for Antenna

Product Specification



BKR2400
2.4 GHz Multi-position
Antenna

Features

- Groundplane Independent
- External Mount Antenna
- Fixes in three positions
- Ideal for fixed terminals

Specifications	
Radiating element	1/2 Wave Dipole
Frequency range	2.4-2.5 GHz
Peak gain	2 dBi
Polarisation	Linear
Return loss	-13 dB
Power rating	10W
Cable / Connector	SMA-Male or RP-SMA
Dimensions	139 x 13mm (max)

Ordering Options	
FBKR3506B-SM-KR	BKR2400 with SMA-Male Connector
FBKR3506B-RS-KR	BKR2400 with RP-SMA Connector

Specifications subject to change without notice.

5 Little Balmer
Buckingham Industrial Park
Buckingham
MK18 1HU
UK

Tel: +44 (0)1280 824055
Fax: +44 (0)1280 817179
Email: sales@ead-ltd.com
Web: www.ead-ltd.com

EAD
embedded antenna design ltd
Delivering Antenna Innovation




www.ead-ltd.com

BKR2400 | 2.4 GHz Multi-position Antenna

Return Loss



Outline Drawing

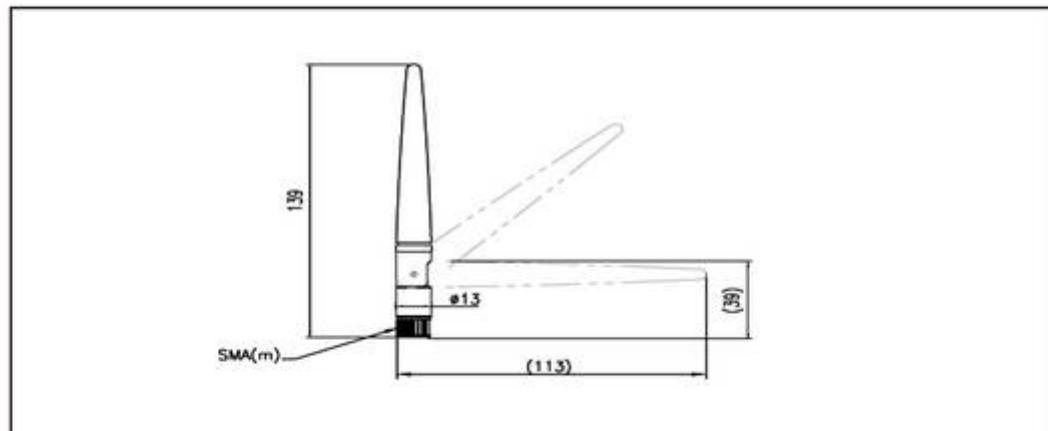

Specifications subject to change without notice.

5 Little Balmer
Buckingham Industrial Park
Buckingham
MK18 1HJ
UK

Tel: +44 (0)1280 824055
Fax: +44 (0)1280 817179
Email: sales@ead-ltd.com
Web: www.ead-ltd.com

ead
embedded antenna design ltd
Delivering Antenna Innovation

Appendix E:

Calculation of the duty cycle correction factor

The following information was supplied by the client to support this assessment:

Hi Martin,

Good talking to you earlier. Answer to questions below,

Duty Cycle*****

Our software provider says:

We do nothing explicitly to ensure duty cycle is reduced. However, depending on the time period over which the measurement is made, it's highly unlikely that we would be transmitting for more than about 10% of the time.

Telegesis say

Max theoretical TX duty cycle: 27%

Correction Factor is: $20 \cdot \text{Log10}(\text{Duty Cycle})$

=11.4dB correction factor.

Duty cycle = the sum of the highest average value pulsewidths over 100ms
100ms

$$= \frac{27ms}{100ms} = 0.27$$

0.27 or 27%

Correction factor (dB) = $20 \times (\text{Log}_{10} 0.27) = -11.37\text{dB}$

Appendix F:

Photographs and Figures

The following photographs were taken of the test samples:

1. Radiated electric field emissions arrangement: front view.
2. Radiated electric field emissions arrangement: rear view.
3. Power line conducted emissions
4. PCB Photo: Front.
5. PCB Photo: Front.
6. PCB Photo: Rear.
7. PCB Photo: Rear.




Photograph 1



Photograph 2



Photograph 3

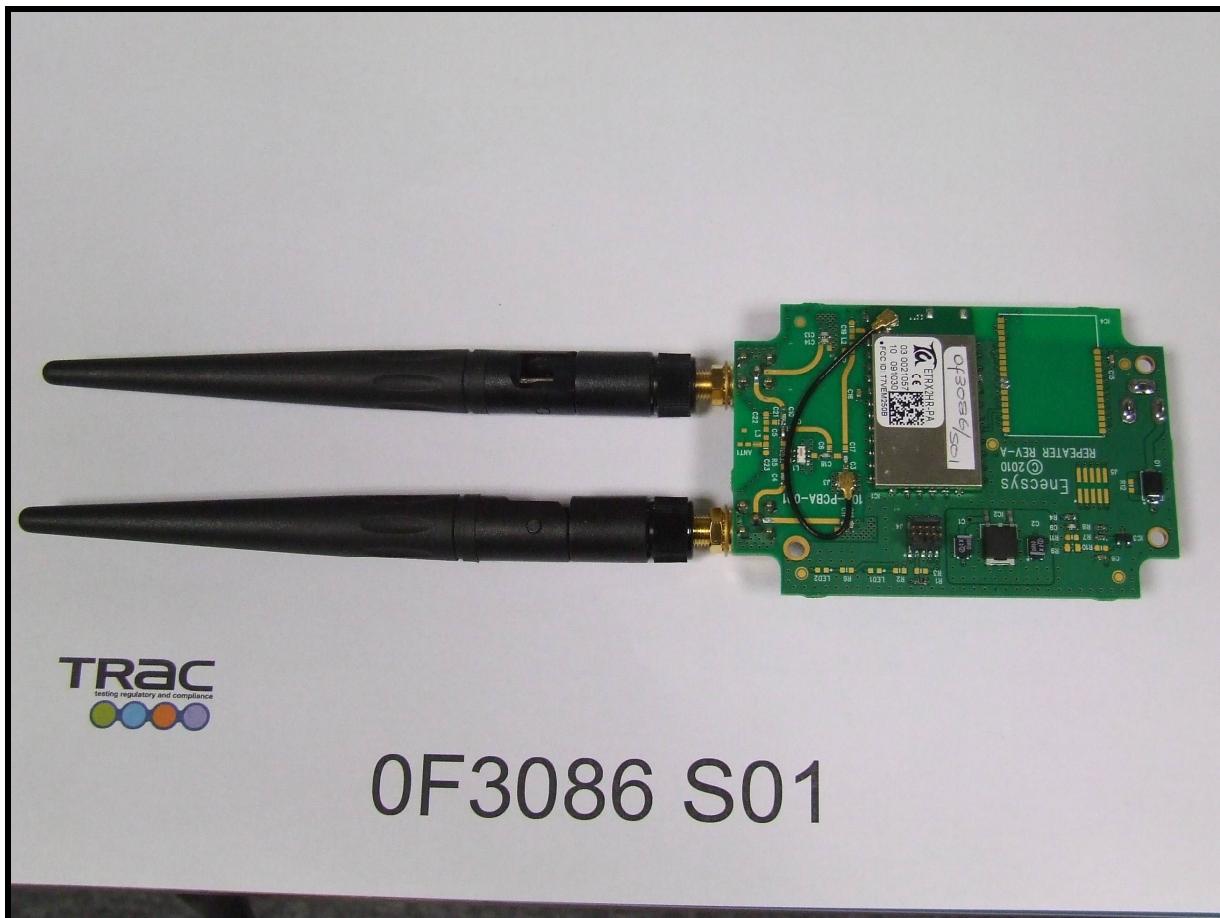


Photograph 4



Photograph 5



Photograph 6

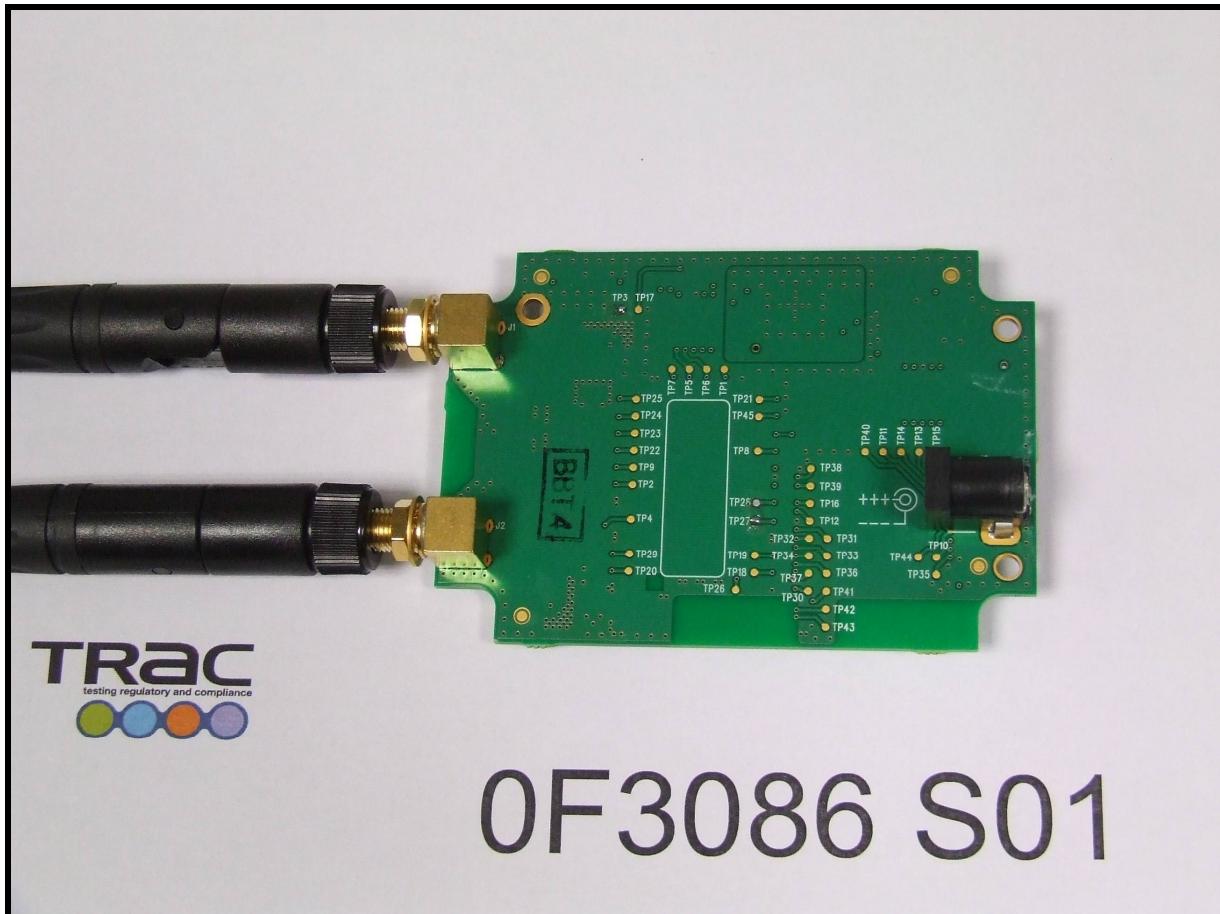

Photograph 7

Appendix G:**MPE Calculation**

OET Bulletin No. 65, Supplement C 01-01

47 CFR §§1.1307 and 2.1091

2.1091 Radio frequency radiation exposure evaluation: mobile devices.

For purposes of these requirements mobile devices are defined by the FCC as transmitters designed to be used in other than fixed locations and to generally be used in such a way that a separation distance of at least 20 centimetres is normally maintained between radiating structures and the body of the user or nearby persons. These devices are normally evaluated for exposure potential with relation to the MPE limits. As the 20cm separation specified under FCC rules may not be achievable under normal operation of the EUT, an RF exposure calculation is needed to show the minimum distance required to be less than 1mW/cm^2 power density limit, as required under FCC rules.

Prediction of MPE limit at a given distance

Equation from page 18 of OET Bulletin 65, Edition 97-01

$$S = \frac{EIRP}{4 \pi R^2} \text{ re - arranged} \quad R = \sqrt{\frac{EIRP}{S 4 \pi}}$$

where:

S = power density

P = power input to the antenna

G = power gain of the antenna in the direction of interest relative to an isotropic radiator

R = distance to the centre of radiation of the antenna

Sample No.	S01	
Maximum peak output power at the antenna terminal:	13.50	dBm
Maximum peak output power at the antenna terminal:	22.38721139	mW
Power density	1.00000000	mW/cm^2
Antenna gain (typical):	2	dBi
Maximum antenna gain:	1.584893192	numeric
Prediction frequency:	2405	MHz

Result

Prediction Frequency (MHz)	Maximum allowable antenna gain: (dBi)	Power density limit (S) (mW/cm^2)	Distance (R) cm required to be less than 1mW/cm^2
2405	2	1.000000	1.680331883

