

Datasheet



TAOGLAS®



Part No:
TU.63.2111

Description

Terminal Mount 6-8.5GHz 2.5dBi Ultra-Wideband Antenna with SMA(M)

Features:

Compact, Low-profile Screw Mount UWB Antenna
Covering Worldwide UWB Bands from 6GHz – 8.5GHz
IP67 Waterproof Rated
Dimensions: Ø8.2 x 35.8mm
Connector: SMA(M)
RoHS & Reach Compliant

1. Introduction	3
2. Enclosure isSpecification	4
3. Mechanical Drawing	5
4. Packaging	6
4. Antenna Characteristics	7
5. Radiation Patterns	11
Changelog	30

Taoglas makes no warranties based on the accuracy or completeness of the contents of this document and reserves the right to make changes to specifications and product descriptions at any time without notice. Taoglas reserves all rights to this document and the information contained herein. Reproduction, use or disclosure to third parties without express permission is strictly prohibited.

Ireland
ISO 9001: 2015
Certified



Taiwan
ISO 9001: 2015
Certified



046
IATF16949

1. Introduction



Super Small, UWB Antenna for High-performance Indoor Positioning, Asset and Access Applications

The Taoglas TU.63 is a unique, super compact, terminal mount ultra-wideband (UWB) antenna. It is engineered to cover all worldwide UWB frequencies between 6 and 8.5 GHz. With excellent efficiency and an omnidirectional radiation pattern with up to 6 dBi gain, it provides strong, homogeneous coverage in all directions from the UWB sensor. The TU.63 is ground plane independent and exhibits exceptional efficiencies of up to 91% on specific bands. The product is mounted with a standard SMA(M) connector, and the enclosure is manufactured from robust ABS material making it suitable for use in harsh environments.

The potential of UWB is enabling a wave of applications that use highly accurate, ultra-reliable location, and distance sensing to deliver new experiences and capabilities. It operates with low power for transmitting large amounts of digital data over a wide spectrum of frequency bands typically spanning more than 500MHz with very low power for short distances up to 250m with latency speeds as low as 1ms. The low power requirements of UWB results in the increased battery life of sensors and tags which in turn reduces overall operational costs.

Typical Applications Include:

- Indoor position location and asset tracking applications
- Smart home device control and entertainment systems
- Keyless entry and access control systems

The TU.63 is a powerful antenna and one of several Taoglas-developed antennas designed for seamless integration and compatibility with any UWB sensor module on the market. Contact your regional Taoglas customer support team for further information.


2. Enclosure is Specification

LTE Electrical									
Band	Frequency (MHz)	Measurement	Efficiency (%)	Average Gain (dB)	Peak Gain (dBi)	Impedance	Polarization	Radiation Pattern	Power Consumption
LRP CH 0	6200-6800	Eval Board 150x90mm	78.9	-1.03	5.84	50 Ω	Linear	Omni	2-5W
		Eval Board 90x150mm	75.1	-1.25	6.07				
		Free Space	79.7	-0.99	3.44				
LRP CH 4	6400-7000	Eval Board 150x90mm	75.8	-1.20	5.76	50 Ω	Linear	Omni	2-5W
		Eval Board 90x150mm	72.0	-1.42	5.95				
		Free Space	76.1	-1.18	3.53				
HRP CH6/LRP CH 1	6700-7300	Eval Board 150x90mm	67.3	-1.72	5.07	50 Ω	Linear	Omni	2-5W
		Eval Board 90x150mm	63.9	-1.95	4.81				
		Free Space	67.4	-1.72	3.53				
LRP CH 5	7000-7600	Eval Board 150x90mm	64.7	-1.89	5.49	50 Ω	Linear	Omni	2-5W
		Eval Board 90x150mm	61.6	-2.10	4.31				
		Free Space	66.5	-1.77	3.38				
HRP CH 8	7200-7800	Eval Board 150x90mm	65.8	-1.82	5.49	50 Ω	Linear	Omni	2-5W
		Eval Board 90x150mm	62.0	-2.08	4.31				
		Free Space	69.1	-1.61	4.02				
HRP CH 9/LRP CH 6	7700-8300	Eval Board 150x90mm	58.2	-2.35	5.30	50 Ω	Linear	Omni	2-5W
		Eval Board 90x150mm	53.7	-2.70	4.18				
		Free Space	72.7	-1.38	4.45				


Mechanical		
Dimensions		Ø8.2 x 35.8mm
Weight		6g
Material		Silicon
Connector		SMA(M)

Environmental		
Temperature Range		-40°C to 85°C
Humidity		Non-condensing 65°C 95% RH
IP Rating		IP67
RoHS Compliant		Yes
REACH Compliant		Yes


4.2 Return Loss

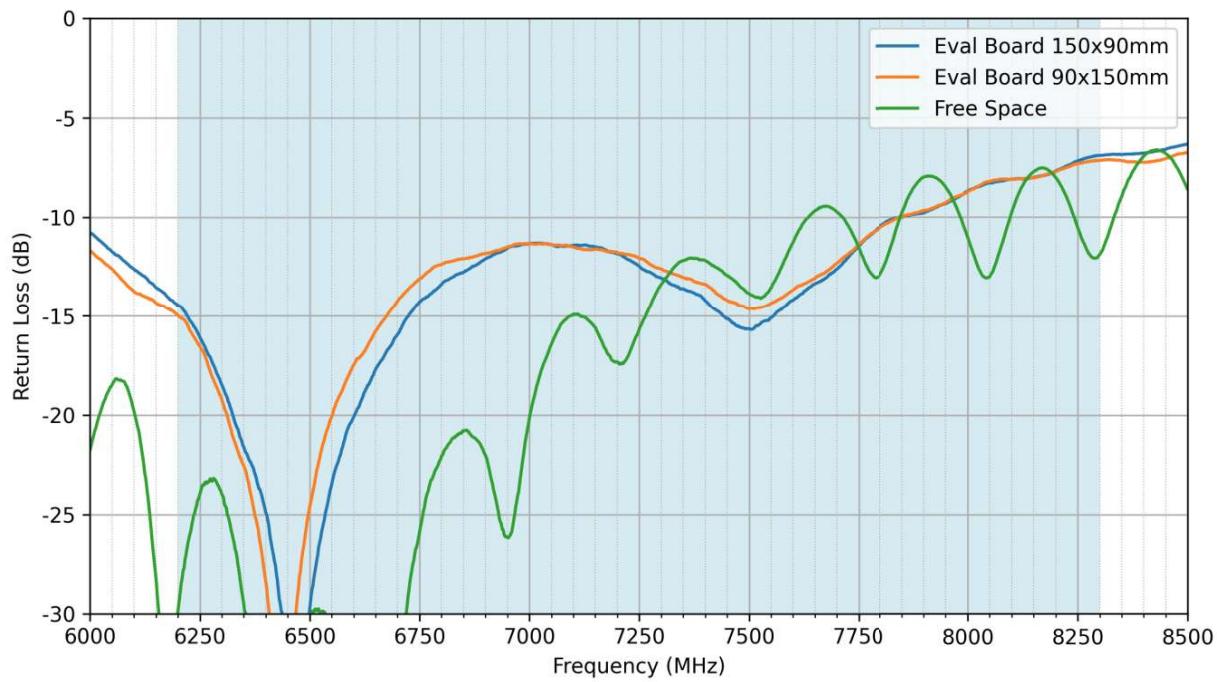


4.3 VSWR

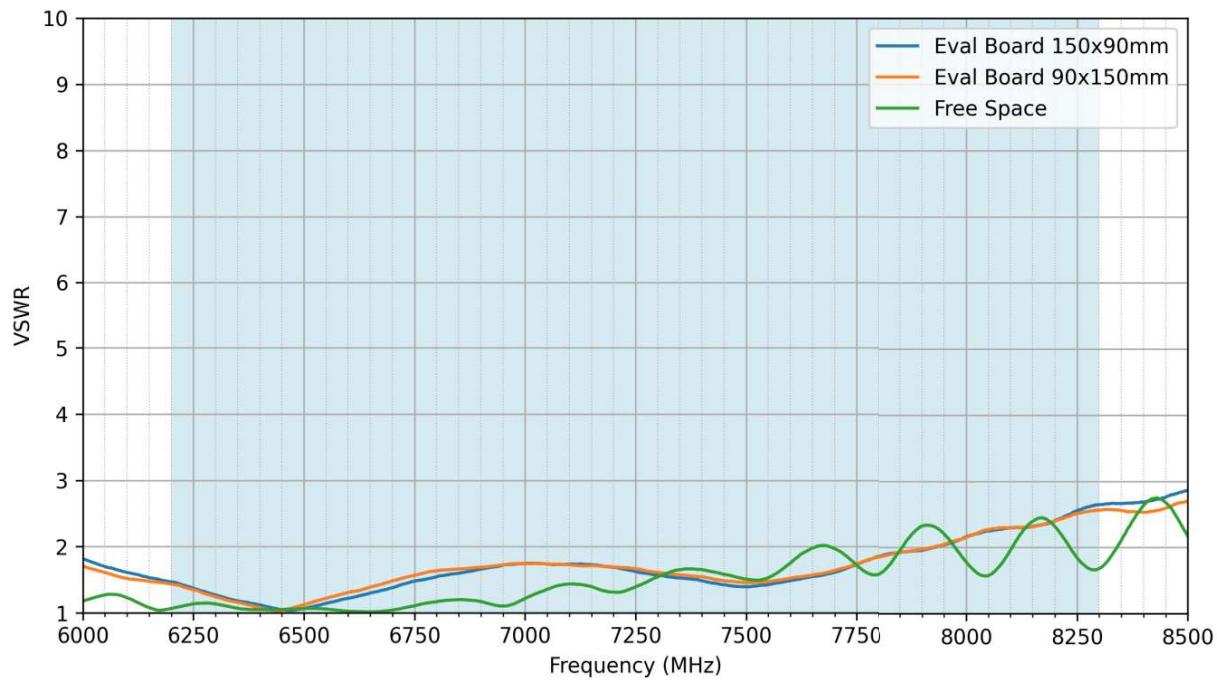


4.4 Efficiency

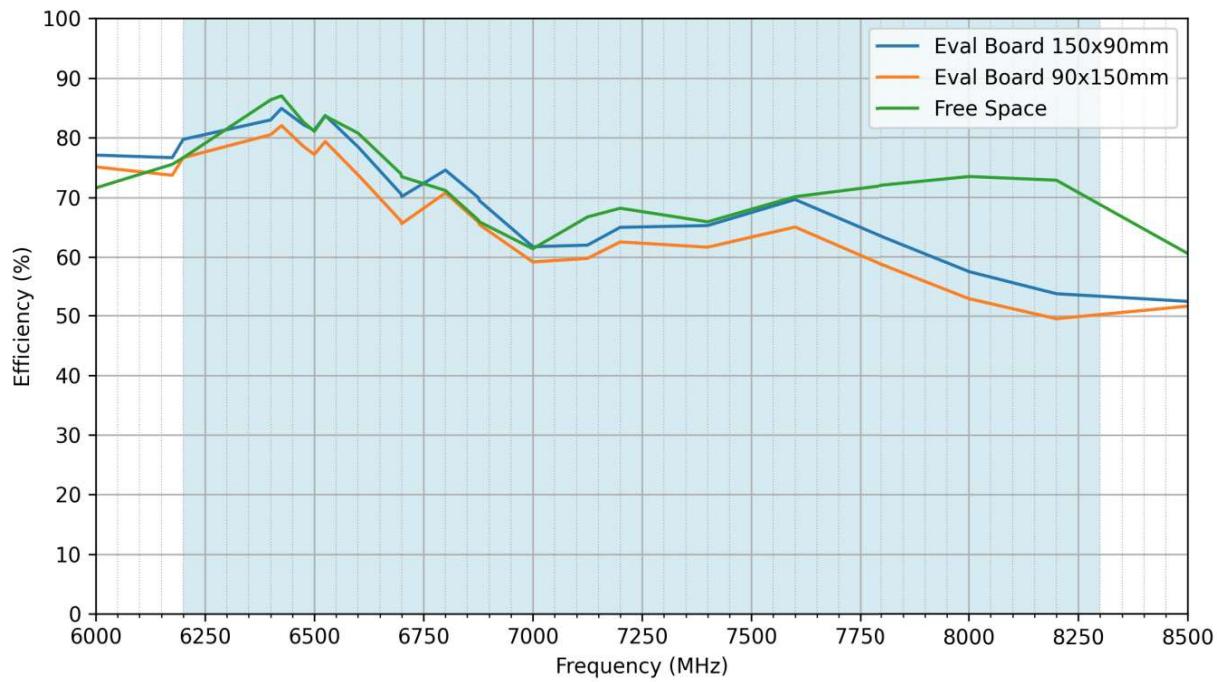

4.5 Average Gain

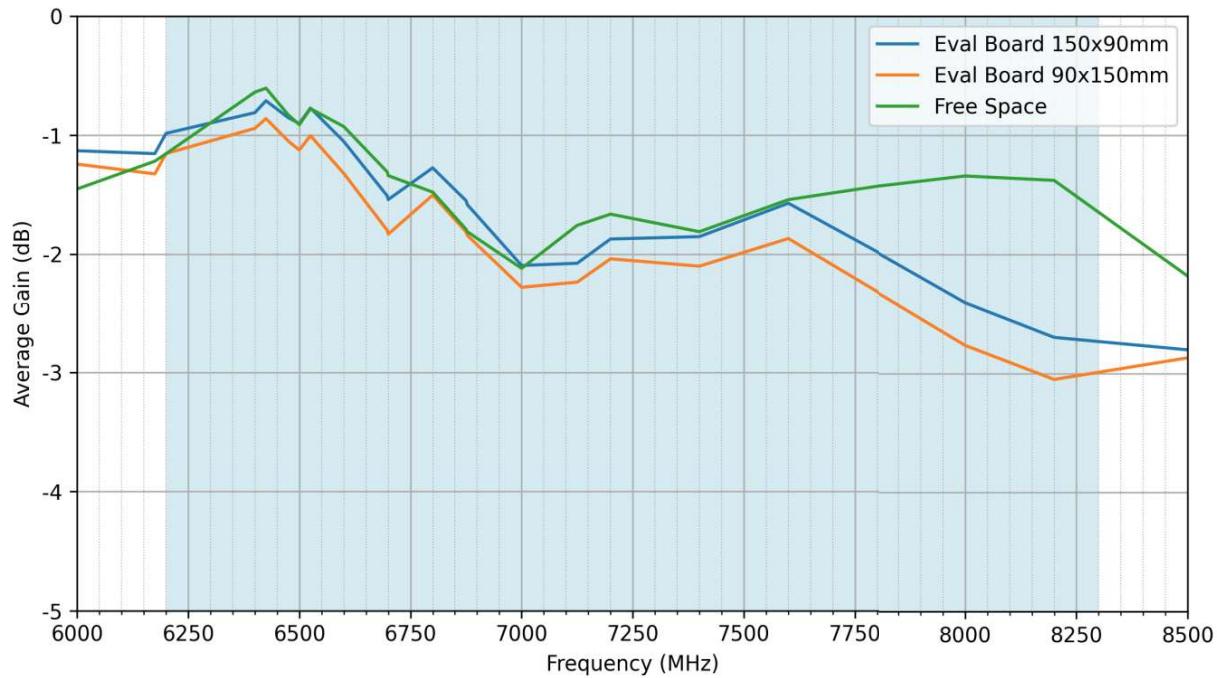

4.6 Peak Gain

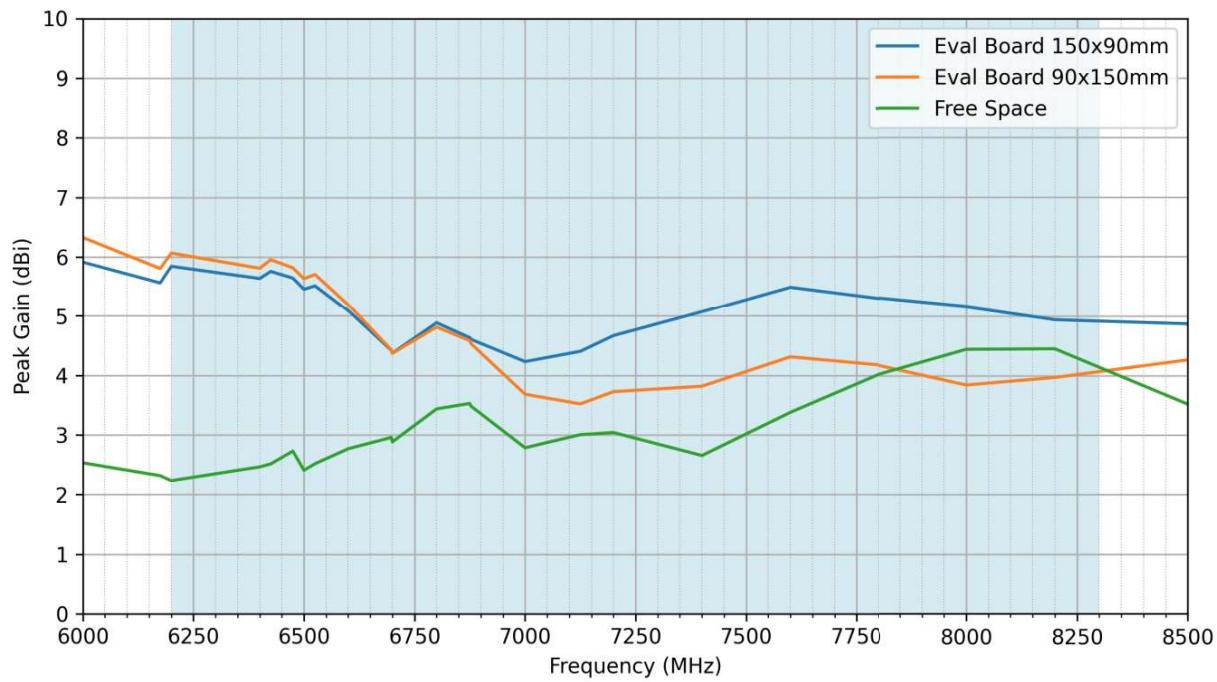

4.7 Group Delay

