

Melbourne176 Harrick Road
Keilor Park, Vic 3042
Tel: +61 3 9365 1000**Sydney**Unit 3/87 Station Road
Seven Hills, NSW 2147
Tel: +61 2 9624 2777Email: emc-general@emctech.com.auWeb: www.emctech.com.au

RADIO TEST REPORT


REPORT NUMBER: M2001003-1**TEST STANDARD: FCC PART 15 SUBPART C
SECTION 15.247****ISED RSS-247 SECTION 5.0****CLIENT: DIGITAL MINING TECHNOLOGY****DEVICE: CAS-GPS NODE****MODEL: PROD1116-E2****FCC ID: YIY-PROD11162****IC ID: 8903A-PROD11162****DATE OF ISSUE: 15 APRIL 2020**

EMC Technologies Pty Ltd reports apply only to the specific samples tested under stated test conditions. It is the manufacturer's responsibility to assure that additional production units of this model are manufactured with identical electrical and mechanical components. EMC Technologies Pty Ltd shall have no liability for any deductions, inferences or generalisations drawn by the client or others from EMC Technologies Pty Ltd issued reports. This report shall not be used to claim, constitute or imply product endorsement by EMC Technologies Pty Ltd.



Accredited for compliance with ISO/IEC 17025 – Testing. The results of tests, calibration and/or measurements included in this document are traceable to Australian/national standards. NATA is a signatory to the ILAC Mutual Recognition Arrangement for the mutual recognition of the equivalence of testing, medical testing, calibration and inspection reports.

This document shall not be reproduced except in full.

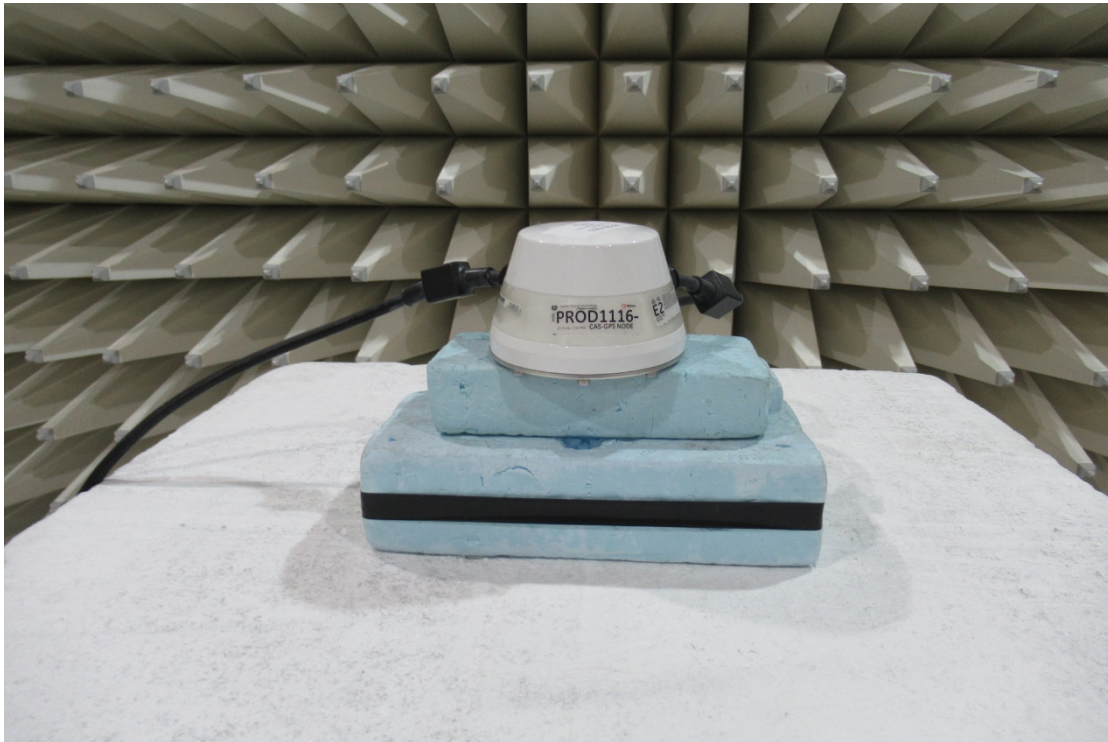

Equipment Under Test (EUT): CAS-GPS Node

REVISION TABLE

Version	Sec/Para Changed	Change Made	Date
1		Initial issue of document	15/04/2020

CONTENTS

1	Test Summary	6
2	Test Facility	6
2.1	General	6
2.2	Test Laboratory/Accreditations	6
3	Test Equipment Calibration	7
4	Measurement Uncertainty	7
5	Device Details.....	8
5.1	EUT (Transmitter) Details.....	8
5.2	EUT (Host) Details.....	8
5.3	Test Configuration	8
5.4	Modifications.....	8
5.5	Deviations from the Standard	8
6	Results.....	9
6.1	§15.203/ RSS-Gen 6.8 Antenna Requirement	9
6.2	§15.205/ RSS-Gen 8.10/ RSS-247 3.3 Restricted Bands of Operation	9
6.3	§15.207/ RSS-Gen 8.8 Conducted Limits	9
6.4	§15.209/ RSS-Gen 8.9 Radiated emission limits; general requirements	9
6.5	§15.247(a)(2)/ RSS-247 5.2(a) 6 dB bandwidth	9
6.5.1	Test Procedure	9
6.5.2	Limits.....	9
6.5.3	Results.....	9
6.6	§15.247(b)(3)/ RSS-247 5.4(d) Peak Output Power	11
6.6.1	Test Procedure	11
6.6.2	Limits.....	11
6.6.3	Results.....	11
6.7	§15.247(d)/ RSS-247 5.5 Out-of-Band/Spurious Emissions	15
6.7.1	Test procedure.....	15
6.7.2	Evaluation of field strength	15
6.7.3	Limits.....	15
6.7.4	Transmitter Spurious Emissions: 9 kHz to 30 MHz	17
6.7.5	Transmitter Spurious Emissions: 30 - 1000 MHz	18
6.7.6	Transmitter Spurious Emissions: 1 - 18 GHz	20
6.7.7	Transmitter Spurious Emissions: 18 – 26 GHz.....	24
6.8	§15.247(d)/ §RSS-247 5.5 Band Edge Emission Measurements	26
6.9	§15.247(e)/ RSS-247 5.2(b) Power Spectral Density.....	30
6.9.1	Test procedure.....	30
6.9.2	Limits.....	30
6.9.3	Results	30
6.10	§15.247(i)/ §RSS-Gen 3.4/§RSS-102 Maximum Permissible Exposure.....	31
6.11	§15.215/ §RSS-Gen 6.7 Occupied Bandwidth – 99% power	31

6.11.1	Test procedure.....	31
6.11.2	Limits.....	31
6.11.3	Results.....	31

GRAPHS

Graph 6-1: 6 dB bandwidth, 22 MHz Bandwidth	10
Graph 6-2: 6 dB bandwidth, 80 MHz Bandwidth	10
Graph 6-3: Single Pulse, 22 MHz Bandwidth	12
Graph 6-4: Number of Pulses, 22 MHz Bandwidth	12
Graph 6-5: Single Pulse, 80 MHz Bandwidth	13
Graph 6-6: Number of Pulses, 80 MHz Bandwidth	13
Graph 6-7: Max EIRP Power, 22 MHz Bandwidth.....	14
Graph 6-8: Max EIRP Power, 80 MHz Bandwidth.....	14
Graph 6-9: 100 kHz bandwidth reference level, 22 MHz Bandwidth.....	16
Graph 6-10: 100 kHz bandwidth reference level, 80 MHz Bandwidth.....	16
Graph 6-11: Transmitter Spurious Emissions, 9kHz – 30 MHz, 22 MHz Bandwidth	17
Graph 6-12: Transmitter Spurious Emissions, 9kHz – 30 MHz, 80 MHz Bandwidth	17
Graph 6-13: Transmitter Spurious Emissions, 30 – 1000 MHz, 22 MHz Bandwidth	18
Graph 6-14: Transmitter Spurious Emissions, 30 – 1000 MHz, 80 MHz Bandwidth	19
Graph 6-15: Transmitter Spurious Emissions, 1 – 18 GHz, 22 MHz Bandwidth, Peak	20
Graph 6-16: Transmitter Spurious Emissions, 1 – 18 GHz, 80 MHz Bandwidth, Peak	21
Graph 6-17: Transmitter Spurious Emissions, 1 – 18 GHz, 22 MHz Bandwidth, Average	22
Graph 6-18: Transmitter Spurious Emissions, 1 – 18 GHz, 80 MHz Bandwidth, Average	23
Graph 6-19: Transmitter Spurious Emissions, 18 – 26 GHz, 22 MHz Bandwidth, Peak	24
Graph 6-20: Transmitter Spurious Emissions, 18 – 26 GHz, 80 MHz Bandwidth, Peak	24
Graph 6-21: Transmitter Spurious Emissions, 18 – 26 GHz, 22 MHz Bandwidth, Average	25
Graph 6-22: Transmitter Spurious Emissions, 18 – 26 GHz, 80 MHz Bandwidth, Average	25
Graph 6-23: 22 MHz Bandwidth, Lower Band-edge, Peak	26
Graph 6-24: 22 MHz Bandwidth, Upper Band edge, Peak	27
Graph 6-25: 22 MHz Nominal Bandwidth, Upper Band edge, Average	27
Graph 6-26: 80 MHz Bandwidth, Lower Band-edge, Peak	28
Graph 6-27: 80 MHz Bandwidth, Upper Band edge, Peak	29
Graph 6-28: 80 MHz Bandwidth, Upper Band edge, Average	29
Graph 6-29: Radiated – Power Spectral Density, 22 MHz Bandwidth	30
Graph 6-30: Radiated – Power Spectral Density, 80 MHz Bandwidth	31
Graph 6-31: Occupied bandwidth, 22 MHz Bandwidth	32
Graph 6-32: Occupied bandwidth, 80 MHz Bandwidth	32

TABLES

Table 6-1: 6dB Bandwidth	9
Table 6-2: Duty Cycle	11
Table 6-3: Maximum peak power	11
Table 6-4: 100 kHz reference level measurement	16
Table 6-5: Transmitter Spurious Emissions, 30 – 1000 MHz, 22 MHz Bandwidth	18
Table 6-6: Transmitter Spurious Emissions, 30 – 1000 MHz, 80 MHz Bandwidth	19
Table 6-7: Transmitter Spurious Emissions, 1 – 18 GHz, 22 MHz Bandwidth, Peak	20
Table 6-8: Transmitter Spurious Emissions, 1 – 18 GHz, 80 MHz Bandwidth, Peak	21
Table 6-9: Transmitter Spurious Emissions, 1 – 18 GHz, 22 MHz Bandwidth, Average	22
Table 6-10: Transmitter Spurious Emissions, 1 – 18 GHz, 80 MHz Bandwidth, Average	23
Table 6-11: 22 MHz Nominal Bandwidth, Lower Band-edge	26
Table 6-12: 22 MHz Nominal Bandwidth, Band edge	27
Table 6-13: 80 MHz Nominal Bandwidth, Lower Band-edge	28
Table 6-14: 80 MHz Bandwidth, Band edge.....	29
Table 6-15: Power spectral density	30
Table 6-16: Occupied Bandwidth	31

RADIO TEST REPROT

CERTIFICATE OF COMPLIANCE

Device: CAS-GPS Node
Model Number: PROD1116-E2
Serial Number: 116320010035
Equivalent Model Numbers: PROD1116-E2X
PROD1116-S2, PROD1116-L2, PROD1116-P2
PROD1116-S2X, PROD1116-L2X, PROD1116-P2X
Manufacturer: DIGITAL MINING TECHNOLOGY

Radio Module: Time of Flight, 2.4 GHz nanoPAN 5375 RF Module
Part Number: MN5375V2
FCC ID: YIY-PROD11162
IC ID: 8903A-PROD11162

Tested for: DIGITAL MINING TECHNOLOGY
Address: 3 CO-WYN CLOSE, FOUNTAINDALE NSW 2258, AUSTRALIA
Phone Number: +61 2 4336 1800
Contact: P C SHIVALINGAM
Email: Pc.Shivalingam@wabtec.com


Standard: FCC Part 15, Subpart C, Section 15.247 Operation within the bands
902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz

ISED RSS-247, Issue 2, Section 5 Standard specifications for
frequency hopping systems and digital transmission systems
operating in the bands 902-928 MHz, 2400-2483.5 MHz and 5725-
5850 MHz


Result: The CAS-GPS Node complied with the applicable requirements above
standards.
Refer to Report M2001003-1 for full details.

Test Date(s): 14 – 17 January and 06 February 2020

Issue Date: 15 April 2020

Test Engineer(s): 
Wilson Xiao

Attestation: *I hereby certify that the device(s) described herein were tested as
described in this report and that the data included is that which was
obtained during such testing.*

Authorised Signatory: 
Chris Zombolas
Managing Director
EMC Technologies Pty Ltd

Issued by: EMC Technologies Pty. Ltd.,
176 Harrick Road, Keilor Park, VIC, 3042, Australia.

Phone: +61 3 9365 1000

E-mail: emc-general@emctech.com.au

Web: www.emctech.com.au



Accreditation No.5292

This document shall not be reproduced except in full.

RADIO REPORT FOR CERTIFICATION

1 TEST SUMMARY

Sec.	Description	FCC	ISED	Result(s)
6.1	Antenna Requirement	§15.203	§RSS-Gen 6.8	Complied
6.2	Restricted Bands of Operation	§15.205	§RSS-Gen 8.10	Complied
6.3	Conducted Limits	§15.207	§RSS-Gen 8.8	Not Applicable
6.4	Radiated emission limits; general requirements	§15.209	§RSS-Gen 8.9	Complied
6.5	6 dB Bandwidth	§15.247(a)(2)	§RSS-247 5.2(a)	Complied
6.6	Peak Output Power	§15.247(b)(3)	§RSS-247 5.4(d)	Complied
6.7	Out-of-Band/Spurious Emissions	§15.247(d)	§RSS-247 5.5	Complied
6.8	Band-Edge Emission Measurements	§15.247(d)	§RSS-247 5.5	Complied
6.9	Power spectral density	§15.247(e)	§RSS-247 5.2(b)	Complied
6.10	Maximum Permissible Exposure	§15.247(i)	§RSS-102	Complied
6.11	Occupied Bandwidth – 99% power	§15.215	§RSS-Gen 6.7	Complied

2 TEST FACILITY

2.1 General

EMC Technologies Pty Ltd is accredited by the FCC as a test laboratory able to perform compliance testing for the public. EMC Technologies Pty Ltd has also been designated as a Conformity Assessment Body (CAB) by Australian Communications and Media Authority (ACMA) under the APECTEL MRA and is designated to perform compliance testing on equipment subject to Declaration of Conformity (DoC) and Certification under Parts 15 and 18 of the FCC Commission's rules – **Registration Number 494713 & Designation number AU0001.**

EMC Technologies Pty Ltd is also an ISED Canada recognized testing laboratory – **ISED company number: 3569B and CAB identifier number: AU0001.**

2.2 Test Laboratory/Accreditations

NATA is the Australian National laboratory accreditation body and has accredited EMC Technologies to operate to the IEC/ISO17025 requirements. A major requirement for accreditation is the assessment of the company and its personnel as being technically competent in testing to the standards. This requires fully documented test procedures, continued calibration of all equipment to the National Standard at the National Measurements Institute (NMI) and an internal quality system similar to ISO 9002. NATA has mutual recognition agreements with the National Voluntary Laboratory Accreditation Program (NVLAP) and the American Association for Laboratory Accreditation (A²LA).

All testing in this report has been conducted in accordance with EMC Technologies' scope of NATA accreditation to ISO 17025 for both testing and calibration and ISO 17020 for Inspection – **Accreditation Number 5292.**

The current full scope of accreditation can be found on the NATA website: www.nata.com.au

3 TEST EQUIPMENT CALIBRATION

Measurement instrumentation and transducers were calibrated in accordance with the applicable standards by an independent NATA registered laboratory such as Keysight Technologies (Australia) Pty Ltd or the National Measurement Institute (NMI) or in-house. All equipment calibration is traceable to Australian national standards at the National Measurements Institute.

Equipment Type	Make/Model/Serial Number	Last Cal. dd/mm/yyyy	Due Date dd/mm/yyyy	Cal. Interval
Chamber	Frankonia SAC-3-2 (R-144)	17/07/2017	17/07/2020	3 Year ^{*1}
EMI Receiver	R&S ESW26 Sn: 101306 (R-143)	27/05/2019	14/05/2020	1 Year ^{*2}
Antennas	EMCO 6502 Active Loop Antenna Sn: 9311-2801 (A-231)	16/11/2018	16/11/2020	2 Year ^{*2}
	SUNOL JB1 Sn: A061917 (A-425)	09/04/2019	09/04/2021	2 Year ^{*2}
	EMCO 3115 Horn Antenna Sn: 9501-4398 (A-406)	16/01/2019	16/01/2022	3 Year ^{*1}
	ETS-Lindgren 3160-09 Horn Antenna Sn: 66032 (A-307)	12/06/2018	12/06/2021	3 Year ^{*1}
Cables ^{*3}	Huber & Suhner Sucoflex 104A Sn: 503055 (C-457)	03/01/2020	03/01/2021	1 Year ^{*1}
	Huber & Suhner Sucoflex 104A Sn: 507100 (C-478)	03/01/2020	03/01/2021	1 Year ^{*1}
	Huber & Suhner Sucoflex 104A Sn: 503061 (C-463)	03/01/2020	03/01/2021	1 Year ^{*1}

Note *1. Internal NATA calibration.

Note *2. External NATA / A2LA calibration.

Note *3. Cables are verified before measurements are taken.

4 MEASUREMENT UNCERTAINTY

EMC Technologies has evaluated the equipment and the methods used to perform the emissions testing. The estimated measurement uncertainties for emissions tests shown within this report are as follows:

Radiated Emissions:	9 kHz to 30 MHz	±4.1 dB
	30 MHz to 300 MHz	±5.1 dB
	300 MHz to 1000 MHz	±4.7 dB
	1 GHz to 18 GHz	±4.6 dB
	18 GHz to 40 GHz	±4.6 dB
Peak Output Power:		±1.5 dB

The above expanded uncertainties are based on standard uncertainties multiplied by a coverage factor of k=2, providing a level of confidence of approximately 95%.

Application of measurement uncertainty for this report:

The referenced uncertainty standard specifies that determination of compliance shall be based on measurements without taking into account measurement instrumentation uncertainty. However, the measurement uncertainty shall appear in the test report.

5 Device Details

(Information supplied by the Client)

CAS-GPS Intelligent multi-purpose node comprises of a high-performance GPS receiver, Vehicle to Vehicle (V2V) radio transceiver, high accuracy Ranging RF transceiver (ToF), RS-232/485 communications, Digital Input (2) / Output (1), Personal Area Network (PAN) and internal battery.

5.1 EUT (Transmitter) Details

Radio:	Time of Flight, 2.4 GHz nanoPAN 5375 RF Module
Manufacturer:	Nanotron Technologies GmbH
Frequency band:	2400 - 2483.5 MHz
Number of Channels:	1
Operating Frequency:	2437 or 2442 MHz
Nominal Bandwidth:	22 or 80 MHz (<i>declared by client</i>)
Modulation:	CSS
Antenna:	Integral PCB antenna
Antenna gain:	2 dBi (max)

5.2 EUT (Host) Details

Test Sample:	CAS-GPS Node
Model Number:	PROD1116-E2
Serial Number:	116320010035
Variant Model:	PROD1116-E2, CAS-GPS Light Vehicle Expandable Node. PROD1116-E2X, CAS-GPS Light Vehicle Expandable Node XTD PROD1116-L2, CAS-GPS Light Vehicle Node PROD1116-L2X, CAS-GPS Light Vehicle Node XTD PROD1116-S2, CAS-GPS Type S Node PROD1116-S2X, CAS-GPS Type S Node XTD PROD1116-P2, CAS-GPS Type P Node PROD1116-P2X, CAS-GPS Type P Node XTD
Supply Rating:	12V/24V DC, 3A/1.5A
Manufacturer:	Digital Mining Technology

5.3 Test Configuration

Testing was performed with the EUT set to transmit continuously with modulation applied. TOF parameter "Power: 100" was set via PT Manager 0.03.121.

5.4 Modifications

No modifications were required to achieve compliance.

5.5 Deviations from the Standard

Note any deviations to the standard



Accreditation No.5292

This document shall not be reproduced except in full.

6 RESULTS

6.1 §15.203/ RSS-Gen 6.8 Antenna Requirement

CAS-GPS Node with 2.4 GHz nanoPAN 5375 RF Module incorporates two integral PCB antennas and cannot be replaced by another type.

Antenna Type: PCB Chip

Antenna gain: 2.0 dBi

Connector: Not Applicable

The above installation will prevent any unauthorised switching of antennas.

6.2 §15.205/ RSS-Gen 8.10/ RSS-247 3.3 Restricted Bands of Operation

The provisions of the §15.205/ RSS-Gen 8.10/ RSS-247 3.3 restricted bands of operation and §15.209 radiated emissions limits have been met, refer to section 6.7

6.3 §15.207/ RSS-Gen 8.8 Conducted Limits

The device is battery DC powered and does not connect directly or indirectly to the AC mains network. Test was not applicable.

6.4 §15.209/ RSS-Gen 8.9 Radiated emission limits; general requirements

The provisions of the §15.205/ RSS-Gen 8.10/ RSS-247 3.3 restricted bands of operation and §15.209/ RSS-Gen 8.9 radiated emissions limits have been met, refer to section 6.7

6.5 §15.247(a)(2)/ RSS-247 5.2(a) 6 dB bandwidth

6.5.1 Test Procedure

The tests were performed in accordance with ANSI C63.10: 2013 Clause 11.8 DTS bandwidth.

The 6 dB bandwidth was measured while the device was transmitting with typical modulation applied. The resolution bandwidth of 100 kHz and the video bandwidth of 300 kHz were utilised when measuring the bandwidth.


6.5.2 Limits

In the band 2400-2483.5MHz, the minimum 6 dB bandwidth is to be at least 500 kHz.

6.5.3 Results


Table 6-1: 6dB Bandwidth

Frequency [MHz]	Nominal Bandwidth	6 dB Bandwidth [kHz]	Limit [kHz]
2437	22 MHz	16187	≥ 500
2442	80 MHz	53184	≥ 500

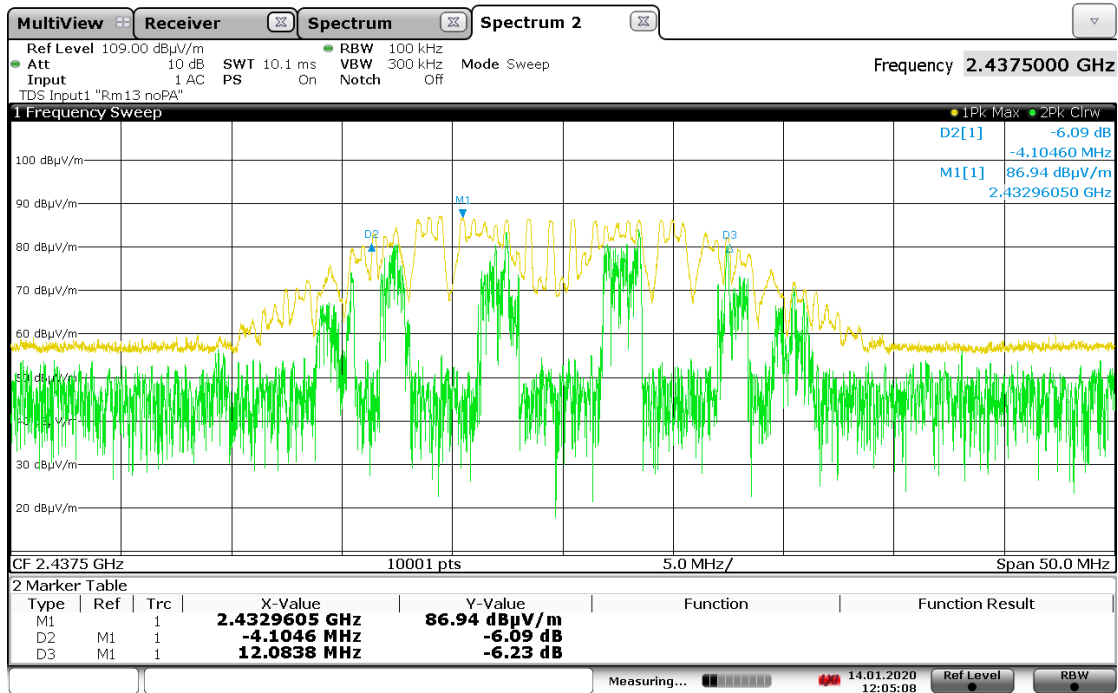

12:05:08 14.01.2020

Graph 6-1: 6 dB bandwidth, 22 MHz Bandwidth

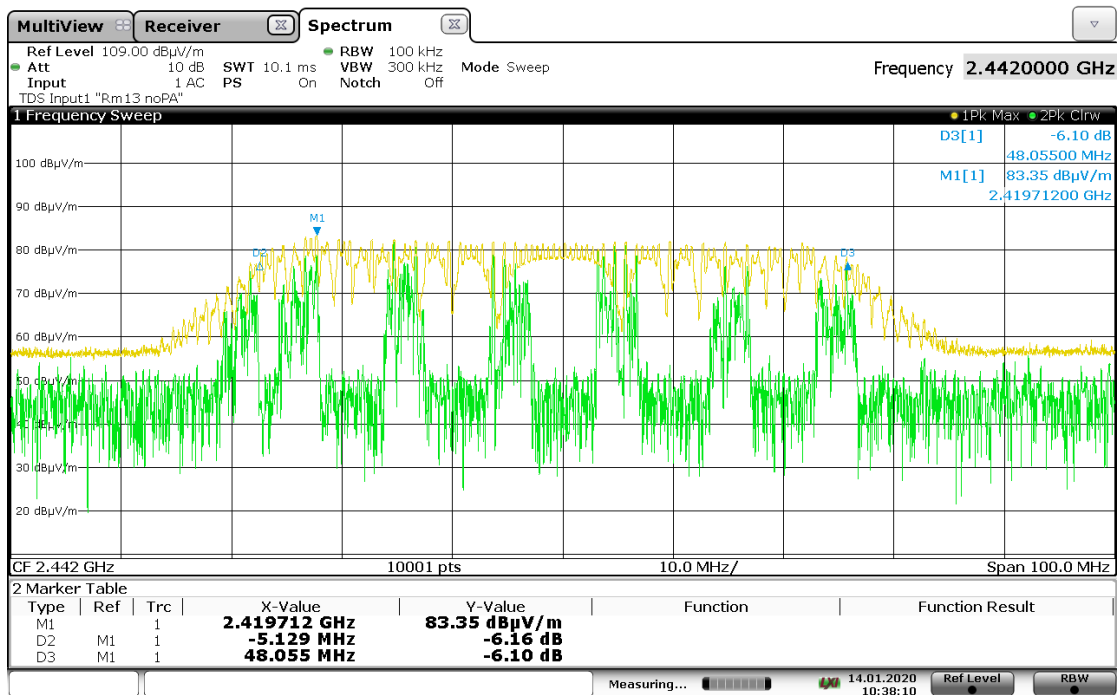

10:38:10 14.01.2020

Graph 6-2: 6 dB bandwidth, 80 MHz Bandwidth

6.6 §15.247(b)(3)/ RSS-247 5.4(d) Peak Output Power

6.6.1 Test Procedure

The field strength of the fundamental transmitted frequency was measured inside a semi-anechoic chamber compliant with ANSI C63.4: 2014 in accordance to ANSI C63.10: 2013 clause 11.9.2.2.4.

The EUT was positioned on a test turn-table and rotated through 360° to determine the highest emissions. The measurement antenna was also varied between 1 and 4 metres height. Different orientations of the EUT (x, y and z-axis) and measurement antenna polarisations (vertical and horizontal) were investigated to produce the highest emission EIRP.

All measurements were made at a distance of 3 metres.

6.6.2 Limits

The maximum peak conducted output power at 2400-2483.5 MHz is 1 Watts or 30 dBm.

6.6.3 Results

Table 6-2: Duty Cycle


Frequency [MHz]	Nominal Bandwidth	Single Pulse Time [ms]	Number of Pulses in 100 ms	Duty Cycle (D)	Correction Factor (dB)*
2437	22 MHz	0.37675	98	36.92%	4.327
2442	80 MHz	0.37669	103	38.80%	4.112

Note: Correction factor = $10 * \log (1/D)$


Table 6-3: Maximum peak power

Freq. [MHz]	E-Field @ 3 m		Correction Factor (dB)	EIRP (dBm)	Antenna Gain (dBi)	Equivalent Conducted Output Power (dBm)	Limit (dBm)	Results
	dBuV/m	dBm						
2437	92.95	-2.28	4.327	2.05	2	0.05	30	Complied
2442	93.75	-1.48	4.11	2.63	2	0.63	30	Complied


The measured radiated field strength is converted to equivalent conducted output power for checking compliance (KDB 558074 D01 Section 3).

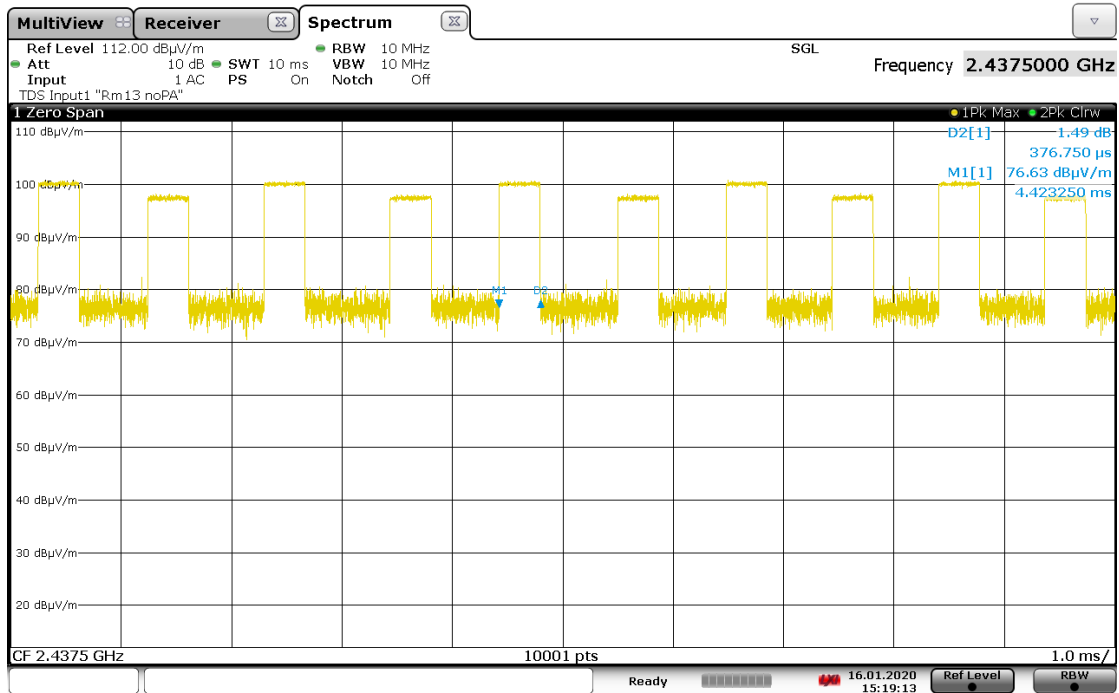

Graph 6-3: Single Pulse, 22 MHz Bandwidth

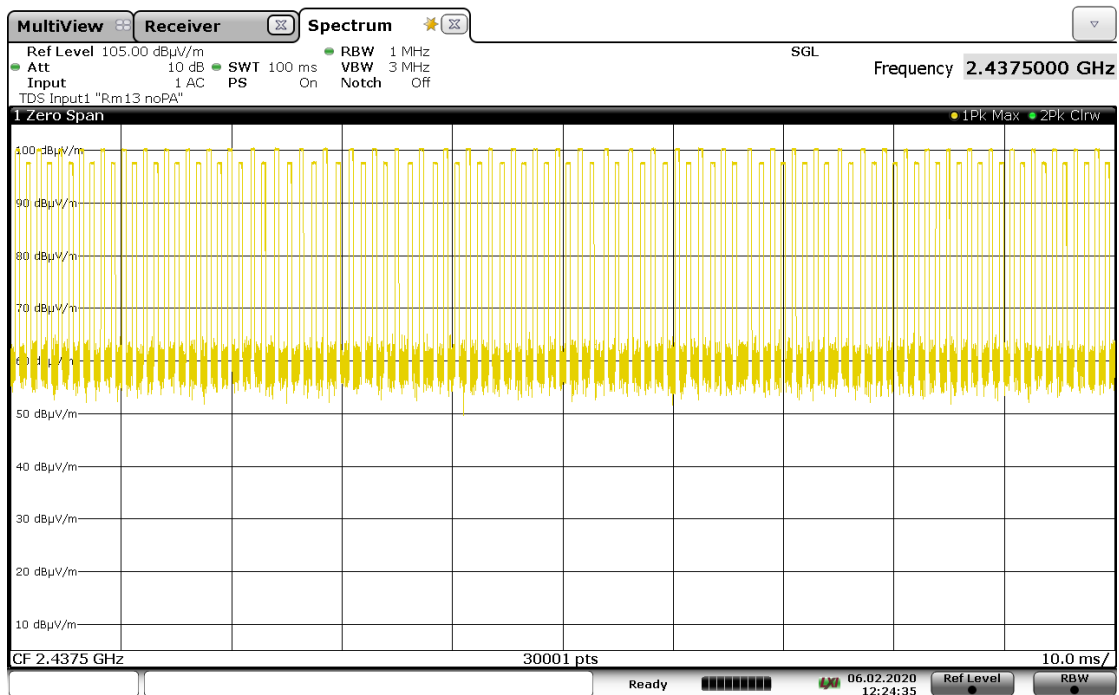


Graph 6-4: Number of Pulses, 22 MHz Bandwidth

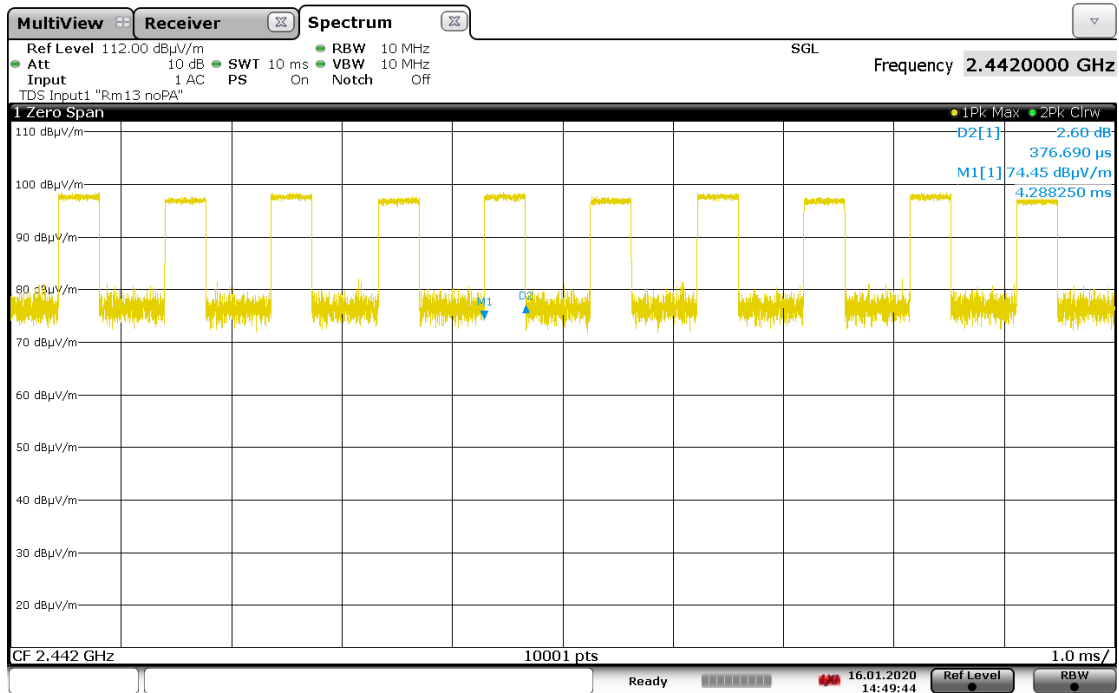


14:49:44 16.01.2020

Graph 6-5: Single Pulse, 80 MHz Bandwidth

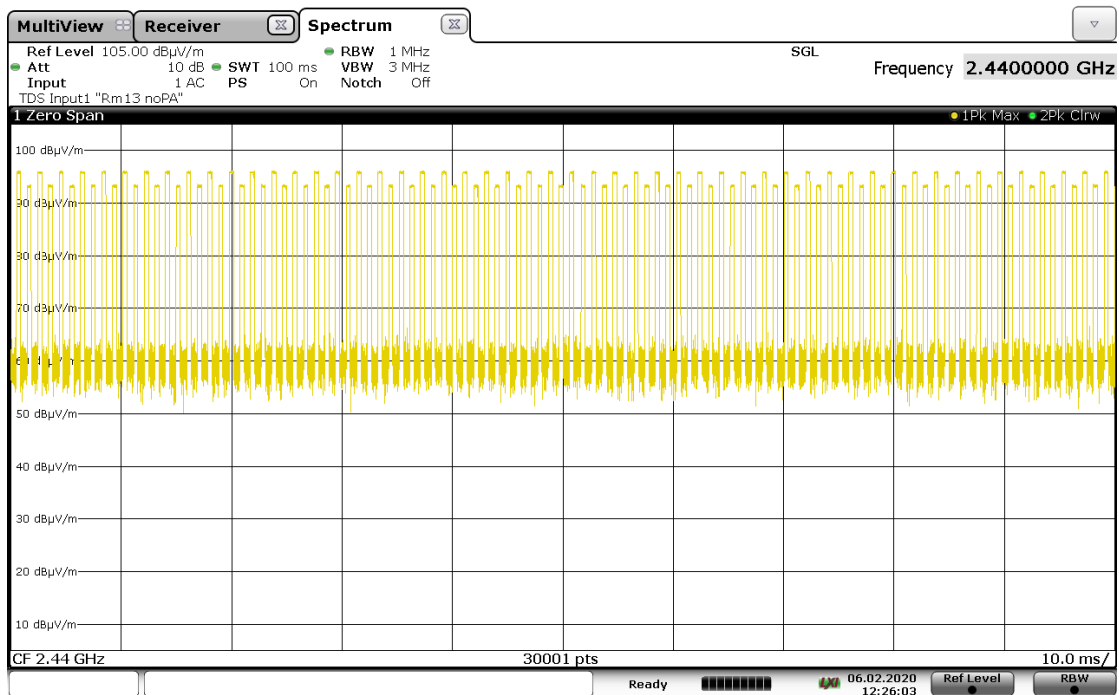


12:26:03 06.02.2020

Graph 6-6: Number of Pulses, 80 MHz Bandwidth

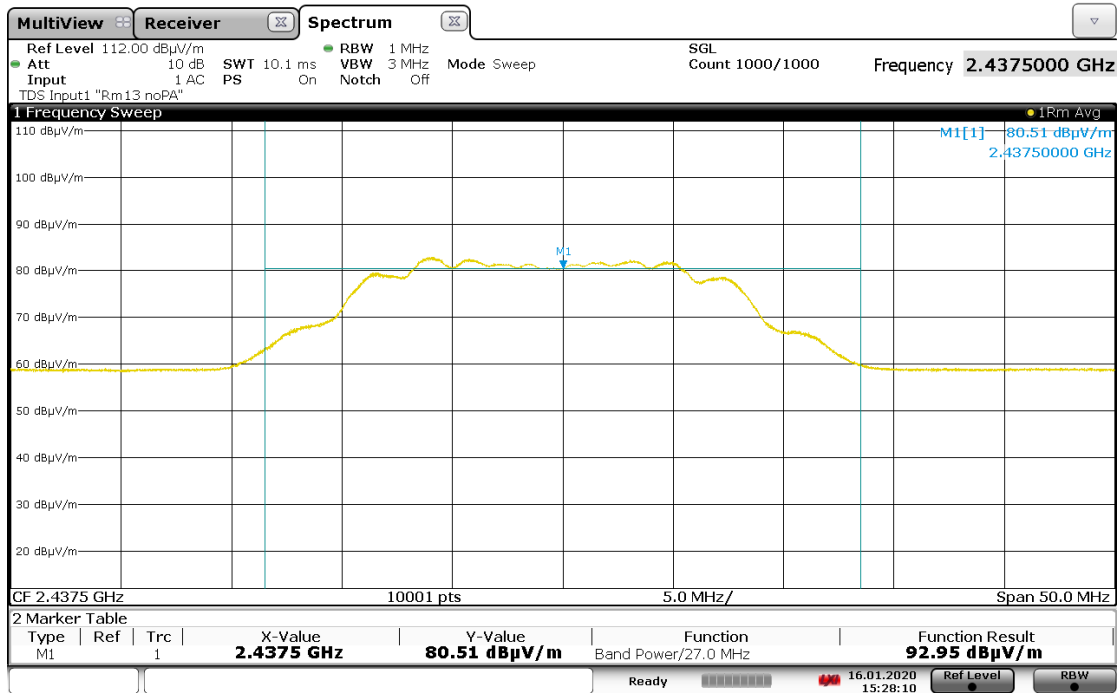

15:28:10 16.01.2020

Graph 6-7: Max EIRP Power, 22 MHz Bandwidth

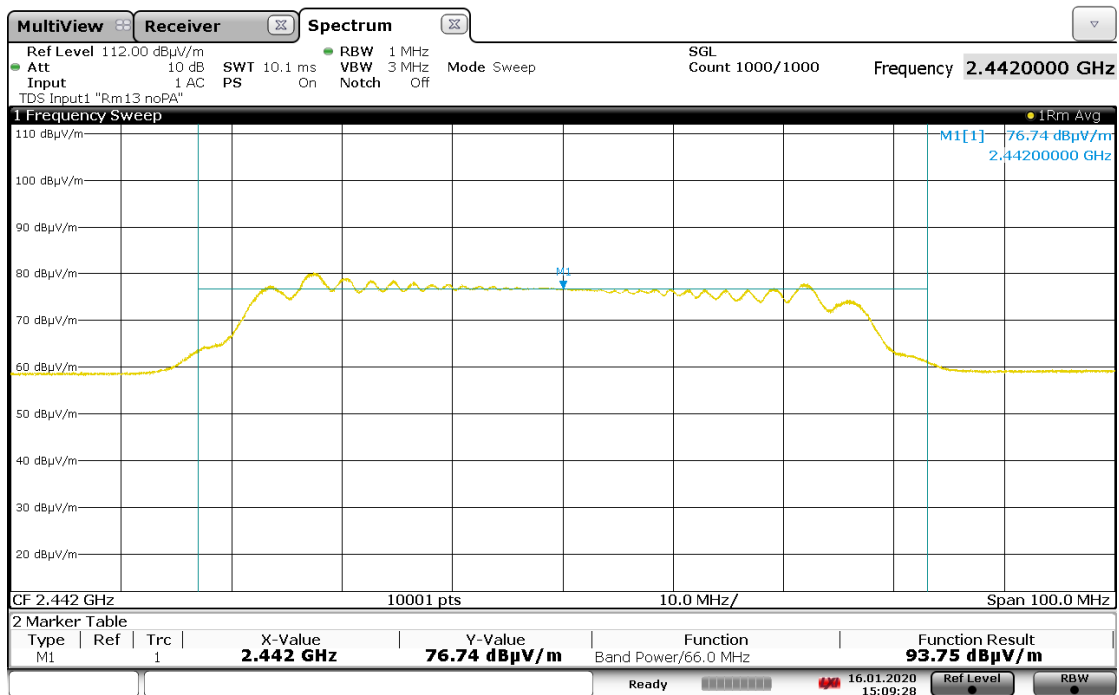

15:09:29 16.01.2020

Graph 6-8: Max EIRP Power, 80 MHz Bandwidth

6.7 §15.247(d)/ RSS-247 5.5 Out-of-Band/Spurious Emissions

6.7.1 Test procedure

Radiated out-of-band/spurious emissions measurements were performed in a semi-anechoic chamber compliant with ANSI C63.4: 2014.

The test frequency range was sub-divided into smaller bands with the defined resolution bandwidths to permit reliable display and identification of emissions.

Frequency range [MHz]	Measurement Bandwidth [kHz]	Measurement Distance [m]	Antenna
0.009 to 0.150	0.2	3	0.6 metre loop antenna
0.150 to 30	9	3	
30 to 1000	120	3	
1000 to 18 000	1000	3	Biconilog hybrid
18 000 to 40 000	1000	1	
			Standard gain or broadband horn

EUT was set at a height of 0.8 m for measurements below 1000 MHz and set at a height of 1.5 m for measurements above 1000 MHz.

The sample was slowly rotated with the spectrum analyser set to Max-Hold. This was performed for at least two antenna heights. When an emission was located, it was positively identified and its maximum level found by rotating the automated turntable and by varying the antenna height. For below 1000 MHz the emissions were measured with a Quasi-Peak detector, and for above 1000 MHz the emissions were measured with Peak and Average detectors.

EUT was investigated on all three axes (x, y, and z) with the loop antenna. Measurements on the worst axis are presented below.

The measurement data for each frequency range was corrected for cable losses, antenna factors and preamplifier gain. This process was performed for both horizontal and vertical polarisations of the measurement antenna.

6.7.2 Evaluation of field strength

Field strengths were calculated automatically by the software using pre-stored calibration data. The method of calculation is shown below:

$$E = V + AF - G + L$$

Where: E = Radiated Field Strength in dBμV/m.

V = EMI Receiver Voltage in dBμV/m.

AF = Antenna Factor in dB (stored as a data array).

G = Preamplifier Gain in dB (stored as a data array).

L = Cable loss in dB (stored as a data array of Insertion Loss versus frequency).

6.7.3 Limits


The limit applied is in accordance with the out-of-band/spurious emissions limit defined in §15.247(d).

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power.

The in-band peak PSD in 100 kHz bandwidth were measured on all three channels. The maximum PSD level was used to establish the limit. However, the general limits of §15.209 apply for the restricted bands of operation defined in §15.205.

Table 6-4: 100 kHz reference level measurement

Freq. (MHz)	Nominal Bandwidth	Peak at 3 m (dB μ V/m)	Limit at 3m (dB μ V/m)
2437	22 MHz	87.23	67.23
2442	80 MHz	83.53	-

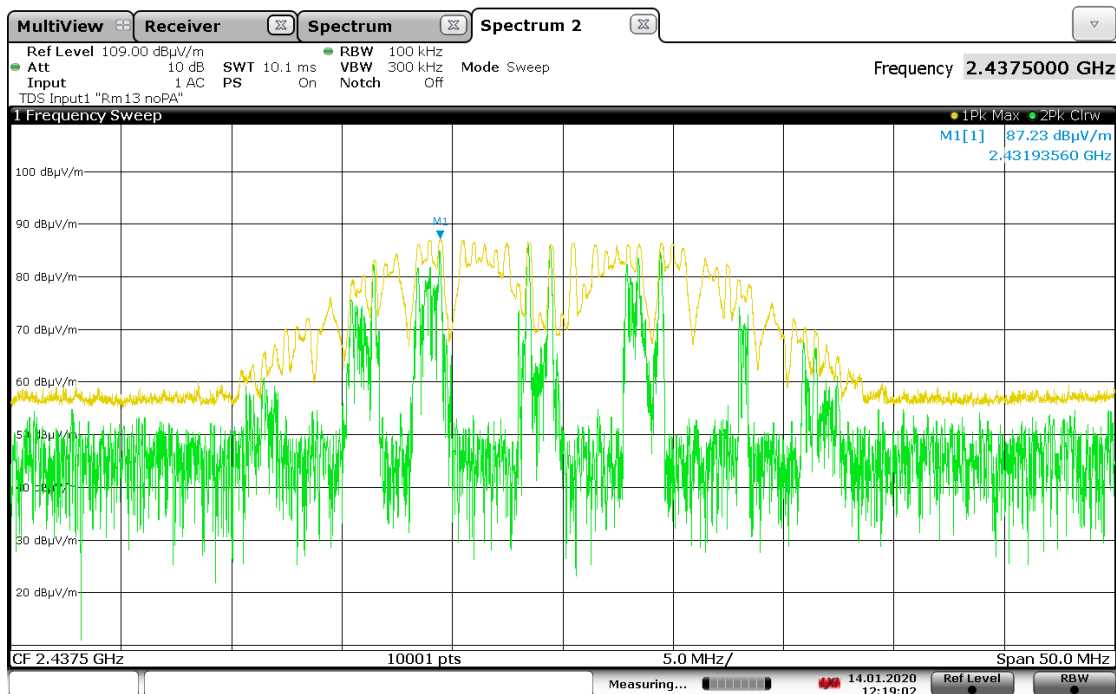

12:19:03 14.01.2020

Graph 6-9: 100 kHz bandwidth reference level, 22 MHz Bandwidth




10:49:57 14.01.2020

Graph 6-10: 100 kHz bandwidth reference level, 80 MHz Bandwidth


6.7.4 Transmitter Spurious Emissions: 9 kHz to 30 MHz

All emissions measured in the frequency band 9kHz - 30MHz complied with the requirements of the standard.

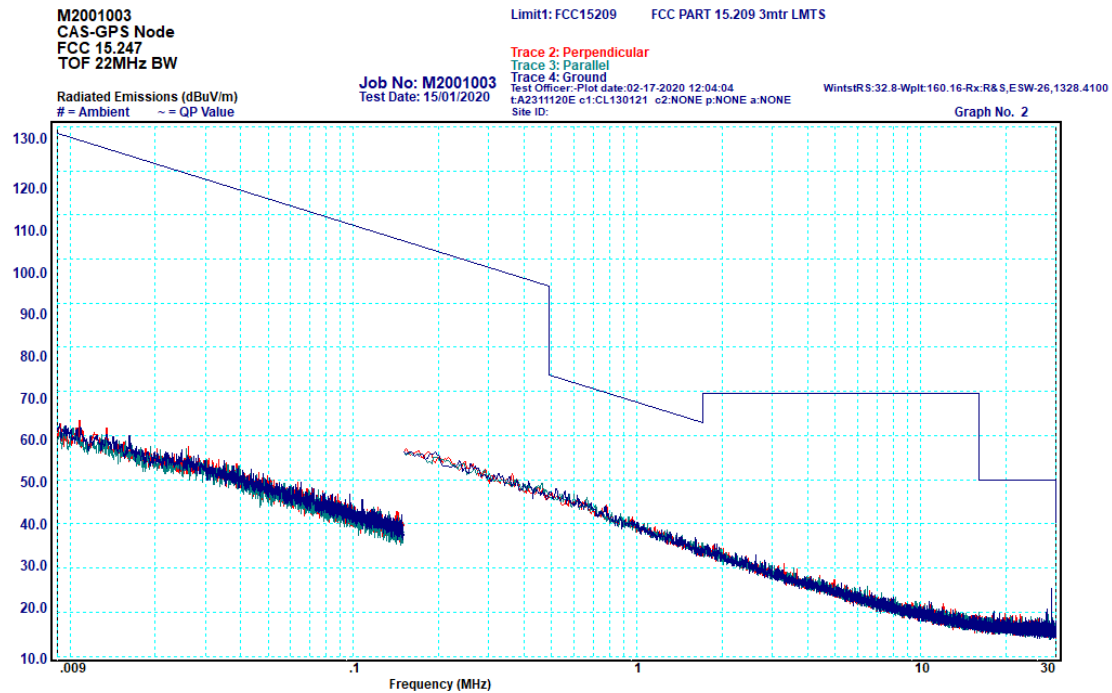

Graph 6-11: Transmitter Spurious Emissions, 9kHz – 30 MHz, 22 MHz Bandwidth

No peaks were measured within 10 dB of the limit.

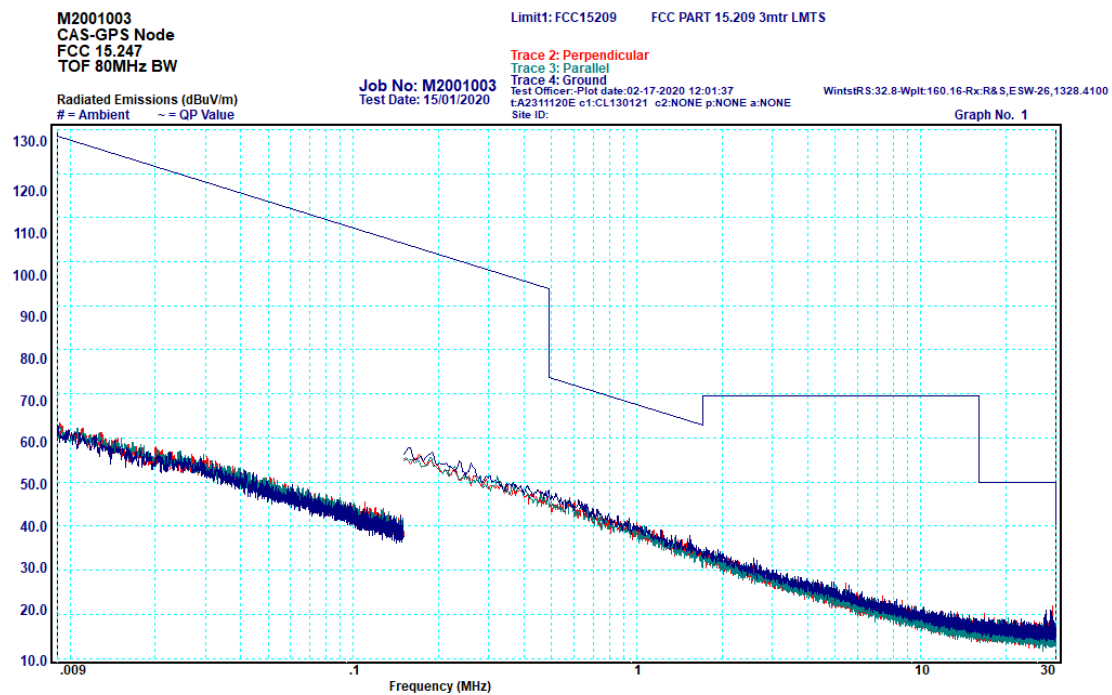


Graph 6-12: Transmitter Spurious Emissions, 9kHz – 30 MHz, 80 MHz Bandwidth

No peaks were measured within 10 dB of the limit.

6.7.5 Transmitter Spurious Emissions: 30 - 1000 MHz

All emissions measured in the frequency band 30 – 1000 MHz complied with the requirements of the standard.

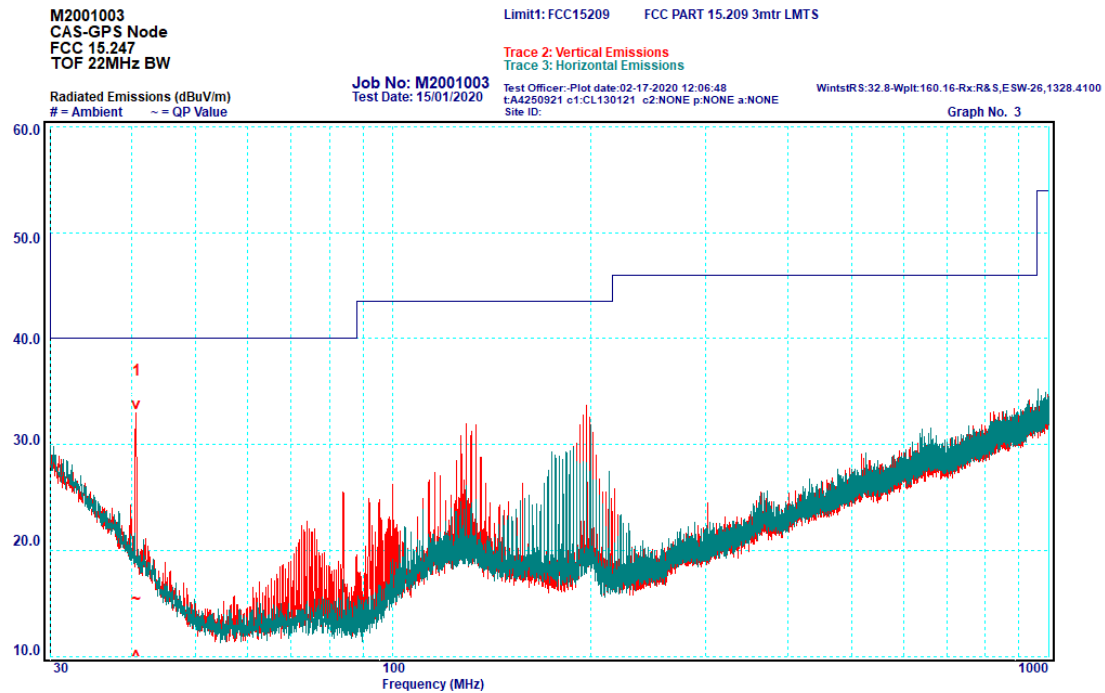

Graph 6-13: Transmitter Spurious Emissions, 30 – 1000 MHz, 22 MHz Bandwidth

Table 6-5: Transmitter Spurious Emissions, 30 – 1000 MHz, 22 MHz Bandwidth

Peak	Frequency [MHz]	Polarisation	Quasi Peak		
			Level [dBuV/m]	Limit [dBuV/m]	Margin [dB]
1	40.69	Vertical	15.4	40.0	-24.6

M2001003
CAS-GPS Node
FCC 15.247
TOF 80MHz BW

Limit1: FCC15209 FCC PART 15.209 3mtr LMTS


Trace 2: Vertical Emissions
Trace 3: Horizontal Emissions

Job No: M2001003
Test Date: 15/01/2020

Test Officer: Plot date: 02-17-2020 12:08:46
tA4250921 c1:CL130121 c2:NONE p:NONE a:NONE
Site ID:

WintstRS:32.8-Wp1t:160.16-Rx:R&S,ESW-26,1328.4100

Graph No. 4

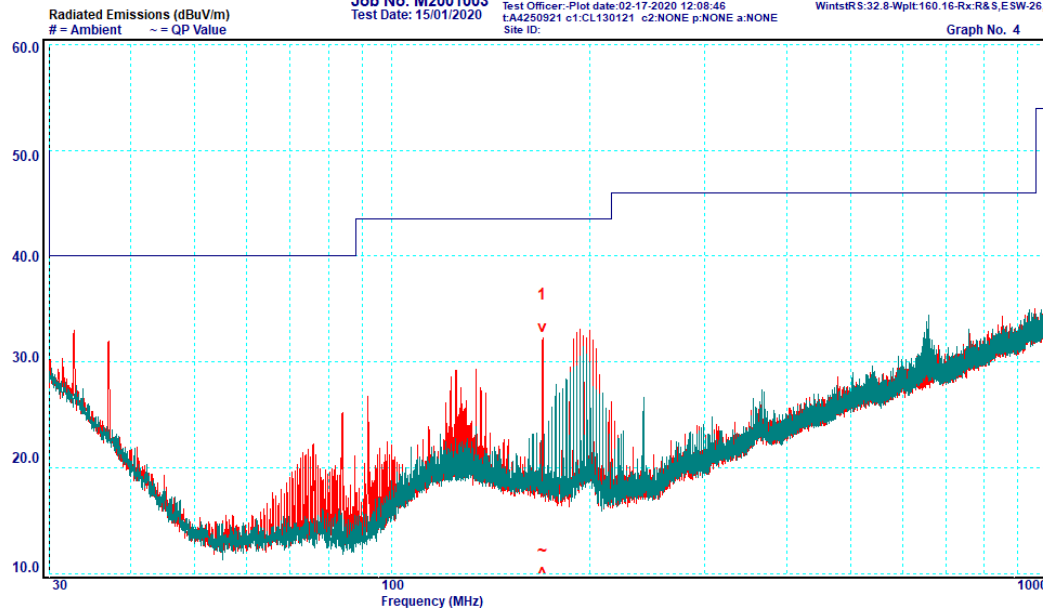

Graph 6-14: Transmitter Spurious Emissions, 30 – 1000 MHz, 80 MHz Bandwidth


Table 6-6: Transmitter Spurious Emissions, 30 – 1000 MHz, 80 MHz Bandwidth

Peak	Frequency [MHz]	Polarisation	Quasi Peak		
			Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]
1	169.55	Vertical	12.1	43.5	-31.4

6.7.6 Transmitter Spurious Emissions: 1 - 18 GHz

All emissions measured in the frequency band 1 – 18 GHz complied with the requirements of the standard.

Peak Measurement:

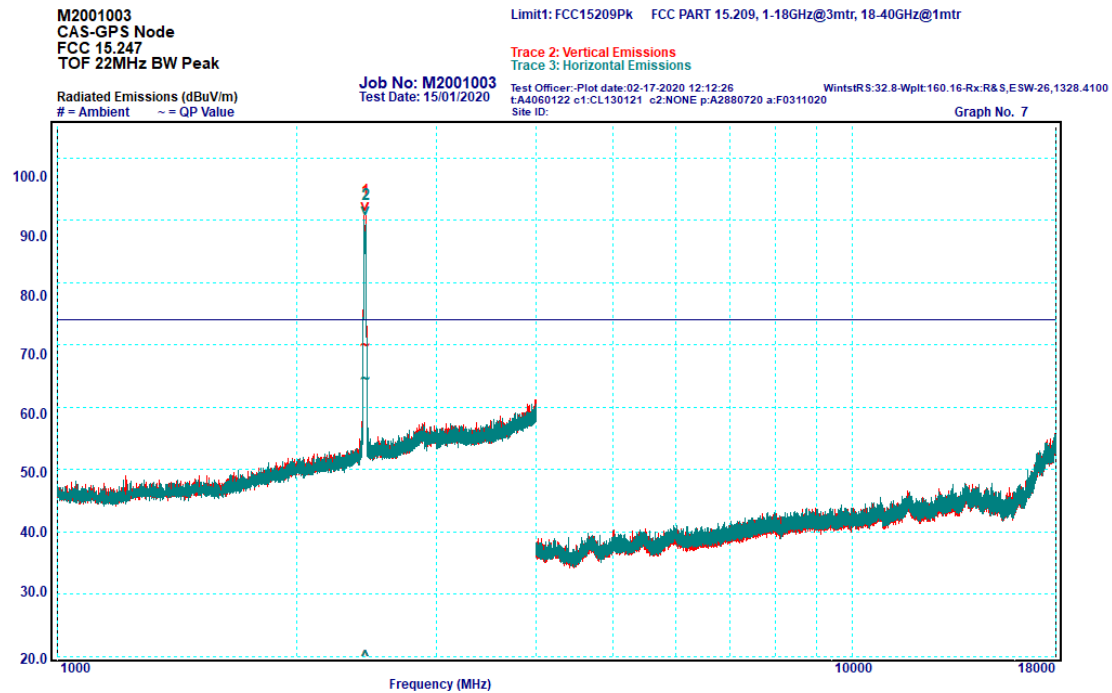


Graph 6-15: Transmitter Spurious Emissions, 1 – 18 GHz, 22 MHz Bandwidth, Peak

Table 6-7: Transmitter Spurious Emissions, 1 – 18 GHz, 22 MHz Bandwidth, Peak

Peak	Frequency [MHz]	Polarisation	Peak		
			Level [dBuV/m]	Limit [dBuV/m]	Margin [dB]
1*	2437.5	Vertical	N/A	N/A	N/A
2*	2437.5	Horizontal	N/A	N/A	N/A

*Note: Peaks are the fundamental transmission and not subject to the spurious limits of the standard

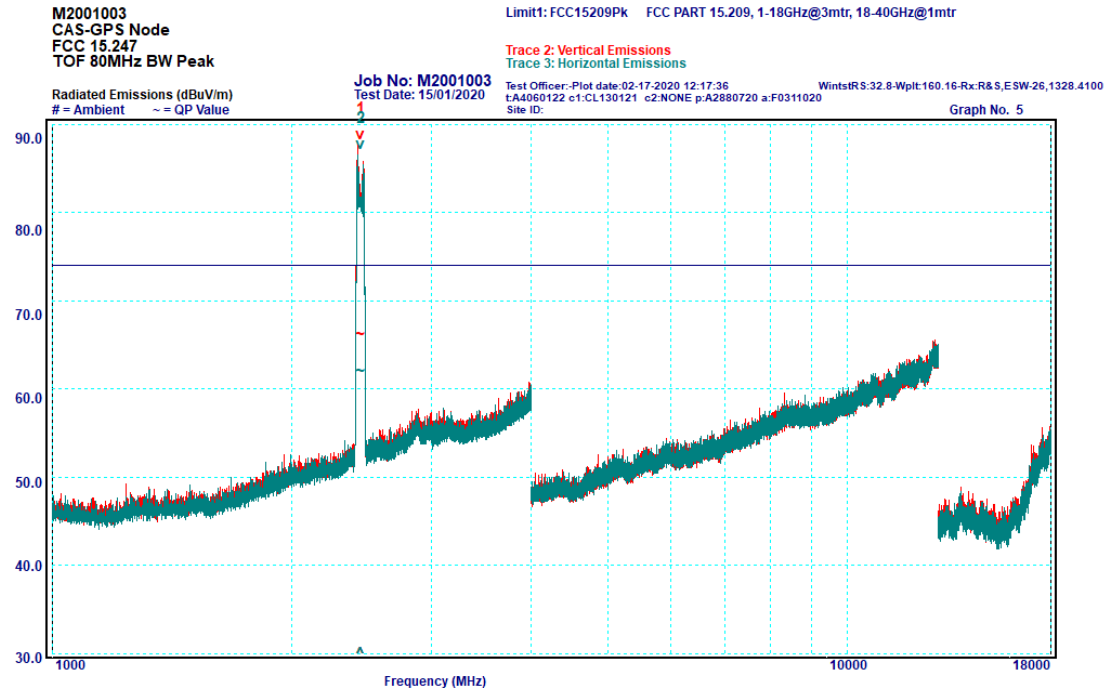

Graph 6-16: Transmitter Spurious Emissions, 1 – 18 GHz, 80 MHz Bandwidth, Peak

Table 6-8: Transmitter Spurious Emissions, 1 – 18 GHz, 80 MHz Bandwidth, Peak

Peak	Frequency [MHz]	Polarisation	Peak		
			Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]
1*	2442	Vertical	N/A	N/A	N/A
2*	2442	Horizontal	N/A	N/A	N/A

*Note: Peaks are the fundamental transmission and not subject to the spurious limits of the standard

Average Measurement:

M2001003
CAS-GPS Node
FCC 15.247
TOF 22MHz BW Average

Limit1: FCC15205A FCC PART 15.205, 1-18GHz@3mtr, 18-40GHz@1mtr


Trace 2: Vertical Emissions
Trace 3: Horizontal Emissions

Radiated Emissions (dBuV/m)
= Ambient ~ = QP Value

Job No: M2001003
Test Date: 15/01/2020

Test Officer: Plot date: 02-17-2020 12:27:14 WintstRS:32.8-Wp1t:160.16-Rx:R&S,ESW-26,1328.4100
tA4060122 c1:CL130121 c2:NONE p:A2880720 a:F0311020
Site ID:

Graph No. 8

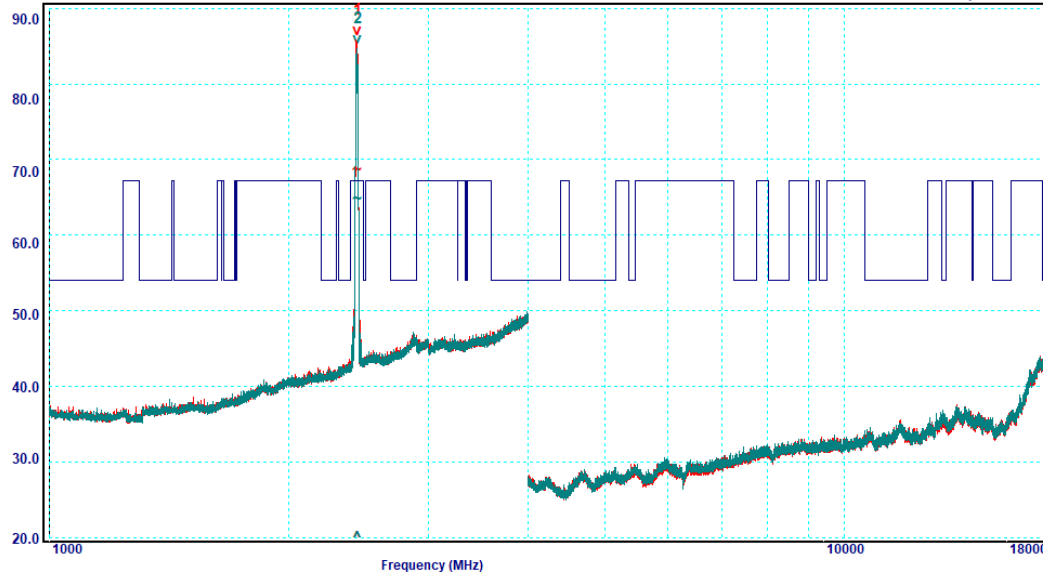

Graph 6-17: Transmitter Spurious Emissions, 1 – 18 GHz, 22 MHz Bandwidth, Average

Table 6-9: Transmitter Spurious Emissions, 1 – 18 GHz, 22 MHz Bandwidth, Average

Peak	Frequency [MHz]	Polarisation	Peak		
			Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]
1*	2437.5	Vertical	N/A	N/A	N/A
2*	2437.5	Horizontal	N/A	N/A	N/A

*Note: Peaks are the fundamental transmission and not subject to the spurious limits of the standard

M2001003
CAS-GPS Node
FCC 15.247
TOF 80MHz BW Average

Limit1: FCC15205A FCC PART 15.205, 1-18GHz@3mtr, 18-40GHz@1mtr


Trace 2: Vertical Emissions
Trace 3: Horizontal Emissions

Job No: M2001003
Test Date: 15/01/2020

Test Officer: Plot date: 02-17-2020 12:30:54 WintstRS:32.8-Wp1t:160.16-Rx:R&S,ESW-26,1328.4100
tA4060122 c1:CL130121 c2:NONE p:A2880720 a:F0311020
Site ID:

Radiated Emissions (dBuV/m)
= Ambient ~ = QP Value

Graph No. 6

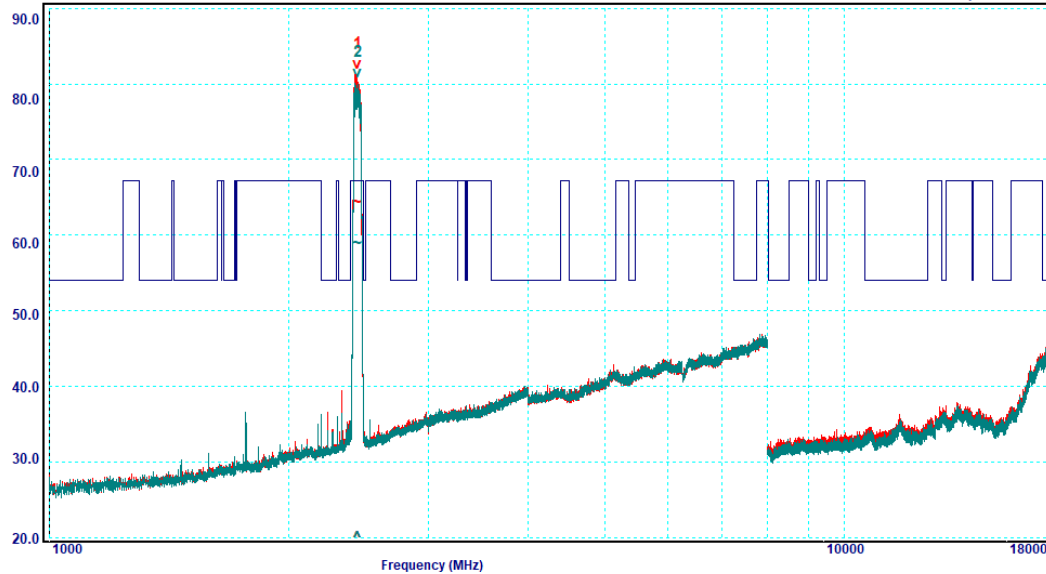

Graph 6-18: Transmitter Spurious Emissions, 1 – 18 GHz, 80 MHz Bandwidth, Average

Table 6-10: Transmitter Spurious Emissions, 1 – 18 GHz, 80 MHz Bandwidth, Average


Peak	Frequency [MHz]	Polarisation	Peak		
			Level [dBμV/m]	Limit [dBμV/m]	Margin [dB]
1*	2442	Vertical	N/A	N/A	N/A
2*	2442	Horizontal	N/A	N/A	N/A

*Note: Peaks are the fundamental transmission and not subject to the spurious limits of the standard

6.7.7 Transmitter Spurious Emissions: 18 – 26 GHz


All emissions measured in the frequency band 18 – 26 GHz complied with the requirements of the standard.

Peak Measurement:

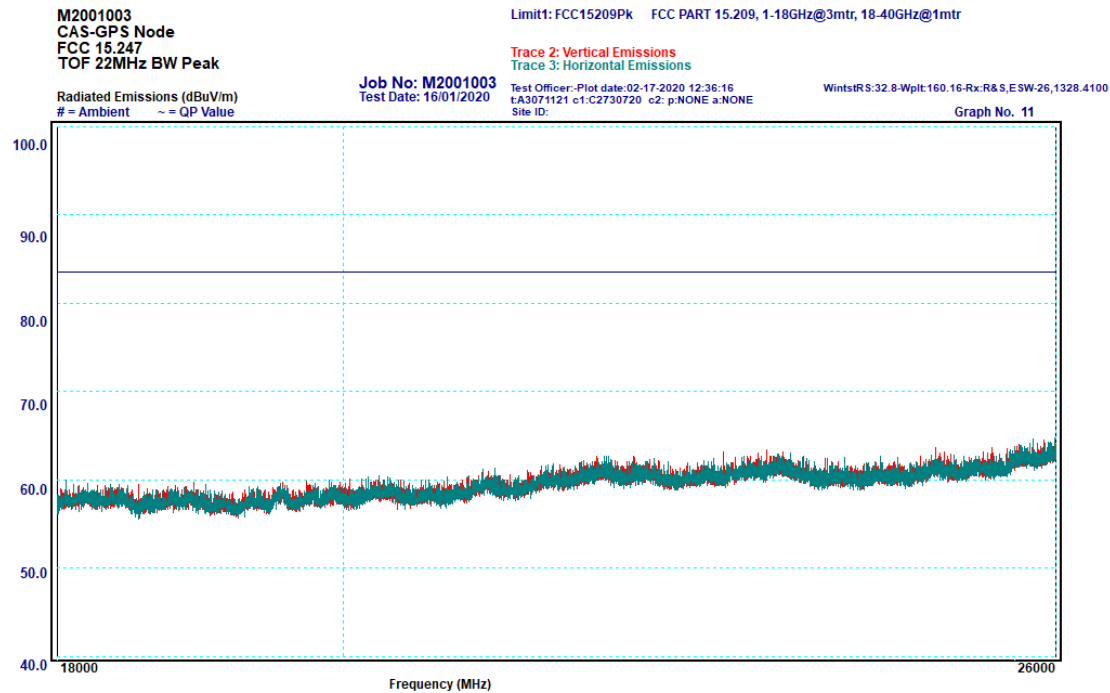

Graph 6-19: Transmitter Spurious Emissions, 18 – 26 GHz, 22 MHz Bandwidth, Peak


No peaks were measured within 10 dB of the limit.

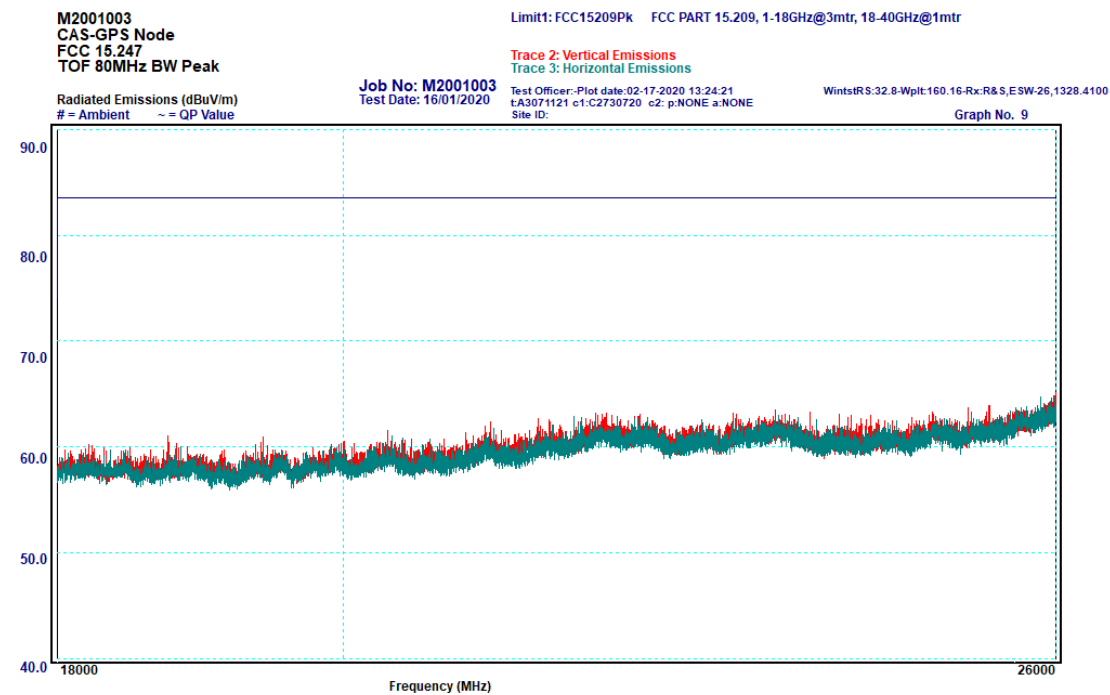

Graph 6-20: Transmitter Spurious Emissions, 18 – 26 GHz, 80 MHz Bandwidth, Peak


No peaks were measured within 10 dB of the limit.

Average Measurement:

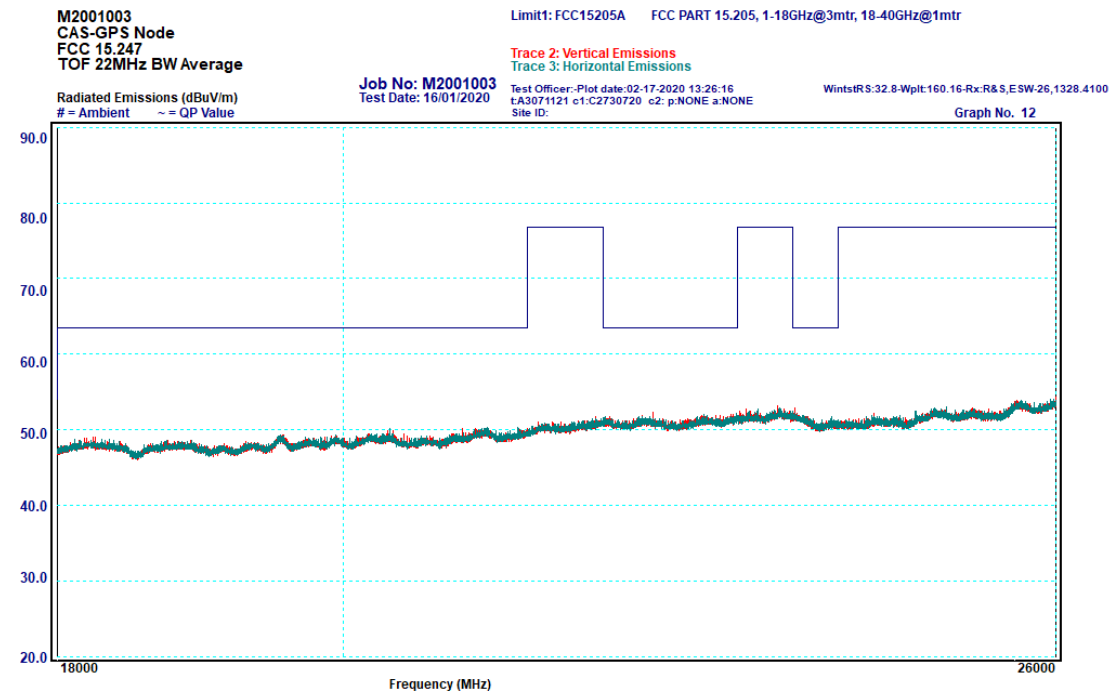

Graph 6-21: Transmitter Spurious Emissions, 18 – 26 GHz, 22 MHz Bandwidth, Average

No peaks were measured within 10 dB of the limit.

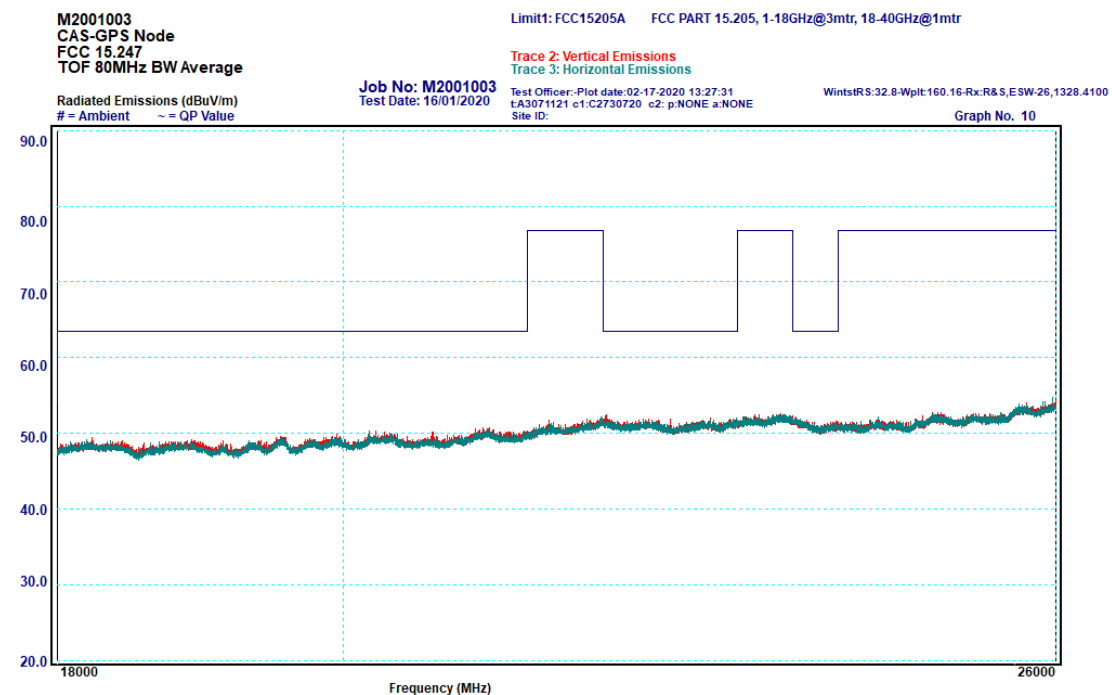


Graph 6-22: Transmitter Spurious Emissions, 18 – 26 GHz, 80 MHz Bandwidth, Average

No peaks were measured within 10 dB of the limit.

6.8 §15.247(d)/ §RSS-247 5.5 Band Edge Emission Measurements

Band-edge measurements were done using radiated in accordance to ANSI C63.10 clause 6.10. All emissions measured near the lower and higher band edge complied with the requirements of §15.247/ RSS-247 5.0.

22 MHz Nominal Bandwidth:

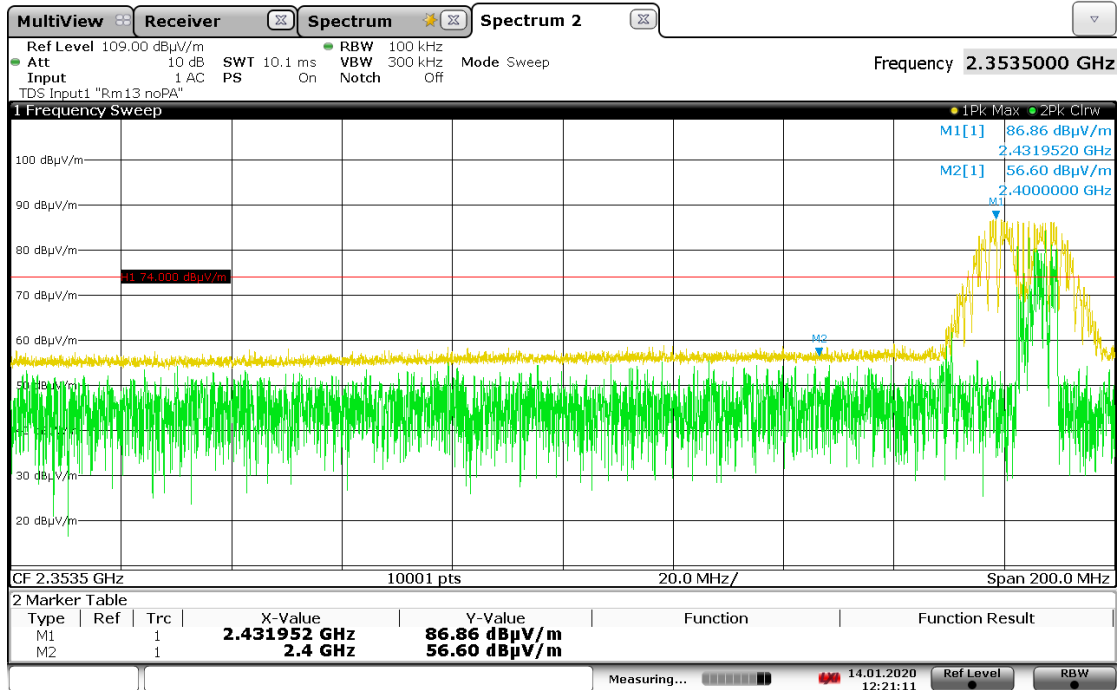


12:21:12 14.01.2020

Graph 6-23: 22 MHz Bandwidth, Lower Band-edge, Peak


Table 6-11: 22 MHz Nominal Bandwidth, Lower Band-edge

Measurement Type	Freq [MHz]	Measurement M2 [dBuV/m]	Measurement in-band M1 [dBuV/m]	Delta-Peak in-band [dB]	Result
Peak	2400	56.60	86.86	-30.26	Complied

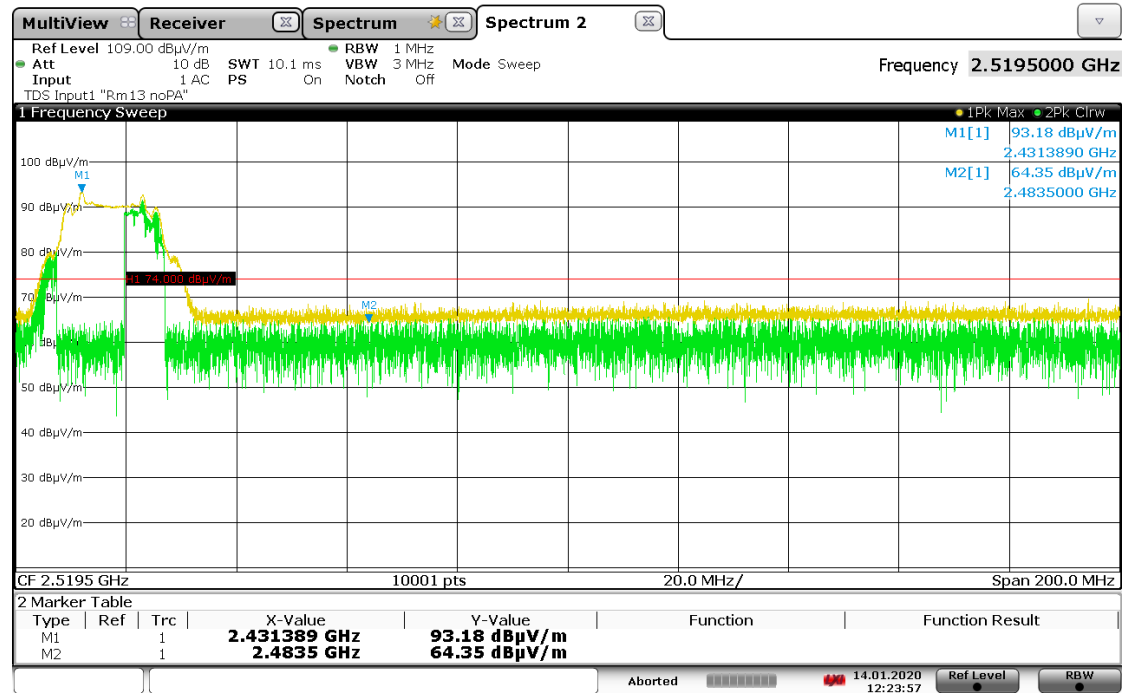

12:23:58 14.01.2020

Graph 6-24: 22 MHz Bandwidth, Upper Band edge, Peak

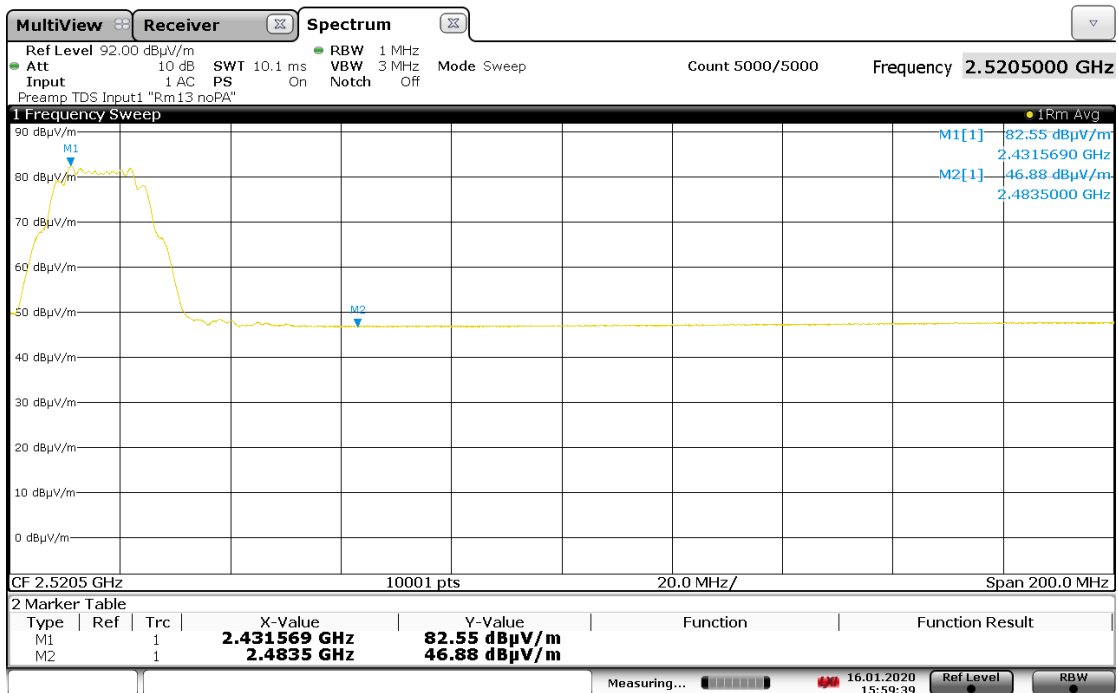


15:59:39 16.01.2020

Graph 6-25: 22 MHz Nominal Bandwidth, Upper Band edge, Average

Table 6-12: 22 MHz Nominal Bandwidth, Band edge

Measurement Type	Freq [MHz]	Measurement [dBμV/m]	Limit [dBμV/m]	Result
Peak	2483.5	64.35	74.0	Complied
Average	2483.5	46.88	54.0	Complied

80 MHz Nominal Bandwidth:

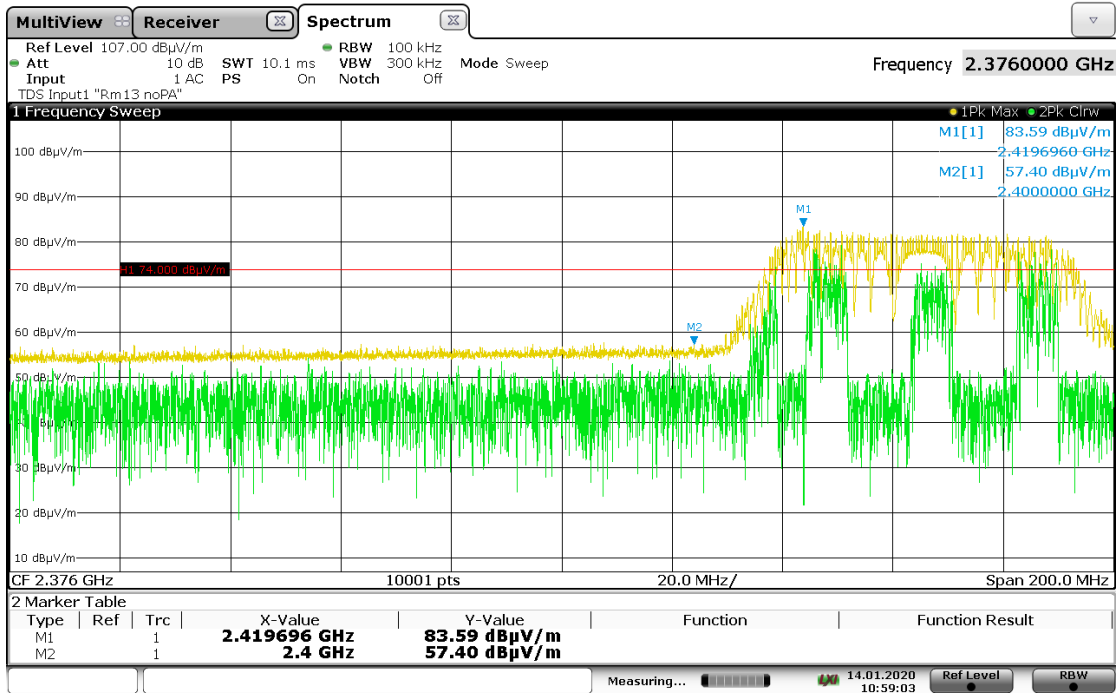


10:59:04 14.01.2020

Graph 6-26: 80 MHz Bandwidth, Lower Band-edge, Peak


Table 6-13: 80 MHz Nominal Bandwidth, Lower Band-edge

Measurement Type	Freq [MHz]	Measurement M2 [dBuV/m]	Measurement in-band M1 [dBuV/m]	Delta-Peak in-band [dB]	Result
Peak	2400	57.40	83.59	-26.19	Complied

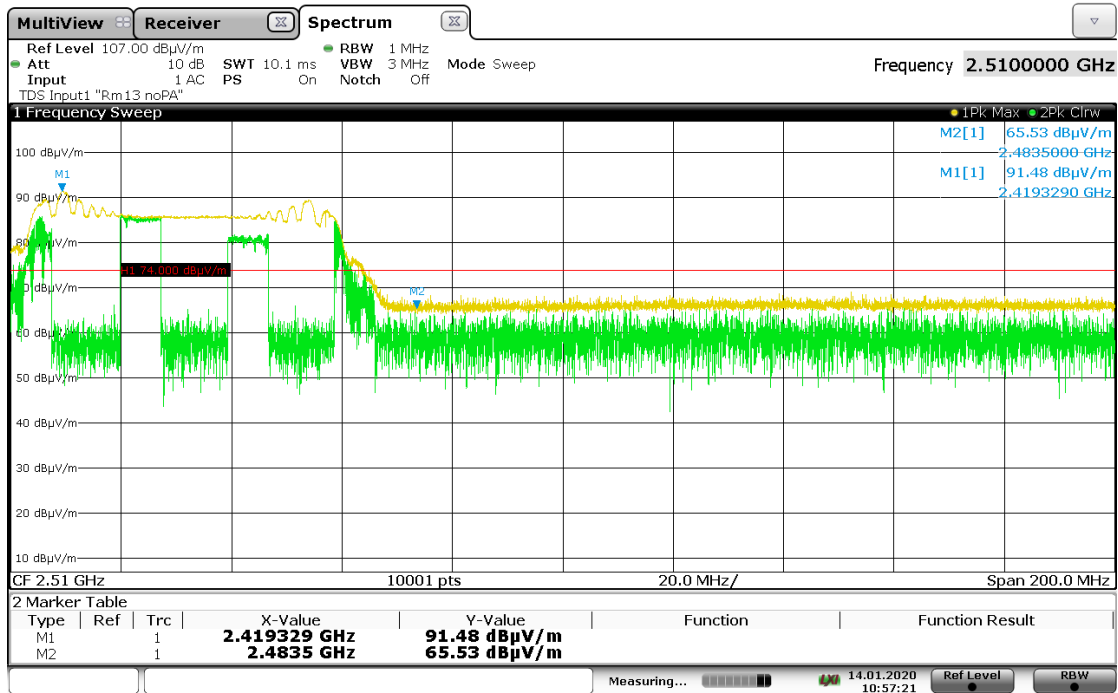

10:57:21 14.01.2020

Graph 6-27: 80 MHz Bandwidth, Upper Band edge, Peak

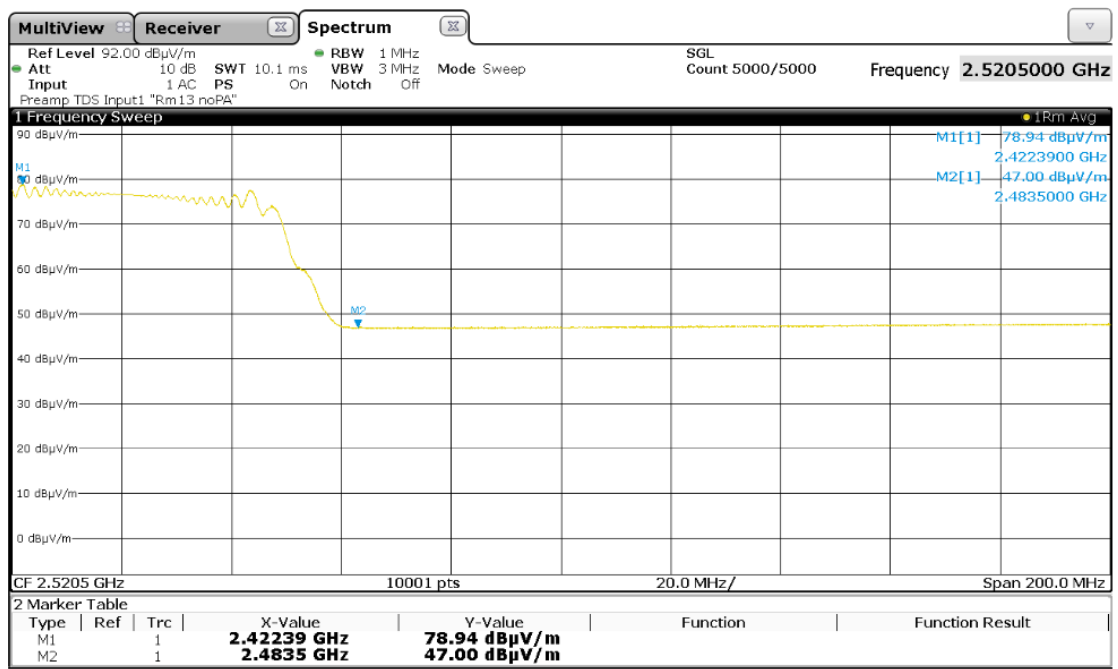

Graph 6-28: 80 MHz Bandwidth, Upper Band edge, Average

Table 6-14: 80 MHz Bandwidth, Band edge

Measurement Type	Freq [MHz]	Measurement [dBuV/m]	Limit [dBuV/m]	Result
Peak	2483.5	65.53	74.0	Complied
Average	2483.5	47.00	54.0	Complied

6.9 §15.247(e)/ RSS-247 5.2(b) Power Spectral Density

6.9.1 Test procedure

The tests were performed in accordance with ANSI C63.10: 2013 Clause 11.10 Maximum power spectral density level in the fundamental emissions.

Power spectral density measurements were made at 3 metres. The measurement resolution bandwidth was 3 kHz. The orientation of the EUT and the measurement antenna height and polarisation that produced the highest EIRP was used.

Power spectral density measurements were done at radiated method. The measurement resolution bandwidth was 3 kHz.

6.9.2 Limits


The maximum peak conducted power spectral density (PSD) is 8 dBm per 3 kHz.

6.9.3 Results

The measured radiated field strength is converted to equivalent conducted output power spectral density for checking compliance (KDB 558074 D01 Section 3).


Table 6-15: Power spectral density

Freq. [MHz]	E-Field@ 3 m		Correction Factor (dB)	EIRP (dBm)	Antenna Gain (dBi)	Equivalent Conducted Output PSD (dBm)	Limit (dBm)	Results
	dBuV/m	dBm						
2437	69.99	-25.24	4.327	-20.91	2	-22.91	8	Complied
2442	65.94	-29.29	4.11	-25.18	2	-27.18	8	Complied

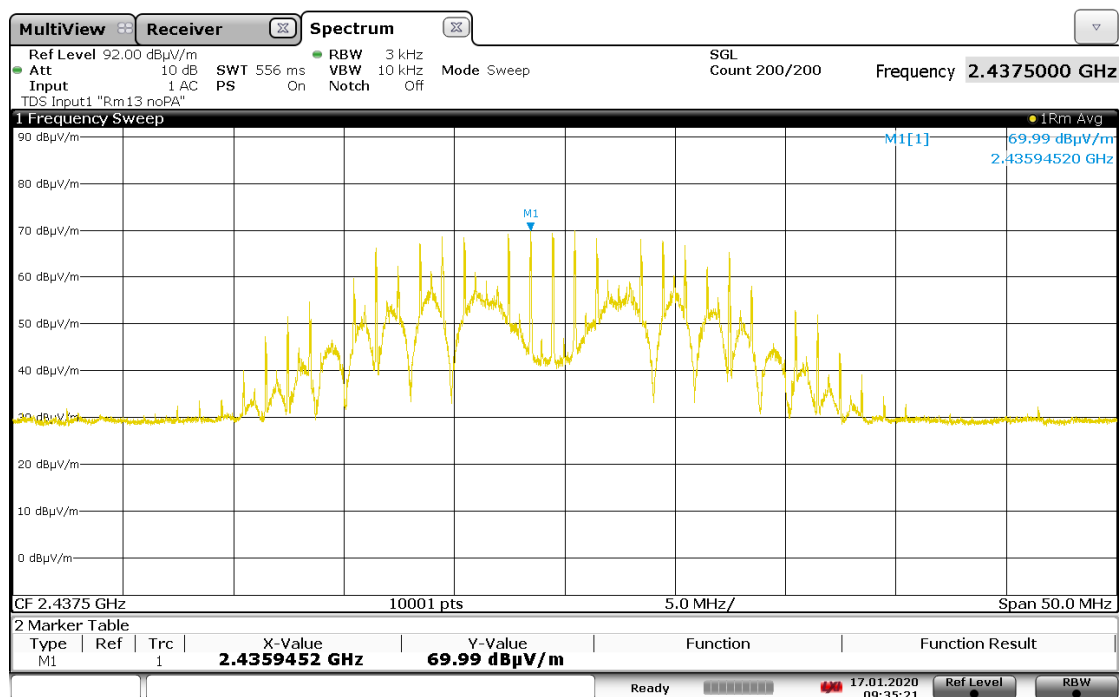

09:35:22 17.01.2020

Graph 6-29: Radiated – Power Spectral Density, 22 MHz Bandwidth

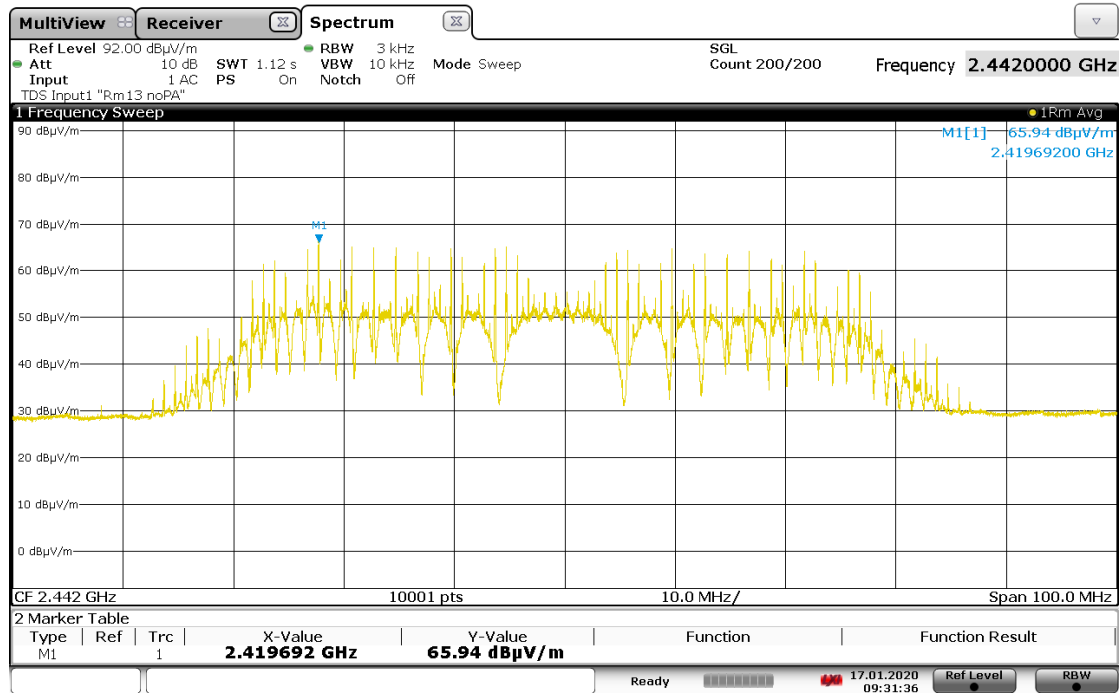

09:31:36 17.01.2020

Graph 6-30: Radiated – Power Spectral Density, 80 MHz Bandwidth

6.10 §15.247(i)/ §RSS-Gen 3.4/§RSS-102 Maximum Permissible Exposure

The EUT complied with the applicable maximum permissible exposure levels. Refer to EMC Technologies report M2001003-4 and M2001003-5

6.11 §15.215/ §RSS-Gen 6.7 Occupied Bandwidth – 99% power

6.11.1 Test procedure

The bandwidth containing 99% power of the transmitted signal was measured using the procedure from ANSI C63.10 section 6.9.


6.11.2 Limits

The 99% power should be contained within the frequency band 2400 – 2483.5 MHz.

6.11.3 Results


Table 6-16: Occupied Bandwidth

Freq. [MHz]	Nominal Bandwidth	99% Bandwidth [MHz]	Low Frequency [MHz]	High Frequency [MHz]	Result
2437	22 MHz	25.69	2424.19	2449.88	Complied
2442	80 MHz	64.16	2409.21	2473.37	Complied

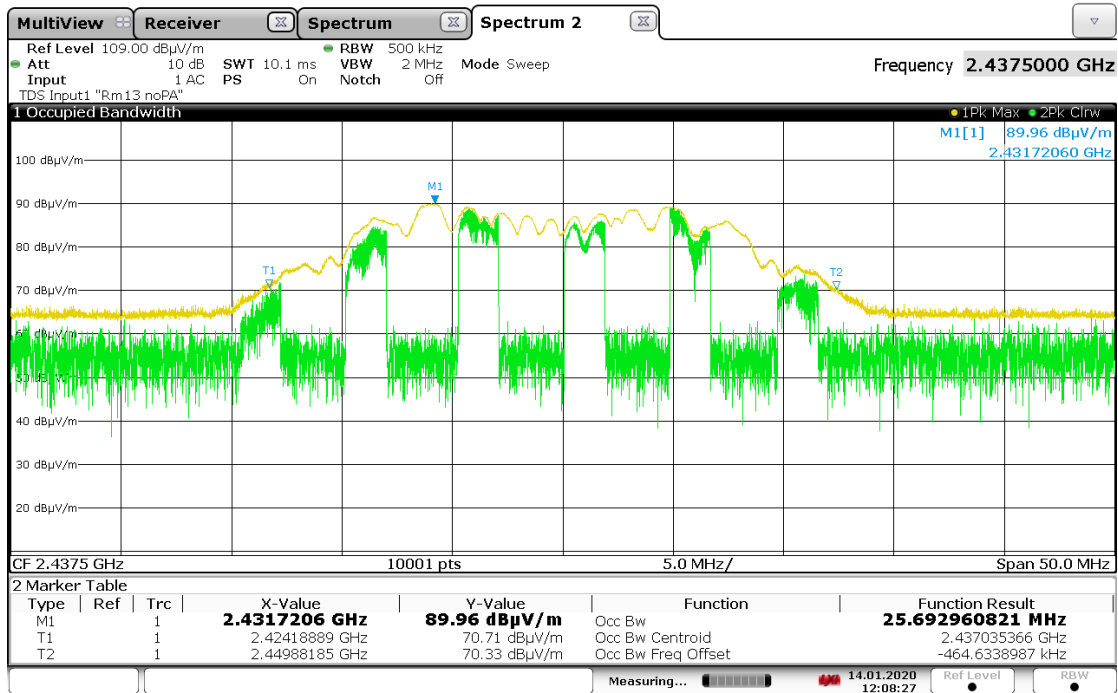

12:08:28 14.01.2020

Graph 6-31: Occupied bandwidth, 22 MHz Bandwidth

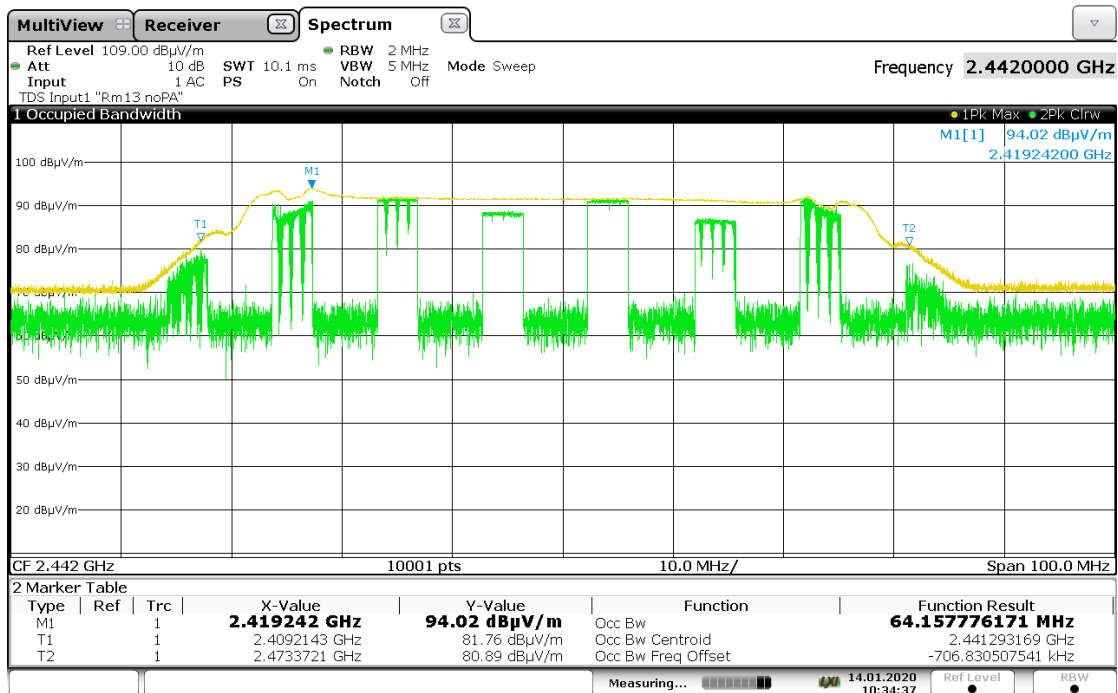

10:34:37 14.01.2020

Graph 6-32: Occupied bandwidth, 80 MHz Bandwidth

END OF REPORT