

## TEST REPORT

**Report No.: 17050023HKG-001**

LIGHTAIR HOLDING AB

Application For Certification  
(Original Grant)

**FCC ID: YJ5STANDMODEL**

Air Purifier

**PREPARED AND CHECKED BY:**

**APPROVED BY:**

Signed On File

Lam Hon Ming, Kenneth  
Senior Lead Engineer

Chow Chi Ming, Billy  
Manager  
Date: June 22, 2017

**TEST REPORT****GENERAL INFORMATION**

<b>Grantee:</b>	LIGHTAIR HOLDING AB
<b>Grantee Address:</b>	Mariehällsvägen 37F, 168 65 Bromma, Sweden
<b>Contact Person:</b>	Roger Sogge
<b>Tel:</b>	+46(0)8 41004800
<b>Fax:</b>	+46(0)8 29 30 32
<b>e-mail:</b>	N/A
<b>Manufacturer:</b>	N/A
<b>Manufacturer Address:</b>	N/A
<b>Brand Name:</b>	LightAir, LifeAir
<b>Mode:</b>	LAIFSU
<b>Additional Model:</b>	LAIFSU-XXXXXX, LAIFSU2, LAIFSU2-XXXXXX, LAIFST, LAIFST-001, LAIFST-XXXXXX, LAIFEV-050502, LAIFEVXXXXXX, LAIFEV
<b>Type of EUT:</b>	Consumer ISM Device
<b>Description of EUT:</b>	Air Purifier
<b>Serial Number:</b>	N/A
<b>FCC ID:</b>	YJ5STANDMODEL
<b>Date of Sample Submitted:</b>	May 02, 2017
<b>Date of Test:</b>	May 02, 2017 to May 29, 2017
<b>Report No.:</b>	17050023HKG-001
<b>Report Date:</b>	June 22, 2017
<b>Environmental Conditions:</b>	Temperature: +10 to 40°C Humidity: 10 to 90%

**TEST REPORT****SUMMARY OF TEST RESULT**

TEST SPECIFICATION	REFERENCE	RESULTS
Field Strength Limit	18.305	Pass
Conduction Limit	18.307	Pass

The equipment under test is found to be complying with the following standards:

FCC Part 18, October 1, 2015 Edition

**TEST REPORT****TABLE OF CONTENTS**

<b>1.0</b>	<b>GENERAL DESCRIPTION</b>	5
1.1	Product Description	5
1.2	Related Submittal(s) Grants	5
1.3	Test Methodology	5
1.4	Test Facility	5
<b>2.0</b>	<b>SYSTEM TEST CONFIGURATION</b>	6
2.1	Justification	6
2.2	EUT Exercising Software	6
2.3	Special Accessories	6
2.4	Measurement Uncertainty	6
2.5	Support Equipment List and Description	6
<b>3.0</b>	<b>EMISSION RESULTS</b>	7
3.1	Field Strength Calculation	7
3.2	Radiated Emission Configuration Photograph	8
3.3	Radiated Emission Data	8
3.4	Conducted Emission Configuration Photograph	8
3.5	Conducted Emission Data	8
<b>4.0</b>	<b>EQUIPMENT PHOTOGRAPHS</b>	11
<b>5.0</b>	<b>PRODUCT LABELLING</b>	11
<b>6.0</b>	<b>TECHNICAL SPECIFICATIONS</b>	11
<b>7.0</b>	<b>INSTRUCTION MANUAL</b>	11
<b>8.0</b>	<b>EMISSIONS TEST PROCEDURES</b>	12
8.1	Radiated Emission Test Setup	13
8.2	Conducted Emission Test Procedures	15
8.3	Conducted Emission Test Setup	15
<b>9.0</b>	<b>EQUIPMENT LIST</b>	16

## TEST REPORT

### 1.0 GENERAL DESCRIPTION

#### 1.1 Product Description

The Equipment Under Test (EUT) is an Air Purifier. The EUT is powered by the switching mode AC/DC adaptor: 100-240VAC to 12VDC (Model: GPE125H-120100-1). The EUT will generate a high voltage to ionize the surrounding air and produce negative ions. The negative ions will attach to the positively charged harmful particles in the air like dust, pollen, bacteria, mold, pet dander, virus etc, which accumulates and drop out of the air.

The Model: LAIFSU-XXXXXX, LAIFSU2, LAIFSU2-XXXXXX, LAIFST. LAIFST-001, LAIFST-XXXXXX, LAIFEV-050502, LAIFEVXXXXXX and LAIFEV are the same as the Model: LAIFSU in hardware aspect. The difference in model number serves as marketing strategy. Suffix (XXXXXX) represent the different colors and different plastic stand.

For electronic filing, the brief circuit description is saved with filename: descri.pdf.

#### 1.2 Related Submittal(s) Grants

This is a single application for certification of an Air Purifier. No other related submittal grants.

#### 1.3 Test Methodology

Both AC mains line-conducted and radiated emission measurements were performed according to the FCC procedures in MP-5, "Methods of Measurements of Radio Noise Emissions from ISM equipment" 1986". All radiated measurements were performed in an 3m Chamber. Preliminary scans were performed in the 3m Chamber only to determine worst case modes. All radiated tests were performed at an antenna to EUT distance of 3 meters, unless stated otherwise in the "**Justification Section**" of this Application.

#### 1.4 Test Facility

The 3m Chamber used to collect the radiated data is located at HKPC Building, 78 Tat Chee Avenue, Kowloon, Hong Kong. (HKPC). And conducted measurement facility is located at Workshop No. 3, G/F., World-Wide Industrial Centre, 43-47 Shan Mei Street, Fo Tan, Sha Tin, N.T., Hong Kong. This test facility and site measurement data have been placed on file with the FCC and IC No. 2042V-1.

**TEST REPORT****2.0 SYSTEM TEST CONFIGURATION****2.1 Justification**

The system was configured for testing in a typical fashion (as a customer would normally use it), and in the confines as outlined in FCC/OST MP-5(1986).

The device was powered by 100-240VAC 50/60Hz.

For maximizing emissions below 30 MHz, the EUT was rotated through 360°, the centre of the loop antenna was placed 1 meter above the ground, and the antenna polarization was changed. For maximizing emission at and above 30 MHz, the EUT was rotated through 360°, the antenna height was varied from 1 meter to 4 meters above the ground plane, and the antenna polarization was changed. This step by step procedure for maximizing emissions led to the data report in Exhibit 3.0.

The rear of unit shall be flushed with the rear of the table.

The equipment under test (EUT) was configured for testing in a typical fashion (as a customer would normally use it). The EUT was mounted to a plastic stand if necessary and placed on the wooden turntable, which enabled the engineer to maximize emissions through its placement in the three orthogonal axes.

**2.2 EUT Exercising Software**

There was no special software to exercise the device.

**2.3 Special Accessories**

There are no special accessories necessary for compliance of this product.

**2.4 Measurement Uncertainty**

When determining of the test conclusion, the Measurement Uncertainty of test has been considered.

**2.5 Support Equipment List and Description**

AC/DC Adaptor  
Model: GPE125H-120100-1  
Input: 100-240VAC 50/60Hz  
Output: 12VDC 1000mA  
(Provided by Applicant)

**TEST REPORT****3.0 EMISSION RESULTS**

Data is included of the worst case configuration (the configuration which resulted in the highest emission levels). A sample calculation, configuration photographs and data tables of the emissions are included.

**3.1 Field Strength Calculation**

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any), Distance Factor from the measured reading. The basic equation with a sample calculation is as follows:

$$FS = RA + AF + CF - AG - DF$$

where FS = Field Strength in dB $\mu$ V/m

RA = Receiver Amplitude (including preamplifier) in dB $\mu$ V

CF = Cable Attenuation Factor in dB

AF = Antenna Factor in dB

AG = Amplifier Gain in dB

DF = Distance Factor in dB =  $20 \log 3/300 = -40$ dB (3m to 300m)

In the following table(s), the reading shown on the data table reflects the preamplifier gain. An example for the calculations in the following table is as follows:

$$FS = RR + LF$$

where FS = Field Strength in dB $\mu$ V/m

RR = RA - AG - DF in dB $\mu$ V

LF = CF + AF in dB

Assume a receiver reading of 52.0 dB $\mu$ V is obtained. The antenna factor of 7.4 dB and cable factor of 1.6 dB are added. The amplifier gain of 29 dB and distance factor of 20 dB are subtracted, giving a field strength of 12 dB $\mu$ V/m. This value in dB $\mu$ V/m was converted to its corresponding level in  $\mu$ V/m.

$$\text{Level in } \mu\text{V/m} = \text{Common Antilogarithm } [(12 \text{ dB}\mu\text{V/m})/20] = 3.98 \mu\text{V/m}$$

**TEST REPORT****3.2 Radiated Emission Configuration Photograph**

The worst case in radiated emission was found at 9.05 kHz

For electronic filing, the worst case radiated emission configuration photographs are saved with filename: radiated photos.pdf.

**3.3 Radiated Emission Data**

The data on the following page lists the significant emission frequencies, the limit and the margin of compliance. Numbers with a minus sign are below the limit.

Judgment: Passed by 10.6 dB

**3.4 Conducted Emission Configuration Photograph**

The worst case in line-conducted emission was found at 393 kHz

For electronic filing, the worst case line-conducted configuration photographs are saved with filename: conducted photo.pdf.

**3.5 Conducted Emission Data**

A graph and a data table of conducted emission test are shown in following page.


Judgment: Pass by 5.42 dB

**TEST REPORT**
**CONDUCTED EMISSION**

Model: LAIFSU

Date of Test: May 29, 2017

Worst-Case Operating Mode: Air Purifier + LED

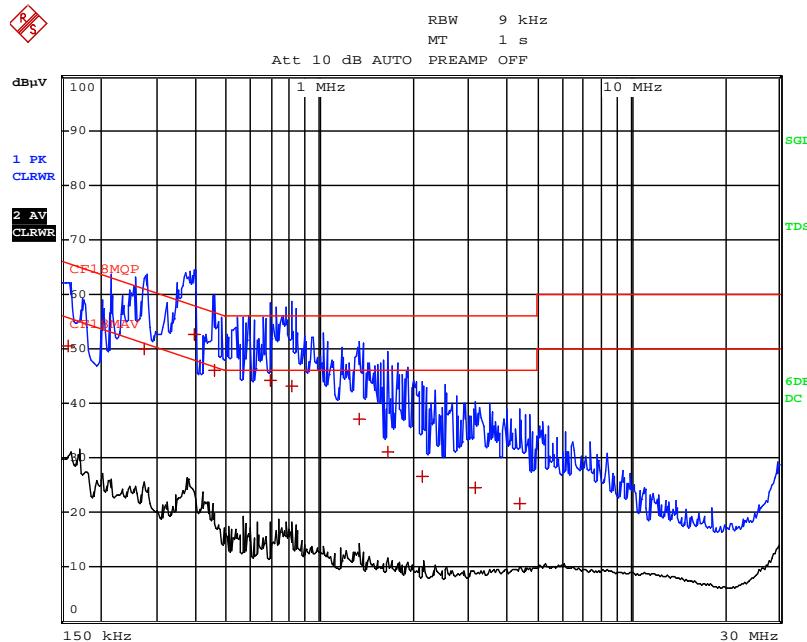

EDIT PEAK LIST (Final Measurement Results)				
Trace1:	CF18MQP			
Trace2:	CF18MAV			
Trace3:	---			
TRACE	FREQUENCY	LEVEL dB <sub>μ</sub> V	DELTA LIMIT dB	
1	Quasi Peak 159 kHz	50.57 L1	-14.93	
1	Quasi Peak 276 kHz	49.99 L1	-10.94	
1	Quasi Peak 393 kHz	52.57 L1	-5.42	
1	Quasi Peak 456 kHz	45.98 L1	-10.77	
1	Quasi Peak 694.5 kHz	44.14 L1	-11.85	
1	Quasi Peak 811.5 kHz	43.17 L1	-12.83	
1	Quasi Peak 1.338 MHz	37.04 L1	-18.95	
1	Quasi Peak 1.662 MHz	31.07 L1	-24.92	
1	Quasi Peak 2.13 MHz	26.62 N	-29.37	
1	Quasi Peak 3.156 MHz	24.56 N	-31.43	
1	Quasi Peak 4.38 MHz	21.55 L1	-34.44	

 Note: Measurement Uncertainty is  $\pm 4.2\text{dB}$  at a level of confidence of 95%.

**TEST REPORT****RADIATED EMISSIONS**

Model: LAIFSU

Date of Test: May 29, 2017

Worst-Case Operating Mode: Air Purifier + LED

**Table 1**  
**Pursuant to FCC Part 18 Section 18.305 Requirement**

Frequency (kHz)	Reading at 3m (dB $\mu$ V)	Antenna Factor (dB)	Net at 3m (dB $\mu$ V/m)	Calculated at 300m (dB $\mu$ V/m)	Limit at 300m (dB $\mu$ V/m)	Margin (dB)
9.050	34.6	18.3	52.9	12.9	23.5	-10.6
11.0500	34.3	18.1	52.4	12.4	23.5	-11.1
150.000	37.1	10.3	47.4	7.4	23.5	-16.1
244.500	32.9	10.3	43.2	3.2	23.5	-20.3
372.750	31.0	10.3	41.3	1.3	23.5	-22.2

NOTES: 1. Average detector data unless otherwise stated.

2. Frequency range scanned: 9kHz to 30MHz.
3. Only emissions significantly above equipment noise floor are reported.
4. Loop antenna was used for emission below 30MHz.
5. Reading at 3m data includes the cable factor.
6. Measurement Uncertainty is  $\pm 5.3$ dB at a level of confidence of 95%.

**TEST REPORT****4.0 EQUIPMENT PHOTOGRAPHS**

For electronic filing, the photographs are saved with filename: external photos.pdf and internal photos.pdf.

**5.0 PRODUCT LABELLING**

For electronic filing, the FCC ID label artwork and the label location are saved with filename: label.pdf.

**6.0 TECHNICAL SPECIFICATIONS**

For electronic filing, the block diagram and schematic of the tested EUT are saved with filename: block.pdf and circuit.pdf respectively.

**7.0 INSTRUCTION MANUAL**

For electronic filing, a preliminary copy of the Instruction Manual is saved with filename: manual.pdf.

This manual will be provided to the end-user with each unit sold/leased in the United States.

**TEST REPORT****8.0 EMISSIONS TEST PROCEDURES**

The following is a description of the test procedure used by Intertek Testing Services Hong Kong Ltd. in the measurements of Industrial, Scientific and Medical equipment operating under FCC methods of measurements of radio noise emissions from industrial, scientific and medical equipment.


**Radiated emissions measurement**

The equipment under test (EUT) is placed on a wooden turntable which is 1.5 x 1 meter dimension and approximately 1 meter in height above the ground plane. During the radiated emissions test, the turntable is rotated to resulting in maximum emissions. The antenna polarization is varied during the testing to search for maximum signal levels. For loop antenna, the height of the antenna is set at 2 meters. For biconical and log-periodic antenna, the antenna height is varied from one to four meters.


According to FCC/OCT MP-5 (1986), the frequency range scanned is 9 kHz to 400MHz in field strength emission. The detector function of the measurement is set to average. For line conducted emission, the frequency range scanned is from 0.15MHz to 30MHz in quasi peak and average measurement.

**TEST REPORT****8.1 Radiated Emission Test Setup**


The figure below shows the test setup, which is utilized to make these measurements.

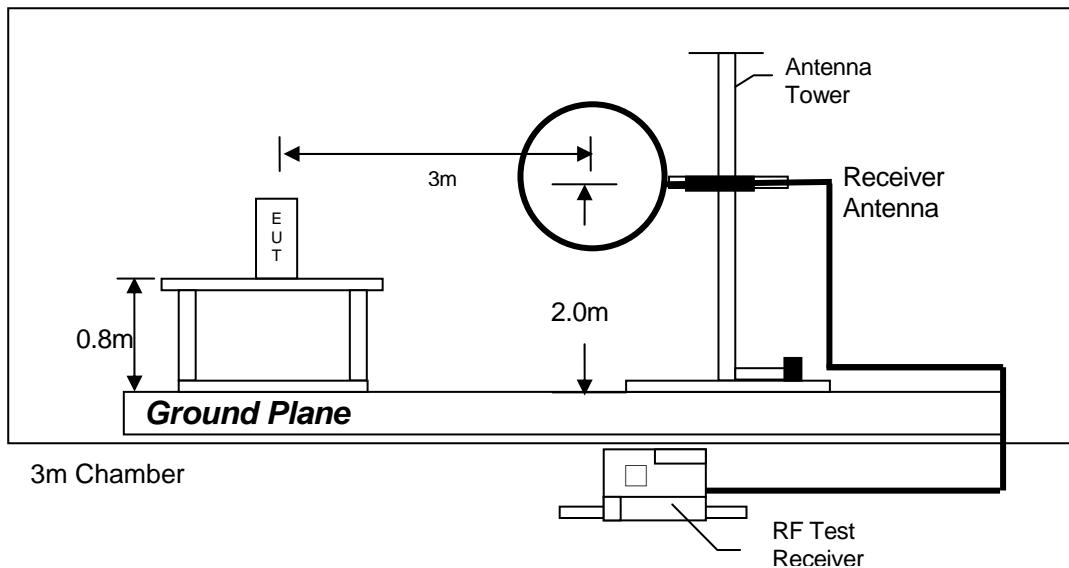

Test setup of radiated emissions below 30MHz

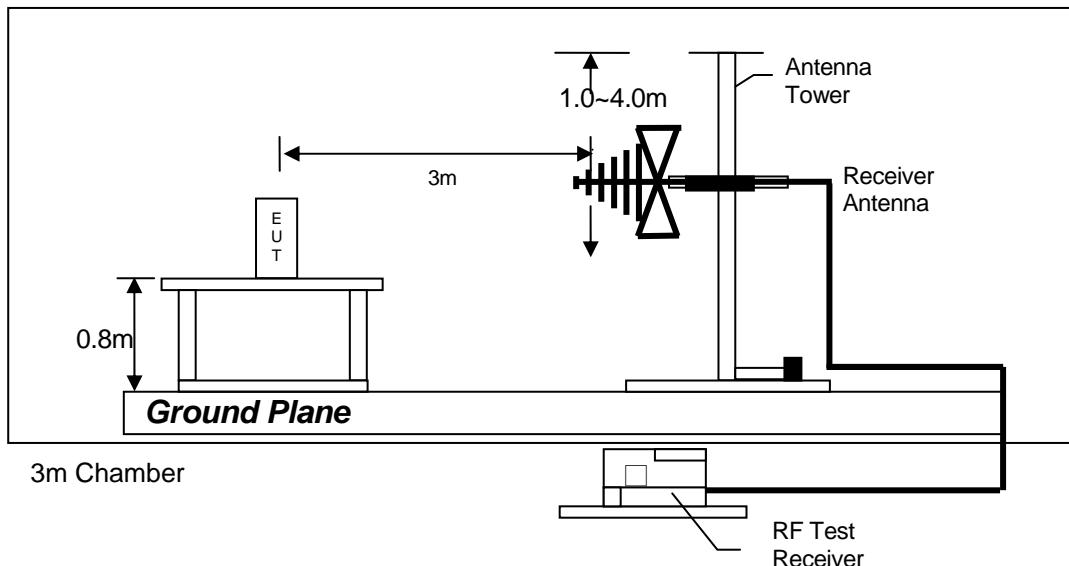**TEST REPORT**


Test setup of radiated emissions up to 1GHz

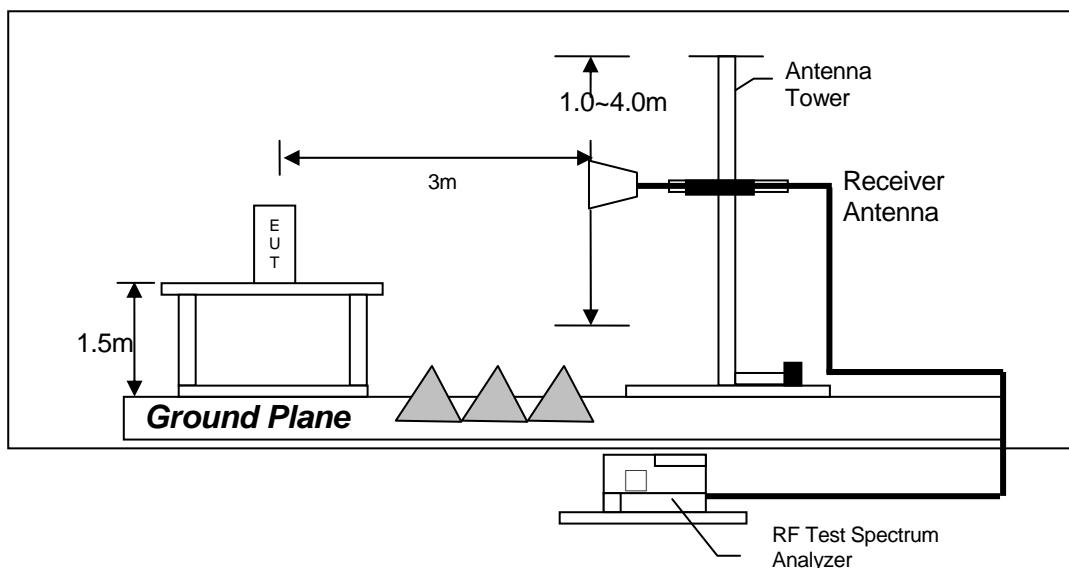

Test setup of radiated emissions above 1GHz

**TEST REPORT****8.2 Conducted Emission Test Procedures**

Measurements of power line conducted radio noise shall be expressed as the voltage developed across the 50-ohm port terminated by a 50-ohm measuring instrument. All voltage measurements shall be made at the plug end of the EUT power cord, e.g. , by the use of mating plugs and receptacles on the EUT and LISN.

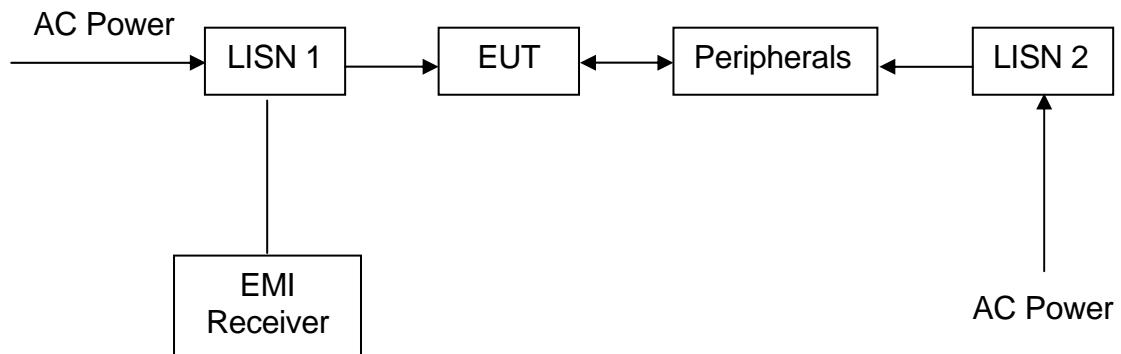**8.3 Conducted Emission Test Setup**

**TEST REPORT****9.0 EQUIPMENT LIST**

## 1) Radiated Emissions Test

<b>EQUIPMENT</b>	<b>Test Receiver</b>	<b>Active Loop Antenna</b>
Cal. No.	EMC597	EMC107
Manufacturer	R & S	EMCO
Model No.	ESU40	6502
Cal Date	Jul. 26, 2016	Oct. 27, 2016
Due Date	Jul. 26, 2017	Oct. 27, 2017

## 2) Conducted Emissions Test

<b>EQUIPMENT</b>	<b>EMI Test Receiver</b>	<b>LISN</b>
Registration No.	EW-2666	EW-2874
Manufacturer	R&S	R&S
Model No.	ESCI7	ENV-216
Calibration Date	Jun. 17, 2016	Mar. 16, 2017
Calibration Due Date	Jun. 17, 2017	Mar. 16, 2018

END OF TEST REPORT