
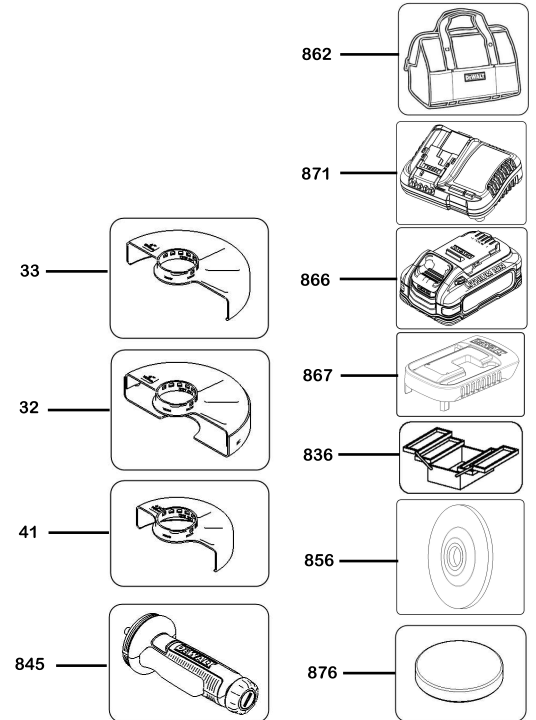


I G F E D C B A

NOTES:

1. TORQUE TO 9-11 Nm (80-97 IN-LBS).
2. TORQUE TO 1.2-1.6 Nm (10.6-14.2 IN-LBS).
3. TORQUE TO 1.2-1.4 Nm (10.6-12.4 IN-LBS).
4. TORQUE TO 2.2-2.4 Nm (19.5-21.2 IN-LBS).
5. TORQUE TO 0.45-0.65Nm (4-5.8 IN-LBS).
6. GEAR TEETH ARE TO BE COATED WITH GREASE GREASE REQUIREMENT: 15-17g.

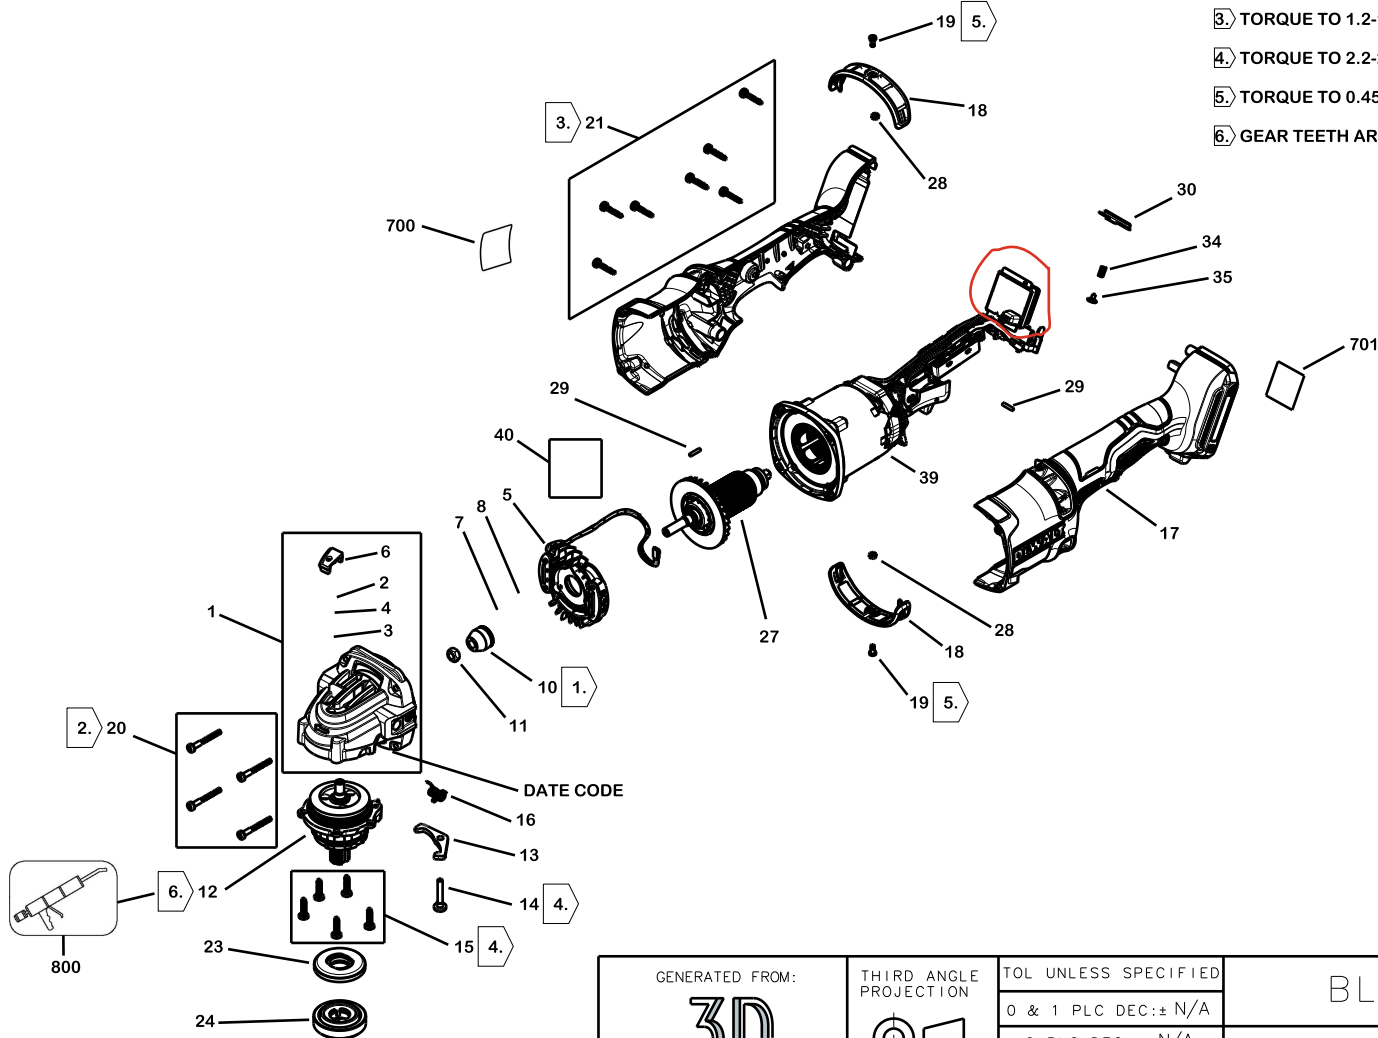

VERSION: 0.1
PRINTED: 2/22/24

GENERATED FROM: 3D		THIRD ANGLE PROJECTION 	TOL UNLESS SPECIFIED		BLACK & DECKER INC.	
			0 & 1 PLC DEC:± N/A		DOC NO: NA565865–SRD1	
			2 PLC DEC: ±N/A		TITLE: SERVICE DEWALT ANGLE–GRINDER F	
			ANGLES: ± N/A		REVISION: *** VER/ITER: ***	
THIS DOCUMENT IS THE PROPERTY OF BLACK & DECKER INC. THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO BLACK & DECKER INC. NEITHER THIS DOCUMENT NOR ITS CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIZED PERSON, COPIED OR PUBLISHED WITHOUT PRIOR WRITTEN CONSENT OF BLACK & DECKER INC.		ALL DIMENSIONS mm		CHANGE:		
		SIZE: A3	REF SCALE: NONE	REFER TO THE PLM SYSTEM FOR LATEST INFORMATION		
		SHEET: 1 OF 1				
COPYRIGHT © 2024 BLACK & DECKER INC.					***	

H G F E D C B A