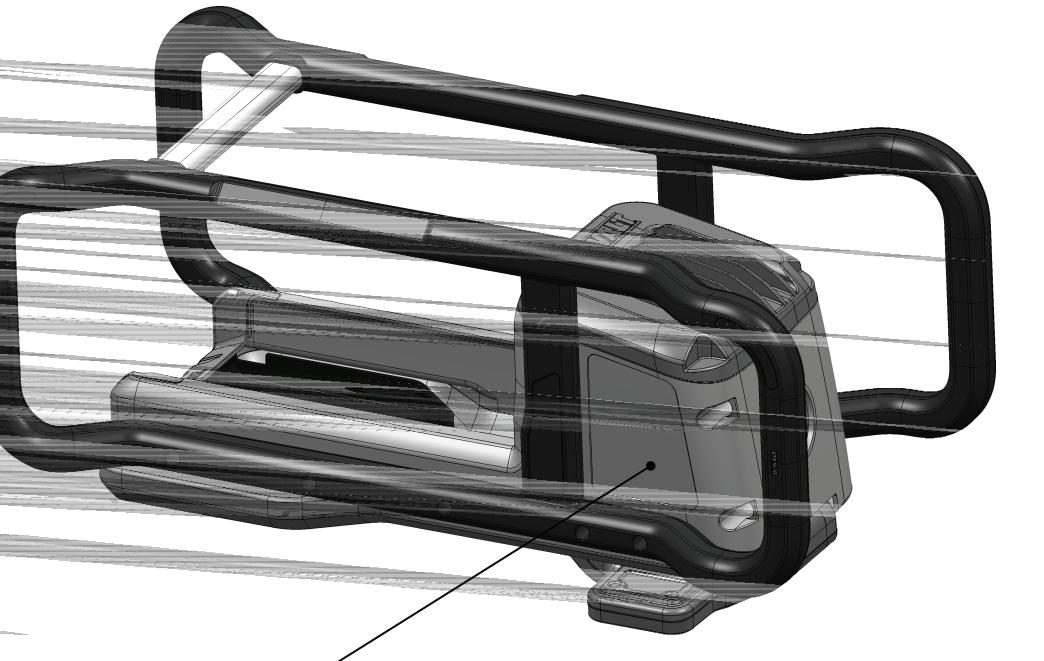
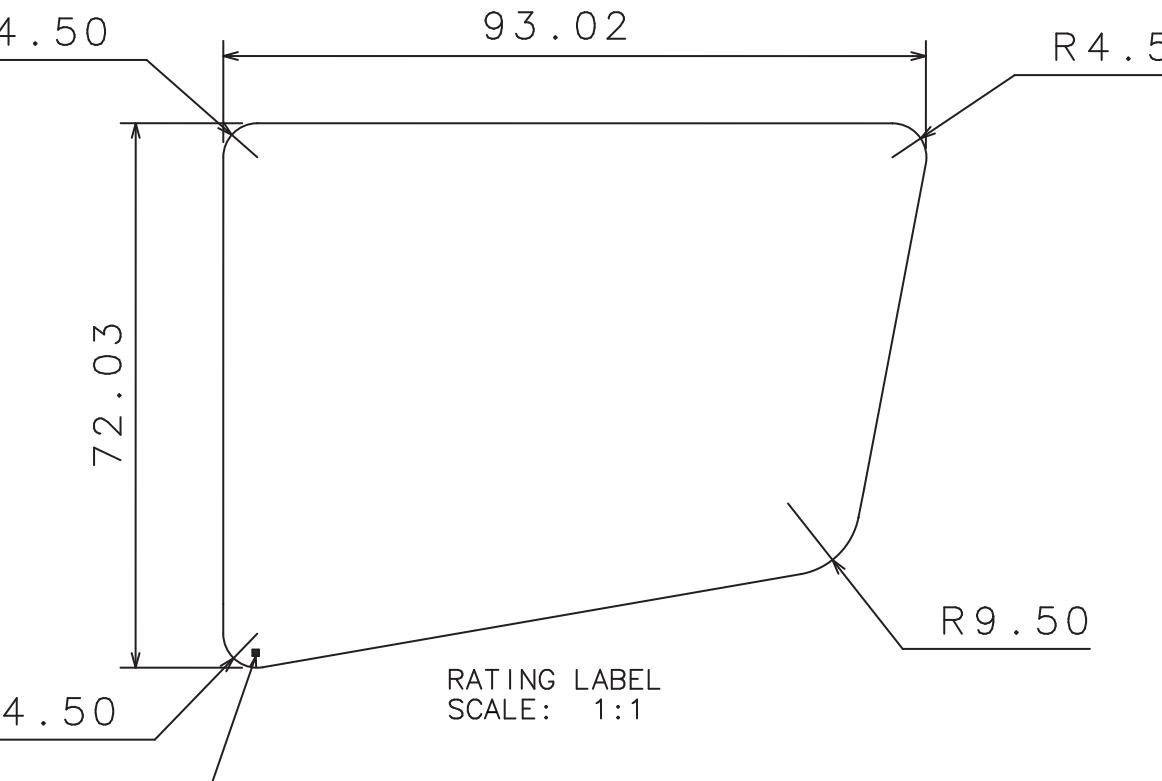


1	2	3	4	5	6								
<p>GENERAL INSTRUCTIONS: SUPPLIER TO INSURE CORRECT REVISION LEVEL DWG FOR PRODUCTION. CONTACT SB&D PURCHASING DEPT. FOR LATEST REVISION LEVEL DWG. CONTACT SB&D GRAPHICS DESIGN FOR ORIGINAL ARTWORK, COLOR STANDARDS AND CORPORATE GUIDELINES. PROOFS OF ALL REVISIONS THAT AFFECT ARTWORK AND ALL NEW COLOR FORMULATIONS MUST BE SUBMITTED TO SB&D GRAPHICS DESIGN FOR APPROVAL PRIOR TO MAKING PRODUCTION PARTS. SEE EP-1006. SUPPLIER TO PROVIDE SB&D GRAPHICS DESIGN WITH 6 SAMPLES OF ALL PRODUCTION PARTS. MARK SB&D PART NO. AND REVISION LEVEL.</p> <p>COLOR VARIATIONS:</p> <ul style="list-style-type: none"> = PMS Black = DEWALT Yellow = ANSI Orange (or PMS 172) <p>LABEL APPLICATION</p> <table border="1"> <tr> <td><input checked="" type="checkbox"/> TEXTURED</td> <td><input checked="" type="checkbox"/> RULED (one curve)</td> <td><input type="checkbox"/> OUTDOOR USE</td> </tr> <tr> <td><input type="checkbox"/> NON-TEXTURED</td> <td><input type="checkbox"/> FLAT</td> <td><input type="checkbox"/> COMPOUND</td> </tr> <tr> <td colspan="3">ADHESION: <input checked="" type="checkbox"/> PERMANENT <input type="checkbox"/> REMOVEABLE <input type="checkbox"/> OTHER</td> </tr> </table> <p>SYNTHETIC LABEL CONSTRUCTION: SUPPLIER NAME: SUGGESTED LABEL MATERIAL: TBD 5 MIL MATTE POLYCARBONATE, SUB-SURFACED PRINTED, 2 MIL ACRYLIC ADHESIVE, MATTE TEXTURED</p> <p>SPECIAL NOTES:</p> <ol style="list-style-type: none"> 1. FINISHED LABEL MUST BE A "UL" AND "CSA" RECOGNIZED LABELING SYSTEM (UL STANDARD: UL969, UL CATEGORY CODE: PGD02; CSA STANDARD: C22.2 NO. 0.15, CSA CLASS: 7921) AND APPROVED FOR THE SURFACE THAT THE LABEL WILL BE APPLIED TO UNLESS STANLEY BLACK & DECKER AGREES TO A DEVIATION. 2. LABEL MANUFACTURER IS RESPONSIBLE TO PLACE THEIR MANUFACTURER'S CODE ON LABEL, IN THE SIZE AND LOCATION INDICATED ON THIS DOCUMENT. 3. INK USED MUST BE UV STABILIZED. 4. ALL MATERIALS MUST COMPLY WITH ES100118. 5. LABELS SHALL BE LEGIBLE, SHALL NOT WORK LOOSE, AND SHALL NOT BECOME CURLLED AT THE EDGES AFTER BEING RUBBED BY HAND FOR 15 SECONDS WITH A CLOTH SOAKED IN WATER AND AGAIN FOR 15 SECONDS WITH A CLOTH SOAKED IN PETROLEUM SPIRIT. THE PETROLEUM SPIRIT TO BE USED FOR THE TEST SHALL BE A REAGENT GRADE HEXANE WITH A MINIMUM OF 85% AS N-HEXANE. 6. LABEL CONSTRUCTION: WILL MEET THE DURABILITY REQUIREMENTS AND ALSO PROVIDES THE VISUAL CONSISTENCY WITH OTHER DEWALT BRAND PRODUCTS. 7. LABEL MUST SATISFY LUBRICATING OIL IMMERSION TEST PER UL969 OR CSA C22.2 # 0.15 8. LABEL MUST SATISFY 80°C MAX TEMPERATURE RATING PER UL969 OR CSA C22.2 #0.15. 9. LABEL MUST BE APPROVED FOR NON-DRY INDOOR USE PER UL969 AND CSA C22.2 NO. 0.15. 10. ALL SHIPPING BOXES AND ROLL CORES OR LABEL SHEETS MUST BE MARKED WITH VENDOR'S NAME, TRADE NAME, DATE OF MANUFACTURE AND MATERIAL IDENTIFICATION PER ES100135. 	<input checked="" type="checkbox"/> TEXTURED	<input checked="" type="checkbox"/> RULED (one curve)	<input type="checkbox"/> OUTDOOR USE	<input type="checkbox"/> NON-TEXTURED	<input type="checkbox"/> FLAT	<input type="checkbox"/> COMPOUND	ADHESION: <input checked="" type="checkbox"/> PERMANENT <input type="checkbox"/> REMOVEABLE <input type="checkbox"/> OTHER			 <p>RATING LABEL</p> <p>ISOMETRIC VIEW</p>	 <p>R 4.50</p> <p>93.02</p> <p>72.03</p> <p>R 4.50</p> <p>R 4.50</p> <p>R 9.50</p> <p>RATING LABEL SCALE: 1:1</p> <p>MANUFACTURER'S CSA IDENTIFICATION CODE 1 MM MAX.</p>	<p>DCPS310 POWERSHIFT BACKPACK VIBRATOR</p> <p>NOM ANCE UL US LISTED 406A</p> <p>TYPE 1 60V --- (Max) CONTAINS: FCC ID: YJ7-NA230951 and IC ID: 9082A-NA230951</p> <p>WARNING/ADVERTENCIA/AVERTISSEMENT</p> <p>TO REDUCE THE RISK OF INJURY, USER MUST READ INSTRUCTION MANUAL. DO NOT USE HIGH PRESSURE CLEANING. DO NOT USE NEAR MOVING PARTS, MECHANISMS, OR RUNNING MACHINERY. USE ONLY WITH APPROVED ACCESSORIES. ALWAYS USE PROPER EYE, EAR AND RESPIRATORY PROTECTION. / PARA EL MANEJO SEGURO LEA EL MANUAL DE INSTRUCCIONES. NO USE LIMPIEZA A ALTA PRESIÓN. NO UTILIZAR EN PIEZAS MÓVILES, MECANISMOS O MAQUINARIA EN FUNCIONAMIENTO. USE SOLO CON ACCESORIOS APROBADOS. SIEMPRE USE PROTECCIÓN PARA LOS OJOS, AUDITIVA Y RESPIRATORIA ADECUADA. / AFIN DE REDUIRE LE RISQUE DE BLESSURE, L'UTILISATEUR DOIT LIRE LE GUIDE D'UTILISATION. NE PAS NETTOYER À HAUTE PRESSION. NE PAS UTILISER PRÈS DE PIÈCES MOBILES, DE MÉCANISMES OU DE MACHINERIE EN MARCHE. UTILISEZ SEULEMENT AVEC DES ACCESSOIRES APPROUVE. UTILISEZ TOUJOURS UNE PROTECTION OCULAIRE, AUDITIVE ET RESPIRATOIRE APPROPRIÉE.</p> <p>NA411812</p>	<p>THIS DOCUMENT IS THE PROPERTY OF STANLEY BLACK & DECKER INC. THE CONTENTS OF THIS DOCUMENT ARE CONFIDENTIAL AND CONSTITUTE TRADE SECRETS PROPRIETARY TO STANLEY BLACK & DECKER INC. NEITHER THIS DOCUMENT NOR ITS' CONTENTS SHALL BE DISCLOSED TO ANY UNAUTHORIZED PERSON, COPIED OR PUBLISHED WITHOUT PRIOR WRITTEN CONSENT OF STANLEY BLACK & DECKER INC.</p> <p>COPYRIGHT © 2024 STANLEY BLACK & DECKER INC.</p> <p>StanleyBlack&Decker</p> <p>FOR ITEM DATA SEE PRINTED REPORT</p> <p>1 of 1</p>
<input checked="" type="checkbox"/> TEXTURED	<input checked="" type="checkbox"/> RULED (one curve)	<input type="checkbox"/> OUTDOOR USE											
<input type="checkbox"/> NON-TEXTURED	<input type="checkbox"/> FLAT	<input type="checkbox"/> COMPOUND											
ADHESION: <input checked="" type="checkbox"/> PERMANENT <input type="checkbox"/> REMOVEABLE <input type="checkbox"/> OTHER													