



Printed antenna test report

(A).Printed antenna pattern:

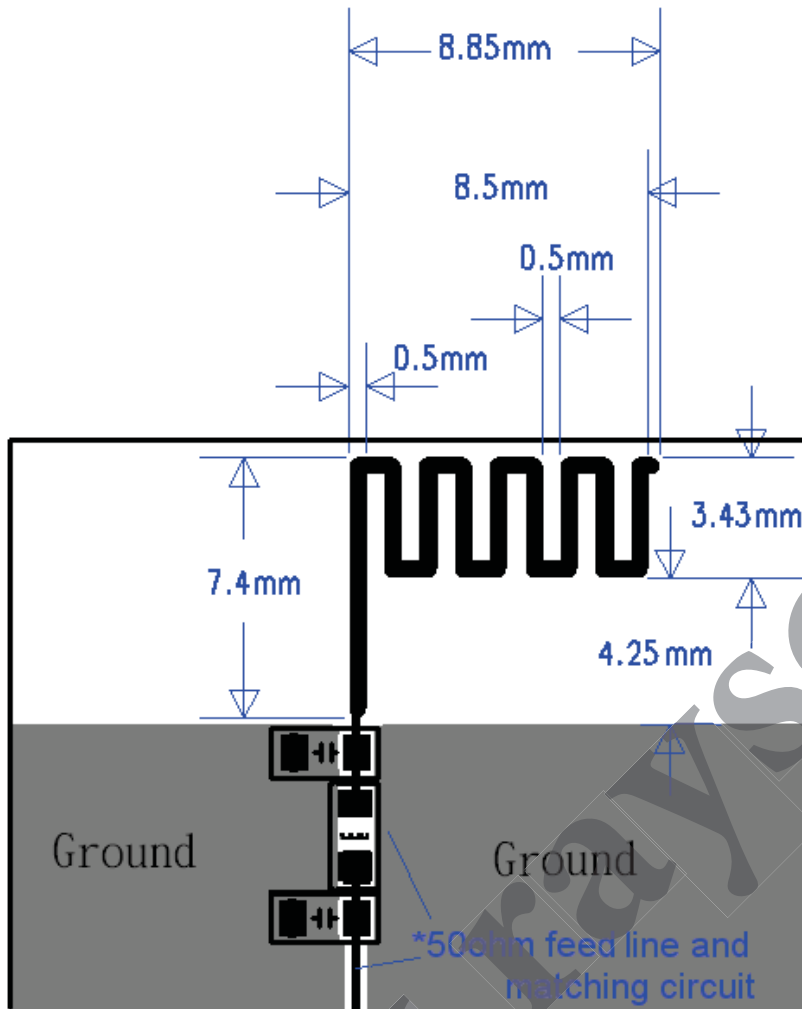


* 50 ohm feed line should be designed to match 50Ω characteristic impedance, depending on PCB material and thickness


(B)Test Board:

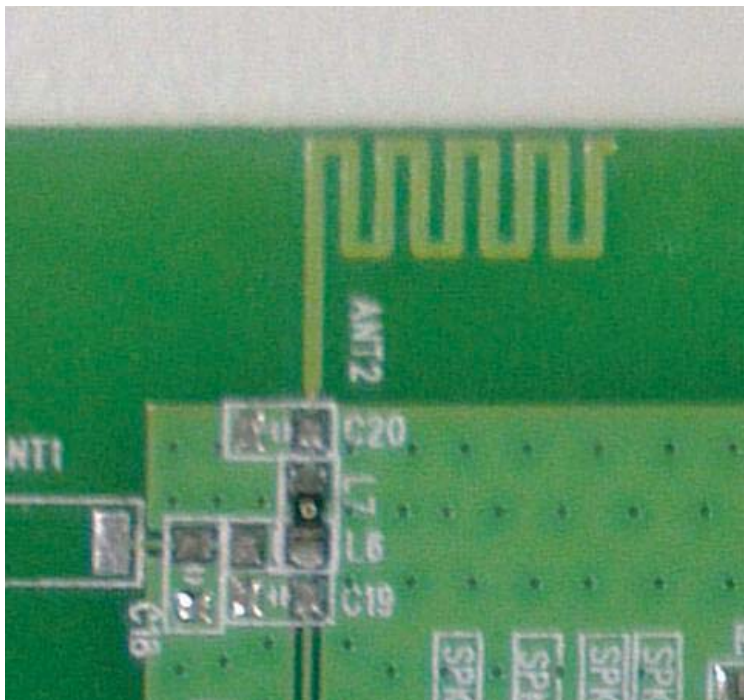



(B1).Without matching circuit:

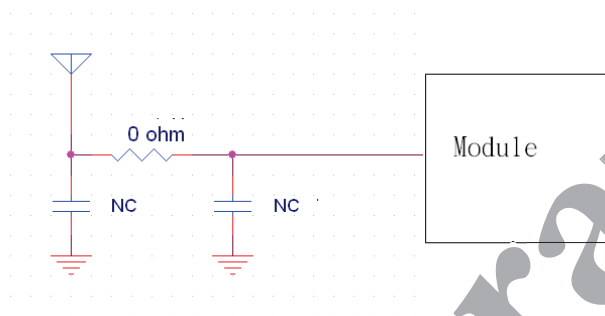



(B2).With matching circuit:

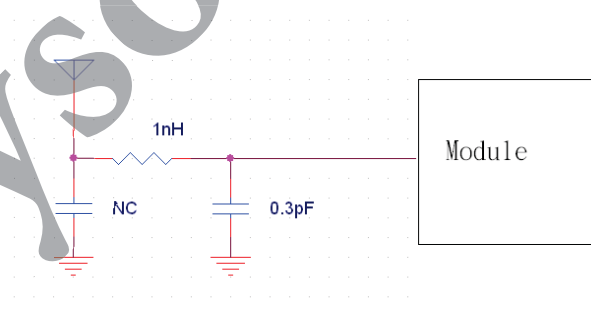



Return loss

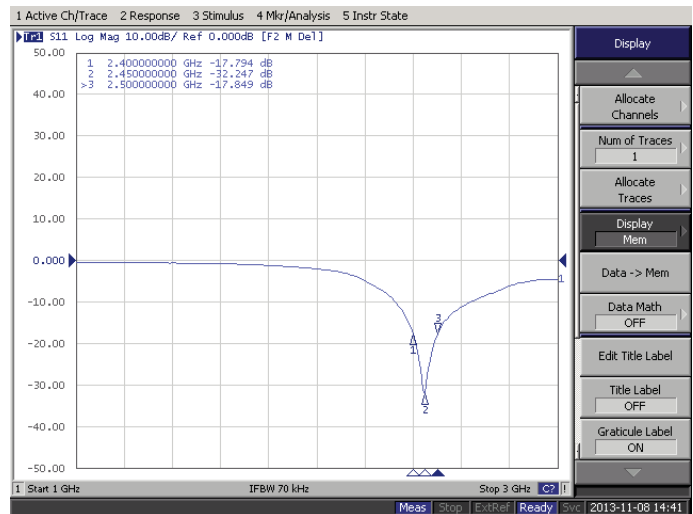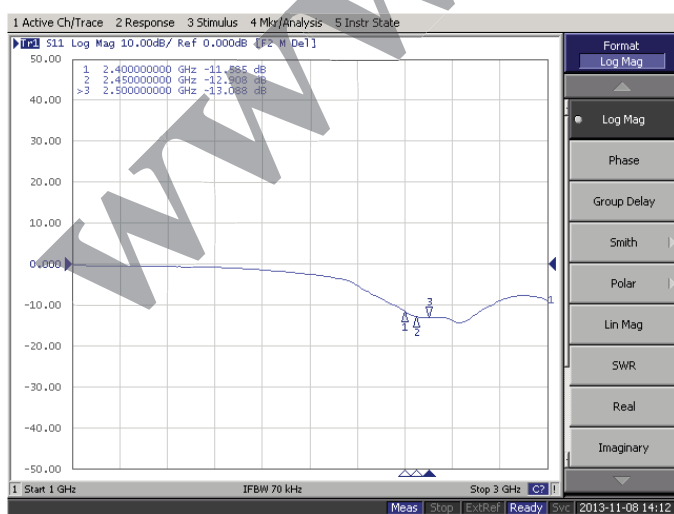


Smith chart

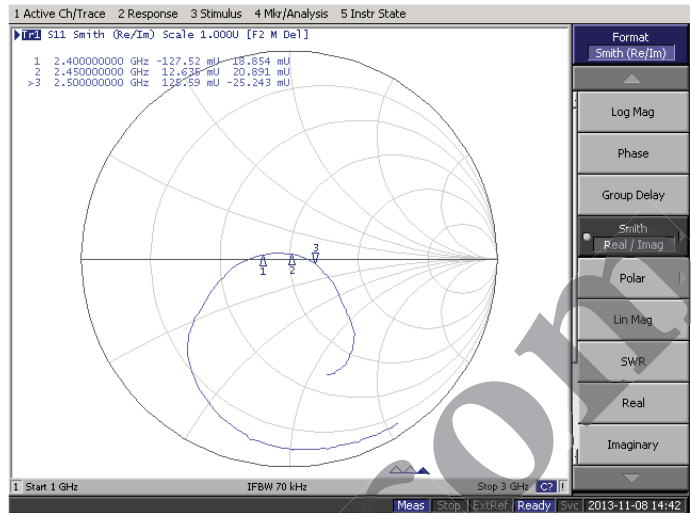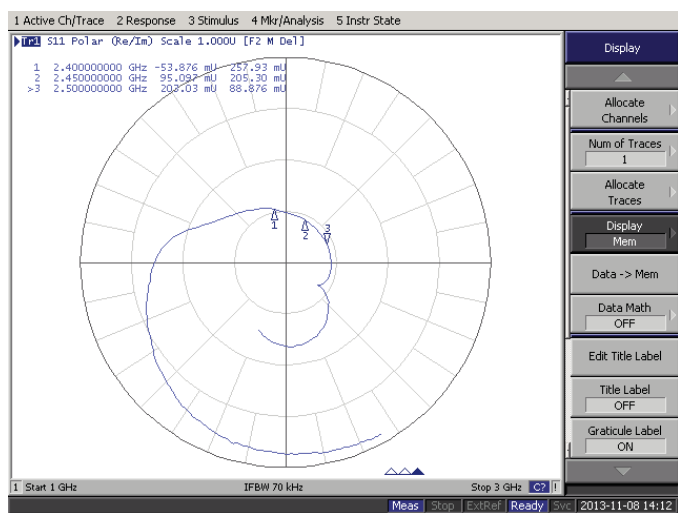

VSWR

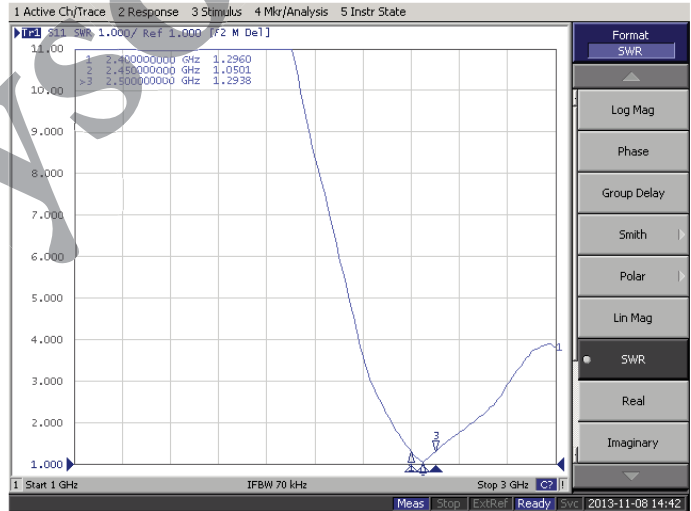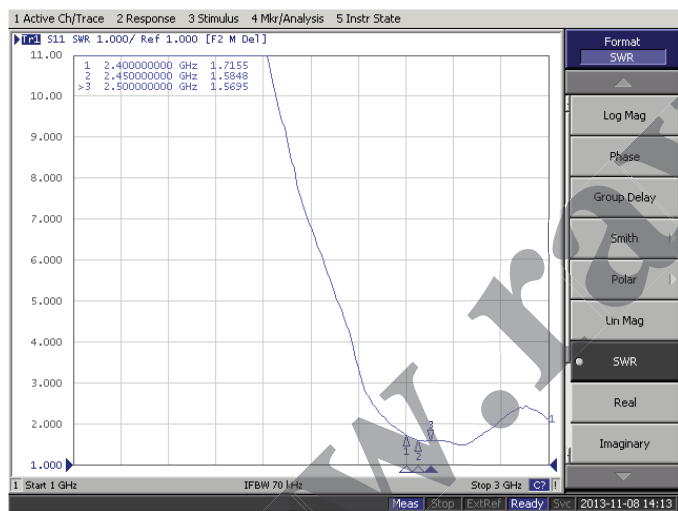

(C) Radiation Patterns of test board (with matching)

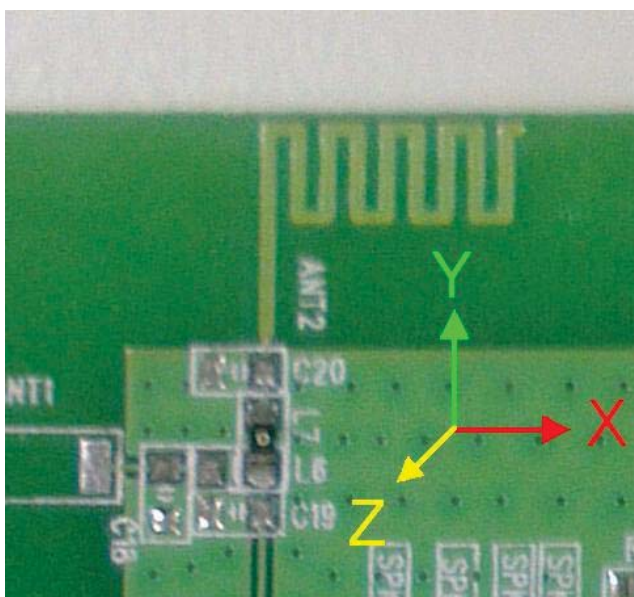

Gain Table(Unit :dBi):

@2.45GHz	Peak gain	Avg. gain
X-Y-H	1.54	-3.43
X-Y-V	-10.16	-17.17
X-Z-H	-1.95	-6.09
X-Z-V	1.1	-3.06
Y-Z-H	-1.56	-6.94
Y-Z-V	-1.4	-3.54

X-Y cut @2.45GHz



香港商立德國際商品試驗有限公司桃園分公司

Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch [Bureau Veritas ADT]
www.adt.com.hk | Hwa Yeh Lab & Head Office, Tel: +886-3-3153332 / Linkou EMC/RF Lab, Tel: +886-3-26262180 / Hsinchu EMC/RF Lab, Tel: +886-3-6936343

Brand / Model : Printed Antenna
Remark : TX Mode, EUT X-Y, 2450 MHz
Sample No. 01
Tested by : CS(LOOK)

Location: RF Chamber C


Date: 2013/11/27

Time: 下午 03:06:04

Temperature (°C): 25

Humidity (%): 75

Approved by:

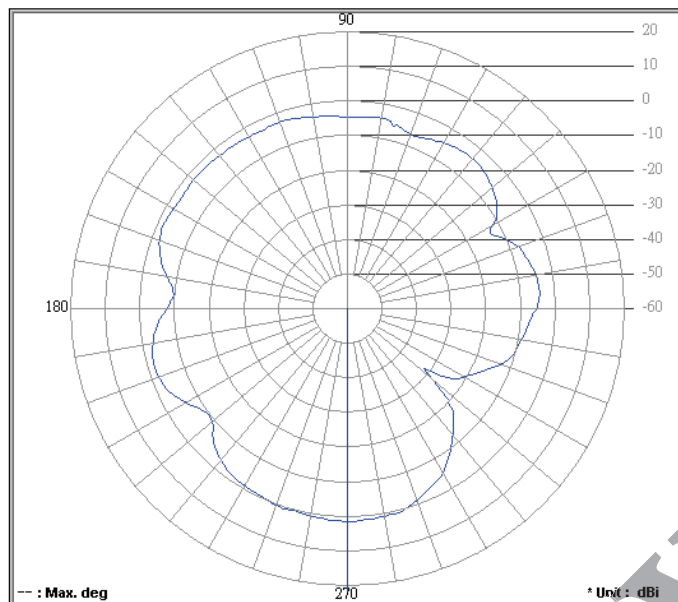

Frequency (MHz): 2450.00 Antenna Polarity: Horizontal Average Value (dBi): -3.43
Maximum Value (dBi): 1.54 Maximum Value (degree): 270
Minimum Value (dBi): -32.08 Minimum Value (degree): 322
V6.2

D:\測試程式\Antenna Pattern V6.1\Graph\1127\11270007.png



香港商立德國際商品試驗有限公司桃園分公司

Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch [Bureau Veritas ADT]
www.adt.com.hk | Hwa Yeh Lab & Head Office, Tel: +886-3-3153332 / Linkou EMC/RF Lab, Tel: +886-3-26262180 / Hsinchu EMC/RF Lab, Tel: +886-3-6936343

Brand / Model : Printed Antenna
Remark : TX Mode, EUT X-Y, 2450 MHz
Sample No. 01
Tested by : CS(LOOK)

Location: RF Chamber C


Date: 2013/11/27

Time: 下午 03:07:55

Temperature (°C): 25

Humidity (%): 75

Approved by:

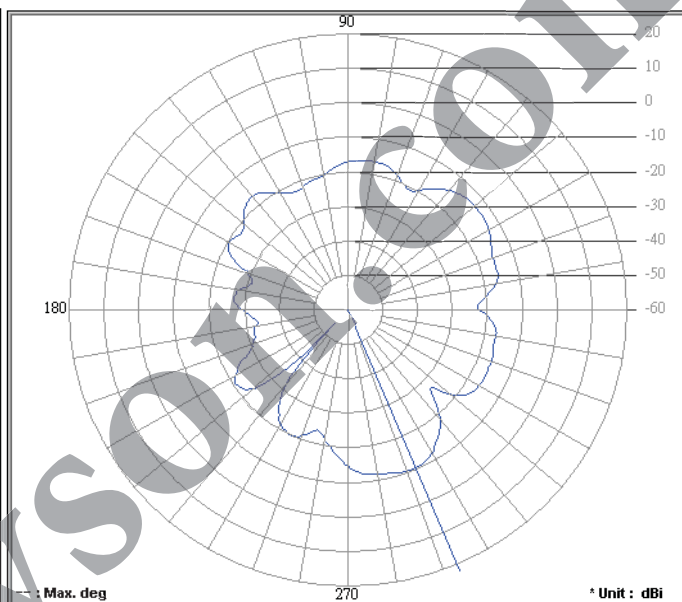

Frequency (MHz): 2450.00 Antenna Polarity: Vertical Average Value (dBi): -17.17
Maximum Value (dBi): -10.16 Maximum Value (degree): 293
Minimum Value (dBi): -54.18 Minimum Value (degree): 226
V6.2

D:\測試程式\Antenna Pattern V6.1\Graph\1127\11270008.png

X-Z cut @2.45GHz




香港商立德國際商品試驗有限公司桃園分公司

A D T Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch [Bureau Veritas ADT]
www.adt.com.hk Hwa Yeh Lab & Head Office, Tel +886-3-3163222 / Unkou EMC/RF Lab, Tel +886-3-29252180 / Hsinchu EMC/RF Lab, Tel +886-3-5935343

Brand / Model : Printed Antenna
Remark : 2450MHz , EUT X-Z
Sample No. 1
Tested by : Gary

Location: RF Chamber C Date: 2013/11/29 Time: 上午 11:04:29
Temperature (°C): 25 Humidity (%): 60 Approved by:

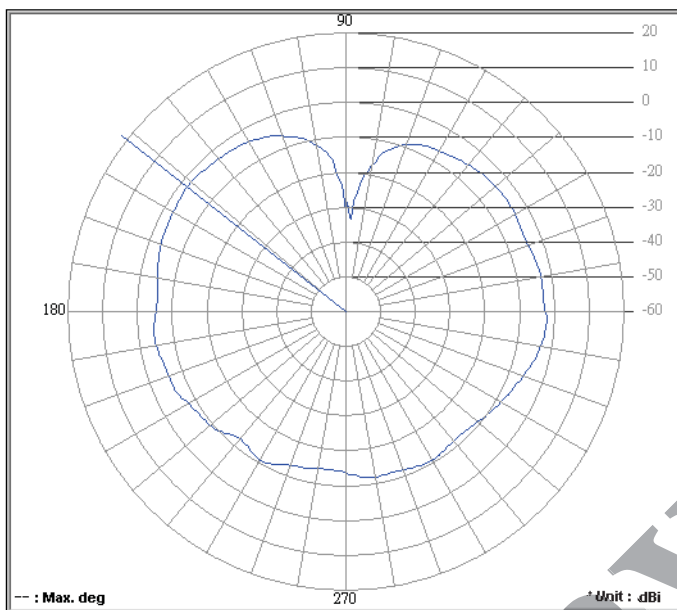

Frequency (MHz): 2450.00 Antenna Polarity: Horizontal Average Value (dBi): -6.09
Maximum Value (dBi): -1.95 Maximum Value (degree): 142
Minimum Value (dBi): -33.41 Minimum Value (degree): 87
V6.2

D:\測試程式\Antenna Pattern V6.1\Graph\1129\11290005.png




香港商立德國際商品試驗有限公司桃園分公司

A D T Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch [Bureau Veritas ADT]
www.adt.com.hk Hwa Yeh Lab & Head Office, Tel +886-3-3163222 / Unkou EMC/RF Lab, Tel +886-3-29252180 / Hsinchu EMC/RF Lab, Tel +886-3-5935343

Brand / Model : Printed Antenna
Remark : 2450MHz , EUT X-Z
Sample No. 1
Tested by : Gary

Location: RF Chamber C Date: 2013/11/29 Time: 上午 11:06:25
Temperature (°C): 25 Humidity (%): 60 Approved by:

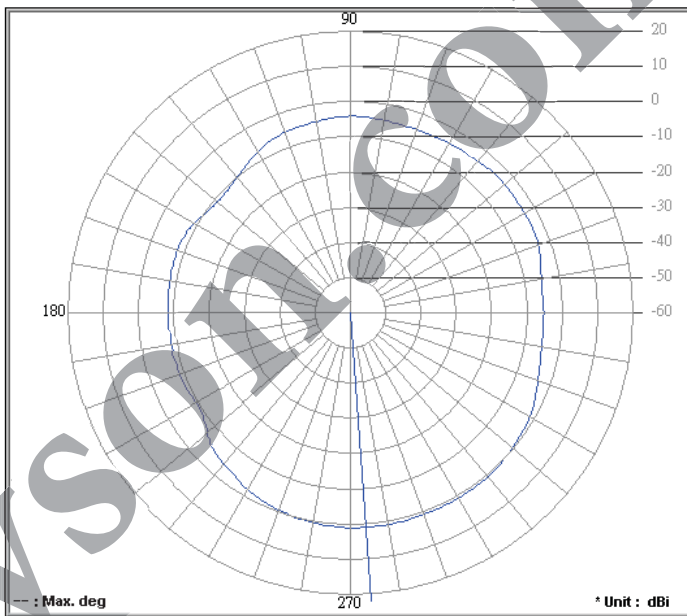

Frequency (MHz): 2450.00 Antenna Polarity: Vertical Average Value (dBi): -3.06
Maximum Value (dBi): 1.10 Maximum Value (degree): 274
Minimum Value (dBi): -10.94 Minimum Value (degree): 139
V6.2

D:\測試程式\Antenna Pattern V6.1\Graph\1129\11290006.png

Y-Z cut @2.45GHz



香港商立德國際商品試驗有限公司桃園分公司

A D T Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch [Bureau Veritas ADT]
www.adt.com.hk Hwa-Ya Lab & Head Office, Tel: +886-3-3163232 / Unkou EMC/RF Lab, Tel: +886-2-2952180 / Hsinchu EMC/RF Lab, Tel: +886-3-6936343

Brand / Model : Printed Antenna
Remark : 2450MHz , EUT Y-Z
Sample No. 1
Tested by : Gary

Location: RF Chamber C


Date: 2013/11/29

Time: 下午 12:15:15

Temperature (°C): 25

Humidity (%): 60

Approved by:

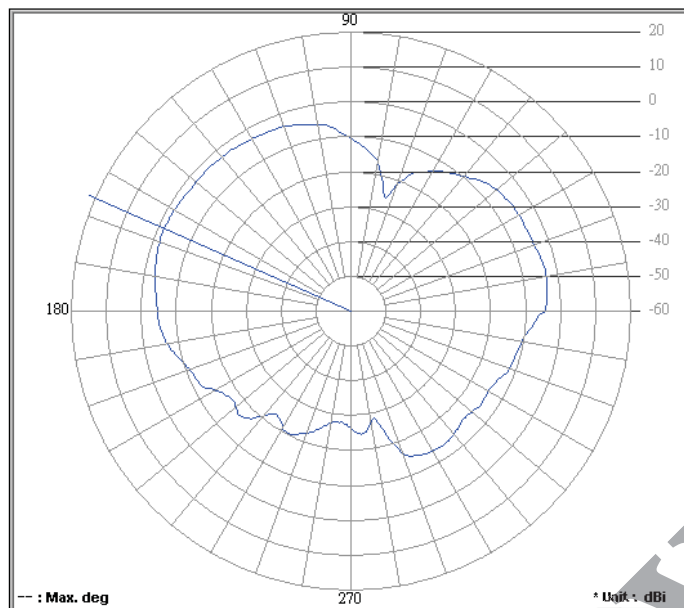

Frequency (MHz): 2450.00 Antenna Polarity: Horizontal Average Value (dBi): -6.94
Maximum Value (dBi): -1.56 Maximum Value (degree): 156
Minimum Value (dBi): -28.60 Minimum Value (degree): 282
V6.2

D:\測試程式\Antenna Pattern V6.1\Graph\1129\11290010.png



香港商立德國際商品試驗有限公司桃園分公司

A D T Bureau Veritas Consumer Products Services (H.K.) Ltd., Taoyuan Branch [Bureau Veritas ADT]
www.adt.com.hk Hwa-Ya Lab & Head Office, Tel: +886-3-3163232 / Unkou EMC/RF Lab, Tel: +886-2-2952180 / Hsinchu EMC/RF Lab, Tel: +886-3-6936343

Brand / Model : Printed Antenna
Remark : 2450MHz , EUT Y-Z
Sample No. 1
Tested by : Gary

Location: RF Chamber C


Date: 2013/11/29

Time: 上午 11:10:08

Temperature (°C): 25

Humidity (%): 60

Approved by:

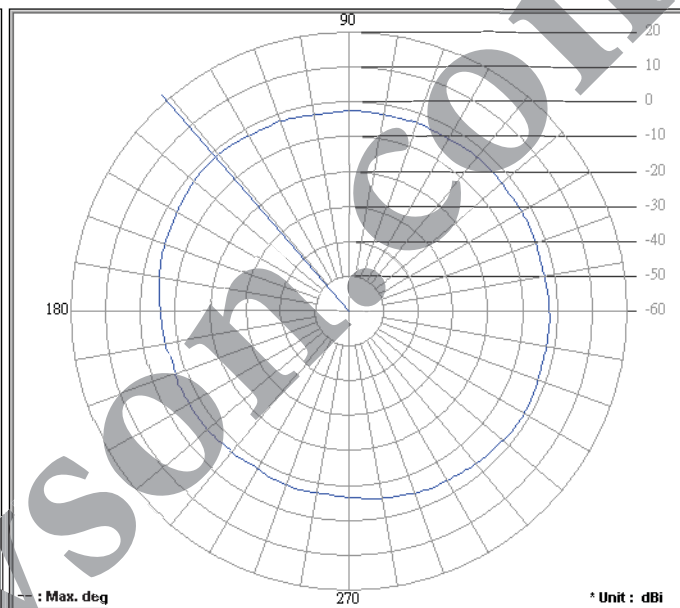

Frequency (MHz): 2450.00 Antenna Polarity: Vertical Average Value (dBi): -3.54
Maximum Value (dBi): -1.40 Maximum Value (degree): 131
Minimum Value (dBi): -7.75 Minimum Value (degree): 239
V6.2

D:\測試程式\Antenna Pattern V6.1\Graph\1129\11290007.png