

Report Number: F690501/RF-RTL005116

Page: 1

of

12

TEST REPORT

of

FCC Part 15 Subpart C §15.249 Class II Permissive Change

FCC ID: YJH-SKR-02

Equipment Under Test : Screen Keeper Wireless Tag

Model Name : SKR-02 (the additional model name : SKR-03)

Serial No. : N/A

Applicant : Maytel Co., Ltd.

Manufacturer : Maytel Co., Ltd.

Date of Test(s) : 2011.11.05 ~ 2011.11.15

Date of Issue : 2011.11.15

In the configuration tested, the EUT complied with the standards specified above.

Tested By: Date 2011.11.15

Duke Ko

Approved By:

Date

2011.11.15

Charles Kim



Report Number: F690501/RF-RTL005116 Page: 2 of 12

Table of contents

1. General information	3
2. Fundamental, Spurious emission and edge band radiated emission	6



Report Number: F690501/RF-RTL005116 Page: 3 of 12

1. General information

1.1 Testing laboratory

SGS Testing Korea Co., Ltd.

Wireless Div. 2FL, 18-34, Sanbon-dong, Gunpo-si, Gyeonggi-do, Korea 435-040

www.electrolab.kr.sgs.com

Telephone : +82 +31 428 5700 FAX : +82 +31 427 2371

1.2 Details of applicant

Applicant : Maytel Co., Ltd.

Address : #417 dosan Venture Digm 126-1, Pyeogchon-dong, Dongan-gu, Anyang-si,

Gyeonggi-do, Korea 431-070

Contact Person : Bae, Su Won
Phone No. : +82 +11 9743 7708
Fax No. : +82 +31 440 9331

1.3. Description of EUT

Kind of Product	Screen Keeper Wireless Tag
Model Name	SKR-02 (the additional model name : SKR-03)
Serial Number	N/A
Power Supply	DC 3 V (Lithium Battery)
Frequency Range	2 402 Mz ~ 2 480 Mz
Modulation Technique	GFSK
Number of Channels	79
Antenna Type	Fixed Type
Antenna Gain	-11.25 dBi
H/W version	V 0.2.0
S/W version	V 0.1.0

1.4 Details of modification

- The PCB of EUT is exactly same as for the original version.
- A battery is added for expending usage time as parallel, not serial.
- Applicant changes the battery socket to connect 2 batteries physically.

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.



Report Number: F690501/RF-RTL005116 Page: 4 of 12

1.5. Test equipment list

Equipment	Manufacturer	Model	S/N	Cal Due.
Spectrum Analyzer	R & S	FSV30	101004	Jul. 06, 2012
PXA Signal Analyzer	Agilent	N9030A	US51350132	Oct. 28, 2012
High Pass Filter	Wainwright	WHK3.0/18G-10SS	344	Jul. 07, 2012
Preamplifier	H.P.	8447F	2944A03909	Jul. 04, 2012
Preamplifier	R&S	SCU 18	10117	Mar. 23, 2012
Test Receiver	R&S	ESU26	100109	Feb. 21, 2012
Bilog Antenna	Antenna SCHWARZBECK VULB9163 MESSELEKTRONIK		396	Apr. 27, 2013
Horn Antenna	R&S	HF 906	100229	May. 04. 2012
Horn Antenna	SCHWARZBECK	BBHA 9170	BBHA9170431	Mar. 17, 2012
Antenna Master	EMCO	1050	N.C.R.	N.C.R.
Turn Table	Daeil EMC	DI-1500	N.C.R.	N.C.R.
Anechoic Chamber	SY Corporation	L × W × H (9.6 m × 6.4 m × 6.6 m)	N.C.R.	N.C.R.



Report Number: F690501/RF-RTL005116 Page: 5 of 12

1.6. Summary of test results

The EUT has been tested according to the following specifications:

	Applied Standard : FCC Part15, Subpart C							
Standard Test Item Result								
15.209(a) 15.249(a) 15.249(d) 15.205	Fundamental, Spurious emission and edge band radiated emission	Complied						

1.7. Test report revision

Revision	Report number	Description
0	F690501/RF-RTL005116	Initial




Report Number: F690501/RF-RTL005116 Page: 6 of 12


2. Fundamental, Spurious emission and edge band radiated emission

2.1. Test setup

The diagram below shows the test setup that is utilized to make the measurements for emission from 30 \(\mathref{Mt} \) to 1 \(\mathref{Mt} \) Emissions.

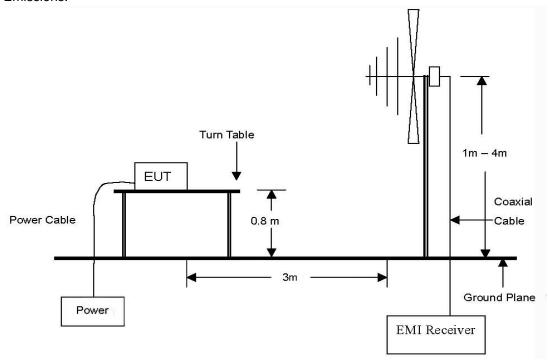

The diagram below shows the test setup that is utilized to make the measurements for emission from 1 \times to 24.8 \times Emissions.

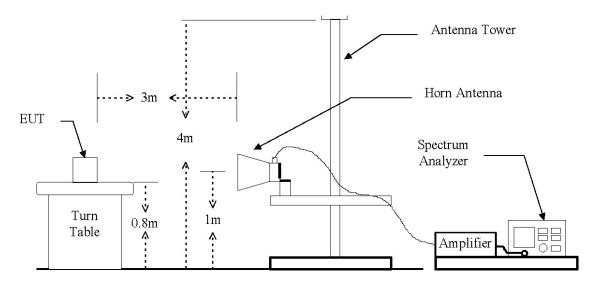

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.



Report Number: F690501/RF-RTL005116 Page: 7 of 12

2.2. Test procedures

Radiated emissions from the EUT were measured according to the dictates of ANSI C63.4:2003

- 1. The EUT was placed on the top of a rotating table 0.8 meters above the ground at a 3 meter anechoic Chamber The table was rotated 360 degrees to determine the position of the highest radiation.
- 2. During performing radiated emission above 1 @b, the EUT was set 3 meter away from the interference-receiving antenna.
- 3. The antenna is a broadband antenna, and its height is varied from one meter to four meters above the ground to determine the maximum value of the field strength. Both horizontal and vertical polarization of the antenna are set to make the measurement.
- 4. For each suspected emission, the EUT was arranged to its worst case and then the antenna was tuned to heights from 1 meter to 4 meters and the table was turned from 0 degrees to 360 degrees to find the maximum reading.
- 5. The test-receiver system was set to Peak Detect Function and Specified Bandwidth with Maximum Hold Mode. If the emission level of the EUT in peak mode was 10 dB lower than the limit specified, then testing could be stopped and the peak values of the EUT would be reported. Otherwise the emissions that did not have 10 dB margin would be re-tested one by one using peak, quasi-peak or average method as specified and then reported in a data sheet.

Note:

- 1. The resolution bandwidth and video bandwidth of test receiver/spectrum analyzer is 1 Mb for Peak detection and frequency above 1 GHz.
- 2. The resolution bandwidth of test receiver/spectrum analyzer is 1 $\,\text{Mz}$ and the video bandwidth is 10 $\,\text{Hz}$ for Average detection (AV) at frequency above 1 $\,\text{GHz}$.



Report Number: F690501/RF-RTL005116 Page: 8 of 12

2.3. Limit

In the section 15.249(a):

Except as provided in paragraph (b) of this section, the field strength of emissions from intentional radiators operated within these frequency bands shall comply with the following:

Fundamental frequency	Field strength of fundamental (⊪V/m)	Field strength of harmonics $(\mu V/m)$
902 ~ 928 MHz	50	500
2 400 ~ 2 483.5 Mz	50	500
5 725 ~ 5 875 Mb	50	500
24.0 ~ 24.25 GHz	250	2 500

Except as provided elsewhere in this Subpart, the emissions from an intentional radiator shall not exceed the field strength levels specified in the following table:

Fundamental frequency (쌘)	Field strength (\bullet \vec{\vec{\vec{\vec{\vec{\vec{\vec{\vec	Measurement distance (m)
30 ~ 88	100*	3
88 ~ 216	150*	3
216 ~960	200*	3
Above 960	500	3

Remark:

Except as provided in paragraph (g), fundamental emissions from intentional radiators operating under this Section shall not be located in the frequency bands 54-72 Mz, 76-88 Mz, 174-216 MHz or 470-806 Mz. However, operation within these frequency bands is permitted under other sections of this Part, e.g., Sections 15.231 and 15.241.

In the above emission table, the tighter limit applies at the band edges.

Fundamental frequency (쌘)	Field strength ($\mu\!\!N$ /m at 3 meter)	Field strength ($\mathrm{dB}\mu \! \! \! \! \! \! \! \! \! \! \! \! \! \! \! \! \! \! \!$
30 ~ 88	100	40
88 ~ 216	150	43.5
216 ~960	200	46
Above 960	500	54

The results shown in this test report refer only to the sample(s) tested unless otherwise stated. This test report cannot be reproduced, except in full, without prior written permission of the Company.



Report Number: F690501/RF-RTL005116 Page: 9 of 12

2.4. Test result

Ambient temperature : (23 ± 2) °C Relative humidity : 46 % R.H.

2.4.1. Below 1 健

Radiated Emissions		liated Emissions Ant Correction Factors		Total	FCC Limit			
Frequency (畑)	Reading (dBμV)	Detect Mode	Pol.	AF (dB/m)	AMP + CL (dB)	Actual (dBµV/m)	Limit (dBµV/m)	Margin (dB)
Below 1 000.000	Not Detected	-	-	-	-	-	1	-

Remark

- 1. To get a maximum emission level from the EUT, the EUT was moved throughout the XY, XZ and YZ planes.(Worst case is XZ-plane)
- 2. All spurious emission at channels are almost the same below 1 %, so that the channel was chosen at representative in final test.



Report Number: F690501/RF-RTL005116 Page: 10 of 12

2.4.2. Above 1 础

A. Low Channel (2 402 贴)

Radiated Emissions		Ant	Correctio	n Factors	Total	FCC Limit		
Frequency (Mb)	Reading (dBμV)	Detect Mode	Pol.	AF (dB/m)	CL (dB)	Actual (dBµV/m)	Limit (dBµV/m)	Margin (dB)
2 402.000	51.74	Peak	Н	28.50	5.38	85.62	114.00	28.38
*2 390.000	24.27	Peak	Н	28.47	5.23	57.97	74.00	16.03
*2 390.000	12.33	Average	Н	28.47	5.23	46.03	54.00	7.97
2 400.00	35.54	Peak	Н	28.49	5.39	69.42	74.00	4.58
2 400.00	17.33	Average	Н	28.49	5.39	51.21	54.00	2.79

Radiated Emissions		Ant	Correction Factors		Total	FCC Limit		
Frequency (Mb)	Reading (dBμV)	Detect Mode	Pol.	AF (dB/m)	AMP+CL (dB)	Actual (dBµV/m)	Limit (dBµV/m)	Margin (dB)
4 803.96	58.38	Peak	Н	32.80	-36.54	54.64	74.00	19.36
4 803.96	39.78	Average	Н	32.80	-36.54	36.04	54.00	17.96
Above 4 900.000	Not Detected	-	-	-	-	-	-	-



Report Number: F690501/RF-RTL005116 Page: 11 of 12

B. Middle Channel (2 439 Mb)

Radiated Emissions		Radiated Emissions Ant		Correctio	Correction Factors		FCC L	imit
Frequency (畑)	Reading (dBμV)	Detect Mode	Pol.	AF (dB/m)	CL (dB)	Actual (dBµN/m)	Limit (dBµV/m)	Margin (dB)
2 439.000	51.60	Peak	Н	28.59	5.19	85.38	114.00	28.62

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (Mb)	Reading (dBμV)	Detect Mode	Pol.	AF (dB/m)	AMP+CL (dB)	Actual (dBµV/m)	Limit (dBµV/m)	Margin (dB)
4 877.93	59.77	Peak	Н	33.01	-36.67	56.11	74.00	17.89
4 877.93	40.21	Average	Н	33.01	-36.67	36.55	54.00	17.45
Above 4 900.000	Not Detected	-	-	-	-	-	-	-



Report Number: F690501/RF-RTL005116 Page: 12 of 12

C. High Channel (2 480 Mb)

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (Mb)	Reading (dBμV)	Detect Mode	Pol.	AF (dB/m)	CL (dB)	Actual (dΒμλ/m)	Limit (dBµV/m)	Margin (dB)
2 480.000	50.38	Peak	Н	28.70	5.35	84.43	114.00	29.57
*2 483.500	26.94	Peak	Н	28.71	5.37	61.02	74.00	12.98
*2 483.500	11.67	Average	Н	28.71	5.37	45.75	54.00	8.25

Radiated Emissions			Ant	Correction Factors		Total	FCC Limit	
Frequency (Mb)	Reading (dBμV)	Detect Mode	Pol.	AF (dB/m)	AMP+CL (dB)	Actual (dΒμV/m)	Limit (dBµV/m)	Margin (dB)
4 959.99	57.09	Peak	Н	33.25	-36.35	53.99	74.00	20.01
4 959.99	39.19	Average	Н	33.25	-36.35	36.09	54.00	17.91
Above 5 000.000	Not Detected	-	-	-	-	-	-	-

Remarks;

- 1. "*" means the restricted band.
- 2. To get a maximum emission level from the EUT, the EUT was moved throughout the x, y and z-axis. (Worst case is y-axis.)
- 3. Measuring frequencies from 1 $\mbox{ GHz}$ to the 10th harmonic of highest fundamental Frequency.
- 4. Radiated emissions measured in frequency above 1 000 Mb were made with an instrument using peak/average detector mode.
- 5. Average test would be performed if the peak result were greater than the average limit.
- 6. Actual = Reading + AF Amp Gain + CL