

WatchGuard Video

VISTA WiFi

FCC 15.247:2018
2.4GHz Band Single Channel DTS Radio

Report # WTVD0001.1 Rev. 1







NVLAP LAB CODE: 201049-0

CERTIFICATE OF TEST



Last Date of Test: October 12, 2018
WatchGuard Video
Model: VISTA WiFi

Radio Equipment Testing

Standards

Specification	Method
FCC 15.247:2018	ANSI C63.10:2013, KDB 558074

Results

itesuits				
Method Clause	Test Description	Applied	Results	Comments
6.2	Powerline Conducted Emissions	No	N/A	Not required for a battery powered EUT.
6.5, 6.6 11.12.1, 11.13.2	Spurious Radiated Emissions	Yes	Pass	
11.6	Duty Cycle	Yes	Pass	
11.8.2	Occupied Bandwidth	Yes	Pass	
11.9.2.2.4	Output Power	Yes	Pass	
11.9.2.2.4	Equivalent Isotropic Radiated Power	Yes	Pass	
11.10.2	Power Spectral Density	Yes	Pass	
11.11	Band Edge Compliance	Yes	Pass	
11.11	Spurious Conducted Emissions	Yes	Pass	

Deviations From Test Standards

None

Approved By:

Jeremiah Darden, Operations Manager

Product compliance is the responsibility of the client; therefore, the tests and equipment modes of operation represented in this report were agreed upon by the client, prior to testing. The results of this test pertain only to the sample(s) tested. The specific description is noted in each of the individual sections of the test report supporting this certificate of test. This report reflects only those tests from the referenced standards shown in the certificate of test. It does not include inspection or verification of labels, identification, marking or user information. As indicated in the Statement of Work sent with the quotation, Element's standard process is to always use the latest published version of the test methods even when earlier versions are cited in the test specification. Issuance of a purchase order was de facto acceptance of this approach. Otherwise, the client would have advised Element in writing of the specific version of the test methods they wanted applied to the subject testing.

REVISION HISTORY



Revision Number	Description	Date (yyyy-mm-dd)	Page Number
00	None		
	Updated radio on cover page from 802.11g SISO Radio to 2.4GHz Band Single Channel DTS Radio.	2018-11-29	1
01	Updated company address to 415 East Exchange Parkway Allen, TX 75002.	2018-11-29	8
	Updated functional description to, Body cam for law enforcement with single channel wireless link.	2018-11-29	8
	Updated testing objective radio from 802.11 to DTS.	2018-11-29	8

ACCREDITATIONS AND AUTHORIZATIONS



United States

FCC - Designated by the FCC as a Telecommunications Certification Body (TCB). Certification chambers, Open Area Test Sites, and conducted measurement facilities are listed with the FCC.

A2LA - Accredited by A2LA to ISO / IEC 17065 as a product certifier. This allows Element to certify transmitters to FCC and IC specifications.

NVLAP - Each laboratory is accredited by NVLAP to ISO 17025

Canada

ISED - Recognized by Innovation, Science and Economic Development Canada as a Certification Body (CB). Certification chambers and Open Area Test Sites are filed with ISED.

European Union

European Commission - Within Element, we have a EU Notified Body validated for the EMCD and RED Directives.

Australia/New Zealand

ACMA - Recognized by ACMA as a CAB for the acceptance of test data.

Korea

MSIT / RRA - Recognized by KCC's RRA as a CAB for the acceptance of test data.

Japan

VCCI - Associate Member of the VCCI. Conducted and radiated measurement facilities are registered.

Taiwan

BSMI – Recognized by BSMI as a CAB for the acceptance of test data.

NCC - Recognized by NCC as a CAB for the acceptance of test data.

Singapore

IDA – Recognized by IDA as a CAB for the acceptance of test data.

Israel

MOC - Recognized by MOC as a CAB for the acceptance of test data.

Hong Kong

OFCA – Recognized by OFCA as a CAB for the acceptance of test data.

Vietnam

MIC – Recognized by MIC as a CAB for the acceptance of test data.

SCOPE

For details on the Scopes of our Accreditations, please visit: https://www.nwemc.com/emc-testing-accreditations


FACILITIES







California Labs OC01-17 41 Tesla Irvine, CA 92618 (949) 861-8918	abs OC01-17 Labs MN01-10 Labs NY01-04 41 Tesla 9349 W Broadway Ave. 4939 Jordan Rd. 67 vine, CA 92618 Brooklyn Park, MN 55445 Elbridge, NY 13060		Oregon Labs EV01-12 6775 NE Evergreen Pkwy #400 Hillsboro, OR 97124 (503) 844-4066	Texas Labs TX01-09 3801 E Plano Pkwy Plano, TX 75074 (469) 304-5255	Washington Labs NC01-05 19201 120 th Ave NE Bothell, WA 98011 (425)984-6600		
		NV	LAP				
NVLAP Lab Code: 200676-0	NVLAP Lab Code: 200881-0	NVLAP Lab Code: 200761-0	NVLAP Lab Code: 200630-0	NVLAP Lab Code:201049-0	NVLAP Lab Code: 200629-0		
	Innovation, Science and Economic Development Canada						
2834B-1, 2834B-3	2834E-1, 2834E-3	N/A	2834D-1, 2834D-2	2834G-1	2834F-1		
	BSMI						
SL2-IN-E-1154R	SL2-IN-E-1152R	N/A	SL2-IN-E-1017	SL2-IN-E-1158R	SL2-IN-E-1153R		
	VCCI						
A-0029	A-0109	N/A	A-0108	A-0201	A-0110		
Recognized Phase I CAB for ACMA, BSMI, IDA, KCC/RRA, MIC, MOC, NCC, OFCA							
US0158	US0175	N/A	US0017	US0191	US0157		

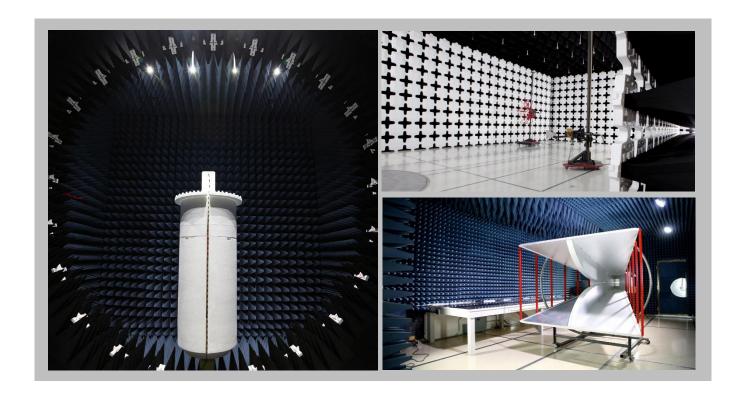

MEASUREMENT UNCERTAINTY



Measurement Uncertainty

When a measurement is made, the result will be different from the true or theoretically correct value. The difference is the result of tolerances in the measurement system that cannot be completely eliminated. To the extent that technology allows us, it has been our aim to minimize this error. Measurement uncertainty is a statistical expression of measurement error qualified by a probability distribution.

A measurement uncertainty estimation has been performed for each test per our internal quality document QM205.4.6. The estimation is used to compare the measured result with its "true" or theoretically correct value. The expanded measurement uncertainty (K=2) can be found included as part of the applicable test description page. Our measurement data meets or exceeds the measurement uncertainty requirements of the applicable specification; therefore, the test data can be compared directly to the specification limit to determine compliance. The calculations for estimating measurement uncertainty are based upon ETSI TR 100 028 (or CISPR 16-4-2 as applicable), and are available upon request.


The following table represents the Measurement Uncertainty (MU) budgets for each of the tests that may be contained in this report.

Test	+ MU	- MU
Frequency Accuracy (Hz)	0.0007%	-0.0007%
Amplitude Accuracy (dB)	1.2 dB	-1.2 dB
Conducted Power (dB)	0.3 dB	-0.3 dB
Radiated Power via Substitution (dB)	0.7 dB	-0.7 dB
Temperature (degrees C)	0.7°C	-0.7°C
Humidity (% RH)	2.5% RH	-2.5% RH
Voltage (AC)	1.0%	-1.0%
Voltage (DC)	0.7%	-0.7%
Field Strength (dB)	5.1 dB	-5.1 dB
AC Powerline Conducted Emissions (dB)	2.4 dB	-2.4 dB


Test Setup Block Diagrams




Antenna Port Conducted Measurements

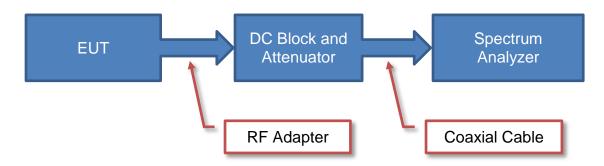

Near Field Test Fixture Measurements

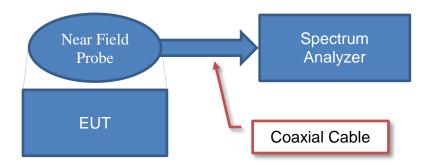

Spurious Radiated Emissions

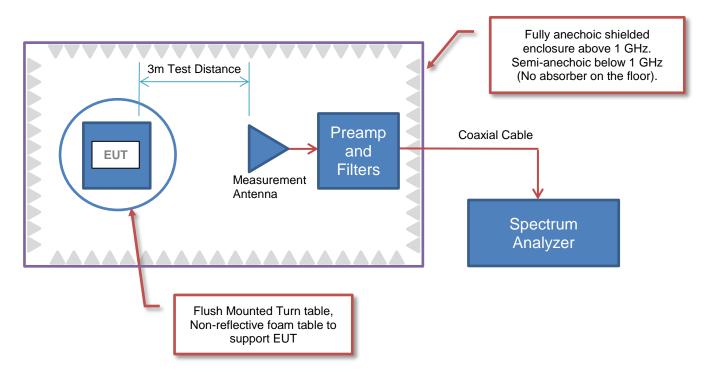

PRODUCT DESCRIPTION



Client and Equipment Under Test (EUT) Information

Company Name:	WatchGuard Video
Address:	415 East Exchange Parkway
City, State, Zip:	Allen, TX 75002
Test Requested By:	Navaid Karimi
Model:	VISTA WiFi
First Date of Test:	October 11, 2018
Last Date of Test:	October 12, 2018
Receipt Date of Samples:	October 11, 2018
Equipment Design Stage:	Prototype
Equipment Condition:	No Damage
Purchase Authorization:	Verified

Information Provided by the Party Requesting the Test

Functional Description of the EUT:

Body cam for law enforcement with single channel wireless link.

Testing Objective:

To demonstrate compliance of the single channel DTS radio under FCC 15.247 for operation in the 2.4 GHz band.

POWER SETTINGS



The EUT was tested using the power settings provided by the manufacturer:

SETTINGS FOR ALL TESTS IN THIS REPORT

Modulation Types	Channel Bandwidths	Channel	Position	Frequency (MHz)	Power Setting
6 Mbps	20	6	Single Channel	2437	20000 (Max)
9 Mbps	20	6	Single Channel	2437	20000 (Max)
12 Mbps	20	6	Single Channel	2437	20000 (Max)
18 Mbps	20	6	Single Channel	2437	20000 (Max)
24 Mbps	20	6	Single Channel	2437	20000 (Max)
36 Mbps	20	6	Single Channel	2437	20000 (Max)
48 Mbps	20	6	Single Channel	2437	20000 (Max)
54 Mbps	20	6	Single Channel	2437	20000 (Max)

CONFIGURATIONS



Configuration WTVD0001-1

EUT			
Description	Manufacturer	Model/Part Number	Serial Number
Body Camera with WiFi Link	Watchguard Video	VISTA WiFi	WFC1-039084

Configuration WTVD0001-2

EUT						
Description	Manufacturer	Model/Part Number	Serial Number			
Body Camera with Wifi Link (Direct Connect)	Watchguard Video	VISTA WiFi	WFC1-009113			

Peripherals in test setup boundary					
Description Manufacturer Model/Part Number Serial Number					
Command Console Board	Watchguard Video	WGA00341	0615413600		
Charging Base	Watchguard Video	WGA00537	VHB1-05863		

Remote Equipment Outside of Test Setup Boundary						
Description Manufacturer Model/Part Number Serial Number						
Laptop Computer	Dell	Latitude 7480	27904748150			
AC/DC Power Supply (Base)	Unknown	M120100A0	None			

Cables						
Cable Type	Shield	Length (m)	Ferrite	Connection 1	Connection 2	
DC Power (Base)	No	1.5m	No	AC/DC Power Supply (Base)	Charging Base	
USB to RS-232	Yes	0.5m	No	Laptop Computer	Command Console Board	

Report No. WTVD0001.1 Rev 01

MODIFICATIONS



Equipment Modifications

Item	Date	Test	Modification	Note	Disposition of EUT
1	2018-10-11	Spurious Radiated Emissions	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
2	2018-10-12	Duty Cycle	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
3	2018-10-12	Occupied Bandwidth	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
4	2018-10-12	Output Power	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
5	2018-10-12	Equivalent Isotropic Radiated Power	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
6	2018-10-12	Power Spectral Density	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
7	2018-10-12	Band Edge Compliance	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	EUT remained at Element following the test.
8	2018-10-12	Spurious Conducted Emissions	Tested as delivered to Test Station.	No EMI suppression devices were added or modified during this test.	Scheduled testing was completed.

SPURIOUS RADIATED EMISSIONS



PSA-ESCI 2018.07.27

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data. The test data represents the configuration / operating mode/ model that produced the highest emission levels as compared to the specification limit.

MODES OF OPERATION

Continuously Transmitting at Single Channel 2437 MHz

POWER SETTINGS INVESTIGATED

Battery

CONFIGURATIONS INVESTIGATED

WTVD0001 - 1

FREQUENCY RANGE INVESTIGATED

SAMPLE CALCULATIONS

Radiated Emissions: Field Strength = Measured Level + Antenna Factor + Cable Factor - Amplifier Gain + Distance Adjustment Factor + External Attenuation

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Interval
Attenuator	Weinschel Corp	4H-20	AWB	16-Mar-2018	12 mo
Filter - Low Pass	Micro-Tronics	LPM50004	HHV	3-Aug-2018	12 mo
Filter - High Pass	Micro-Tronics	HPM50111	HGC	16-Mar-2018	12 mo
Amplifier - Pre-Amplifier	Miteq	JSDWK42-18004000-60-5P	PAM	10-Oct-2018	12 mo
Antenna - Double Ridge	A.H. Systems, Inc.	SAS-574	AXW	21-Aug-2018	24 mo
Cable	Northwest EMC	18-40GHz	TXE	10-Oct-2018	12 mo
Amplifier - Pre-Amplifier	Miteq	AMF-6F-12001800-30-10P	PAL	9-Oct-2018	12 mo
Antenna - Standard Gain	ETS Lindgren	3160-08	AJG	NCR	0 mo
Amplifier - Pre-Amplifier	Miteq	AMF-6F-08001200-30-10P	PAK	9-Oct-2018	12 mo
Antenna - Standard Gain	ETS Lindgren	3160-07	AJF	NCR	0 mo
Cable	Northwest EMC	8-18GHz	TXD	31-May-2018	12 mo
Amplifier - Pre-Amplifier	Miteq	AMF-3D-00100800-32-13P	PAJ	31-May-2018	12 mo
Antenna - Double Ridge	ETS Lindgren	3115	AIP	12-Jul-2018	24 mo
Cable	Northwest EMC	1-8.2 GHz	TXC	31-May-2018	12 mo
Amplifier - Pre-Amplifier	Miteq	AM-1551	AVK	31-May-2018	12 mo
Antenna - Biconilog	ETS Lindgren	3143B	AYF	10-May-2018	24 mo
Cable	Northwest EMC	RE 9kHz - 1GHz	TXB	22-Aug-2018	12 mo
Analyzer - Spectrum Analyzer	Agilent	N9010A	AFL	15-Mar-2018	12 mo

TEST DESCRIPTION

The highest gain antenna of each type to be used with the EUT was tested. The EUT was configured for the required transmit frequencies and the modes as showed in the data sheets.

For each configuration, the spectrum was scanned throughout the specified range as part of the exploratory investigation of the emissions. These "pre-scans" are not included in the report. Final measurements on individual emissions were then made and included in this test report.

The individual emissions from the EUT were maximized by rotating the EUT on a turntable, adjusting the position of the EUT and EUT antenna in three orthogonal axis if required, and adjusting the measurement antenna height and polarization (per RSS Gen). A preamp and high pass filter (and notch filter) were used for this test in order to provide sufficient measurement sensitivity.

Measurements were made with the required detectors and annotated on the data for each individual point using the following annotation:

QP = Quasi-Peak Detector

PK = Peak Detector

AV = RMS Detector

Measurements were made to satisfy the specific requirements of the test specification for out of band emissions as well as the restricted band requirements.

If there are no detectable emissions above the noise floor, the data included may show noise floor measurements for reference only.

Measurements at the edges of the allowable band may be presented in an alternative method as provided for in the ANSI C63.10 Marker-Delta method. This method involves performing an in-band fundamental measurement followed by a screen capture of the fundamental and out-of-band emission using reduced measurement instrumentation bandwidths. The amplitude delta measured on this screen capture is applied to the fundamental emission value to show the out-of-band emission level as applied to the limit.

Where the radio test software does not provide for a duty cycle at continuous transmit conditions (> 98%) and the RMS (power average) measurements were made across the on and off times of the EUT transmissions, a duty cycle correction is added to the measurements using the formula of 10*LOG(DC).

SPURIOUS RADIATED EMISSIONS



										EmiR5 2018.09.26		PSA-ESCI 2018.07.27	7		
W	Vork Order:			-	Date:	11-Oct		0	-	2	. ,	4			
	Project: Job Site:				perature: Humidity:	22.9 44.2%		2	foratt	ran n	refer				
Seri	al Number:				tric Pres.:	1024		•	Tested by:	Jonathan k	Ciefer		_		
		VISTA Wi-F	i										- -		
	figuration:	1 WatchGuar	d Video										_		
		Navaid Kari											_		
E	UT Power:												- -		
Opera	ting Mode:	Continuous	ly Transmitt	ting at Sing	le Channel	2437 MHz							_		
ı	Deviations:												_		
(Comments:	10*LOG(1/E worse case	JT uses integral chip antenna with 2.2 dBi gain. EUT Duty Cycle < 98%, therefore upwardly corrected to 100% using *LOG(1/DC). Worst-case upward correction factor: 10*LOG(1/0.371) = 4.31 dB. Then downwardly corrected based on orse case duty cycle in normal use (1.7%), using 20*LOG(DC). Applied overall worst-case DCCF of -31.1 dB to average elector measurements.												
	cifications						Test Meth						_		
FCC 15.2	47:2018					4	ANSI C63.	10:2013							
Run #	# 5	Test Dis	tance (m)	3	Antenna	Height(s)		1 to 4(m)		Results	Р	ass	-		
													_		
80 -															
70 -															
60 -															
50 -															
40 -									•						
30 +															
20 -															
10 -								•		•					
0 +	<u> </u>		100			1000			10000			100000			
10	-		100			MHz			.5000	■ PK	◆ AV	• QP			
Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Duty Cycle Correction Factor (dB)	External Attenuation (dB)	Polarity/ Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments		
7500.522 7310.317 8191.792 7310.420 7312.742 7308.600 7310.325 7310.310 7623.340 7312.583 7309.605 7311.995 17987.620 7312.267 7311.185 7311.758	42.6 42.3 41.3 42.2 42.1 41.9 41.9 41.5 41.7 41.6 38.2 41.4 41.3	14.9 14.8 15.7 14.7 14.8 14.8 14.7 15.0 14.8 14.7 14.7 14.7 14.7 14.8 14.7	1.2 1.0 1.2 1.0 1.0 1.0 1.0 3.3 1.0 1.0 2.2 1.0 1.0	146.0 69.0 139.0 69.9 57.9 224.0 285.9 63.9 55.0 328.9 273.9 134.0 140.0 298.9 90.0 291.0 316.9	0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0	0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0	Horz Horz Vert Horz Horz Horz Horz Vert Vert Horz Horz Horz Horz Vert Horz Vert Horz Vert Horz Vert Horz Horz Horz Horz Horz Horz	PK P	0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0 0.0	57.5 57.1 57.0 56.9 56.9 56.7 56.6 56.5 56.5 56.3 56.3 56.3 56.2 56.1 56.1	74.0 74.0 74.0 74.0 74.0 74.0 74.0 74.0	-16.5 -16.9 -17.0 -17.1 -17.1 -17.3 -17.3 -17.4 -17.5 -17.5 -17.7 -17.7 -17.7 -17.7 -17.8 -17.9 -18.0	EUT Horizontal, 6 Mbps EUT Horizontal, 9 Mbps EUT Horizontal, 6 Mbps EUT On Side, 6 Mbps EUT Horizontal, 12 Mbps EUT Horizontal, 12 Mbps EUT Horizontal, 24 Mbps EUT Horizontal, 54 Mbps EUT Horizontal, 6 Mbps EUT Horizontal, 18 Mbps EUT Horizontal, 18 Mbps EUT Vertical, 6 Mbps EUT Horizontal, 48 Mbps EUT Horizontal, 48 Mbps EUT Vertical, 6 Mbps		

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Duty Cycle Correction Factor (dB)	External Attenuation (dB)	Polarity/ Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
17968.630	37.4	18.1	1.2	255.9	0.0	0.0	Vert	PK	0.0	55.5	74.0	-18.5	EUT Horizontal, 6 Mbps
4876.150	42.2	7.1	1.0	213.0	0.0	0.0	Vert	PK	0.0	49.3	74.0	-24.7	EUT Horizontal, 6 Mbps
4873.008	42.1	7.1	1.0	176.0	0.0	0.0	Horz	PK	0.0	49.2	74.0	-24.8	EUT Horizontal, 6 Mbps
12389.940	42.3	0.1	1.2	20.0	0.0	0.0	Vert	PK	0.0	42.4	74.0	-31.6	EUT Horizontal, 6 Mbps
12185.150	42.9	-0.6	1.0	336.0	0.0	0.0	Horz	PK	0.0	42.3	74.0	-31.7	EUT Horizontal, 6 Mbps
12186.660	42.6	-0.6	1.0	288.0	0.0	0.0	Vert	PK	0.0	42.0	74.0	-32.0	EUT Horizontal, 6 Mbps
12082.210	42.9	-1.0	1.2	82.9	0.0	0.0	Horz	PK	0.0	41.9	74.0	-32.1	EUT Horizontal, 6 Mbps
9345.212	43.8	-2.2	1.2	279.9	0.0	0.0	Vert	PK	0.0	41.6	74.0	-32.4	EUT Horizontal, 6 Mbps
8191.367	30.0	15.7	1.2	139.0	-31.1	0.0	Vert	AV	0.0	14.6	54.0	-39.4	EUT Horizontal, 6 Mbps
7499.005	30.3	14.9	1.2	146.0	-31.1	0.0	Horz	AV	0.0	14.1	54.0	-39.9	EUT Horizontal, 6 Mbps
7313.250	30.4	14.8	1.0	69.0	-31.1	0.0	Horz	AV	0.0	14.1	54.0	-39.9	EUT Horizontal, 9 Mbps
7623.407	29.9	15.0	3.3	55.0	-31.1	0.0	Vert	AV	0.0	13.8	54.0	-40.2	EUT Horizontal, 6 Mbps
7313.350	30.1	14.8	1.0	57.9	-31.1	0.0	Horz	AV	0.0	13.8	54.0	-40.2	EUT Horizontal, 12 Mbps
7313.075	30.1	14.8	1.0	298.9	-31.1	0.0	Horz	AV	0.0	13.8	54.0	-40.2	EUT Horizontal, 18 Mbps
7311.875	30.1	14.7	1.0	273.9	-31.1	0.0	Horz	AV	0.0	13.7	54.0	-40.3	EUT Horizontal, 6 Mbps
7312.120	30.1	14.7	1.0	134.0	-31.1	0.0	Vert	AV	0.0	13.7	54.0	-40.3	EUT Horizontal, 6 Mbps
7309.655	30.1	14.7	1.0	90.0	-31.1	0.0	Horz	AV	0.0	13.7	54.0	-40.3	EUT Vertical, 6 Mbps
7311.317	30.0	14.8	1.6	224.0	-31.1	0.0	Horz	AV	0.0	13.7	54.0	-40.3	EUT Horizontal, 24 Mbps
7313.317	30.0	14.8	1.0	328.9	-31.1	0.0	Horz	AV	0.0	13.7	54.0	-40.3	EUT Horizontal, 36 Mbps
7310.965	30.0	14.7	1.0	316.9	-31.1	0.0	Vert	AV	0.0	13.6	54.0	-40.4	EUT Vertical, 6 Mbps
7312.700	29.9	14.8	1.0	291.0	-31.1	0.0	Horz	AV	0.0	13.6	54.0	-40.4	EUT Horizontal, 48 Mbps
7312.608	29.9	14.8	1.0	285.9	-31.1	0.0	Horz	AV	0.0	13.6	54.0	-40.4	EUT Horizontal, 54 Mbps
7311.080	29.9	14.7	1.0	69.9	-31.1	0.0	Horz	AV	0.0	13.5	54.0	-40.5	EUT On Side, 6 Mbps
7312.095	29.9	14.7	1.0	63.9	-31.1	0.0	Vert	AV	0.0	13.5	54.0	-40.5	EUT On Side, 6 Mbps
17992.000	25.8	18.1	2.2	140.0	-31.1	0.0	Horz	AV	0.0	12.8	54.0	-41.2	EUT Horizontal, 6 Mbps
17973.300	25.7	18.1	1.2	255.9	-31.1	0.0	Vert	AV	0.0	12.7	54.0	-41.3	EUT Horizontal, 6 Mbps
4874.075	30.2	7.1	1.0	213.0	-31.1	0.0	Vert	AV	0.0	6.2	54.0	-47.8	EUT Horizontal, 6 Mbps
4873.983	30.1	7.1	1.0	176.0	-31.1	0.0	Horz	AV	0.0	6.1	54.0	-47.9	EUT Horizontal, 6 Mbps
12186.880	31.3	-0.6	1.0	336.0	-31.1	0.0	Horz	AV	0.0	-0.4	54.0	-54.4	EUT Horizontal, 6 Mbps
12182.530	31.3	-0.6	1.0	288.0	-31.1	0.0	Vert	AV	0.0	-0.4	54.0	-54.4	EUT Horizontal, 6 Mbps
12390.540	30.6	0.1	1.2	20.0	-31.1	0.0	Vert	AV	0.0	-0.4	54.0	-54.4	EUT Horizontal, 6 Mbps
12083.860	30.9	-1.0	1.2	82.9	-31.1	0.0	Horz	AV	0.0	-1.2	54.0	-55.2	EUT Horizontal, 6 Mbps
9344.803	32.0	-2.2	1.2	279.9	-31.1	0.0	Vert	AV	0.0	-1.3	54.0	-55.3	EUT Horizontal, 6 Mbps

SPURIOUS RADIATED EMISSIONS



										EmiDE gove on co		Dev Ecologic	7		
Wo	ork Order:	WT۱	/D0001		Date:	11-00	t-2018			EmiR5 2018.09.26		PSA-ESCI 2018.07.2	ĺ		
	Project:	N	lone	Ter	nperature:	22.	9 °C	(Jonat	hank	iefer				
	Job Site:		X02		Humidity:		% RH				U				
Seria	I Number:		1-039084	Barome	etric Pres.:	1024	mbar		Tested by:	Jonathan k	Ciefer		_		
Conf	EUT:		IFI										_		
	Customer:		ard Video										_		
	Attendees:												_		
El	UT Power:												- -		
Operat	ing Mode:	Continuo	usly Transmit	ting at Sin	gle Channel	2437 MHz	:								
	J	Nama											_		
D	eviations:	None													
C	omments:	corrected downward	ansmit Band Edge. EUT uses integral chip antenna with 2.2 dBi gain. EUT Duty Cycle < 98%, therefore upwardly crected to 100% using 10*LOG(1/DC). Worst-case upward correction factor: 10*LOG(1/0.371) = 4.31 dB. Then wnwardly corrected based on worse case duty cycle in normal use (1.7%), using 20*LOG(DC). Applied overall worst-se DCCF of -31.1 dB to average detector measurements.												
est Spec	ifications						Test Met	thod					-		
CC 15.24							ANSI C6	3.10:2013					_		
Run #	18	Test D	istance (m)	3	Antenna	Height(s)		1 to 4(m)		Results	P	ass	_		
Ituli #	10	1030 D	istance (iii)	- 0	Antonia	ricigiit(3)		1 10 4(111)		results		433	_		
80 +															
-															
70															
60															
60 T															
-															
50 +															
40															
00															
30															
20					• •										
					• •										
10															
0															
1000	0											10000			
						MHz									
										■ PK	◆ AV	• QP	_		
					Duty Cycle	External	Polarity/		Dioto			Compared to			
Freq	Amplitude	Factor	Antenna Height	Azimuth	Correction Factor	External Attenuation	Transducer Type	Detector	Distance Adjustment	Adjusted	Spec. Limit	Spec.			
(MHz)	(dBuV)	(dB)	(meters)	(degrees)	(dB)	(dB)			(dB)	(dBuV/m)	(dBuV/m)	(dB)	Comments		
2484.923	45.7	-3.5	1.2	118.9	0.0	20.0	Horz	PK	0.0	62.2	74.0	-11.8	EUT Vertical, 6 Mbps		
2484.647	45.4	-3.5	3.4	118.9	0.0	20.0	Vert	PK	0.0	61.9	74.0	-12.1	EUT Horizontal, 6 Mbps		
2484.383 2485.043	45.3 44.8	-3.5 -3.5	1.2 3.6	219.0 153.0	0.0 0.0	20.0 20.0	Horz Horz	PK PK	0.0 0.0	61.8 61.3	74.0 74.0	-12.2 -12.7	EUT Horizontal, 54 Mbp EUT On Side, 6 Mbps		
2484.203	44.8	-3.5	1.2	37.0	0.0	20.0	Horz	PK	0.0	61.3	74.0	-12.7	EUT Horizontal, 36 Mbp		
2485.317	44.6	-3.5	1.2	63.0	0.0	20.0	Horz	PK	0.0	61.1	74.0	-12.9	EUT Horizontal, 6 Mbps		
2389.300 2483.757	45.0 44.6	-3.9 -3.5	1.2 1.2	283.0 319.0	0.0 0.0	20.0 20.0	Horz Horz	PK PK	0.0 0.0	61.1 61.1	74.0 74.0	-12.9 -12.9	EUT Horizontal, 6 Mbp EUT Horizontal, 48 Mb		
2483.677	44.5	-3.5 -3.5	1.2	40.9	0.0	20.0	Vert	PK	0.0	61.0	74.0	-12.9	EUT Vertical, 6 Mbps		
2484.227	44.4	-3.5	1.2	55.0	0.0	20.0	Vert	PK	0.0	60.9	74.0	-13.1	EUT On Side, 6 Mbps		
2484.937 2484.393	44.4 44.3	-3.5 -3.5	1.2 1.2	272.0 43.0	0.0 0.0	20.0 20.0	Horz Horz	PK PK	0.0 0.0	60.9 60.8	74.0 74.0	-13.1 -13.2	EUT Horizontal, 18 Mb EUT Horizontal, 9 Mbp		
2484.363	44.3	-3.5 -3.5	1.2	97.0	0.0	20.0	Horz	PK	0.0	60.8	74.0	-13.2	EUT Horizontal, 12 Mbp		
2485.447	44.3	-3.5	1.2	13.0	0.0	20.0	Horz	PK	0.0	60.8	74.0	-13.2	EUT Horizontal, 24 Mbr		
2388.223	44.6	-3.9	1.2	343.0	0.0	20.0	Vert	PK	0.0	60.7	74.0	-13.3	EUT Vertical, 6 Mbps		

-3.9

-3.5 -3.5

1.2

1.2 1.2

343.0

63.0 40.9

0.0

-31.1 -31.1

20.0

20.0 20.0

PK PK AV AV

Vert

Horz Vert

0.0

0.0

60.7

18.7 18.5

74.0

54.0 54.0

-13.3

-35.3 -35.5

2388.223

2484.770 2484.367

44.6

33.3 33.1

EUT Horizontal, 24 Mbps EUT Vertical, 6 Mbps EUT Horizontal, 6 Mbps EUT Vertical, 6 Mbps

Freq (MHz)	Amplitude (dBuV)	Factor (dB)	Antenna Height (meters)	Azimuth (degrees)	Duty Cycle Correction Factor (dB)	External Attenuation (dB)	Polarity/ Transducer Type	Detector	Distance Adjustment (dB)	Adjusted (dBuV/m)	Spec. Limit (dBuV/m)	Compared to Spec. (dB)	Comments
2485.017	33.1	-3.5	1.2	43.0	-31.1	20.0	Horz	AV	0.0	18.5	54.0	-35.5	EUT Horizontal, 9 Mbps
2484.773	33.1	-3.5	1.2	272.0	-31.1	20.0	Horz	AV	0.0	18.5	54.0	-35.5	EUT Horizontal, 18 Mbps
2485.280	33.1	-3.5	1.2	319.0	-31.1	20.0	Horz	AV	0.0	18.5	54.0	-35.5	EUT Horizontal, 48 Mbps
2484.370	33.0	-3.5	3.4	118.9	-31.1	20.0	Vert	AV	0.0	18.4	54.0	-35.6	EUT Horizontal, 6 Mbps
2485.010	33.0	-3.5	1.2	118.9	-31.1	20.0	Horz	AV	0.0	18.4	54.0	-35.6	EUT Vertical, 6 Mbps
2484.540	33.0	-3.5	3.6	153.0	-31.1	20.0	Horz	AV	0.0	18.4	54.0	-35.6	EUT On Side, 6 Mbps
2483.847	33.0	-3.5	1.2	97.0	-31.1	20.0	Horz	AV	0.0	18.4	54.0	-35.6	EUT Horizontal, 12 Mbps
2483.697	33.0	-3.5	1.2	13.0	-31.1	20.0	Horz	AV	0.0	18.4	54.0	-35.6	EUT Horizontal, 24 Mbps
2484.270	33.0	-3.5	1.2	37.0	-31.1	20.0	Horz	AV	0.0	18.4	54.0	-35.6	EUT Horizontal, 36 Mbps
2485.130	33.0	-3.5	1.2	219.0	-31.1	20.0	Horz	AV	0.0	18.4	54.0	-35.6	EUT Horizontal, 54 Mbps
2485.217	32.9	-3.5	1.2	55.0	-31.1	20.0	Vert	AV	0.0	18.3	54.0	-35.7	EUT On Side, 6 Mbps
2388.700	33.1	-3.9	1.2	283.0	-31.1	20.0	Horz	AV	0.0	18.1	54.0	-35.9	EUT Horizontal, 6 Mbps
2389.683	33.1	-3.9	1.2	343.0	-31.1	20.0	Vert	AV	0.0	18.1	54.0	-35.9	EUT Vertical, 6 Mbps



XMit 2017.12.13

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Attenuator	Fairview Microwave	SA4018-20	TYE	10-Oct-18	10-Oct-19
Block - DC	Fairview Microwave	SD3379	AMT	10-Oct-18	10-Oct-19
Cable	Micro-Coax	UFD150A-1-0720-200200	TXG	10-Oct-18	10-Oct-19
Generator - Signal	Agilent	N5173B	TIW	5-Jul-17	5-Jul-20
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFM	19-Mar-18	19-Mar-19

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The Duty Cycle (x) of the single channel operation of the radio as controlled by the provided test software was measured for each of the EUT operating modes.

There is no compliance requirement to be met by this test, so therefore no Pass / Fail criteria.

The measurements were made using a zero span on the spectrum analyzer to see the pulses in the time domain. The transmit power was set to its default maximum.

The duty cycle was calculated by dividing the transmission pulse duration (T) by the total period of a single on and total off time.

If the transmit duty cycle < 98 percent, burst gating may have been used during some of the other tests in this report to only take the measurement during the burst duration.



N/A

EUT: VISTA WiFi
Serial Number: WFC1-009113
Customer: WatchGuard Video
Attendees: Navaid Karimi Work Order: WTVD0001
Date: 12-Oct-18
Temperature: 22.2 °C Humidity: 50.2% RH Barometric Pres.: 1017 mbar Project: None
Tested by: Jonathan Kiefer
TEST SPECIFICATIONS Power: Battery
Test Method Job Site: TX09 FCC 15.247:2018 COMMENTS Reference Offset 21.23 dB (20dB attenuator+dc block+cable). DEVIATIONS FROM TEST STANDARD Jonathan Kiefer Configuration # 2 Signature Number of Pulses Limit (%) Value (%) Pulse Width Results Period 2400 MHz - 2483.5 MHz Band 802.11(g) 6 Mbps Single Channel 6, 2437 MHz 1.399 ms 1.695 ms 82.5 N/A N/A Single Channel 6, 2437 MHz N/A N/A N/A 802.11(g) 9 Mbps Single Channel 6, 2437 MHz Single Channel 6, 2437 MHz 75.2 N/A N/A N/A 936.412 us 1.245 ms N/A N/A N/A N/A 802.11(g) 12 Mbps Single Channel 6, 2437 MHz 706.121 us 1.004 ms N/A N/A 70.4 Single Channel 6, 2437 MHz 802.11(g) 18 Mbps N/A N/A N/A N/A N/A Single Channel 6, 2437 MHz Single Channel 6, 2437 MHz 479.1 us N/A 775.3 us N/A 61.8 N/A N/A N/A N/A N/A 802.11(g) 24 Mbps Single Channel 6, 2437 MHz 367.2 us 663.2 us 55.4 N/A N/A Single Channel 6, 2437 MHz 802.11(g) 36 Mbps N/A N/A N/A N/A N/A Single Channel 6, 2437 MHz Single Channel 6, 2437 MHz 250.9 us N/A 547.2 us N/A 45.9 N/A N/A N/A N/A N/A 802.11(g) 48 Mbps Single Channel 6, 2437 MHz N/A 194.7 us N/A 491.1 us 39.6 Single Channel 6, 2437 MHz 802.11(g) 54 Mbps N/A N/A N/A N/A N/A Single Channel 6, 2437 MHz Single Channel 6, 2437 MHz N/A N/A 174.8 us 471.1 us 37.1 N/A

N/A

N/A




2400 MHz - 2483.5 MHz Band, 802.11(g) 6 Mbps, Single Channel 6, 2437 MHz


Number of Value Limit

Pulse Width Period Pulses (%) (%) Results

1.399 ms 1.695 ms 1 82.5 N/A N/A

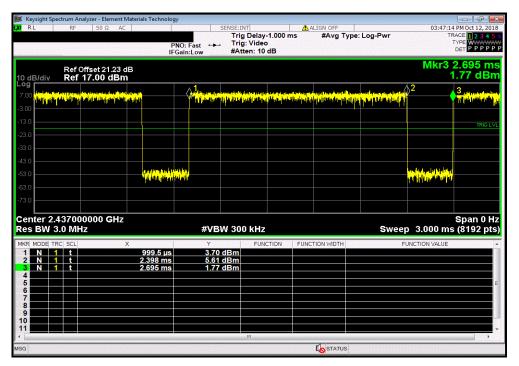

	2400 MHz - 24	483.5 MHz Band,	802.11(g) 6 Mbp	s, Single Channe	l 6, 2437 MHz	
			Number of	Value	Limit	
	Pulse Width	Period	Pulses	(%)	(%)	Results
	N/A	N/A	5	N/A	N/A	N/A

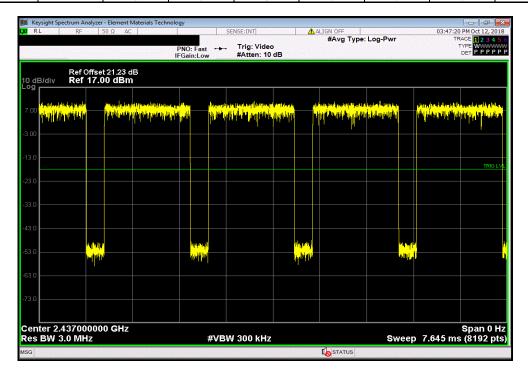




2400 MHz - 2483.5 MHz Band, 802.11(g) 9 Mbps, Single Channel 6, 2437 MHz


Number of Value Limit

Pulse Width Period Pulses (%) (%) Results

936.412 us 1.245 ms 1 75.2 N/A N/A

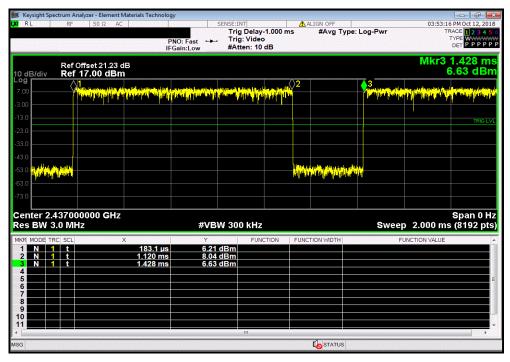

	2400 MHz - 24	483.5 MHz Band,	802.11(g) 9 Mbp	s, Single Channe	l 6, 2437 MHz	
			Number of	Value	Limit	
_	Pulse Width	Period	Pulses	(%)	(%)	Results
	N/A	N/A	6	N/A	N/A	N/A

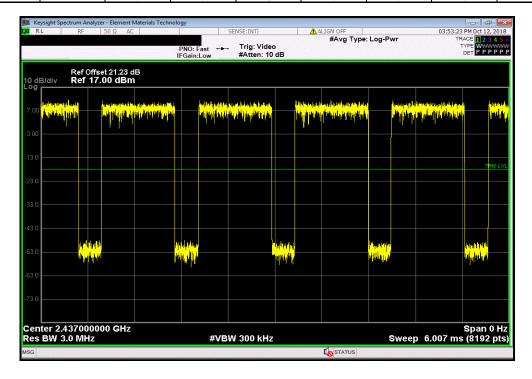




2400 MHz - 2483.5 MHz Band, 802.11(g) 12 Mbps, Single Channel 6, 2437 MHz


Number of Value Limit

Pulse Width Period Pulses (%) (%) Results

706.121 us 1.004 ms 1 70.4 N/A N/A

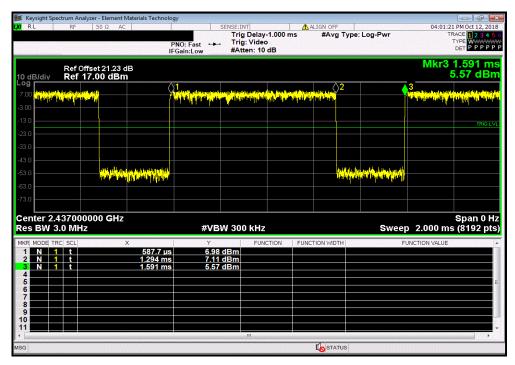

	2400 MHz - 24	83.5 MHz Band,	802.11(g) 12 Mb _l	os, Single Channe	el 6, 2437 MHz	
			Number of	Value	Limit	
	Pulse Width	Period	Pulses	(%)	(%)	Results
	N/A	N/A	5	N/A	N/A	N/A

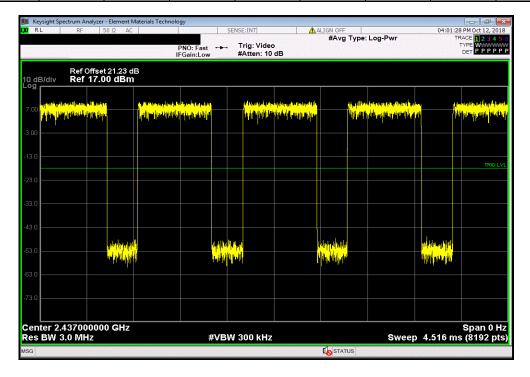




2400 MHz - 2483.5 MHz Band, 802.11(g) 18 Mbps, Single Channel 6, 2437 MHz


Number of Value Limit

Pulse Width Period Pulses (%) (%) Results

479.1 us 775.3 us 1 61.8 N/A N/A

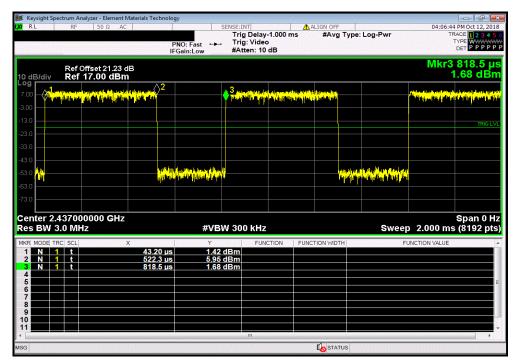

2400 MHz - 2483.5 MHz Band, 802.11(g) 18 Mbps, Single Channel 6, 2437 MHz											
Number of Value Limit											
	Pulse Width	Period	Pulses	(%)	(%)	Results					
N/A N/A 5 N/A N/A N/A											

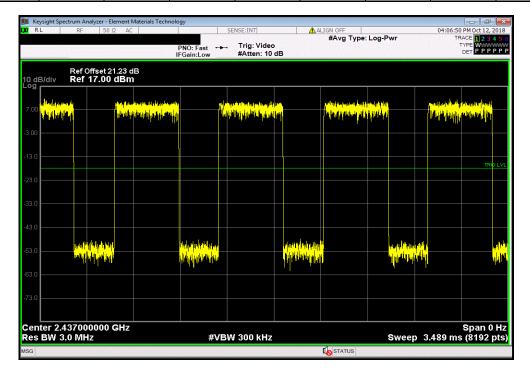




2400 MHz - 2483.5 MHz Band, 802.11(g) 24 Mbps, Single Channel 6, 2437 MHz


Number of Value Limit

Pulse Width Period Pulses (%) (%) Results

367.2 us 663.2 us 1 55.4 N/A N/A

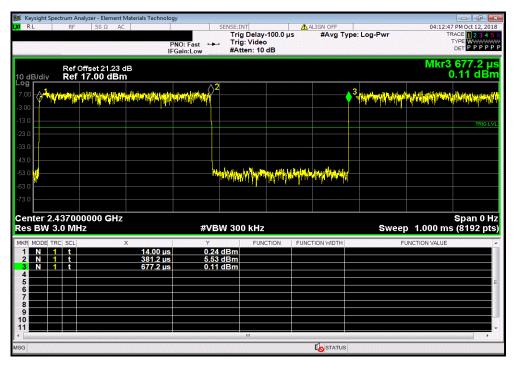

2400 MHz - 2483.5 MHz Band, 802.11(g) 24 Mbps, Single Channel 6, 2437 MHz						
			Number of	Value	Limit	
	Pulse Width	Period	Pulses	(%)	(%)	Results
	N/A	N/A	5	N/A	N/A	N/A

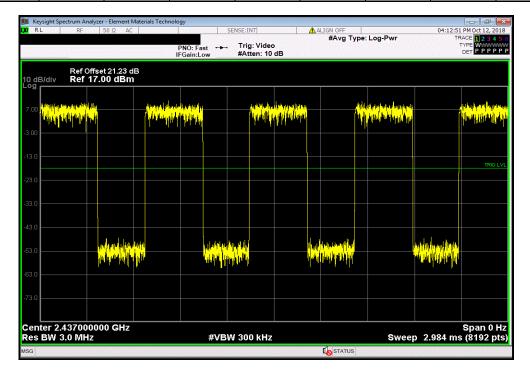




2400 MHz - 2483.5 MHz Band, 802.11(g) 36 Mbps, Single Channel 6, 2437 MHz


Number of Value Limit

Pulse Width Period Pulses (%) (%) Results

250.9 us 547.2 us 1 45.9 N/A N/A

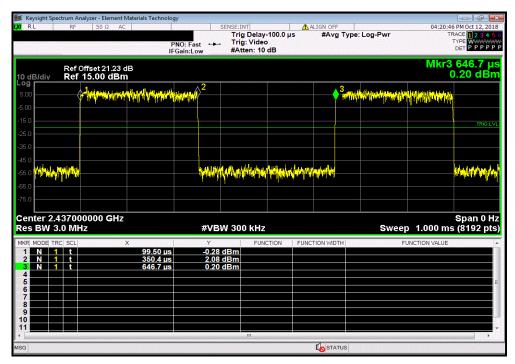

	2400 MHz - 24	83.5 MHz Band,	802.11(g) 36 Mbp	os, Single Channe	el 6, 2437 MHz		
			Number of	Value	Limit		
	Pulse Width	Period	Pulses	(%)	(%)	Results	
	N/A	N/A	5	N/A	N/A	N/A	

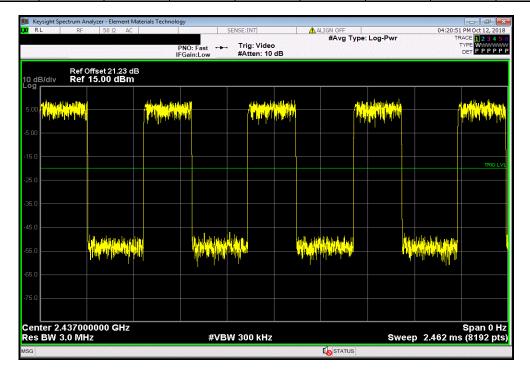




2400 MHz - 2483.5 MHz Band, 802.11(g) 48 Mbps, Single Channel 6, 2437 MHz


Number of Value Limit

Pulse Width Period Pulses (%) (%) Results

194.7 us 491.1 us 1 39.6 N/A N/A

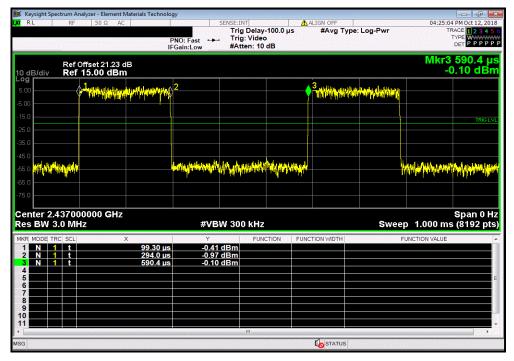

2400 MHz - 2483.5 MHz Band, 802.11(g) 48 Mbps, Single Channel 6, 2437 MHz						
			Number of	Value	Limit	
	Pulse Width	Period	Pulses	(%)	(%)	Results
	N/A	N/A	5	N/A	N/A	N/A

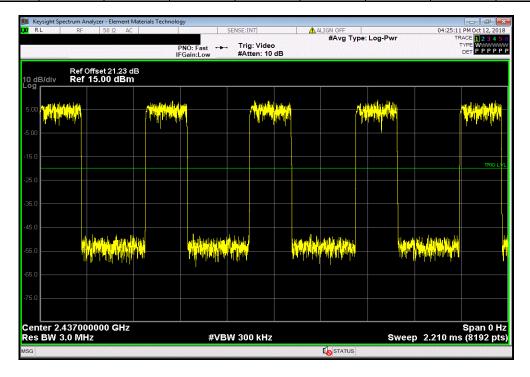




2400 MHz - 2483.5 MHz Band, 802.11(g) 54 Mbps, Single Channel 6, 2437 MHz


Number of Value Limit

Pulse Width Period Pulses (%) (%) Results

174.8 us 471.1 us 1 37.1 N/A N/A

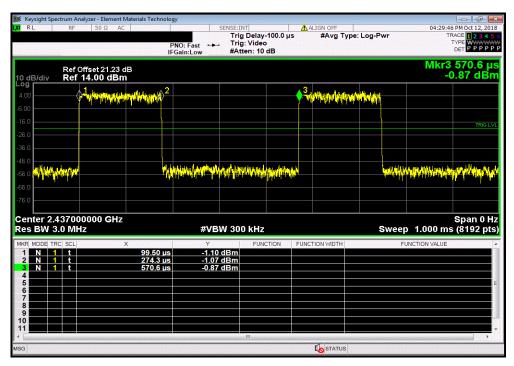

2400 MHz - 2483.5 MHz Band, 802.11(g) 54 Mbps, Single Channel 6, 2437 MHz						
			Number of	Value	Limit	
	Pulse Width	Period	Pulses	(%)	(%)	Results
	N/A	N/A	5	N/A	N/A	N/A

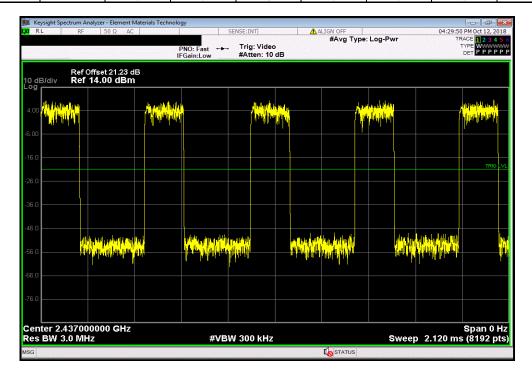



XMit 2017.12.13

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Attenuator	Fairview Microwave	SA4018-20	TYE	10-Oct-18	10-Oct-19
Block - DC	Fairview Microwave	SD3379	AMT	10-Oct-18	10-Oct-19
Cable	Micro-Coax	UFD150A-1-0720-200200	TXG	10-Oct-18	10-Oct-19
Generator - Signal	Agilent	N5173B	TIW	5-Jul-17	5-Jul-20
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFM	19-Mar-18	19-Mar-19

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The EUT was set to the channel and modes listed in the datasheet.

The 6dB occupied bandwidth was measured using 100 kHz resolution bandwidth and 300 kHz video bandwidth. The 99.0% occupied bandwidth was also measured at the same time which can be needed during Output Power depending on the applicable method.



EUT: IVISTA WIFI
Serial Number: WFC1-009113
Customer: WatchGuard Video
Attendees: Navaid Karimi
Project: None
Tested by: Jonathan Kiefer
TEST SPECIFICATIONS HuSingleity: 50.2% RH
Barometric Pres.: 1017 mbar Power: Battery
Test Method Job Site: TX09 FCC 15.247:2018 COMMENTS Reference Offset 21.23 dB (20dB attenuator+dc block+cable). DEVIATIONS FROM TEST STANDARD Jonathan Kiefer Configuration # 2 Signature Value Result (>) 802.11(g) 6 Mbps Single Channel 6, 2437 MHz 802.11(g) 9 Mbps Single Channel 6, 2437 MHz 15.097 MHz 500 kHz Pass 15.107 MHz 500 kHz Pass 802.11(g) 12 Mbps Single Channel 6, 2437 MHz 15.112 MHz Pass 500 kHz 802.11(g) 18 Mbps Single Channel 6, 2437 MHz 15.11 MHz 500 kHz Pass 802.11(g) 24 Mbps Single Channel 6, 2437 MHz 15.107 MHz 500 kHz Pass Single Channel 6, 2437 MHz 802.11(g) 48 Mbps 15.108 MHz 500 kHz Pass Single Channel 6, 2437 MHz 802.11(g) 54 Mbps Single Channel 6, 2437 MHz 15.11 MHz 500 kHz Pass 15.109 MHz Pass





2400 MHz - 2483.5 MHz Band, 802.11(g) 6 Mbps, Single Channel 6, 2437 MHz


Limit

Value (>) Result

15.097 MHz 500 kHz Pass

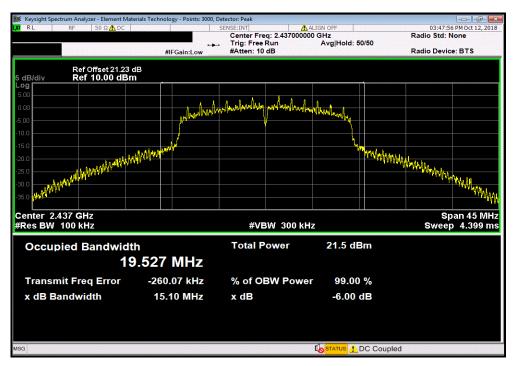



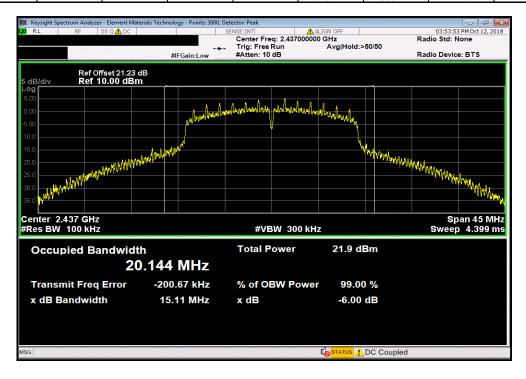



2400 MHz - 2483.5 MHz Band, 802.11(g) 12 Mbps, Single Channel 6, 2437 MHz

Limit

Value


(>)


Result


15.112 MHz

500 kHz

Pass

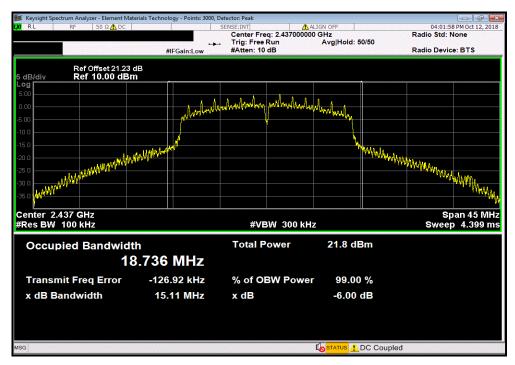



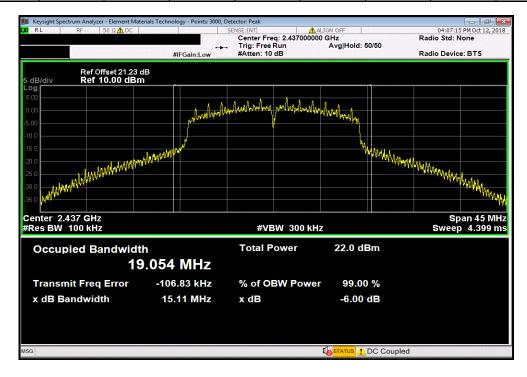




2400 MHz - 2483.5 MHz Band, 802.11(g) 24 Mbps, Single Channel 6, 2437 MHz


Limit


Value
(>)

Result

15.107 MHz
Pass

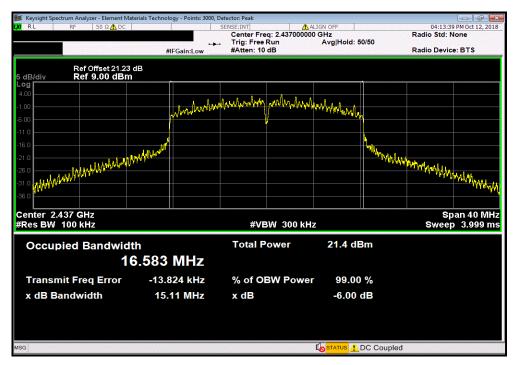



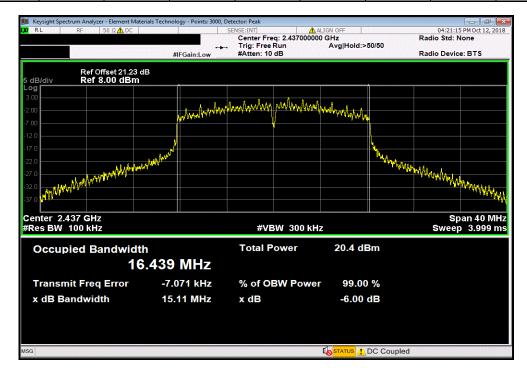





2400 MHz - 2483.5 MHz Band, 802.11(g) 48 Mbps, Single Channel 6, 2437 MHz


Limit

Value (>) Result

15.11 MHz 500 kHz Pass

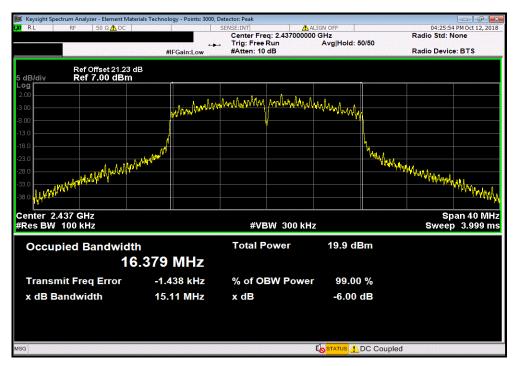



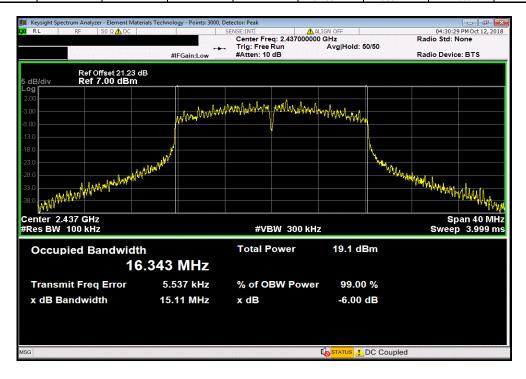

OUTPUT POWER



XMit 2017 12 13

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Block - DC	Fairview Microwave	SD3379	AMT	10-Oct-18	10-Oct-19
Attenuator	Fairview Microwave	SA4018-20	TYE	10-Oct-18	10-Oct-19
Cable	Micro-Coax	UFD150A-1-0720-200200	TXG	10-Oct-18	10-Oct-19
Generator - Signal	Agilent	N5173B	TIW	5-Jul-17	5-Jul-20
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFM	19-Mar-18	19-Mar-19

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The fundamental emission output power (maximum average conducted output power) was measured using the channels and modes as called out on the following data sheets. The transmit power was set to its default maximum.

Prior to measuring output power; the emission bandwidth (B) and the transmission pulse duration (T) were measured. Both are required to determine the method of measuring Maximum Conducted Output Power. The transmission pulse duration (T) was measured using a zero span on the spectrum analyzer to see the pulses in the time domain.

The method AVGSA-2 in section 11.9.2.2.4 of ANSI C63.10:2013 was used to make the measurement. This method uses trace averaging across ON and OFF times of the EUT transmissions in the spectrum analyzer channel power function using an RMS detector. Following the measurement a duty cycle correction was applied by adding [10 log (1 / D)], where D is the duty cycle, to the measured power to compute the average power during the actual transmission times.

OUTPUT POWER



EUT: IVISTA WIFI
Serial Number: WFC1-009113
Customer: WatchGuard Video
Attendees: Navaid Karimi
Project: None
Tested by: Jonathan Kiefer
TEST SPECIFICATIONS Work Order: WTVD0001

Date: 12-Oct-18

Temperature: 22.2 °C HuSingleity: 50.2% RH
Barometric Pres.: 1017 mbar Power: Battery
Test Method Job Site: TX09 FCC 15.247:2018 COMMENTS DEVIATIONS FROM TEST STANDARD Configuration # 2 Jonathan Kiefer Signature Duty Cycle Factor (dB) Avg Cond Pw (dBm) Out Pwi (dBm) Limit (dBm) Result 802.11(g) 6 Mbps Single Channel 6, 2437 MHz 802.11(g) 9 Mbps Single Channel 6, 2437 MHz 13.303 0.8 14.1 30 Pass 30 13.324 14.6 Pass Single Channel 6, 2437 MHz 802.11(g) 12 Mbps Single Channel 6, 2437 MHz 802.11(g) 18 Mbps Single Channel 6, 2437 MHz 12.941 14.5 Pass 1.5 30 12.549 30 2.1 14.6 Pass 802.11(g) 24 Mbps Single Channel 6, 2437 MHz 30 10.998 2.6 13.6 Pass Single Channel 6, 2437 MHz 802.11(g) 48 Mbps 9.347 30 Pass 3.4 12.7 Single Channel 6, 2437 MHz 802.11(g) 54 Mbps Single Channel 6, 2437 MHz 8.131 12.2 30 Pass 4.3 30 7.135 11.4 Pass

OUTPUT POWER




2400 MHz - 2483.5 MHz Band, 802.11(g) 6 Mbps, Single Channel 6, 2437 MHz


Avg Cond Pwr Duty Cycle Out Pwr Limit

(dBm) Factor (dB) (dBm) (dBm) Result

13.303 0.8 14.1 30 Pass

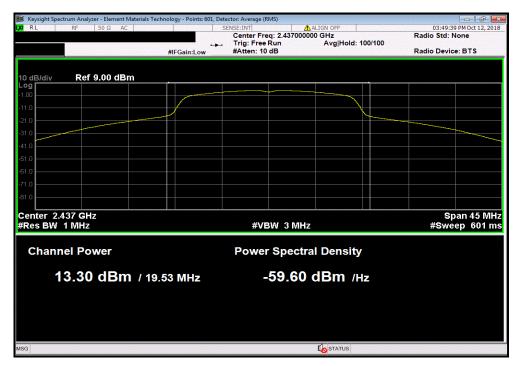

2400 MHz - 2483.5 MHz Band, 802.11(g) 9 Mbps, Single Channel 6, 2437 MHz								
		Avg Cond Pwr	Duty Cycle	Out Pwr	Limit			
		(dBm)	Factor (dB)	(dBm)	(dBm)	Result		
		13.324	1.2	14.6	30	Pass		

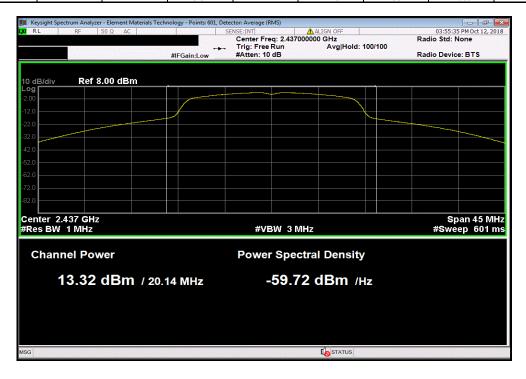


OUTPUT POWER




2400 MHz - 2483.5 MHz Band, 802.11(g) 12 Mbps, Single Channel 6, 2437 MHz

Avg Cond Pwr Duty Cycle Out Pwr Limit
(dBm) Factor (dB) (dBm) (dBm) Result

12.941 1.5 14.5 30 Pass

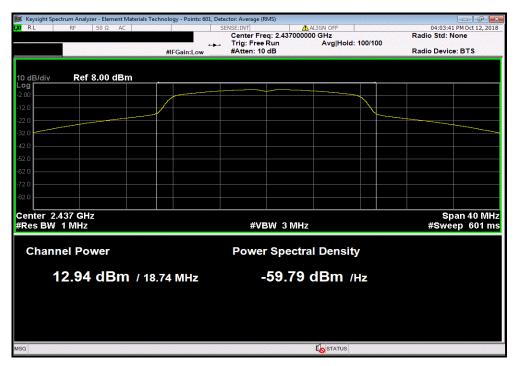

	2400 MHz - 24	83.5 MHz Band,	802.11(g) 18 Mb _l	os, Single Channe	el 6, 2437 MHz	
		Avg Cond Pwr	Duty Cycle	Out Pwr	Limit	
_		(dBm)	Factor (dB)	(dBm)	(dBm)	Result
ĺ		12.549	2.1	14.6	30	Pass

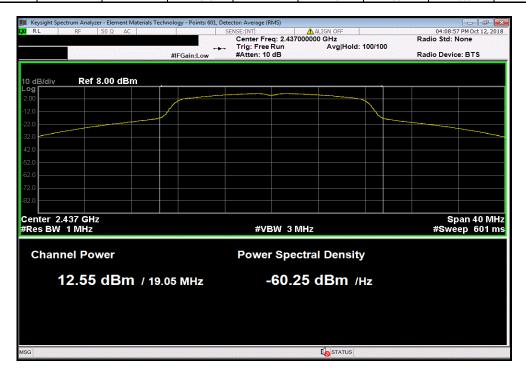

OUTPUT POWER




2400 MHz - 2483.5 MHz Band, 802.11(g) 24 Mbps, Single Channel 6, 2437 MHz


Avg Cond Pwr Duty Cycle Out Pwr Limit

(dBm) Factor (dB) (dBm) (dBm) Result

10.998 2.6 13.6 30 Pass

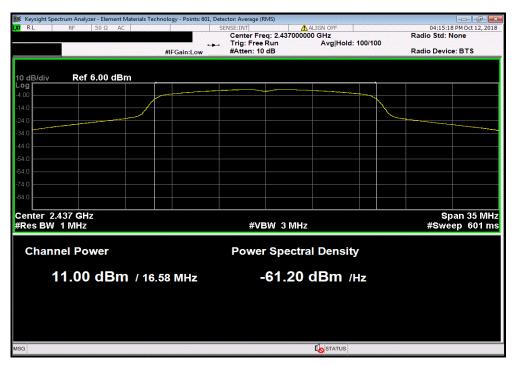

	2400 MHz - 24	83.5 MHz Band,	802.11(g) 36 Mbr	s, Single Channe	el 6, 2437 MHz	
		Avg Cond Pwr	Duty Cycle	Out Pwr	Limit	
		(dBm)	Factor (dB)	(dBm)	(dBm)	Result
1		9.347	3.4	12.7	30	Pass

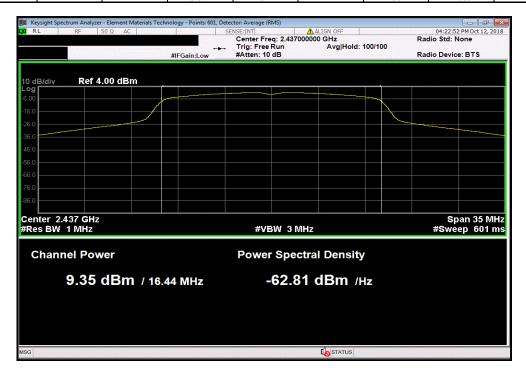

OUTPUT POWER




2400 MHz - 2483.5 MHz Band, 802.11(g) 48 Mbps, Single Channel 6, 2437 MHz


Avg Cond Pwr Duty Cycle Out Pwr Limit

(dBm) Factor (dB) (dBm) (dBm) Result

8.131 4 12.2 30 Pass

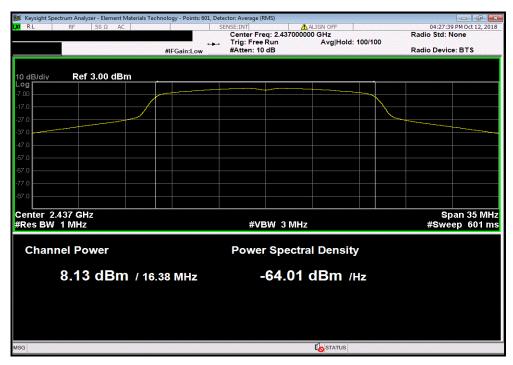

	2400 MHz - 24	83.5 MHz Band,	802.11(g) 54 Mbr	os, Single Channe	el 6, 2437 MHz	
		Avg Cond Pwr	Duty Cycle	Out Pwr	Limit	
		(dBm)	Factor (dB)	(dBm)	(dBm)	Result
		7.135	4.3	11.4	30	Pass

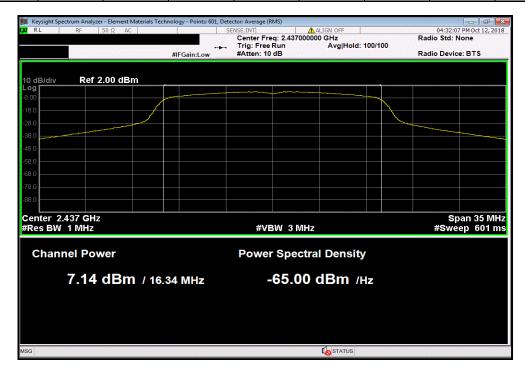



XMit 2017.12.13

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Cable	Micro-Coax	UFD150A-1-0720-200200	TXG	10-Oct-18	10-Oct-19
Block - DC	Fairview Microwave	SD3379	AMM	29-Mar-18	29-Mar-19
Attenuator	Fairview Microwave	SA4018-20	TYE	10-Oct-18	10-Oct-19
Generator - Signal	Agilent	N5173B	TIW	5-Jul-17	5-Jul-20
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFM	19-Mar-18	19-Mar-19

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The fundamental emission output power (maximum average conducted output power) was measured using the channels and modes as called out on the following data sheets. The transmit power was set to its default maximum.

Prior to measuring output power; the emission bandwidth (B) and the transmission pulse duration (T) were measured. Both are required to determine the method of measuring Maximum Conducted Output Power. The transmission pulse duration (T) was measured using a zero span on the spectrum analyzer to see the pulses in the time domain.

The method AVGSA-2 in section 11.9.2.2.4 of ANSI C63.10:2013 was used to make the measurement. This method uses trace averaging across ON and OFF times of the EUT transmissions in the spectrum analyzer channel power function using an RMS detector. Following the measurement a duty cycle correction was applied by adding [10 log (1 / D)], where D is the duty cycle, to the measured power to compute the average power during the actual transmission times.


The gain of the antenna was added to the output power measurement. This value must not exceed 4 Watts, which is the same as 36 dBm.




								TbtTx 2018.09.13	XMit 2017.12.
	: VISTA WiFi						Work Order:		
	: WFC1-009113							12-Oct-18	
	: WatchGuard Video						Temperature:		
	: Navaid Karimi						HuSingleity:		
Project	: None						Barometric Pres.:	1018 mbar	
	: Jonathan Kiefer		Power:	Battery			Job Site:	TX09	
TEST SPECIFICAT	TIONS			Test Method					
FCC 15.247:2018				ANSI C63.10:2013					
COMMENTS									
None									
DEVIATIONS FRO	M TEST STANDARD								
None									
Configuration #	2	Signature	Jonathan	Kiefer					
		<u> </u>	Avg Cond Pwr (dBm)	Duty Cycle Factor (dB)	Out Pwr (dBm)	Antenna Gain (dBi)	EIRP (dBm)	EIRP Limit (dBm)	Result
2400 MHz - 2483.5	MHz Band								
	802.11(g) 6 Mbps								
		nel 6, 2437 MHz	13.303	0.8	14.1	2.2	16.3	36	Pass
	802.11(g) 9 Mbps								
		nel 6, 2437 MHz	13.324	1.2	14.6	2.2	16.8	36	Pass
	802.11(g) 12 Mbps								
		nel 6, 2437 MHz	12.941	1.5	14.5	2.2	16.7	36	Pass
	802.11(g) 18 Mbps								
		nel 6, 2437 MHz	12.549	2.1	14.6	2.2	16.8	36	Pass
	802.11(g) 24 Mbps								
		nel 6, 2437 MHz	10.998	2.6	13.6	2.2	15.8	36	Pass
	802.11(g) 36 Mbps								
		nel 6, 2437 MHz	9.347	3.4	12.7	2.2	14.9	36	Pass
	802.11(g) 48 Mbps								
		nel 6, 2437 MHz	8.131	4	12.2	2.2	14.4	36	Pass
	802.11(g) 54 Mbps								
	Single Chann	nel 6, 2437 MHz	7.135	4.3	11.4	2.2	13.6	36	Pass



2400 MHz - 2483.5 MHz Band, 802.11(g) 6 Mbps, Single Channel 6, 2437 MHz EIRP Limit Avg Cond Pwr **Duty Cycle** Out Pwr Antenna EIRP (dBm) Factor (dB) (dBm) Gain (dBi) (dBm) (dBm) Result 13.303 0.8 14.1 16.3

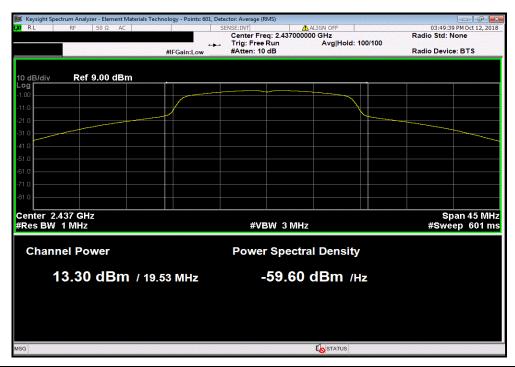


	2400	MHz - 2483.5 MHz E	Band, 802.11(g) 9 Mb	ps, Single Chan	nel 6, 2437 MHz	
Avg C	ond Pwr Duty	Cycle Out Pw	r Antenna	EIRP	EIRP Limit	
(d	Bm) Facto	r (dB) (dBm)	Gain (dBi)	(dBm)	(dBm)	Result
13	.324 1.	.2 14.6	2.2	16.8	36	Pass

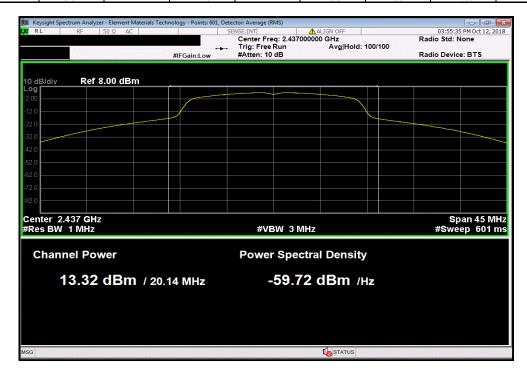




2400 MHz - 2483.5 MHz Band, 802.11(g) 12 Mbps, Single Channel 6, 2437 MHz EIRP Limit Avg Cond Pwr **Duty Cycle** Out Pwr Antenna EIRP (dBm) Factor (dB) (dBm) Gain (dBi) (dBm) (dBm) Result 12.941 14.5 16.7

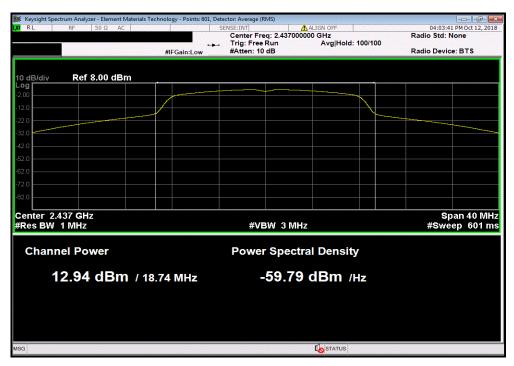


		2400 MHz - 24	83.5 MHz Band,	802.11(g) 18 Mb _l	os, Single Channe	el 6, 2437 MHz	
Av	vg Cond Pwr	Duty Cycle	Out Pwr	Antenna	EIRP	EIRP Limit	
	(dBm)	Factor (dB)	(dBm)	Gain (dBi)	(dBm)	(dBm)	Result
	12.549	2.1	14.6	2.2	16.8	36	Pass

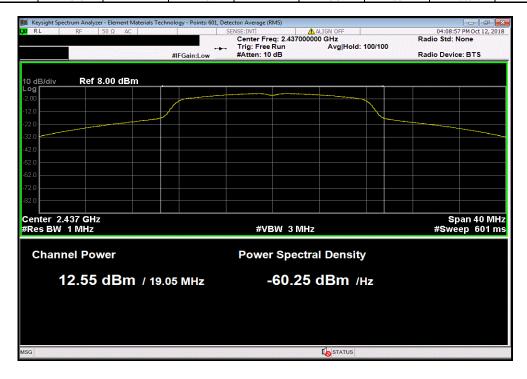




	2400 MHz - 24	83.5 MHz Band,	802.11(g) 24 Mbj	os, Single Channe	el 6, 2437 MHz		
Avg Cond Pwr	Duty Cycle	Out Pwr	Antenna	EIRP	EIRP Limit		
(dBm)	Factor (dB)	(dBm)	Gain (dBi)	(dBm)	(dBm)	Result	
10.998	2.6	13.6	2.2	15.8	36	Pass	

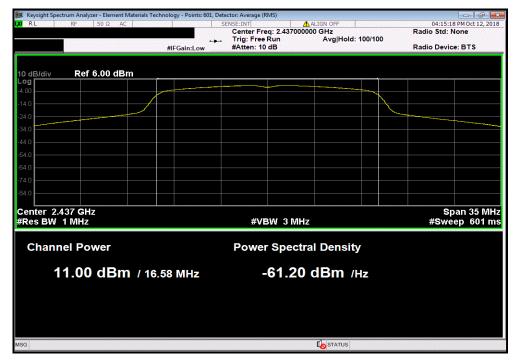


	2400 MHz - 24	83.5 MHz Band,	802.11(g) 36 Mbp	os, Single Channe	el 6, 2437 MHz	
Avg Cond Pwr	Duty Cycle	Out Pwr	Antenna	EIRP	EIRP Limit	
(dBm)	Factor (dB)	(dBm)	Gain (dBi)	(dBm)	(dBm)	Result
9.347	3.4	12.7	2.2	14.9	36	Pass

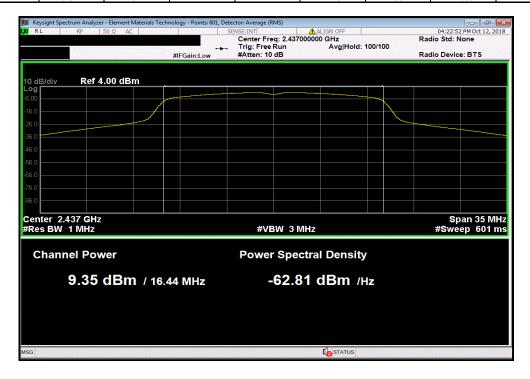




2400 MHz - 2483.5 MHz Band, 802.11(g) 48 Mbps, Single Channel 6, 2437 MHz EIRP Limit Avg Cond Pwr **Duty Cycle** Out Pwr Antenna EIRP (dBm) Factor (dB) (dBm) Gain (dBi) (dBm) (dBm) Result 8.131 12.2 14.4

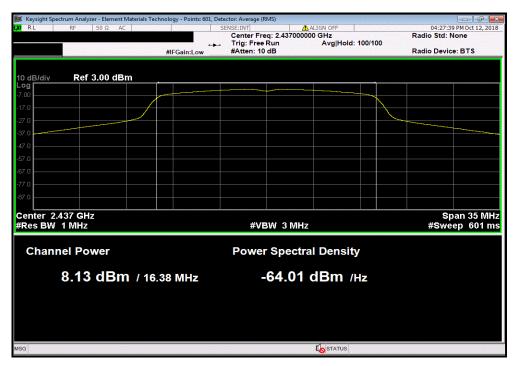

	2400 MHz - 24	83.5 MHz Band,	802.11(g) 54 Mb _l	os, Single Channe	el 6, 2437 MHz	
Avg Cond Pwr	Duty Cycle	Out Pwr	Antenna	EIRP	EIRP Limit	
(dBm)	Factor (dB)	(dBm)	Gain (dBi)	(dBm)	(dBm)	Result
7.135	4.3	11.4	2.2	13.6	36	Pass

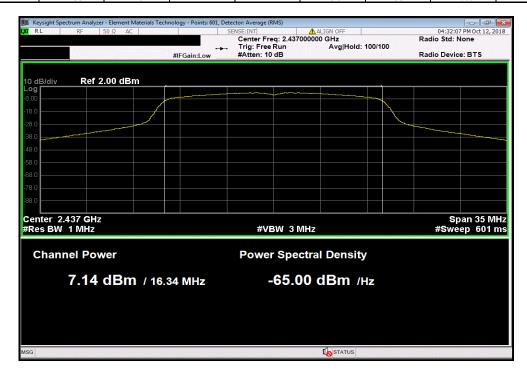



XMit 2017 12 13

Testing was performed using the mode(s) of operation and configuration(s) noted within the report. The individuals and/or the organization requesting the test provided the modes, configurations and settings used to complete the evaluation. The actual test parameters are specified in the test data, this includes items such as investigated frequency range (scanned) and test levels. The testing methods and performance specifications, as well as the test site used for the evaluation are indicated in the test data.

TEST EQUIPMENT

Description	Manufacturer	Model	ID	Last Cal.	Cal. Due
Block - DC	Fairview Microwave	SD3379	AMT	10-Oct-18	10-Oct-19
Attenuator	Fairview Microwave	SA4018-20	TYE	10-Oct-18	10-Oct-19
Cable	Micro-Coax	UFD150A-1-0720-200200	TXG	10-Oct-18	10-Oct-19
Generator - Signal	Agilent	N5173B	TIW	5-Jul-17	5-Jul-20
Analyzer - Spectrum Analyzer	Keysight	N9010A	AFM	19-Mar-18	19-Mar-19

TEST DESCRIPTION

The measurement was made using a direct connection between the RF output of the EUT and a spectrum analyzer. The power spectral density was measured using the channels and modes as called out on the following data sheets. The transmit power was set to its default maximum.

The method AVGPSD-1 in section 11.10.3 of ANSI C63.10:2013 was used to make the measurement. This method uses trace averaging and RMS detection across the full power of the burst. This method is allowed as the same method has been used to determine the conducted output power.



EUT: IVISTA WIFI
Serial Number: WFC1-009113
Customer: WatchGuard Video
Attendees: Navaid Karimi
Project: None
Tested by: Jonathan Kiefer
TEST SPECIFICATIONS Work Order: WTVD0001

Date: 12-Oct-18

Temperature: 22.2 °C HuSingleity: 50.2% RH
Barometric Pres.: 1017 mbar Power: Battery
Test Method Job Site: TX09 FCC 15.247:2018 COMMENTS Reference Offset 21.23 dB (20dB attenuator+dc block+cable). DEVIATIONS FROM TEST STANDARD Jonathan Kiefer Configuration # Signature Value dBm/3kHz Limit < dBm/3kHz Results 802.11(g) 6 Mbps Single Channel 6, 2437 MHz 802.11(g) 9 Mbps Single Channel 6, 2437 MHz -13.931 Pass 8 -13.993 Pass 802.11(g) 12 Mbps Single Channel 6, 2437 MHz Pass -12.098 8 802.11(g) 18 Mbps Single Channel 6, 2437 MHz -13.416 802.11(g) 24 Mbps Single Channel 6, 2437 MHz -14.418 Pass Single Channel 6, 2437 MHz 802.11(g) 48 Mbps Pass -16.066 Single Channel 6, 2437 MHz 802.11(g) 54 Mbps Single Channel 6, 2437 MHz -16.331 8 Pass -18.499 Pass




2400 MHz - 2483.5 MHz Band, 802.11(g) 6 Mbps, Single Channel 6, 2437 MHz


Value Limit

dBm/3kHz < dBm/3kHz Results

-13.931 8 Pass

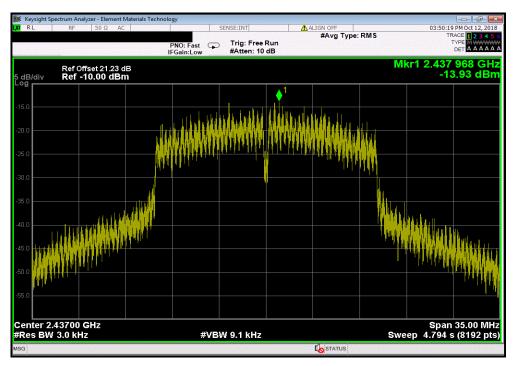

	2400 MHz - 24	483.5 MHz Band,	802.11(g) 9 Mbp	s, Single Channe	l 6, 2437 MHz	
				Value	Limit	
				dBm/3kHz	< dBm/3kHz	Results
				-13,993	8	Pass

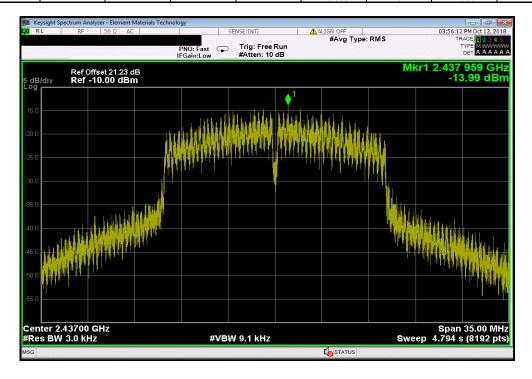




2400 MHz - 2483.5 MHz Band, 802.11(g) 12 Mbps, Single Channel 6, 2437 MHz


Value
Limit

dBm/3kHz < dBm/3kHz Results

-12.098 8 Pass

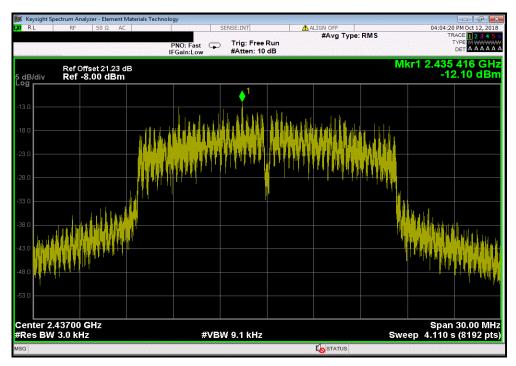

	2400 MHz - 24	83.5 MHz Band,	802.11(g) 18 Mbp	os, Single Channe	el 6, 2437 MHz	
				Value	Limit	
				dBm/3kHz	< dBm/3kHz	Results
				-13.416	8	Pass

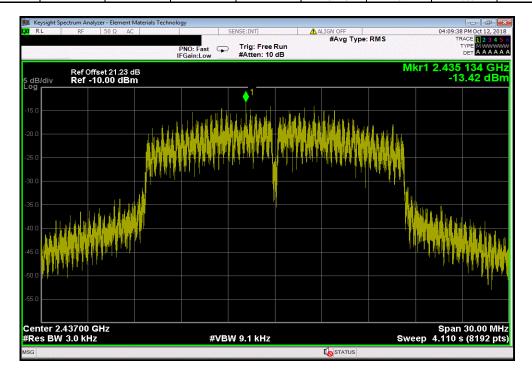





2400 MHz - 2483.5 MHz Band, 802.11(g) 24 Mbps, Single Channel 6, 2437 MHz


Value Limit

dBm/3kHz < dBm/3kHz Results

-14.418 8 Pass

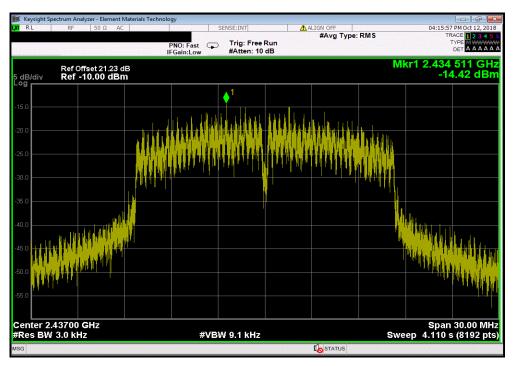



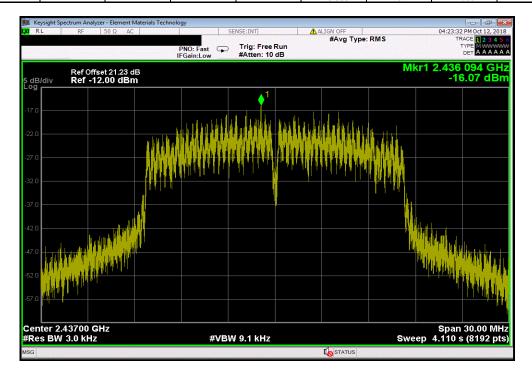




2400 MHz - 2483.5 MHz Band, 802.11(g) 48 Mbps, Single Channel 6, 2437 MHz

Value Limit

dBm/3kHz < dBm/3kHz Results

-16.331 8 Pass

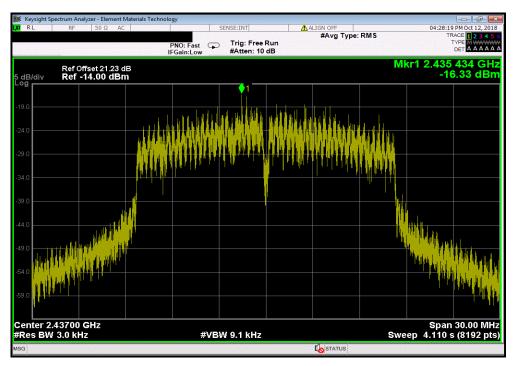

	2400 MHz - 24	183.5 MHz Band,	802.11(g) 54 Mb _l	os, Single Channe	el 6, 2437 MHz	
				Value	Limit	
				dBm/3kHz	< dBm/3kHz	Results
				-18.499	8	Pass

