

588 West Jindu Road, Songjiang District, Shanghai, China

Telephone: +86 (0) 21 6191 5666 Report No.: SHEM120900133402

Fax: +86 (0) 21 6191 5678 Page: 1 of 79 ee.shanghai@sgs.com

TEST REPORT

Application No.: SHEM1209001334RF **Applicant:** Audio Partnership Plc

Equipment Under Test (EUT):

NOTE: The following sample(s) submitted was/were identified on behalf of the client as

EUT Name: Wireless Music System

Brand Name: Cambridge Audio

Model No: Air 200

FCC ID: YKBMA200-003
IC ID: 9095A-MA200003

Standards: FCC PART 15 SUBPART C, Section 15.247

RSS-210 Issue 8 (December 2010) RSS-Gen Issue 3 (December 2010)

Date of Receipt: September 13, 2012

Date of Test: September 14, 2012 to October 20, 2012

Date of Issue: October 25, 2012

Test Result : PASS *

* In the configuration tested, the EUT complied with the standards specified above.

E&E Section Head SGS-CSTC(Shanghai) Co., Ltd.

E&E EMC Engineer SGS-CSTC(Shanghai) Co., Ltd.

Nell Thang

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to thesample(s) tested and such sample(s) are retained for 90 days only

Page: 2 of 79

2 Test Summary

TEST ITEM	FCC REFERANCE	IC REFERANCE	Test Procedure	RESULT
	1001121211111102			
Power line conducted	15.207	RSS-Gen Issue 8	ANSI C63.4,2003	Pass
emission		Clause 7.2.4		
Radiated Spurious Emission	15.205 & 15.209	RSS-210 Issue 8 Clause 2	ANSI C63.4,2003	Pass
Minimum 6dB Bandwidth	15.247(a)(2)	RSS-210 Issue 8 Annex 8	ANSI C63.10,2009	Pass
Maximum peak output power	15.247(b)	RSS-210 Issue 8 Annex 8	ANSI C63.10,2009	Pass
Power spectrum density	15.247(e)	RSS-210 Issue 8 Annex 8	ANSI C63.10,2009	Pass
Radiated Emission BandEdge	15.247(c)		ANSI C63.4,2003	Pass
Emission outside the Frequency band	15.247(d)	RSS-210 Issue 8 Annex 8	ANSI C63.4,2003	Pass
Occupied bandwidth		RSS-Gen Issue 3	RSS-Gen Issue 3	Tested
Cocapica sallawati		Clause 4.6.1	Clause 4.6.1	. 55164

Page: 3 of 79

3 Contents

		Page
1 (COVER PAGE	1
2	TEST SUMMARY	2
_		
3 (CONTENTS	3
4 (GENERAL INFORMATION	4
4.1	CLIENT INFORMATION	4
4.2		
4.3	DETAILS OF E.U.T.	4
4.4		
4.5		
4.6		
4.7		
4.8		
5	TEST INSTRUMENTS	7
6	TEST PROCEDURE & MEASUREMENT DATA	9
6.1	E.U.T. OPERATION	9
6.2		
6.3		
6.4	-	
6.5		
6.6		
6.7		
6.8		
6.9		
7	TEST SETUP PHOTOGRAPHS	78
8 I	EUT CONSTRUCTIONAL DETAILS	78

Page: 4 of 79

4 General Information

4.1 Client Information

Applicant:	Audio Partnership Plc
Address of Applicant:	Gallery Court, Hankey Place London, SE1 4BB United Kingdom
Manufacturer:	Audio Partnership Plc
Address of Manufacturer:	Gallery Court, Hankey Place London, SE1 4BB United Kingdom
Factory:	Hansong(Nanjing) Technology Ltd.

4.2 General Description of E.U.T.

Product Name:	Wireless Music System
Model No.(EUT):	Air 200
Add Model No.:	N/A
Model Difference:	N/A
Trade Mark:	Cambridge Audio
Supported Frequency Bands:	WiFi (802.11 b/g): 2.412 to 2.462GHz
	Bluetooth(BT): 2.402GHz to 2.480GHz

4.3 Details of E.U.T.

Technical Specifications:

	5 7 and the 5 000
Modulation Technique:	⊠ 802.11b: DSSS
·	
Modulation Type:	⊠ 802.11g: OFDM(64QAM, 16QAM, QPSK, BPSK)
Frequency Range	
/ Channel Number:	⊠ 802.11b/g: 2412-2462MHz / 11 Channels
/ Onamile Number.	Manager 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1
Data Rate:	 ⊠ 802.11b: 1Mbps, 5.5Mbps, 11Mbps, ⊠ 802.11g: 6Mbps, 9Mbps, 12Mbps, 18Mbps, 36Mbps, 48Mbps, 54Mbps
Equipment classification:	equipment for fixed use
Antenna Type:	Double PIFA antenna (as below figure) Antenna B Remark: the two PIFA antennas are not working simultaneously.
Antenna Gain:	2.0 dBi
	its Constal Conditions of Contine stricted everloof, qualicular on request or constable at



Report No.: SHEM120900133402

Page: 5 of 79

Power Supply:

Rated Input:	100-120V/220-240V AC 50/60Hz Rated Power Consumption: 280W
Dawer Cable	2 wires
Power Cable:	1.5m

4.4 Details of Test Mode

Using test software was control EUT work in continuous transmitter and receiver mode. And select test channel as below:

For 802.11b/g

Channel	Frequency
Onarmer	rrequericy
The lowest channel(CH1)	2412MHz
The middle channel(CH6)	2437MHz
The Highest channel(CH11)	2462MHz

Through Pre-scan under all rate at lowest channel 1(CH1), the data rate as below table described is the worst case, so we chose these data rate for test.

Туре	Data rate
802.11b	1Mbps

4.5 Standards Applicable for Testing

The standard used were FCC PART 15 Subpart C: 2011, ANSI C63.10: 2009. RSS-210 Issue 8, RSS-Gen Issue 3.

Page: 6 of 79

4.6 Test Location

Tests were performed at:

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. No.588 West Jindu Road, Songjiang District, Shanghai, China. 201612.

Tel: +86 21 6191 5666 Fax: +86 21 6191 5655

4.7 Other Information Requested by the Customer

None.

4.8 Test Facility

The test facility is recognized, certified, or accredited by the following organizations:

• CNAS (No. CNAS L0599)

CNAS has accredited SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. to ISO/IEC 17025:2005 General Requirements for the Competence of Testing and Calibration Laboratories (CNAS-CL01 Accreditation Criteria for the Competence of Testing and Calibration Laboratories) for the competence in the field of testing. Date of expiry: 2014-07-26.

• FCC – Registration No.: 402683

SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered and fully described in a report filed with the Federal Communications Commission (FCC). The acceptance letter from the FCC is maintained in our files. Registration No.: 402683, Expiry Date: 2015-02-22.

Industry Canada (IC) – IC Assigned Code: 8617A

The 3m Semi-anechoic chamber of SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered by Certification and Engineering Bureau of Industry Canada for radio equipment testing with Registration No.: 8617A. Expiry Date: 2014-09-20.

• VCCI (Member No.: 3061)

The 3m Semi-anechoic chamber and Shielded Room of SGS-CSTC Standards Technical Services (Shanghai) Co., Ltd. has been registered in accordance with the Regulations for Voluntary Control Measures with Registration No.: R-3868 and C-4336 respectively. Date of Registration: 2012-05-29. Date of Expiry: 2015-05-28.

Page: 7 of 79

5 Test Instruments

	103t mana			•		
ltem	Test Equipment	Manufacturer	Model No.	Serial No.	Cal. Date	Cal. Due date
1	EMI test receiver	Rohde & Schwarz	ESU40	100109	2012-06-03	2013-06-01
2	Horn Antenna	SCHWARZBECK	BBHA9120D	9120D-679	2012-06-03	2013-06-01
3	Horn Antenna	Rohde & Schwarz	HF906	100284	2012-03-12	2013-03-10
4	ANTENNA	SCHWARZBECK	VULB9168	9168-313	2012-06-03	2013-06-01
5	Ultra broadband antenna	Rohde & Schwarz	HL562	100227	2012-10-09	2013-10-08
6	Atmosphere pressure meter	Shanghai ZhongXuan Electronic Co;Ltd	BY-2009P		2012-10-15	2013-10-14
7	CLAMP METER	FLUKE	316	86080010	2012-04-22	2013-04-20
8	Thermo- Hygrometer	ZHICHEN	ZC1-2	01050033	2012-10-14	2013-10-13
9	High-low temperature cabinet	Shanghai YuanZhen	GW2050		2012-06-17	2013-06-16
11	Tunable Notch Filter	Wainwright instruments Gmbh	WRCT1800.0/ 2000.0-0.2/40- 5SSK	11	2012-06-26	2013-06-25
12	Tunable Notch Filter	instruments Gmbh		9	2012-06-26	2013-06-25
13	High pass Filter	FSCW	HP 12/2800- 5AA2	19A45-02	2012-04-08	2013-04-07
14	Low nosie amplifier	TESEQ	LNA6900	70133	2012-07-05	2013-07-04
15	EMI test receiver	Rohde & Schwarz	ESCS30	100086	2012-06-04	2013-06-03



Report No.: SHEM120900133402

Page: 8 of 79

16	Line impedance stabilization	SCHWARZBECK	NSLK8127	8127-490	2012-05-07	2013-05-06
	network					

Page: 9 of 79

6 Test Procedure & Measurement Data

6.1 E.U.T. Operation

Input voltage: 100-120V/220-240V AC 50/60Hz Rated Power Consumption: 280W

Operating Environment:

Temperature: 20.0 -25.0 °C
Humidity: 35-75 % RH
Atmospheric Pressure: 992 -1020 mbar

EUT Operation: The EUT has been tested under operating condition.

Test program was used to control the EUT for staying in continuous

transmitting and receiving mode is programmed.

Channel low (2412MHz) mid(2437MHz) high(2462MHz)

6.2 Conducted Emission Test

Test Requirement: FCC Part15C 15.207 **Test date:** September. 14, 2012

Standard Applicable According to section 15.207, frequency 150KHz to 30MHz shall not not

exceed the limit table as blew.

Frequency of Emission (MHz)	Conducted Limit (dBuV)		
	Quasi-peak Average		
0.15-0.5	66 to 56 *	56 to 46 *	
0.5-5	56	46	
5-30	60	50	

EUT Setup 1.The conducted emission tests were performed in the test site, using the

setup in accordance with the ANSI C63.10-2009.

2.EUT is charged with PC.The AC Power adaptor of PC was plug-in LISN.The rear of the EUT and periphearals were placed flushed with the

rear of the tabletop.

3. The LISN was connected with 120V AC/60Hz power source.

Measurement Result Operation mode:Normal Link Mode


Note:All test modes have been tested.



Report No.: SHEM120900133402

Page: 10 of 79


L line:

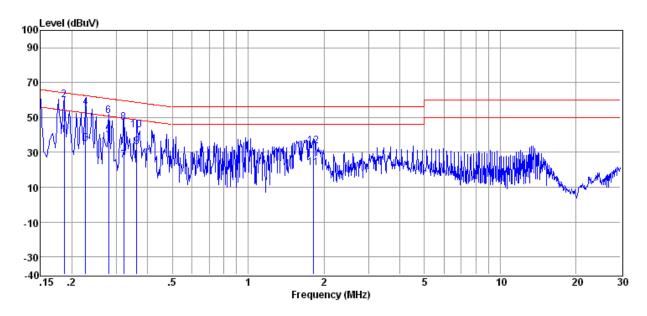

Item	Freq	Read	LISN	Cable	Level	Limit	Over	Detector
		Level	Factor	Loss		Line	Limit	
(Mark)	(MHz)	(dBµV)	(dB)	(dB)	$(dB\mu V)$	(dBµV)	(dB)	
1	0.186	39.70	0.13	0.10	39.93	54.20	-14.27	Average
2	0.186	59.82	0.13	0.10	60.05	64.20	-4.15	QP
3	0.227	34.81	0.11	0.10	35.02	52.57	-17.55	Average
4	0.227	55.74	0.11	0.10	55.95	62.57	-6.62	QP
5	0.280	39.43	0.13	0.10	39.66	50.81	-11.15	Average
6	0.280	50.54	0.13	0.10	50.77	60.81	-10.04	QP
7	0.322	25.11	0.14	0.10	25.35	49.66	-24.31	Average
8	0.322	46.82	0.14	0.10	47.06	59.66	-12.60	QP
9	0.361	33.10	0.15	0.10	33.35	48.69	-15.34	Average
10	0.361	42.62	0.15	0.10	42.87	58.69	-15.82	QP
11	1.810	20.65	0.28	0.10	21.03	46.00	-24.97	Average
12	1.810	33.22	0.28	0.10	33.60	56.00	-22.40	QP

Page: 11 of 79

N Line:

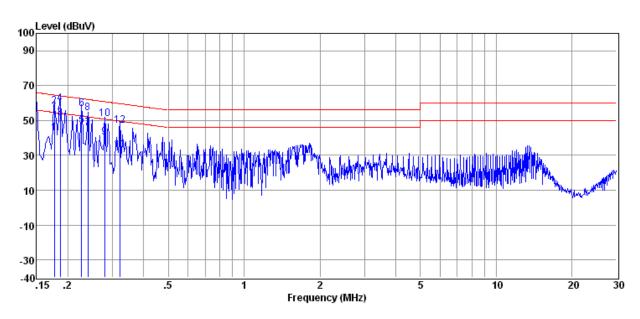

Item	Freq	Read	LISN	Cable	Level	Limit	Over	Detector
		Level	Factor	Loss		Line	Limit	
(Mark)	(MHz)	(dBµV)	(dB)	(dB)	$(dB\mu V)$	(dBµV)	(dB)	
1	0.177	42.53	0.15	0.10	42.78	54.64	-11.86	Average
2	0.177	58.12	0.15	0.10	58.37	64.64	-6.27	QP
3	0.186	51.14	0.13	0.10	51.37	54.20	-2.83	Average
4	0.186	59.16	0.13	0.10	59.39	64.20	-4.81	QP
5	0.227	47.03	0.11	0.10	47.24	52.57	-5.33	Average
6	0.227	56.40	0.11	0.10	56.61	62.57	-5.96	QP
7	0.240	45.30	0.11	0.10	45.51	52.08	-6.57	Average
8	0.240	54.22	0.11	0.10	54.43	62.08	-7.65	QP
9	0.280	40.19	0.13	0.10	40.42	50.81	-10.39	Average
10	0.280	50.52	0.13	0.10	50.75	60.81	-10.06	QP
11	0.322	32.72	0.14	0.10	32.96	49.66	-16.70	Average
12	0.322	46.68	0.14	0.10	46.92	59.66	-12.74	QP

Page: 12 of 79

6.3 Radiated Spurious Emission Test

Test Requirement: FCC Part15 247(c) **Test date:** October 10,2012

Standard Applicable: According to section 15.247(c), all other emissions outside these bands

shall not exceed the general radiated emission limits specified in section15.209(a). And according to section 15.33(a)(1), for an intentional radiator operates below 10GHz, the frequency range of measurements: to the tenth harmonic of the highest fundamental frequency or to

40GHz, which is lower.

Measurement Procedure:

1. The EUT was placed on a turn table which is 0.8m above ground

plane.

2. The turn table shall rotate 360 degrees to determine the position of maximum emission level.

3. EUT is set 3m away from the receiving antenna which varied from 1m to 4m to find out the highest emissions.

Test instrumentation resolution bandwidth 120 kHz and Quasi-Peak detector applies (30 MHz - 1000 MHz). 1MHz resolution bandwidth and Peak detector apply (1000 MHz – 25GHz)

Above 1GHz

(a) PEAK: RBW=VBW=1MHz / Sweep=AUTO

(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO.


4. Maximum procedure was performed on the six highest emissions to ensure EUT compliance.

5. And also, each emission was to be maximized by changing the polarization of receiving antenna both horizontal and vertical.

6. Repeat above procedures until all frequency measured were


complete.

Radiated Test Set-up: Radiated Emission Test Set-up,Frequency Below 1000MHz

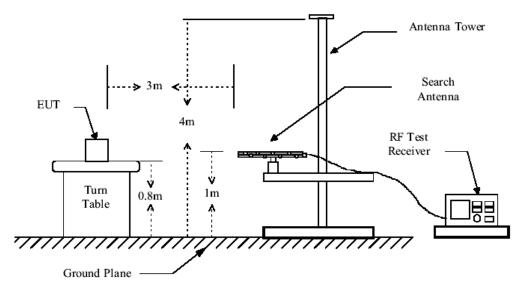

Page: 13 of 79

Radiated Emission Test Set-up Frequency Over 1GHz

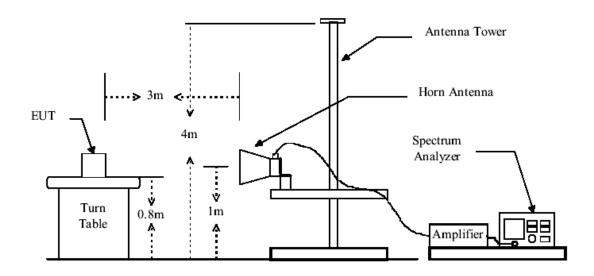

Low nosie amplifier was used below 1GHz, High pass Filter was used above 1GHz.

Operation Mode: TX Low Mid CH 2412MHz Antenna A

30MHz~1GHz Spurious Emissions .Quasi-Peak Measurement

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
440.12	11.5	1.5	24.5	48.92	37.42	46.00	Vertical
233.31	14.5	2.1	24.4	45.50	37.70	46.00	Horizontal

^{1~25} GHz Harmonics & Spurious Emissions. Peak & Average Measurement

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Filter (dB)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBμV /m)	Limit (dBµV /m)	Antenna polarization
4824.0	31.0	1.2	0.5	43.4	57.48	46.78	74	Vertical
7236.0	35.5	1.7	0.6	43.1	46.38	41.08	74	Vertical
9648.0	37.7	2.1	0.9	43.3	48.85	46.25	74	Vertical
4824.0	31.0	1.2	0.5	43.4	55.22	44.52	74	Horizontal
7236.0	35.5	1.7	0.6	43.1	46.44	41.14	74	Horizontal
9648.0	37.7	2.1	0.9	43.3	44.43	41.83	74	Horizontal

Page: 14 of 79

Average Measurement:

Frequency (MHz	Antenna factors (dB/m)	Cable loss (dB)	Filter (dB)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBμV /m)	Limit (dBμV /m)	Antenna polarization
4824.0	31.0	1.2	0.5	43.4	48.97	38.27	54	Vertical
7236.0	35.5	1.7	0.6	43.1	36.42	31.12	54	Vertical
9648.0	37.7	2.1	0.9	43.3	37.80	35.20	54	Vertical
4824.0	31.0	1.2	0.5	43.4	45.98	35.28	54	Horizontal
7236.0	35.5	1.7	0.6	43.1	36.65	31.35	54	Horizontal
9648.0	37.7	2.1	0.9	43.3	35.27	32.67	54	Horizontal

The field strength is calculated by adding the Antenna Factor. Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor + Fiter - Preamplifier Factor

Operation Mode: TX Mid CH 2437MHz Antenna A

30MHz~1GHz Spurious Emissions .Quasi-Peak Measurement

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dB _µ V)	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
110.70	11.5	1.5	24.5	49.00	37.50	43.50	Vertical
110.70	14.5	2.1	24.4	45.27	37.47	43.50	Horizontal

^{1~25} GHz Harmonics & Spurious Emissions. Peak & Average Measurement

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Filter (dB)	Preamp factor (dB)	Reading Level (dB _µ V)	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
4876.0	31.1	1.3	0.5	43.5	52.36	41.76	74	Vertical
7314.0	35.7	1.7	0.6	43.1	46.76	41.66	74	Vertical
9752.0	37.8	2.1	0.9	43.0	47.26	45.06	74	Vertical
4876.0	31.1	1.3	0.5	43.5	56.27	45.67	74	Horizontal
7314.0	35.7	1.7	0.6	43.1	46.73	41.63	74	Horizontal
9752.0	37.8	2.1	0.9	43.0	48.45	46.25	74	Horizontal

Page: 15 of 79

Average Measurement:

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Filter (dB)	Preamp factor (dB)	Reading Level (dΒμV)	Emission Level (dBµV/m)	Limit (dBμV/m)	Antenna polarization
4876.0	31.1	1.3	0.5	43.5	46.10	35.50	54	Vertical
7314.0	35.7	1.7	0.6	43.1	37.24	32.14	54	Vertical
9752.0	37.8	2.1	0.9	43.0	37.34	35.14	54	Vertical
4876.0	31.1	1.3	0.5	43.5	49.32	38.72	54	Horizontal
7314.0	35.7	1.7	0.6	43.1	36.12	31.02	54	Horizontal
9752.0	37.8	2.1	0.9	43.0	37.52	35.32	54	Horizontal

The field strength is calculated by adding the Antenna Factor. Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor +Fiter-Preamplifier Factor

Operation Mode:TX High CH 2462MHz Antenna A

30MHz~1GHz Spurious Emissions .Quasi-Peak Measurement

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dB _µ V)	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
110.70	11.5	1.5	24.5	49.51	38.01	43.50	Vertical
110.70	14.5	2.1	24.4	36.37	28.57	43.50	Horizontal

^{1~25} GHz Harmonics & Spurious Emissions. Peak & Average Measurement

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Filter (dB)	Preamp factor (dB)	Reading Level (dBμV/m)	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
4928.0	31.4	1.4	0.5	43.9	53.06	42.46	74	Vertical
7392.0	35.8	1.7	0.6	43.1	46.57	41.57	74	Vertical
9856.0	38.0	2.2	0.9	42.8	46.22	44.52	74	Vertical
4928.0	31.4	1.4	0.5	43.9	56.92	46.32	74	Horizontal
7392.0	35.8	1.7	0.6	43.1	49.56	44.56	74	Horizontal
9856.0	38.0	2.2	0.9	42.8	46.78	45.08	74	Horizontal

Page: 16 of 79

Average Measurement:

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Filter (dB)	Preamp factor (dB)	Reading Level (dBV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
4928.0	31.4	1.4	0.5	43.9	47.54	36.94	54	Vertical
7392.0	35.8	1.7	0.6	43.1	35.78	30.78	54	Vertical
9856.0	38.0	2.2	0.9	42.8	35.94	34.24	54	Vertical
4928.0	31.4	1.4	0.5	43.9	51.93	41.33	54	Horizontal
7392.0	35.8	1.7	0.6	43.1	37.65	32.65	54	Horizontal
9856.0	38.0	2.2	0.9	42.8	36.48	34.78	54	Horizontal

The field strength is calculated by adding the Antenna Factor. Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

1. Final Test Level = Receiver Reading + Antenna Factor + Cable Factor + Fiter - Preamplifier Factor

Operation Mode: TX Low Mid CH 2412MHz Antenna B

30MHz~1GHz Spurious Emissions .Quasi-Peak Measurement

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dB _µ V)	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
387.48	11.5	1.5	24.5	47.88	36.38	46.00	Vertical
211.28	14.5	2.1	24.4	43.07	35.27	43.50	Horizontal

^{1~25} GHz Harmonics & Spurious Emissions. Peak & Average Measurement

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Filter (dB)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
4830.44	31.0	1.2	0.5	43.4	59.18	48.48	74	Vertical
7241.73	35.5	1.7	0.6	43.1	48.68	43.38	74	Vertical
9654.08	37.7	2.1	0.9	43.3	51.85	49.25	74	Vertical
4830.22	31.0	1.2	0.5	43.4	56.92	46.22	74	Horizontal
7241.74	35.5	1.7	0.6	43.1	48.74	43.44	74	Horizontal
9653.64	37.7	2.1	0.9	43.3	47.43	44.83	74	Horizontal

Page: 17 of 79

Average Measurement:

Frequency (MHz	Antenna factors (dB/m)	Cable loss (dB)	Filter (dB)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dB _µ V /m)	Limit (dBμV /m)	Antenna polarization
4831.64	31.0	1.2	0.5	43.4	50.87	40.17	54	Vertical
7243.43	35.5	1.7	0.6	43.1	38.27	32.97	54	Vertical
9656.18	37.7	2.1	0.9	43.3	39.47	36.87	54	Vertical
4831.42	31.0	1.2	0.5	43.4	47.88	37.18	54	Horizontal
7243.44	35.5	1.7	0.6	43.1	38.50	33.20	54	Horizontal
9655.74	37.7	2.1	0.9	43.3	36.94	34.34	54	Horizontal

The field strength is calculated by adding the Antenna Factor. Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level = Receiver Reading + Antenna Factor + Cable Factor + Fiter - Preamplifier Factor

Operation Mode: TX Mid CH 2437MHz Antenna B

30MHz~1GHz Spurious Emissions .Quasi-Peak Measurement

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dB _µ V)	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
165.43	11.5	1.5	24.5	49.12	49.12	43.50	Vertical
178.69	14.5	2.1	24.4	43.34	43.34	43.50	Horizontal

^{1~25} GHz Harmonics & Spurious Emissions. Peak & Average Measurement

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Filter (dB)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
4878.92	31.1	1.3	0.5	43.5	48.924	38.32	74	Vertical
7321.86	35.7	1.7	0.6	43.1	44.384	39.28	74	Vertical
9762.37	37.8	2.1	0.9	43.0	45.534	43.33	74	Vertical
4878.96	31.1	1.3	0.5	43.5	52.443	41.84	74	Horizontal
7321.86	35.7	1.7	0.6	43.1	44.357	39.25	74	Horizontal
9762.38	37.8	2.1	0.9	43.0	46.605	44.40	74	Horizontal

Page: 18 of 79

Average Measurement:

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Filter (dB)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
4880.87	31.1	1.3	0.5	43.5	47.21	36.61	54	Vertical
7321.32	35.7	1.7	0.6	43.1	38.69	33.59	54	Vertical
9761.76	37.8	2.1	0.9	43.0	38.91	36.71	54	Vertical
4880.87	31.1	1.3	0.5	43.5	50.43	39.83	54	Horizontal
7321.32	35.7	1.7	0.6	43.1	37.57	32.47	54	Horizontal
9761.76	37.8	2.1	0.9	43.0	39.09	36.89	54	Horizontal

The field strength is calculated by adding the Antenna Factor. Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor +Fiter-Preamplifier Factor

Operation Mode:TX High CH 2462MHz Antenna B

30MHz~1GHz Spurious Emissions .Quasi-Peak Measurement

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Preamp factor (dB)	Reading Level (dB _µ V)	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
126.39	11.5	1.5	24.5	49.51	36.46	43.50	Vertical
156.82	14.5	2.1	24.4	36.37	31.39	43.50	Horizontal

^{1~25} GHz Harmonics & Spurious Emissions. Peak & Average Measurement

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Filter (dB)	Preamp factor (dB)	Reading Level (dBμV)	Emission Level (dBµV/m)	Limit (dBμV/m)	Antenna polarization	
4931.40	31.4	1.4	0.5	43.9	53.41	42.81	74	Vertical	
7394.35	35.8	1.7	0.6	43.1	46.20	41.20	74	Vertical	
9857.52	38.0	2.2	0.9	42.8	45.40	43.70	74	Vertical	
4931.79	31.4	1.4	0.5	43.9	57.27	46.67	74	Horizontal	
7394.65	35.8	1.7	0.6	43.1	49.19	44.19	74	Horizontal	
9857.57	38.0	2.2	0.9	42.8	45.96	44.26	74	Horizontal	

Page: 19 of 79

Average Measurement:

Frequency (MHz)	Antenna factors (dB/m)	Cable loss (dB)	Filter (dB)	Preamp factor (dB)	Reading Level (dBµV)	Emission Level (dBμV/m)	Limit (dBμV/m)	Antenna polarization
4934.33	31.4	1.4	0.5	43.9	48.78	38.18	54	Vertical
7401.09	35.8	1.7	0.6	43.1	37.06	32.06	54	Vertical
9868.05	38.0	2.2	0.9	42.8	36.64	34.94	54	Vertical
4934.33	31.4	1.4	0.5	43.9	53.17	42.57	54	Horizontal
7401.09	35.8	1.7	0.6	43.1	38.93	33.93	54	Horizontal
9868.05	38.0	2.2	0.9	42.8	37.18	35.48	54	Horizontal

The field strength is calculated by adding the Antenna Factor. Cable Factor & Preamplifier. The basic equation with a sample calculation is as follows:

2. Final Test Level = Receiver Reading + Antenna Factor + Cable Factor + Fiter - Preamplifier Factor

Page: 20 of 79

6.4 6dB Bandwidth

Test Requirement: FCC Part15 247(a)(2) **Test date:** September 05.2012

Standard Applicable: According to section 15.247(a)(2), Systems using digital

modulationg techniques may operate in the 902-928MHz,2400-2483.5MHz,and 5725-5850MHz bands.The minimum 6dB

bandwidth shall be at least 500KHz.

Measurement Procedure: 1. Place the EUT on the table and set it in transmitting mode.

2. Remove the antenna from the EUT and then connect a low

loss RF cable from the antenna port to the

spectrum analyzer.

3. Set the spectrum analyzer as RBW=100KHz, VBW =3* RBW,

Span=30/50MHz, Sweep=auto

4. Mark the peak frequency and –6dB (upper and lower)

frequency.

5. Repeat above procedures until all frequency measured were

Test mode: 802.11b

Test mode:

Test mode:

802.11b

802.11a

complete.

Measurement Result:

Test Data for Antenna A

СН	Frequency (MHz)	Bandwidth (MHz)	Limit Bandwidth (KHz)	Result
Low	2412	12.60	500	PASS
Mid	2437	11.76	500	PASS
High	2462	9.84	500	PASS

Test Data for Antenna A

)I	Antenna A		Test mode: 802.11g			
	СН	Frequency (MHz)	Bandwidth (MHz)	Limit Bandwidth (KHz)	Result	
	Low	2412	16.56	500	PASS	
	Mid	2437	16.52	500	PASS	
	High	2462	16.56	500	PASS	

Test Data for Antenna B

•	Antonna B			root moder oo	
	СН	Frequency (MHz)	Bandwidth (MHz)	Limit Bandwidth (KHz)	Result
	Low	2412	11.04	500	PASS
	Mid	2437	11.92	500	PASS
	High	2462	12.00	500	PASS

Test Data for Antenna B

			10011110401 0021111				
СН	Frequency (MHz)	Bandwidth (MHz)	Limit Bandwidth (KHz)	Result			
Low	2412	16.64	500	PASS			
Mid	2437	16.56	500	PASS			
High	2462	16.56	500	PASS			



Report No.: SHEM120900133402


Test mode: 802.11b

Test mode: 802.11b

Page: 21 of 79

Test Plots:


Lowest Channel for Antenna A

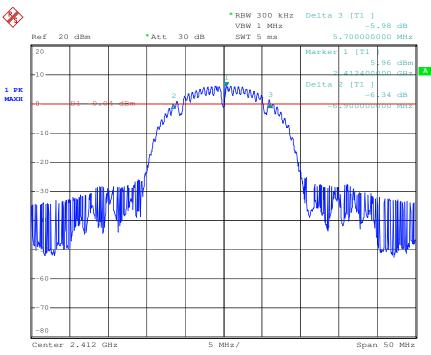

Date: 1.JAN.2000 00:25:27

1.JAN.2000 00:44:27

Middle Channel for Antenna A

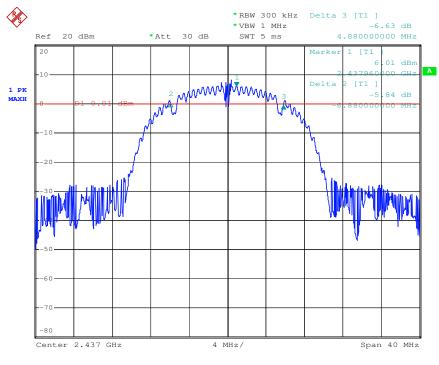

This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms and conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms_edocument.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to thesample(s) tested and such sample(s) are retained for 90 days only"




Report No.: SHEM120900133402

Test mode: 802.11b

Test mode: 802.11g


Page: 22 of 79

Highest Channel for Antenna A

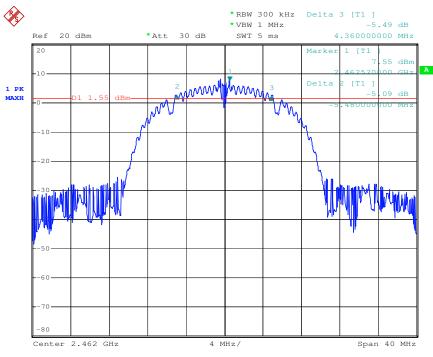

Date: 1.JAN.2000 01:11:16

Lowest Channel for Antenna A

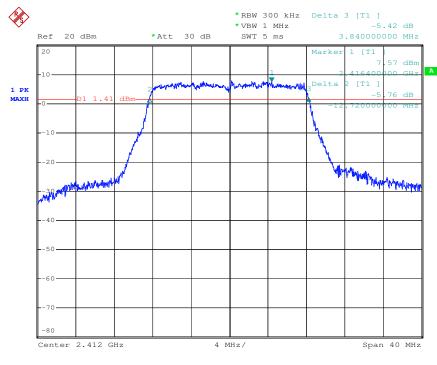

Date: 1.JAN.2000 01:23:49




Report No.: SHEM120900133402

Test mode: 802.11g

Test mode: 802.11g


Page: 23 of 79

Middle Channel for Antenna A

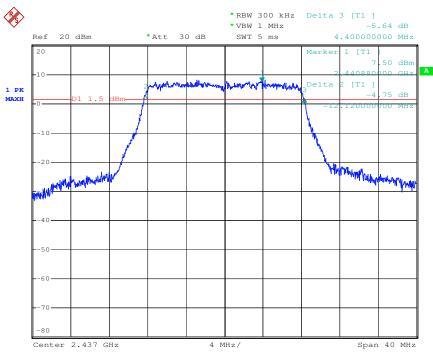

Date: 1.JAN.2000 02:08:33

Highest Channel for Antenna A

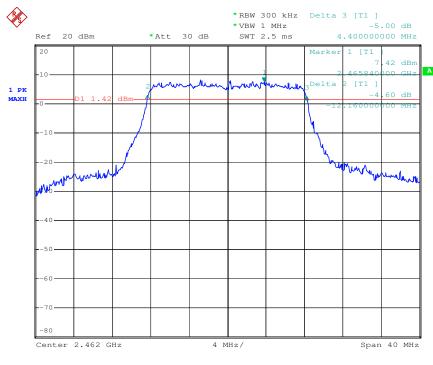

Date: 1.JAN.2000 02:23:09




Report No.: SHEM120900133402

Test mode: 802.11b

Test mode: 802.11b


Page: 24 of 79

Lowest Channel for Antenna B

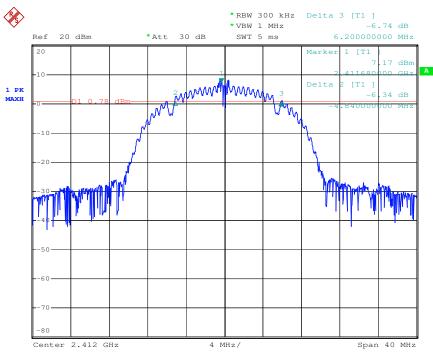

Date: 1.JAN.2000 05:33:49

Middle Channel for Antenna B

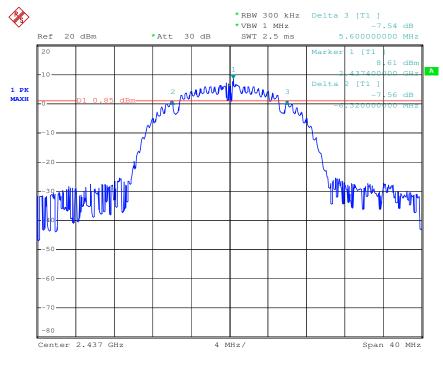

1.JAN.2000 06:09:30




Report No.: SHEM120900133402

Test mode: 802.11b


Page: 25 of 79

Highest Channel for Antenna B

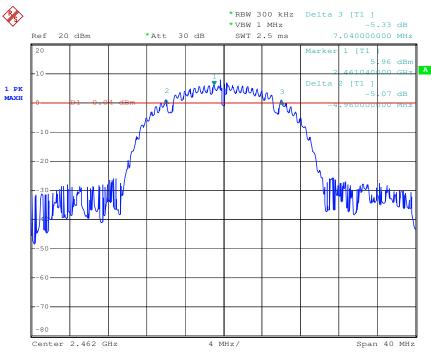

Date: 1.JAN.2000 06:23:58

Lowest Channel for Antenna B

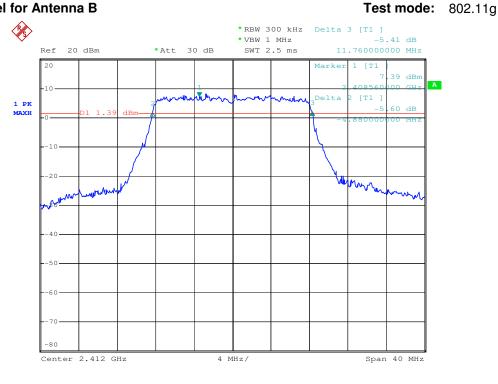

Date: 1.JAN.2000 06:44:20




Report No.: SHEM120900133402

Test mode: 802.11g


Page: 26 of 79

Middle Channel for Antenna B

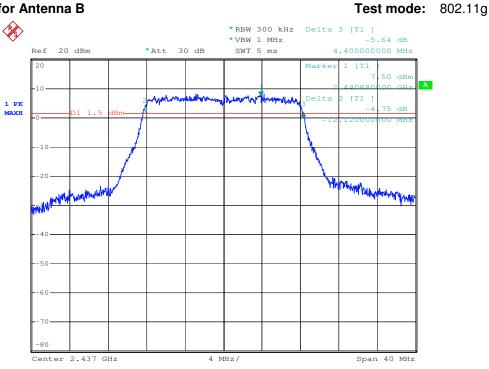

Highest Channel for Antenna B

1.JAN.2000 02:08:33

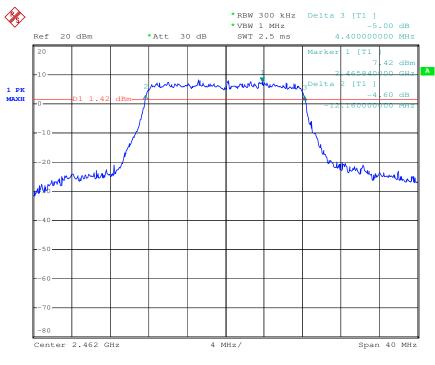

1.JAN.2000 02:23:09

Page: 27 of 79

6.5 **Peak Output Power Measurement**

Test Requirement: FCC Part 15 15.247(a)(2),(b)

Test date September 06, 2012

According to section 15.247(a)(2),(b) Standard Applicable:

(3) For systems using digital modulation in the 902-928 MHz, 2400-2483.5 MHz, and 5725-5850 MHz bands: 1 Watt. As an alternative to a peak power measurement, compliance with the one Watt limit can be based on a measurement of the maximum conducted output power. Maximum Conducted Output Power is defined as the total transmit power delivered to all antennas and antenna elements averaged across all symbols in the signaling

alphabet when the transmitter is operating at its

maximum power control level. Power must be summed across all antennas and antenna elements. The average must not include any time intervals during which the transmitter is off or is transmitting at a reduced power level. If multiple modes of operation are possible (e.g., alternative modulation methods), the maximum conducted output power is the highest total

transmit power occurring in any mode.

Measuremet Produre

- a) Measure the EUT 6dB bandwith of the emission. reference section 5.3.3 6dB bandwidth results.
- b) When the analyzer RBW is not large enough, the analyzer band power function can be used,
- c) Set the RBW=1MHz(the anlalyzer maximum available), VBW=3MHz, band limits granter than 26dB bandwidth.
- d) Turn averaging off, set sweep to automatic, the span just large enough to capture the emission.

Test mode: 802.11g

e) Use peak detector on max hold. Record the measured channel power.

Measurement Result:

Test Data for Antenna A **Test mode: 802.11b**

СН	Frequency (MHz)	Reading Peak Power (dBm)	Cable Loss (dB)	Output Peak Power (dBm)	Output Peak Power (mW)	Peak Power Limit (dBm)	Result
Low	2412	19.09	0.6	21.69	147.57	30	PASS
Mid	2437	19.42	0.6	22.02	159.22	30	PASS
High	2462	18.99	0.6	21.59	144.21	30	PASS

Test Data for Antenna A

СН	Frequency (MHz)	Reading Peak Power (dBm)	Cable Loss (dB)	Output Peak Power (dBm)	Output Peak Power (mW)	Peak Power Limit (dBm)	Result
Low	2412	23.20	0.6	25.80	380.19	30	PASS
Mid	2437	23.96	0.6	26.56	452.90	30	PASS
High	2462	23.78	0.6	26.38	434.51	30	PASS



Report No.: SHEM120900133402

Page: 28 of 79

Test mode: 802.11b

Test Data for Antenna B

СН	Frequency (MHz)	Reading Peak Power (dBm)	Cable Loss (dB)	Output Peak Power (dBm)	Output Peak Power (mW)	Peak Power Limit (dBm)	Result
Low	2412	18.93	0.6	21.53	142.23	30	PASS
Mid	2437	19.26	0.6	21.86	153.46	30	PASS
High	2462	19.19	0.6	21.79	151.00	30	PASS

Test Data for Antenna B


Data for Antenna B Te						802.11g	
СН	Frequency (MHz)	Reading Peak Power (dBm)	Cable Loss (dB)	Output Peak Power (dBm)	Output Peak Power (mW)	Peak Power Limit (dBm)	Result
Low	2412	23.65	0.6	26.25	421.70	30	PASS
Mid	2437	23.74	0.6	26.34	430.53	30	PASS
High	2462	23.75	0.6	26.35	431.52	30	PASS

Low Channel for Antenna A



*RBW 1 MHz

*VBW 3 MHz

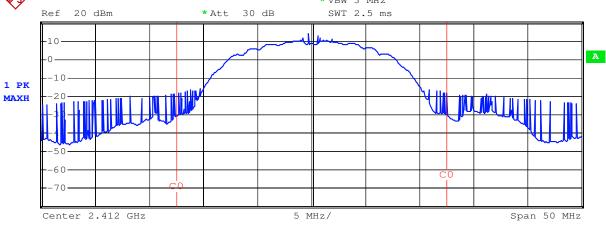

Tx Channel Bandwidth

25 MHz


Power

19.09 dBm

Test mode: 802.11b


Report No.: SHEM120900133402

Page: 29 of 79

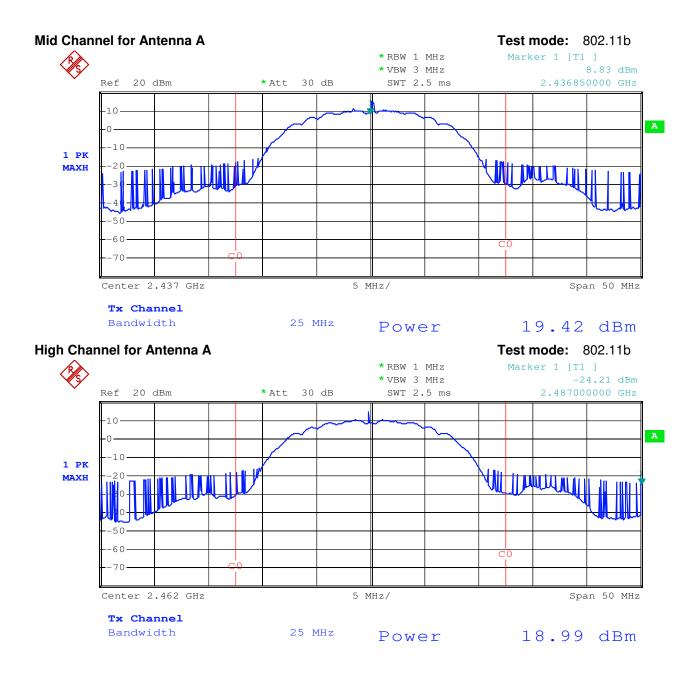


Report No.: SHEM120900133402

Page: 30 of 79

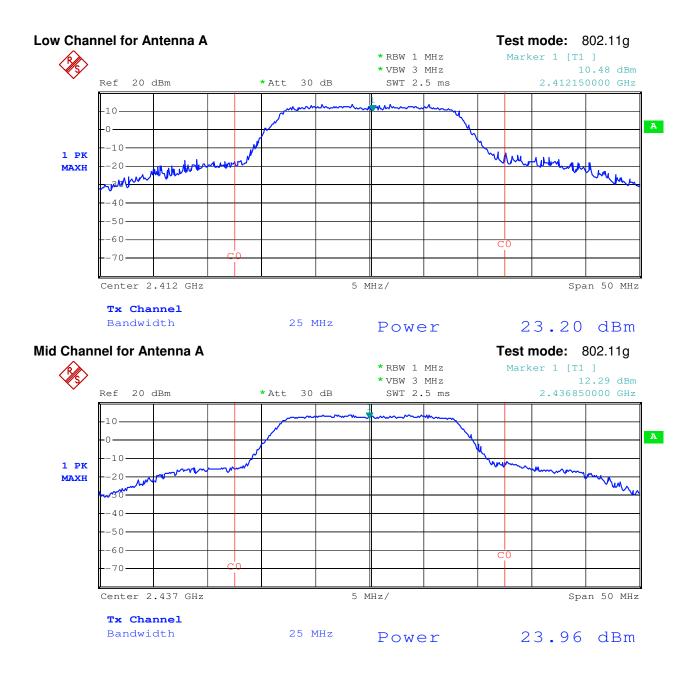


Report No.: SHEM120900133402

Page: 31 of 79

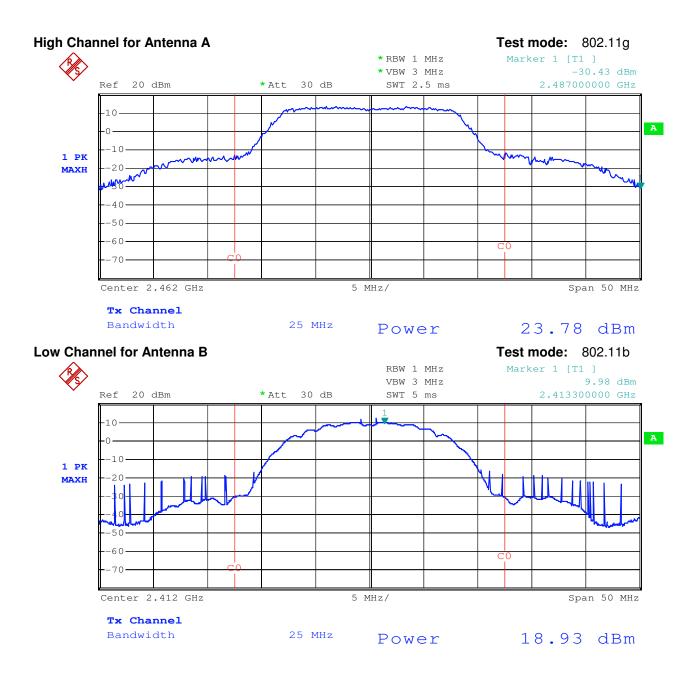


Report No.: SHEM120900133402

Page: 32 of 79

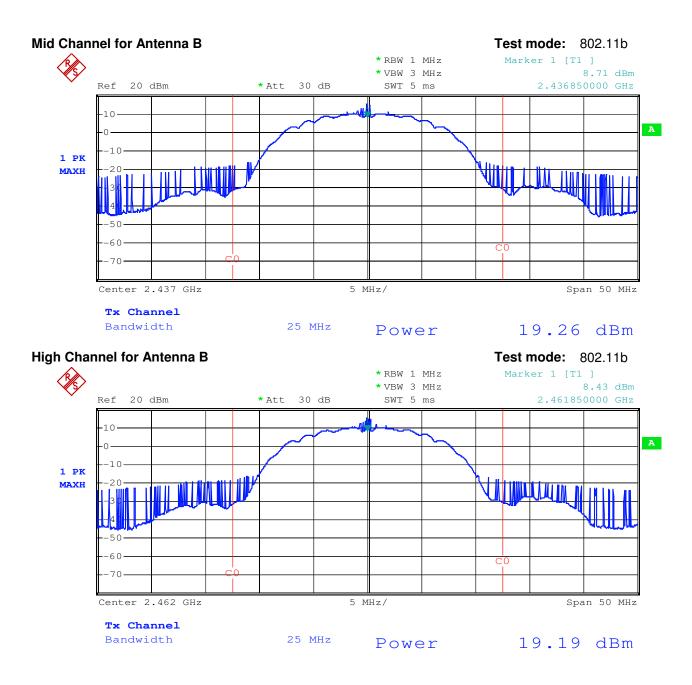

Report No.: SHEM120900133402

Page: 33 of 79

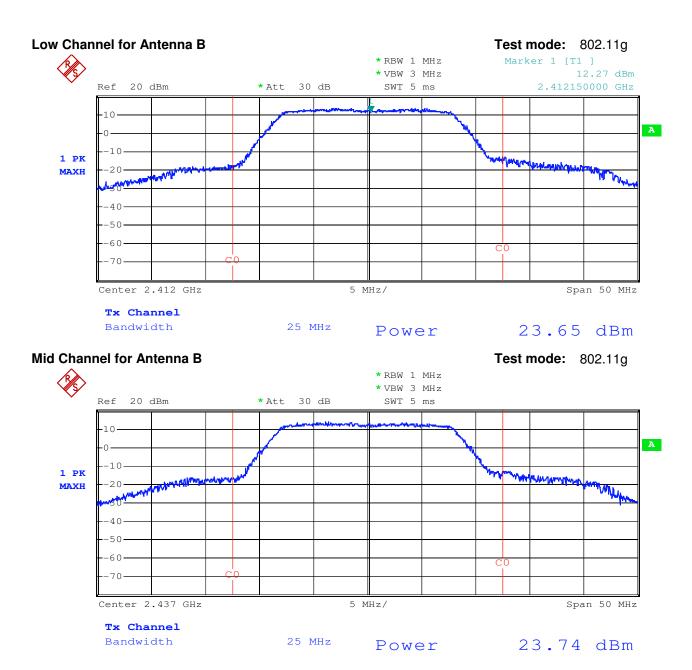

Report No.: SHEM120900133402

Page: 34 of 79



Page: 35 of 79

6.6 Radiated Emission Band Edge

Test Requirement: FCC Part15 247(c) **Test date:** September 17. 2012

Standard Applicable: According to section 15.247(c),in any 100KHz bandwidth outside the

frequency bands in which the spread spectrum intentional radiator in operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100KHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in section 15.205(a), must also comply

with the radiated emission limits specified in 15.209(a).

Measurement Distance: 3m (Semi-Anechoic Chamber)

Limit: 40.0 dBµV/m between 30MHz & 88MHz;

43.5 dB μ V/m between 88MHz & 216MHz; 46.0 dB μ V/m between 216MHz & 960MHz;

AV 54.0 dB μ V/m PK 74.0dB μ V/m above 960MHz.

Measurement Procedure: The EUT was setup according to ANSI 63.10,2009 for compliance to

FCC 47 CFR 15.247 requirements. The EUT is placed on a turn table which is 0.8 m above ground. The turn table is rotated 360 degrees to determine to the position of the maximum emission level. The EUT was positioned such that the distance from antenna to the EUT was 3 menters. The antenna is scanned from 1 meter to 4 meters to find out

the maximum emission level

This is repeated for both horizontal and vertical polarization of the antenna. In order to find the maximum emission, all of the interface cables were manipulated according to ANSIC 63.10:2009 on radiated


measurement.

Spectrum analyzer parameters setting as shown below:

(a) PEAK: RBW=VBW=1MHz / Sweep=AUTO

(b) AVERAGE: RBW=1MHz / VBW=10Hz / Sweep=AUTO

Radiated Emission Test Set-up Frequency Over 1GHz

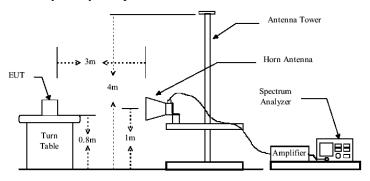


The field strength is calculated by adding the Antenna Factor, Preamplifier Factor & Cable Factor. The basic equation with a sample calculation is as follows:

Final Test Level =Receiver Reading + Antenna Factor + Cable Factor - Preamplifier Factor


Page: 36 of 79

Radiated Bandedge Measurement Result: CH Low 2412MHz Radiated Bandedge Antenna A for 802.11 b Horizontal, Peak Detector:

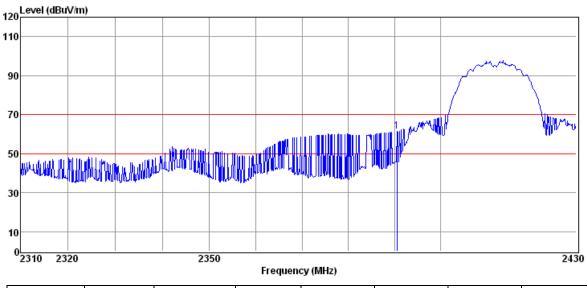

Frequency (MHz)	Peak Reading (dBuV)	Antenna Factor (dB/m)	PreAmp (dB)	Cable Loss (dB)	Peak Level (dBuV/m)	Peak Limit (dBuV/m)	Margin (dB)
2390.57	69.54	27.07	42.46	7.33	61.48	74.00	12.52


Horizontal, Averager Detector:

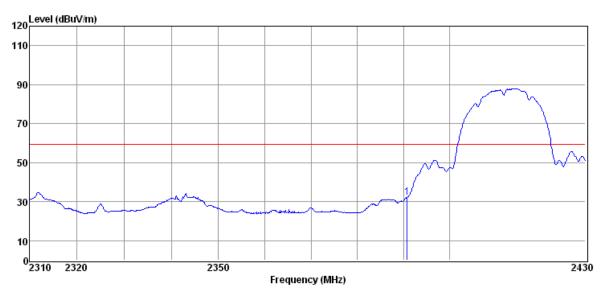

Frequency (MHz)	Reading (dBuV)	Antenna Factor (dB/m)	PreAmp (dB)	Cable Loss (dB)	Averager Level (dBuV/m)	Averager Limit (dBuV/m)	Margin (dB)
2390.82	40.30	27.07	42.46	7.33	32.24	54.00	21.76


Page: 37 of 79

CH Low 2412MHz Radiated Bandedge Antenna A for 802.11 b Vertical, Peak Detector:

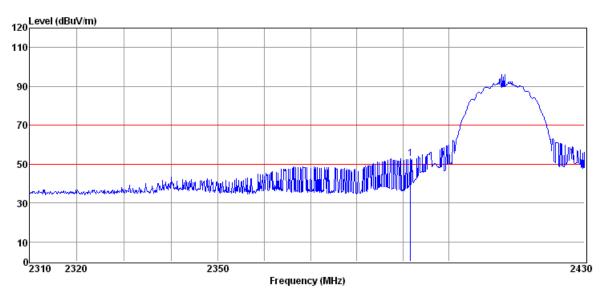

Frequency (MHz)	Peak Reading (dBuV)	Antenna Factor (dB/m)	PreAmp (dB)	Cable Loss (dB)	Peak Level (dBuV/m)	Peak Limit (dBuV/m)	Margin (dB)
2391.66	60.67	27.07	42.46	7.33	52.61	74.00	21.39


Vertical, Averager Detector:

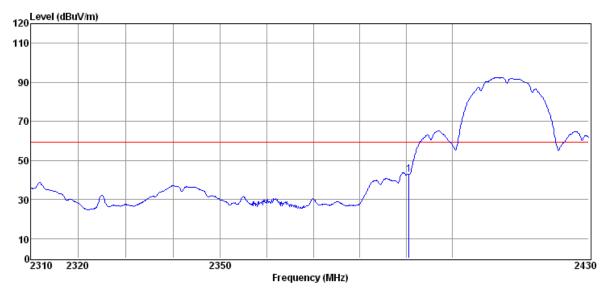

Frequency (MHz)	Reading (dBuV)	Antenna Factor (dB/m)	PreAmp (dB)	Cable Loss (dB)	Averager Level (dBuV/m)	Averager Limit (dBuV/m)	Margin (dB)
2390.70	50.92	27.07	42.46	7.33	42.86	54.00	11.14


Page: 38 of 79

CH High 2462MHz Radiated Bandedge Antenna A for 802.11 b Horizontal, Peak Detector:

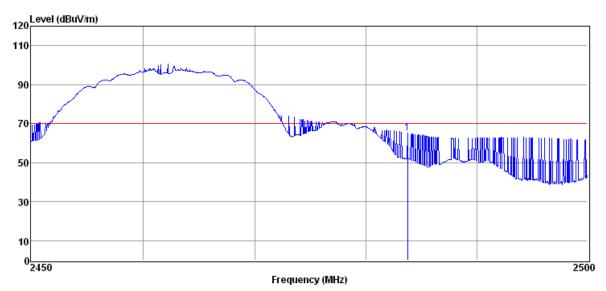

Frequency (MHz)	Peak Reading (dBuV)	Antenna Factor (dB/m)	PreAmp (dB)	Cable Loss (dB)	Peak Level (dBuV/m)	Peak Limit (dBuV/m)	Margin (dB)
2483 34	73 18	27 35	42 49	7.31	65 35	74 00	8 65


Horizontal, Averager Detector:

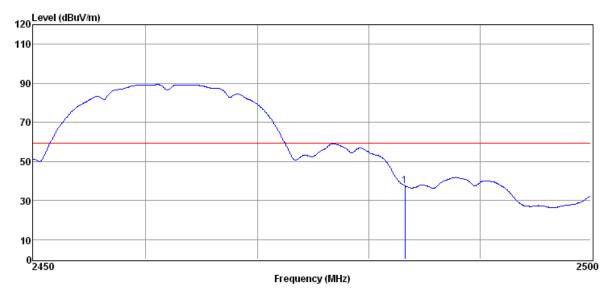

Frequency (MHz)	Reading (dBuV)	Antenna Factor (dB/m)	PreAmp (dB)	Cable Loss (dB)	Averager Level (dBuV/m)	Averager Limit (dBuV/m)	Margin (dB)
2483.24	45.43	27.35	42.49	7.31	37.60	54.00	16.40


Page: 39 of 79

CH High 2462MHz Radiated Bandedge Antenna A for 802.11 b Vertical, Peak Detector:

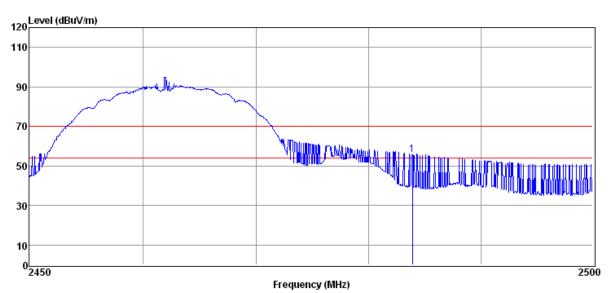

Frequency (MHz)	Peak Reading (dBuV)	Antenna Factor (dB/m)	PreAmp (dB)	Cable Loss (dB)	Peak Level (dBuV/m)	Peak Limit (dBuV/m)	Margin (dB)
2483 42	63 59	27.35	42 49	7 31	55.76	74 00	18 24


Vertical, Averager Detector:

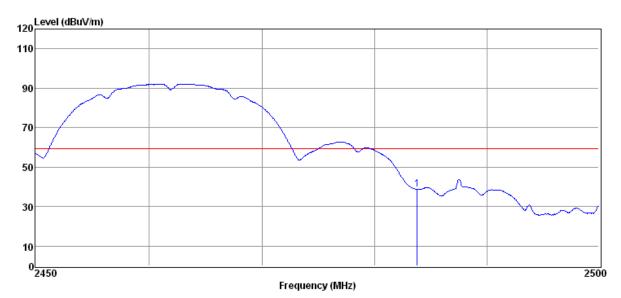

Frequency (MHz)	Reading (dBuV)	Antenna Factor (dB/m)	PreAmp (dB)	Cable Loss (dB)	Averager Level (dBuV/m)	Averager Limit (dBuV/m)	Margin (dB)
2483.24	45.43	27.35	42.49	7.31	37.60	54.00	16.40


Page: 40 of 79

CH Low 2412MHz Radiated Bandedge Antenna A for 802.11 g Horizontal, Peak Detector:

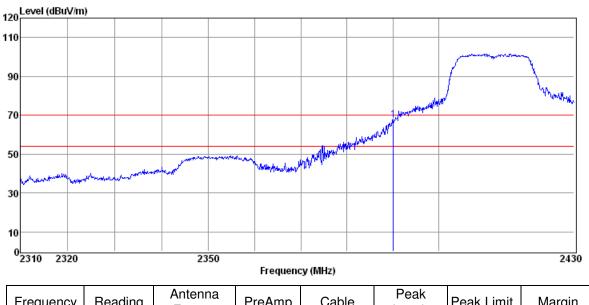

Frequency Reading PreAmp Cable Peak Limit Margin Factor Level (MHz) (dBuV) (dB) Loss (dB) (dBuV/m) (dB) (dBuV/m) (dB/m) 2390.49 75.60 27.07 67.54 74.00 42.46 7.33 6.46


Horizontal, Averager Detector:

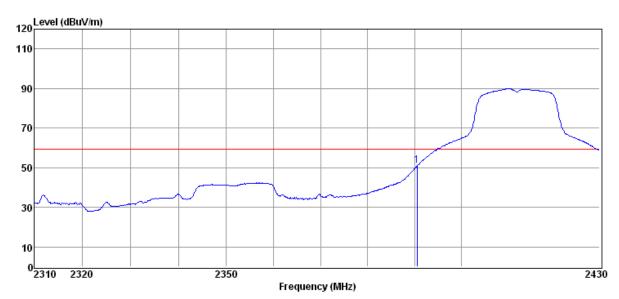

Frequency (MHz)	Reading (dBuV)	Antenna Factor (dB/m)	PreAmp (dB)	Cable Loss (dB)	Averager Level (dBuV/m)	Averager Limit (dBuV/m)	Margin (dB)
2390.57	58.50	27.07	42.46	7.33	50.44	54.00	3.56

Page: 41 of 79

CH Low 2412MHz Radiated Bandedge Antenna A for 802.11 g Vertical, Peak Detector:

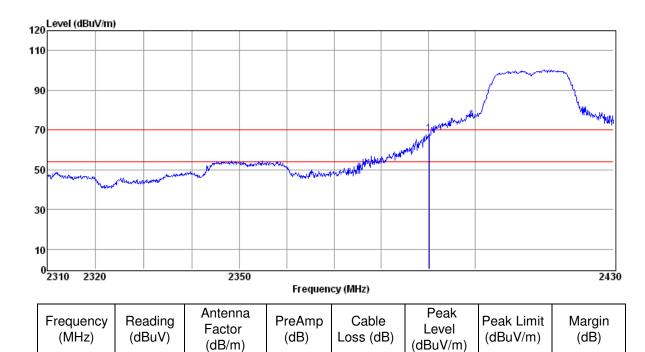


Vertical, Averager Detector:

2390.21

76.13

27.07

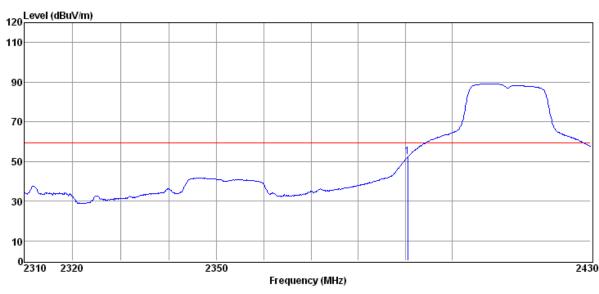

42.46

7.33

68.07


74.00

5.93

	uency IHz)	Reading (dBuV)	Antenna Factor (dB/m)	PreAmp (dB)	Cable Loss (dB)	Averager Level (dBuV/m)	Averager Limit (dBuV/m)	Margin (dB)
239	0.57	58.28	27.07	42.46	7.33	50.22	54	3.78


Page: 42 of 79

CH High 2462MHz Radiated Bandedge Antenna A for 802.11 g Horizontal, Peak Detector:

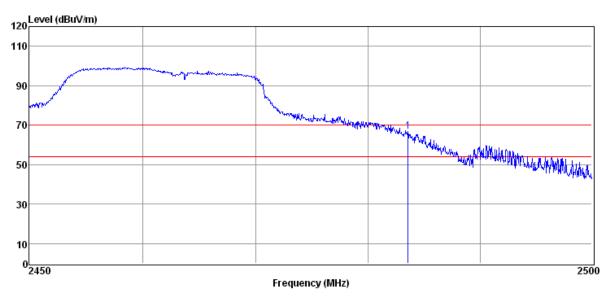

Frequency (MHz)	Reading (dBuV)	Antenna Factor (dB/m)	PreAmp (dB)	Cable Loss (dB)	Peak Level (dBuV/m)	Peak Limit (dBuV/m)	Margin (dB)
2483.39	74.63	27.35	42.49	7.31	66.80	74.00	7.20


Horizontal, Averager Detector:

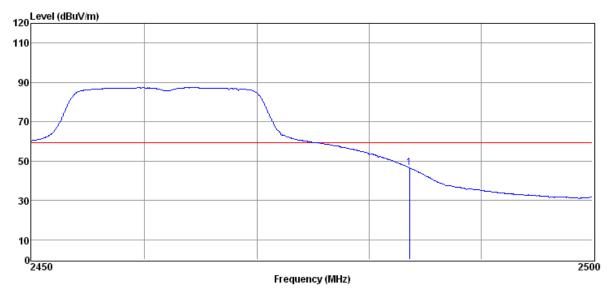

Frequency (MHz)	Reading (dBuV)	Antenna Factor (dB/m)	PreAmp (dB)	Cable Loss (dB)	Averager Level (dBuV/m)	Averager Limit (dBuV/m)	Margin (dB)
2483.48	55.2	27.35	42.49	7.31	47.37	54	6.63


Page: 43 of 79

CH High 2462MHz Radiated Bandedge Antenna A for 802.11 g Vertical, Peak Detector:

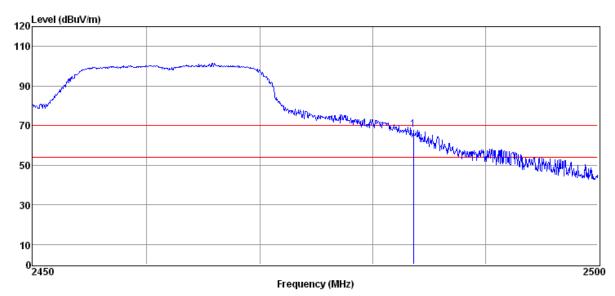

Frequency (MHz)	Reading (dBuV)	Antenna Factor (dB/m)	PreAmp (dB)	Cable Loss (dB)	Peak Level (dBuV/m)	Peak Limit (dBuV/m)	Margin (dB)
2483.39	76.07	27.35	42.49	7.31	68.24	74.00	5.76


Vertical, Averager Detector:

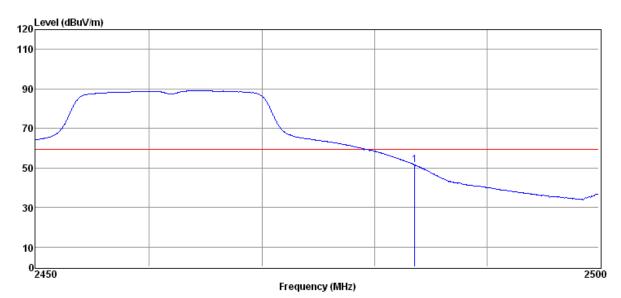

Frequency (MHz)	Reading (dBuV)	Antenna Factor (dB/m)	PreAmp (dB)	Cable Loss (dB)	Averager Level (dBuV/m)	Averager Limit (dBuV/m)	Margin (dB)
2483.41	58.36	27.35	42.49	7.31	50.53	54.00	3.47

Page: 44 of 79

CH Low 2412MHz Radiated Bandedge Antenna B for 802.11 b Horizontal, Peak Detector:

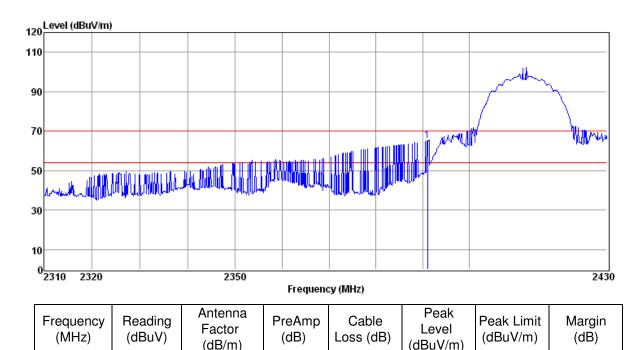


Horizontal, Averager Detector:

73.16

27.07

2391.06

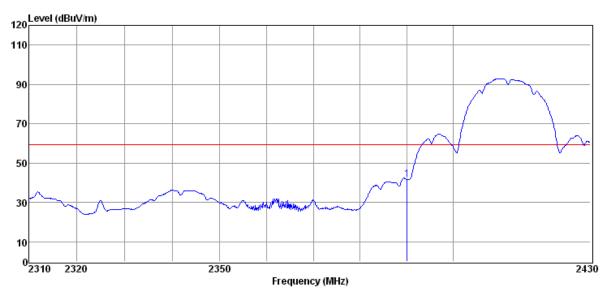

42.46

7.33

65.10

74.00

8.90

Frequency (MHz)	Reading (dBuV)	Antenna Factor (dB/m)	PreAmp (dB)	Cable Loss (dB)	Averager Level (dBuV/m)	Averager Limit (dBuV/m)	Margin (dB)
2390.29	49.53	27.07	42.46	7.33	41.47	54.00	12.53

Page: 45 of 79

(dBuV/m)

53.54


74.00

20.46


CH Low 2412MHz Radiated Bandedge Antenna B for 802.11 b Vertical, Peak Detector:

(dB/m)

27.07

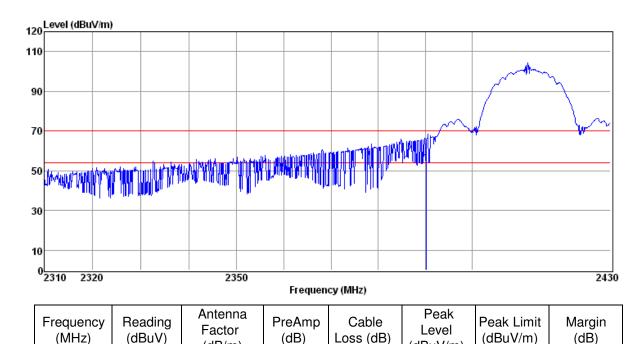

2390.21 61.60 Vertical, Averager Detector:

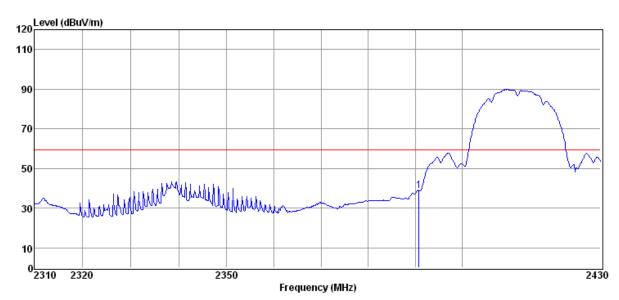


42.46

7.33

Frequency (MHz)	Reading (dBuV)	Antenna Factor (dB/m)	PreAmp (dB)	Cable Loss (dB)	Averager Level (dBuV/m)	Averager Limit (dBuV/m)	Margin (dB)
2390.82	47.02	27.07	42.46	7.33	38.96	54.00	15.04


Page: 46 of 79

CH High 2462MHz Radiated Bandedge Antenna B for 802.11 b Horizontal, Peak Detector:

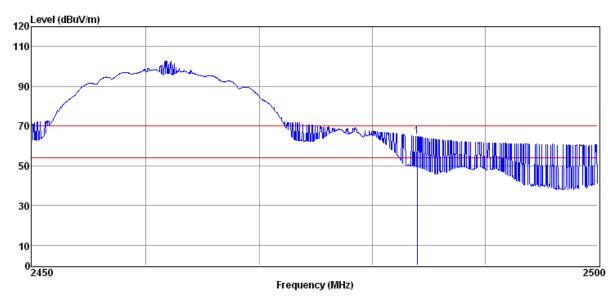

Frequency (MHz)	Reading (dBuV)	Antenna Factor (dB/m)	PreAmp (dB)	Cable Loss (dB)	Peak Level (dBuV/m)	Peak Limit (dBuV/m)	Margin (dB)
2483.38	72.47	27.35	42.49	7.31	64.64	74.00	9.36


Horizontal, Averager Detector:

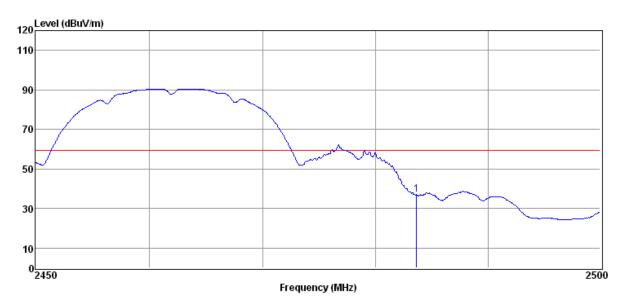

Frequency (MHz)	Reading (dBuV)	Antenna Factor (dB/m)	PreAmp (dB)	Cable Loss (dB)	Averager Level (dBuV/m)	Averager Limit (dBuV/m)	Margin (dB)
2483.46	44.90	27.35	42.49	7.31	37.07	54.00	16.93


Page: 47 of 79

CH High 2462MHz Radiated Bandedge Antenna B for 802.11 b Vertical, Peak Detector:

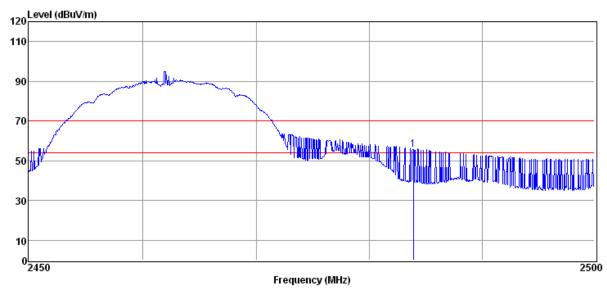

Frequency (MHz)	Reading (dBuV)	Antenna Factor (dB/m)	PreAmp (dB)	Cable Loss (dB)	Peak Level (dBuV/m)	Peak Limit (dBuV/m)	Margin (dB)
2483.47	64.66	27.35	42.49	7.31	56.83	74.00	17.17


Vertical, Averager Detector:

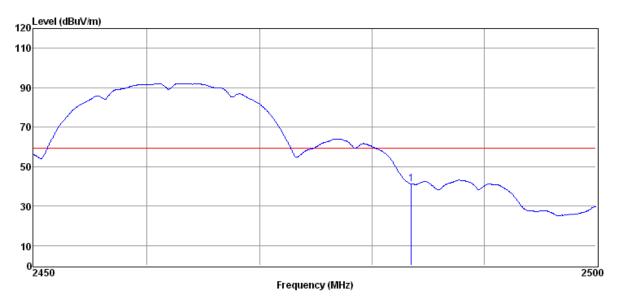

Frequency (MHz)	Reading (dBuV)	Antenna Factor (dB/m)	PreAmp (dB)	Cable Loss (dB)	Averager Level (dBuV/m)	Averager Limit (dBuV/m)	Margin (dB)
2483.49	49.04	27.35	42.49	7.31	41.21	54.00	12.79


Page: 48 of 79

CH Low 2412MHz Radiated Bandedge Antenna B for 802.11 g Horizontal, Peak Detector:

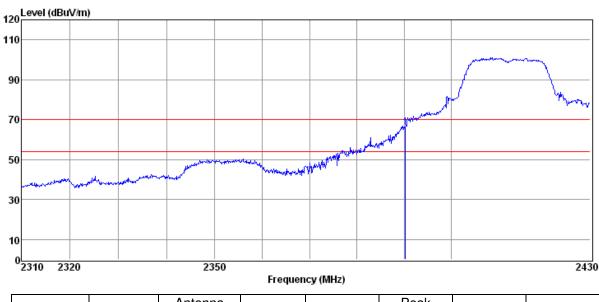

Frequency (MHz)	Reading (dBuV)	Antenna Factor (dB/m)	PreAmp (dB)	Cable Loss (dB)	Peak Level (dBuV/m)	Peak Limit (dBuV/m)	Margin (dB)
2390.33	74.09	27.07	42.46	7.33	66.03	74.00	7.97


Horizontal, Averager Detector:

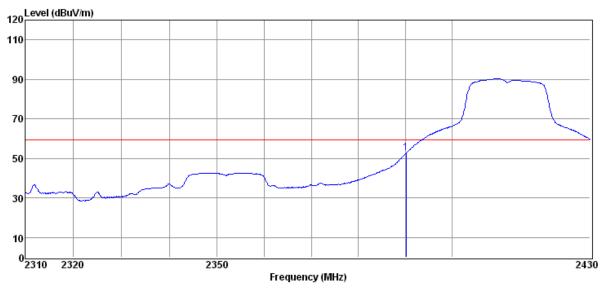


Frequency (MHz)	Reading (dBuV)	Antenna Factor (dB/m)	PreAmp (dB)	Cable Loss (dB)	Averager Level (dBuV/m)	Averager Limit (dBuV/m)	Margin (dB)
2390.21	58.80	27.07	42.46	7.33	50.74	54.00	3.26

Page: 49 of 79

CH Low 2412MHz Radiated Bandedge Antenna B for 802.11 g Vertical, Peak Detector:

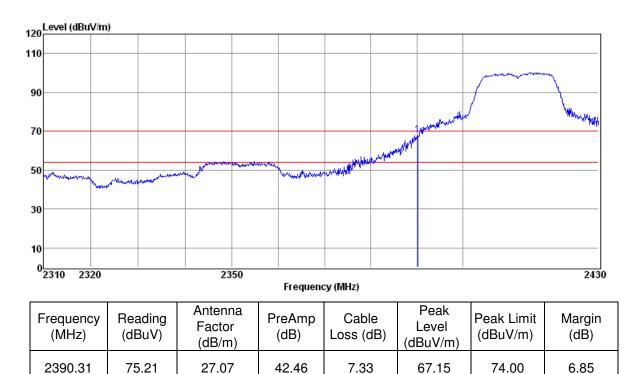

Vertical, Averager Detector:

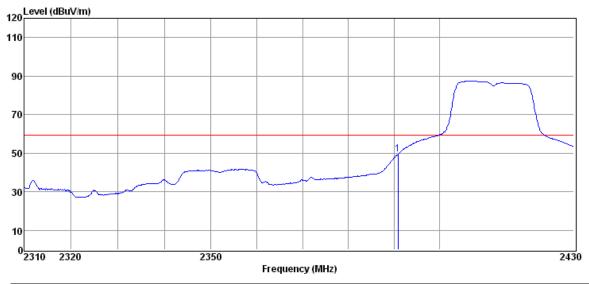


Frequency (MHz)	Reading (dBuV)	Antenna Factor (dB/m)	PreAmp (dB)	Cable Loss (dB)	Averager Level (dBuV/m)	Averager Limit (dBuV/m)	Margin (dB)
2390.94	57.65	27.07	42.46	7.33	49.59	54.00	4.41

CH High 2462MHz Radiated Bandedge Antenna B for 802.11 g

Report No.: SHEM120900133402


Page: 50 of 79

Horizontal, Peak Detector:

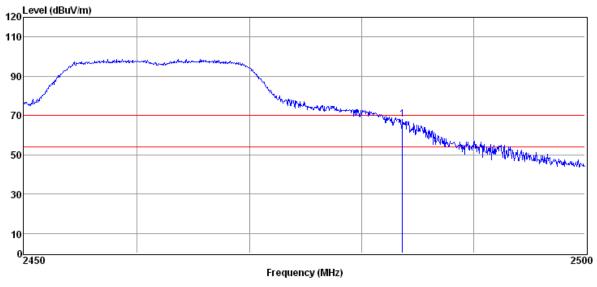

Frequency (MHz)	Reading (dBuV)	Antenna Factor (dB/m)	PreAmp (dB)	Cable Loss (dB)	Peak Level (dBuV/m)	Peak Limit (dBuV/m)	Margin (dB)
2483.42	75.93	27.35	42.49	7.31	68.10	74.00	5.90


Horizontal, Averager Detector:

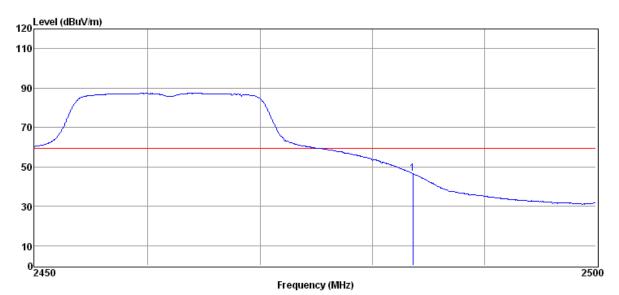

Frequency (MHz)	Reading (dBuV)	Antenna Factor (dB/m)	PreAmp (dB)	Cable Loss (dB)	Averager Level (dBuV/m)	Averager Limit (dBuV/m)	Margin (dB)
2483.44	54.46	27.35	42.49	7.31	46.63	54.00	7.37


Page: 51 of 79

CH High 2462MHz Radiated Bandedge Antenna B for 802.11 g Vertical, Peak Detector:

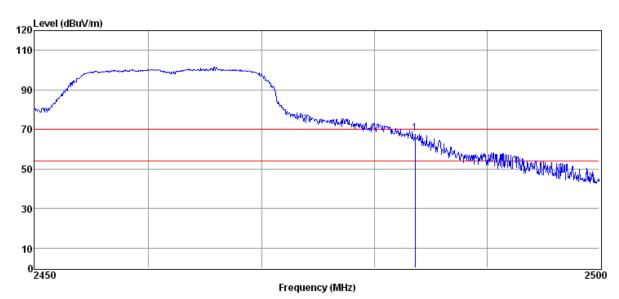

Frequency (MHz)	Reading (dBuV)	Antenna Factor (dB/m)	PreAmp (dB)	Cable Loss (dB)	Peak Level (dBuV/m)	Peak Limit (dBuV/m)	Margin (dB)
2483.37	76.07	27.35	42.49	7.31	68.24	74.00	5.76

Vertical, Averager Detector:

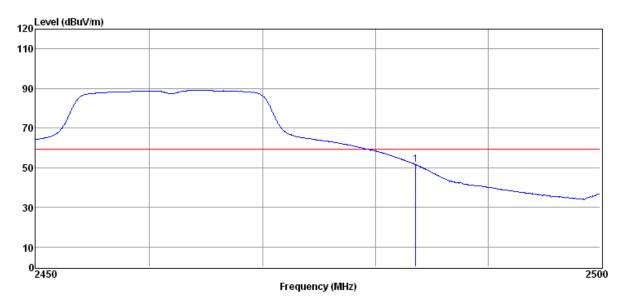

Frequency (MHz)	Reading (dBuV)	Antenna Factor (dB/m)	PreAmp (dB)	Cable Loss (dB)	Averager Level (dBuV/m)	Averager Limit (dBuV/m)	Margin (dB)
2483.47	57.86	27.35	42.49	7.31	50.03	54.00	3.97



Page: 52 of 79

Remark: 1. No any other emission which fall in restricted bands can be detected and be reported.

All frequencies within the "Restricted bands" have been evaluated to compliance. Section 15.205 Restricted bands of operation.

Page: 53 of 79

6.7 Conducted Spurious Emission Test

Test Requirement: FCC Part15 247(c) **Test date:** September 05, 2012

Standard Applicable: According to section 15.247(c),in any 100KHz bandwidth outside

the frequency bands in which the spread spectrum intentional radiator in operating, the radio frequency power that is produced by the intentional radiator shall be at least 20dB below that in the 100KHz bandwidth within the band that contains the highest level of the desired power, In addition, radiated emissions which fall in the restricted bands, as defined in section 15.205(a), must also comply with the radiated emission limits specified in 15.209(a).

Measurement Procedure:

- 1. Place the EUT on the table and set it in transmitting mode.
- 2. Remove the antenna from the EUT and then connect a low loss RF cable from the antenna port to the spectrum analyzer.
 3. Set center frequency of spectrum analyzer = operating

frequency.

4. Set the spectrum analyzer as RBW=100KHz VBW=300KHz,

Sweep = auto


6. Repeat above procedures until all frequency measured were

complete.

Measurement Result:

Conducted spurious Emission Measurement Result Antenna A for 802.11b

CH Low 30MHz-25GHz

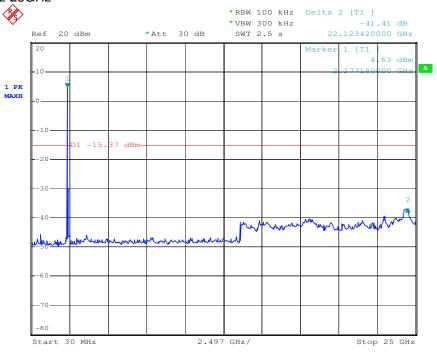


Date: 1.JAN.2000 05:42:40



Report No.: SHEM120900133402


Page: 54 of 79

Band Edge (Conducted Mode)

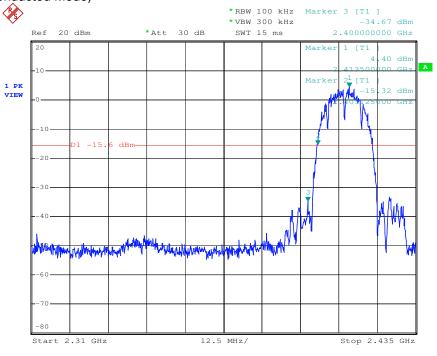

Date: 1.JAN.2000 05:38:04

Ch Mid 30MHz-25GHz

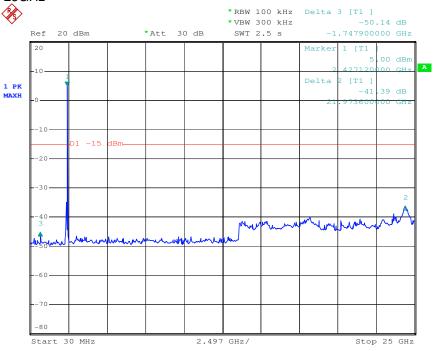


Date: 1.JAN.2000 06:05:38



Report No.: SHEM120900133402


Page: 55 of 79

Ch High 30MHz-25GHz

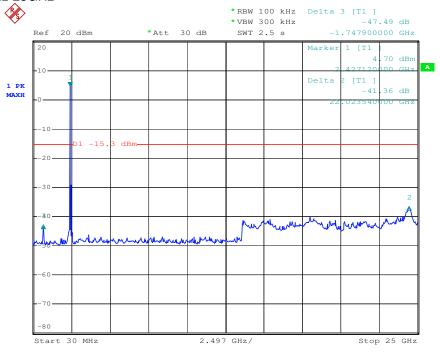

Date: 1.JAN.2000 06:20:01

Band Edge (Conducted Mode)

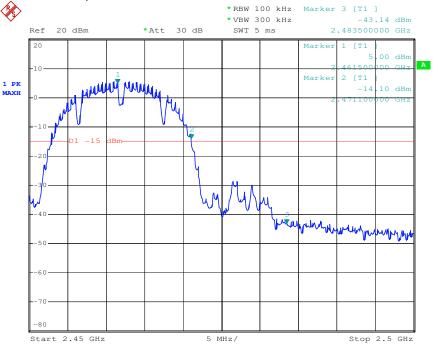

Date: 1.JAN.2000 02:58:48

Antenna A for 802.11g


This document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at www.sgs.com/terms.and.conditions.htm and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at www.sgs.com/terms.e-document.htm. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to thesample(s) tested and such sample(s) are retained for 90 days only



Report No.: SHEM120900133402


Page: 56 of 79

CH Low 30MHz-25GHz

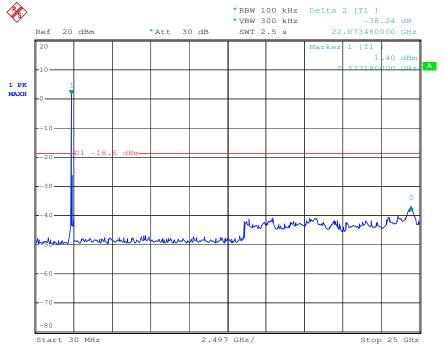

Date: 1.JAN.2000 06:46:26

Band Edge (Conducted Mode)

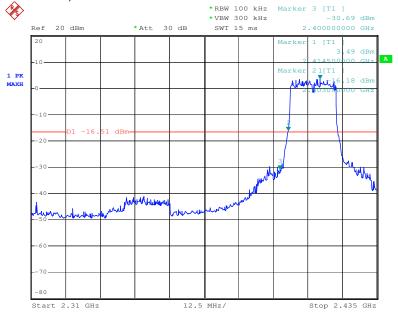


Date: 1.JAN.2000 06:48:17

Ch Mid 30MHz-25GHz




Report No.: SHEM120900133402

Page: 57 of 79

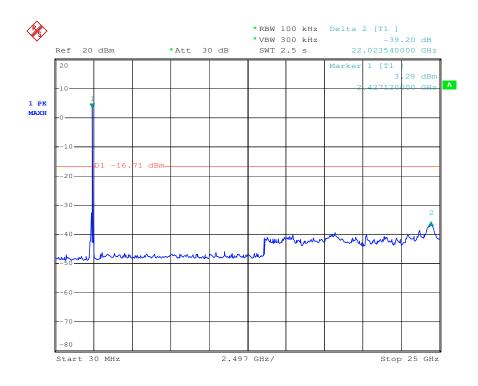

Date: 1.JAN.2000 07:11:40

Ch High 30MHz-25GHz

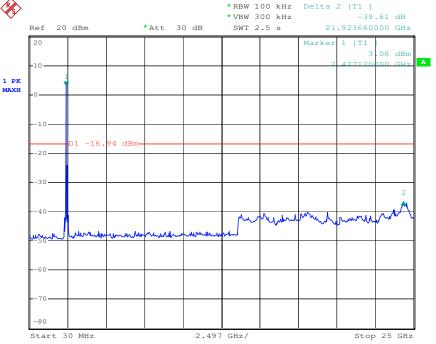


Date: 1.JAN.2000 07:28:39



Report No.: SHEM120900133402

Page: 58 of 79


Band Edge (Conducted Mode)

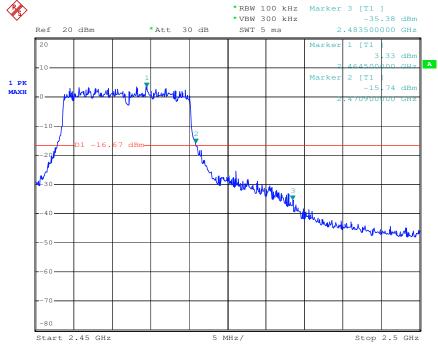

1.JAN.2000 07:30:22 Date:

Antenna B for 802.11b CH Low 30MHz-25GHz



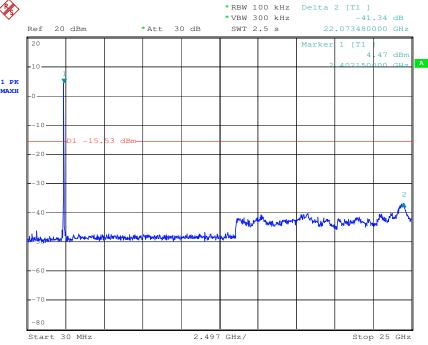


1 .TAN 2000 00:29:39 Date.



Report No.: SHEM120900133402


Page: 59 of 79

Band Edge (Conducted Mode)

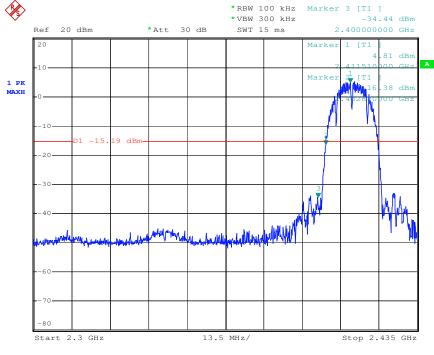

Date: 1.JAN.2000 00:32:01

Ch Mid 30MHz-25GHz

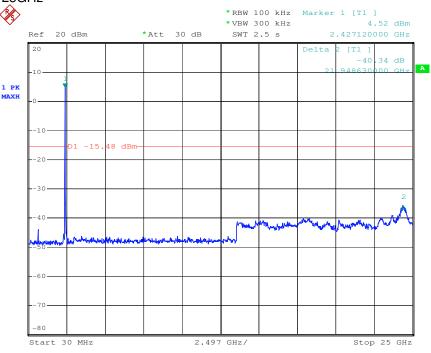


Date: 1.JAN.2000 01:00:02




Report No.: SHEM120900133402

Page: 60 of 79

Ch High 30MHz-25GHz

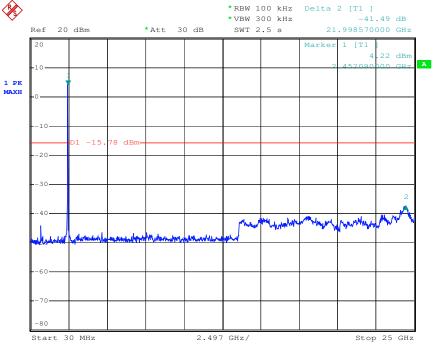

Band Edge (Conducted Mode)

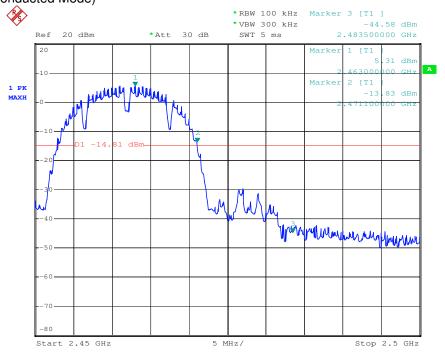


Date: 1.JAN.2000 03:05:13



Report No.: SHEM120900133402


Page: 61 of 79

Antenna B for 802.11g CH Low 30MHz-25GHz

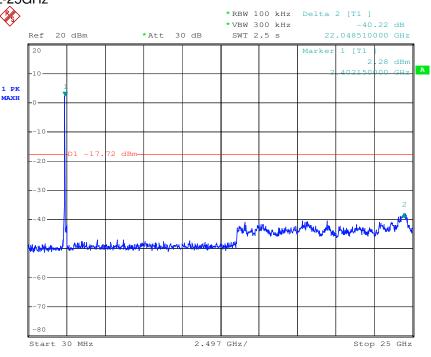

Date: 1.JAN.2000 01:28:13

Band Edge (Conducted Mode)

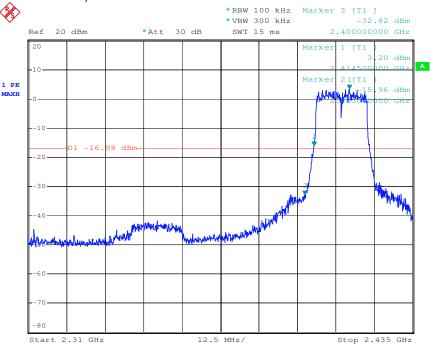


Date: 1.JAN.2000 01:27:18



Report No.: SHEM120900133402

Page: 62 of 79


Ch Mid 30MHz-25GHz

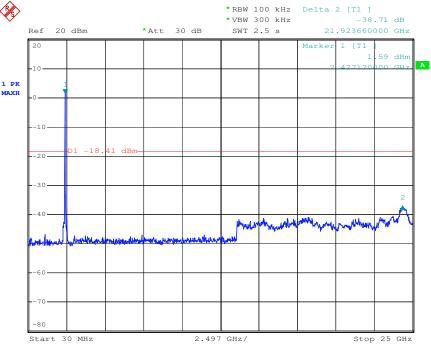

Date:

1.JAN.2000 02:10:50

Ch High 30MHz-25GHz

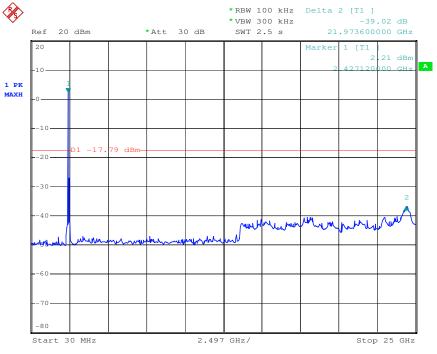


Date: 1.JAN.2000 02:24:21



Report No.: SHEM120900133402

Page: 63 of 79

Band Edge (Conducted Mode)

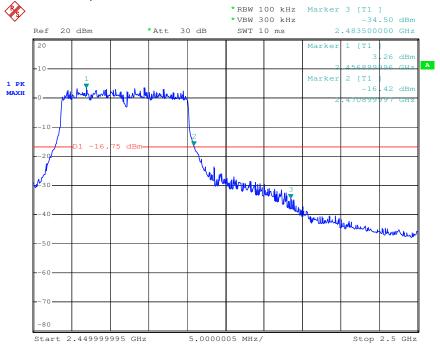

Date: 1.JAN.2000 02:26:17

Page: 64 of 79

6.8 Peak Power Spectral Density

Test Requirement: FCC Part15 247(e) **Test date:** September. 06, 2012

Standard Applicable: According to section 15.247(e), For digitally modulated

systems,the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dB in any 3KHz band during any time in terval of continuous transmission. This power spectral density shall be determined in accordance with the provisions of paragraph(b) of this section. The same method of determining the conducted output power shall be used to determine the powr spectral density.

8

PASS

Measurement Procedure: The EUT was tested according to ANSI C63.10 to FCC 47CFR

15.247 requiremnts.

Set RBW=3KHz,Set VBW=10KHz,Span=3MHz,Sweep

-11.01

time=100s,Set detector=Peak detector.

Measurement Result:

HIGH

802.11b	For Antenna A
---------	---------------

СН	Frequency (MHz)	Reading (dBm)	Cable Loss (dB)	RF Power Density (dBm)	Limit (dBm)	Result
LOW	2412	-7.68	0.6	-7.08	8	PASS
MID	2437	-7.97	0.6	-7.37	8	PASS
HIGH	2462	-7.63	0.6	-7.03	8	PASS

80 <u>2</u> .11g			For Antenna A				
	СН	Frequency (MHz)	Reading (dBm)	Cable Loss (dB)	RF Power Density (dBm)	Limit (dBm)	Result
	LOW	2412	-11.08	0.6	-10.48	8	PASS
	MID	2437	-10.07	0.6	-9.47	8	PASS

0.6

802.11b For Antenna B

-11.61

2462

СН	Frequency (MHz)	Reading (dBm)	Cable Loss (dB)	RF Power Density (dBm)	Limit (dBm)	Result
LOW	2412	-8.09	0.6	-7.49	8	PASS
MID	2437	-7.61	0.6	-7.01	8	PASS
HIGH	2462	-8.12	0.6	-7.52	8	PASS

802.11g For Antenna B

СН	Frequency (MHz)	Reading (dBm)	Cable Loss (dB)	RF Power Density (dBm)	Limit (dBm)	Result
LOW	2412	-12.02	0.6	-11.42	8	PASS
MID	2437	-11.11	0.6	-10.51	8	PASS
HIGH	2462	-10.47	0.6	-9.87	8	PASS




Report No.: SHEM120900133402

Page: 65 of 79






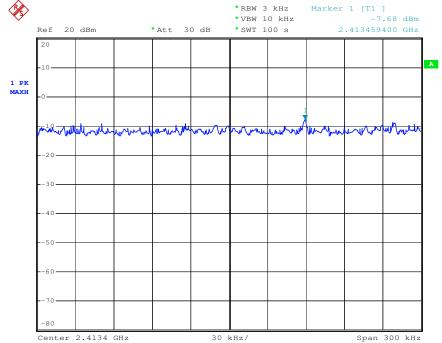

802.11b Middle Channel

1.JAN.2000 05:49:01

Antenna A

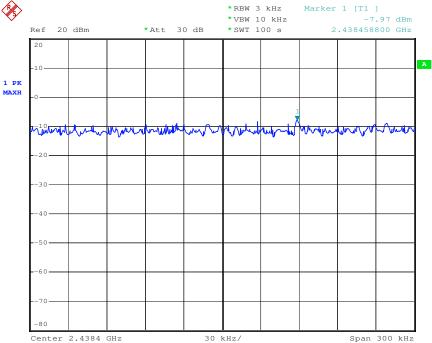


Date: 1.JAN.2000 06:15:11



Report No.: SHEM120900133402


Page: 66 of 79

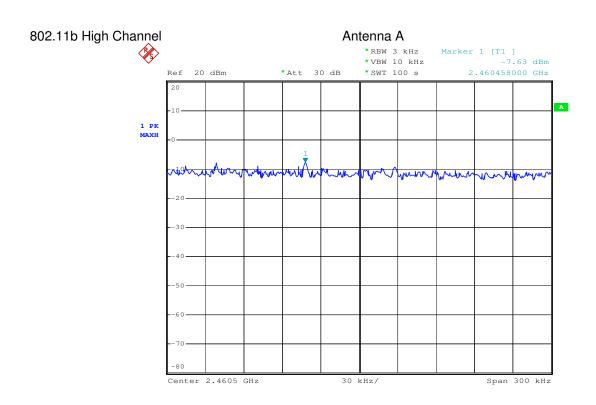

802.11g Low Channel

1.JAN.2000 06:36:59

Antenna A

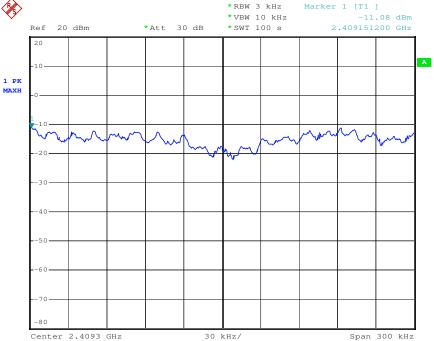


Date: 1.JAN.2000 06:58:55



Report No.: SHEM120900133402


Page: 67 of 79

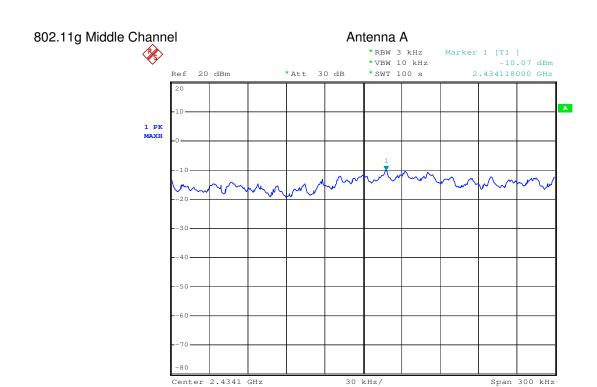

802.11g High Channel

1.JAN.2000 07:19:27

Antenna A

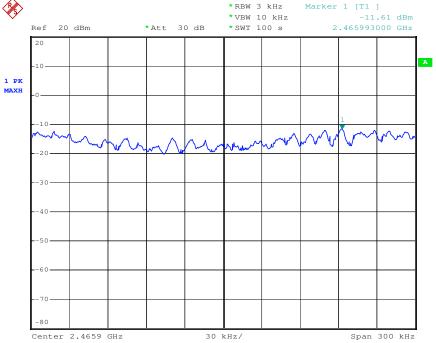



Date: 1.JAN.2000 07:47:52



Report No.: SHEM120900133402

Page: 68 of 79

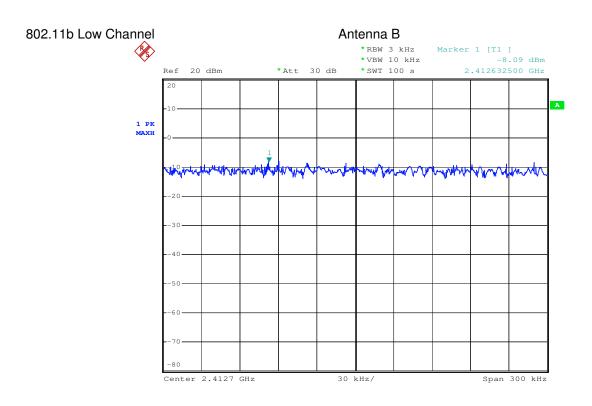

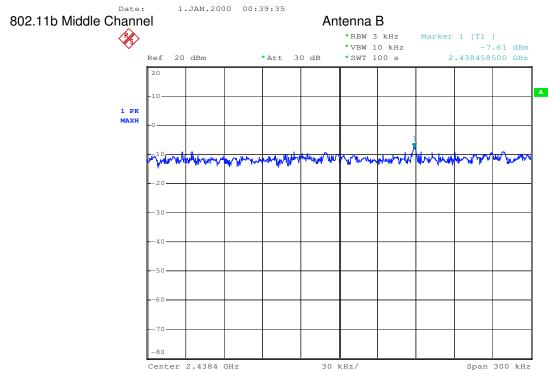


Date: 1.JAN.2000 01:06:21



Report No.: SHEM120900133402


Page: 69 of 79

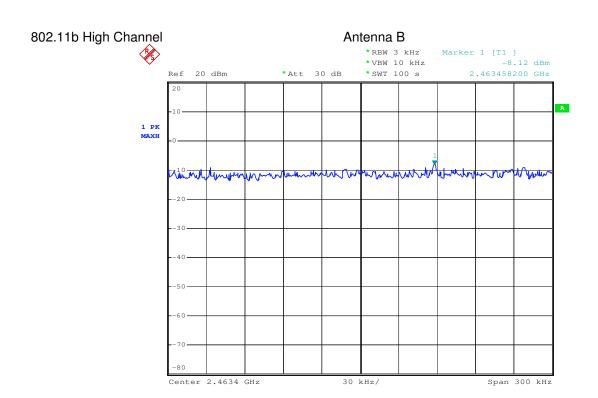

802.11g Low Channel

1.JAN.2000 02:38:13

Antenna B

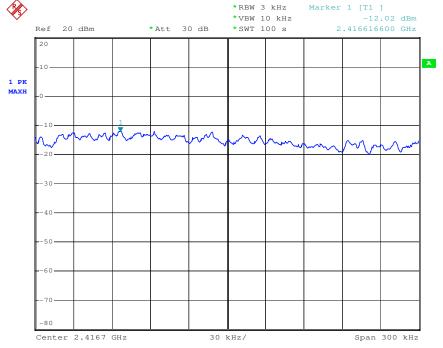


Date: 1.JAN.2000 02:43:48



Report No.: SHEM120900133402


Page: 70 of 79

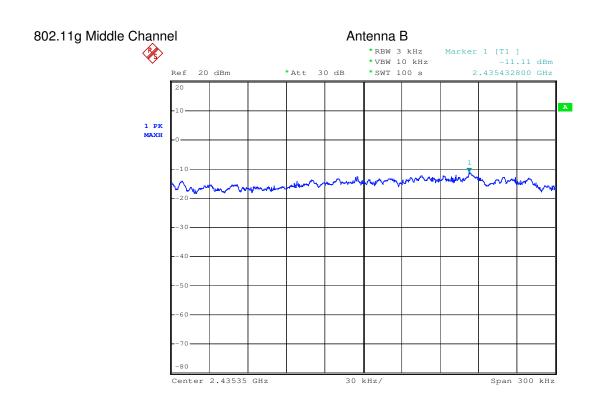

802.11g High Channel

1.JAN.2000 02:19:41

Antenna B

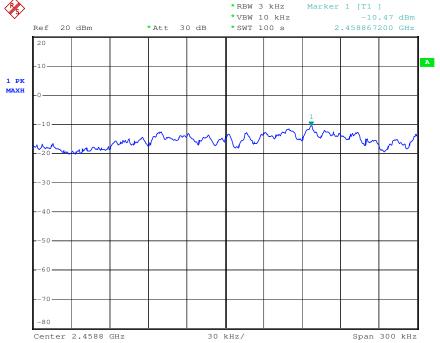

Date: 1.JAN.2000 02:30:47

Page: 71 of 79

6.9 Occupied Bandwidth Test

Test Requirement: RSS-Gen Issue 3 Clause 4.6.1

Test date: September. 11, 2012

Standard Applicable According to the section RSS-Gen Issue 3 Clause 4.6.1

EUT SetupThe occupied bandwidth per RSS-Gen Issue 3 Clause 4.6.1 was measured using the Spectrum Analyzer with the resolutions set at

100kHz,the video bandwidth set at 300kHz.

Measurement Result:

802.11b For Antenna A

Channel	Frequency (MHz)	Bandwidth (MHz)
LOW	2412	16.08
MID	2437	16.16
HIGH	2462	16.08

802.11g For Antenna A

Channel	Frequency (MHz)	Bandwidth (MHz)
LOW	2412	16.56
MID	2437	16.56
HIGH	2462	16.56

802.11b For Antenna B

Channel	Frequency (MHz)	Bandwidth (MHz)
LOW	2412	16.08
MID	2437	16.08
HIGH	2462	16.08


802.11g For Antenna B

Channel	Frequency (MHz)	Bandwidth (MHz)
LOW	2412	16.48
MID	2437	16.48
HIGH	2462	16.56



Report No.: SHEM120900133402

Page: 72 of 79

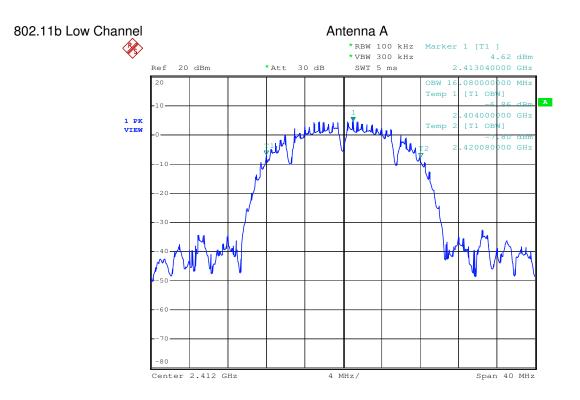




Date: 1.JAN.2000 01:21:09



Report No.: SHEM120900133402


Page: 73 of 79

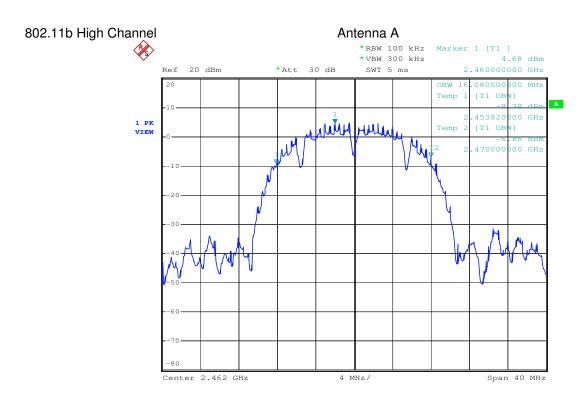





Antenna A

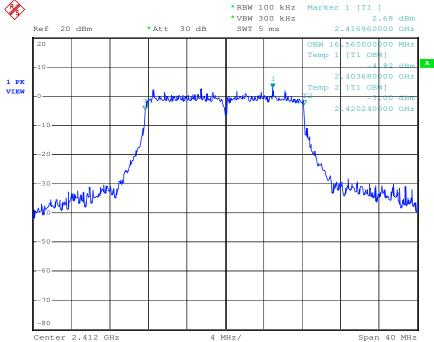


Date: 1.JAN.2000 01:23:52



Report No.: SHEM120900133402


Page: 74 of 79

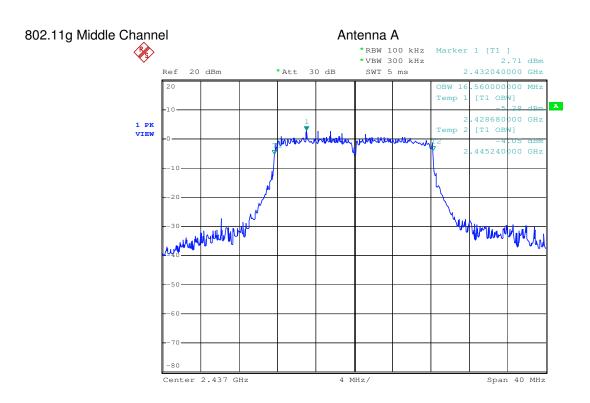

802.11g High Channel

1.JAN.2000 01:26:42

Antenna A

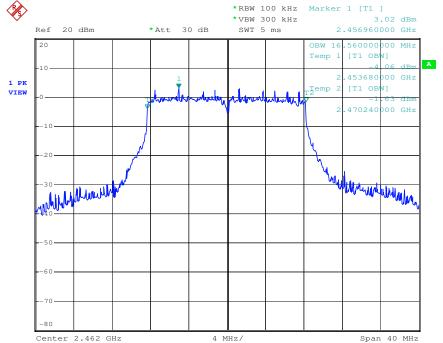



Date: 1.JAN.2000 01:27:39



Report No.: SHEM120900133402

Page: 75 of 79

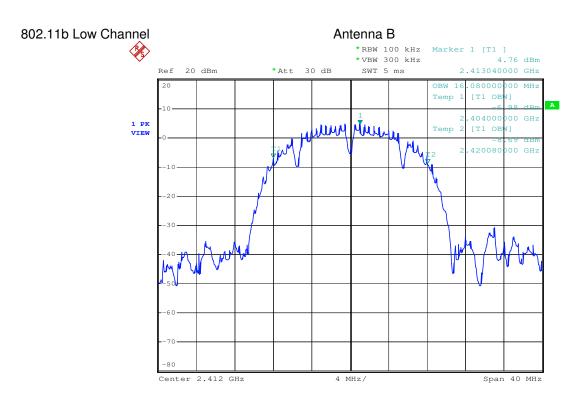

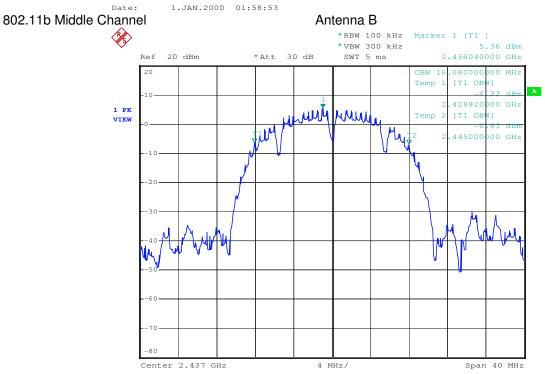



Date: 1.JAN.2000 02:01:05



Report No.: SHEM120900133402


Page: 76 of 79

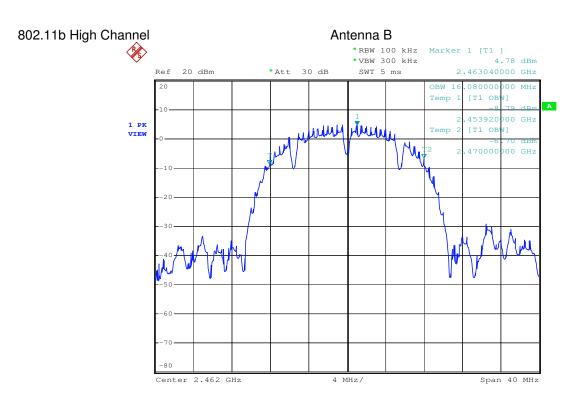





Antenna B

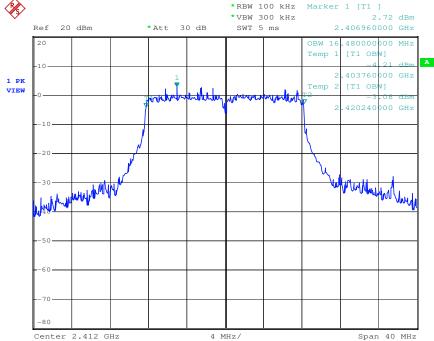



Date: 1.JAN.2000 02:03:37



Report No.: SHEM120900133402


Page: 77 of 79

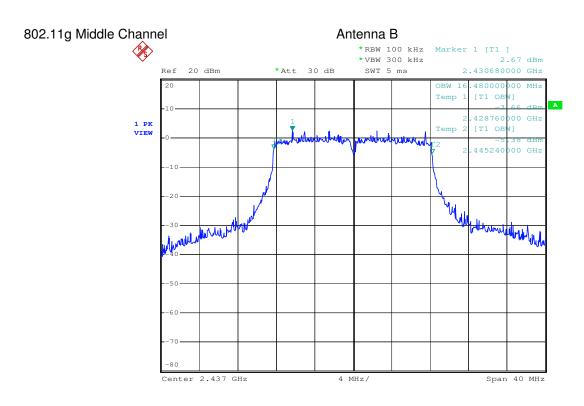





Antenna B

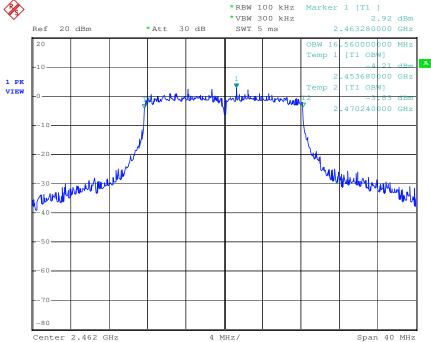

Date: 1.JAN.2000 02:06:40

Page: 78 of 79

7 Test Setup Photographs

Refer to the < Appendix C_Test Setup photos>.

8 EUT Constructional Details

Refer to the < Appendix A External Photos > & < Appendix B Internal Photos >.

End of Report