

RF Test Report

FCC PART 15.247 PART 15.249

5LINX ENTERPRISES, INC.

5LINXGLOBAL WiFi Cellphone

Model: GM100N WM680

Jun 28 2010

Report No.: 1005007-02
(This report supersedes NONE)



Modifications made to the product : None

This Test Report is Issued Under the Authority of:

| | |
|----------------------------------|-----------------------------------|
| | |
| Alex Wang Compliance Engineer | Jackson Chen Technical Manager |

This test report may be reproduced in full only.
Test result presented in this test report is applicable to the representative sample only.

SIEMIC, INC.
Accessing global markets



Laboratory Introduction

SIEMIC, headquartered in the heart of Silicon Valley, with superior facilities in US and Asia, is one of the leading independent testing and certification facilities providing customers with one-stop shop services for Compliance Testing and Global Certifications.



In addition to testing and certification, SIEMIC provides initial design reviews and compliance management through out a project. Our extensive experience with China, Asia Pacific, North America, European, and international compliance requirements, assures the fastest, most cost effective way to attain regulatory compliance for the global markets.

Accreditations for Conformity Assessment

| Country/Region | Accreditation Body | Scope |
|----------------|------------------------|------------------------------------|
| USA | FCC, A2LA | EMC , RF/Wireless , Telecom |
| Canada | IC, A2LA, NIST | EMC, RF/Wireless , Telecom |
| Taiwan | BSMI , NCC , NIST | EMC, RF, Telecom , Safety |
| Hong Kong | OFTA , NIST | RF/Wireless , Telecom |
| Australia | NATA, NIST | EMC, RF, Telecom , Safety |
| Korea | KCC/RRA, NIST | EMI, EMS, RF , Telecom, Safety |
| Japan | VCCI, JATE, TELEC, RFT | EMI, RF/Wireless, Telecom |
| Mexico | NOM, COFETEL, Caniety | Safety, EMC , RF/Wireless, Telecom |
| Europe | A2LA, NIST | EMC, RF, Telecom , Safety |

Accreditations for Product Certifications

| Country | Accreditation Body | Scope |
|-----------|--------------------|--------------------|
| USA | FCC TCB, NIST | EMC , RF , Telecom |
| Canada | IC FCB , NIST | EMC , RF , Telecom |
| Singapore | iDA, NIST | EMC , RF , Telecom |



Title: RF Test Report for 5LINXGLOBAL WiFi Cellphone
Model: GM100N WM680
To: FCC PART 15.247,15.249

Serial#: 1005007-02
Issue Date: Jun 28 2010
Page 3 of 65
www.siemic.com.cn

This page has been left blank intentionally.



CONTENTS

| | | |
|---|---|----|
| 1 | EXECUTIVE SUMMARY & EUT INFORMATION | 5 |
| 2 | TECHNICAL DETAILS | 6 |
| 3 | MODIFICATION | 7 |
| 4 | TEST SUMMARY | 8 |
| 5 | MEASUREMENTS, EXAMINATION AND DERIVED RESULTS | 9 |
| | ANNEX A. TEST INSTRUMENT & METHOD..... | 54 |
| | ANNEX B. EUT AND TEST SETUP PHOTOGRAPHS..... | 58 |
| | ANNEX C. TEST SETUP AND SUPPORTING EQUIPMENT..... | 60 |
| | ANNEX D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PART LIST | 64 |
| | ANNEX E. SIEMIC ACCREDITATION CERTIFICATES | 65 |



1 Executive Summary & EUT information

The purpose of this test programme was to demonstrate compliance of the 5LINX Enterprises, Inc., 5LINXGLOBAL WiFi Cellphone , and model: GM100N WM680 against the current Stipulated Standards. The 5LINXGLOBAL WiFi Cellphone has demonstrated compliance with the FCC PART 15.247 ,15.249.

EUT Information

| | |
|-------------------------------------|---|
| EUT Description | Dual-mode GSM/WiFi cellular phone |
| Model No | GM100N WM680 |
| Input Power | DC 3.7V(Li-ion Battery) |
| Classification | 802.11.b/g WiFi and Bluetooth product Per FCC PART 15.247 ,15.249 |
| Per Stipulated Test Standard | |



2 TECHNICAL DETAILS

| | |
|---------------------------------|--|
| Purpose | Compliance testing of WIFI Module with stipulated standard |
| Applicant / Client | 5LINX Enterprises, Inc. 275 Kenneth Drive, Rochester, NY, 14623, U.S.A. |
| Manufacturer | W&M Telecommunication Co.,Ltd B-10F,Xinghua Building,Shennan Rd east, Futian district,Shenzhen,China |
| Laboratory performing the tests | SIEMIC Nanjing (China) Laboratories NO.2-1,Longcang Dadao, Yuhua Economic Development Zone, Nanjing, China Tel:+86(25)86730128/86730129 Fax:+86(25)86730127 Email:info@siemic.com |
| Test report reference number | 1005007-02 |
| Date EUT received | Jun 08 2010 |
| Standard applied | FCC PART 15.247 ,15.249 |
| Dates of test (from – to) | Jun 10~28 2010 |
| No of Units: | #2 |
| Equipment Category: | DTS, DXX |
| Model : | GM100N WM680 |
| RF Operating Frequency (ies) | WiFi:2412MHz-2462MHz Bluetooth:2402MHz-2480MHz |
| Modulation : | CCK, OFDM (WLAN) GFSK (BT) |
| Maximum Output Power | 10.0dBm (WLAN) |
| ID Number | YKMGM100N |



Title: RF Test Report for 5LINXGLOBAL WiFi Cellphone
Model: GM100N WM680
To: FCC PART 15.247,15.249

Serial#: 1005007-02
Issue Date: Jun 28 2010
Page 7 of 65
www.siemic.com.cn

3 MODIFICATION

NONE



4 TEST SUMMARY

The product was tested in accordance with the following specifications.
All testing has been performed according to below product classification:

Test Results Summary

| Test Standard | Description | Pass / Fail |
|---|----------------------------------|-------------|
| CFR 47 Part 15 | | |
| 15.203 | Antenna Requirement | Pass |
| 15.205 | Restricted Band of Operation | Pass |
| 15.207(a) | Conducted Emissions Voltage | Pass |
| 15.247(a)(1) | Channel Separation | N/A |
| 15.247(a)(1) | Occupied Bandwidth | Pass |
| 15.247(a)(2) | 6dB Bandwidth | Pass |
| 15.247(a)(1) | Number of Hopping Channels | N/A |
| 15.247(a)(1) | Time of Occupancy | N/A |
| 15.247(b) | Output Power | Pass |
| 15.247(c) | Antenna Gain > 6 dBi | Pass |
| 15.247(d) | Conducted Spurious Emissions | Pass |
| 15.209; 15.247(d);15.249 | Radiated Spurious Emissions | Pass |
| 15.247(e) | Power Spectral Density | Pass |
| 15.247(f) | Hybrid System Requirement | N/A |
| 15.247(g) | Hopping Capability | N/A |
| 15.247(h) | Hopping Coordination Requirement | N/A |
| 15.247(i) | RF Exposure requirement | Pass |
| ANSI C63.4: 2009 | | |
| PS: All measurement uncertainties are not taken into consideration for all presented test result. | | |



5 MEASUREMENTS, EXAMINATION AND DERIVED RESULTS

5.1 Antenna Requirement

Requirement(s): 47 CFR §15.203

An intentional radiator shall be designed to ensure that no antenna other than that furnished by the responsible party shall be used with the device.

Antenna requirement must meet at least one of the following:

- a) Antenna must be permanently attached to the device.
- b) Antenna must use a unique type of connector to attach to the device.
- c) Device must be professionally installed. Installer shall be responsible for ensuring that the correct antenna is employed with the device.

The EUT antenna is permanently attached to the device.



5.2 Conducted Emissions Voltage



Requirement:

| Frequency of emission (MHz) | Conducted limit (dB μ V) | |
|-----------------------------|------------------------------|-----------|
| | Quasi-peak | Average |
| 0.15–0.5 | 66 to 56* | 56 to 46* |
| 0.5–5 | 56 | 46 |
| 5–30 | 60 | 50 |

*Decreases with the logarithm of the frequency.

Procedures:



1. All possible modes of operation were investigated. Only the 6 worst case emissions measured, using the correct CISPR and Average detectors, are reported. All other emissions were relatively insignificant.
2. A "–ve" margin indicates a PASS as it refers to the margin present below the limit line at the particular frequency.
3. Conducted Emissions Measurement Uncertainty
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 9kHz – 30MHz (Average & Quasi-peak) is ± 3.5 dB.
4. Environmental Conditions
Temperature 16°C
Relative Humidity 50%
Atmospheric Pressure 1019mbar
5. Test date : Jun 10~28 2010
Tested By : Alex Wang

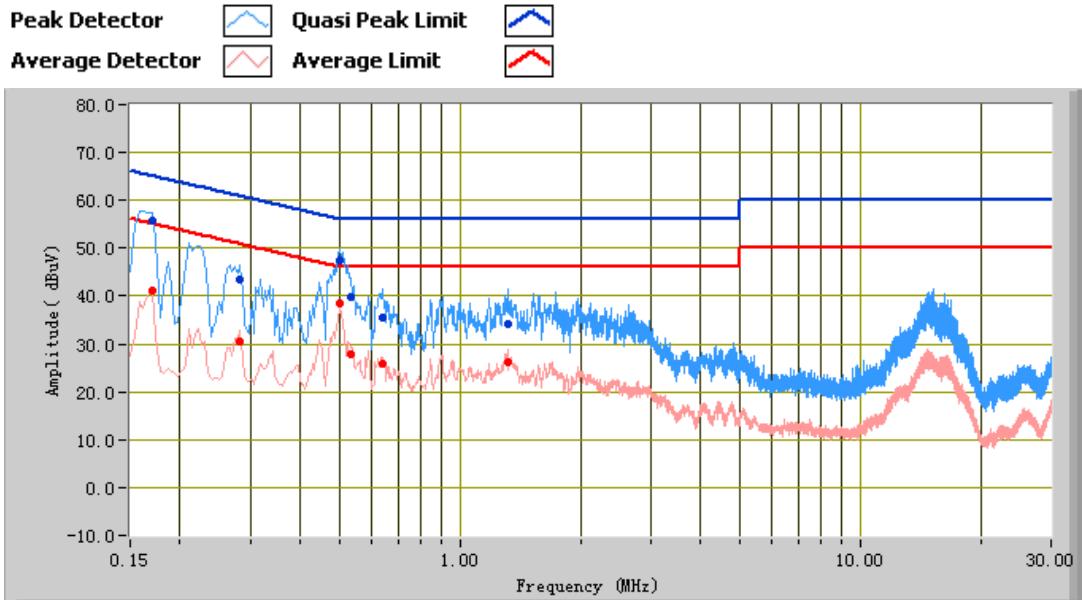

Test Data

Line

| Frequency (MHz) | Quasi Peak (dBuV) | Limit (dBuV) | Margin (dB) | Average (dBuV) | Limit (dBuV) | Margin (dB) | Factors (dB) |
|-----------------|-------------------|--------------|-------------|----------------|--------------|-------------|--------------|
| 0.50 | 47.29 | 56.00 | -8.71 | 38.53 | 46.00 | -7.47 | 10.17 |
| 0.17 | 55.86 | 65.13 | -9.26 | 41.06 | 55.13 | -14.07 | 10.36 |
| 0.53 | 39.68 | 56.00 | -16.32 | 27.92 | 46.00 | -18.08 | 10.16 |
| 0.28 | 43.53 | 60.84 | -17.32 | 30.65 | 50.84 | -20.19 | 10.21 |
| 0.64 | 35.39 | 56.00 | -20.61 | 25.87 | 46.00 | -20.13 | 10.14 |
| 1.32 | 34.15 | 56.00 | -21.85 | 26.25 | 46.00 | -19.75 | 10.17 |

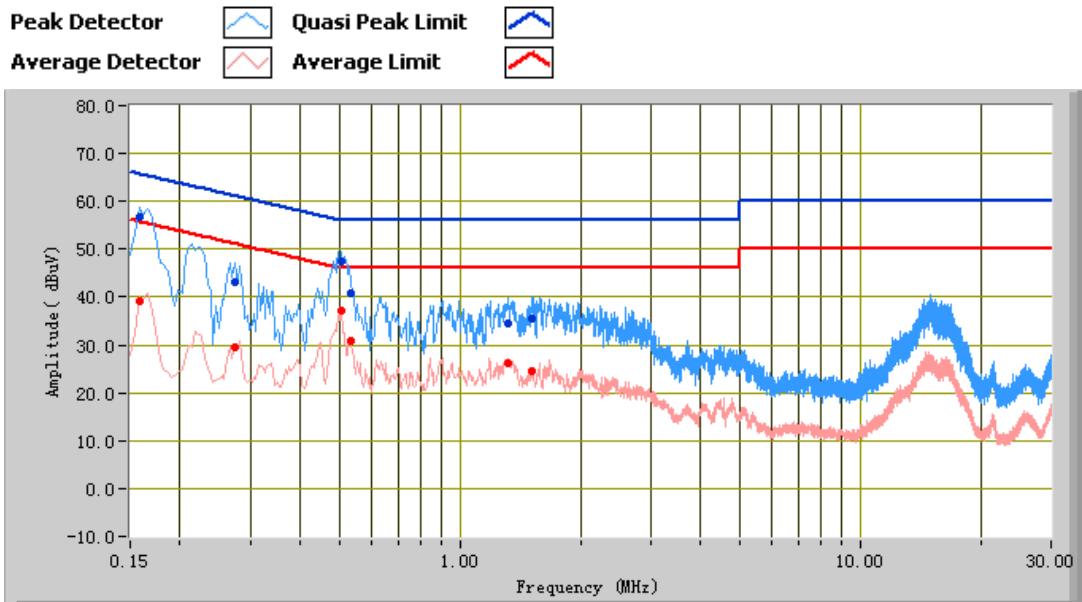

Test Data

Neutral

| Frequency (MHz) | Quasi Peak (dBuV) | Limit (dBuV) | Margin (dB) | Average (dBuV) | Limit (dBuV) | Margin (dB) | Factors (dB) |
|-----------------|-------------------|--------------|-------------|----------------|--------------|-------------|--------------|
| 0.51 | 47.38 | 56.00 | -8.62 | 37.17 | 46.00 | -8.83 | 10.17 |
| 0.16 | 56.79 | 65.75 | -8.96 | 39.18 | 55.75 | -16.57 | 10.38 |
| 0.53 | 40.72 | 56.00 | -15.28 | 30.72 | 46.00 | -15.28 | 10.16 |
| 0.27 | 42.97 | 61.09 | -18.11 | 29.40 | 51.09 | -21.69 | 10.22 |
| 1.52 | 35.62 | 56.00 | -20.38 | 24.48 | 46.00 | -21.52 | 10.18 |
| 1.31 | 34.63 | 56.00 | -21.37 | 26.13 | 46.00 | -19.87 | 10.17 |



5.3 6dB Occupied Bandwidth

1. Conducted Measurement

EUT was set for low, mid, high channel with modulated mode and highest RF output power.

The spectrum analyzer was connected to the antenna terminal.

2. Environmental Conditions

Temperature 16°C

Relative Humidity 50%

Atmospheric Pressure 1019mbar

3. Conducted Emissions Measurement Uncertainty

All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz – 40GHz is ± 1.5 dB.

4. Test date : Jun 10~28 2010

Tested By : Alex Wang


Requirement(s): 47 CFR §15.247(a)(1)

Procedures: The 6dB Bandwidths were measured conducted using a spectrum analyzer at low, mid, and hi channels. 6dB Bandwidth Limit: >500 kHz.


| Protocol | Channel | Channel Frequency (MHz) | 6dB Occupied Bandwidth Limit (MHz) | 6dB Channel Bandwidth (MHz) |
|----------|---------|-------------------------|------------------------------------|-----------------------------|
| 802.11b | Low | 2412 | 0.5 | 8.33 |
| 802.11b | Mid | 2437 | 0.5 | 8.75 |
| 802.11b | High | 2462 | 0.5 | 8.08 |
| 802.11g | Low | 2412 | 0.5 | 16.67 |
| 802.11g | Mid | 2437 | 0.5 | 16.67 |
| 802.11g | High | 2462 | 0.5 | 16.75 |





Refer to the attached plots.

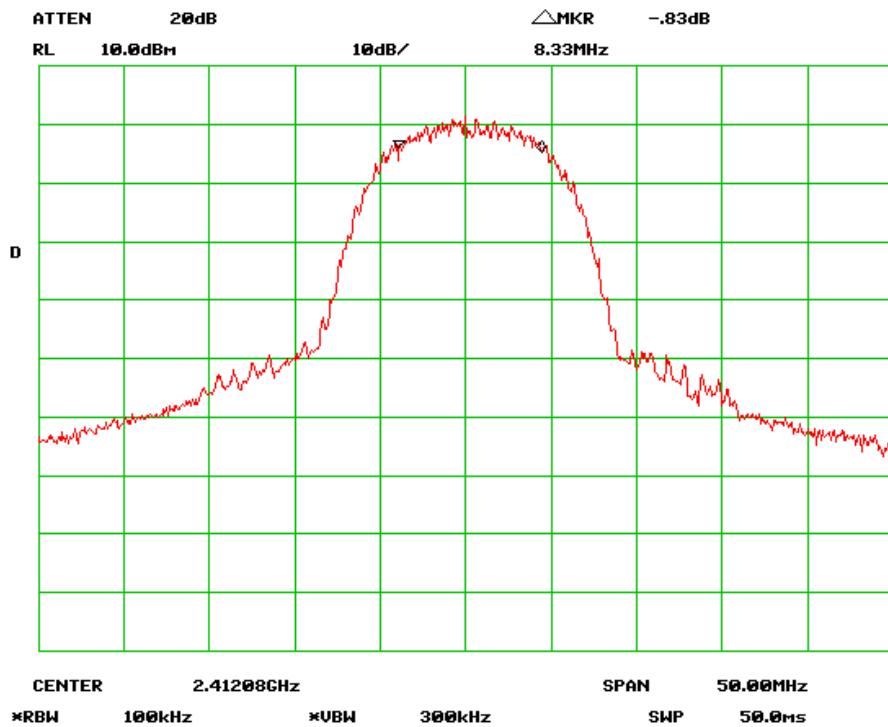


6dB Bandwidth – Low Channel (802.11b)

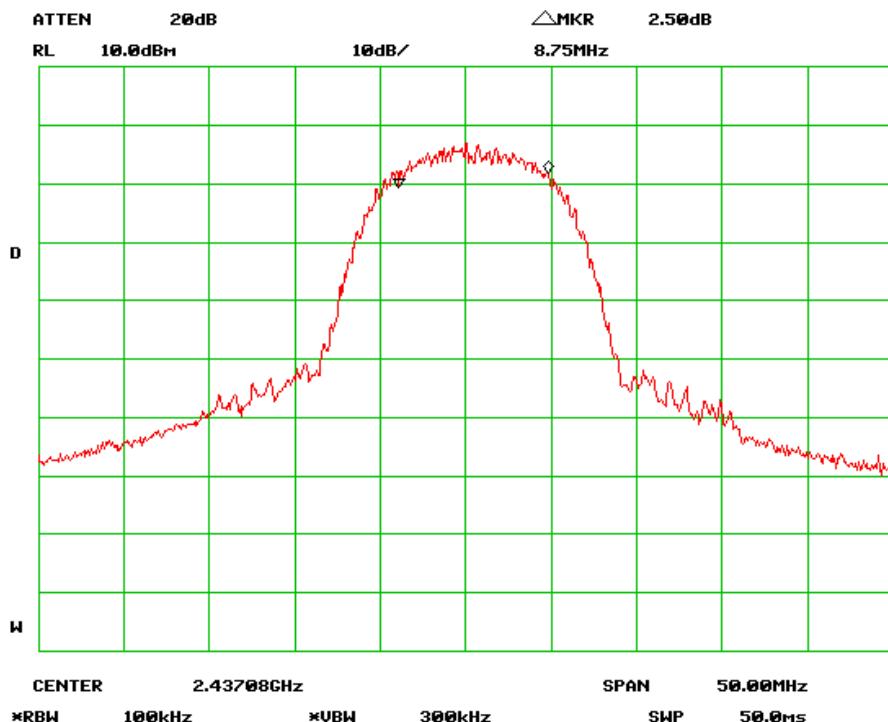

6dB Bandwidth – Mid Channel (802.11b)

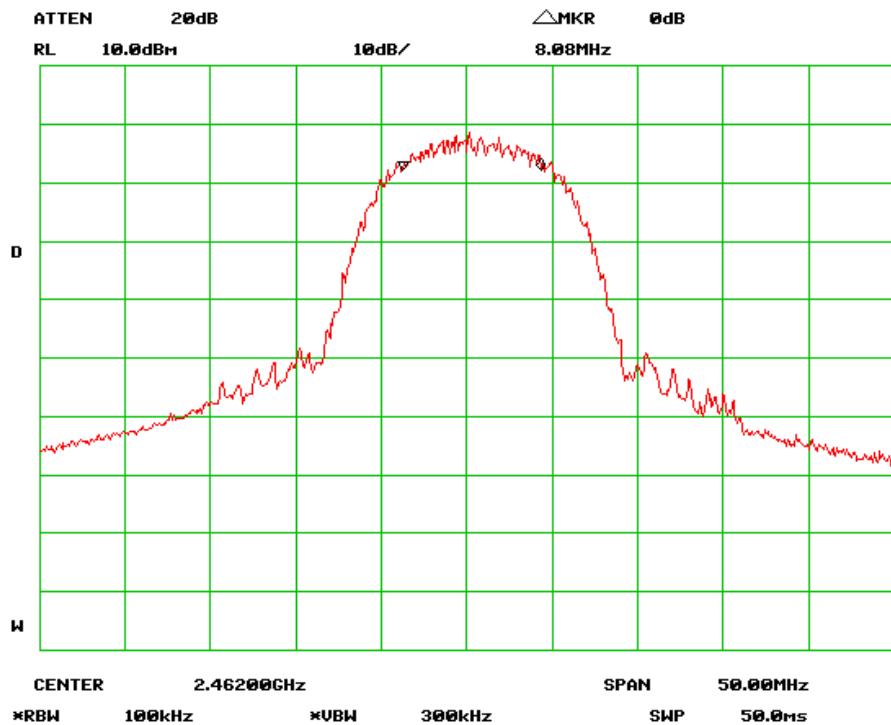

6dB Bandwidth – High Channel (802.11b)

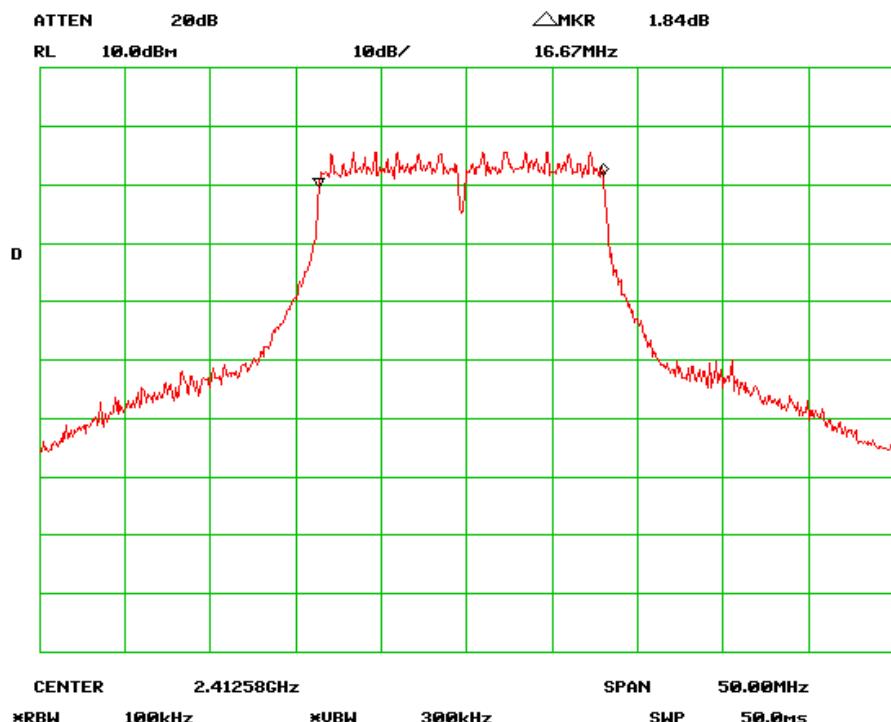


6dB Bandwidth – Low Channel (802.11g)




Title: RF Test Report for 5LINXGLOBAL WiFi Cellphone
Model: GM100N WM680
To: FCC PART 15.247,15.249

Serial#: 1005007-02
Issue Date: Jun 28 2010
Page 16 of 65
www.siemic.com.cn

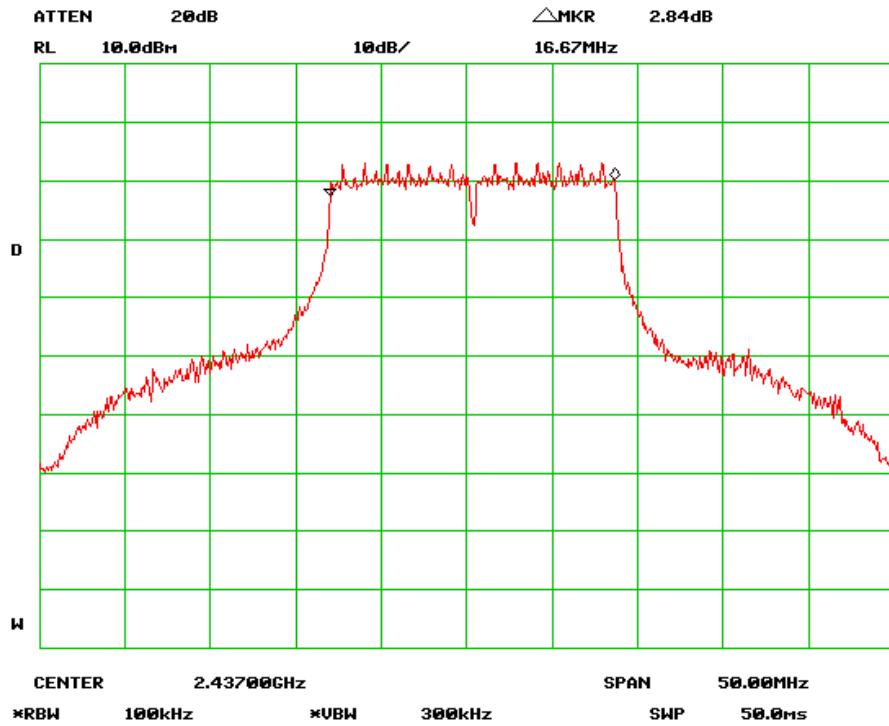

6dB Bandwidth – Mid Channel (802.11g)

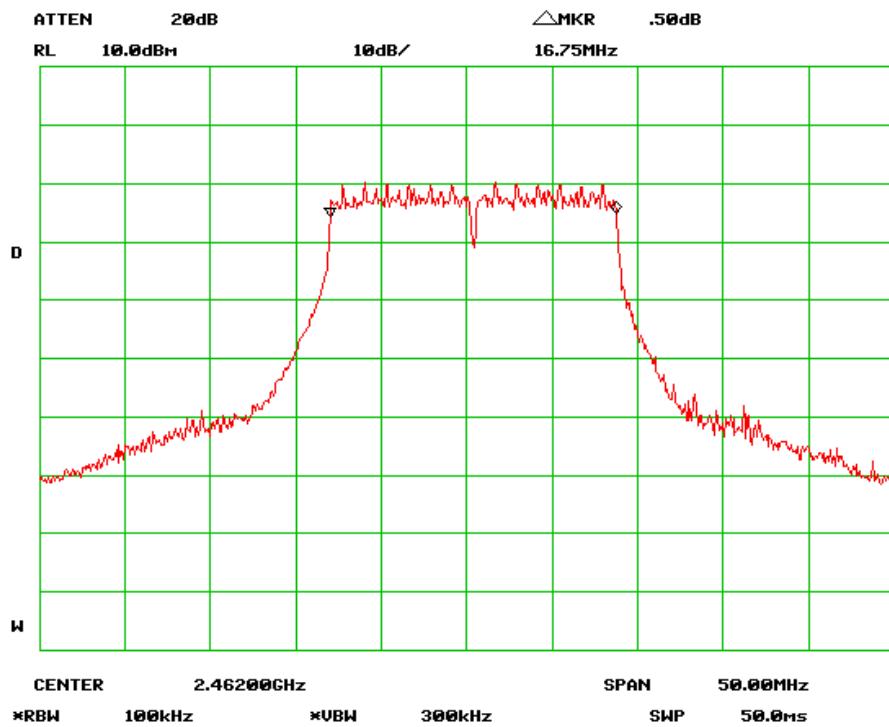

6dB Bandwidth – High Channel (802.11g)



5.4 Power Spectral Density

1. Conducted Measurement

EUT was set for low, mid, high channel with modulated mode and highest RF output power.
The spectrum analyzer was connected to the antenna terminal.

2. Environmental Conditions

| | |
|----------------------|----------|
| Temperature | 16°C |
| Relative Humidity | 50% |
| Atmospheric Pressure | 1019mbar |

3. Conducted Emissions Measurement Uncertainty

All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz – 40GHz is ± 1.5 dB.

4. Test date : Jun 10~28 2010

Tested By : Alex Wang

Requirement(s): 47 CFR §15.247(e)

For digitally modulated systems, the power spectral density conducted from the intentional radiator to the antenna shall not be greater than 8dBm in any 3KHz band during any time interval of continuous transmission.

Procedures: The power spectral density measurement was taken conducted using a spectrum analyzer.

RBW=3KHz, VBW>RBW, Sweep time to SPAN/RBW(s).

The result:


| Protocol | Channel | Channel Frequency (MHz) | Peak Spectral Density Limit (dBm/3KHz) | Peak Spectral Density (dBm/3KHz) |
|----------|---------|-------------------------|--|----------------------------------|
| 802.11b | Low | 2412 | 8 | -2.17 |
| 802.11b | Mid | 2437 | 8 | -19.67 |
| 802.11b | High | 2462 | 8 | -19.17 |
| 802.11g | Low | 2412 | 8 | -23.33 |
| 802.11g | Mid | 2437 | 8 | -26.00 |
| 802.11g | High | 2462 | 8 | -23.67 |

Refer to the attached plots.




Title: RF Test Report for 5LINXGLOBAL WiFi Cellphone
Model: GM100N WM680
To: FCC PART 15.247,15.249

Serial#: 1005007-02
Issue Date: Jun 28 2010
Page 18 of 65
www.siemic.com.cn

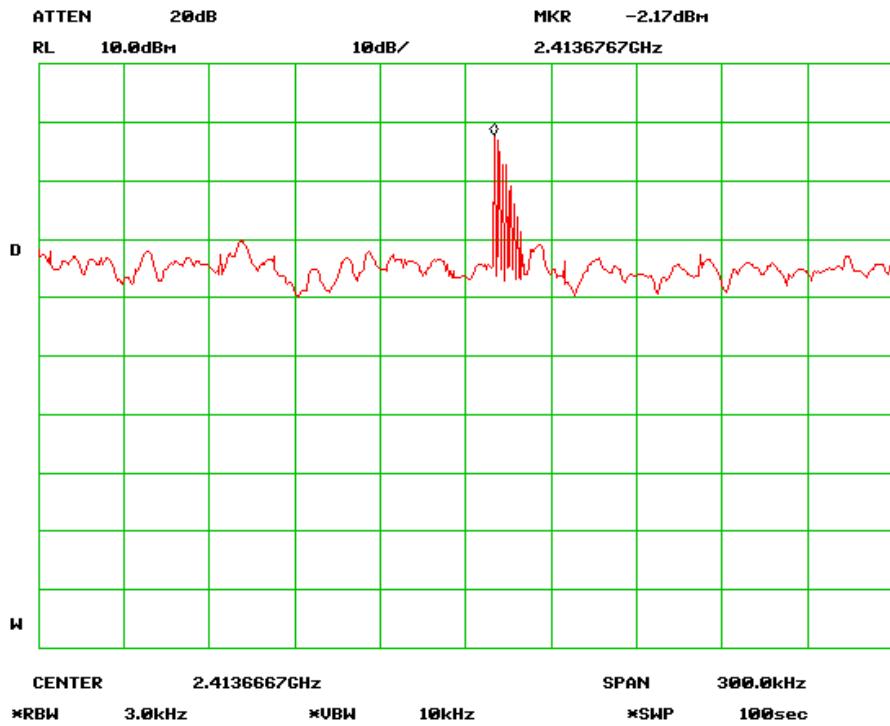

PSD - Low Channel (802.11b)

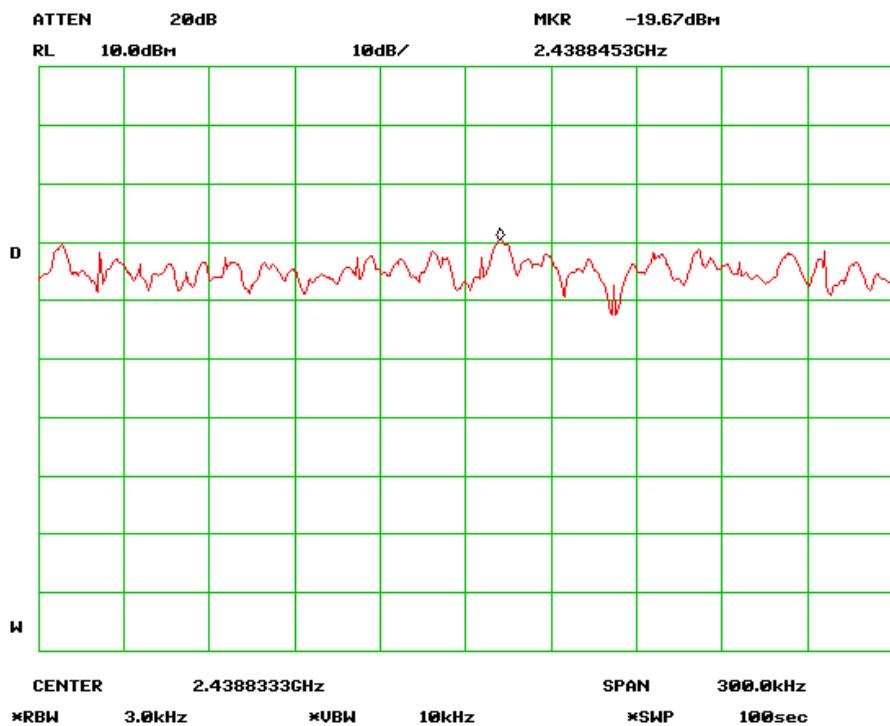


PSD - Mid Channel (802.11b)




Title: RF Test Report for 5LINXGLOBAL WiFi Cellphone
Model: GM100N WM680
To: FCC PART 15.247,15.249

Serial#: 1005007-02
Issue Date: Jun 28 2010
Page 19 of 65
www.siemic.com.cn

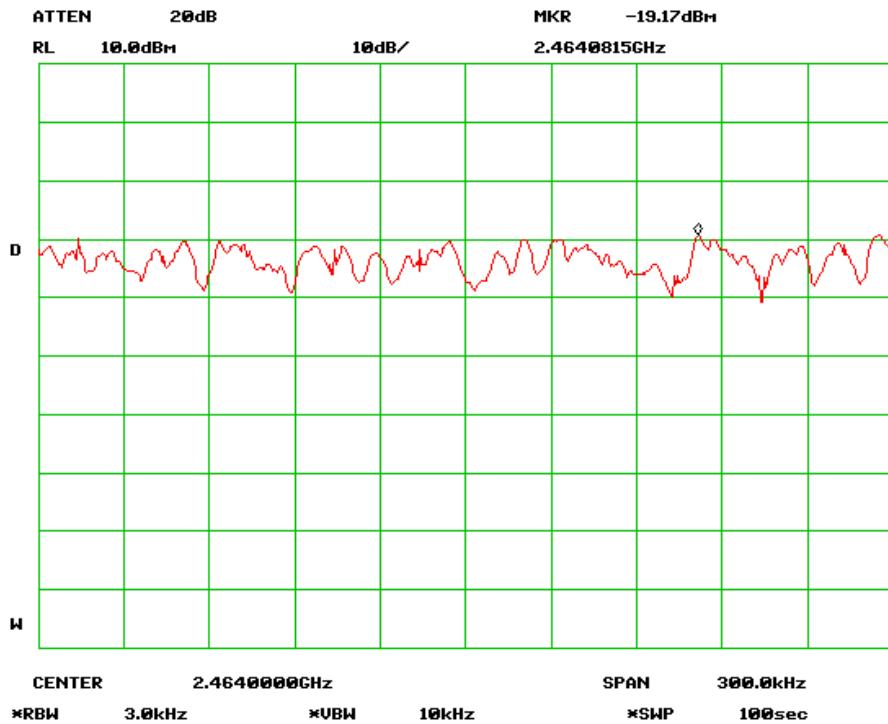

PSD - High Channel (802.11b)

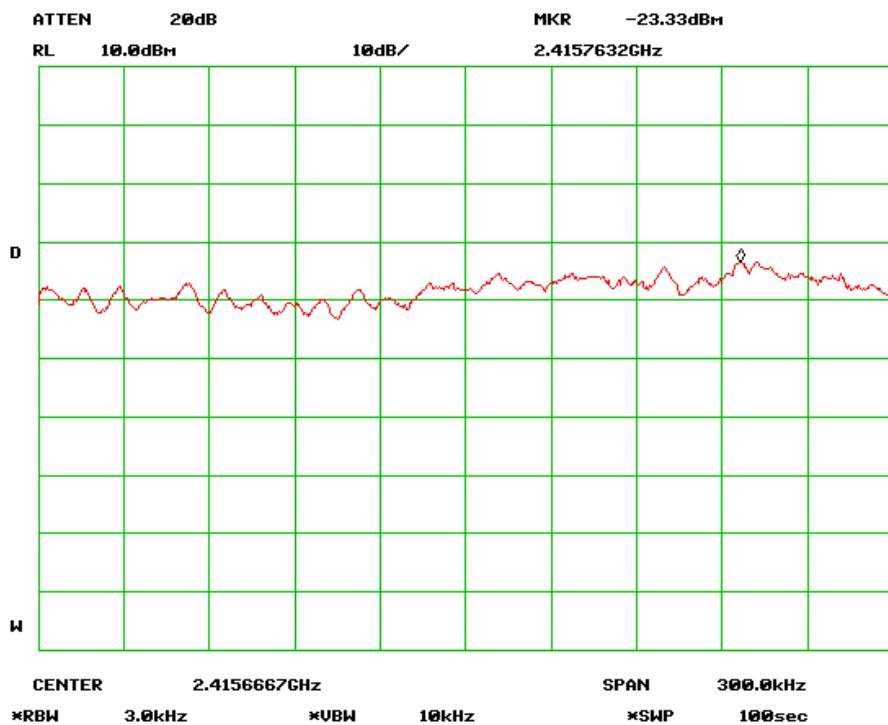


PSD - Low Channel (802.11g)




SIEMIC, INC.
Accessing global markets

Title: RF Test Report for 5LINXGLOBAL WiFi Cellphone
Model: GM100N WM680
To: FCC PART 15.247,15.249

Serial#: 1005007-02
Issue Date: Jun 28 2010
Page 20 of 65
www.siemic.com.cn

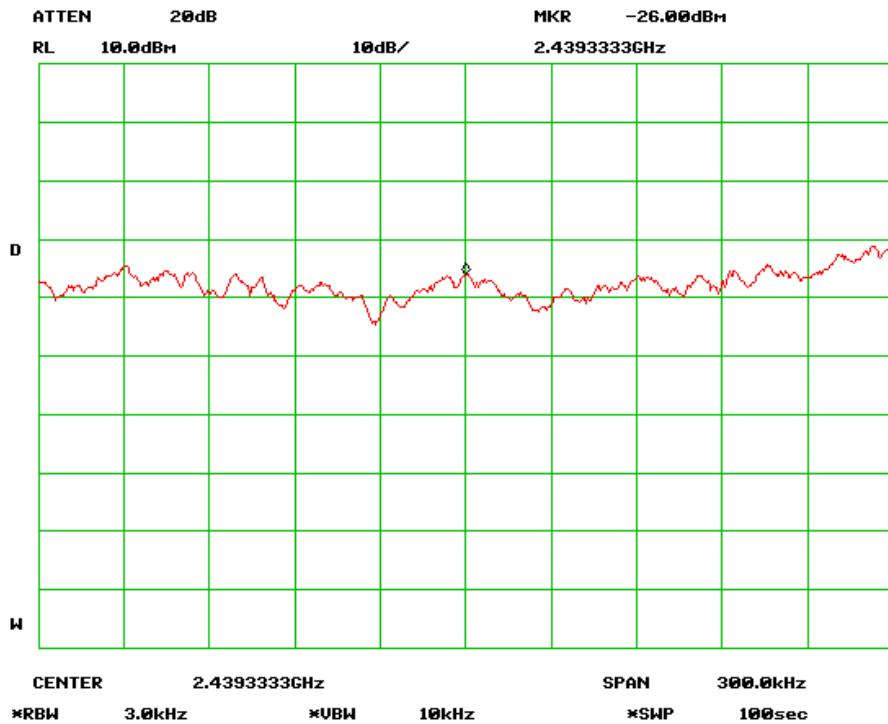

PSD - Mid Channel (802.11g)

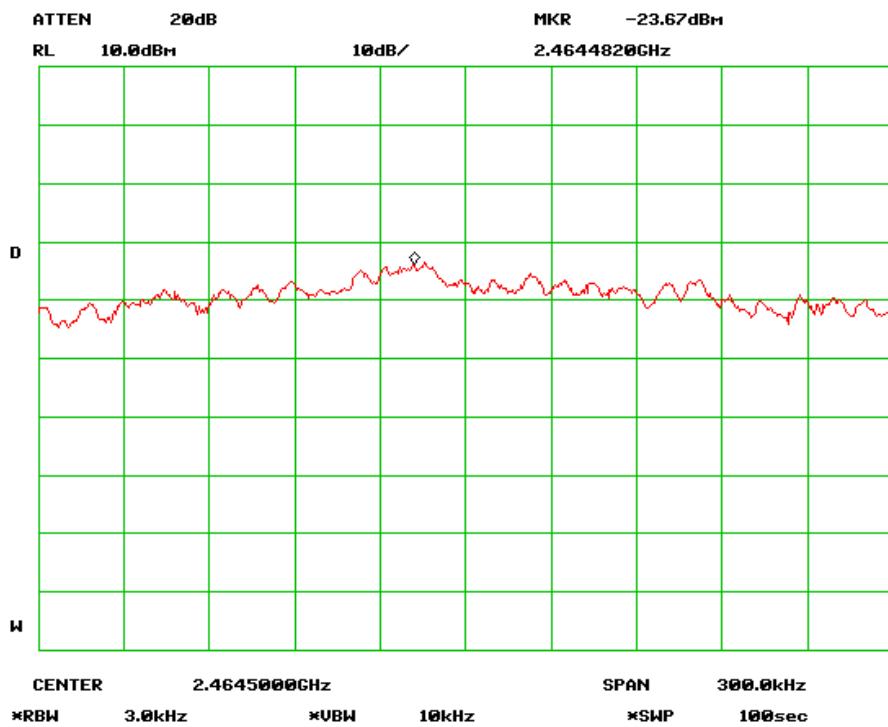

PSD - High Channel (802.11g)



5.5 Peak Output Power

1. Conducted Measurement
EUT was set for low, mid, high channel with modulated mode and highest RF output power.
The spectrum analyzer was connected to the antenna terminal.
2. Conducted Emissions Measurement Uncertainty
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz – 40GHz is $\pm 1.5\text{dB}$.
3. Environmental Conditions

| | |
|----------------------|----------|
| Temperature | 16°C |
| Relative Humidity | 50% |
| Atmospheric Pressure | 1019mbar |
4. Test date : Jun 10~28 2010
Tested By : Alex Wang

Standard Requirement: 47 CFR §15.247(b)

Procedures: The peak output power was measured conducted using a spectrum analyzer at low, mid, and hi channels. Peak detector was set to measure the power output. The power is converted from watt to dBm, therefore, 1 watt = 30 dBm.

Test Result:

| Protocol | Channel | Channel Frequency (MHz) | Peak Output Power Limit (dBm) | Measured Output Power (dBm) |
|----------|---------|-------------------------|-------------------------------|-----------------------------|
| 802.11b | Low | 2412 | 30 | 9.1 |
| 802.11b | Mid | 2437 | 30 | 9.5 |
| 802.11b | High | 2462 | 30 | 10.0 |
| 802.11g | Low | 2412 | 30 | 9.3 |
| 802.11g | Mid | 2437 | 30 | 9.1 |
| 802.11g | High | 2462 | 30 | 9.0 |



SIEMIC, INC.


Accessing global markets

Title: RF Test Report for 5LINXGLOBAL WiFi Cellphone
Model: GM100N WM680
To: FCC PART 15.247,15.249

Serial#: 1005007-02
Issue Date: Jun 28 2010
Page 22 of 65
www.siemic.com.cn



Output Power Low Channel (802.11b)

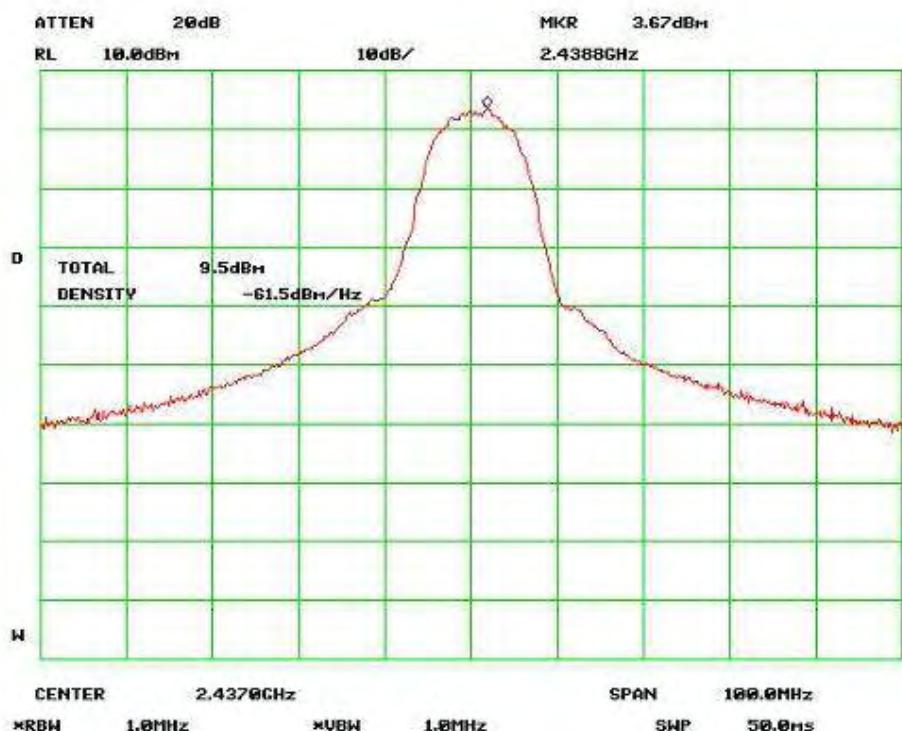


Output Power Mid Channel (802.11b)




Title: RF Test Report for 5LINXGLOBAL WiFi Cellphone
Model: GM100N WM680
To: FCC PART 15.247,15.249


Serial#: 1005007-02
Issue Date: Jun 28 2010
Page 23 of 65
www.siemic.com.cn

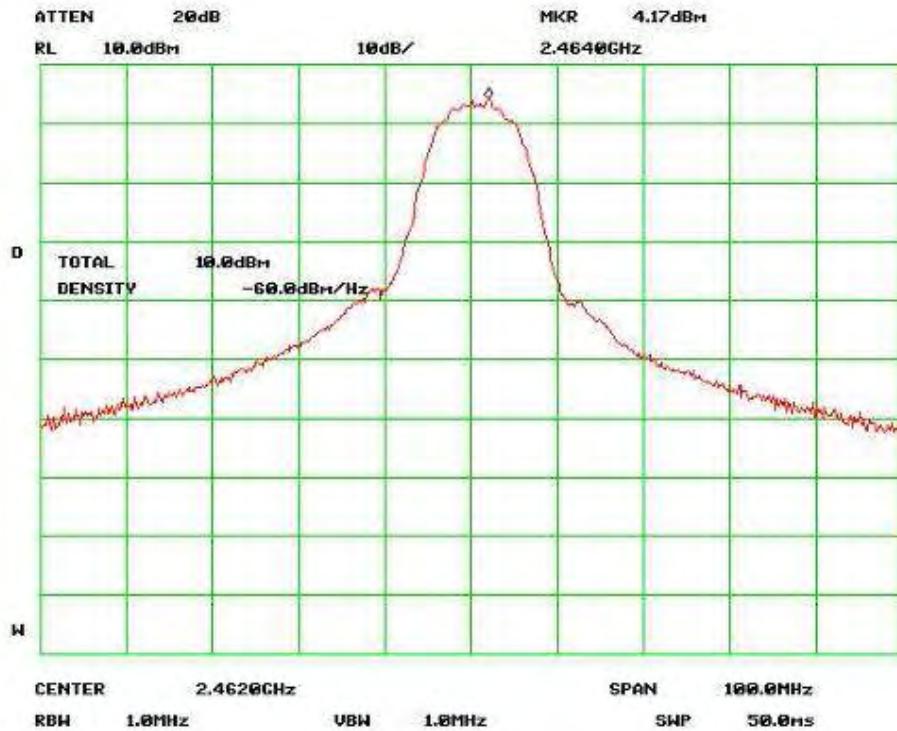


Output Power High Channel (802.11b)

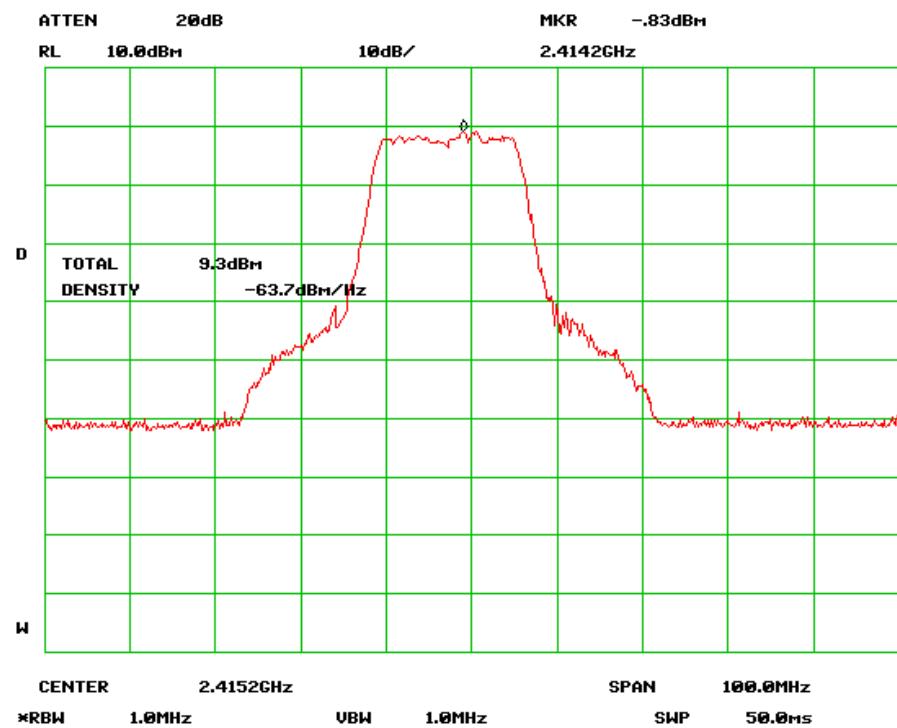

Output Power Low Channel (802.11g)

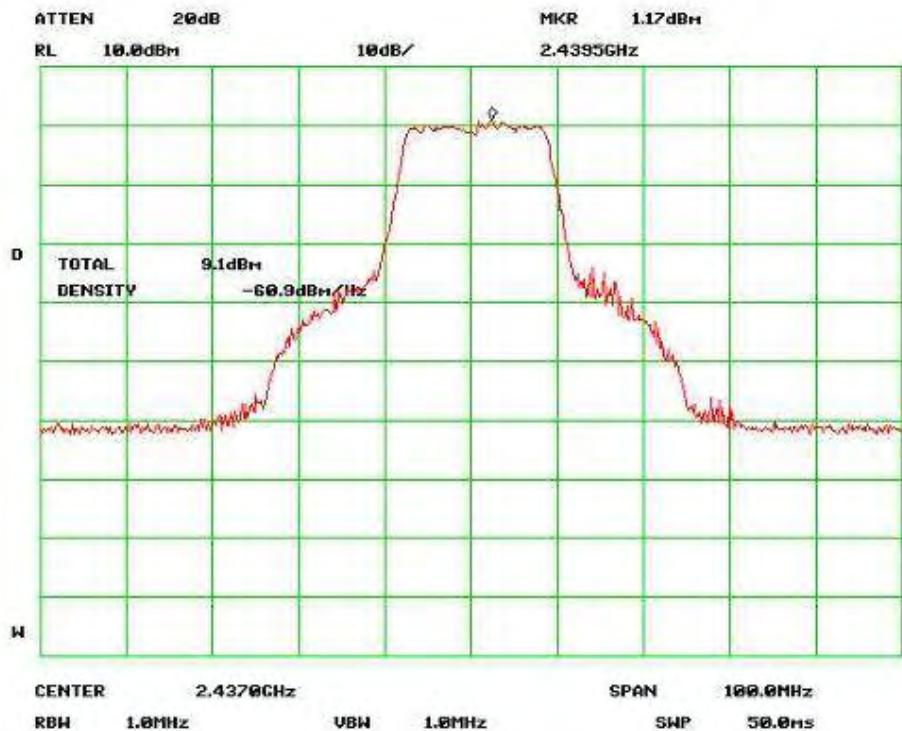

Output Power Mid Channel (802.11g)

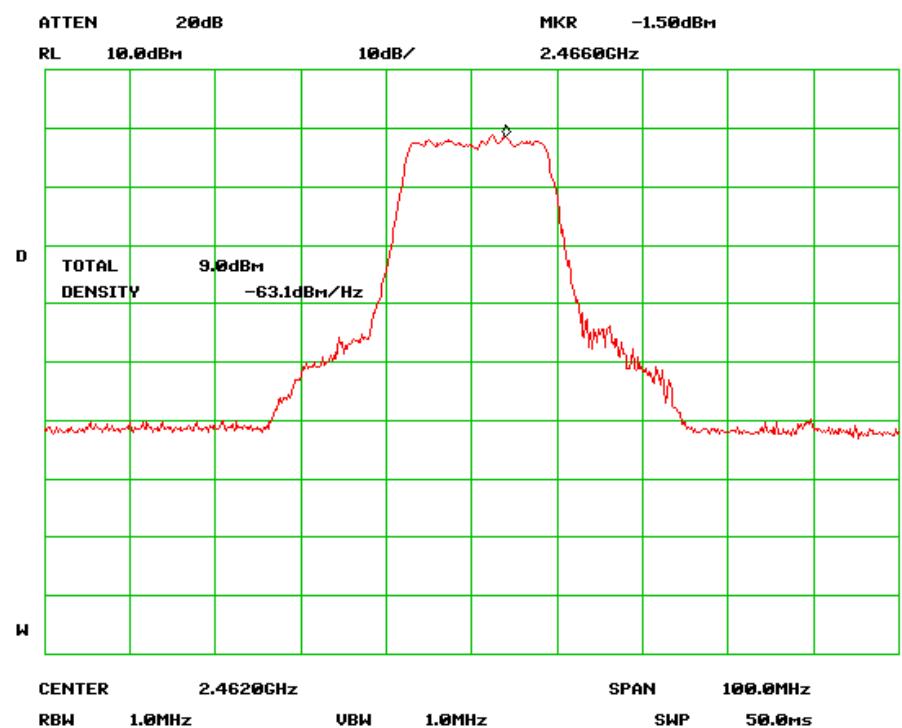

Output Power High Channel (802.11g)



5.6 Antenna Port Emission

1. Conducted Measurement
EUT was set for low, mid, high channel with modulated mode and highest RF output power.
The spectrum analyzer was connected to the antenna terminal.
2. Conducted Emissions Measurement Uncertainty
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz – 40GHz is $\pm 1.5\text{dB}$.
3. Environmental Conditions

| | |
|----------------------|----------|
| Temperature | 16°C |
| Relative Humidity | 50% |
| Atmospheric Pressure | 1019mbar |
4. Test date : Jun 10~28 2010
Tested By : Alex Wang

Standard Requirement: Radiated emission limits: In any 100 kHz bandwidth outside the frequency band in which the spread spectrum intentional radiator is operating, the radio frequency power that is produced by the modulation products of the spreading sequence, the information sequence and the carrier frequency shall be at least 20 dB below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power


Procedures: The conducted spurious emissions were measured conducted using a spectrum analyzer at low, mid, and hi channels. The limit was determined by attenuating 20 dB of the RF peak power output.

Test Result:




Title: RF Test Report for 5LINXGLOBAL WiFi Cellphone
Model: GM100N WM680
To: FCC PART 15.247,15.249

Serial#: 1005007-02
Issue Date: Jun 28 2010
Page 26 of 65
www.siemic.com.cn

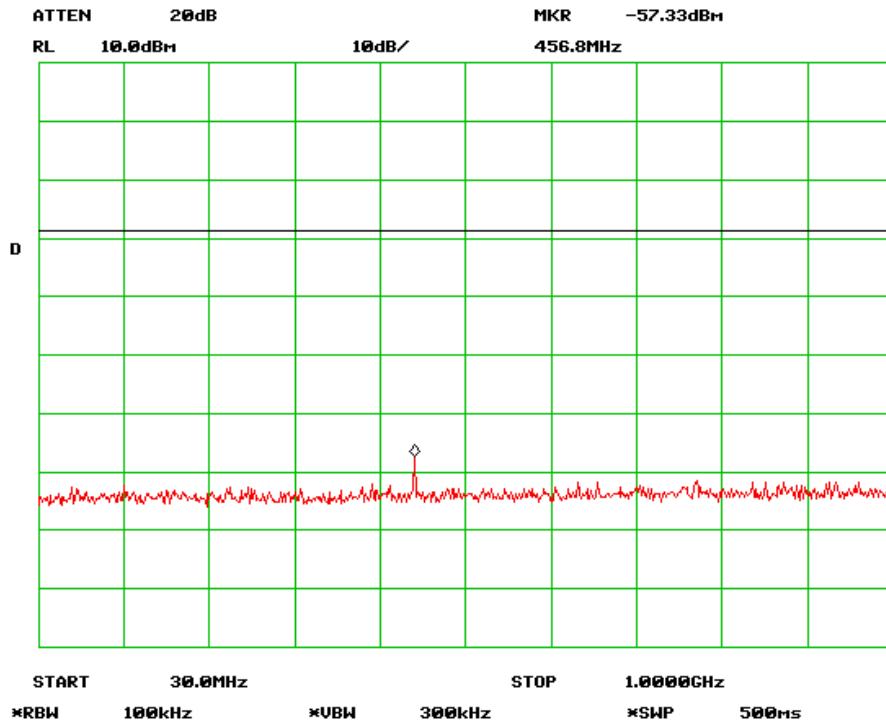

Antenna Port Emission Low Channel -1(802.11b)

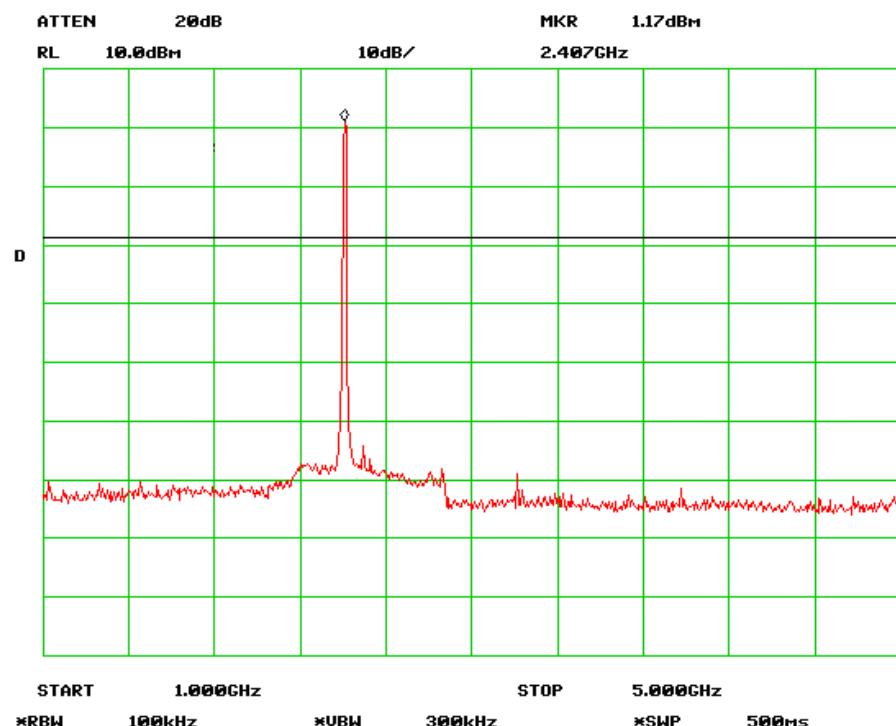


Antenna Port Emission Low Channel -2(802.11b)




Title: RF Test Report for 5LINXGLOBAL WiFi Cellphone
Model: GM100N WM680
To: FCC PART 15.247,15.249

Serial#: 1005007-02
Issue Date: Jun 28 2010
Page 27 of 65
www.siemic.com.cn

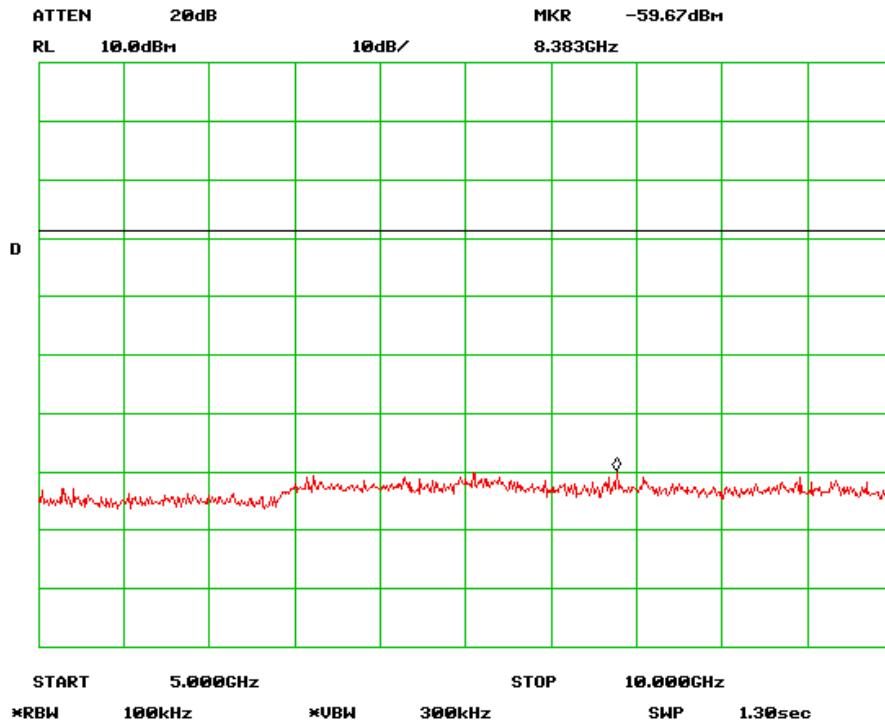

Antenna Port Emission Low Channel -3(802.11b)

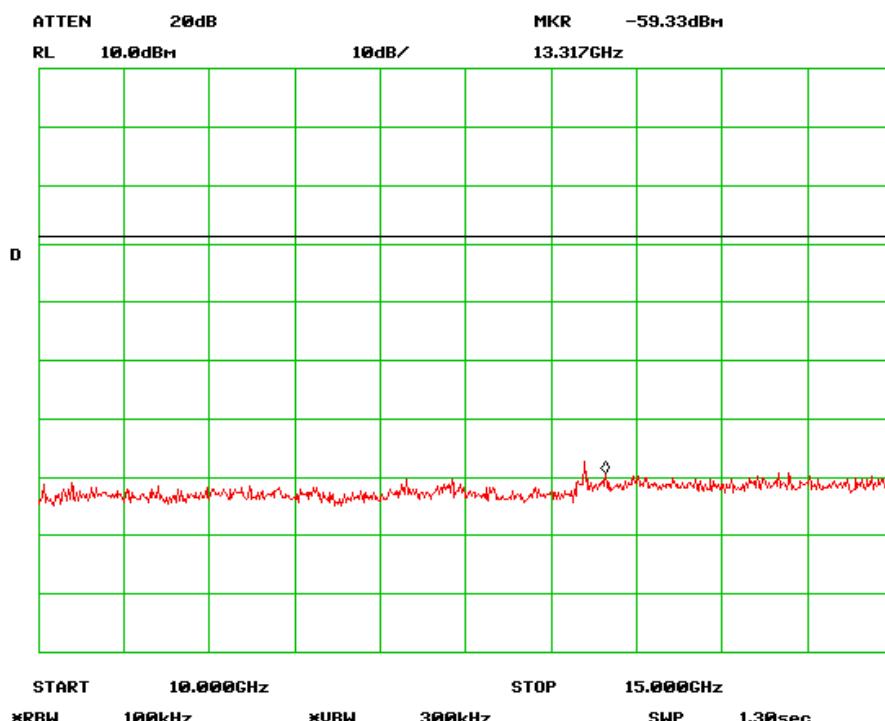


Antenna Port Emission Low Channel -4(802.11b)




Title: RF Test Report for 5LINXGLOBAL WiFi Cellphone
Model: GM100N WM680
To: FCC PART 15.247,15.249

Serial#: 1005007-02
Issue Date: Jun 28 2010
Page 28 of 65
www.siemic.com.cn

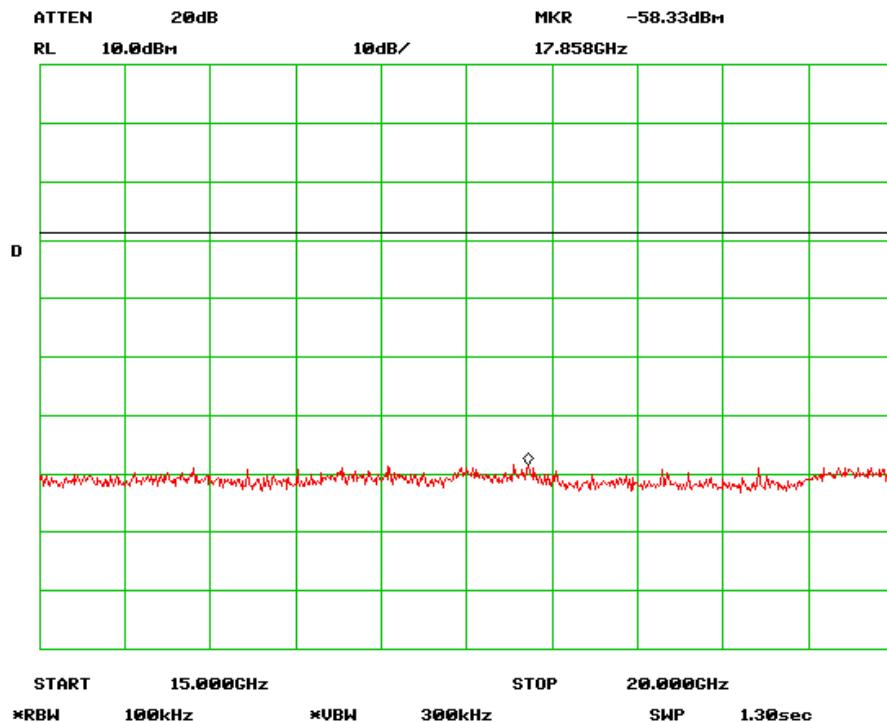

Antenna Port Emission Low Channel -5(802.11b)

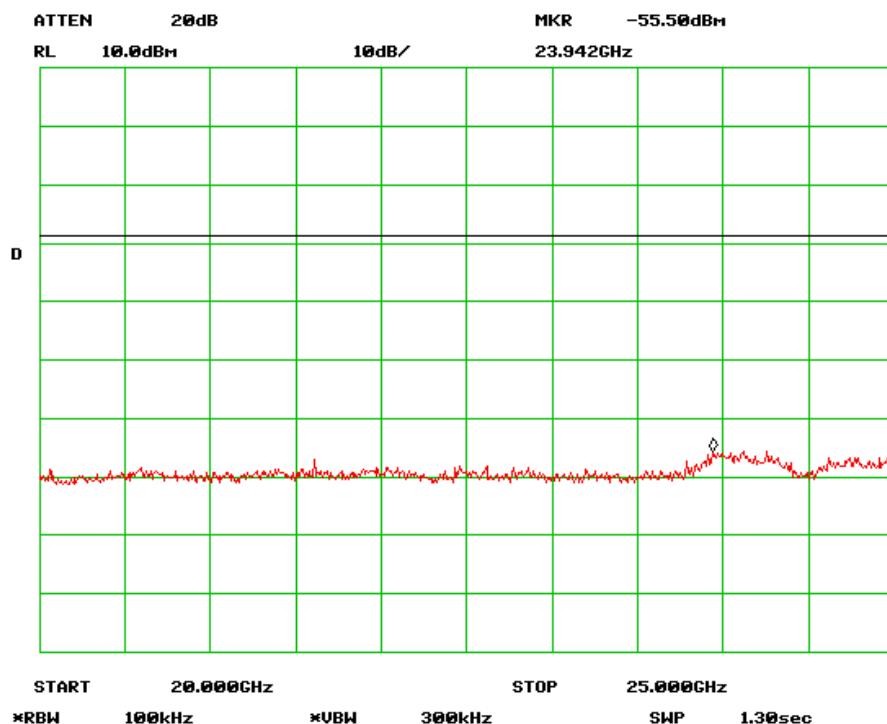


Antenna Port Emission Low Channel -6(802.11b)




Title: RF Test Report for 5LINXGLOBAL WiFi Cellphone
Model: GM100N WM680
To: FCC PART 15.247,15.249

Serial#: 1005007-02
Issue Date: Jun 28 2010
Page 29 of 65
www.siemic.com.cn

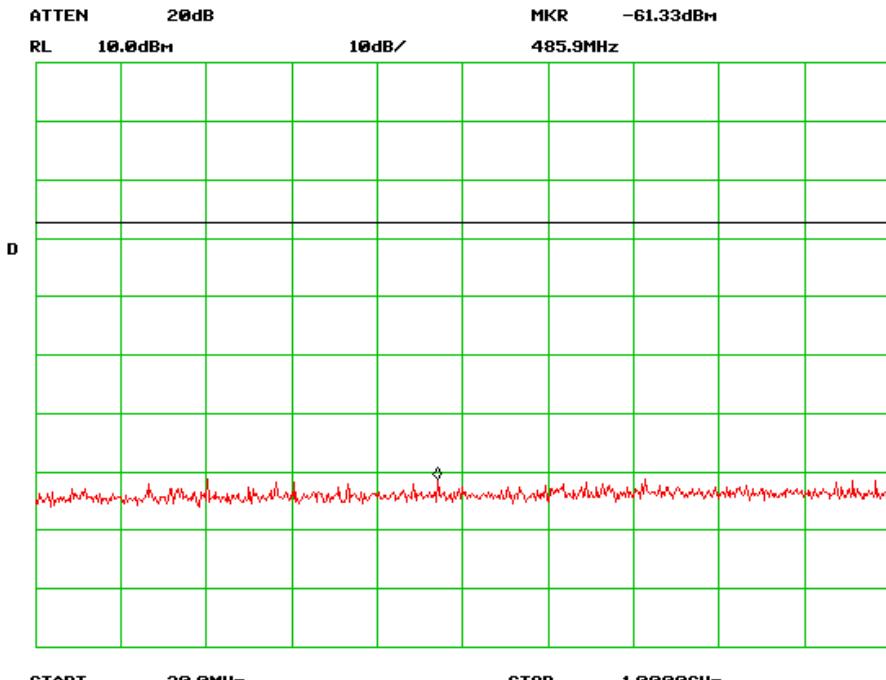

Antenna Port Emission Mid-1 Channel (802.11b)

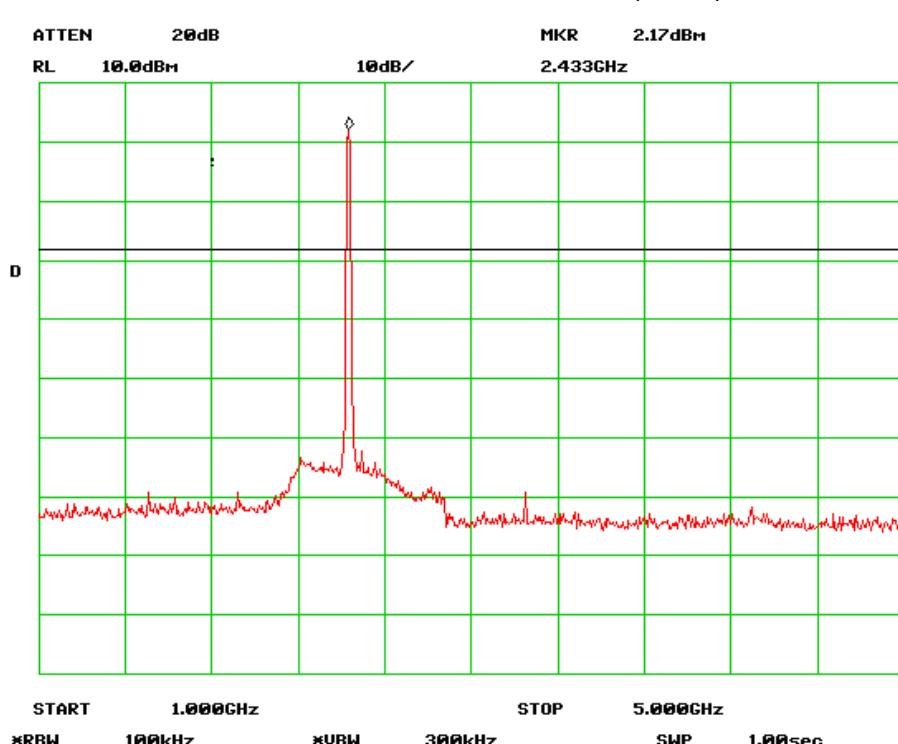


Antenna Port Emission Mid-2 Channel (802.11b)




Title: RF Test Report for 5LINXGLOBAL WiFi Cellphone
Model: GM100N WM680
To: FCC PART 15.247,15.249


Serial#: 1005007-02
Issue Date: Jun 28 2010
Page 30 of 65
www.siemic.com.cn

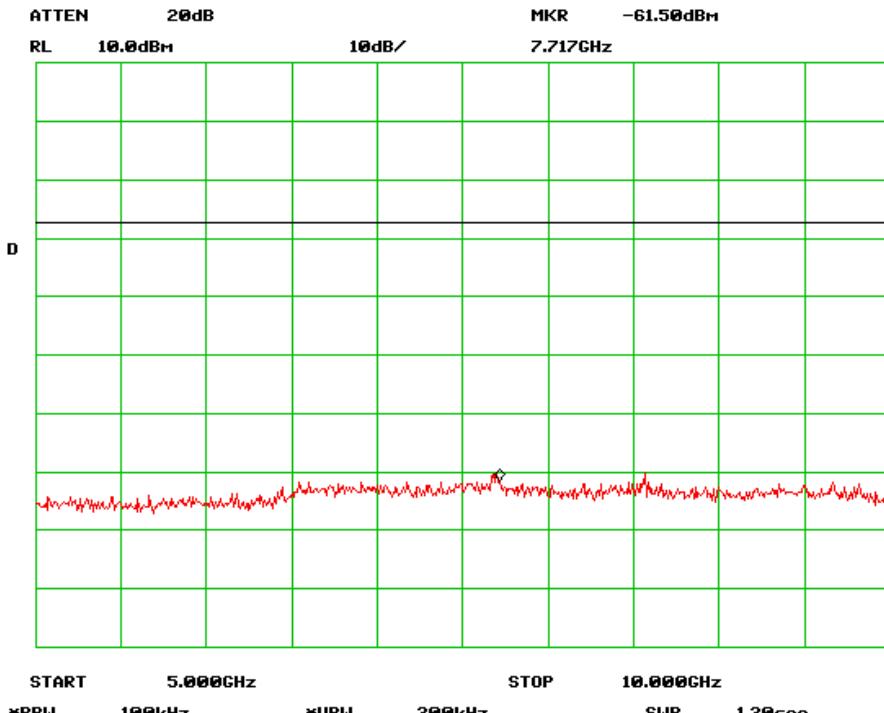

Antenna Port Emission Mid-3 Channel (802.11b)

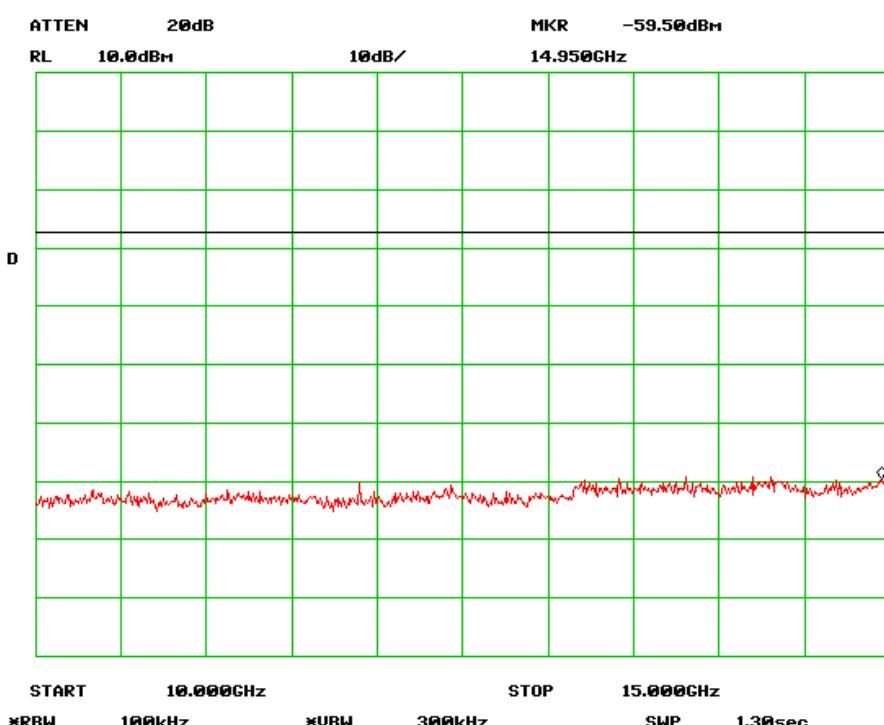


Antenna Port Emission Mid-4 Channel (802.11b)




Title: RF Test Report for 5LINXGLOBAL WiFi Cellphone
Model: GM100N WM680
To: FCC PART 15.247,15.249


Serial#: 1005007-02
Issue Date: Jun 28 2010
Page 31 of 65
www.siemic.com.cn

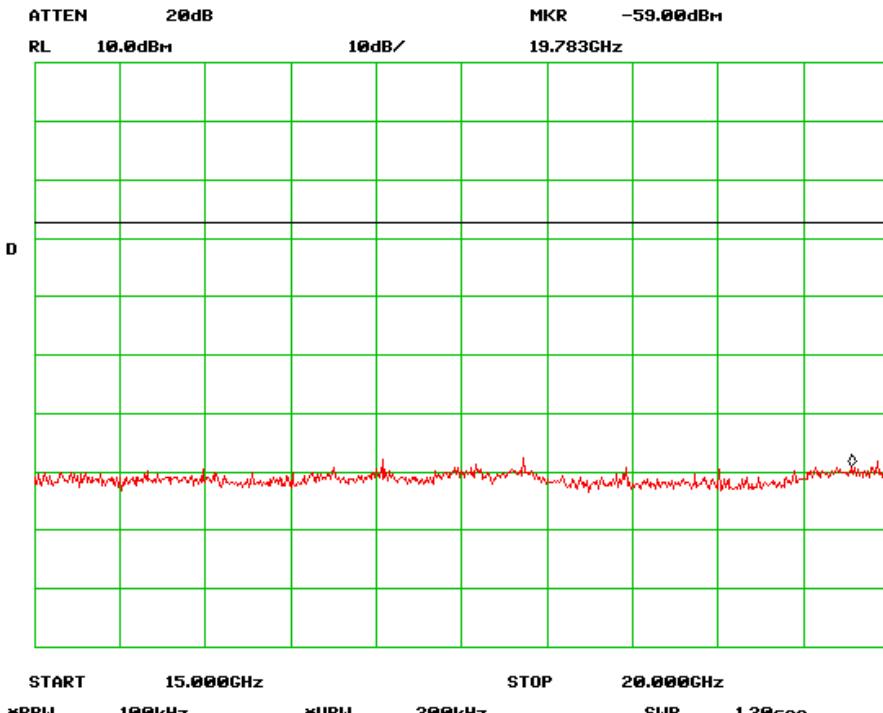


Antenna Port Emission Mid-5 Channel (802.11b)

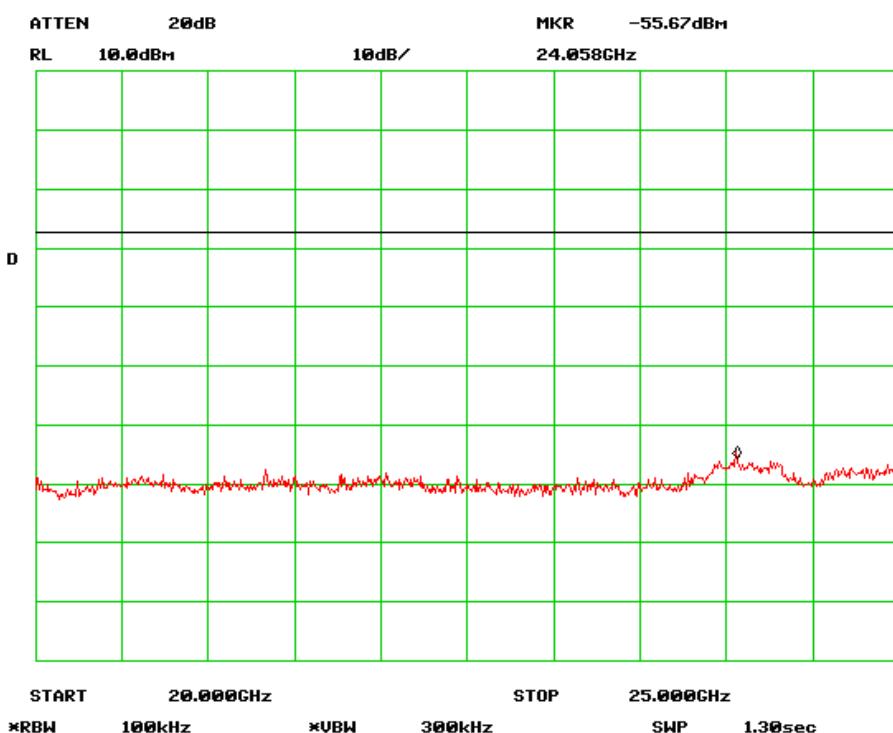

Antenna Port Emission Mid-6 Channel (802.11b)

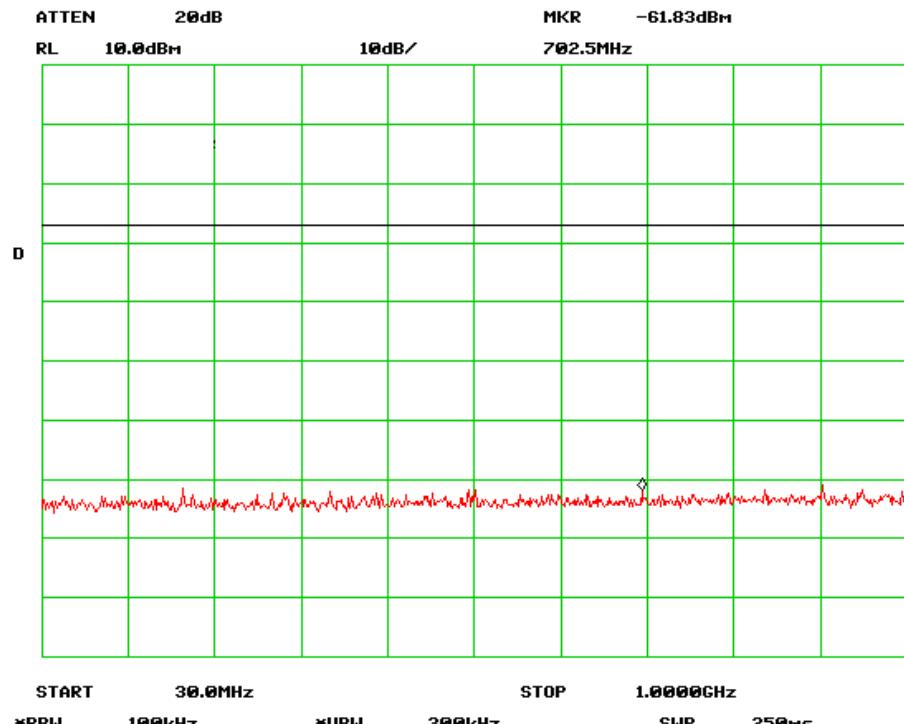

Antenna Port Emission High-1 Channel (802.11b)

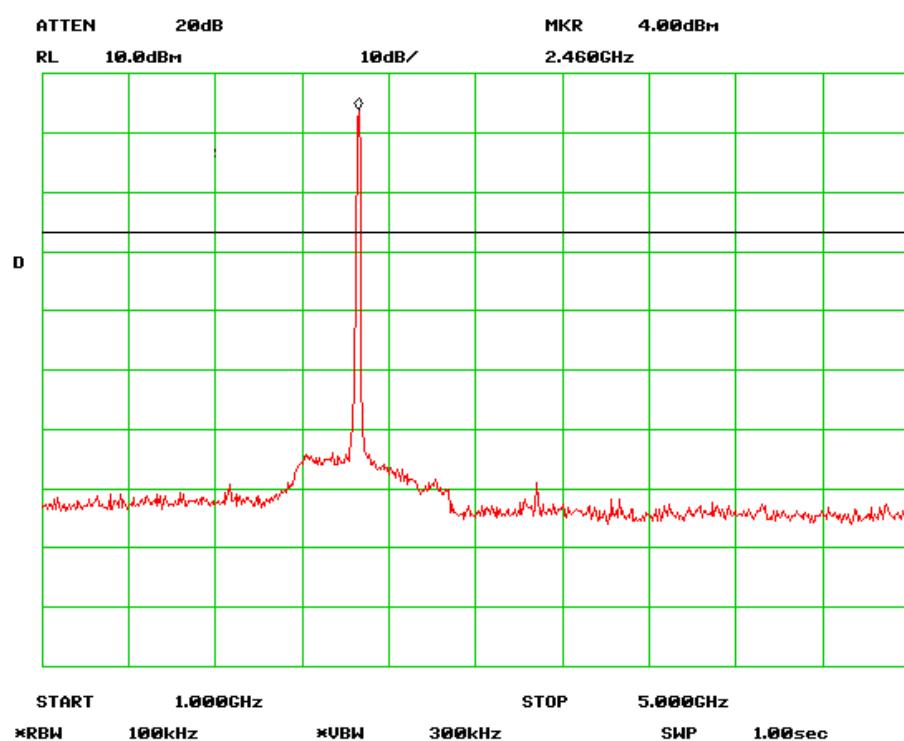


Antenna Port Emission High-2 Channel (802.11b)



Title: RF Test Report for 5LINXGLOBAL WiFi Cellphone
Model: GM100N WM680
To: FCC PART 15.247,15.249

Serial#: 1005007-02
Issue Date: Jun 28 2010
Page 33 of 65
www.siemic.com.cn

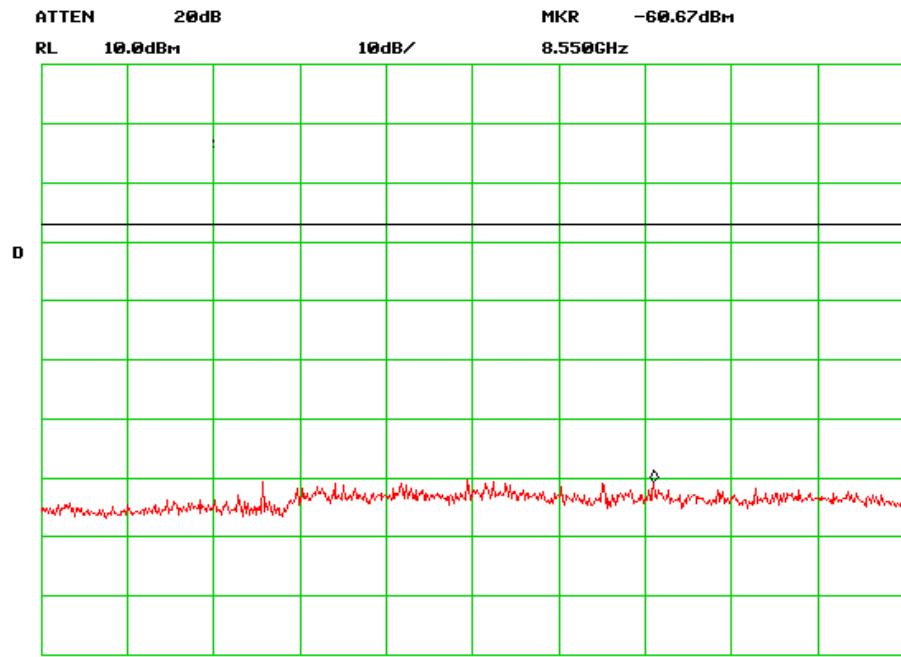

Antenna Port Emission High-3 Channel (802.11b)




Antenna Port Emission High-4 Channel (802.11b)




Title: RF Test Report for 5LINXGLOBAL WiFi Cellphone
Model: GM100N WM680
To: FCC PART 15.247,15.249

Serial#: 1005007-02
Issue Date: Jun 28 2010
Page 34 of 65
www.siemic.com.cn

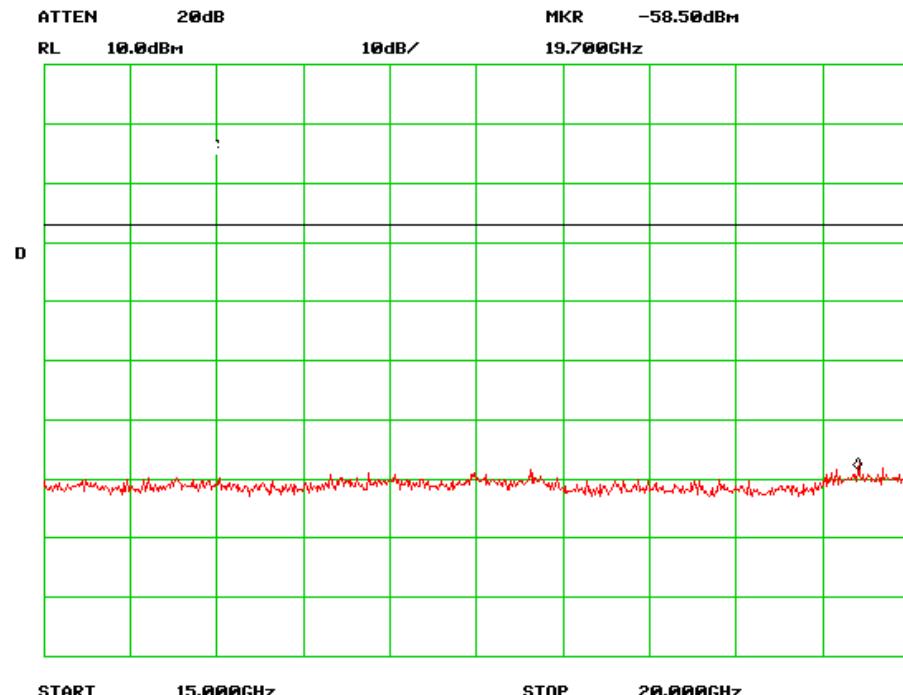

Antenna Port Emission High-5 Channel (802.11b)

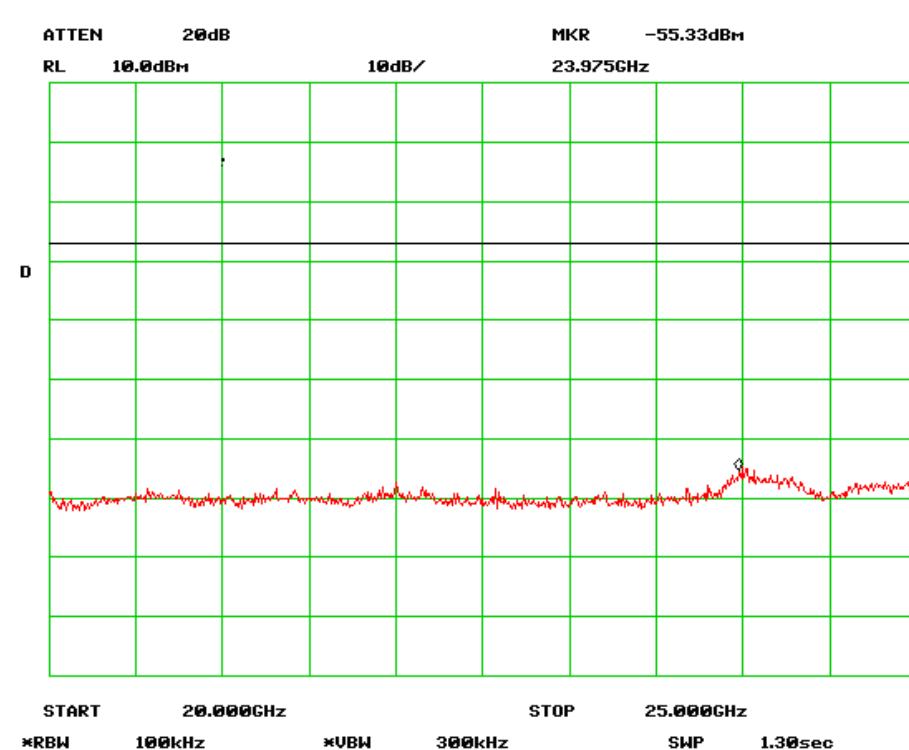


Antenna Port Emission High-6 Channel (802.11b)




Title: RF Test Report for 5LINXGLOBAL WiFi Cellphone
Model: GM100N WM680
To: FCC PART 15.247,15.249

Serial#: 1005007-02
Issue Date: Jun 28 2010
Page 35 of 65
www.siemic.com.cn

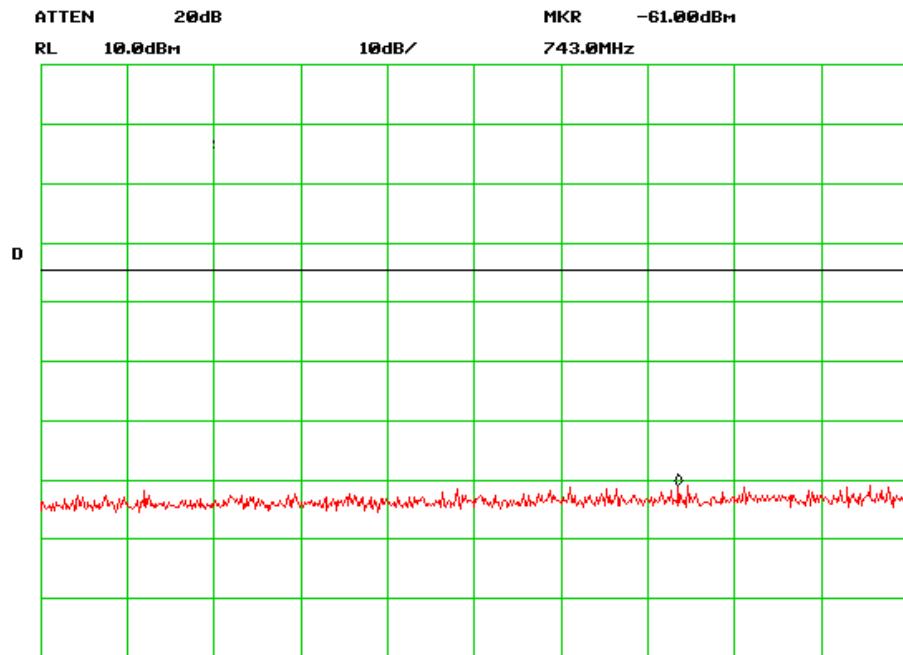

START 30.0MHz STOP 1.0000GHz
*RBW 100kHz *UBW 300kHz SWP 250ms

Antenna Port Emission Low-1 Channel (802.11g)

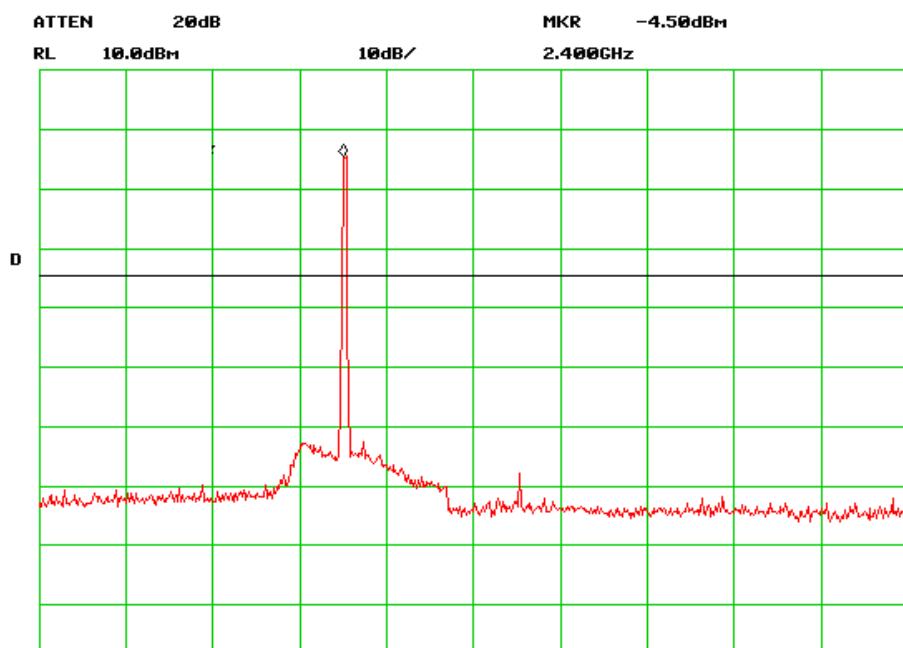


START 1.000GHz STOP 5.000GHz
*RBW 100kHz *UBW 300kHz SWP 1.00sec

Antenna Port Emission Low-2 Channel (802.11g)




Title: RF Test Report for 5LINXGLOBAL WiFi Cellphone
Model: GM100N WM680
To: FCC PART 15.247,15.249

Serial#: 1005007-02
Issue Date: Jun 28 2010
Page 36 of 65
www.siemic.com.cn

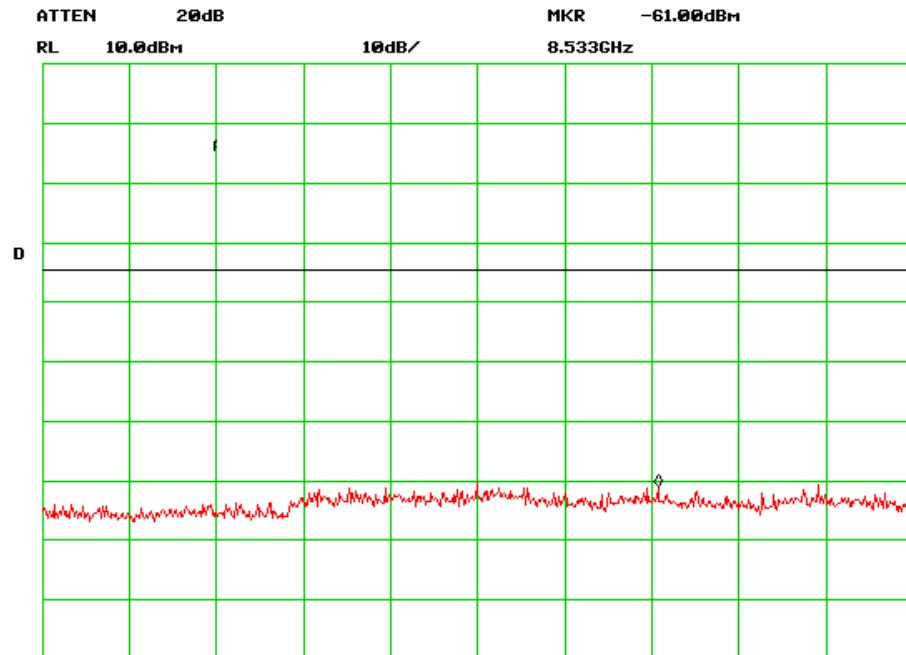

START 5.000GHz STOP 10.000GHz
*RBW 100kHz xUBW 300kHz SWP 1.30sec

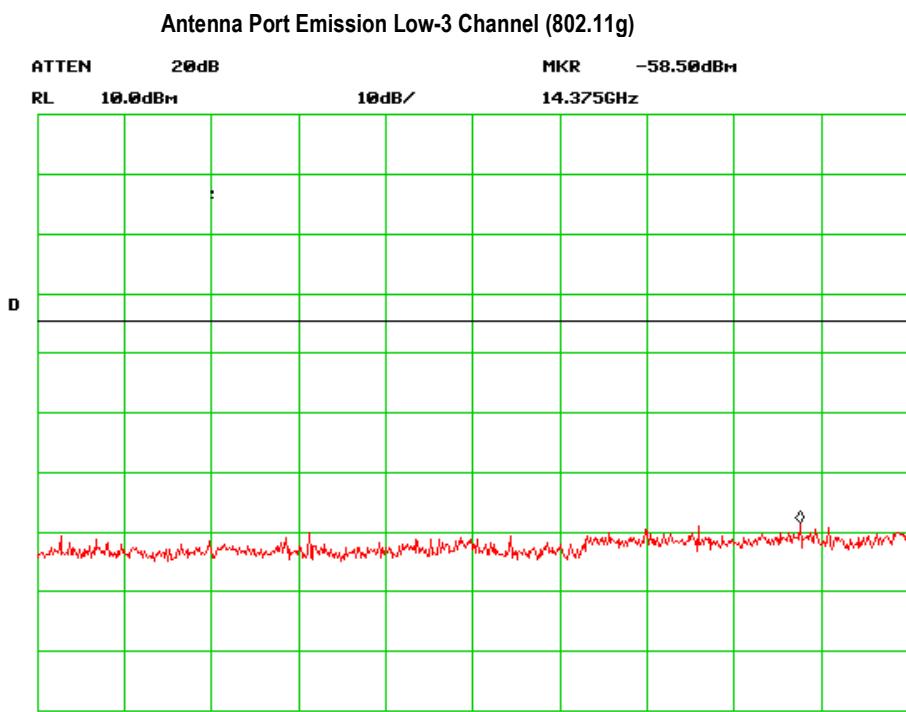


START 10.000GHz STOP 15.000GHz
*RBW 100kHz xUBW 300kHz SWP 1.30sec

Antenna Port Emission Low-4 Channel (802.11g)




Title: RF Test Report for 5LINXGLOBAL WiFi Cellphone
Model: GM100N WM680
To: FCC PART 15.247,15.249

Serial#: 1005007-02
Issue Date: Jun 28 2010
Page 37 of 65
www.siemic.com.cn

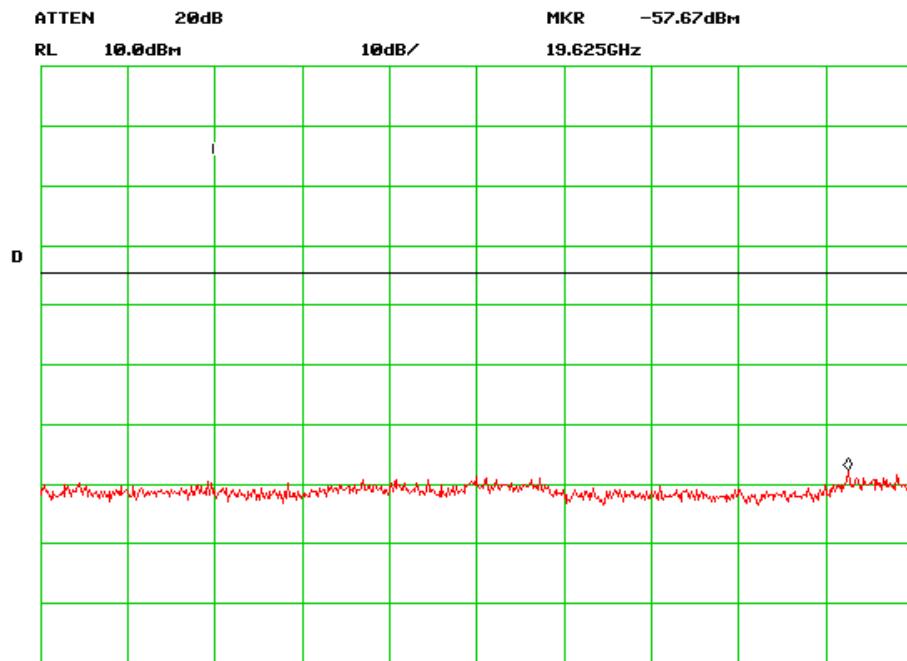

START 15.0000GHz STOP 20.0000GHz
*RBW 100kHz *UBW 300kHz SWP 1.30sec

Antenna Port Emission Low-5 Channel (802.11g)

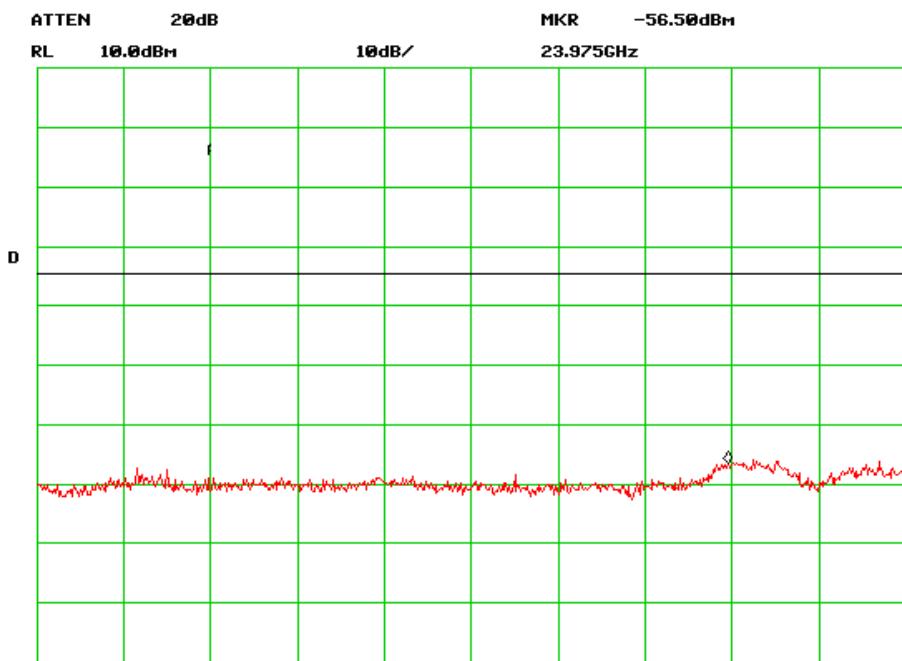


START 20.0000GHz STOP 25.0000GHz
*RBW 100kHz *UBW 300kHz SWP 1.30sec

Antenna Port Emission Low-6 Channel (802.11g)




Title: RF Test Report for 5LINXGLOBAL WiFi Cellphone
Model: GM100N WM680
To: FCC PART 15.247,15.249

Serial#: 1005007-02
Issue Date: Jun 28 2010
Page 38 of 65
www.siemic.com.cn

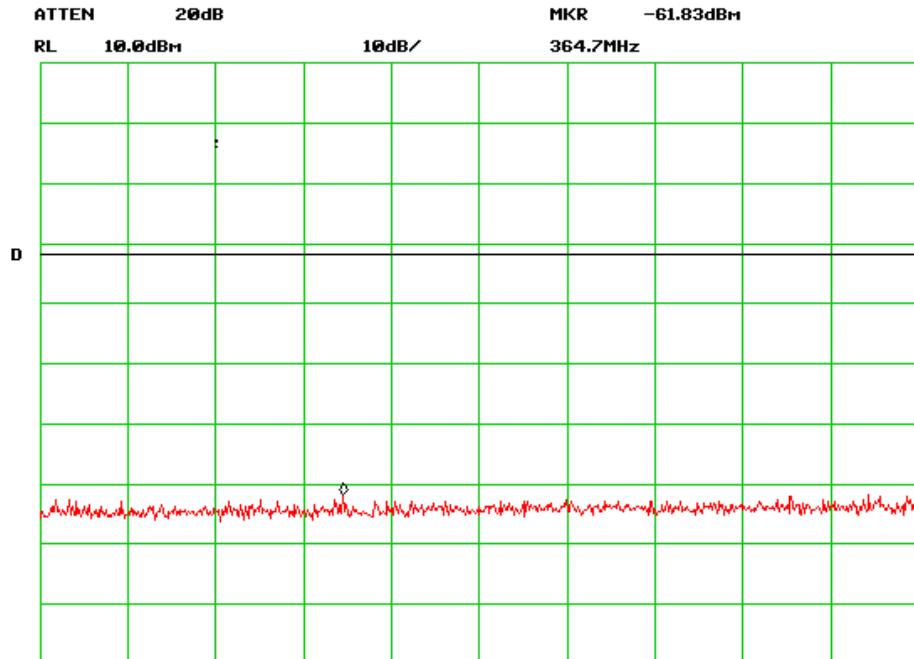

Antenna Port Emission Mid-1 Channel (802.11g)


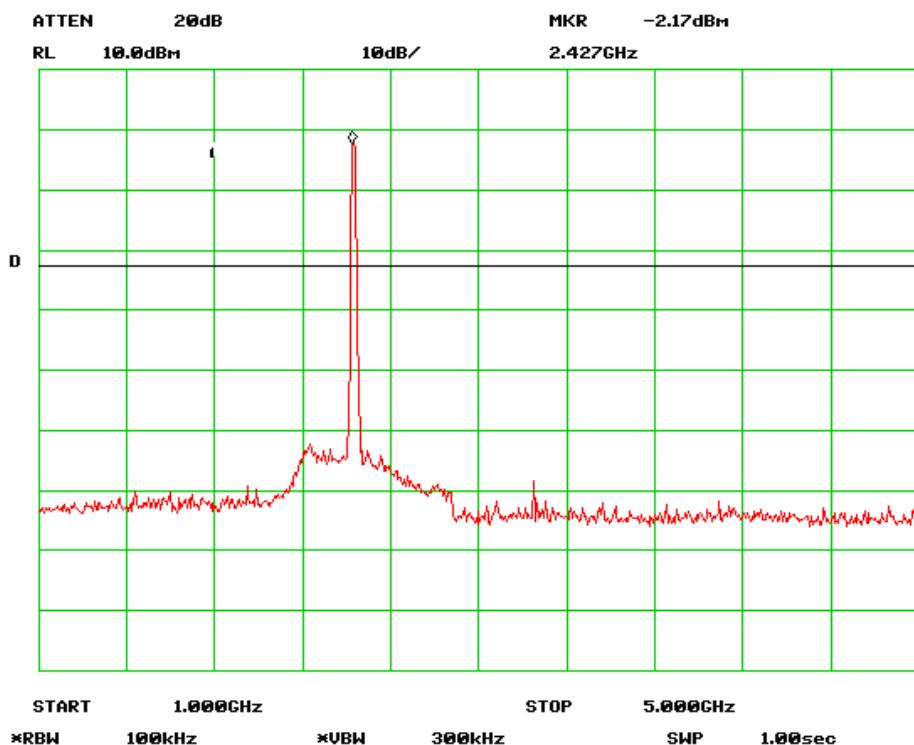


Antenna Port Emission Mid-2 Channel (802.11g)



Title: RF Test Report for 5LINXGLOBAL WiFi Cellphone
Model: GM100N WM680
To: FCC PART 15.247,15.249

Serial#: 1005007-02
Issue Date: Jun 28 2010
Page 39 of 65
www.siemic.com.cn

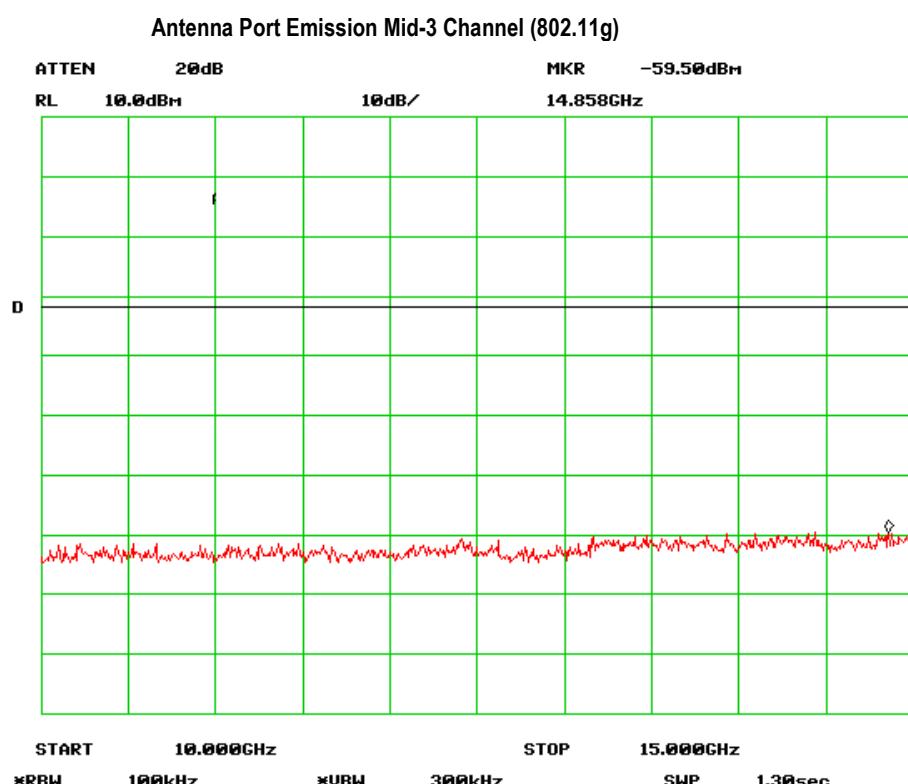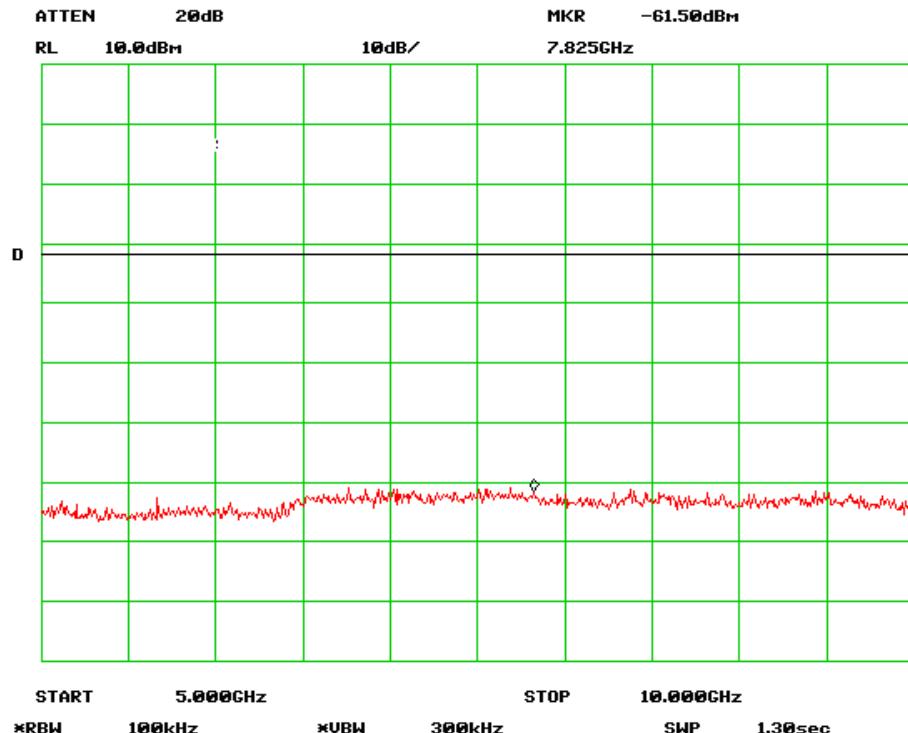


Antenna Port Emission Mid-4 Channel (802.11g)




Title: RF Test Report for 5LINXGLOBAL WiFi Cellphone
Model: GM100N WM680
To: FCC PART 15.247,15.249

Serial#: 1005007-02
Issue Date: Jun 28 2010
Page 40 of 65
www.siemic.com.cn

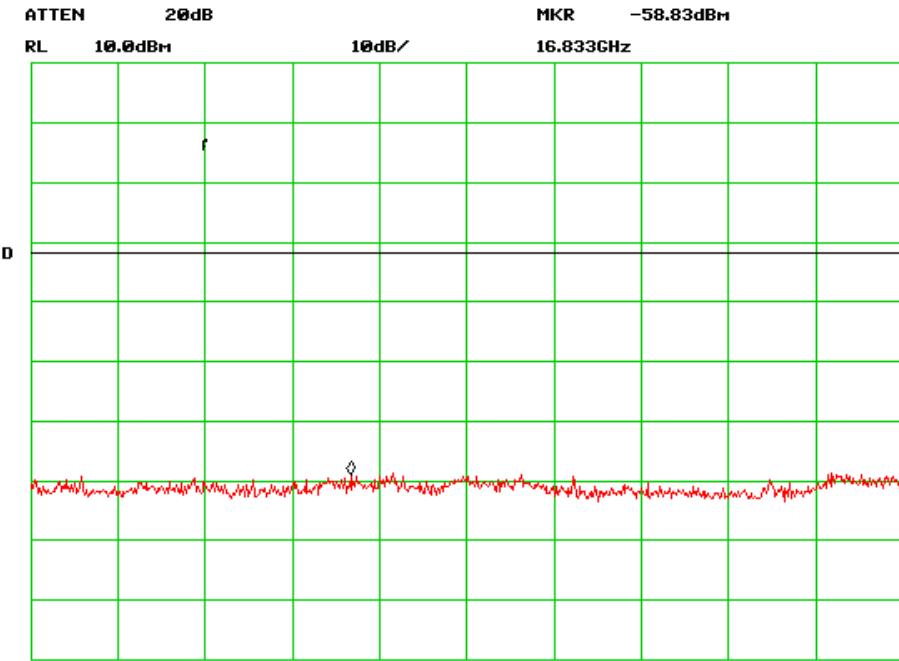

START 15.000GHz STOP 20.000GHz
xRBW 100kHz xUBW 300kHz SWP 1.30sec

Antenna Port Emission Mid-5 Channel (802.11g)

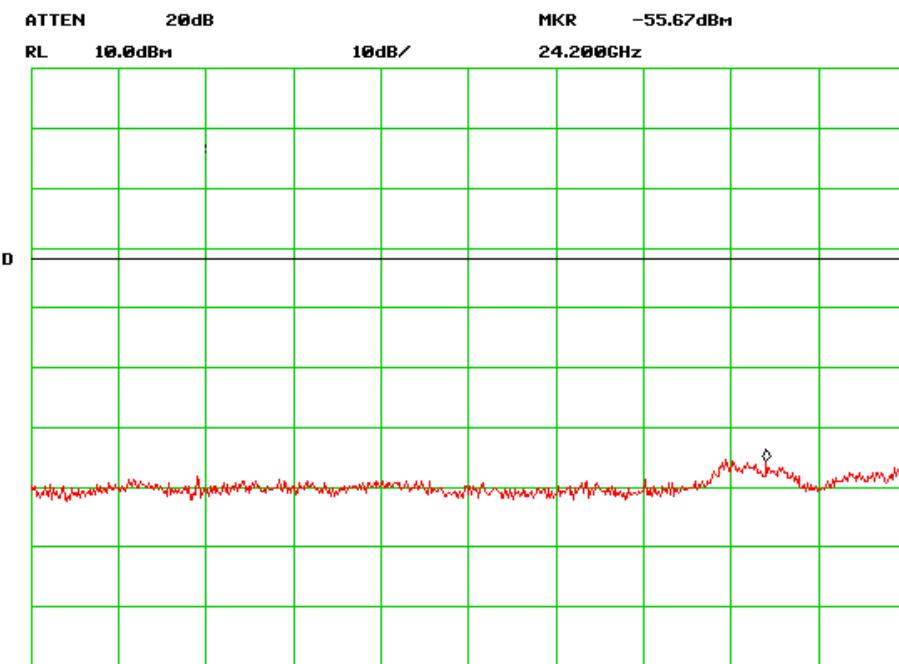


START 20.000GHz STOP 25.000GHz
xRBW 100kHz xUBW 300kHz SWP 1.30sec

Antenna Port Emission Mid-6 Channel (802.11g)




Title: RF Test Report for 5LINXGLOBAL WiFi Cellphone
Model: GM100N WM680
To: FCC PART 15.247,15.249

Serial#: 1005007-02
Issue Date: Jun 28 2010
Page 41 of 65
www.siemic.com.cn

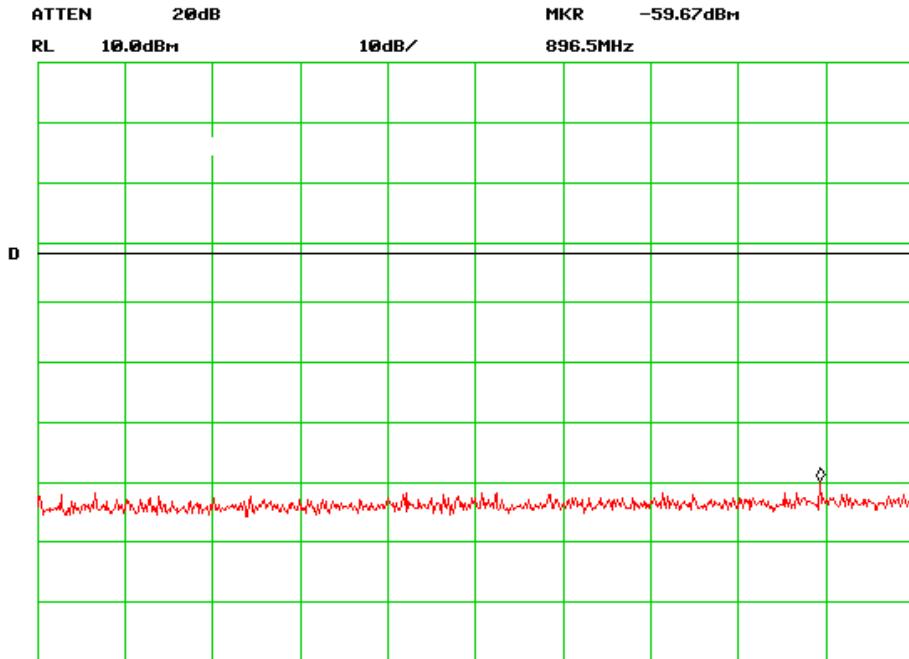

Antenna Port Emission High-1 Channel (802.11g)

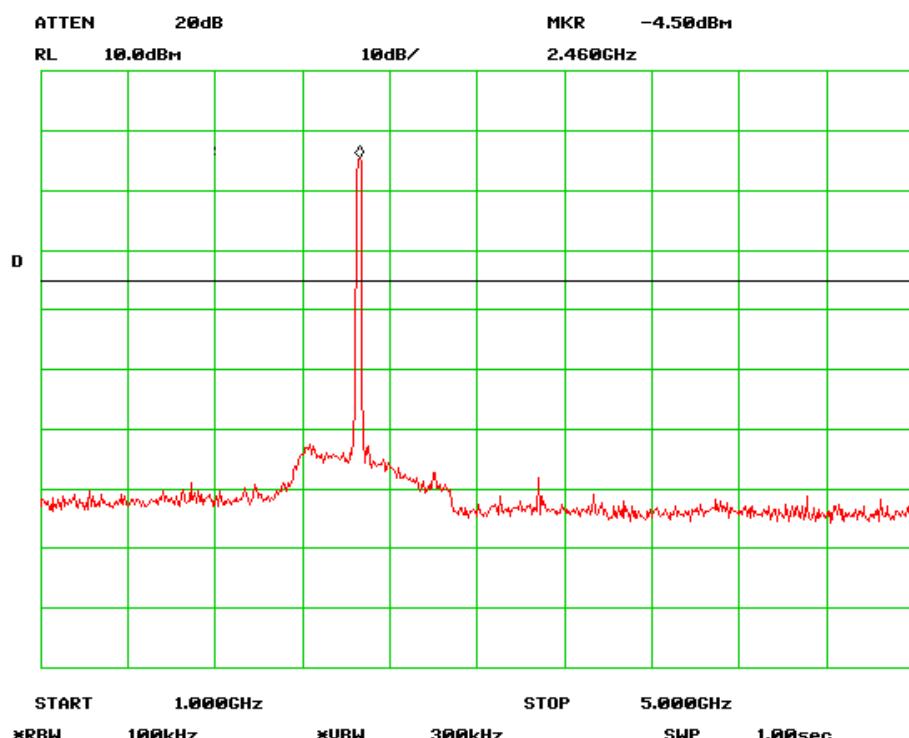


Antenna Port Emission High-2 Channel (802.11g)




Title: RF Test Report for 5LINXGLOBAL WiFi Cellphone
Model: GM100N WM680
To: FCC PART 15.247,15.249

Serial#: 1005007-02
Issue Date: Jun 28 2010
Page 42 of 65
www.siemic.com.cn

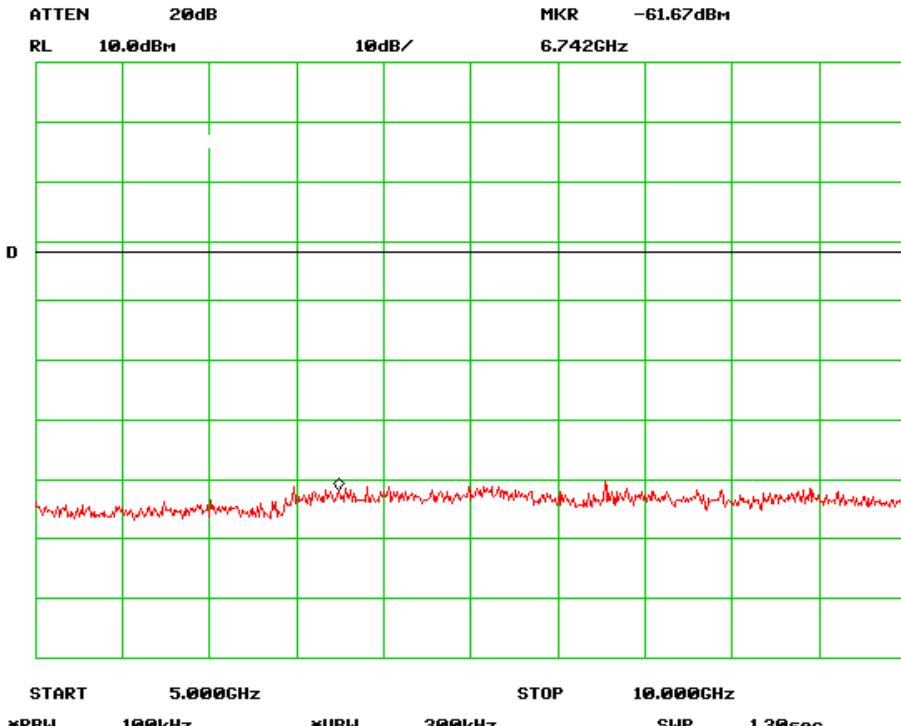

Antenna Port Emission High-3 Channel (802.11g)

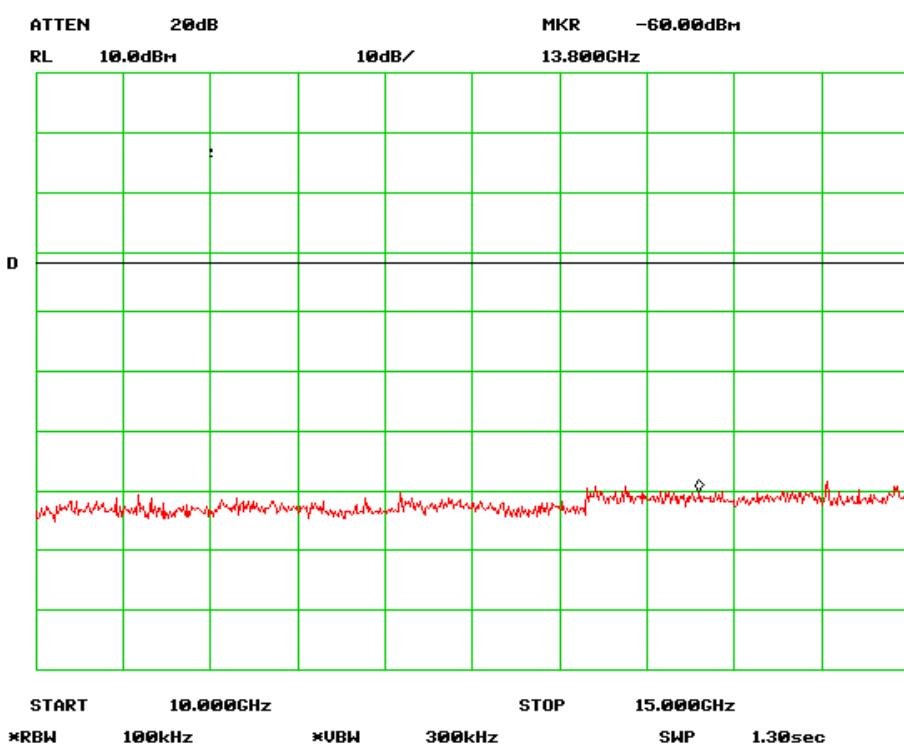


Antenna Port Emission High-4 Channel (802.11g)




Title: RF Test Report for SLINXGLOBAL WiFi Cellphone
Model: GM100N WM680
To: FCC PART 15.247,15.249

Serial#: 1005007-02
Issue Date: Jun 28 2010
Page 43 of 65
www.siemic.com.cn

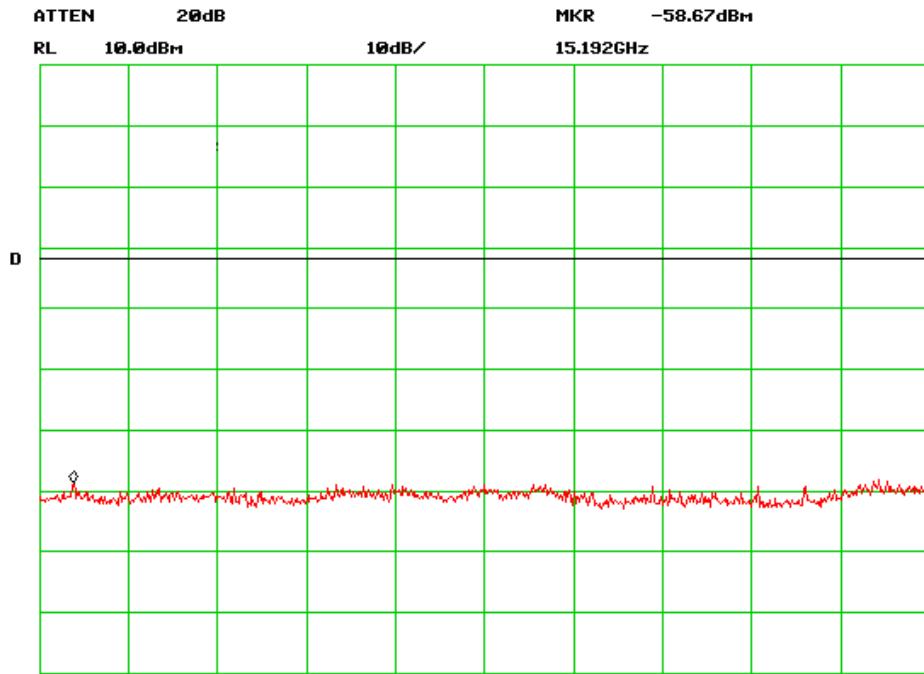

Antenna Port Emission High-5 Channel (802.11g)

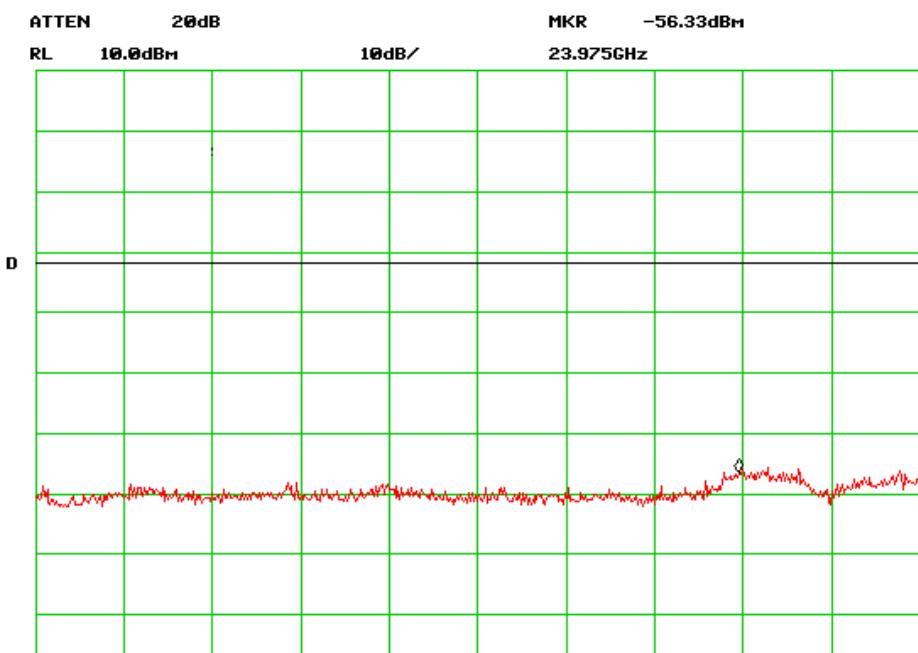

Antenna Port Emission High-6 Channel (802.11g)



5.7 Radiated Spurious Emission < 1GHz


1. All possible modes of operation were investigated. Only the 6 worst case emissions measured, using the correct CISPR detectors, are reported. All other emissions were relatively insignificant.
2. A "-ve" margin indicates a PASS as it refers to the margin present below the limit line at the particular frequency.
3. Radiated Emissions Measurement Uncertainty
All test measurements carried out are traceable to national standards. The uncertainty of the measurement at a confidence level of approximately 95% (in the case where distributions are normal), with a coverage factor of 2, in the range 30MHz – 1GHz & 1GHz above (3m & 10m) is +/-6dB.
4. Environmental Conditions Temperature 16°C
 Relative Humidity 50%
 Atmospheric Pressure 1019mbar
5. Test date : Jun 10~28 2010
Tested By : Alex Wang

Standard Requirement: The emissions from the Low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges.

Test Result:



Radiated Emission Plot

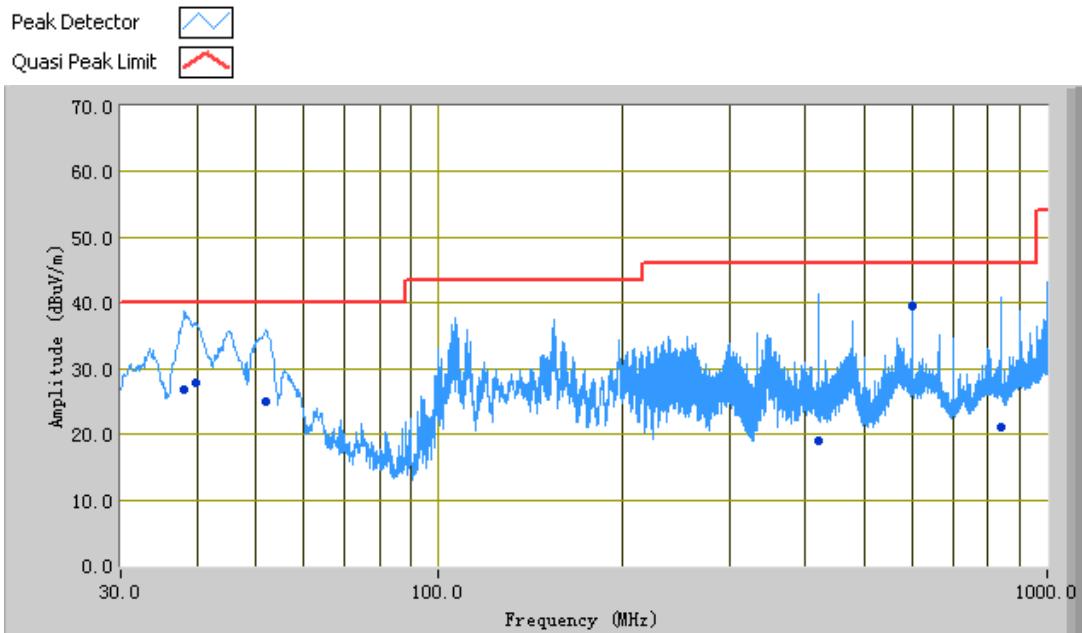

Test Data

| Frequency (MHz) | Quasi Peak (dBuV/m) | Azimuth | Polarity(H/V) | Height (cm) | Factors (dB) | Limit (dBuV/m) | Margin (dB) |
|-----------------|---------------------|---------|---------------|-------------|--------------|----------------|-------------|
| 38.23 | 26.74 | 79.00 | V | 99.00 | -28.85 | 40.00 | -13.26 |
| 39.91 | 27.77 | 0.00 | V | 119.00 | -30.13 | 40.00 | -12.23 |
| 51.92 | 24.86 | 340.00 | V | 130.00 | -36.60 | 40.00 | -15.14 |
| 420.06 | 18.99 | 359.00 | V | 130.00 | -29.26 | 46.00 | -27.01 |
| 839.99 | 21.13 | 232.00 | V | 99.00 | -19.68 | 46.00 | -24.87 |
| 600.03 | 39.64 | 178.00 | H | 192.00 | -25.02 | 46.00 | -6.36 |



5.8 Radiated Spurious Emissions > 1GHz (WIFI)

Standard Requirement: The emissions from the Low-power radio-frequency devices shall not exceed the field strength levels specified in the following table and the level of any unwanted emissions shall not exceed the level of the fundamental emission. The tighter limit applies at the band edges.

Test Result:



Mode: 802.11b

@ 2412MHz @ 3 Meter

| Frequency | Direction | Height | Polar | Cable loss | Amplifier | Corrected Reading | 15.247/15.209 | 15.247/15.209 | |
|-----------|-----------|--------|-------|------------|-----------|-------------------|----------------|---------------|----------|
| GHz | Degree | Meter | H / V | (dB) | (dB) | (dBuV/m) | Limit (dBuV/m) | Margin | Comments |
| 4.824 | 9.00 | 1.07 | v | 5.15 | 55.00 | 55.4 | 74.00 | -18.6 | Peak |
| 4.824 | 12.00 | 1.10 | h | 5.15 | 55.00 | 51.8 | 74.00 | -22.2 | Peak |
| 4.824 | 9.00 | 1.07 | v | 5.15 | 55.00 | 42.6 | 54.00 | -11.4 | Ave |
| 4.824 | 12.00 | 1.10 | h | 5.15 | 55.00 | 40.6 | 54.00 | -13.4 | Ave |
| 7.236 | 5.30 | 1.12 | v | 7.23 | 55.00 | 65.6 | 74.00 | -8.4 | Peak |
| 7.236 | 6.11 | 1.15 | h | 7.23 | 55.00 | 63.7 | 74.00 | -10.3 | Peak |
| 7.236 | 5.30 | 1.12 | v | 7.23 | 55.00 | 49.5 | 54.00 | -4.5 | Ave |
| 7.236 | 6.11 | 1.15 | h | 7.23 | 55.00 | 47.9 | 54.00 | -6.1 | Ave |
| 9.678 | 31.0 | 1.26 | v | 8.56 | 55.00 | 55.1 | 74.00 | -18.9 | Peak |
| 9.678 | 3.0 | 1.34 | h | 8.56 | 55.00 | 54.3 | 74.00 | -19.7 | Peak |
| 9.678 | 31.0 | 1.26 | v | 8.56 | 55.00 | 44.3 | 54.00 | -9.7 | Ave |
| 9.678 | 3.0 | 1.34 | h | 8.56 | 55.00 | 43.2 | 54.00 | -10.8 | Ave |
| 12.06 | 0 | 1.06 | v | 11.03 | 55.00 | 51.1 | 74.00 | -22.9 | Peak |
| 12.06 | 12.0 | 1.24 | h | 11.03 | 55.00 | 50.7 | 74.00 | -23.3 | Peak |
| 12.06 | 0 | 1.06 | v | 11.03 | 55.00 | 42.2 | 54.00 | -11.8 | Ave |
| 12.06 | 12.0 | 1.24 | h | 11.03 | 55.00 | 40.6 | 54.00 | -13.4 | Ave |

Emission was scanned up to 25GHz.

@ 2437MHz @ 3Meter

| Frequency | Direction | Height | Polar | Cable loss | Amplifier | Corrected Reading | 15.247/15.209 | 15.247/15.209 | |
|-----------|-----------|--------|-------|------------|-----------|-------------------|----------------|---------------|----------|
| GHz | Degree | Meter | H / V | (dB) | (dB) | (dBuV/m) | Limit (dBuV/m) | Margin | Comments |
| 4.874 | 31.00 | 1.10 | v | 5.16 | 55.00 | 56.5 | 74.00 | -17.6 | Peak |
| 4.874 | 25.00 | 1.00 | h | 5.16 | 55.00 | 53.1 | 74.00 | -20.9 | Peak |
| 4.874 | 31.00 | 1.10 | v | 5.16 | 55.00 | 44.9 | 54.00 | -9.1 | Ave |
| 4.874 | 25.00 | 1.00 | h | 5.16 | 55.00 | 43.6 | 54.00 | -10.4 | Ave |
| 7.311 | 13.00 | 1.20 | v | 7.31 | 55.00 | 68.1 | 74.00 | -5.9 | Peak |
| 7.311 | 4.00 | 1.03 | h | 7.31 | 55.00 | 66.4 | 74.00 | -7.6 | Peak |
| 7.311 | 13.00 | 1.20 | v | 7.31 | 55.00 | 50.5 | 54.00 | -3.5 | Ave |
| 7.311 | 4.00 | 1.03 | h | 7.31 | 55.00 | 50.1 | 54.00 | -3.9 | Ave |
| 9.748 | 22.0 | 1.30 | v | 8.66 | 55.00 | 57.6 | 74.00 | -16.4 | Peak |
| 9.748 | 7.0 | 1.00 | h | 8.66 | 55.00 | 56.0 | 74.00 | -18.0 | Peak |
| 9.748 | 22.0 | 1.30 | v | 8.66 | 55.00 | 44.3 | 54.00 | -9.7 | Ave |
| 9.748 | 7.0 | 1.00 | h | 8.66 | 55.00 | 45.2 | 54.00 | -8.8 | Ave |
| 12.185 | 0 | 1.20 | v | 11.22 | 55.00 | 52.0 | 74.00 | -22.0 | Peak |
| 12.185 | 0 | 1.08 | h | 11.22 | 55.00 | 51.4 | 74.00 | -22.6 | Peak |
| 12.185 | 0 | 1.20 | v | 11.22 | 55.00 | 43.1 | 54.00 | -10.9 | Ave |
| 12.185 | 0 | 1.08 | h | 11.22 | 55.00 | 40.7 | 54.00 | -13.3 | Ave |

Emission was scanned up to 25GHz.



@ 2462MHz @ 3Meter

| Frequency | Direction | Height | Polar | Cable loss | Amplifier | Corrected Reading | 15.247/15.209 | 15.247/15.209 | |
|-----------|-----------|--------|-------|------------|-----------|-------------------|----------------|---------------|----------|
| GHz | Degree | Meter | H / V | (dB) | (dB) | (dBuV/m) | Limit (dBuV/m) | Margin | Comments |
| 4.924 | 15.00 | 1.07 | v | 5.17 | 55.00 | 54.3 | 74.00 | -19.7 | Peak |
| 4.924 | 25.00 | 1.10 | h | 5.17 | 55.00 | 53.1 | 74.00 | -20.9 | Peak |
| 4.924 | 15.00 | 1.07 | v | 5.17 | 55.00 | 44.5 | 54.00 | -9.5 | Ave |
| 4.924 | 25.00 | 1.10 | h | 5.17 | 55.00 | 42.6 | 54.00 | -11.4 | Ave |
| 7.386 | 0 | 1.20 | v | 7.36 | 55.00 | 66.4 | 74.00 | -7.6 | Peak |
| 7.386 | 3.00 | 1.00 | h | 7.36 | 55.00 | 64.4 | 74.00 | -9.6 | Peak |
| 7.386 | 0 | 1.20 | v | 7.36 | 55.00 | 48.9 | 54.00 | -5.1 | Ave |
| 7.386 | 3.00 | 1.00 | h | 7.36 | 55.00 | 48.2 | 54.00 | -5.8 | Ave |
| 9.848 | 6.00 | 1.10 | v | 8.74 | 55.00 | 55.3 | 74.00 | -18.7 | Peak |
| 9.848 | 21.00 | 1.08 | h | 8.74 | 55.00 | 54.8 | 74.00 | -19.2 | Peak |
| 9.848 | 6.00 | 1.10 | v | 8.74 | 55.00 | 43.3 | 54.00 | -10.7 | Ave |
| 9.848 | 21.00 | 1.08 | h | 8.74 | 55.00 | 45.2 | 54.00 | -8.8 | Ave |
| 12.31 | 4.00 | 1.34 | v | 11.39 | 55.00 | 51.0 | 74.00 | -23.0 | Peak |
| 12.31 | 9.00 | 1.27 | h | 11.39 | 55.00 | 50.5 | 74.00 | -23.5 | Peak |
| 12.31 | 4.00 | 1.34 | v | 11.39 | 55.00 | 42.7 | 54.00 | -11.3 | Ave |
| 12.31 | 9.00 | 1.27 | h | 11.39 | 55.00 | 40.3 | 54.00 | -13.7 | Ave |

Emission was scanned up to 25GHz.

Mode: 802.11g

@ 2412MHz @ 3 Meter

| Frequency | Direction | Height | Polar | Cable loss | Amplifier | Corrected Reading | 15.247/15.209 | 15.247/15.209 | |
|-----------|-----------|--------|-------|------------|-----------|-------------------|----------------|---------------|----------|
| GHz | Degree | Meter | H / V | (dB) | (dB) | (dBuV/m) | Limit (dBuV/m) | Margin | Comments |
| 4.824 | 9.00 | 1.07 | v | 5.15 | 55.00 | 54.7 | 74.00 | -19.3 | Peak |
| 4.824 | 12.00 | 1.10 | h | 5.15 | 55.00 | 51.6 | 74.00 | -22.4 | Peak |
| 4.824 | 9.00 | 1.07 | v | 5.15 | 55.00 | 41.4 | 54.00 | -12.6 | Ave |
| 4.824 | 12.00 | 1.10 | h | 5.15 | 55.00 | 40.0 | 54.00 | -14.0 | Ave |
| 7.236 | 5.30 | 1.12 | v | 7.23 | 55.00 | 64.2 | 74.00 | -9.8 | Peak |
| 7.236 | 6.11 | 1.15 | h | 7.23 | 55.00 | 62.8 | 74.00 | -11.2 | Peak |
| 7.236 | 5.30 | 1.12 | v | 7.23 | 55.00 | 48.1 | 54.00 | -5.9 | Ave |
| 7.236 | 6.11 | 1.15 | h | 7.23 | 55.00 | 47.4 | 54.00 | -6.6 | Ave |
| 9.678 | 31.0 | 1.26 | v | 8.56 | 55.00 | 54.6 | 74.00 | -19.4 | Peak |
| 9.678 | 3.0 | 1.34 | h | 8.56 | 55.00 | 53.5 | 74.00 | -20.5 | Peak |
| 9.678 | 31.0 | 1.26 | v | 8.56 | 55.00 | 42.8 | 54.00 | -11.2 | Ave |
| 9.678 | 3.0 | 1.34 | h | 8.56 | 55.00 | 41.9 | 54.00 | -12.1 | Ave |
| 12.06 | 0 | 1.06 | v | 11.03 | 55.00 | 50.9 | 74.00 | -23.1 | Peak |
| 12.06 | 12.0 | 1.24 | h | 11.03 | 55.00 | 49.7 | 74.00 | -24.3 | Peak |
| 12.06 | 0 | 1.06 | v | 11.03 | 55.00 | 41.8 | 54.00 | -12.2 | Ave |
| 12.06 | 12.0 | 1.24 | h | 11.03 | 55.00 | 40.4 | 54.00 | -13.6 | Ave |

Emission was scanned up to 25GHz.



@ 2437MHz @ 3Meter

| Frequency | Direction | Height | Polar | Cable loss | Amplifier | Corrected Reading | 15.247/15.209 | 15.247/15.209 | |
|-----------|-----------|--------|-------|------------|-----------|-------------------|----------------|---------------|----------|
| GHz | Degree | Meter | H / V | (dB) | (dB) | (dBuV/m) | Limit (dBuV/m) | Margin | Comments |
| 4.874 | 31.00 | 1.10 | v | 5.16 | 55.00 | 54.6 | 74.00 | -19.4 | Peak |
| 4.874 | 25.00 | 1.00 | h | 5.16 | 55.00 | 52.2 | 74.00 | -21.8 | Peak |
| 4.874 | 31.00 | 1.10 | v | 5.16 | 55.00 | 43.5 | 54.00 | -10.5 | Ave |
| 4.874 | 25.00 | 1.00 | h | 5.16 | 55.00 | 42.6 | 54.00 | -11.4 | Ave |
| 7.311 | 13.00 | 1.20 | v | 7.31 | 55.00 | 64.7 | 74.00 | -9.3 | Peak |
| 7.311 | 4.00 | 1.03 | h | 7.31 | 55.00 | 63.1 | 74.00 | -10.9 | Peak |
| 7.311 | 13.00 | 1.20 | v | 7.31 | 55.00 | 48.2 | 54.00 | -5.8 | Ave |
| 7.311 | 4.00 | 1.03 | h | 7.31 | 55.00 | 47.6 | 54.00 | -6.4 | Ave |
| 9.748 | 22.0 | 1.30 | v | 8.66 | 55.00 | 55.1 | 74.00 | -18.9 | Peak |
| 9.748 | 7.0 | 1.00 | h | 8.66 | 55.00 | 53.2 | 74.00 | -20.8 | Peak |
| 9.748 | 22.0 | 1.30 | v | 8.66 | 55.00 | 41.3 | 54.00 | -12.7 | Ave |
| 9.748 | 7.0 | 1.00 | h | 8.66 | 55.00 | 43.6 | 54.00 | -10.4 | Ave |
| 12.185 | 0 | 1.20 | v | 11.22 | 55.00 | 50.5 | 74.00 | -23.5 | Peak |
| 12.185 | 0 | 1.08 | h | 11.22 | 55.00 | 50.9 | 74.00 | -23.1 | Peak |
| 12.185 | 0 | 1.20 | v | 11.22 | 55.00 | 42.1 | 54.00 | -11.9 | Ave |
| 12.185 | 0 | 1.08 | h | 11.22 | 55.00 | 40.8 | 54.00 | -13.2 | Ave |

Emission was scanned up to 25GHz.

@ 2462MHz @ 3Meter

| Frequency | Direction | Height | Polar | Cable loss | Amplifier | Corrected Reading | 15.247/15.209 | 15.247/15.209 | |
|-----------|-----------|--------|-------|------------|-----------|-------------------|----------------|---------------|----------|
| GHz | Degree | Meter | H / V | (dB) | (dB) | (dBuV/m) | Limit (dBuV/m) | Margin | Comments |
| 4.924 | 15.00 | 1.07 | v | 5.17 | 55.00 | 51.9 | 74.00 | -22.1 | Peak |
| 4.924 | 25.00 | 1.10 | h | 5.17 | 55.00 | 52.8 | 74.00 | -21.2 | Peak |
| 4.924 | 15.00 | 1.07 | v | 5.17 | 55.00 | 45.6 | 54.00 | -8.4 | Ave |
| 4.924 | 25.00 | 1.10 | h | 5.17 | 55.00 | 43.1 | 54.00 | -10.9 | Ave |
| 7.386 | 0 | 1.20 | v | 7.36 | 55.00 | 63.6 | 74.00 | -10.4 | Peak |
| 7.386 | 3.00 | 1.00 | h | 7.36 | 55.00 | 62.0 | 74.00 | -12.0 | Peak |
| 7.386 | 0 | 1.20 | v | 7.36 | 55.00 | 47.7 | 54.00 | -6.3 | Ave |
| 7.386 | 3.00 | 1.00 | h | 7.36 | 55.00 | 46.4 | 54.00 | -7.6 | Ave |
| 9.848 | 6.00 | 1.10 | v | 8.74 | 55.00 | 54.3 | 74.00 | -19.7 | Peak |
| 9.848 | 21.00 | 1.08 | h | 8.74 | 55.00 | 52.8 | 74.00 | -21.2 | Peak |
| 9.848 | 6.00 | 1.10 | v | 8.74 | 55.00 | 41.5 | 54.00 | -12.5 | Ave |
| 9.848 | 21.00 | 1.08 | h | 8.74 | 55.00 | 43.1 | 54.00 | -10.9 | Ave |
| 12.31 | 4.00 | 1.34 | v | 11.39 | 55.00 | 50.3 | 74.00 | -23.7 | Peak |
| 12.31 | 9.00 | 1.27 | h | 11.39 | 55.00 | 49.6 | 74.00 | -24.4 | Peak |
| 12.31 | 4.00 | 1.34 | v | 11.39 | 55.00 | 42.7 | 54.00 | -11.3 | Ave |
| 12.31 | 9.00 | 1.27 | h | 11.39 | 55.00 | 41.7 | 54.00 | -12.3 | Ave |

Emission was scanned up to 25GHz.



BandEdge Test Result (802.11b)

| Frequency (GHz) | Reading (dBuV/m) | Direction (degree) | Height (m) | Polarity (H/V) | Antenna Loss (dB) | Cable Loss (dB) | Amplifier (dB) | Corrected Reading (dBuV/m) | 15.247/15.209 Limit @ 3m (dBuV/m) | Margin (dBuV/m) | Detector (pk/avg) |
|-----------------|------------------|--------------------|------------|----------------|-------------------|-----------------|----------------|----------------------------|-----------------------------------|-----------------|-------------------|
| 2.400 | 73.33 | 0.00 | 100.00 | H | 27.50 | 2.50 | 32.04 | 71.29 | 74.00 | -2.72 | Peak |
| 2.400 | 55.25 | 0.00 | 100.00 | H | 27.50 | 2.50 | 32.04 | 53.21 | 54.00 | -0.79 | Ave |
| 2.400 | 75.60 | 171.00 | 100.00 | V | 27.50 | 2.50 | 32.04 | 73.56 | 74.00 | -0.44 | Peak |
| 2.400 | 54.90 | 171.00 | 100.00 | V | 27.50 | 2.50 | 32.04 | 52.86 | 54.00 | -1.14 | Ave |
| 2.483.5 | 62.01 | 7.00 | 100.00 | H | 27.50 | 2.50 | 32.04 | 59.97 | 74.00 | -14.03 | Peak |
| 2.483.5 | 48.58 | 7.00 | 100.00 | H | 27.50 | 2.50 | 32.04 | 46.54 | 54.00 | -7.46 | Ave |
| 2.483.5 | 73.94 | 169.00 | 112.00 | V | 27.50 | 2.50 | 32.04 | 71.90 | 74.00 | -2.10 | Peak |
| 2.483.5 | 54.86 | 169.00 | 112.00 | V | 27.50 | 2.50 | 32.04 | 52.82 | 54.00 | -1.18 | Ave |

BandEdge Test Result (802.11G)

| Frequency (GHz) | Reading (dBuV/m) | Direction (degree) | Height (m) | Polarity (H/V) | Antenna Loss (dB) | Cable Loss (dB) | Amplifier (dB) | Corrected Reading (dBuV/m) | 15.247/15.209 Limit @ 3m (dBuV/m) | Margin (dBuV/m) | Detector (pk/avg) |
|-----------------|------------------|--------------------|------------|----------------|-------------------|-----------------|----------------|----------------------------|-----------------------------------|-----------------|-------------------|
| 2.400 | 73.07 | 359.00 | 127.00 | H | 27.50 | 2.50 | 32.04 | 71.03 | 74.00 | -2.97 | Peak |
| 2.400 | 55.40 | 359.00 | 127.00 | H | 27.50 | 2.50 | 32.04 | 53.36 | 54.00 | -0.64 | Ave |
| 2.400 | 70.09 | 352.00 | 103.00 | V | 27.50 | 2.50 | 32.04 | 68.05 | 74.00 | -5.95 | Peak |
| 2.400 | 53.57 | 352.00 | 103.00 | V | 27.50 | 2.50 | 32.04 | 51.53 | 54.00 | -2.47 | Ave |
| 2.483.5 | 73.61 | 357.00 | 141.00 | H | 27.50 | 2.50 | 32.04 | 71.57 | 74.00 | -2.43 | Peak |
| 2.483.5 | 55.50 | 357.00 | 141.00 | H | 27.50 | 2.50 | 32.04 | 53.46 | 54.00 | -0.54 | Ave |
| 2.483.5 | 61.64 | 133.00 | 100.00 | V | 27.50 | 2.50 | 32.04 | 59.60 | 74.00 | -14.40 | Peak |
| 2.483.5 | 48.65 | 133.00 | 100.00 | V | 27.50 | 2.50 | 32.04 | 46.61 | 54.00 | -7.39 | Ave |



5.9 Radiated Spurious Emissions > 1GHz (Bluetooth)

Standard Requirement: Part 15.249

Test Result:



Fundamental

Low channel

| Frequency | Direction | Height | Polar | Cable loss | Amplifier | Corrected Reading | | |
|-----------|-----------|--------|-------|------------|-----------|-------------------|----------------|--------|
| GHz | Degree | Meter | H / V | (dB) | (dB) | (dBuV/m) | Limit (dBuV/m) | Margin |
| 2.402 | 111.00 | 1.37 | v | 5.15 | 55.00 | 80.61 | 94.00 | -13.39 |
| 2.402 | 113.00 | 2.10 | h | 5.15 | 55.00 | 82.11 | 94.00 | -11.89 |

Middle channel

| Frequency | Direction | Height | Polar | Cable loss | Amplifier | Corrected Reading | | |
|-----------|-----------|--------|-------|------------|-----------|-------------------|----------------|--------|
| GHz | Degree | Meter | H / V | (dB) | (dB) | (dBuV/m) | Limit (dBuV/m) | Margin |
| 2.441 | 109.00 | 1.50 | v | 5.15 | 55.00 | 76.66 | 94.00 | -17.34 |
| 2.441 | 106.00 | 2.10 | h | 5.15 | 55.00 | 81.52 | 94.00 | -12.48 |

High channel

| Frequency | Direction | Height | Polar | Cable loss | Amplifier | Corrected Reading | | |
|-----------|-----------|--------|-------|------------|-----------|-------------------|----------------|--------|
| GHz | Degree | Meter | H / V | (dB) | (dB) | (dBuV/m) | Limit (dBuV/m) | Margin |
| 2.480 | 120.00 | 1.50 | v | 5.15 | 55.00 | 78.59 | 94.00 | -15.41 |
| 2.480 | 133.00 | 2.30 | h | 5.15 | 55.00 | 80.32 | 94.00 | -13.68 |

- Peak value is lower than Average limit , so averaging measure was not measured.



@ 2402MHz @ 3 Meter

| Frequency | Direction | Height | Polar | Cable loss | Amplifier | Corrected Reading | 15.247/15.209 | 15.247/15.209 | |
|-----------|-----------|--------|-------|------------|-----------|-------------------|----------------|---------------|----------|
| GHz | Degree | Meter | H / V | (dB) | (dB) | (dBuV/m) | Limit (dBuV/m) | Margin | Comments |
| 4.804 | 9.00 | 1.07 | v | 5.15 | 55.00 | 54.7 | 74.00 | -19.3 | Peak |
| 4.804 | 12.00 | 1.10 | h | 5.15 | 55.00 | 51.6 | 74.00 | -22.4 | Peak |
| 4.804 | 9.00 | 1.07 | v | 5.15 | 55.00 | 41.4 | 54.00 | -12.6 | Ave |
| 4.804 | 12.00 | 1.10 | h | 5.15 | 55.00 | 40.0 | 54.00 | -14.0 | Ave |
| 7.206 | 5.30 | 1.12 | v | 7.23 | 55.00 | 64.2 | 74.00 | -9.8 | Peak |
| 7.206 | 6.11 | 1.15 | h | 7.23 | 55.00 | 62.8 | 74.00 | -11.2 | Peak |
| 7.206 | 5.30 | 1.12 | v | 7.23 | 55.00 | 48.1 | 54.00 | -5.9 | Ave |
| 7.206 | 6.11 | 1.15 | h | 7.23 | 55.00 | 47.4 | 54.00 | -6.6 | Ave |

Emission was scanned up to 25GHz.

@ 2441MHz @ 3Meter

| Frequency | Direction | Height | Polar | Cable loss | Amplifier | Corrected Reading | 15.247/15.209 | 15.247/15.209 | |
|-----------|-----------|--------|-------|------------|-----------|-------------------|----------------|---------------|----------|
| GHz | Degree | Meter | H / V | (dB) | (dB) | (dBuV/m) | Limit (dBuV/m) | Margin | Comments |
| 4.882 | 31.00 | 1.10 | v | 5.16 | 55.00 | 53.5 | 74.00 | -20.5 | Peak |
| 4.882 | 25.00 | 1.00 | h | 5.16 | 55.00 | 52.0 | 74.00 | -22.0 | Peak |
| 4.882 | 31.00 | 1.10 | v | 5.16 | 55.00 | 44.9 | 54.00 | -9.1 | Ave |
| 4.882 | 25.00 | 1.00 | h | 5.16 | 55.00 | 43.1 | 54.00 | -10.9 | Ave |
| 7.323 | 13.00 | 1.20 | v | 7.31 | 55.00 | 65.6 | 74.00 | -8.4 | Peak |
| 7.323 | 4.00 | 1.03 | h | 7.31 | 55.00 | 63.4 | 74.00 | -10.6 | Peak |
| 7.323 | 13.00 | 1.20 | v | 7.31 | 55.00 | 49.6 | 54.00 | -4.4 | Ave |
| 7.323 | 4.00 | 1.03 | h | 7.31 | 55.00 | 48.3 | 54.00 | -5.7 | Ave |

Emission was scanned up to 25GHz.

@ 2480MHz @ 3Meter

| Frequency | Direction | Height | Polar | Cable loss | Amplifier | Corrected Reading | 15.247/15.209 | 15.247/15.209 | |
|-----------|-----------|--------|-------|------------|-----------|-------------------|----------------|---------------|----------|
| GHz | Degree | Meter | H / V | (dB) | (dB) | (dBuV/m) | Limit (dBuV/m) | Margin | Comments |
| 4.960 | 15.00 | 1.07 | v | 5.17 | 55.00 | 55.8 | 74.00 | -18.2 | Peak |
| 4.960 | 25.00 | 1.10 | h | 5.17 | 55.00 | 54.3 | 74.00 | -19.7 | Peak |
| 4.960 | 15.00 | 1.07 | v | 5.17 | 55.00 | 46.4 | 54.00 | -7.6 | Ave |
| 4.960 | 25.00 | 1.10 | h | 5.17 | 55.00 | 44.3 | 54.00 | -9.7 | Ave |
| 7.440 | 0 | 1.20 | v | 7.36 | 55.00 | 64.8 | 74.00 | -9.2 | Peak |
| 7.440 | 3.00 | 1.00 | h | 7.36 | 55.00 | 63.1 | 74.00 | -10.9 | Peak |
| 7.440 | 0 | 1.20 | v | 7.36 | 55.00 | 48.2 | 54.00 | -5.8 | Ave |
| 7.440 | 3.00 | 1.00 | h | 7.36 | 55.00 | 47.0 | 54.00 | -7.0 | Ave |

Emission was scanned up to 25GHz.



Annex A. TEST INSTRUMENT & METHOD

Annex A.i. TEST INSTRUMENTATION & GENERAL PROCEDURES

| Instrument | Manufacturer | Model | CAL Due Date |
|---------------------------------|-----------------|----------------------------|--------------|
| Spectrum Analyzer | HP | 8564 E | 2011.04.26 |
| EMI Receiver | Rohde & Schwarz | ESPI 3 | 2011.02.19 |
| Antenna (30MHz~2GHz) | Sunol Sciences | JB1 | 2010.10.04 |
| Horn Antenna (1~18GHz) | A-INFOMW | JXTXLB-10180 | 2010.11.18 |
| Horn Antenna (1~18GHz) | N/A | N/A | 2011.10.04 |
| Pre-Amplifier(0.01 ~ 1.3GHz) | HP | 8447F | 2011.04.24 |
| Pre-Amplifier(0.1 ~ 18GHz) | MITEQ | AMF-7D-00101800-30- 10P | 2011.03.05 |
| Horn Antenna (18~40GHz) | Com Power | AH-840 | 2011.05.21 |
| Microwave Pre-Amp (18~40GHz) | Com Power | PA-840 | 2011.05.21 |
| CHASE LISN | Chase | MN2050B | 05/18/2011 |



Annex A.ii. CONDUCTED EMISSIONS TEST DESCRIPTION

Test Set-up

1. The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m x 1m x 0.8m high, non-metallic table, as shown in Annex B.
2. The power supply for the EUT was fed through a $50\Omega/50\mu\text{H}$ EUT LISN, connected to filtered mains.
3. The RF OUT of the EUT LISN was connected to the EMI test receiver via a low-loss coaxial cable.
4. All other supporting equipments were powered separately from another main supply.

Test Method

1. The EUT was switched on and allowed to warm up to its normal operating condition.
2. A scan was made on the NEUTRAL line (for AC mains) or Earth line (for DC power) over the required frequency range using an EMI test receiver.
3. High peaks, relative to the limit line, were then selected.
4. The EMI test receiver was then tuned to the selected frequencies and the necessary measurements made with a receiver bandwidth setting of 10 KHz. For FCC tests, only Quasi-peak measurements were made; while for CISPR/EN tests, both Quasi-peak and Average measurements were made.
5. Steps 2 to 4 were then repeated for the LIVE line (for AC mains) or DC line (for DC power).

Sample Calculation Example

At 20 MHz

limit = $250 \mu\text{V} = 47.96 \text{ dB}\mu\text{V}$

Transducer factor of LISN, pulse limiter & cable loss at 20 MHz = 11.20 dB

Q-P reading obtained directly from EMI Receiver = $40.00 \text{ dB}\mu\text{V}$
(Calibrated for system losses)

Therefore, Q-P margin = $47.96 - 40.00 = 7.96$

i.e. **7.96 dB below limit**



Annex A. iii RADIATED EMISSIONS TEST DESCRIPTION


EUT Characterisation

EUT characterisation, over the frequency range from 30MHz to 10th Harmonic, was done in order to minimise radiated emissions testing time while still maintaining high confidence in the test results.

The EUT was placed in the chamber, at a height of about 0.8m on a turntable. Its radiated emissions frequency profile was observed, using a spectrum analyzer /receiver with the appropriate broadband antenna placed 3m away from the EUT. Radiated emissions from the EUT were maximised by rotating the turntable manually, changing the antenna polarisation and manipulating the EUT cables while observing the frequency profile on the spectrum analyzer / receiver. Frequency points at which maximum emissions occurred, clock frequencies and operating frequencies were then noted for the formal radiated emissions test at the Open Area Test Site (OATS).

Test Set-up

1. The EUT and supporting equipment were set up in accordance with the requirements of the standard on top of a 1.5m X 1.0m X 0.8m high, non-metallic table.
2. The filtered power supply for the EUT and supporting equipment were tapped from the appropriate power sockets located on the turntable.
3. The relevant broadband antenna was set at the required test distance away from the EUT and supporting equipment boundary.

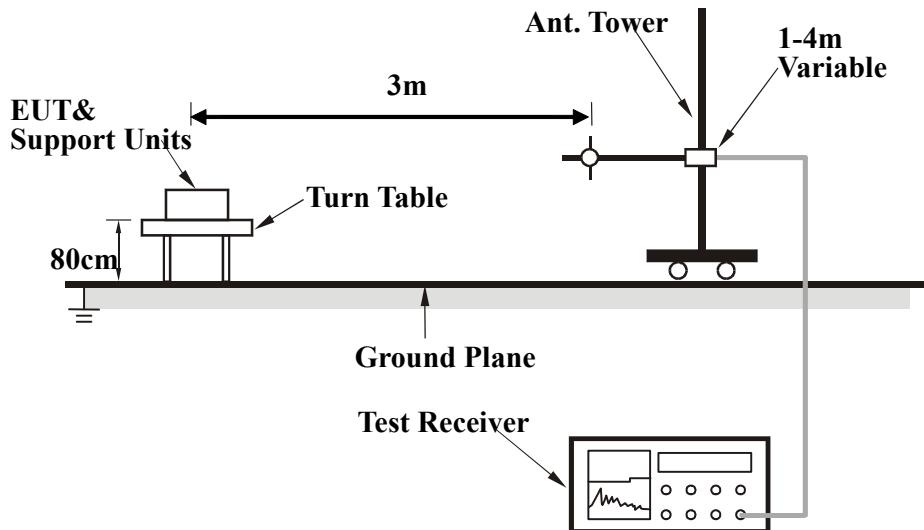



Test Method

The following procedure was performed to determine the maximum emission axis of EUT:

1. With the receiving antenna is H polarization, rotate the EUT in turns with three orthogonal axes to determine the axis of maximum emission.
2. With the receiving antenna is V polarization, rotate the EUT in turns with three orthogonal axes to determine the axis of maximum emission.
3. Compare the results derived from above two steps. So, the axis of maximum emission from EUT was determined and the configuration was used to perform the final measurement.

Final Radiated Emission Measurement

1. Setup the configuration according to figure 1. Turn on EUT and make sure that it is in normal function.
2. For emission frequencies measured below 1 GHz, a pre-scan is performed in a shielded chamber to determine the accurate frequencies of higher emissions will be checked on a open test site. As the same purpose, for emission frequencies measured above 1 GHz, a pre-scan also be performed with a 1 meter measuring distance before final test.
3. For emission frequencies measured below and above 1 GHz, set the spectrum analyzer on a 100 kHz and 1 MHz resolution bandwidth respectively for each frequency measured in step 2.
4. The search antenna is to be raised and lowered over a range from 1 to 4 meters in horizontally polarized orientation. Position the highness when the highest value is indicated on spectrum analyzer, then change the orientation of EUT on test table over a range from 0° to 360° with a speed as slow as possible, and keep the azimuth that highest emission is indicated on the spectrum analyzer. Vary the antenna position again and record the highest value as a final reading.
5. Repeat step 4 until all frequencies need to be measured were complete.
6. Repeat step 5 with search antenna in vertical polarized orientations.

During the radiated emission test, the Spectrum Analyzer was set with the following configurations:

| Frequency Band (MHz) | Function | Resolution bandwidth | Video Bandwidth |
|----------------------|----------|----------------------|-----------------|
| 30 to 1000 | Peak | 100 kHz | 100 kHz |
| Above 1000 | Peak | 1 MHz | 1 MHz |
| | Average | 1 MHz | 10 Hz |

Sample Calculation Example

The field strength is calculated by adding the Antenna Factor and Cable Factor, and subtracting the Amplifier Gain (if any) from the measured reading. For the limit is employed average value, therefore the peak value can be transferred to average value by subtracting the duty factor. The basic equation with a sample calculation is as follows:

$$\text{Peak} = \text{Reading} + \text{Corrected Factor}$$

where

$$\text{Corr. Factor} = \text{Antenna Factor} + \text{Cable Factor} - \text{Amplifier Gain (if any)}$$

And the average value is

$$\text{Average} = \text{Peak Value} + \text{Duty Factor or}$$
$$\text{Set RBW} = 1\text{MHz}, \text{VBW} = 10\text{Hz}.$$

Note :

If the measured frequencies are fall in the restricted frequency band, the limit employed must be quasi peak value when frequencies are below or equal to 1 GHz. And the measuring instrument is set to quasi peak detector function.



Title: RF Test Report for 5LINXGLOBAL WiFi Cellphone
Model: GM100N WM680
To: FCC PART 15.247,15.249

Serial#: 1005007-02
Issue Date: Jun 28 2010
Page 58 of 65
www.siemic.com.cn

Annex B. EUT AND TEST SETUP PHOTOGRAPHS

Annex B.i. Photograph : EUT Photo

See separate attachment



Title: RF Test Report for 5LINXGLOBAL WiFi Cellphone
Model: GM100N WM680
To: FCC PART 15.247,15.249

Serial#: 1005007-02
Issue Date: Jun 28 2010
Page 59 of 65
www.siemic.com.cn

Annex B.ii Photograph 4: Test Setup Photo

See separate attachment



Annex C. TEST SETUP AND SUPPORTING EQUIPMENT

EUT TEST CONDITIONS


Annex C. i. SUPPORTING EQUIPMENT DESCRIPTION

The following is a description of supporting equipment and details of cables used with the EUT.

| Equipment Description (Including Brand Name) | Model & Serial Number | Cable Description (List Length, Type & Purpose) |
|---|-----------------------|--|
| PC | Gateway | 1.5m shield cable |




Block Configuration Diagram for Radiated Emission

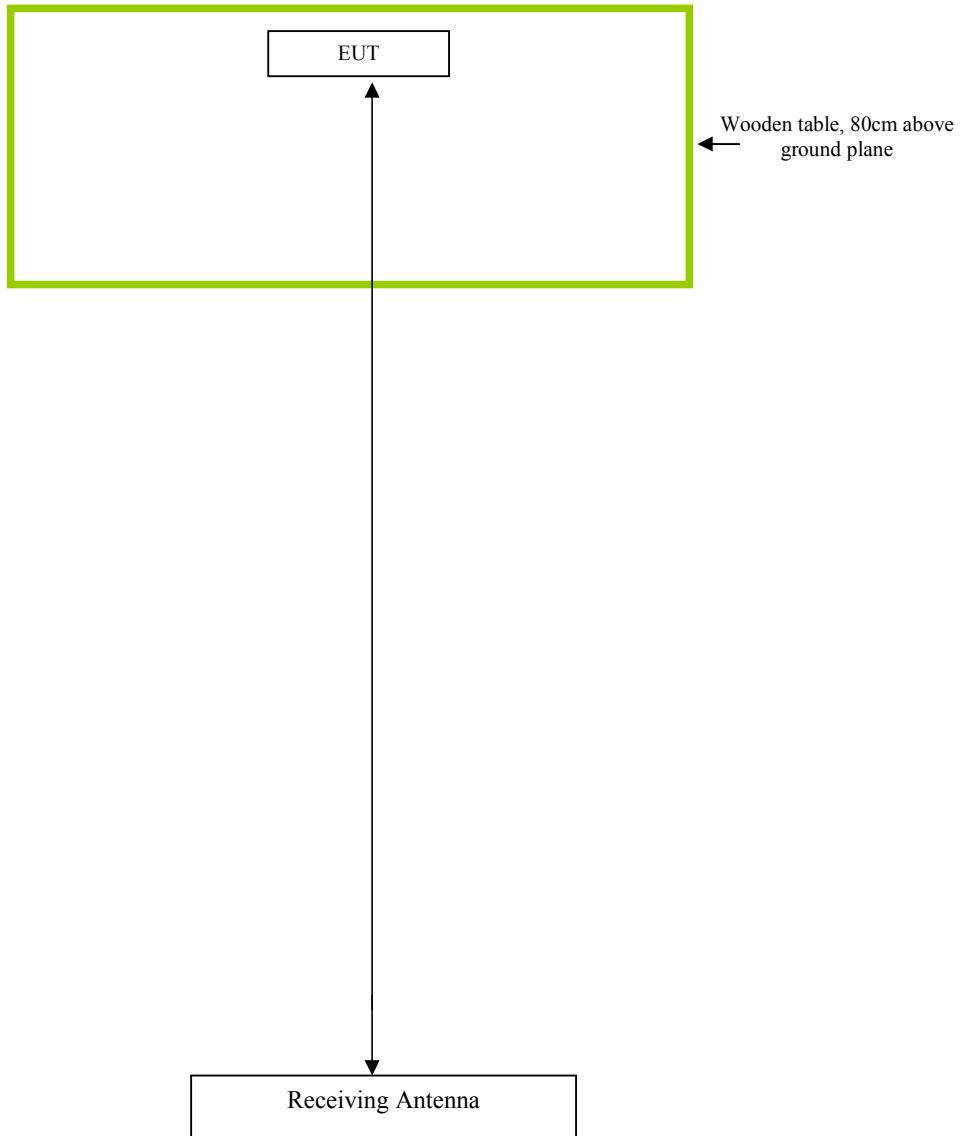



Block Configuration Diagram for Conducted Emission

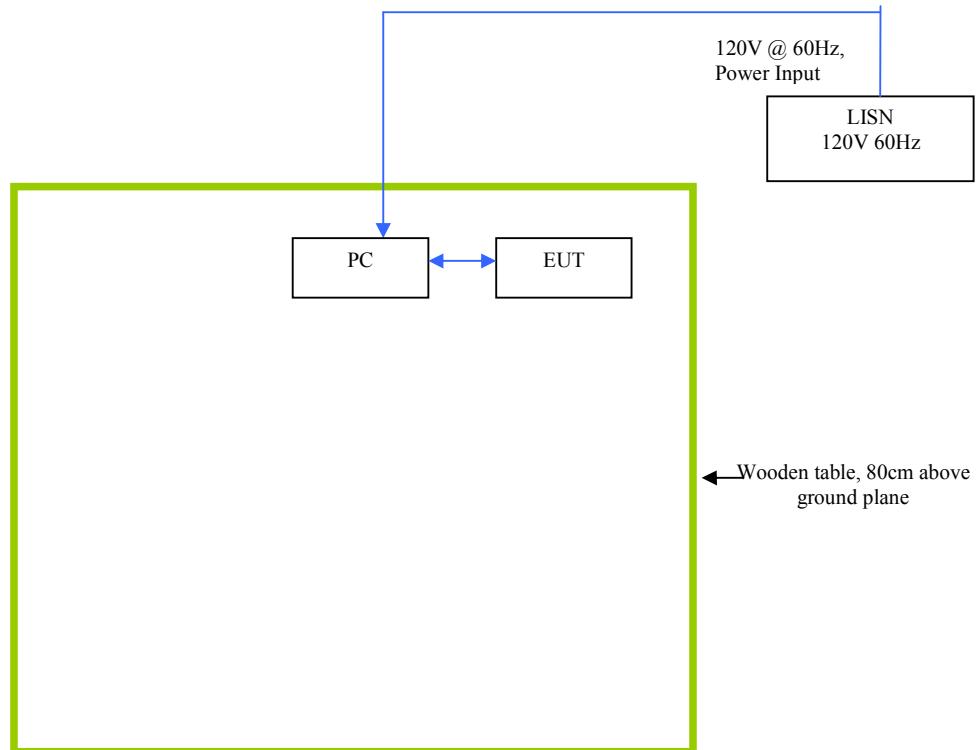



Annex C.ii. EUT OPERATING CONDITIONS

The following is the description of how the EUT is exercised during testing.

| Test | Description Of Operation |
|-----------|--|
| Emissions | The EUT was continuously transmitting to stimulate the worst case. |



SIEMIC, INC.

Accessing global markets

Title: RF Test Report for 5LINXGLOBAL WiFi Cellphone
Model: GM100N WM680
To: FCC PART 15.247,15.249

Serial#: 1005007-02
Issue Date: Jun 28 2010
Page 64 of 65
www.siemic.com.cn

Annex D. USER MANUAL / BLOCK DIAGRAM / SCHEMATICS / PART LIST

Please see attachment



Title: RF Test Report for 5LINXGLOBAL WiFi Cellphone
Model: GM100N WM680
To: FCC PART 15.247,15.249

Serial#: 1005007-02
Issue Date: Jun 28 2010
Page 65 of 65
www.siemic.com.cn

Annex E. SIEMIC ACCREDITATION CERTIFICATES

SIEMIC ACCREDITATION DETAILS: FCC Registration NO:986914

FEDERAL COMMUNICATIONS COMMISSION

Laboratory Division
7435 Oakland Mills Road
Columbia, MD 21046

April 25, 2008

Registration Number: 986914

SIEMIC Nanjing (China) Laboratories
2-1 Longcang Avenue,
Yuhua Economic and Technology Development Park,
Nanjing, 210039
China

Attention: Leslie Bai

Re: Measurement facility located at 2-1 Longcang Avenue, Nanjing, China
Anechoic chamber (3 meters) and 3&10 meter OATS
Date of Listing: April 25, 2008

Dear Sir or Madam:

Your request for registration of the subject measurement facility has been reviewed and found to be in compliance with the requirements of Section 2.948 of the FCC rules. The information has, therefore, been placed on file and the name of your organization added to the list of facilities whose measurement data will be accepted in conjunction with applications for Certification under Parts 15 or 18 of the Commission's Rules. Please note that the file must be updated for any changes made to the facility and the registration must be renewed at least every three years.

Measurement facilities that have indicated that they are available to the public to perform measurement services on a fee basis may be found on the FCC website www.fcc.gov under E-Filing, OET Equipment Authorization Electronic Filing, Test Firms.

Sincerely,

Katie Hawkins
Electronics Engineer