

W66 N220 Commerce Court

Cedarburg, WI 53012

USA
Phone: 262.375.4400

Fax: 262.375.4248

www.lsr.com

TEST REPORT # TR 312142 A C-1489 FCCIC FHSS LSR Job #: C-1489

Compliance Testing of:

Logic PD 37x Torpedo + Wireless SOM

Test Date(s):

January 9th to July 10th 2012

Prepared For:

Logic PD

411 Washington Ave N. Suite 400

Minneapolis, MN 55401

This Test Report is issued under the Authority of:

Khairul Aidi Zainal, Senior EMC Engineer

Signature: Date:7/31/12

Signature: ____ Date: 8/6/2012 Khairul Aidi Zainal, Senior EMC Engineer.

Date:7/31/12

This Test Report may not be reproduced, except in full, without written approval of LS Research, LLC.

TABLE OF CONTENTS

EXHIBIT 1. INTRODUCTION		5
1.1 - Scope		5
1.2 – Normative References .		5
1.3 - LS Research, LLC Test	Facility	6
1.4 – Location of Testing		6
1.5 – Test Equipment Utilized	l	6
	SESSMENT	
2.1 – Client Information		7
	EUT) Information	
	scription	
	the EUT is a dual band isolated Magne	
1. 2.5dBi peak between 2	.39 to 2.49 GHz	7
2. 3.5dBi peak between 4	.9 to 5.9 GHz	7
2.4 - EUT'S Technical Specifi	cations	8
2.5dBi peak between 2.39 to	2.49 GHz	8
3.5dBi peak between 4.9 to 5	.9 GHz	8
2.5 - Product Description		9
EXHIBIT 3. EUT OPERATING CO	NDITIONS & CONFIGURATIONS DUI	RING TESTS10
3.1 - Climate Test Conditions		10
3.2 - Applicability & Summary	Of EMC Emission Test Results	10
3.3 - Modifications Inocorpora	ated In The EUT For Compliance Purpo	oses10
3.4 - Deviations & Exclusions	From Test Specifications	10
EXHIBIT 4. DECLARATION OF C	ONFORMITY	11
EXHIBIT 5. RADIATED EMISSION	NS TEST	12
5.1 - Test Setup		12
5.2 - Test Procedure		12
5.3 - Test Equipment Utilized		13
5.4 - Test Results		13
5.5 - Calculation of Radiated	Emissions Limits	14
5.6 - Radiated Emissions Tes	t Data Chart	15
5.7 - Screen Captures - Radi	ated Emissions Test	17
	IONS TEST, AC POWER LINE	
Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
Report # TR 312142 A C-1489	Model #: SOMDM3730-30-	Template: 15.247
FCCIC FHSS	2780AKCR-B	FHSS
LSR Job #: C-1489	Serial#: Refer to table in section 2.2	Page 2 of 52

6.1 - Test Setup		20
6.2 - Test Procedure		20
6.3 - Test Equipment Utilized		20
6.4 - Test Results		20
6.5 - FCC Limits of Conducted	d Emissions at the AC Mains Ports	21
6.6 - CONDUCTED EMISSIC	NS TEST DATA CHART	21
6.7 Screen Captures – Cor	nducted Emissions Test	22
6.8 Screen Captures – Cor	nducted Emissions Test	22
EXHIBIT 7. OCCUPIED BANDWIL	OTH	23
7.1 - Limits		23
7.2 - Method of Measurement	s	23
7.3 - Test Data		23
7.3.1 GFSK (1MBPS)		23
7.3.2 EDR2 (2MBPS)		23
7.3.3 EDR3 (3MBPS)		24
7.4 – Screen Captures		24
7.4.1 GFSK (1MBPS)		24
7.4.2. EDR2 (2MBPS)		26
7.4.2. EDR3 (3MBPS)		27
EXHIBIT 8. BAND EDGE MEASU	REMENTS	29
8.1 - Method of Measurement	's	29
8.2. Band edge captures		30
EXHIBIT 9. POWER OUTPUT (CO	NDUCTED)	35
9.1 - Method of Measurement	's	35
9.2 - Test Data		35
9.3 - Screen Captures – Powe	er Output (Conducted)	36
EXHIBIT 10. CONDUCTED SPUR	IOUS EMISSIONS: 15.247(d)	37
10.1 - Limits		37
10.2 – Conducted Harmonic	And Spurious RF Measurements	37
10.3- Test Data		38
10.4- Screen Captures – Spu	rious Radiated Emissions	39
EXHIBIT 11. FREQUENCY & POV	VER STABILITY OVER VOLTAGE VAI	RIATIONS41
EXHIBIT 12. CHANNEL PLAN AN	ID SEPARATION	42
EXHIBIT 13. CHANNEL OCCUPA	NCY	45
EXHIBIT 14. EQUAL CHANNEL U	SAGE AND PSEUDORANDOM HOPE	PING SEQUENCE47
Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
Report # TR 312142 A C-1489 FCCIC FHSS	Model #: SOMDM3730-30- 2780AKCR-B	Template: 15.247 FHSS
LSR Job #: C-1489	Serial#: Refer to table in section 2.2	Page 3 of 52

EXHIBIT 15. RECEIVER SYNCHRONIZATION AND RECEIVER INPUT BANDWIDTH	48
APPENDIX A – Test Equipment List	49
APPENDIX B - Test Standards: CURRENT PUBLICATION DATES RADIO	51
APPENDIX C - Uncertainty Statement	52

Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
Report # TR 312142 A C-1489	Model #: SOMDM3730-30-	Template: 15.247
FCCIC FHSS	2780AKCR-B	FHSS
LSR Job #: C-1489	Serial#: Refer to table in section 2.2	Page 4 of 52

EXHIBIT 1. INTRODUCTION

<u> 1.1 - Scope</u>

References:	FCC Part 15, Subpart C, Section 15.247 and 15.209 FCC Part 2, Section 2.1043 paragraph (b)1. RSS GEN and RSS 210 Annex 8
Title:	FCC: Telecommunication – Code of Federal Regulations, CFR 47, Part 15. IC: Low-power License-exempt Radio-communication Devices (All Frequency Bands): Category I Equipment
Purpose of Test:	To gain FCC and IC Certification Authorization for Low- Power License-Exempt Transmitters.
Test Procedures:	Both conducted and radiated emissions measurements were conducted in accordance with American National Standards Institute ANSI C63.4 – American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.
Environmental Classification:	Commercial, Industrial or Business Residential

1.2 - Normative References

Publication	Year	Title
FCC CFR Parts 0-15	2012	Code of Federal Regulations – Telecommunications
ANSI C63.4	2003	American National Standard for Methods of Measurement of Radio-Noise Emissions from Low-Voltage Electrical and Electronic Equipment in the Range of 9 kHz to 40 GHz.
RSS-210 Annex 8	2010	Low-power License-exempt Radio communication Devices (All Frequency Bands): Category I Equipment
RSS-GEN Issue 3	2010	General Requirements and Information for the Certification of Radio Apparatus
ANSI C63.10	2009	American National Standard for Testing Unlicensed Wireless Devices
FCC KDB DA 00-705 FHSS Measurement Guidance	2000	Guidance for Performing Compliance Measurements on Frequency Hopping Spread Spectrum Transmission Systems (FHSS) Operating Under §15.247

Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
Report # TR 312142 A C-1489	Model #: SOMDM3730-30-	Template: 15.247
FCCIC FHSS	2780AKCR-B	FHSS
LSR Job #: C-1489	Serial#: Refer to table in section 2.2	Page 5 of 52

1.3 - LS Research, LLC Test Facility

LS Research, LLC is accredited by A2LA (American Association for Laboratory Accreditation) to conform to ISO/IEC 17025, 2005 "General Requirements for the Competence of Calibration and Testing Laboratories".

LS Research, LLC's scope of accreditation includes all test methods listed herein, unless otherwise noted. Accreditation status can be verified at A2LA's web site: www.a2la2.net.

1.4 - Location of Testing

All testing was performed at the following location utilizing the facilities listed below, unless otherwise noted.

LS Research, LLC W66 N220 Commerce Court Cedarburg, Wisconsin, 53012 USA,

List of Facilities Located at LS Research, LLC:

Compact Chamber Semi-Anechoic Chamber Open Area Test Site (OATS)

1.5 - Test Equipment Utilized

A complete list of equipment utilized in testing is provided in Appendix A of this test report. Calibration dates are indicated in Appendix A. All test equipment is calibrated by a calibration laboratory accredited to the requirements of ISO/IEC 17025, and traceable to the SI standard.

Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
Report # TR 312142 A C-1489	Model #: SOMDM3730-30-	Template: 15.247
FCCIC FHSS	2780AKCR-B	FHSS
LSR Job #: C-1489	Serial#: Refer to table in section 2.2	Page 6 of 52

EXHIBIT 2. PERFORMANCE ASSESSMENT

2.1 - Client Information

Manufacturer Name:	Logic PD
Address:	411 Washington Ave N. Suite 4, Minneapolis, MN 55401
Contact Name:	Joe Charboneau

2.2 - Equipment Under Test (EUT) Information

The following information has been supplied by the applicant.

Product Name:	37x Torpedo + Wireless SOM	
Model Number:	SOMDM3730-30-2780AKCR-B	
Serial Number:	2012M00619/2012M01222 (Radiated)	
	2012M00625/2012M01201 (Radiated)	
	2411M00976/4511M01290 (Radiated)	
	4511M01221(Radiated)	
	2911M00065/4511M01156 (Conducted)	
	2012M00627/2012M01206 (Conducted)	
	2012M00626/2012M01208(Conducted)	

2.3 - Associated Antenna Description

The antenna associated with the EUT is a dual band isolated Magnetic dipole (IMD) with gains:

- 1. 2.5dBi peak between 2.39 to 2.49 GHz.
- 2. 3.5dBi peak between 4.9 to 5.9 GHz.

Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
Report # TR 312142 A C-1489	Model #: SOMDM3730-30-	Template: 15.247
FCCIC FHSS	2780AKCR-B	FHSS
LSR Job #: C-1489	Serial#: Refer to table in section 2.2	Page 7 of 52

2.4 - EUT'S Technical Specifications

EUT Frequency Range (in MHz)	2402 MHz to 2480 MHz
Maximum Conducted output power in Watts	0.00167 Watts
Minimum Conducted output power in Watts	0.00103 Watts
Field Strength at 3 meters	Not Applicable
Maximum Conducted output power in dBm	
Occupied Bandwidth (99% BW)	GFSK = 886.5kHz
	EDR2 = 1.243MHz
	EDR3 = 1.292MHz
Type of Modulation	FHSS
EIRP (in mW)	N/A
Transmitter Spurious (worst case) at 3 meters	52.96dBµV/m at 4960MHz
Stepped (Y/N)	N/A
Step Value:	N/A
Frequency Tolerance %, Hz, ppm	Better than 100 PPM
Transceiver Model # (if applicable)	WL1283 (Texas Instrument)
Microprocessor #	DM3730 (Texas Instrument)
Antenna Information	
Detachable/non-detachable	Detachable
Туре	Dual band isolated magnetic dipole.
Gain (in dBi)	2.5dBi peak between 2.39 to 2.49 GHz.
	3.5dBi peak between 4.9 to 5.9 GHz.
EUT will be operated under FCC Rule Part(s)	15.247
EUT will be operated under RSS Rule Part(s)	RSS 210
Modular Filing	
Portable or Mobile?	Mobile

Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
Report # TR 312142 A C-1489	Model #: SOMDM3730-30-	Template: 15.247
FCCIC FHSS	2780AKCR-B	FHSS
LSR Job #: C-1489	Serial#: Refer to table in section 2.2	Page 8 of 52

RF Technical Information:

Type of		SAR Evaluation: Device Used in the Vicinity of the Human Head
Evaluation		SAR Evaluation: Body-worn Device
(check one)	Х	RF Evaluation

If RF Evaluation checked above, test engineer to complete the following:

Evaluated against exposure limits: General Public Use	☐ Controlled Use
Duty Cycle used in evaluation: 100 %	
Standard used for evaluation: OET 65	
Measurement Distance: 20 cm	
RF Value: 0.00591	
☐ Measured ☐ Computed ☐ Calc	culated

2.5 - Product Description

The 37x Torpedo + wireless SOM is an ultra-compact off-the-shelf solution for applications in markets where network connectivity is required and space is a premium. The product is used by OEM integrators to gain access to 802.11 a/b/g/n, Bluetooth, and GPS capabilities.

Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
Report # TR 312142 A C-1489	Model #: SOMDM3730-30-	Template: 15.247
FCCIC FHSS	2780AKCR-B	FHSS
LSR Job #: C-1489	Serial#: Refer to table in section 2.2	Page 9 of 52

EXHIBIT 3. EUT OPERATING CONDITIONS & CONFIGURATIONS DURING TESTS

3.1 - Climate Test Conditions

Temperature:	70 -71° F
Humidity:	32-42%
Pressure:	728-741mmHg

3.2 - Applicability & Summary Of EMC Emission Test Results

FCC and IC Paragraph	Test Requirements	Compliance (Yes/No)
FCC: 15.207 IC: RSS GEN sect. 7.2.2	Power Line Conducted Emissions Measurements	Yes
FCC: 15.247 (a)(1)(i) IC: RSS 210 A8.1 (a)	20 dB Bandwidth	Yes
FCC: 15.247(b) & 1.1310 IC: RSS 210 A8.4	Maximum Output Power	Yes
FCC: 15.247(i), 1.1307, 1.1310, 2.1091 & 2.1093 IC: RSS 102	RF Exposure Limit	Yes
FCC :15.247(c) IC : RSS 210 A8.5	RF Conducted Spurious Emissions at the Transmitter Antenna Terminal	Yes
FCC:15.247 (a)(1)(i) IC: RSS 210 (b)	Carrier Frequency Separation	Yes
FCC:15.247 (a)(1)(i),(ii),(iii) IC: RSS 210 (c),(d),(e)	Number of hopping channels	Yes
FCC:15.247 (a)(1)(i),(ii),(iii) IC: RSS 210 (c),(d),(e)	Time of occupancy (Dwell Time)	Yes
FCC: 15.247(c), 15.209 & 15.205 IC: RSS 210 A8.2(b), section 2.2, 2.6 and 2.7	Transmitter Radiated Emissions	Yes

3.3 - Modifications	Inocorporated In The EU	T For Compliance Purposes
⊠ None	☐ Ŷes (explain below)	•

3.4 - Deviations & Exclusions From Test Specifications

Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
Report # TR 312142 A C-1489	Model #: SOMDM3730-30-	Template: 15.247
FCCIC FHSS	2780AKCR-B	FHSS
LSR Job #: C-1489	Serial#: Refer to table in section 2.2	Page 10 of 52

EXHIBIT 4. DECLARATION OF CONFORMITY

The EUT was found to MEET the requirements as described within the specification of FCC Title 47, CFR Part 15.247, and Industry Canada RSS-210, Issue 8 (2010), Section Annex 8 (section A8.1) for a Frequency Hopping Spread Spectrum (FHSS) Transmitter.

Note: If some emissions are seen to be within 3 dB of their respective limits; as these levels are within the tolerances of the test equipment and site employed, there is a possibility that this unit, or a similar unit selected out of production may not meet the required limit specification if tested by another agency.

LS Research, LLC certifies that the data contained herein was taken under conditions that meet or exceed the requirements of the test specifications. The results in this Test Report apply only to the item(s) tested on the above-specified dates. Any modifications made to the EUT subsequent to the indicated test date(s) will invalidate the data herein, and void this certification.

Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
Report # TR 312142 A C-1489	Model #: SOMDM3730-30-	Template: 15.247
FCCIC FHSS	2780AKCR-B	FHSS
LSR Job #: C-1489	Serial#: Refer to table in section 2.2	Page 11 of 52

EXHIBIT 5. RADIATED EMISSIONS TEST

<u>5.1 - Test Setup</u>

The test setup was assembled in accordance with Title 47, CFR FCC Part 15, RSS GEN and ANSI C63.4-2003. The EUT was placed on an 80cm high non-conductive pedestal, centered on a flush mounted 2-meter diameter turntable inside a 3 meter Semi-Anechoic, FCC listed Chamber. The EUT was operated in continuous modulated transmit mode for final testing using power as provided by a bench DC supply.

The applicable limits apply at a 3 meter distance. Measurements above 4 GHz were performed at a 1.0 meter separation distance. The calculations to determine these limits are detailed in the following pages. Please refer to Appendix A for a complete list of test equipment. The test sample was operated on one of three (3) standard channels: low (2402MHz), middle (2440MHz) and high (2480MHz) to comply with FCC Part 15.31(m). The channels and operating modes were controlled via laptop PC.

5.2 - Test Procedure

Radiated RF measurements were performed on the EUT in a 3 meter Semi-Anechoic, FCC listed Chamber. The frequency range from 30 MHz to 10000 MHz was scanned and investigated. The radiated RF emission levels were manually noted at the various fixed degree settings of azimuth on the turntable and antenna height. The EUT was placed on a non-conductive pedestal in the 3 meter Semi-Anechoic Chamber, with the antenna mast placed such that the antenna was 3 meters from the EUT. A Bi-conical Antenna was used to measure emissions from 30 MHz to 300 MHz, and a Log Periodic Antenna was used to measure emissions from 300 MHz to 1000 MHz. A Double-Ridged Waveguide Horn Antenna was used from 1 GHz to 18 GHz. The maximum radiated RF emissions were found by raising and lowering the antenna between 1 and 4 meters in height, using both horizontal and vertical antenna polarities. From 18-25 GHz, a standard gain horn antenna with preamp was used.

The EUT was rotated along three orthogonal axes during the investigations to find the highest emission levels.

Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
Report # TR 312142 A C-1489	Model #: SOMDM3730-30-	Template: 15.247
FCCIC FHSS	2780AKCR-B	FHSS
LSR Job #: C-1489	Serial#: Refer to table in section 2.2	Page 12 of 52

5.3 - Test Equipment Utilized

A list of the test equipment and antennas utilized for the Radiated Emissions test can be found in Appendix A. This list includes calibration information and equipment descriptions. All equipment is calibrated and used according to the operation manuals supplied by the manufacturers. All calibrations of the antennas used were performed at an IEC/ISO 17025 accredited calibration laboratory, traceable to the SI standard. In addition, the Connecting Cables were measured for losses using a calibrated Signal Generator and an EMI Receiver. The resulting correction factors and the cable loss factors from these calibrations were entered into the EMI Receiver database. As a result, the data taken from the EMI Receiver accounts for the antenna correction factor as well as cable loss or other corrections, and can therefore be entered into the database as a corrected meter reading. The EMI Receiver was operated with resolution bandwidths as prescribed in ANSI C63.4.

5.4 - Test Results

The EUT was found to **MEET** the Radiated Emissions requirements of Title 47 CFR, FCC Part 15.247 and Canada RSS-210, Issue 8 (2010), Annex 8 for a FHSS transmitter. The frequencies with significant RF signal strength were recorded and plotted as shown in the Data Charts and Graphs.

Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
Report # TR 312142 A C-1489	Model #: SOMDM3730-30-	Template: 15.247
FCCIC FHSS	2780AKCR-B	FHSS
LSR Job #: C-1489	Serial#: Refer to table in section 2.2	Page 13 of 52

5.5 - Calculation of Radiated Emissions Limits

Reported data:

For both fundamental and spurious emissions measurement, the data reported includes all necessary correction factors. These correction factors are loaded onto the EMI receiver when measurements are performed.

Reported Measurement data = Raw receiver measurement (dB μ V/m) + Antenna correction Factor + Cable factor (dB) + Miscellaneous factors when applicable (dB) – amplification factor when applicable (dB).

Generic example of reported data at 200 MHz:

Reported Measurement data = 18.2 (raw receiver measurement) + 15.8 (antenna factor) + 1.45 (cable factor) = 35.45 (dB μ V/m).

As specified in 15.247 (d) and RSS 210 A8.5, radiated emissions that fall within the restricted band described in 15.205(c) for FCC and section 2.2 of RSS 210 for IC, must comply with the general emissions limit.

The following table depicts the general radiated emission limits above 30 MHz. These limits are obtained from Title 47 CFR, Part 15.209, for radiated emissions measurements. These limits were applied to any signals found in the 15.205 restricted bands. The mentioned limits correspond to those limits listed in RSS GEN.

Frequency (MHz)	3 m Limit μV/m	3 m Limit (dBμV/m)	1 m Limit (dBµV/m)
30-88	100	40.0	-
88-216	150	43.5	-
216-960	200	46.0	-
960-24,000	500	54.0	63.5

Sample conversion of field strength (μ V/m to dB μ V/m): dB μ V/m = 20 log ₁₀ (100)= 40 dB μ V/m (from 30-88 MHz)

Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
Report # TR 312142 A C-1489	Model #: SOMDM3730-30-	Template: 15.247
FCCIC FHSS	2780AKCR-B	FHSS
LSR Job #: C-1489	Serial#: Refer to table in section 2.2	Page 14 of 52

5.6 - Radiated Emissions Test Data Chart

Manufacturer:	Logic PD						
Date(s) of Test:	Febru	uary 27 th to June 29 th 2012					
Project Engineer:	Khair	ul Aidi Zainal					
Test Engineer(s):	Adam	n Alger, Peter Feilen, Mike	Hin	tzke	, Aidi Zainal		
Voltage:	120 \	/AC					
Operation Mode:	Conti	nuous transmit, modulated	l mo	ode			
Environmental	Temp	erature: 70° F					
Conditions in the	Relat	ive Humidity: 30 %					
Lab:							
EUT Power:	Χ	Single Phase 120VAC			3 Phase	_VA	.C
LOT FOWEI.		Battery			Other: Bend	Other: Bench DC Supply	
EUT Placement:	Χ	80cm non-conductive table 10cm Spacers					
EUT Test Location:	Х	3 Meter Semi-Anechoic FCC Listed Chamber 3/10m OATS					
Measurements:		Pre-Compliance			Preliminary	Х	Final
Detectors Used:	Х	Peak	Χ		Quasi-Peak	Χ	Average

The following table depicts the level of significant spurious radiated RF emissions found (other than the fundamentals and its harmonics):

Frequency (MHz)	Height (m)	Azimuth (degree)	Quasi Peak Reading (dBµV/m)	Quasi Peak Limit (dBµV/m)	Margin (dB)	Antenna Polarity	EUT orientation
420.0	1.43	206	34.9	46.0	11.1	Vertical	Vertical
520.0	1.00	307	36.9	46.0	9.1	Vertical	Side
522.0	1.72	185	39.2	46.0	6.8	Horizontal	Flat
780.0	1.00	168	37.7	46.0	8.3	Horizontal	Flat
420.0	2.26	145	37.8	46.0	8.2	Horizontal	Side
520.0	1.75	215	39.8	46.0	6.2	Horizontal	Vertical
97.3	1.92	266	20.9	43.5	22.6	Horizontal	Vertical
98.7	1.00	241	29.2	43.5	14.3	Vertical	Flat
99.0	1.00	238	30.9	43.5	12.6	Vertical	Side
98.6	1.00	228	30.4	43.5	13.1	Vertical	Vertical

Note:

- H: Horizontal, V: Vertical, F: Flat.
 Refer to exhibit 5.5 on explanation of how data is reported.

Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
Report # TR 312142 A C-1489	Model #: SOMDM3730-30-	Template: 15.247
FCCIC FHSS	2780AKCR-B	FHSS
LSR Job #: C-1489	Serial#: Refer to table in section 2.2	Page 15 of 52

RADIATED EMISSIONS DATA CHART (continued)

The following table depicts the level of radiated emissions of channel 2402 MHz in the restricted band:

Frequency (MHz)	Height (m)	Azimuth (degree)	Peak Reading (dBμV/m)	Avg Reading (dBμV/m)	Avg Limit (dBμV/m)	Margin (dB)	Antenna Polarity	EUT orientation
4804	1.05	206	58.3	53.9	63.5	9.6	Vertical	Flat
12010	1.02	61	55.6	44.7	63.5	18.8	Vertical	Side
19216	1	130	54.3	42.6	63.5	20.9	Vertical	Side

The following table depicts the level of significant radiated emissions of channel 2440 MHz in the restricted band:

Frequency (MHz)	Height (m)	Azimuth (degree)	Peak Reading (dBμV/m)	Avg Reading (dBμV/m)	Avg Limit (dBμV/m)	Margin (dB)	Antenna Polarity	EUT orientation
4880	1.11	234	59.3	56.6	63.5	6.9	Horizontal	Flat
7320	1	148	55.6	51.1	63.5	12.4	Horizontal	Side
12200	1	57	56.2	46.6	63.5	17.0	Horizontal	Side
19520	1	165	52.6	40.9	63.5	22.6	Vertical	Flat

The following table depicts the level of significant radiated emissions of channel 2480 MHz in the restricted band:

Frequency (MHz)	Height (m)	Azimuth (degree)	Peak Reading (dBµV/m)	Avg Reading (dBμV/m)	Avg Limit (dBμV/m)	Margin (dB)	Antenna Polarity	EUT orientation
4960	1.175	90.8	64.7	62.5	63.5	1.0	Vertical	Side
7440	1.19	226	0.0	46.3	63.5	17.2	Horizontal	Flat
12400	1	177	54.5	43.8	63.5	19.8	Horizontal	Flat
19840	1.04	202.6	52.5	41.3	74.0	32.7	Horizontal	Flat


Notes:


- 1. Measurements above 4 GHz were made at 1 meters of separation from the EUT. The limits were adjusted to reflect this measurement distance.
- 2. H: Horizontal, V: Vertical, S: Side, F: Flat.
- 3. Refer to exhibit 5.5 on explanation of how data is reported.

Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
Report # TR 312142 A C-1489	Model #: SOMDM3730-30-	Template: 15.247
FCCIC FHSS	2780AKCR-B	FHSS
LSR Job #: C-1489	Serial#: Refer to table in section 2.2	Page 16 of 52


5.7 - Screen Captures - Radiated Emissions Test

These screen captures represent Peak Emissions. For radiated emission measurements, a Quasi-Peak detector function is utilized when measuring frequencies below 1 GHz, and a video averaged Peak detector function is utilized when measuring frequencies above 1 GHz.



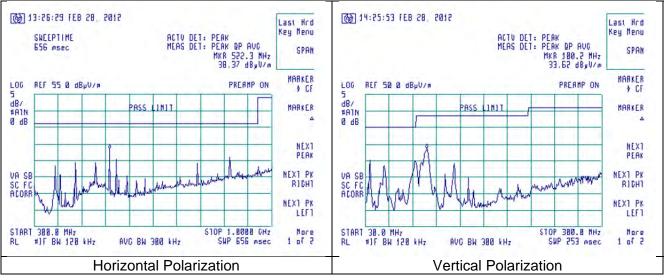


300 to 1000 MHz, 3m distance.

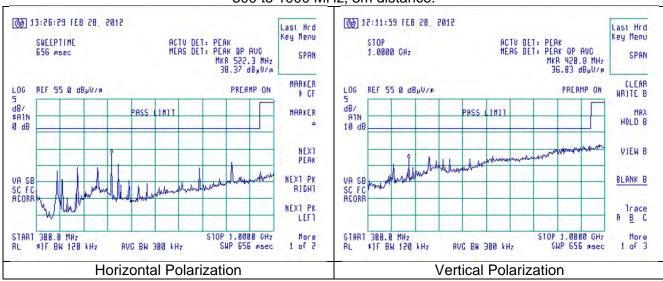


Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
Report # TR 312142 A C-1489	Model #: SOMDM3730-30-	Template: 15.247
FCCIC FHSS	2780AKCR-B	FHSS
LSR Job #: C-1489	Serial#: Refer to table in section 2.2	Page 17 of 52


1000 to 2310 MHz, 3m distance.




2500 to 4000 MHz, 3m distance.



Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
Report # TR 312142 A C-1489	Model #: SOMDM3730-30-	Template: 15.247
FCCIC FHSS	2780AKCR-B	FHSS
LSR Job #: C-1489	Serial#: Refer to table in section 2.2	Page 18 of 52

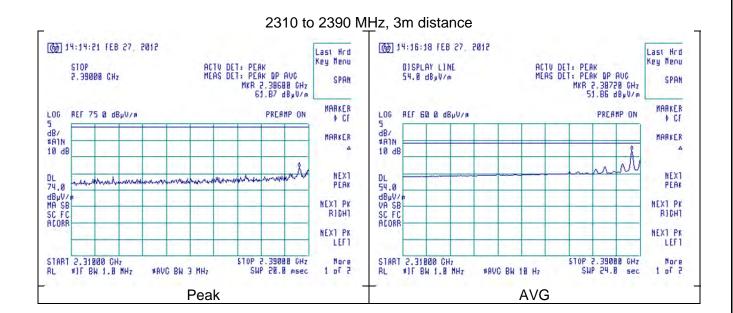

Note: The range of 2483.5 to 2500 MHz is in section 8 of this report (Band-edges).

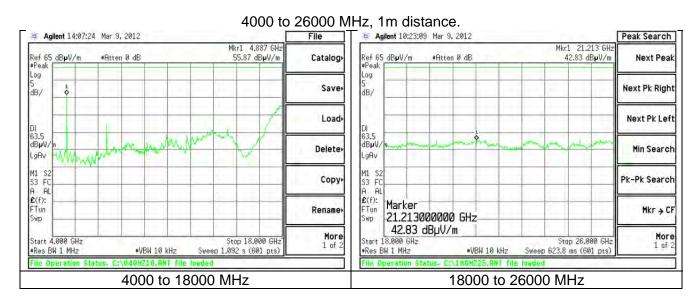

Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
Report # TR 312142 A C-1489	Model #: SOMDM3730-30-	Template: 15.247
FCCIC FHSS	2780AKCR-B	FHSS
LSR Job #: C-1489	Serial#: Refer to table in section 2.2	Page 19 of 52

EXHIBIT 6. CONDUCTED EMISSIONS TEST, AC POWER LINE

<u>6.1 - Test Setup</u>

The test area and setup are in accordance with ANSI C63.4-2003 and with Title 47 CFR, FCC Part 15, Industry Canada RSS-210 and RSS GEN. The EUT was placed on a non-conductive wooden table, with a height of 80 cm above the reference ground plane. The EUT's power cable was plugged into a 50Ω (ohm), $50/250~\mu\text{H}$ Line Impedance Stabilization Network (LISN). The AC power supply of 120V was provided via an appropriate broadband EMI Filter, and then to the LISN line input. Final readings were then taken and recorded. After the EUT was setup and connected to the LISN, the RF Sampling Port of the LISN was connected to a 10 dB Attenuator-Limiter, and then to the EMI Receiver. The EMCO LISN used has the ability to terminate the unused port with a 50Ω (ohm) load when switched to either L1 (line) or L2 (neutral).

6.2 - Test Procedure

The EUT was investigated in continuous modulated transmit mode and continuous receive mode for this portion of the testing. The appropriate frequency range and bandwidths were selected on the EMI Receiver, and measurements were made. The bandwidth used for these measurements is 9 kHz, as specified in CISPR 16-1, Section 1, Table 1, for Quasi-Peak and Average detectors in the frequency range of 150 kHz to 30 MHz. Final readings were then taken and recorded.

Customer supplied DC power supply was used during the test to supply the EUT with the appropriate DC voltage.

6.3 - Test Equipment Utilized

A list of the test equipment and accessories utilized for the Conducted Emissions test is provided in Appendix A. This list includes calibration information and equipment descriptions. All equipment is calibrated and used according to the operation manuals supplied by the manufacturers. Calibrations of the LISN and Limiter are traceable to N.I.S.T. All cables are calibrated and checked periodically for conformance. The emissions are measured on the EMI Receiver, which has automatic correction for all factors stored in memory and allows direct readings to be taken.

6.4 - Test Results

The EUT was found to **MEET** the Conducted Emission requirements of FCC CFR 47 Part **15.207** and **15.107**, Conducted Emissions. See the Data Charts and Graphs for more details of the test results. By virtue of meeting the requirements of FCC, the EUT also meets the requirements of IC **RSS 210** and **RSS GEN**.

Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
Report # TR 312142 A C-1489	Model #: SOMDM3730-30-	Template: 15.247
FCCIC FHSS	2780AKCR-B	FHSS
LSR Job #: C-1489	Serial#: Refer to table in section 2.2	Page 20 of 52

6.5 - FCC Limits of Conducted Emissions at the AC Mains Ports

Frequency Range	Class B Limits (dBµV)		Measuring
(MHz)	Quasi-Peak	Average	Bandwidth
0.150 -0.50 *	66-56	56-46	RBW = 9 kHz
0.5 - 5.0	56	46	VBW ≥ 9 kHz for QP
5.0 – 30	60	50	VBW = 1 Hz for Average
* The limit decreases linearly witl	n the logarithm o	of the frequency in	
this range.	_		

<u>6.6 - CONDUCTED EMISSIONS TEST DATA CHART</u>

Manufacturer:	LS Research					
Date(s) of Test:	Apr	il 2 nd 2012				
Project Engineer:	Kha	airul Aidi Zainal				
Test Engineer:	Mik	e Hintzke				
Voltage:	120	VAC				
Operation Mode:	Cor	Continuous transmit, modulated				
Environmental		Temperature: 71°F				
Conditions in the Lab:	Rela	Relative Humidity: 40%				
Test Location:	Χ	X AC Mains Test area Chamber		Chamber		
EUT Placed On:	Χ	X 40cm from Vertical Ground Plane 10cm Spacers		10cm Spacers		
EUT Placed Off.	Χ	X 80cm above Ground Plane Other:				
Measurements:		Pre-Compliance		Preliminary	Х	Final
Detectors Used:		Peak	Χ	Quasi-Peak	Х	Average

	QUASI-PEAK AVERAGE			<u>QUASI-PEAK</u>			
Frequency (MHz)	Line	Q-Peak Reading (dBµV)	Q-Peak Limit (dBμ V)	Quasi-Peak Margin (dB)	Average Reading (dBµV)	Average Limit (dBµ V)	Average Margin (dB)
0.150	L1	42.2	66.0	23.8	25.4	56.0	30.6
0.621	L1	29.3	56.0	26.7	24.0	46.0	22.0
4.897	L1	34.3	56.0	21.7	28.6	46.0	17.4
13.520	L1	32.6	60.0	27.4	22.4	50.0	27.6
0.150	L2	41.7	66.0	24.3	26.8	56.0	29.2
4.905	L2	33.9	56.0	22.1	28.3	46.0	17.7
13.510	L2	35.3	60.0	24.7	26.2	50.0	23.8


Notes:

Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
Report # TR 312142 A C-1489	Model #: SOMDM3730-30-	Template: 15.247
FCCIC FHSS	2780AKCR-B	FHSS
LSR Job #: C-1489	Serial#: Refer to table in section 2.2	Page 21 of 52

¹⁾ The emissions listed are characteristic of the power supply used, and did not change by the EUT.

6.7 Screen Captures - Conducted Emissions Test

These screen captures represent Peak Emissions. For conducted emission measurements, both a Quasi-Peak detector function and an Average detector function are utilized. The emissions must meet both the Quasi-peak limit and the Average limit as described in 47 CFR 15.207 and RSS GEN 7.2.2 (Table 2).

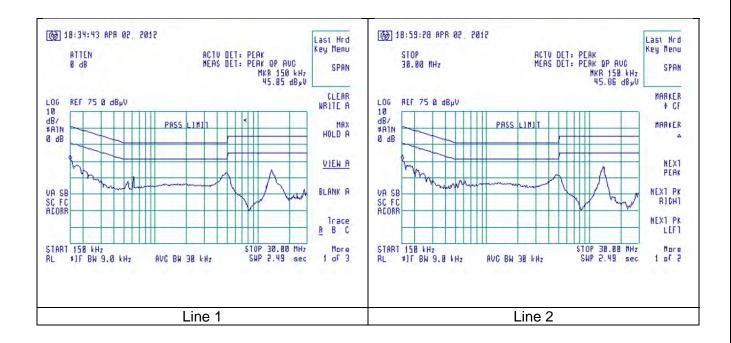

6.8 Screen Captures - Conducted Emissions Test



Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
Report # TR 312142 A C-1489	Model #: SOMDM3730-30-	Template: 15.247
FCCIC FHSS	2780AKCR-B	FHSS
LSR Job #: C-1489	Serial#: Refer to table in section 2.2	Page 22 of 52

EXHIBIT 7. OCCUPIED BANDWIDTH

Test Engineer: Aidi Zainal and Peter Feilen

7.1 - Limits

Per FCC CFR 47 15.247 frequency hopping systems shall have hopping channel carrier frequencies separated by a minimum of 25 kHz or the 20 dB bandwidth of the hopping channel, whichever is greater. Alternatively, as is the case with this device, frequency hopping systems operating in the 2400–2483.5 MHz band may have hopping channel carrier frequencies that are separated by 25 kHz or two-thirds of the 20 dB bandwidth of the hopping channel, whichever is greater, provided the systems operate with an output power no greater than 125 mW.

7.2 - Method of Measurements

For this portion of the tests, a direct measurement of the transmitted signal was performed at the antenna port of the EUT, via a cable connection to a spectrum analyzer. An attenuator was placed in series with the cable to protect the spectrum analyzer. The loss from the cable and the attenuator were added on the analyzer as gain offset settings, allowing direct measurements, without the need for any further corrections. The EUT was configured to run in a continuous transmit mode, while being supplied with typical data as a modulation source. The spectrum analyzer was used in peakhold mode while measurements were made, as presented in the chart below.

Measurement method used was FCC OET Public Notice DA 00-705.

7.3 - Test Data

7.3.1 GFSK (1MBPS)

	Bandwidth		
Frequency	99%	20dB	
(MHz)	(kHz)	(kHz)	
2402.0	883.5	803.0	
2440.0	841.4	787.0	
2480.0	886.5	790.0	

7.3.2 EDR2 (2MBPS)

	Bandwidth		
Frequency	99%	20dB	
(MHz)	(kHz)	(kHz)	
2402.0	1234.7	1376.0	
2440.0	1243.2	1400.0	
2480.0	1228.6	1350.0	

Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
Report # TR 312142 A C-1489	Model #: SOMDM3730-30-	Template: 15.247
FCCIC FHSS	2780AKCR-B	FHSS
LSR Job #: C-1489	Serial#: Refer to table in section 2.2	Page 23 of 52


7.3.3 EDR3 (3MBPS)

	Bandwidth		
Frequency	99%	20dB	
(MHz)	(kHz)	(kHz)	
2402.0	1273.9	1357.0	
2440.0	1292.2	1293.0	
2480.0	1268.1	1350.0	


7.4 - Screen Captures


7.4.1 GFSK (1MBPS)



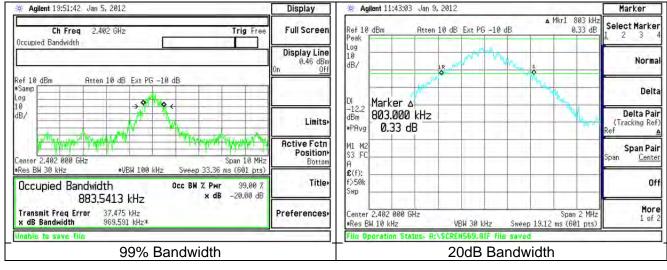


Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
Report # TR 312142 A C-1489	Model #: SOMDM3730-30-	Template: 15.247
FCCIC FHSS	2780AKCR-B	FHSS
LSR Job #: C-1489	Serial#: Refer to table in section 2.2	Page 24 of 52

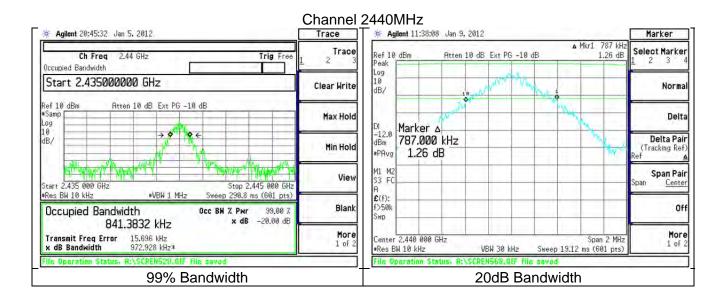


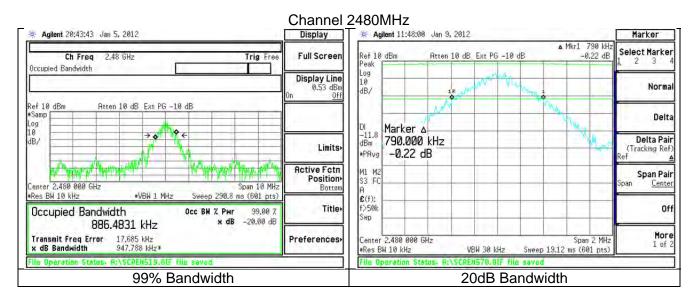


Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
Report # TR 312142 A C-1489	Model #: SOMDM3730-30-	Template: 15.247
FCCIC FHSS	2780AKCR-B	FHSS
LSR Job #: C-1489	Serial#: Refer to table in section 2.2	Page 25 of 52

7.4.2. EDR2 (2MBPS)




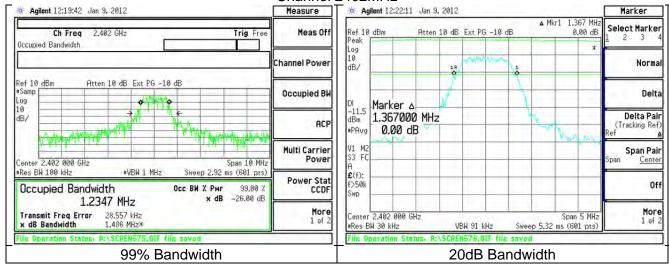


Channel 2440MHz

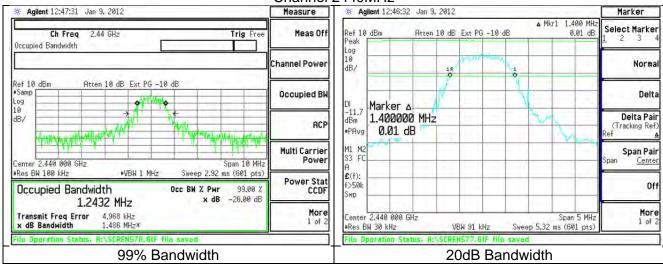

Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
Report # TR 312142 A C-1489	Model #: SOMDM3730-30-	Template: 15.247
FCCIC FHSS	2780AKCR-B	FHSS
LSR Job #: C-1489	Serial#: Refer to table in section 2.2	Page 26 of 52

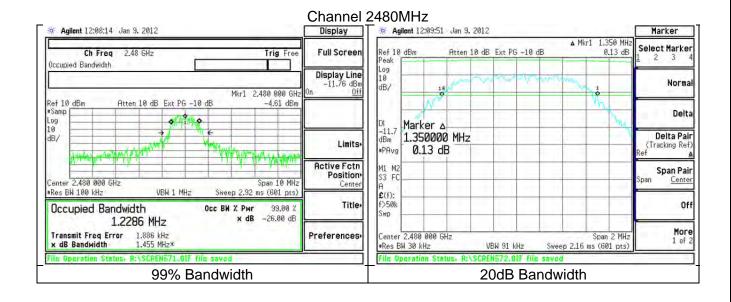


7.4.2. EDR3 (3MBPS)

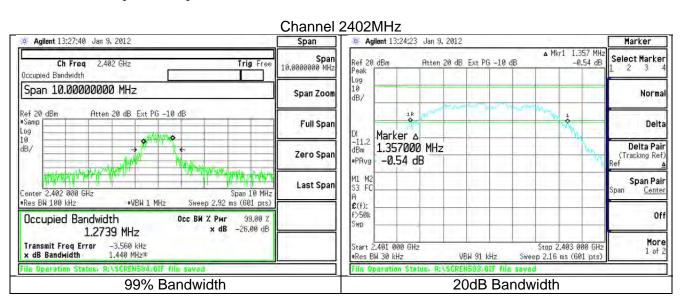

Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
Report # TR 312142 A C-1489	Model #: SOMDM3730-30-	Template: 15.247
FCCIC FHSS	2780AKCR-B	FHSS
LSR Job #: C-1489	Serial#: Refer to table in section 2.2	Page 27 of 52

Channel 2440MHz * Agilent 13:19:30 Jan 9, 2012 Measure # Agilent 13:21:19 Jan 9, 2012 ▲ Mkr1 1.293 MHz Select Marker Ref 20 dBm Peak Ch Freq 2.44 GHz Trig Free Meas Off Atten 20 dB Ext PG -10 dB Occupied Bandwidth Log 10 Channel Power Normal dB/ Ref 20 dBm Atten 20 dB Ext PG -10 dB Occupied BW Delta Log DI -10.8 Marker A 1.293000 MHz Delta Pair dB/ ACP (Tracking Ref) *PAvg -0.15 dB Span 10 MHz Multi Carrier Span Pair S3 FC Power Center 2.440 000 GHz Center *VBW 1 MHz Sweep 2.92 ms (601 pts) Res BW 100 kHz £(f): **Power Stat** f>50k Off Occupied Bandwidth 99.00 % Occ BW % Pwr CCDF Swp x dB -26.00 dB 1.2922 MHz More More Transmit Freq Error -5.412 kHz Center 2.440 000 GHz Span 2 MHz 1 of 2 1 of 2 x dB Bandwidth 1.450 MH2# •Res BW 30 kHz Sweep 2.16 ms (601 pts) le Operation Status, R:\SCREN531.GIF file saved 99% Bandwidth 20dB Bandwidth

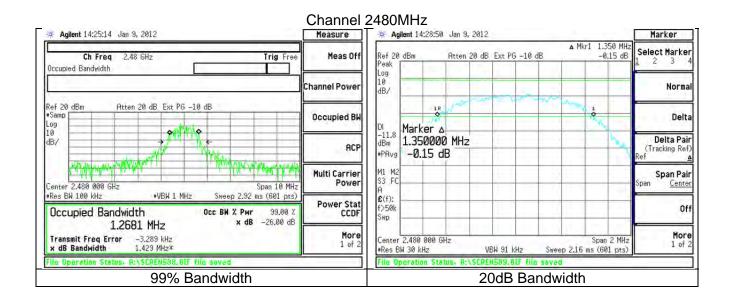

Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
Report # TR 312142 A C-1489	Model #: SOMDM3730-30-	Template: 15.247
FCCIC FHSS	2780AKCR-B	FHSS
LSR Job #: C-1489	Serial#: Refer to table in section 2.2	Page 28 of 52

EXHIBIT 8. BAND EDGE MEASUREMENTS

Test Engineer: Aidi Zainal, Peter Feilen

8.1 - Method of Measurements

FCC 15.247(d) require a measurement of spurious emission levels to be at least 20 dB lower than the fundamental emission level, in particular at the Band-Edges where the intentional radiator operates. Also, RSS 210 Section 2.2 requires that unwanted emissions meet limits listed in RSS GEN and also to the limits in the applicable annex. The EUT was operated in continuous transmit mode with continuous modulation, with internally generated data as the modulating source. The EUT was operated at the lowest channel for the investigation of the lower Band-Edge, and at the highest channel for the investigation of the higher Band-Edge.

The Band-edge measurements were performed conducted and radiated. The measurement of band-edge was performed to satisfy FCC 15.247(d).

Conducted measurements of the spurious emission were performed with a measurement bandwidth of 100kHz.


Measurement method used was FCC OET Public Notice DA 00-705.

Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
Report # TR 312142 A C-1489	Model #: SOMDM3730-30-	Template: 15.247
FCCIC FHSS	2780AKCR-B	FHSS
LSR Job #: C-1489	Serial#: Refer to table in section 2.2	Page 29 of 52


8.2. Band edge captures.

8.2.1 Radiated Band-edge in Restricted Band:

8.2.1.1 Bluetooth GFSK

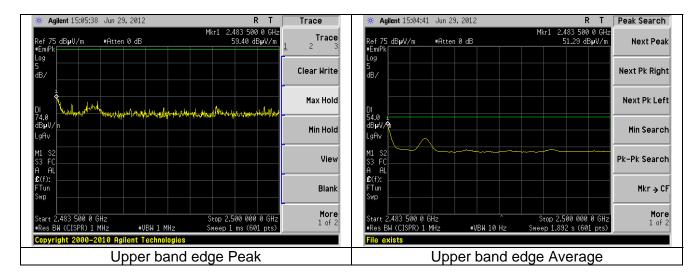


8.2.1.2 Bluetooth EDR2

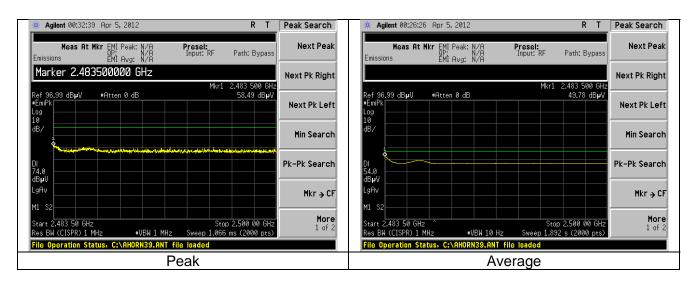

Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
Report # TR 312142 A C-1489	Model #: SOMDM3730-30-	Template: 15.247
FCCIC FHSS	2780AKCR-B	FHSS
LSR Job #: C-1489	Serial#: Refer to table in section 2.2	Page 30 of 52


8.2.1.3 Bluetooth EDR3

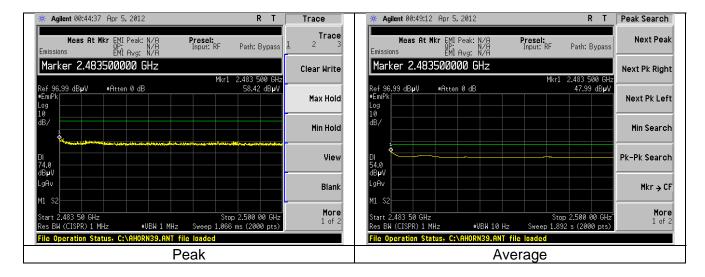

8.2.2 Conducted Band-edge:


8.2.2.1 GFSK

A. Continuously transmitting and modulated.

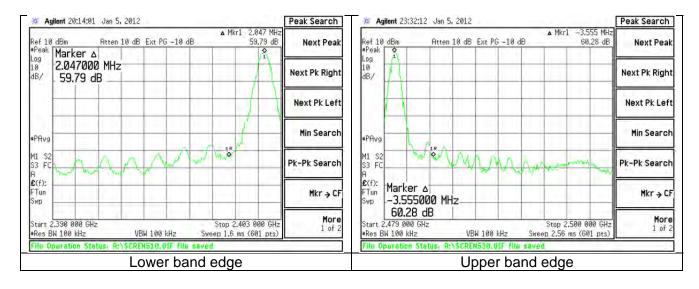


Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
Report # TR 312142 A C-1489	Model #: SOMDM3730-30-	Template: 15.247
FCCIC FHSS	2780AKCR-B	FHSS
LSR Job #: C-1489	Serial#: Refer to table in section 2.2	Page 31 of 52

B. Hopping mode.

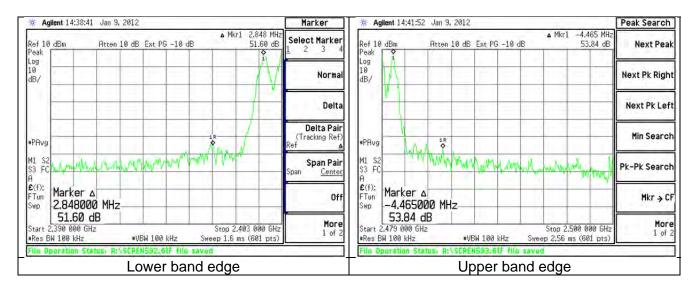


8.2.2.2 EDR2

A. Continuously transmitting and modulated.

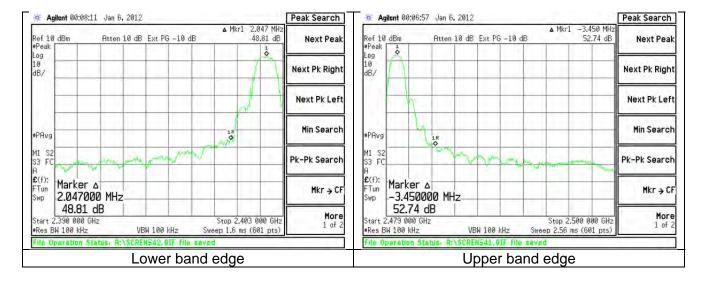


Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
Report # TR 312142 A C-1489	Model #: SOMDM3730-30-	Template: 15.247
FCCIC FHSS	2780AKCR-B	FHSS
LSR Job #: C-1489	Serial#: Refer to table in section 2.2	Page 32 of 52

B. Hopping mode.

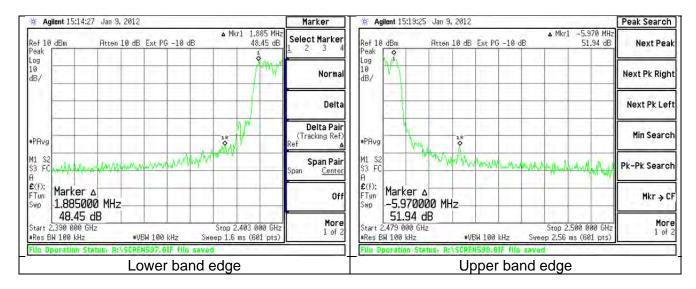


8.2.2.3 EDR3

A. Continuously transmitting and modulated.

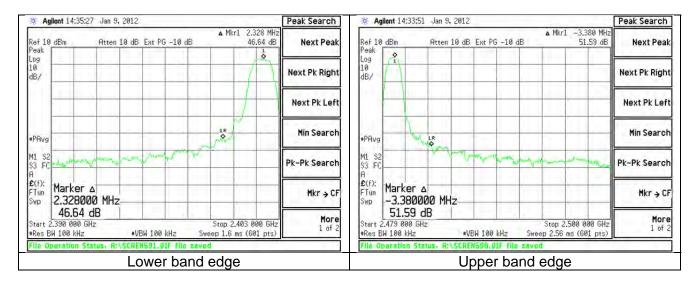

Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
Report # TR 312142 A C-1489	Model #: SOMDM3730-30-	Template: 15.247
FCCIC FHSS	2780AKCR-B	FHSS
LSR Job #: C-1489	Serial#: Refer to table in section 2.2	Page 33 of 52

B. Hopping mode.

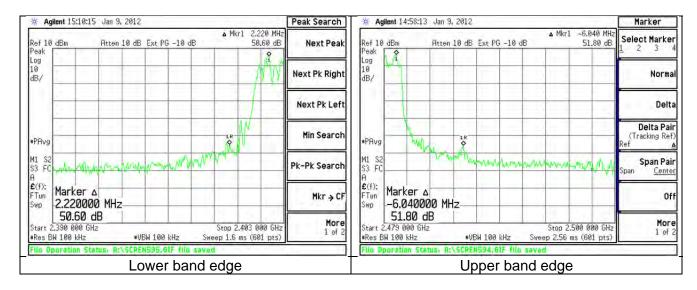

Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
Report # TR 312142 A C-1489	Model #: SOMDM3730-30-	Template: 15.247
FCCIC FHSS	2780AKCR-B	FHSS
LSR Job #: C-1489	Serial#: Refer to table in section 2.2	Page 34 of 52

EXHIBIT 9. POWER OUTPUT (CONDUCTED)

Test Engineer: Mike Hintzke

9.1 - Method of Measurements

The conducted RF output power of the EUT was measured at the antenna port using a short RF cable along with an attenuator as protection for the spectrum analyzer. The loss from the cable and the attenuator were added on the analyzer as gain offset settings, allowing direct measurements without the need for any further corrections. The unit was configured to run in a continuous transmit mode, while being supplied with typical data as a modulation source. The spectrum analyzer was used with resolution bandwidths set to 3 MHz and a span of 10 MHz.

Measurement method used was FCC OET Public Notice DA 00-705.

<u>9.2 - Test Data</u>

The data reported includes all necessary correction factors. These correction factors are loaded onto the EMI receiver when measurements are performed.

Reported Measurement data = Raw receiver measurement (dBm) + Cable factor (dB) + Miscellaneous factors when applicable (dB).

Generic example of reported data at 2440 MHz:


Reported Measurement data = 0.93 (raw receiver measurement in dBm) + 0.85 (cable factor in dB) = 1.78 (dBm).

Modulation	Channel	Frequency	Pout	Limit	Margin
Wodalation	Ondrino	(MHz)	(dBm)	(dBm)	(dB)
	0	2402	1.97	21.00	19.0
GFSK	19	2440	1.78	21.00	19.2
	39	2480	2.23	21.00	18.8
	0	2402	0.48	21.00	20.5
EDR2	19	2440	0.14	21.00	20.9
	39	2480	0.61	21.00	20.4
	0	2402	1.14	21.00	19.9
EDR3	19	2440	0.86	21.00	20.1
	39	2480	1.28	21.00	19.7


Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
Report # TR 312142 A C-1489	Model #: SOMDM3730-30-	Template: 15.247
FCCIC FHSS	2780AKCR-B	FHSS
LSR Job #: C-1489	Serial#: Refer to table in section 2.2	Page 35 of 52

9.3 - Screen Captures - Power Output (Conducted)


9.3.1 GFSK

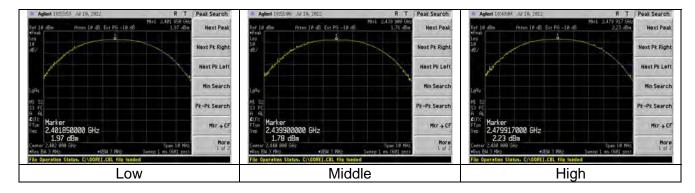

9.3.1 EDR2

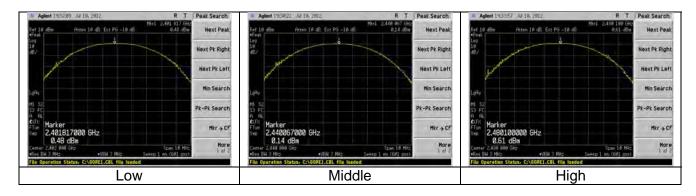

9.3.1 EDR3

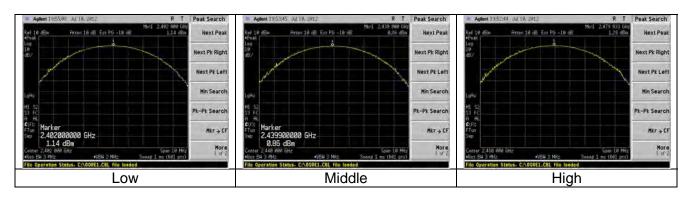

Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
Report # TR 312142 A C-1489	Model #: SOMDM3730-30-	Template: 15.247
FCCIC FHSS	2780AKCR-B	FHSS
LSR Job #: C-1489	Serial#: Refer to table in section 2.2	Page 36 of 52

EXHIBIT 10. CONDUCTED SPURIOUS EMISSIONS: 15.247(d)

Test Engineer: Peter Feilen

10.1 - Limits

In any 100 kHz bandwidth outside the frequency band in which the spread spectrum or digitally modulated intentional radiator is operating, the radio frequency power that is produced by the intentional radiator shall be at least 20 db below that in the 100 kHz bandwidth within the band that contains the highest level of the desired power, based on either an RF conducted or a radiated measurement.

10.2 - Conducted Harmonic And Spurious RF Measurements

FCC Part 15.247(d) and IC RSS 210 A8.5 both require a measurement of conducted harmonic and spurious RF emission levels, as reference to the carrier level when measured in a 100 kHz bandwidth. For this test, the spurious and harmonic RF emissions from the EUT were measured at the EUT antenna port using a short RF cable along with an attenuator as protection for the spectrum analyzer. The loss from the cable and the attenuator were added on the analyzer as gain offset settings, thereby allowing direct readings of the measurements made without the need for any further corrections. A spectrum analyzer was used with the resolution bandwidth set to 100 kHz for this portion of the tests. The unit was configured to run in a continuous transmit mode, while being supplied with typical data as a modulation source. The spectrum analyzer was used with measurements from a peak detector presented in the chart below. Screen captures were acquired and any noticeable spurious and harmonic signals were identified and measured.

Measurement method used was FCC OET Public Notice DA 00-705.

Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
Report # TR 312142 A C-1489	Model #: SOMDM3730-30-	Template: 15.247
FCCIC FHSS	2780AKCR-B	FHSS
LSR Job #: C-1489	Serial#: Refer to table in section 2.2	Page 37 of 52

10.3- Test Data

	Channel low	Channel middle	Channel high
Fundamental	1.4	1.5	1.9
2 nd Harmonic	-74.2	-67.7	-64.1
3 rd Harmonic	-59.2	-59.8	-59.8
4 th Harmonic	-64.3	-65.0	-61.9
5 th Harmonic	-57.7	-55.3	-54.2
6 th Harmonic	-59.6	-58.5	-56.4
7 th Harmonic	-69.3	NOTE2	NOTE2
8 th Harmonic	-69.2	-66.6	NOTE2
9 th Harmonic	NOTE2	NOTE2	NOTE2
10 th Harmonic	NOTE2	NOTE2	NOTE2

Note:

- All reported data are in dBm.
 Spurious emission buried within system noise floor.


The table below lists other notable spurious emissions other than the harmonics.

Freq(MHz)	Chan	level(dBm)
2470.00	LOW	-59.9
3205.00	LOW	-61.9
440.60	LOW	-65.3
801.20	LOW	-73.7
2365.00	MID	-58.8
2515.00	MID	-57.8
2560.00	HIGH	-56.4
519.80	HIGH	-71.6


Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
Report # TR 312142 A C-1489	Model #: SOMDM3730-30-	Template: 15.247
FCCIC FHSS	2780AKCR-B	FHSS
LSR Job #: C-1489	Serial#: Refer to table in section 2.2	Page 38 of 52

10.4- Screen Captures - Spurious Radiated Emissions


30 MHz to 1000 MHz



900 MHZ to 1000 MHz



Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
Report # TR 312142 A C-1489	Model #: SOMDM3730-30-	Template: 15.247
FCCIC FHSS	2780AKCR-B	FHSS
LSR Job #: C-1489	Serial#: Refer to table in section 2.2	Page 39 of 52



Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
Report # TR 312142 A C-1489	Model #: SOMDM3730-30-	Template: 15.247
FCCIC FHSS	2780AKCR-B	FHSS
LSR Job #: C-1489	Serial#: Refer to table in section 2.2	Page 40 of 52

EXHIBIT 11. FREQUENCY & POWER STABILITY OVER VOLTAGE VARIATIONS

Test Engineer(s): Khairul Aidi Zainal

The power and frequency stability of the device was examined as a function of the input voltage available to the EUT. A Spectrum Analyzer was used to measure the RF output power and frequency at the appropriate frequency markers. Power was supplied by an external bench-type DC power supply and was varied ±15% from the nominal.

	4.25		5.0		5.75	
Power (dBm)	Frequency (Hz)	Power (dBm)	Frequency (Hz)	Power (dBm)	Frequency (Hz)	Channel
2.0	2402000459	2.0	2402000479	2.0	2402000479	0
1.8	2440000560	1.8	2440000560	1.8	2440000539	19
2.2	2480000580	2.2	2480000560	2.2	2480000539	39

Channel	max	min	freq drift (Hz)
0	2402000479	2402000459	20
19	2440000560	2440000539	21
39	2480000580	2480000539	41

The power was then cycled On/Off to observe system response. No unusual response was observed, the emission characteristics were well behaved, and the system returned to the same state of operation as before the power cycle.


Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
Report # TR 312142 A C-1489	Model #: SOMDM3730-30-	Template: 15.247
FCCIC FHSS	2780AKCR-B	FHSS
LSR Job #: C-1489	Serial#: Refer to table in section 2.2	Page 41 of 52

EXHIBIT 12. CHANNEL PLAN AND SEPARATION

Test Engineer: Aidi Zainal

A spectrum analyzer was used with a resolution bandwidth of 30 kHz to measure the channel separation of the EUT.

The following plots describe this spacing, and also establish the channel separation and plan.





Channel separation = 1.010 MHz

RANGE (MHz)	# OF CHANS
2400 - 2410.5	9.0
2410.5 - 2420	9.5
2420 - 2430	10.0
2430 - 2440	10.0
2440-2450	10.0
2450-2460	10.0
2460-2470	10.0
2470-2483.5	10.5


Total	70
Channels	79


Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
Report # TR 312142 A C-1489	Model #: SOMDM3730-30-	Template: 15.247
FCCIC FHSS	2780AKCR-B	FHSS
LSR Job #: C-1489	Serial#: Refer to table in section 2.2	Page 42 of 52

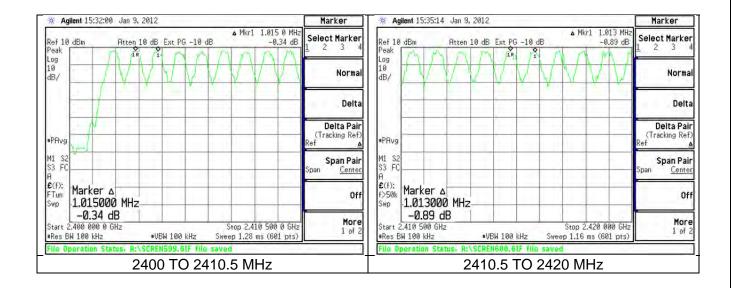

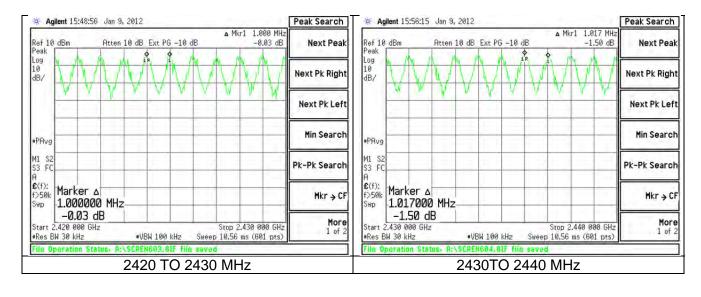

Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
Report # TR 312142 A C-1489	Model #: SOMDM3730-30-	Template: 15.247
FCCIC FHSS	2780AKCR-B	FHSS
LSR Job #: C-1489	Serial#: Refer to table in section 2.2	Page 43 of 52

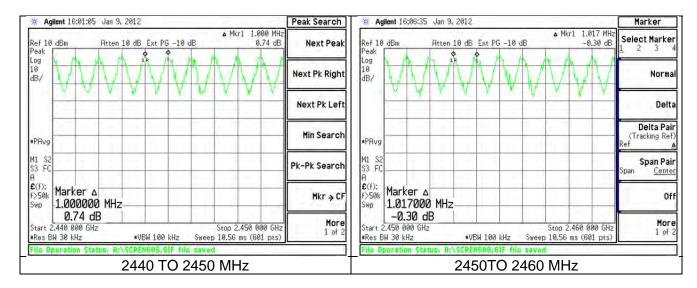

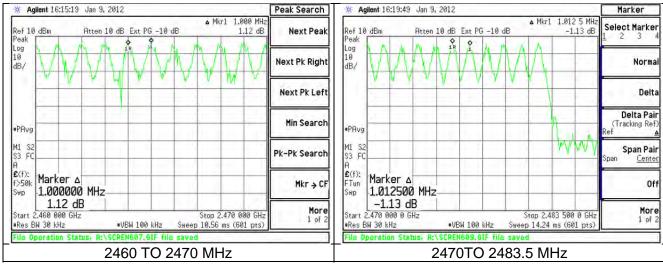


Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
Report # TR 312142 A C-1489	Model #: SOMDM3730-30-	Template: 15.247
FCCIC FHSS	2780AKCR-B	FHSS
LSR Job #: C-1489	Serial#: Refer to table in section 2.2	Page 44 of 52

EXHIBIT 13. CHANNEL OCCUPANCY

Part 15.247(a)(1) requires a channel occupancy, for this device, of no more than 400 milliseconds in a 31.6 second window. The channel occupancy for this EUT was measured using a spectrum analyzer, set to zero-span at the frequency of interest. With the analyzer in peak-hold mode, the transmission lengths can be measured by adjusting the sweep rate of the analyzer. A suitable sweep rate was used to measure the channel occupancy at the low, mid and high channels.


A longest single transmission is 401.7µs. The maximum occupancy in a **200ms** window is **3** (three) transmission cycle. In 31.6 seconds there are 474 transmission cycles which add up to **19.4ms** total occupancy.

Plots of Channel Occupancy

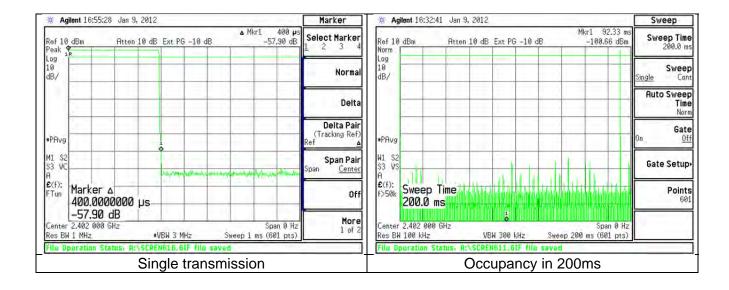


Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
Report # TR 312142 A C-1489	Model #: SOMDM3730-30-	Template: 15.247
FCCIC FHSS	2780AKCR-B	FHSS
LSR Job #: C-1489	Serial#: Refer to table in section 2.2	Page 45 of 52

Channel 914.6 MHz

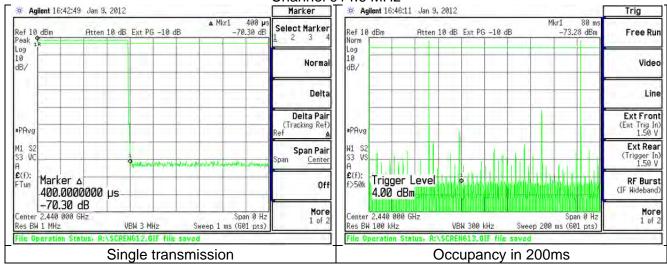

Channel 926.4 MHz

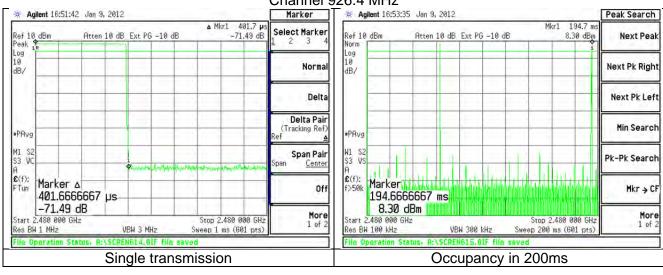

Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
Report # TR 312142 A C-1489	Model #: SOMDM3730-30-	Template: 15.247
FCCIC FHSS	2780AKCR-B	FHSS
LSR Job #: C-1489	Serial#: Refer to table in section 2.2	Page 46 of 52

EXHIBIT 14. EQUAL CHANNEL USAGE AND PSEUDORANDOM HOPPING SEQUENCE.

By virtue of being an IEEE 802.15 Bluetooth device, the EUT is inherently compliant to the requirements.

Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
Report # TR 312142 A C-1489	Model #: SOMDM3730-30-	Template: 15.247
FCCIC FHSS	2780AKCR-B	FHSS
LSR Job #: C-1489	Serial#: Refer to table in section 2.2	Page 47 of 52
		-

EXHIBIT 15. RECEIVER SYNCHRONIZATION AND RECEIVER INPUT BANDWIDTH.

By virtue of being an IEEE 802.15 Bluetooth device, the EUT is inherently compliant to the requirements.

Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
Report # TR 312142 A C-1489	Model #: SOMDM3730-30-	Template: 15.247
FCCIC FHSS	2780AKCR-B	FHSS
LSR Job #: C-1489	Serial#: Refer to table in section 2.2	Page 48 of 52

APPENDIX A - Test Equipment List



 Date:
 12-Dec-2011
 Type Test:
 AC mains
 Jub #:
 C-1333 and C-1489

Prepared By: Airii Qustomer: Logic PD

Quale # 311310

Nb	Asset#	Description	Manufacturer	Model#	Serial#	Cal Dale	Cal Due Date	Equipment Status	
1	EE 960013	BM Receiver	HP .	8546A System	3617A00320;3448A	11/22/2011	11/22/2012	Active Calibration	
2	EE 960014	BM Receiver-filler section	HP .	85460A	3448A00296	11/22/2011	11/22/2012	Active Calbration	
3	AA 960072	Transient Limber	IP	11947A	3107A02515	11/2/2011	11/2/2012	Active Calbration	
4	AA 960075	LISN	EMCO	3810/2NM	9612-1710	9/19/2011	9/19/2012	Active Calbration	

Project Engineer: Aidi Zainal Quality Assurance: Mike Hintzke



Date: 12-Dec-2011 Type Test; Conducted measurements July #: C-1333

Prepared By: Atti Customer: LOGIC PD Coule # 311310

Seet # Description Manufacturer Model # Serial # Cal Date Cal Due Date Equipment Status

No. Asset# Serial# Description Manufacturer Model# Cal Due Date Equipment Status 1 AA 960143 2 EE 960073 Phaseflex Gore ENCO 100 1048 0 5546519 6/1/2011 6/1/2012 Active Calibration US45300564 SpectrumAnalyzer E4446A 4/25/2011 4/25/2012 Active Calibration Agilent OC 000221C SpectrumAnalyzer HP E4407B US39160256 5/4/2011 Active Calibration 5/4/2012

Project Engineer: Aiti Quality Assurance: Peter

LS RESEARCH LLC
Wireless Product Development
Equipment Calibration

Date: 21-Jun-2012 Type Test: Cond Measurements Jub #: C-1489

Prepared By: Aith Customer: Logic PD Customer: 4:312142

No. Asset# Description Manufacturer Model# Serial# Cal Date Cal Due Date Equipment Status 1 AA 960143 Phaseflex EXD01D010480 5546519 6/1/2011 Active Calibration Gore 6/1/2013 SpectrumAnalyzer Agilent US45300564 5/9/2012 5/9/2013 Active Calibration OC 000221C SpectrumAnalyzer E44078 US39160256 6/5/2012 6/5/2013 Active Calibration

Project Engineer: Addit Zainal Quality Assurance: Mike Hintzke

Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
Report # TR 312142 A C-1489	Model #: SOMDM3730-30-	Template: 15.247
FCCIC FHSS	2780AKCR-B	FHSS
LSR Job #: C-1489	Serial#: Refer to table in section 2.2	Page 49 of 52



 Date
 21-Jun-2012
 Type Test : Rad Band-Edge
 Job ≠ C-1333 and C-1489

 Repared By | Alb |
 Customer | Logic PD |
 Quote # 312142

No.	Asset#	Description	Manufacturer	Mbdel#	Serial #	Cal Date	Cal Due Date	Equipment Status
1	EE 960 157	3Hz-13.2GHz SpectrumAnalyzer	Aglent	E4445A	MY 48250225	6/29/2012	6 29 20 13	Active Calibration
2	EE 960 158	RF Preselector	Aglent	N9038A	MY46520110	6/29/2012	6/29/2013	Active Calibration
3	EE 960013	BM Receiver	HP	8546A System	3617A00320;3448A	11/22/2011	11/22/2012	Active Calibration
4	EE 960014	BM Repeiver-filter section	HP	85460A	3448A00296	11/22/2011	11/22/2012	Active Calibration
5	EE 960 147	Fre-Amp	Adv. Mara	WLA612	123101	1/6/2012	1/6/2013	Active Calibration
6	EE 960 161	28 5-40GHz LNA	Duconmun Tea	hnALN-33144030	1103717-01	10/4/2011	10/4/2012	Active Calibration
7	EE 960 146	Std. Gain Horn Ant. w (presmp	Adv. Mara	WLA622-4	123001	11/3/2011	11/3/2012	Active Calibration
8	AA 960144	Phas effex	Gore	EKD01D010720	5800373	6/1/2011	6/1/2013	Active Calibration
9	AA 960005	Biconical Antenna	EMCO	93110B	9601-2280	6/28/2012	6 26 20 13	Active Calibration
10	AA 960078	Log Periodio Antenna	EVCO	93145	9701-4855	11/15/2011	11/15/2012	Active Calibration
11	AA 960081	Double Ridge Horn Antenna	EMCO	3115	6907	1/6/2012	1/6/2013	Active Calibration
12	AA 960137	Standard Gain Horn Ant.	EMCO	3160-10	59259	10/4/2011	10/4/2014	Active Calibration
13	AA 960007	Double Ridge Horn Antenna	EVICO.	3115	9311-4138	5/16/2012	5 16/2013	Active Calibration
14	AA 960150	Bicon Antenna	ETS	3.110B	0003-3346	11/15/2011	11/15/2012	Active Calibration

Project Engineer Aidi Quality Assurance: Shane

Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
Report # TR 312142 A C-1489	Model #: SOMDM3730-30-	Template: 15.247
FCCIC FHSS	2780AKCR-B	FHSS
LSR Job #: C-1489	Serial#: Refer to table in section 2.2	Page 50 of 52

<u>APPENDIX B - Test Standards: CURRENT PUBLICATION DATES RADIO</u>

STANDARD#	DATE	Am. 1	Am. 2
ANSI C63.4	2003		
ANSI C63.10	2009		
FCC 47 CFR, Parts 0-15, 18,			
90, 95	2012		
RSS GEN	2010		
RSS 210	2010		

Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
Report # TR 312142 A C-1489	Model #: SOMDM3730-30-	Template: 15.247
FCCIC FHSS	2780AKCR-B	FHSS
LSR Job #: C-1489	Serial#: Refer to table in section 2.2	Page 51 of 52

APPENDIX C - Uncertainty Statement

This uncertainty represents an expanded uncertainty expressed at approximately the 95 % confidence level, using a coverage factor of k=2.

Table of Expanded Uncertainty Values, (K=2) for Specified Measurements

	PARAMETER	LSR ± Uncertainty
1	Radio Frequency, from F0	±1.3x10 ⁻⁷
2	Total RF conducted Power	±1.38 dB
3	RF conducted power density	±1.38 dB
4	Conducted spurious emissions	±1.38 dB
5	Radiated emissions	±4.87 dB
6	Temperature	±0.64° C
7	Humidity	±2.9 %
8	DC voltage	±0.03 %
9	Low frequency voltage	±0.1 %

Measurement Type	Particular Configuration	Uncertainty Values
Radiated Emissions	3 – Meter chamber, Biconical Antenna	4.82 dB
Radiated Emissions	3-Meter Chamber, Log Periodic	4.88 dB
	Antenna	
Radiated Emissions	3-Meter Chamber, Horn Antenna	4.85 dB
Radiated Emissions	10-Meter OATS, Biconical Antenna	4.32 dB
Radiated Emissions	10-Meter OATS, Log Periodic Antenna	3.63 dB
Absolute Conducted Emissions	Agilent PSA/ESA Series	1.38 dB
AC Line Conducted Emissions	Shielded Room/EMCO LISN	3.20 dB
Radiated Immunity	3 Volts/Meter in 3-Meter Chamber	2.05 Volts/Meter
Conducted Immunity	3 Volts level	2.33 V
EFT Burst, Surge, VDI	230 VAC	54.4 V
ESD Immunity	Discharge at 15kV	3200 V
Temperature/Humidity	Thermo-hygrometer	0.64° / 2.88 %RH

Prepared For: Logic PD	EUT: 37x Torpedo + Wireless SOM	LS Research, LLC
Report # TR 312142 A C-1489	Model #: SOMDM3730-30-	Template: 15.247
FCCIC FHSS	2780AKCR-B	FHSS
LSR Job #: C-1489	Serial#: Refer to table in section 2.2	Page 52 of 52