




Engineering Solutions & Electromagnetic Compatibility Services

Modular Approval Certification Application Report
FCC Part 15.249 & Industry Canada RSS-210

Test Lab:		Applicant:	
Rhein Tech Laboratories, Inc. 360 Herndon Parkway Suite 1400 Herndon, VA 20170 E-Mail: atcbinfo@rheintech.com	Tel: 703-689-0368 Fax: 703-689-2056 www.rheintech.com	Alarm.com 8281 Greensboro Drive Suite 100 Tysons, VA 22102	Tel: 703-584-7319
<hr/>			
FCC ID	YL6-143470L	Test Report Date	December 14, 2016
IC	9111A-143470L	RTL Work Order #	2016204
Model #	ADC-470L	RTL Quote #	QRTL16-204A
American National Standard Institute	ANSI C63.10-2013: American National Standard of Procedures for Compliance Testing of Unlicensed Wireless Devices		
FCC Classification	DXT – Part 15 Low Power Transceiver		
FCC Rule Part(s)/ Guidance	15.249: Operation within the bands 902-928 MHz, 2400-2483.5 MHz, 5725-5875 MHZ, and 24.0-24.25 GHz (10/01/2015)		
Industry Canada	RSS-210 Issue 9: Licence-Exempt Radio Apparatus: Category I Equipment RSS-Gen Issue 4: General Requirements for Compliance of Radio Apparatus		
Digital Interface Information	Digital Interface was found to be compliant		
<hr/>			
Frequency Range (MHz)	Output Power (W)	Frequency Tolerance	Emission Designator
908.4	N/A	N/A	111KF1D

I, the undersigned, hereby declare that the equipment tested and referenced in this report conforms to the identified standard(s) as described in this test report. No modifications were made to the equipment during testing in order to achieve compliance with these standards. Furthermore, there was no deviation from, additions to, or exclusions from, the applicable parts of FCC Part 2, FCC Part 15, RSS-210, RSS-Gen, and ANSI C63.10.

Signature: 

Date: December 14, 2016

Typed/Printed Name: Desmond A. Fraser

Position: President

This report may not be reproduced, except in full, without the written approval of Rhein Tech Laboratories, Inc. and Alarm.com. The test results relate only to the item(s) tested.

These test(s) are accredited under Rhein Tech Laboratories, Inc. ISO/IEC 17025 accreditation issued by ANAB. Refer to certificate and scope of accreditation AT-1445.

Table of Contents

1	General Information	4
1.1	Scope	4
1.2	Description of EUT	4
1.3	Test Facility	4
1.4	Related Submittal(s)/Grant(s)	4
1.5	Modifications	4
2	Test Information	5
2.1	Description of Test Modes	5
2.2	Exercising the EUT	5
2.3	Test Result Summary	5
2.4	Test System Details	6
2.5	Configuration of Tested System	7
3	Radiated Emissions – FCC 15.209, 15.249(a); RSS-210 B.10; RSS-Gen	8
3.1	Limits of Radiated Emissions Measurement	8
3.1.1	Radiated Emissions Measurement Test Procedure	8
3.2	Radiated Emissions Test Results	9
3.3	Radiated Emissions Harmonics/Spurious Test Data	10
4	AC Conducted Emissions - FCC 15.207; RSS-Gen 8.8: Conducted Limits	12
4.1	Site and Test Description	12
4.2	Test Limits	12
4.3	Conducted Emissions Test Data	13
5	99% Bandwidth – IC RSS-Gen 6.6	18
5.1	99% Bandwidth Test Procedure	18
5.2	99% Bandwidth Test Data	18
5.3	99% Bandwidth Plots	19
6	Conclusion	19

Rhein Tech Laboratories, Inc.
360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Client: Alarm.com
Model/HVIN: ADC-470L
Standards: FCC 15.249
IDs: YL6-143470L
Report #: 2016204DXT

Figure Index

Figure 2-1: Configuration of System Under Test.....	7
---	---

Table Index

Table 2-1: Channels Tested	5
Table 2-2: Test Result Summary.....	5
Table 2-3: Equipment Under Test	6
Table 2-4: Auxiliary Equipment Used.....	6
Table 3-1: Radiated Emissions Test Equipment	9
Table 3-2: Radiated Emissions Test Data – Quasi-Peak.....	9
Table 3-3: Radiated Emissions Harmonics/Spurious – 908.4 MHz; Peak	10
Table 3-4: Radiated Emissions Harmonics/Spurious – 908.4 MHz; Average.....	10
Table 3-5: Radiated Emissions Test Data, Digital Unintentional Emissions	10
Table 4-1: Conducted Emissions Test Equipment	12
Table 5-1: 99% Bandwidth Test Equipment.....	18
Table 5-2: 99% Bandwidth Test Data.....	18

Plot Index

Plot 4-1: Conducted Emissions - Phase - Receive Mode.....	13
Plot 4-2: Conducted Emissions - Neutral - Receive Mode	14
Plot 4-3: Conducted Emissions – Phase – Transmit Mode	15
Plot 4-4: Conducted Emissions – Neutral – Transmit Mode.....	16
Plot 4-5: Conducted Emissions – Telecom (Ethernet)	17
Plot 5-1: 99% Bandwidth; 908.4 MHz.....	19

Appendix Index

Appendix A: Test Photographs	20
------------------------------------	----

Photograph Index

Photograph 1: Radiated Emissions Testing – Front View (Digital Emissions, <1 GHz)	20
Photograph 2: Radiated Emissions Testing – Back View (Digital Emissions, <1 GHz)	21
Photograph 3: Radiated Emissions Testing – Front View (Spurious Emissions, >1 GHz).....	22
Photograph 4: Conducted Emissions Testing.....	23

Rhein Tech Laboratories, Inc.
360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Client: Alarm.com
Model/HVIN: ADC-470L
Standards: FCC 15.249
IDs: YL6-143470L
Report #: 2016204DXT

1 General Information

1.1 Scope

This is an original FCC and Industry Canada certification application request for modular approval.

Applicable Standards:

- FCC Part 15.249: Operation within the bands 902-928 MHz, 2400-2483.5 MHz, 5725-5875 MHz, and 24.0-24.25 GHz
- Industry Canada RSS-210: Licence-Exempt Radio Apparatus: Category I Equipment

1.2 Description of EUT

Equipment Under Test	Multisensor Transceiver
Model	ADC-470L
Power Supply	9-12VDC
Modulation Type	2FSK
Frequency Range	908.4 MHz
Antenna Type	Copper Wire Monopole

1.3 Test Facility

The open area test site and conducted measurement facility used to collect the radiated data is located at 360 Herndon Parkway, Suite 1400, Herndon, Virginia 20170. This site has been fully described in a report and approved by the Federal Communications Commission to perform AC line conducted and radiated emissions testing.

1.4 Related Submittal(s)/Grant(s)

This is an original certification application for Modular Approval for Alarm.com Model ADC-470L, FCC ID: YL6-143470L, IC: 9111A-143470L.

1.5 Modifications

Power reduction to a setting of 25 reduced fundamental and third harmonic to passing.

Rhein Tech Laboratories, Inc.
360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Client: Alarm.com
Model/HVIN: ADC-470L
Standards: FCC 15.249
IDs: YL6-143470L
Report #: 2016204DXT

2 Test Information

2.1 Description of Test Modes

In accordance with FCC 15.31(m), and because the EUT utilizes an operating band greater than 10 MHz, the following frequencies were tested:

Table 2-1: Channels Tested

Frequency (MHz)
908.4

2.2 Exercising the EUT

The EUT was programmed for continuous transmission at 908.4 MHz. The EUT was tested in all three orthogonal planes in order to determine worst-case emissions. The carrier was also checked to verify that information was being transmitted.

2.3 Test Result Summary

Table 2-2: Test Result Summary

Test	FCC Reference	IC Reference	Pass/Fail or N/A
AC Power Conducted Emissions	15.207	RSS-Gen Issue 4 8.8	Pass
Radiated Emissions	15.209	RSS-Gen Issue 4 8.9/8.10	Pass
Field Strength of Fundamental and Harmonics	15.249(a)	RSS-210 Issue 9 B.10	Pass
99% Bandwidth	N/A	RSS-Gen 6.6	Pass

Rhein Tech Laboratories, Inc.
 360 Herndon Parkway
 Suite 1400
 Herndon, VA 20170
<http://www.rheintech.com>

Client: Alarm.com
 Model/HVIN: ADC-470L
 Standards: FCC 15.249
 IDs: YL6-143470L
 Report #: 2016204DXT

2.4 Test System Details

The test samples were received on October 17, 2016. The FCC identifiers for all applicable equipment, plus descriptions of all cables used in the tested system, are identified in the following table.

Table 2-3: Equipment Under Test

Part	Manufacturer	Model	Serial Number	FCC ID	Cable Description	RTL Bar Code
Transceiver (radiated emissions)	Alarm.com	ADC-470L	NX-1, 503414-520	YL6-143470L	0.45m unshielded, 0.15 unshielded Ethernet	22254
Transceiver (conducted port)	Alarm.com	ADC-470L	SEM-2, 503414-210	YL6-143470L	0.45m unshielded, 0.15 unshielded Ethernet	22255
Transceiver (radiated emissions)	Alarm.com	ADC-470L	SEM-1, 503414-210	YL6-143470L	0.45m unshielded, 0.15 unshielded Ethernet	22256
Transceiver (radiated emissions)	Alarm.com	ADC-470L	XT-1, 503414-000	YL6-143470L	0.45m unshielded, 0.15 unshielded Ethernet	22257
AC Adapter	JFEC	JF006WR-0900066UH	N/A	N/A	1.5m unshielded	22261

Table 2-4: Auxiliary Equipment Used

Part	Manufacturer	Model	Serial Number	FCC ID	Cable Description	RTL Bar Code
Breakout Board	Alarm.com	ADC-20-504001-004	N/A	N/A	0.3 ribbon, 0.95m USB	22262
Pogo Connector Board	Alarm.com	ADC-20-500018-001	500018-000	N/A	N/A	22263
MR815T Ethernet Hub	CentreCOM	AT-MR815T	F1YQ7050A	N/A	1 m unshielded	11689

Rhein Tech Laboratories, Inc.
360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Client: Alarm.com
Model/HVIN: ADC-470L
Standards: FCC 15.249
IDs: YL6-143470L
Report #: 2016204DXT

2.5 Configuration of Tested System

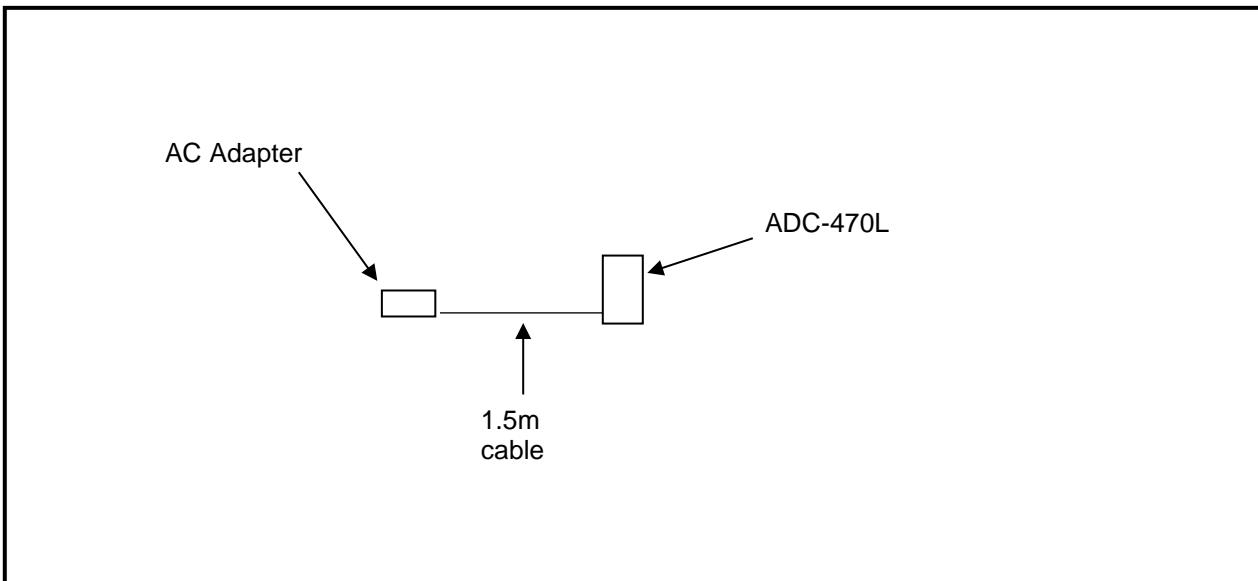


Figure 2-1: Configuration of System Under Test

3 Radiated Emissions – FCC 15.209, 15.249(a); RSS-210 B.10; RSS-Gen

3.1 Limits of Radiated Emissions Measurement

Frequency (MHz)	Field Strength (uV/m)	Measurement Distance (m)
0.009-0.490	2400/f (kHz)	300
0.490-1.705	2400/f (kHz)	30
1.705-30.0	30	30
30-88	100	3
88-216	150	3
216-960	200	3
Above 960	500	3

As shown in 15.35(b), for frequencies above 1000 MHz, the field strength limits are based on average detector, however, the peak field strength of any emission shall not exceed the maximum permitted average limits specified above by more than 20 dB under any circumstances of modulation.

3.1.1 Radiated Emissions Measurement Test Procedure

Before final measurements of radiated emissions were made on the open-field three/ten meter range, the EUT was scanned indoors at one and three meter distances. This was done in order to determine its emissions spectrum signature. The physical arrangement of the test system and associated cabling was varied in order to determine the effect on the EUT's emissions in amplitude, direction and frequency. This process was repeated during final radiated emissions measurements on the open-field range, at each frequency, in order to ensure that maximum emission amplitudes were attained.

Final radiated emissions measurements were made on the three/ten-meter, open-field test site. The EUT was placed on a nonconductive turntable 0.8 m (< 1 GHz) / 1.5 m (> 1 GHz) above the ground plane. The spectrum was examined from 9 kHz to the 10th harmonic of the highest fundamental transmitter frequency (9.08 GHz).

At each frequency, the EUT was rotated 360°, and the antenna was raised and lowered from 1 to 4 meters in order to determine the emission's maximum level. Measurements were taken using both horizontal and vertical antenna polarizations. For frequencies between 30 and 1000 MHz, the spectrum analyzer's 6 dB bandwidth was set to 120 kHz, and the analyzer was operated in the CISPR quasi-peak detection mode. For emissions above 1000 MHz, emissions are measured using the average detector function with a minimum resolution bandwidth of 1 MHz. No video filter less than 10 times the resolution bandwidth was used. The highest emission amplitudes relative to the appropriate limit were measured and recorded in this report.

Rhein Tech Laboratories, Inc.
 360 Herndon Parkway
 Suite 1400
 Herndon, VA 20170
<http://www.rheintech.com>

Client: Alarm.com
 Model/HVIN: ADC-470L
 Standards: FCC 15.249
 IDs: YL6-143470L
 Report #: 2016204DXT

Table 3-1: Radiated Emissions Test Equipment

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
900791	Chase	CBL6112	Antenna (30 MHz – 2 GHz)	2099	6/11/17
N/A	Rhein Tech Laboratories, Inc.	Automated Emission Tester	Emissions Testing Software	Rev. 14.0.2	N/A
901581	Rohde & Schwarz	FSU	Spectrum Analyzer	1166.1660.50	3/22/18
900772	EMCO	3161-02	Horn Antenna	9804-1044	4/9/18
900321	EMCO	3161-03	Horn Antenna	9528-1020	4/9/18
900323	EMCO	3160-07	Horn Antenna	9605-1024	4/9/18
900913	Hewlett Packard	85462A	EMI Receiver RF Section (9 KHz – 6.5 GHz)	3325A00159	12/9/16
900914	Hewlett Packard	85460A	RF Filter Section, (100 kHz - 6.5 GHz)	3330A00107	12/9/16
901592	Insulated Wire Inc.	KPS-1503-3600-KPR	SMK RF Cables 20'	NA	8/3/17
901593	Insulated Wire Inc.	KPS-1503-360-KPR	SMK RF Cables 36"	NA	8/1/17

3.2 Radiated Emissions Test Results

Table 3-2: Radiated Emissions Test Data – Quasi-Peak

Emission Frequency (MHz)	Quasi-Peak Detector Level (dBuV/m) (1 MHz RBW/10 Hz VBW)	Site Correction Factor (dB/m)	Quasi-Peak Corrected (dBuV/m)	Quasi-Peak Limit (dBuV/m)	Margin (dB)
908.400	70.5	23.4	93.9	94.0	-0.1

* testing performed at 3m

Rhein Tech Laboratories, Inc.
 360 Herndon Parkway
 Suite 1400
 Herndon, VA 20170
<http://www.rheintech.com>

Client: Alarm.com
 Model/HVIN: ADC-470L
 Standards: FCC 15.249
 IDs: YL6-143470L
 Report #: 2016204DXT

3.3 Radiated Emissions Harmonics/Spurious Test Data

Table 3-3: Radiated Emissions Harmonics/Spurious – 908.4 MHz; Peak

Emission Frequency (MHz)	Peak Detector (dBuV/m) (1 MHz RBW/ 3 MHz VBW)	Site Correction Factor (dB/m)	Peak Corrected (dBuV/m)	Peak Limit (dBuV/m)	Peak Margin (dB)
1816.840	17.7	30.1	47.8	74.0	-26.2
2725.260	26.4	25.8	52.2	74.0	-21.8
3633.680	15.7	27.5	43.2	74.0	-30.8
4542.100	14.5	33.6	48.1	74.0	-25.9
5450.520	12.1	33.8	45.9	74.0	-28.1
6358.940	13.2	34.9	48.1	74.0	-25.9
7267.390	14.1	35.7	49.8	74.0	-24.2
8175.780	15.0	41.6	56.6	74.0	-17.4
9084.200	14.4	42.0	56.4	74.0	-17.6

Table 3-4: Radiated Emissions Harmonics/Spurious – 908.4 MHz; Average

Emission Frequency (MHz)	Average Detector (dBuV/m) (1 MHz RBW/ 3 MHz VBW)	Site Correction Factor (dB/m)	Average Corrected (dBuV/m)	Average Limit (dBuV/m)	Average Margin (dB)
1816.840	15.1	30.1	45.2	54.0	-8.8
2725.260	26.3	25.8	52.1	54.0	-1.9
3633.680	9.5	27.5	37.0	54.0	-17.0
4542.100	4.2	33.6	37.8	54.0	-16.2
5450.520	1.1	33.8	34.9	54.0	-19.1
6358.940	2.2	34.9	37.1	54.0	-16.9
7267.390	7.2	35.7	42.9	54.0	-11.1
8175.780	5.0	41.6	46.6	54.0	-7.4
9084.200	2.4	42.0	44.4	54.0	-9.6

Table 3-5: Radiated Emissions Test Data, Digital Unintentional Emissions

Temperature: 76°F Humidity: 59%										
Emission Frequency (MHz)	Test Detector	Antenna Polarity (H/V)	Turntable Azimuth (deg)	Antenna Height (m)	Analyzer Reading (dBuV)	Site Correction Factor (dB/m)	Emission Level (dBuV/m)	Limit (dBuV/m)	Margin (dB)	Pass/Fail
175.780	Qp	V	0	1.0	51.9	-17.4	34.5	43.5	-9.0	Pass
199.420	Qp	H	0	1.0	36.2	-16.9	19.3	43.5	-24.2	Pass
250.640	Qp	H	0	3.0	38.1	-13.4	24.7	46.0	-21.3	Pass
297.920	Qp	V	1	180.0	32.5	-12.1	20.4	46.0	-25.6	Pass
335.350	Qp	H	90	1.0	32.0	-11.1	20.9	46.0	-25.1	Pass
1975.000	Av	V	1	90.0	31.7	18.2	49.9	54.0	-4.1	Pass

* testing performed at 3m

Rhein Tech Laboratories, Inc.
360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Client: Alarm.com
Model/HVIN: ADC-470L
Standards: FCC 15.249
IDs: YL6-143470L
Report #: 2016204DXT

Measurement uncertainty: Measurement uncertainties shown for these tests are expanded uncertainties expressed at 95% confidence level using a coverage factor $k = 2$. +4.0 dB / -2.65 dB

Test Personnel:

Daniel W. Baltzell
Test Engineer



Signature

October 18-21, 2016
Dates of Test

Note: Radiated emissions were investigated with the module collocated and transmitting simultaneously with the DTS transceiver submitted in this same application. No non-compliant emissions were found; per FCC guidance, no data is being reported.

Test Personnel:

Daniel W. Baltzell
Test Engineer



Signature

October 18, 2016
Date of Test

4 AC Conducted Emissions - FCC 15.207; RSS-Gen 8.8: Conducted Limits

4.1 Site and Test Description

The power line conducted emissions measurements were performed in a Series 81 type shielded enclosure manufactured by Rayproof. The EUT was assembled on a wooden table 80 centimeters high. Power was fed to the EUT through a 50-ohm/50 microhenry Line Impedance Stabilization Network (LISN). The EUT LISN was fed power through an A.C. filter box on the outside of the shielded enclosure. The filter box and EUT LISN housing are bonded to the ground plane of the shielded enclosure. A second LISN, the peripheral LISN, provides isolation for the EUT test peripherals. This peripheral LISN was also fed A.C. power. A metal power outlet box, which is bonded to the ground plane and electrically connected to the peripheral LISN, powers the EUT host peripherals.

The spectrum analyzer was connected to the AC line through an isolation transformer. The 50-ohm output of the EUT LISN was connected to the spectrum analyzer input through a Solar 100 kHz high-pass filter. The filter is used to prevent overload of the spectrum analyzer from noise below 100 kHz. Conducted emission levels were measured on each current-carrying line with the spectrum analyzer operating in the CISPR quasi-peak mode (or peak mode if applicable).

The analyzer's 6 dB bandwidth was set to 9 kHz. Video filter less than 10 times the resolution bandwidth is not used. Average measurements are performed in linear mode using a 10 kHz resolution bandwidth, a 1 Hz video bandwidth, and by increasing the sweep time in order to obtain a calibrated measurement. The emission spectrum was scanned from 150 kHz to 30 MHz. The highest emission amplitudes relative to the appropriate limits were measured and have been recorded.

4.2 Test Limits

Line-Conducted Emissions		
Limit (dB μ V)		
Frequency (MHz)	Quasi-Peak	Average
0.15 to 0.50	66 to 56	56 to 46
0.50 to 5.00	56	46
5.00 to 30.00	60	50

Table 4-1: Conducted Emissions Test Equipment


RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901581	Rohde & Schwarz	FSU	Spectrum Analyzer	1166.1660.50	3/22/18
901083	AFJ International	LS16/110VAC	16A LISN	16010020080	3/11/17
N/A	Quantum Change	Tile!	Test Software	4.0.A.8	N/A

Rhein Tech Laboratories, Inc.
360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Client: Alarm.com
Model/HVIN: ADC-470L
Standards: FCC 15.249
IDs: YL6-143470L
Report #: 2016204DXT

4.3 Conducted Emissions Test Data


Plot 4-1: Conducted Emissions - Phase - Receive Mode

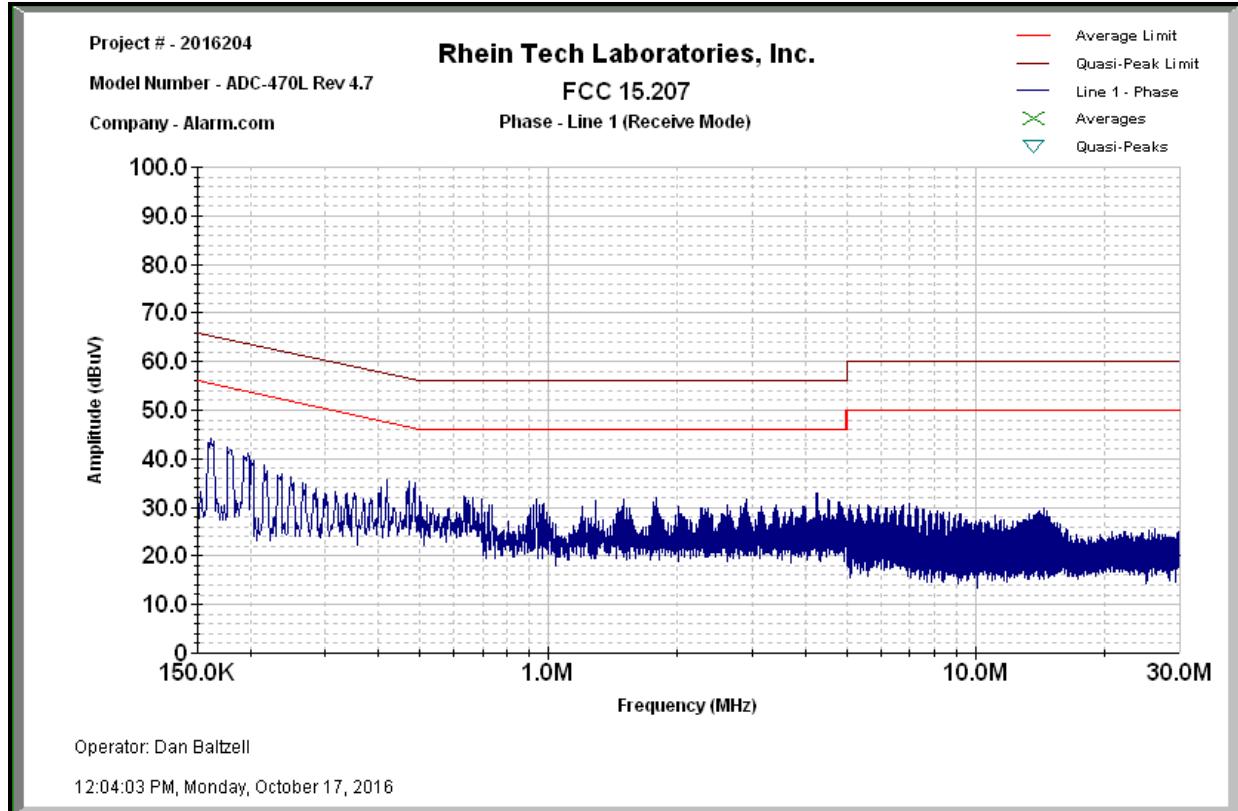

Rhein Tech Laboratories, Inc.
360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Client: Alarm.com
Model/HVIN: ADC-470L
Standards: FCC 15.249
IDs: YL6-143470L
Report #: 2016204DXT


Plot 4-2: Conducted Emissions - Neutral - Receive Mode

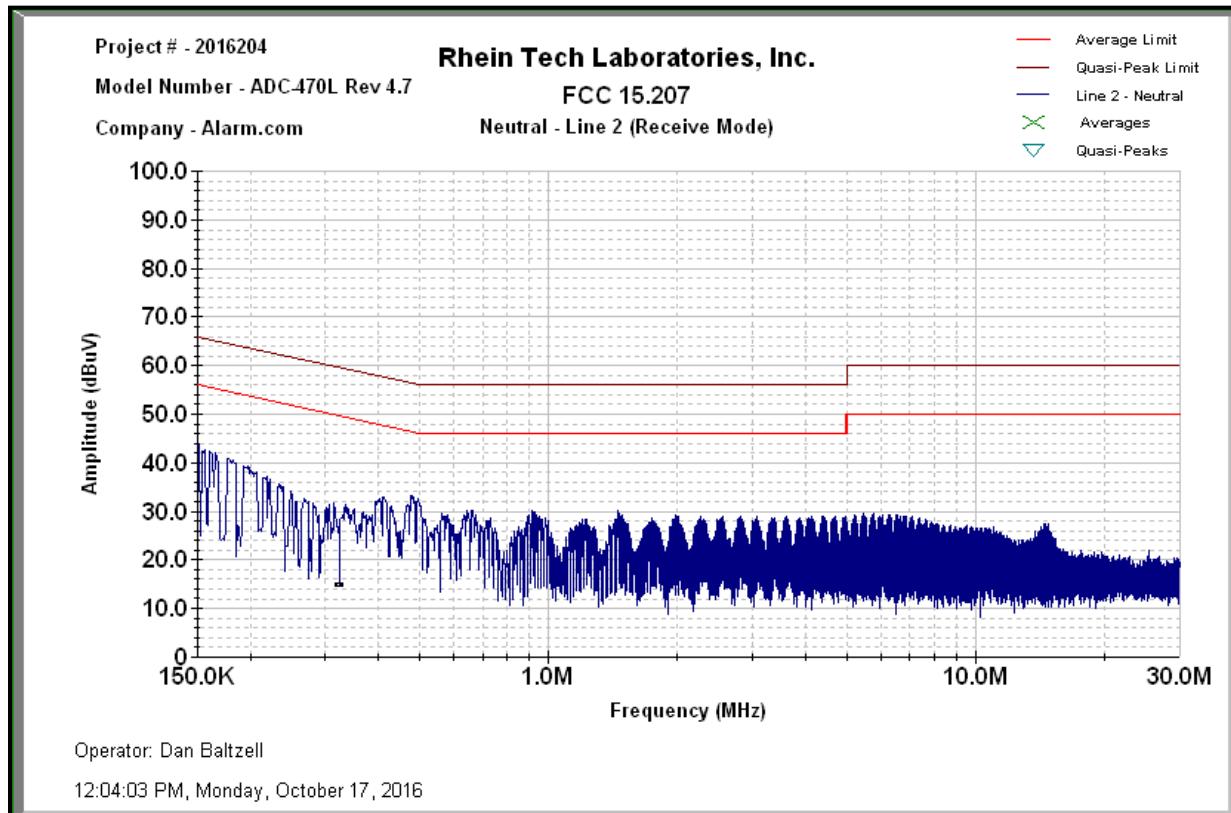

Rhein Tech Laboratories, Inc.
360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Client: Alarm.com
Model/HVIN: ADC-470L
Standards: FCC 15.249
IDs: YL6-143470L
Report #: 2016204DXT


Plot 4-3: Conducted Emissions – Phase – Transmit Mode

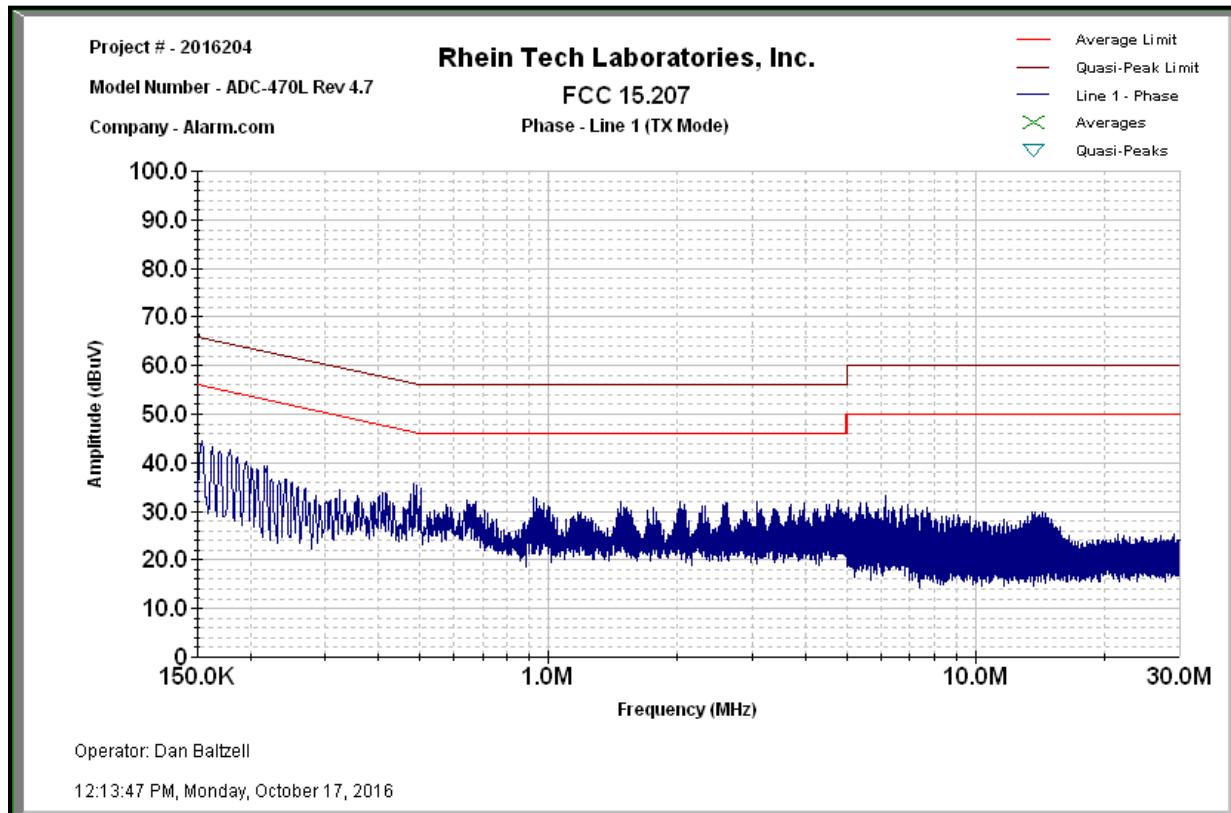

Rhein Tech Laboratories, Inc.
360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Client: Alarm.com
Model/HVIN: ADC-470L
Standards: FCC 15.249
IDs: YL6-143470L
Report #: 2016204DXT


Plot 4-4: Conducted Emissions – Neutral – Transmit Mode

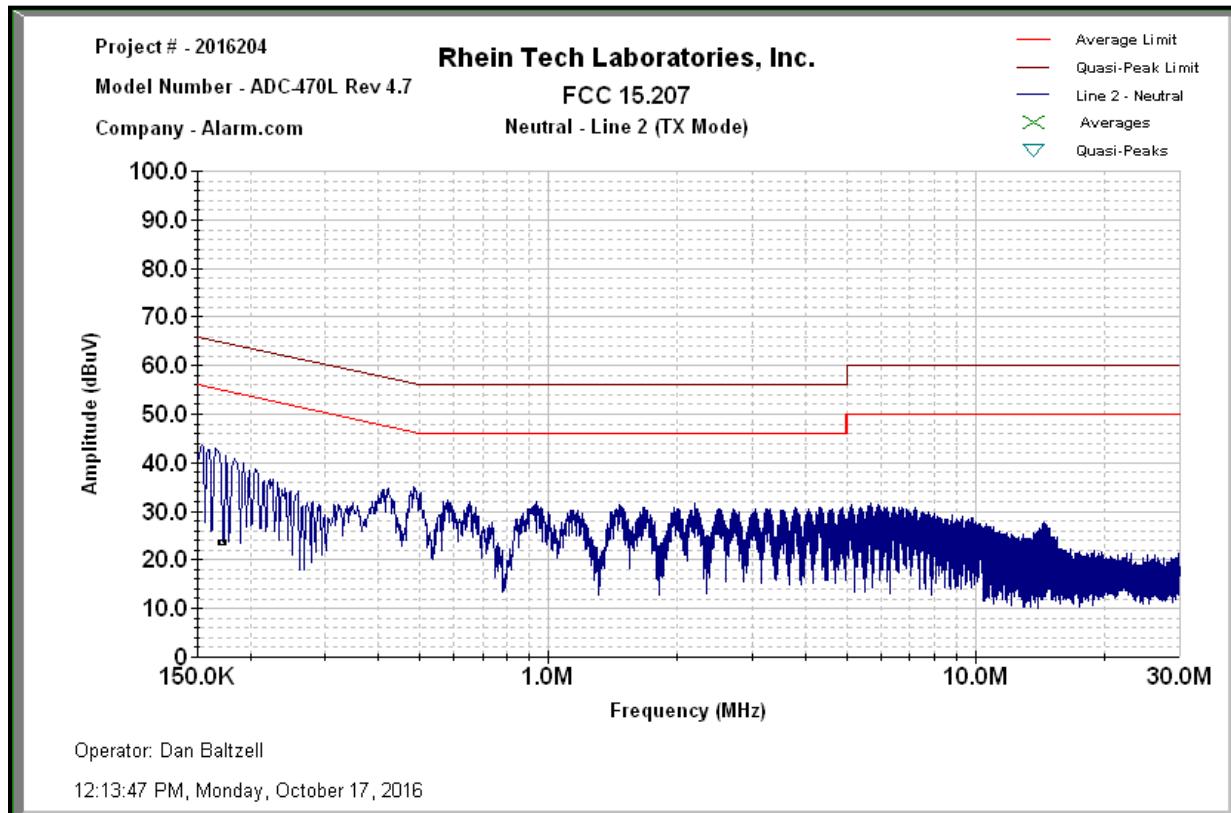

Rhein Tech Laboratories, Inc.
360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Client: Alarm.com
Model/HVIN: ADC-470L
Standards: FCC 15.249
IDs: YL6-143470L
Report #: 2016204DXT

Plot 4-5: Conducted Emissions – Telecom (Ethernet)

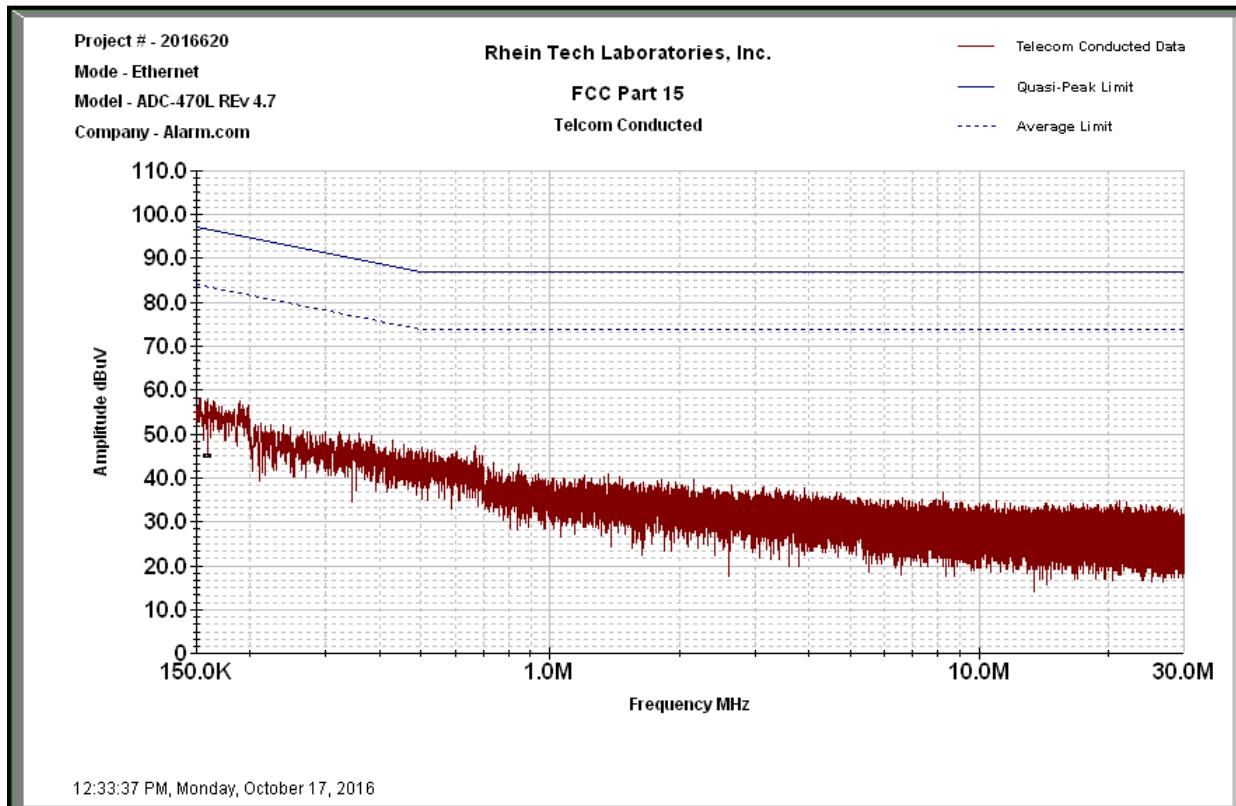

Measurement uncertainty: Measurement uncertainties shown for these tests are expanded uncertainties expressed at 95% confidence level using a coverage factor $k = 2$. ± 3.6 dB

Test Personnel:

Daniel W. Baltzell
Test Engineer

Signature

October 17, 2016
Date of Test

Rhein Tech Laboratories, Inc.
360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Client: Alarm.com
Model/HVIN: ADC-470L
Standards: FCC 15.249
IDs: YL6-143470L
Report #: 2016204DXT

5 99% Bandwidth – IC RSS-Gen 6.6

5.1 99% Bandwidth Test Procedure

The 99% bandwidth per RSS-Gen was measured using a 50-ohm spectrum analyzer, per C63.10 6.9.2. The modulated carrier was adjusted on the analyzer with the RBW 1-5% of the occupied bandwidth and the span 1-5 times the occupied bandwidth. The sweep time was auto and allowed through several sweeps with the max hold function used in peak detector mode. The table below contains the bandwidth measurement results.

Table 5-1: 99% Bandwidth Test Equipment

RTL Asset #	Manufacturer	Model	Part Type	Serial Number	Calibration Due Date
901581	Rohde & Schwarz	FSU	Spectrum Analyzer	1166.1660.50	3/22/18

5.2 99% Bandwidth Test Data

Table 5-2: 99% Bandwidth Test Data

99% bandwidths


Frequency (MHz)	Bandwidth (kHz)
908.4	110.6

Rhein Tech Laboratories, Inc.
360 Herndon Parkway
Suite 1400
Herndon, VA 20170
<http://www.rheintech.com>

Client: Alarm.com
Model/HVIN: ADC-470L
Standards: FCC 15.249
IDs: YL6-143470L
Report #: 2016204DXT

5.3 99% Bandwidth Plots

Plot 5-1: 99% Bandwidth; 908.4 MHz

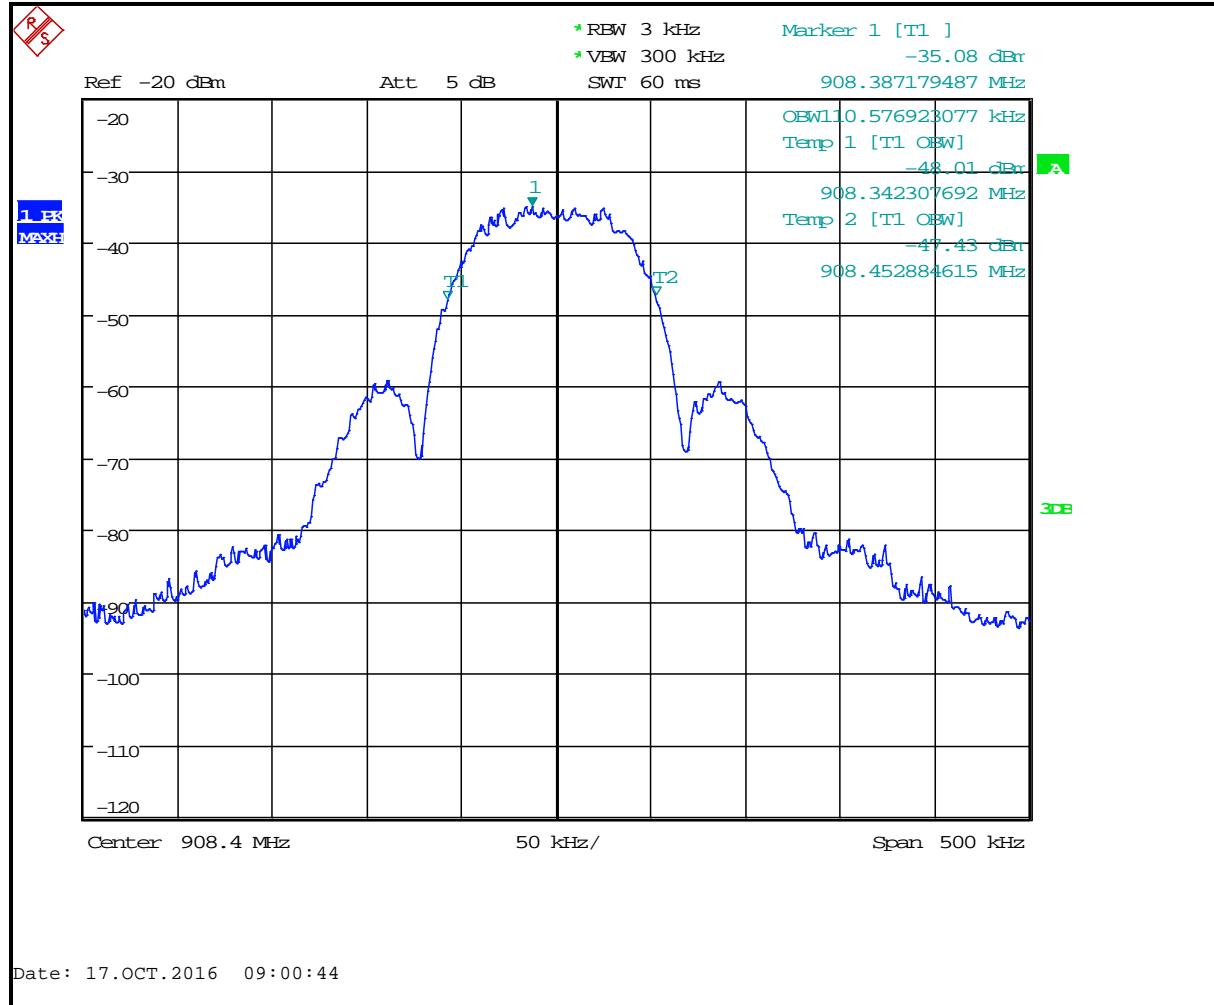

Test Personnel:

Daniel W. Baltzell
Test Engineer

Signature

October 17, 2016
Date of Test

6 Conclusion

The data in this measurement report shows that the EUT as tested, Alarm.com Model: ADC-470L, FCC ID: YL6-143470L, IC: 9111A-143470L, complies with the applicable requirements of Parts 2 and 15 of the FCC Rules and Regulations, and IC RSS-210 and RSS-Gen. and qualifies for Modular Approval.