

Dynamic Frequency Selection (DFS)

Test Report

Product Name	11ax Cloud Managed AP
Model No.	ECW336
FCC ID	A8J-ECW336

Applicant	EnGenius Technologies
Address	1580 Scenic Avenue, Costa Mesa, CA92626

Date of Receipt	Mar. 07, 2022
Issued Date	May 25, 2022
Report No.	2230212R-RFUSDFSV02-A
Report Version	V1.0



The test results relate only to the samples tested.

The test results shown in the test report are traceable to the national/international standard through the calibration report of the equipment and evaluated measurement uncertainty herein.

This report must not be used to claim product endorsement by TAF or any agency of the government.

The test report shall not be reproduced without the written approval of DEKRA Testing and Certification Co., Ltd.

Measurement uncertainties evaluated for each testing system and associated connections are given here to provide the system information for reference. Compliance determinations do not take into account measurement uncertainties for each testing system, but are based on the results of the compliance measurement.

DFS Test Report

Issued Date: May 25, 2022

Report No.: 2230212R-RFUSDFSV02-A



Product Name	11ax Cloud Managed AP
Applicant	EnGenius Technologies
Address	1580 Scenic Avenue, Costa Mesa, CA92626
Manufacturer	Senao Networks, Inc.
Model No.	ECW336
FCC ID	A8J-ECW336
EUT Rated Voltage	AC 100-240V / 50-60Hz
EUT Test Voltage	AC 120V / 60Hz
Trade Name	EnGenius
Applicable Standard	FCC CFR Title 47 Part 15 Subpart E 15.407 (h) KDB 905462
Test Result	Complied

Documented By


:



(Senior Project Specialist / Genie Chang)

Tested By

:



(Senior Engineer / Benjamin Pan)

Approved By

:



(Senior Engineer / Alan Chen)

TABLE OF CONTENTS

Description	Page
1. GENERAL INFORMATION	5
1.1. Standard Requirement	5
1.2. EUT Description	6
1.3. UNII Device Description	8
1.4. Test Facility	9
1.5. Test Equipment	10
1.6. Test Setup	11
1.7. DFS Detection Thresholds	11
1.8. Radar Test Waveforms	13
1.9. Radar Waveform Calibration	17
1.10. Radar Waveform Calibration Result	18
1.11. Master Data Traffic Plot Result	34
2. UNII DETECTION BANDWIDTH.....	37
2.1. Test Procedure	37
2.2. Test Requirement	37
2.3. Uncertainty	37
2.4. Test Result of UNII Detection Bandwidth	40
3. INITIAL CHANNEL AVAILABILITY CHECK TIME	46
3.1. Test Procedure	46
3.2. Test Requirement	46
3.3. Uncertainty	46
3.4. Test Result of Initial Channel Availability Check Time	47
4. RADAR BURST AT THE BEGINNING OF THE CHANNEL AVAILABILITY CHECK TIME	48
4.1. Test Procedure	48
4.2. Test Requirement	48
4.3. Uncertainty	48
4.4. Test Result of Radar Burst at the Beginning of the Channel Availability Check Time	49
5. RADAR BURST AT THE END OF THE CHANNEL AVAILABILITY CHECK TIME	50
5.1. Test Procedure	50
5.2. Test Requirement	50
5.3. Uncertainty	50
5.4. Test Result of Radar Burst at the End of the Channel Availability Check Time	51
6. IN-SERVICE MONITORING FOR CHANNEL MOVE TIME AND CHANNEL CLOSING	
TRANSMISSION TIME AND NON-OCCUPANCY PERIOD	52
6.1. Test Procedure	52
6.2. Test Requirement	52
6.3. Uncertainty	52
6.4. Test Result of Channel Move Time and Channel Closing Transmission Time and Non-Occupancy Period	53
7. STATISTICAL PERFORMANCE CHECK	55
7.1. Test Procedure	55
7.2. Test Requirement	55
7.3. Uncertainty	56
7.4. Test Result of Statistical Performance Check	57

Appendix 1: EUT Test Photographs

Appendix 2: Product Photos-Please refer to the file: 2230212R-Product Photos

Revision History

Report No.	Version	Description	Issued Date
2230212R-RFUSDFSV02-A	V1.0	Initial issue of report.	2022-05-25

1. GENERAL INFORMATION

1.1. Standard Requirement

FCC Part 15.407:

U-NII devices operating in the 5.25-5.35 GHz band and the 5.47-5.725 GHz band shall employ a TPC mechanism. The U-NII device is required to have the capability to operate at least 6 dB below the mean EIRP value of 30dBm. A TPC mechanism is not required for systems with an E.I.R.P. of less than 500mW.

U-NII devices operating in the 5.25-5.35 GHz and 5.47-5.725 GHz bands shall employ a DFS radar detection mechanism to detect the presence of radar systems and to avoid co-channel operation with radar systems.

1.2. EUT Description

Product Name	l1ax Cloud Managed AP
Trade Name	EnGenius
FCC ID	A8J-ECW336
Model No.	ECW336
Frequency Range	802.11a/n/ac/ax-20MHz: 5180-5320MHz, 5500-5700MHz, 5720MHz, 5745-5825MHz 802.11n/ac/ax-40MHz: 5190-5310, 5510-5670MHz, 5710MHz, 5755-5795MHz 802.11ac/ax-80MHz: 5210-5290MHz, 5530-5690MHz, 5775MHz
Number of Channels	802.11a/n/ax-20MHz: 25 802.11n/ax-40MHz: 12 802.11ac/ax-80MHz: 6
Data Rate	802.11a: 6 - 54Mbps 802.11ac-80MHz: up to 1733.3MHz 802.11ax-80MHz: up to 2402MHz
Channel Control	Auto
Type of Modulation	OFDM, BPSK, QPSK, 16QAM, 64QAM, 256QAM OFDM, OFDMA, BPSK, QPSK, 16QAM, 64QAM, 256QAM, 1024QAM
Channel Bandwidth	20/40/80MHz
DFS Function	☒ Master ☐ Slave
TPC Function	☐ <500mW not required ☒ $\geq 500\text{mW}$ employ a TPC*
Communication Mode	☒ IP Based Systems ☐ Frame Based System ☐ Other System
Antenna Gain	Refer to the table "Antenna List"

Antenna List

No.	Manufacturer	Part No.	Antenna Type	Peak Gain
1	Senao	ECW336	PIFA antenna	5.09dBi for 5GHz
2	Senao	ECW336	PIFA antenna	4.01dBi for 5GHz
3	Senao	ECW336	PIFA antenna	4.56dBi for 5GHz
4	Senao	ECW336	PIFA antenna	4.01dBi for 5GHz

802.11a/n/ac/ax -20MHz Center Working Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 36:	5180 MHz	Channel 40:	5200 MHz	Channel 44:	5220 MHz	Channel 48:	5240 MHz
Channel 52:	5260 MHz	Channel 56:	5280 MHz	Channel 60:	5300 MHz	Channel 64:	5320 MHz
Channel 100:	5500 MHz	Channel 104:	5520 MHz	Channel 108:	5540 MHz	Channel 112:	5560 MHz
Channel 116:	5580 MHz	Channel 120:	5600 MHz	Channel 124:	5620 MHz	Channel 128:	5640 MHz
Channel 132:	5660 MHz	Channel 136:	5680 MHz	Channel 140:	5700 MHz	Channel 144:	5720 MHz
Channel 149:	5745 MHz	Channel 153:	5765 MHz	Channel 157:	5785 MHz	Channel 161:	5805 MHz
Channel 165:	5825 MHz						

802.11n/ac/ax -40MHz Center Working Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 38:	5190 MHz	Channel 46:	5230 MHz	Channel 54:	5270 MHz	Channel 62:	5310 MHz
Channel 102:	5510 MHz	Channel 110:	5550 MHz	Channel 118:	5590 MHz	Channel 126:	5630 MHz
Channel 134:	5670 MHz	Channel 142:	5710 MHz	Channel 151:	5755 MHz	Channel 159:	5795 MHz

802.11ac/ax -80MHz Center Working Frequency of Each Channel:

Channel	Frequency	Channel	Frequency	Channel	Frequency	Channel	Frequency
Channel 42:	5210 MHz	Channel 58:	5290 MHz	Channel 106:	5530 MHz	Channel 122:	5610 MHz
Channel 138:	5690 MHz	Channel 155:	5775 MHz				

Test Mode	Mode 1: Transmit (802.11ax-20BW) Mode 2: Transmit (802.11ax-40BW) Mode 3: Transmit (802.11ax-80BW) Mode 4: Transmit -Client (without radar detectino)
-----------	--

1.3. UNII Device Description

(1) The EUT operates in the following DFS band:

1. 5250-5350 MHz
2. 5470-5725 MHz

(2) The U-NII device maximum power is 31.97dBm(E.I.R.P).

Master mode:

Below are the available 50 ohm antenna assemblies and their corresponding gains. 0dBi gain was used to set the -61 dBm threshold level (-62dBm +1 dB) during calibration of the test setup.

Slave mode:

Below are the available 50 ohm antenna assemblies and their corresponding gains. 0dBi gain was used to set the -63 dBm threshold level (-64dBm +1 dB) during calibration of the test setup.

No.	Manufacturer	Part No.	Antenna Type	Peak Gain
1	Senao	ECW336	PIFA antenna	5.09dBi for 5GHz
2	Senao	ECW336	PIFA antenna	4.01dBi for 5GHz
3	Senao	ECW336	PIFA antenna	4.56dBi for 5GHz
4	Senao	ECW336	PIFA antenna	4.01dBi for 5GHz

(3) WLAN traffic is generated by the test software “Iperf.exe” from the Master device to the Slave device in the transfer data rate >17%.

(4) For the 5250-5350MHz and 5470-5725 MHz bands, the Master device provides, on aggregate, uniform loading of the spectrum across all devices by selecting an operating channel among the available channels using a random algorithm.

(5) Master mode:

The client device is an Notebook pc contains Intel WLAN radio Module card

(Model: AX200NGW). The Intel WLAN Module card FCC ID: PD9AX200NG

1.4. Test Facility

Ambient conditions in the laboratory:

Performed Item	Items	Required	Actual
Radiated Emission	Temperature (°C)	10~40 °C	24.8 °C
	Humidity (%RH)	10~90 %	65.8 %
Conductive	Temperature (°C)	10~40 °C	21.4 °C
	Humidity (%RH)	10~90 %	58.3 %

USA : FCC Registration Number: TW0033

Canada : CAB Identifier Number: TW3023 / Company Number: 26930

Site Description : Accredited by TAF
Accredited Number: 3023

Test Laboratory : DEKRA Testing and Certification Co., Ltd
Address : No. 5-22, Ruishukeng Linkou District, New Taipei City,
24451, Taiwan
Performed : No. 26, Huaya 1st Rd., Guishan Dist., Taoyuan City
Location : 333411, Taiwan, R.O.C.
Phone number : +886-3-275-7255
Fax number : +866-3-327-8031
Email address : info.tw@dekra.com
Website : <http://www.dekra.com.tw>

1.5. Test Equipment


Dynamic Frequency Selection (DFS) / HY-SR06

Instrument	Manufacturer	Type No.	Serial No	Cal. Date
Spectrum Analyzer	R&S	FSV30	103467	2022.03.22
Vector Signal Generator	R&S	SMBV100	261871	2022.03.31
Horn Antenna	ETS-Lindgren	3117	00201259	2021.11.09
Horn Antenna	ETS-Lindgren	3117	00227709	2021.11.09

Instrument	Manufacturer	Type No.	Serial No
Notebook Pc	Dell	Inspiron 14 5459	1599Q72
RF Cable	WOKEN	L1406-031C	S02-130729-305
RF Cable	SUHNER	SUCOFLEX 106	3474516
Access Point	ASUS	RT-AX88U	JCITHP000040

Software	Manufacturer	Function
R&S Pulse Sequencer V2.1	R&S	Radar Signal Generation Software
Iperf v2.0.8	iperf.fr	Streaming data

1.6. Test Setup

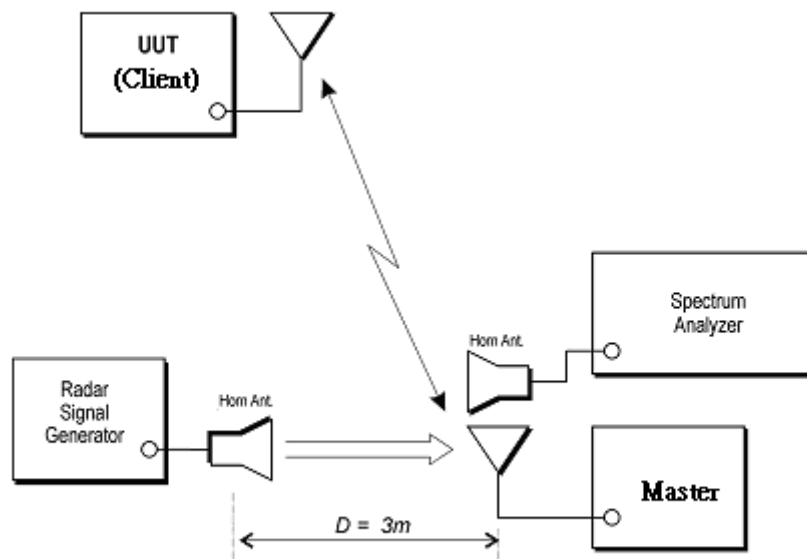

1.7. DFS Detection Thresholds

(1) Interference Threshold value, Master or Client incorporating In-Service Monitoring

Maximum Transmit Power	Value (see note)
≥ 200 milliwatt	-64dBm
EIRP < 200 milliwatt and power spectral density < 10 dBm/MHz	-62dBm
EIRP < 200 milliwatt that do not meet the power spectral density requirement	-64dBm
Note 1: This is the level at the input of the receiver assuming a 0 dBi receive antenna. Note 2: Throughout these test procedures an additional 1 dB has been added to the amplitude of the test transmission waveforms to account for variations in measurement equipment. This will ensure that the test signal is at or above the detection threshold level to trigger a DFS response. Note3: EIRP is based on the highest antenna gain. For MIMO devices refer to KDB Publication 662911 D01.	

(2) DFS Response requirement values

Parameter	Value
Non-Occupancy Period	Minimum 30 Minutes
Channel Availability Check Time	60 Seconds
Channel Move Time	10 Seconds See Note 1.
Channel Closing Transmission Time	200 milliseconds + approx. 60 milliseconds over remaining 10 seconds period (See Notes 1 and 2)
U-NII Detection Bandwidth	Minimum 100% of the 99% power bandwidth See Note 3.

Note 1: *Channel Move Time* and the *Channel Closing Transmission Time* should be performed with Radar Type 0. The measurement timing begins at the end of the Radar Type 0 burst.

Note 2: The *Channel Closing Transmission Time* is comprised of 200 milliseconds starting at the beginning of the *Channel Move Time* plus any additional intermittent control signals required to facilitate a *Channel* move (an aggregate of 60 milliseconds) during the remainder of the 10 second period. The aggregate duration of control signals will not count quiet periods in between transmissions.

Note 3: During the *U-NII Detection Bandwidth* detection test, radar type 0 should be used. For each frequency step the minimum percentage of detection is 90 percent. Measurements are performed with no data traffic.

1.8. Radar Test Waveforms

This section provides the parameters for required test waveforms, minimum percentage of successful detections, and the minimum number of trials that must be used for determining DFS conformance. Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1 MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of specific test waveforms.

(1) Short Pulse Radar Test Waveforms

Radar Type	Pulse Width (μsec)	PRI (μsec)	Number of Pulses	Minimum Percentage of Successful Detection	Minimum Number of Trials
0	1	1428	18	See Note 1	See Note 1
1	1	Test A: 15 unique PRI values randomly selected from the list of 23 PRI values in Table 5a	Roundup $\left\{ \left(\frac{1}{360} \right), \left(\frac{19 \cdot 10^6}{\text{PRI}_{\mu\text{sec}}} \right) \right\}$	60%	30
		Test B: 15 unique PRI values randomly selected within the range of 518-3066 μsec, with a minimum increment of 1 μsec, excluding PRI values selected in Test A			
2	1-5	150-230	23-29	60%	30
3	6-10	200-500	16-18	60%	30
4	11-20	200-500	12-16	60%	30
Aggregate (Radar Types 1-4)				80%	120
Note 1: Short Pulse Radar Type 0 should be used for the detection bandwidth test, channel move time, and channel closing time tests.					

A minimum of 30 unique waveforms are required for each of the Short Pulse Radar Types 2 through 4. If more than 30 waveforms are used for Short Pulse Radar Types 2 through 4, then each additional waveform must also be unique and not repeated from the previous waveforms. If more than 30 waveforms are used for Short Pulse Radar Type 1, then each additional waveform is generated with Test B and must also be unique and not repeated from the previous waveforms in Tests A or B.

(2) Long Pulse Radar Test Signal

Radar Waveform	Bursts	Number of Pulses Per Burst	Pulse Width (usec)	Chirp Width (MHz)	PRI (usec)	Minimum Percentage of Successful Detection	Minimum Trials
5	8-20	1-3	50-100	5-20	1000-2000	80%	30

The parameters for this waveform are randomly chosen. Thirty unique waveforms are required for the long pulse radar test signal. If more than 30 waveforms are used for the long pulse radar test signal, then each additional waveform must also be unique and not repeated from the previous waveforms.


Each waveform is defined as follows:

- 1) The transmission period for the Long Pulse Radar test signal is 12 seconds.
- 2) There are a total of 8 to 20 Bursts in the 12 second period, with the number of Bursts being randomly chosen. This number is Burst_Count.
- 3) Each Burst consists of 1 to 3 pulses, with the number of pulses being randomly chosen. Each Burst within the 12 second sequence may have a different number of pulses.
- 4) The pulse width is between 50 and 100 microseconds, with the pulse width being randomly chosen. Each pulse within a Burst will have the same pulse width. Pulses in different Bursts may have different pulse widths.
- 5) Each pulse has a linear frequency modulated chirp between 5 and 20 MHz, with the chirp width being randomly chosen. Each pulse within a transmission period will have the same chirp width. The chirp is centered on the pulse. For example, with a radar frequency of 5300 MHz and a 20 MHz chirped signal, the chirp starts at 5290 MHz and ends at 5310 MHz.
- 6) If more than one pulse is present in a Burst, the time between the pulses will be between 1000 and 2000 microseconds, with the time being randomly chosen. If three pulses are present in a Burst, the time between the first and second pulses is chosen independently of the time between the second and third pulses.
- 7) The 12 second transmission period is divided into even intervals. The number of intervals is equal to Burst_Count. Each interval is of length $(12,000,000 / \text{Burst_Count})$ microseconds. Each interval contains one Burst. The start time for the Burst, relative to the beginning of the interval, is between 1 and $[(12,000,000 / \text{Burst_Count}) - (\text{Total Burst Length}) + (\text{One Random PRI Interval})]$ microseconds, with the start time being randomly chosen. The step interval for the start time is 1 microsecond. The start time for each Burst is chosen independently.

A representative example of a Long Pulse radar test waveform:

- 1) The total test signal length is 12 seconds.
- 2) 8 Bursts are randomly generated for the Burst_Count.
- 3) Burst 1 has 2 randomly generated pulses.
- 4) The pulse width (for both pulses) is randomly selected to be 75 microseconds.
- 5) The PRI is randomly selected to be at 1213 microseconds.
- 6) Bursts 2 through 8 are generated using steps 3 – 5.
- 7) Each Burst is contained in even intervals of 1,500,000 microseconds. The starting location for Pulse 1, Burst 1 is randomly generated (1 to 1,500,000 minus the total Burst 1 length + 1 random PRI interval) at the 325,001 microsecond step. Bursts 2 through 8 randomly fall in successive 1,500,000 microsecond intervals (i.e. Burst 2 falls in the 1,500,001 – 3,000,000 microsecond range).

Graphical Representation of a Long Pulse radar Test Waveform

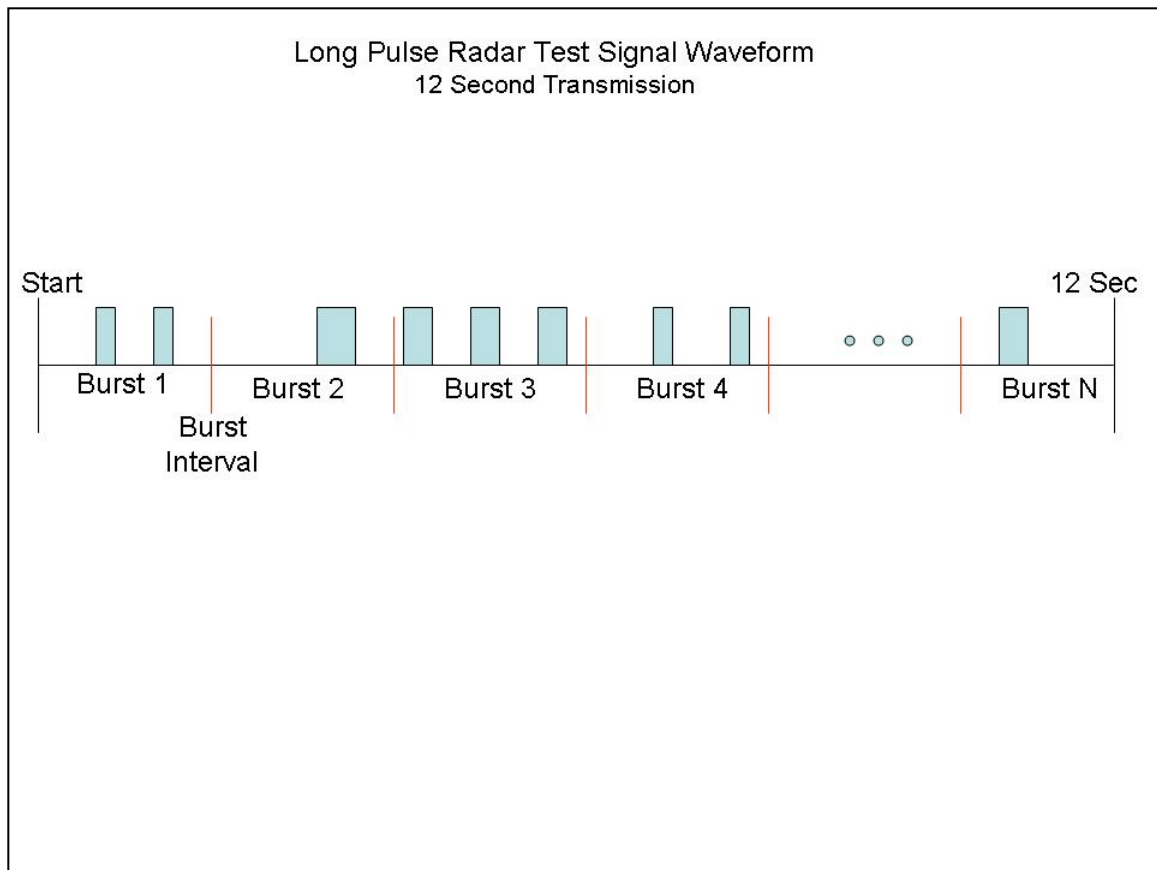

(3) Frequency Hopping Radar Test Signal

Radar Waveform	Pulse Width (μsec)	PRI (μsec)	Hopping Sequence Length (msec)	Pulses Per Hop	Hopping Rate (kHz)	Minimum Percentage of Successful Detection	Minimum Trials
6	1	333	300	9	0.333	70%	30

For the Frequency Hopping Radar Type, the same *Burst* parameters are used for each waveform. The hopping sequence is different for each waveform and a 100-length segment is selected from the hopping sequence defined by the following algorithm:


The first frequency in a hopping sequence is selected randomly from the group of 475 integer frequencies from 5250 – 5724 MHz. Next, the frequency that was just chosen is removed from the group and a frequency is randomly selected from the remaining 474 frequencies in the group. This process continues until all 475 frequencies are chosen for the set. For selection of a random frequency, the frequencies remaining within the group are always treated as equally likely.

1.9. Radar Waveform Calibration


The following equipment setup was used to calibrate the conducted radar waveform. A spectrum analyzer was used to establish the test signal level for each radar type. During this process there were replace 50ohm terminal from master and client device and no transmissions by either the master or client device. The spectrum analyzer was switched to the zero span (time domain) at the frequency of the radar waveform generator. Peak detection was utilized. The spectrum analyzer resolution bandwidth (RBW) and video bandwidth (VBW) were set to 3MHz and 3 MHz.

The signal generator amplitude was set so that the power level measured at the spectrum analyzer was -61dBm due to the interference threshold level is not required.

Radiated Calibration Setup

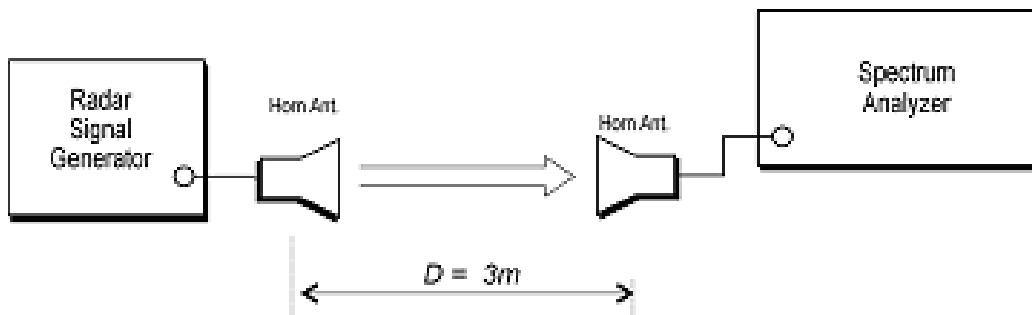


1.10. Radar Waveform Calibration Result

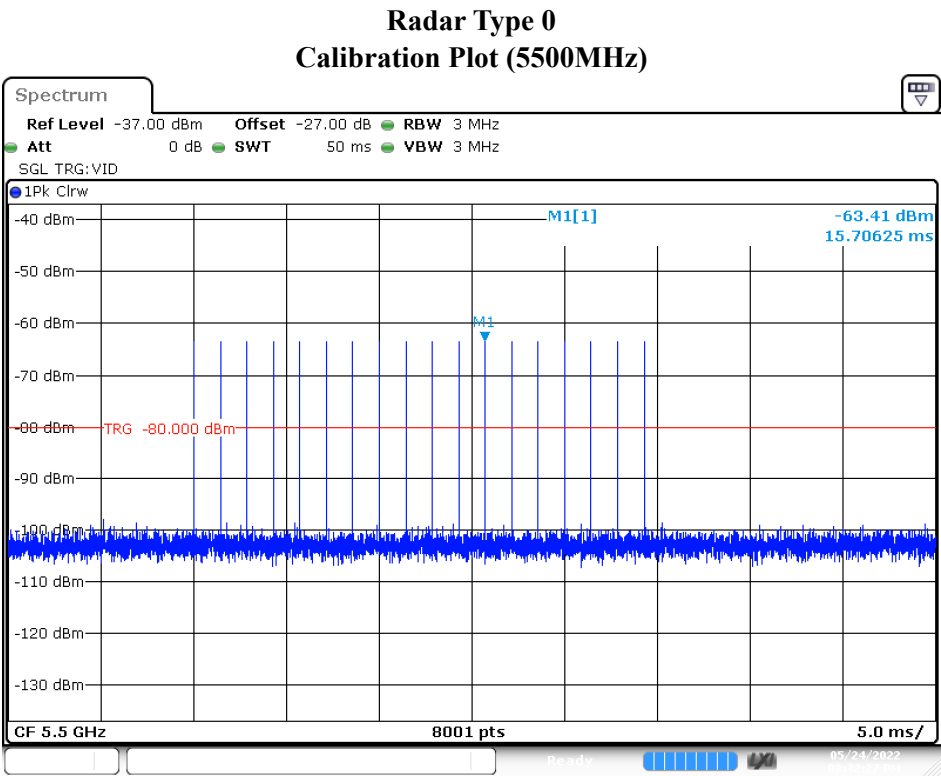


Date: 24.MAY.2022 20:32:27

Calibration Plot (5510MHz)

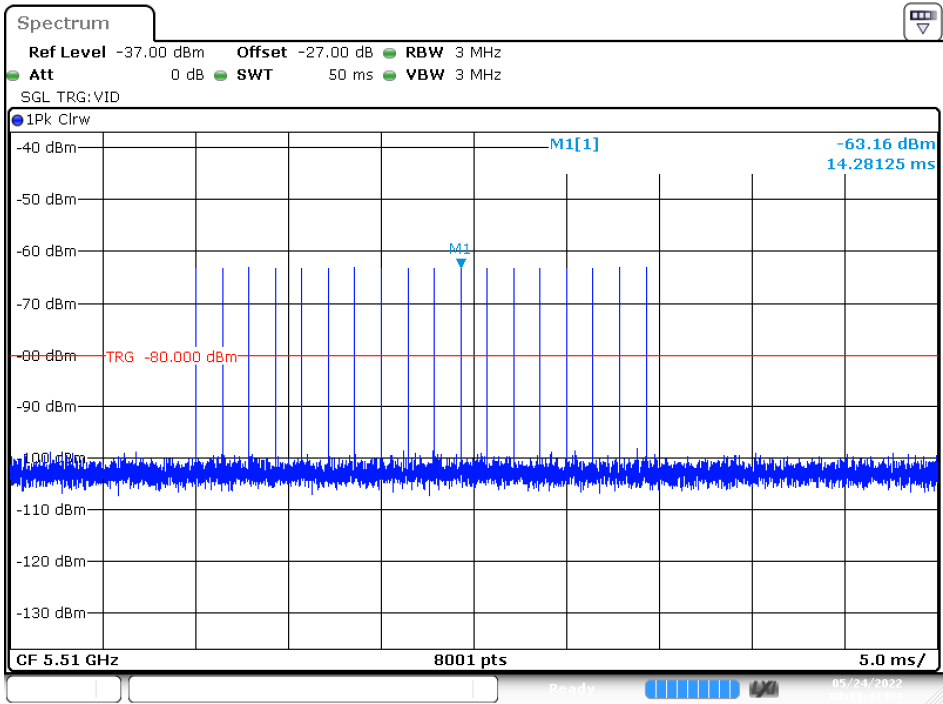


Date: 24.MAY.2022 20:31:44

Calibration Plot (5530MHz)

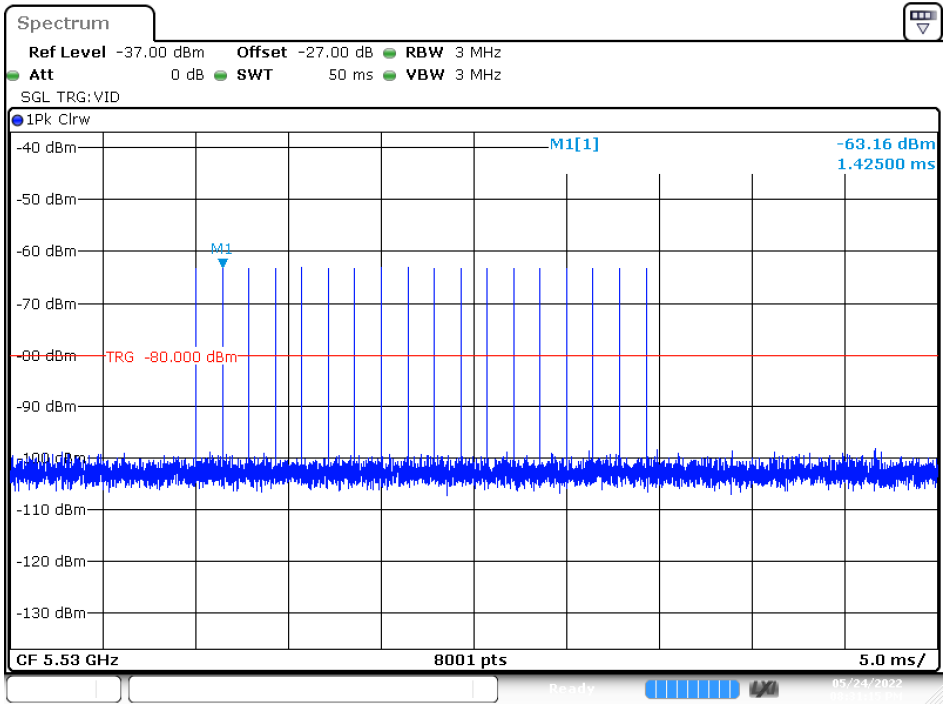


Date: 24.MAY.2022 20:31:15

Radar Type 1-A
Calibration Plot (5500MHz)

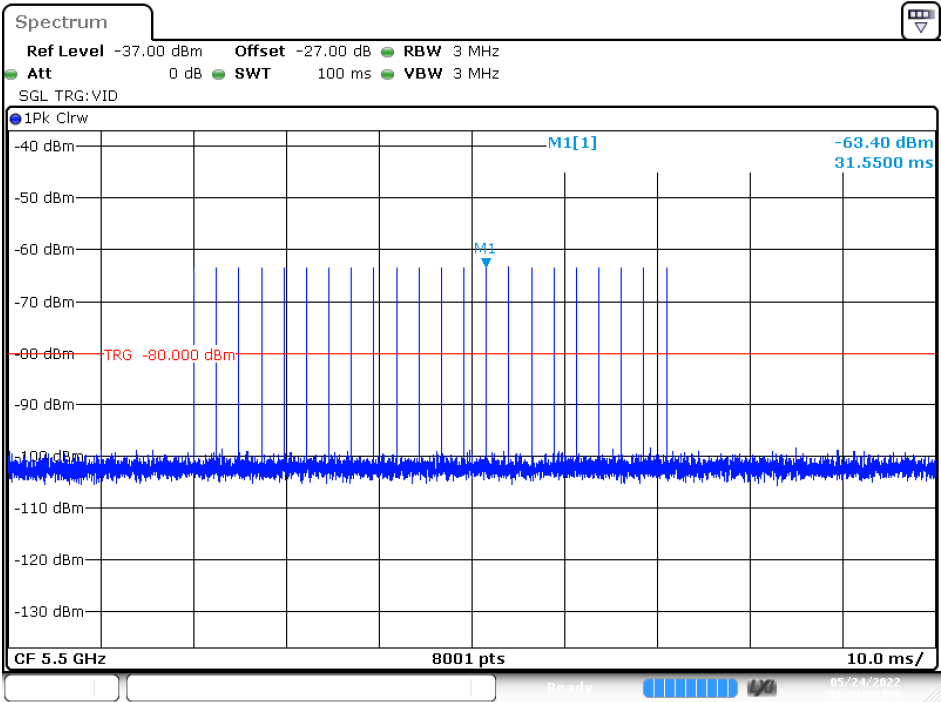


Date: 24.MAY.2022 20:34:34

Calibration Plot (5510MHz)

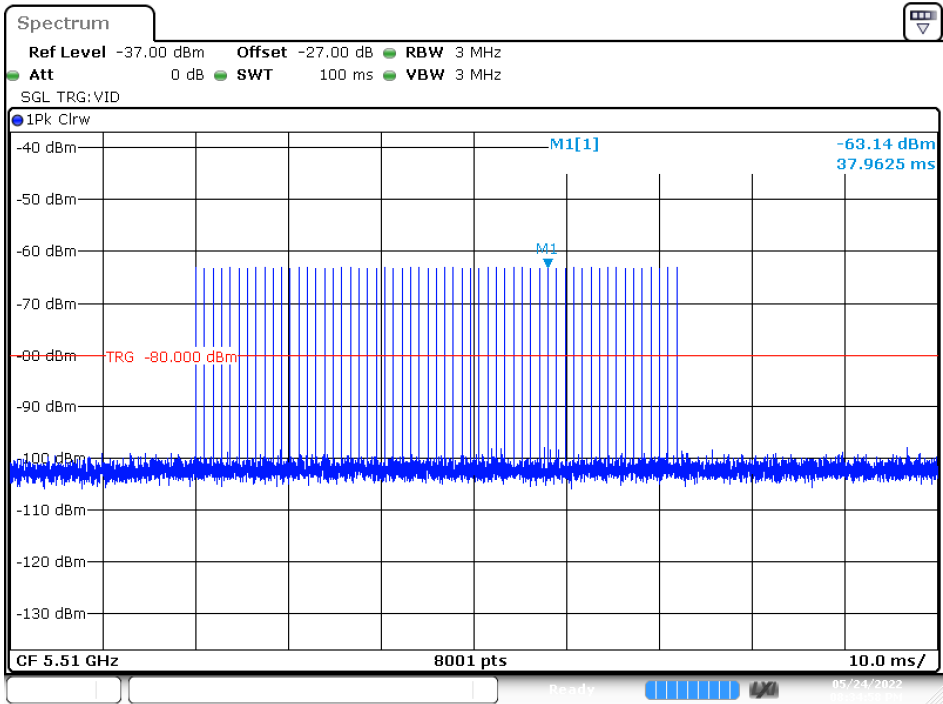

Date: 24.MAY.2022 20:34:59


Calibration Plot (5530MHz)

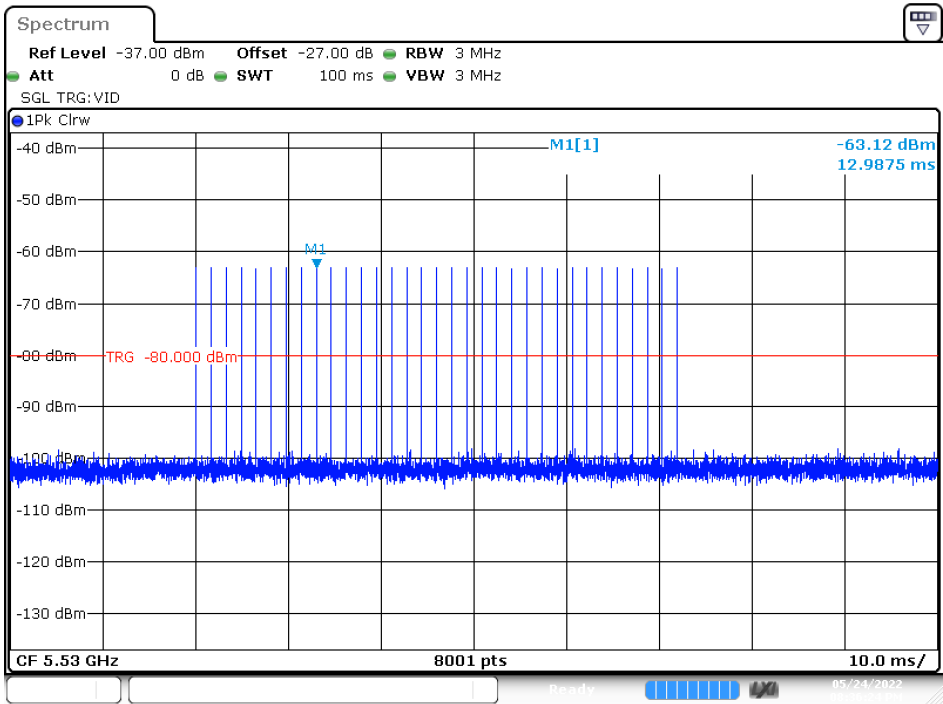

Date: 24.MAY.2022 20:36:24


Radar Type 1-B

Calibration Plot (5500MHz)

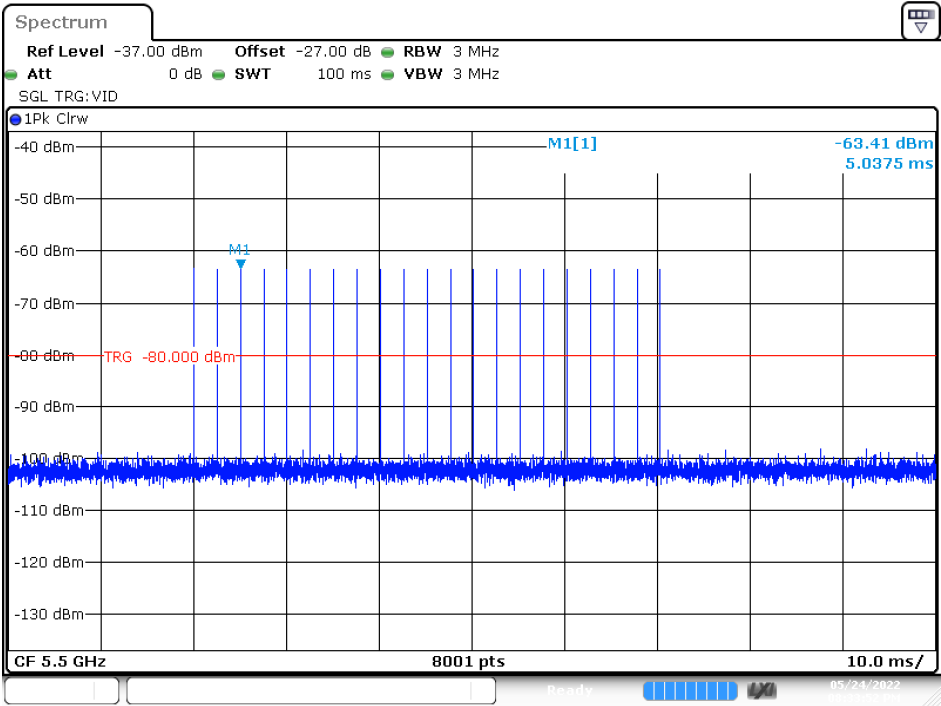


Date: 24.MAY.2022 20:33:52

Calibration Plot (5510MHz)

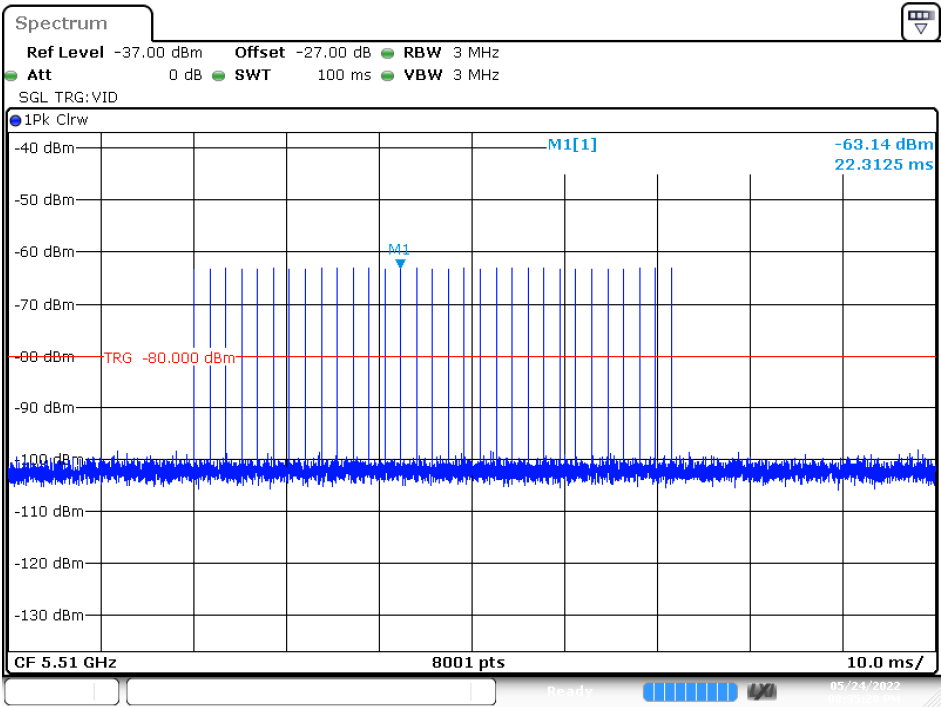


Date: 24.MAY.2022 20:35:29

Calibration Plot (5530MHz)

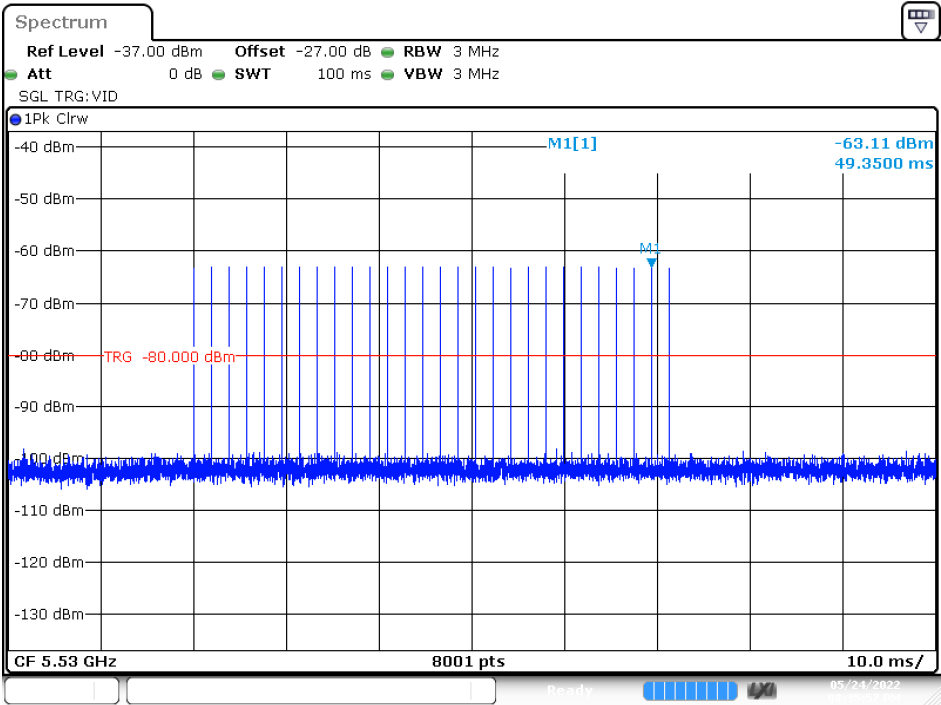


Date: 24.MAY.2022 20:35:57

Radar Type 2
Calibration Plot (5500MHz)

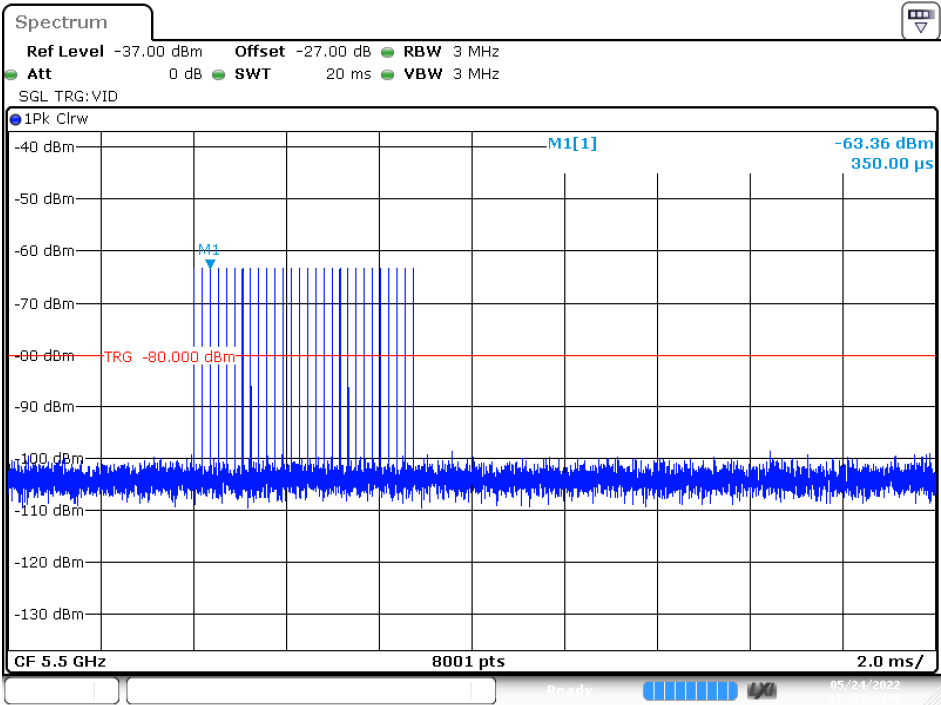


Date: 24.MAY.2022 20:37:55

Calibration Plot (5510MHz)

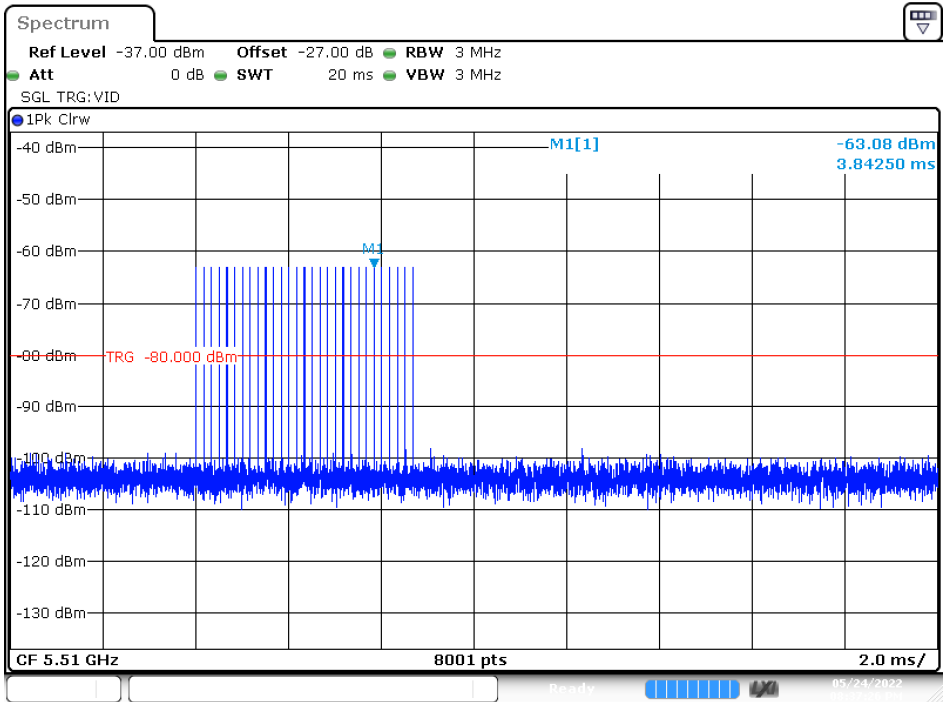


Date: 24.MAY.2022 20:37:27

Calibration Plot (5530MHz)

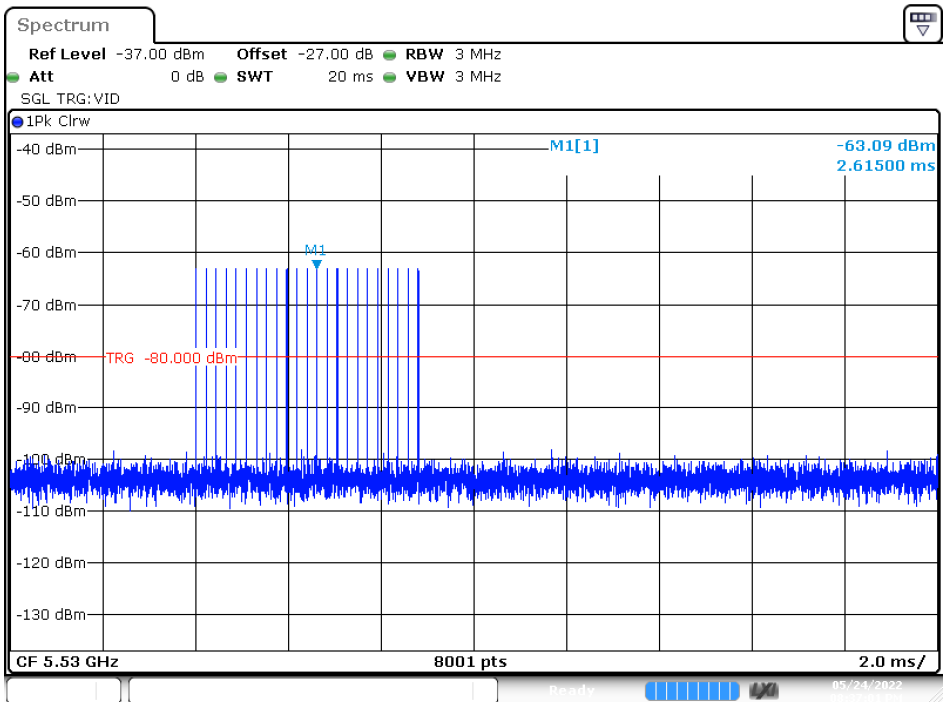


Date: 24.MAY.2022 20:37:01

Radar Type 3
Calibration Plot (5500MHz)

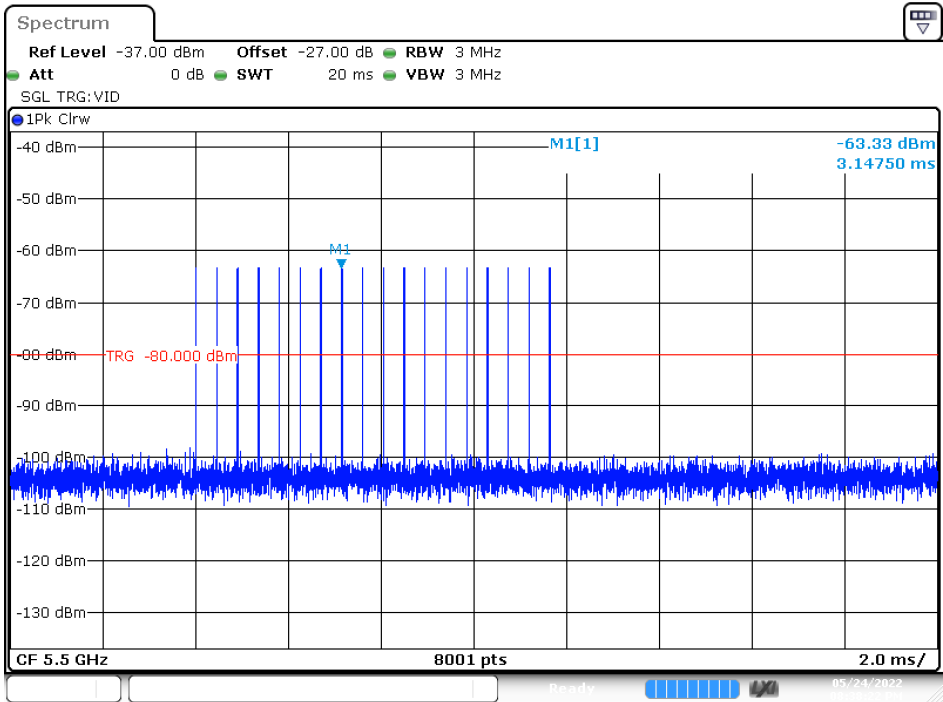


Date: 24.MAY.2022 20:38:22

Calibration Plot (5510MHz)

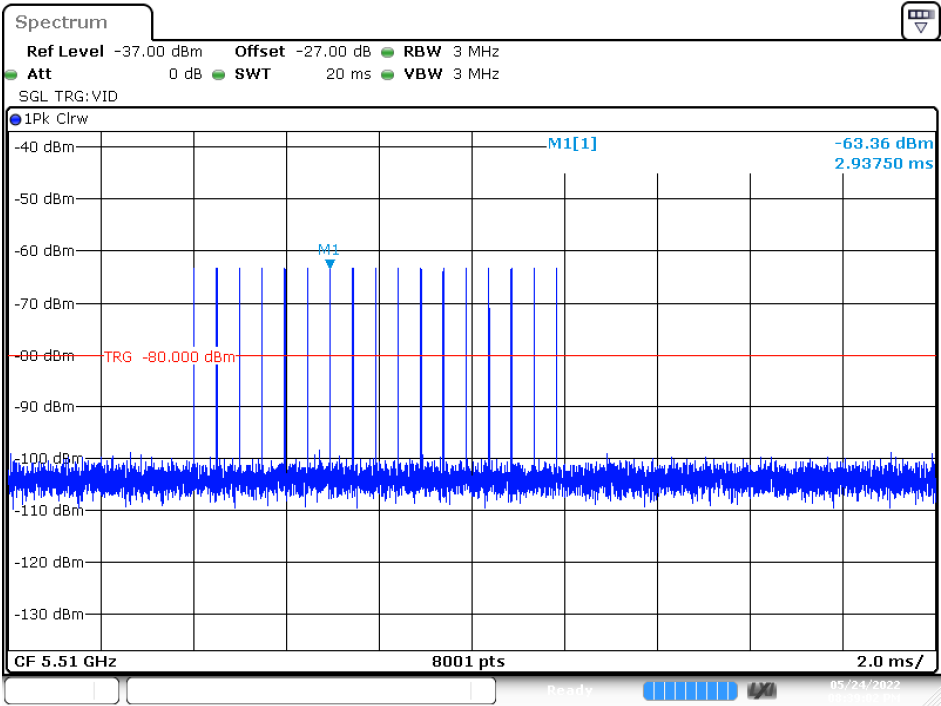


Date: 24.MAY.2022 20:39:03

Calibration Plot (5530MHz)

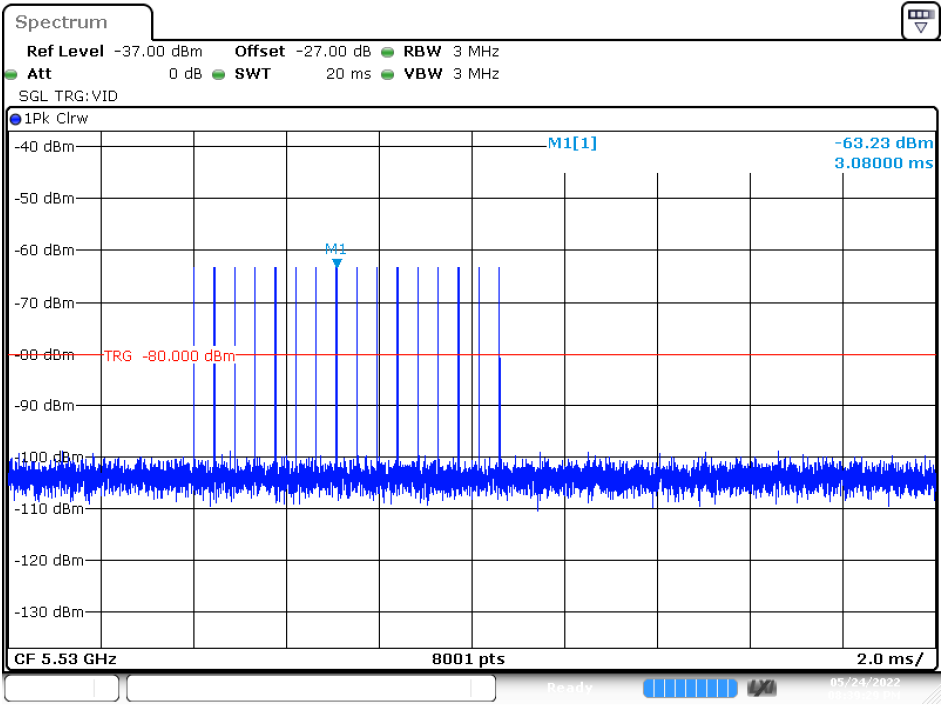


Date: 24.MAY.2022 20:39:29

Radar Type 4
Calibration Plot (5500MHz)

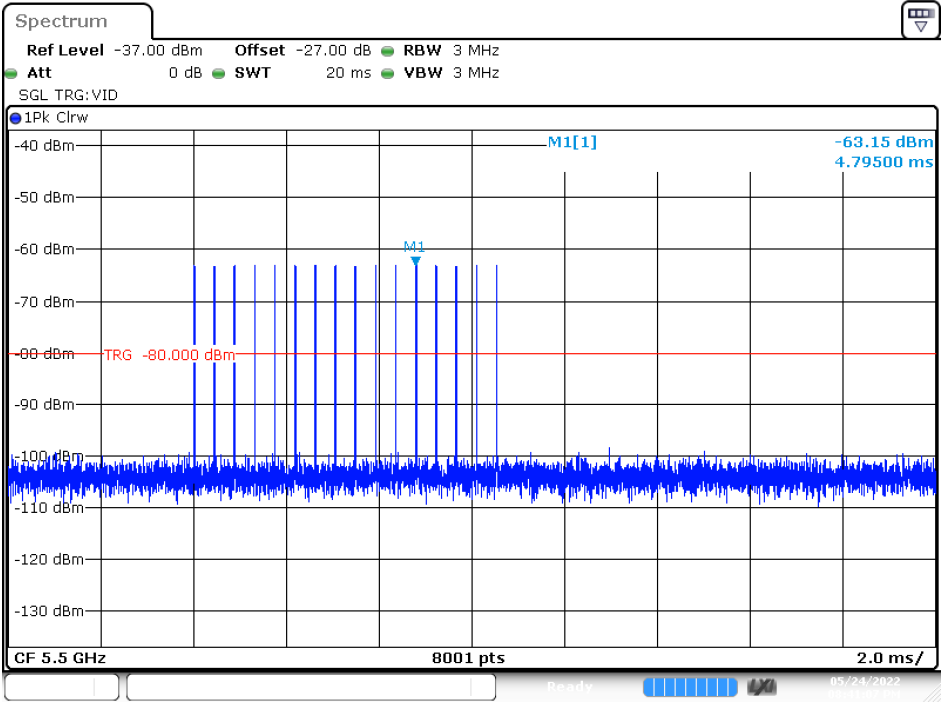


Date: 24.MAY.2022 20:41:07

Calibration Plot (5510MHz)

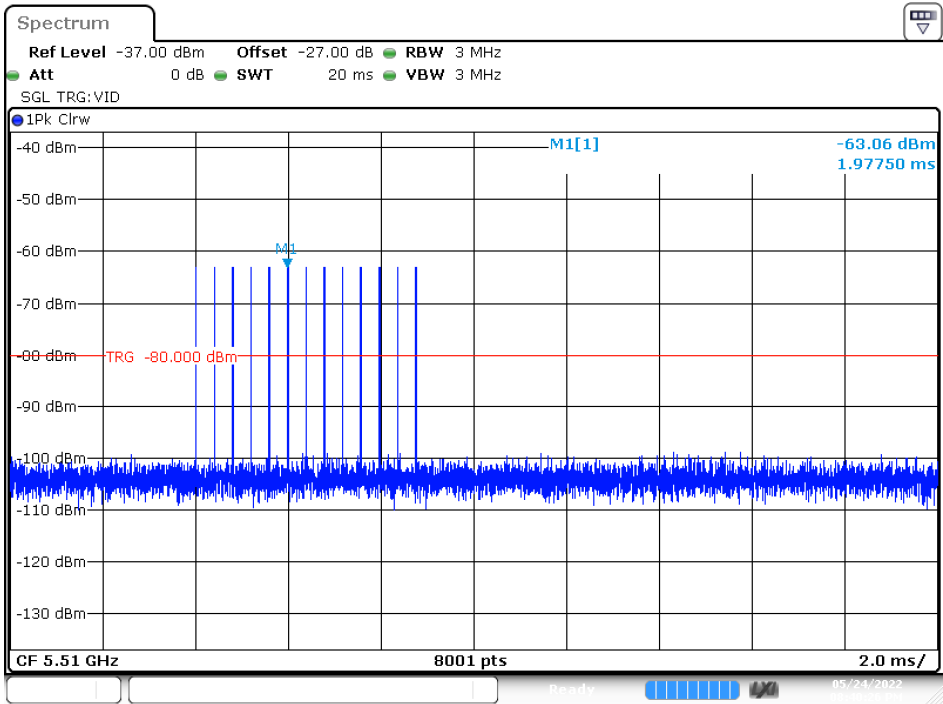


Date: 24.MAY.2022 20:40:26

Calibration Plot (5530MHz)

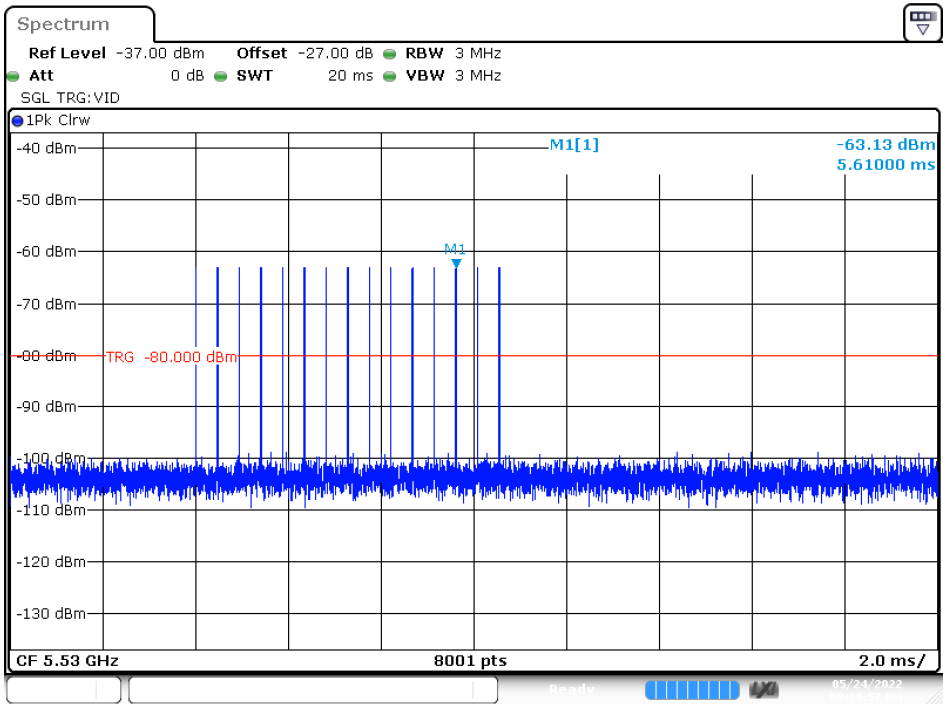


Date: 24.MAY.2022 20:39:57

Radar Type 5
Calibration Plot (5500MHz)

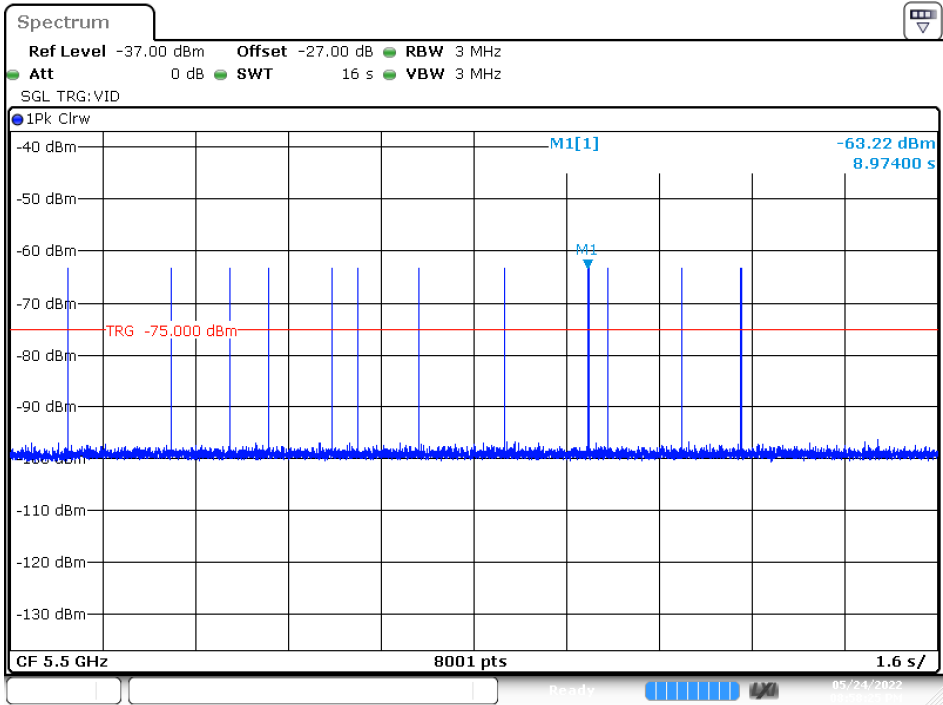


Date: 24.MAY.2022 20:58:26

Calibration Plot (5510MHz)

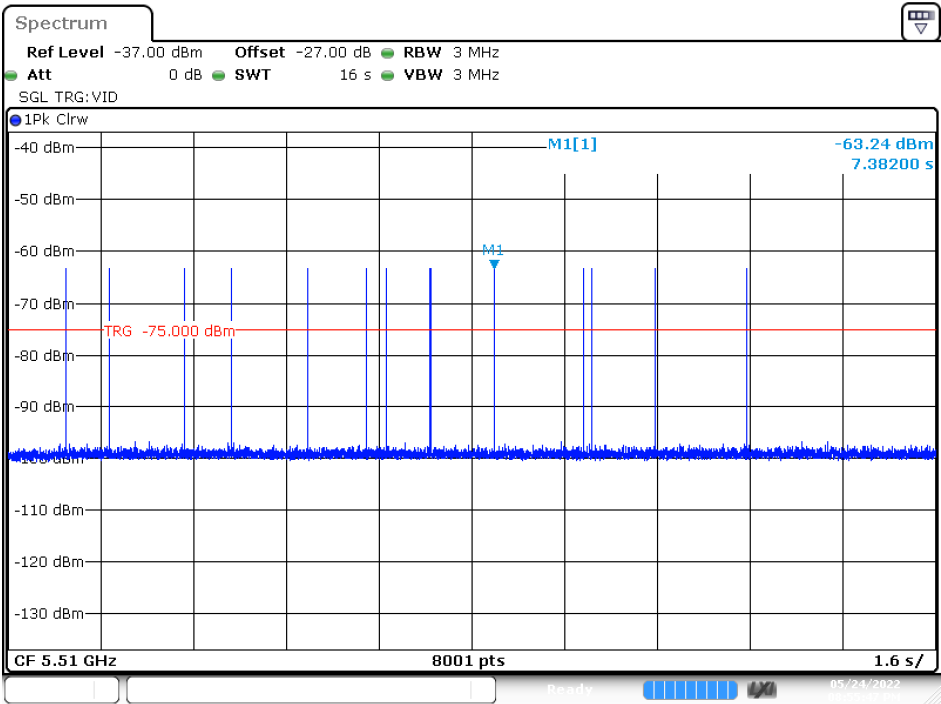


Date: 24.MAY.2022 20:55:48

Calibration Plot (5530MHz)

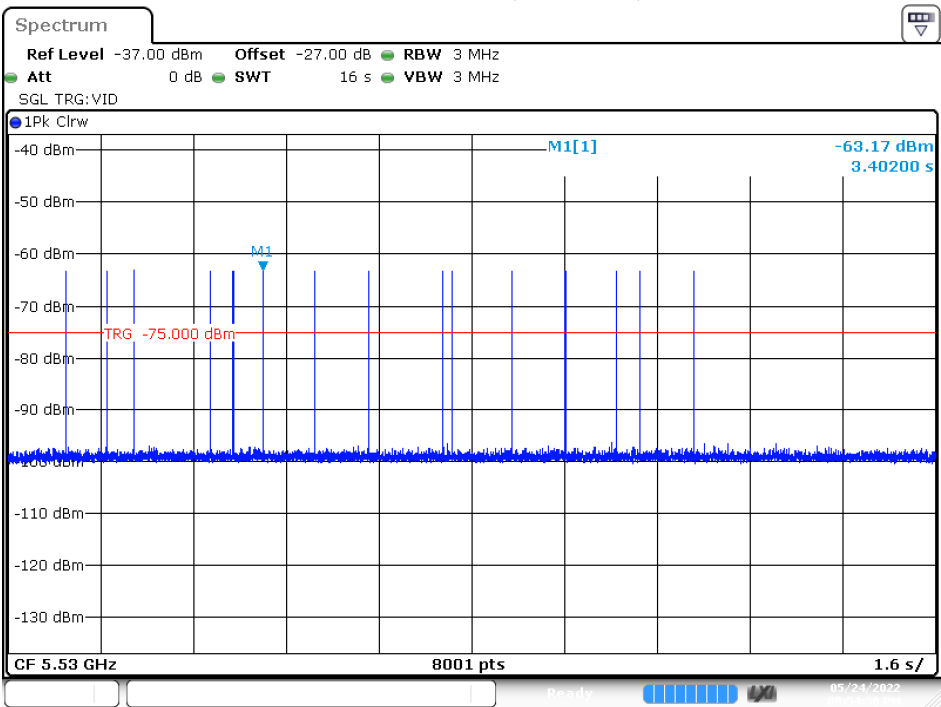


Date: 24.MAY.2022 20:54:37

Radar Type 6
Calibration Plot (5500MHz)

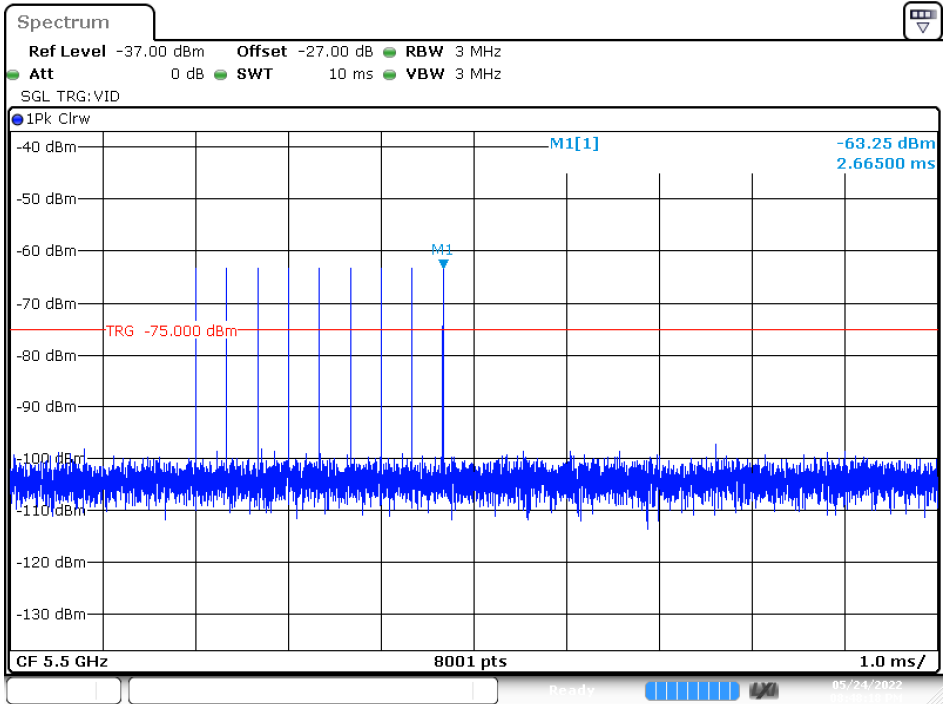


Date: 24.MAY.2022 20:48:19

Calibration Plot (5510MHz)

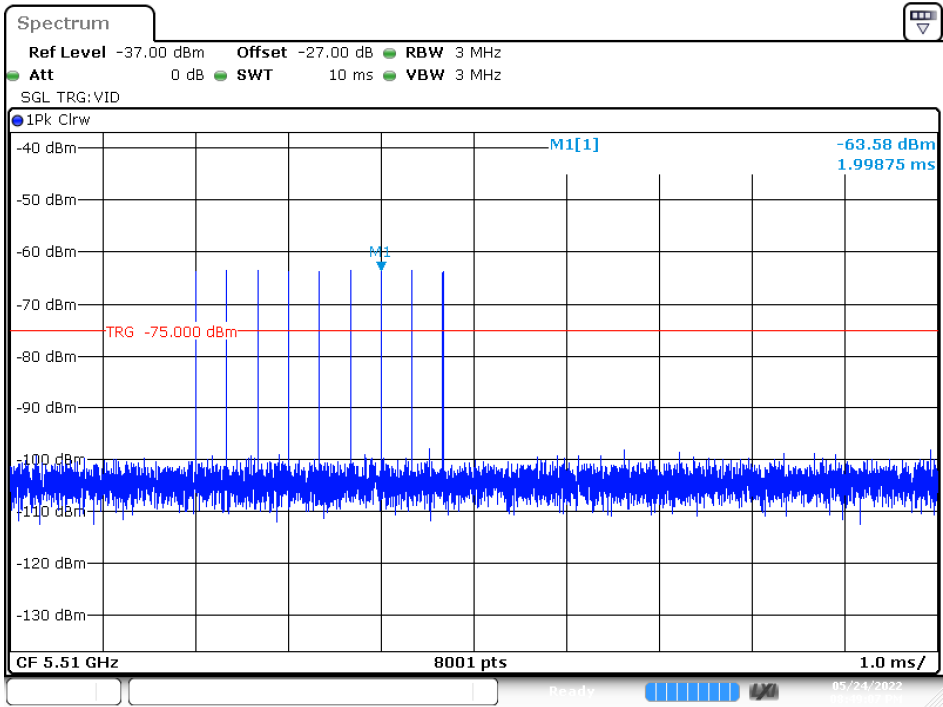

Date: 24.MAY.2022 20:49:08


Calibration Plot (5530MHz)

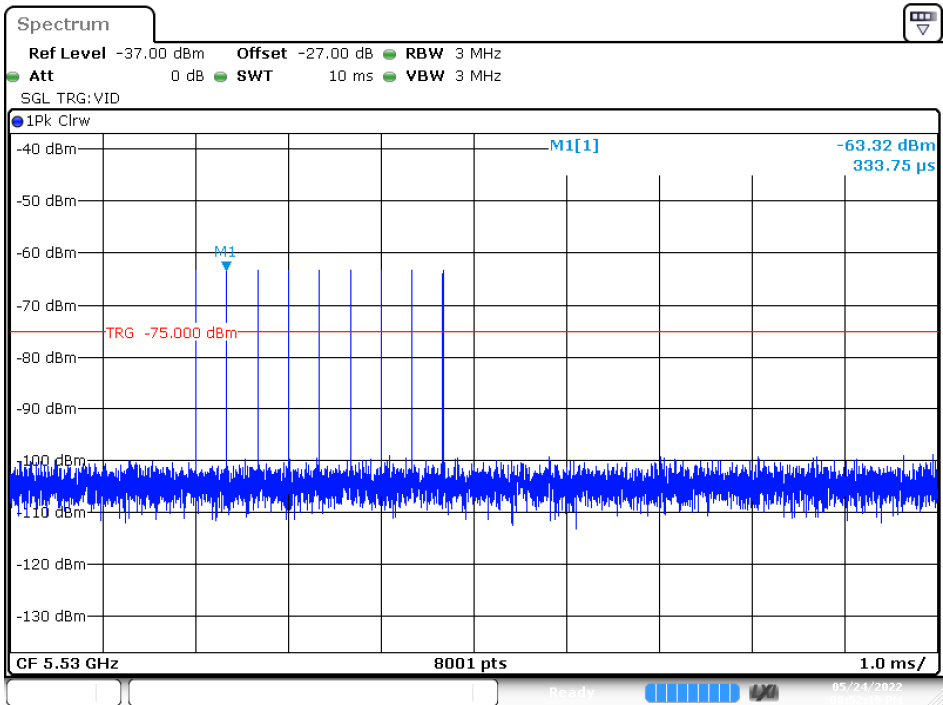


Date: 24.MAY.2022 20:52:20

1.11. Master Data Traffic Plot Result

Plot of WLAN Traffic at 5500MHz-20BW

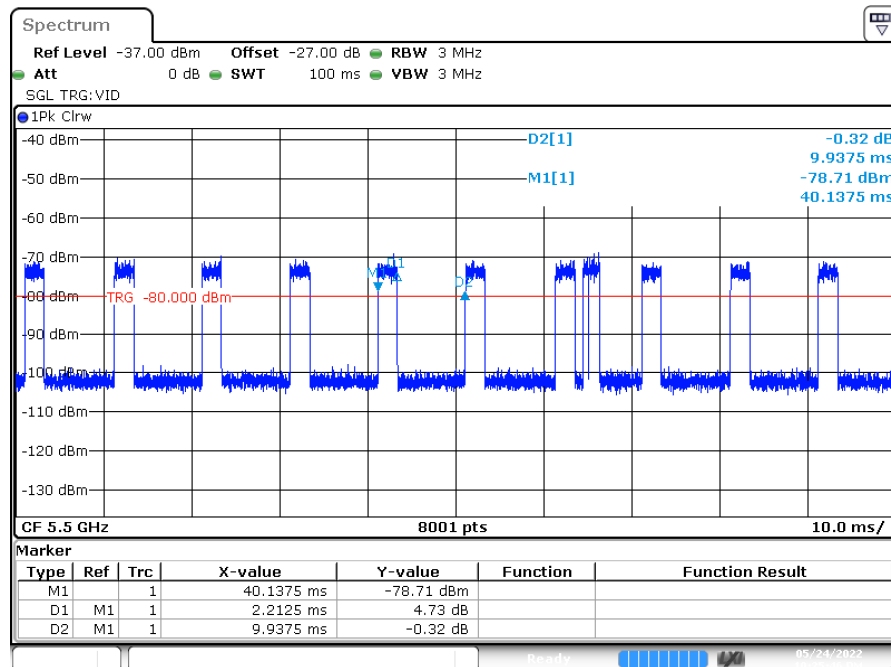


Date: 24.MAY.2022 22:25:46

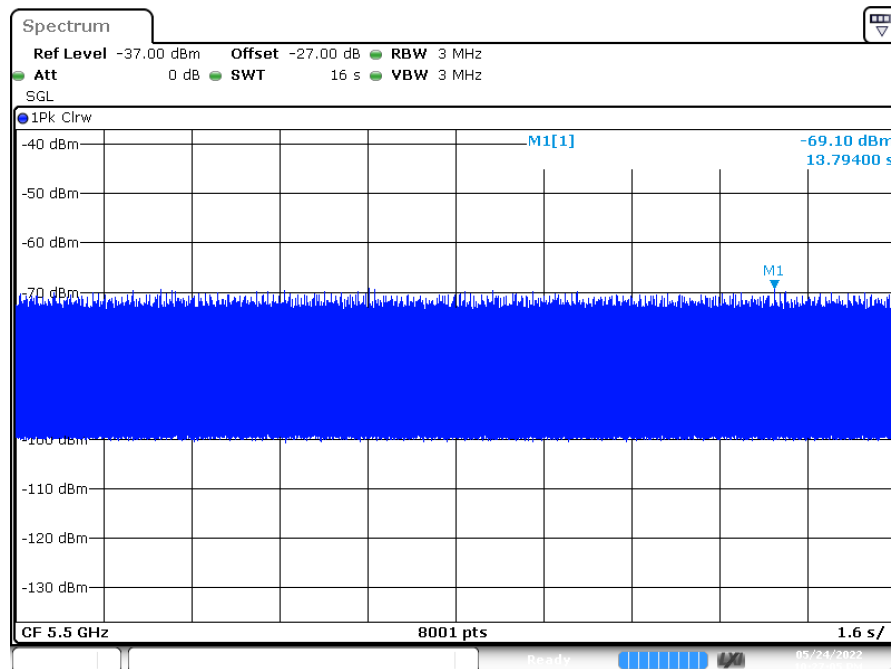


Date: 24.MAY.2022 22:27:06

Channel loading	Requirement loading
22.26%	>17%

Plot of WLAN Traffic at 5510MHz-40BW

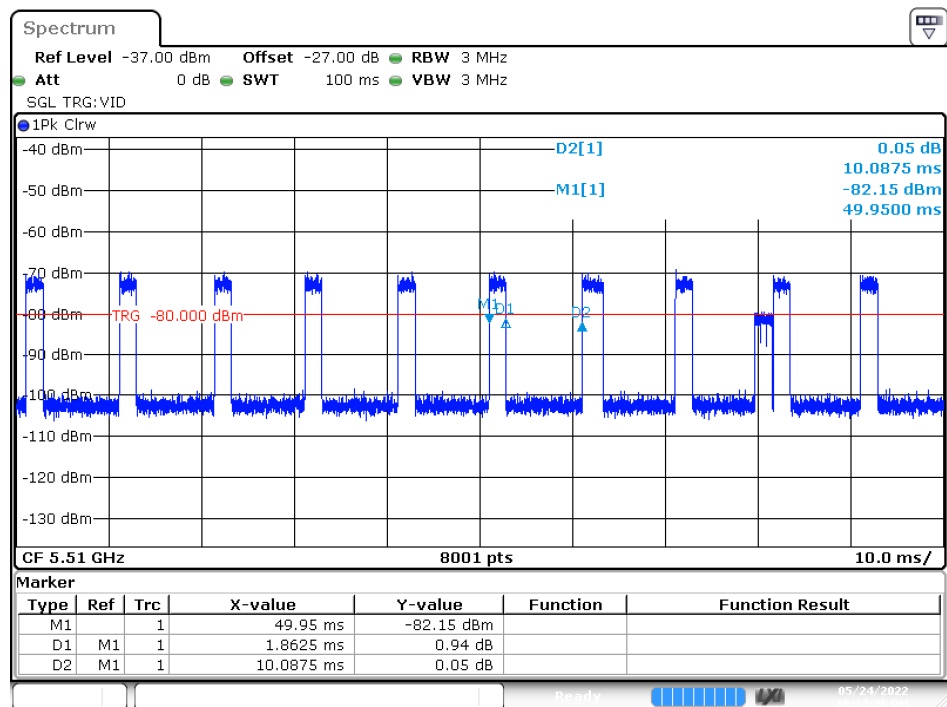


Date: 24.MAY.2022 22:13:36

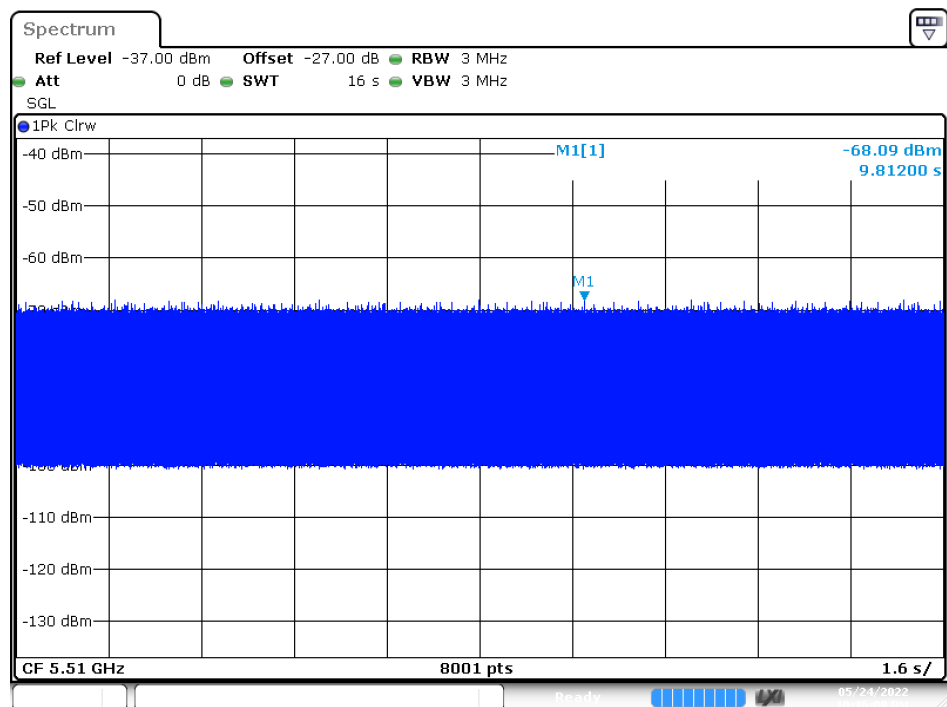


Date: 24.MAY.2022 22:16:09

Channel loading	Requirement loading
18.46%	>17%

Plot of WLAN Traffic at 5530MHz-80BW

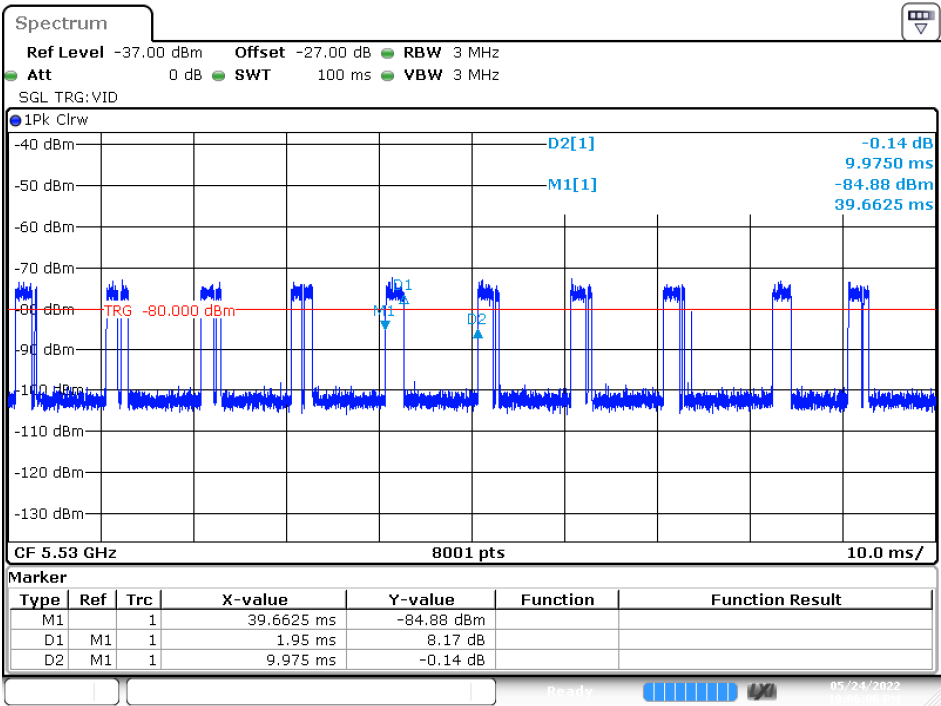

Date: 24.MAY.2022 22:06:06

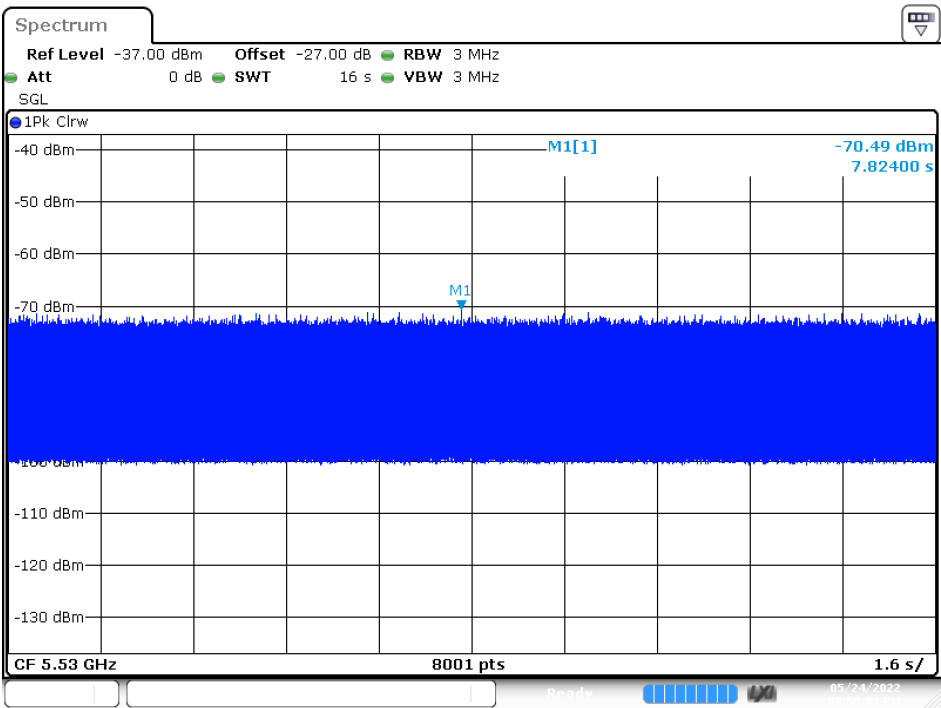

Date: 24.MAY.2022 21:59:03

Channel loading	Requirement loading
19.54%	>17%

2. UNII Detection Bandwidth

2.1. Test Procedure

The EUT was tested according to U-NII test procedure of KDB905462 D02 for compliance to FCC 47CFR 15.407 requirements.

The generating equipment is configured as shown in the radiated Test Setup above. A single *Burst* of the short pulse radar type 0 is produced at 5300MHz and 5510 at a -63dBm level. The EUT is set up as a standalone device (no associated Client and no traffic).

A single radar Burst is generated for a minimum of 10 trials, and the response of the EUT is noted.

The EUT must detect the Radar Waveform 90% or more of the time. The radar frequency is increased in 1 MHz steps, repeating the above test sequence, until the detection rate falls below 90%. The highest frequency at which detection is greater than or equal to 90% is denoted as F_H .

The radar frequency is decreased in 1 MHz steps, repeating the above test sequence, until the detection rate falls below 90%. The lowest frequency at which detection is greater than or equal to 90% is denoted as F_L .

The U-NII Detection Bandwidth is calculated as follows:

$$\text{U-NII Detection Bandwidth} = F_H - F_L$$

The U-NII Detection Bandwidth must be at least 100% of the EUT transmitter 99% power, otherwise, the EUT does not comply with DFS requirements.


2.2. Test Requirement

All UNII 20/40MHz and 80MHz channels for this device have identical Channel bandwidths. All UNII 20/40/80MHz channels for this device also have identical Channel bandwidths. Therefore, all DFS testing was done at 5300MHz 、5500MHz 、5510MHz and 5530MHz. The 99% channel bandwidth for 20MHz signals is 17.43 MHz, and the 99% channel bandwidth for 40MHz signals is 35.96 MHz and 80MHz signals is 75.12MHz.Uncertainty

2.3. Uncertainty


$\pm 1\text{ms}$.

802.11ax-20 BW

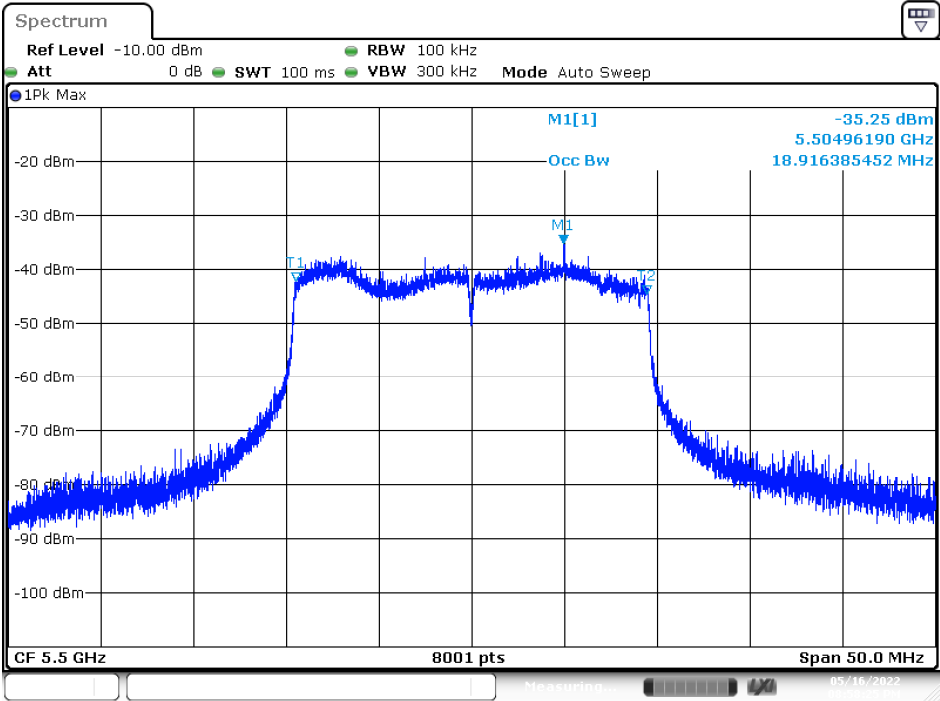

Date: 16.MAY.2022 20:58:25

802.11ax-40 BW

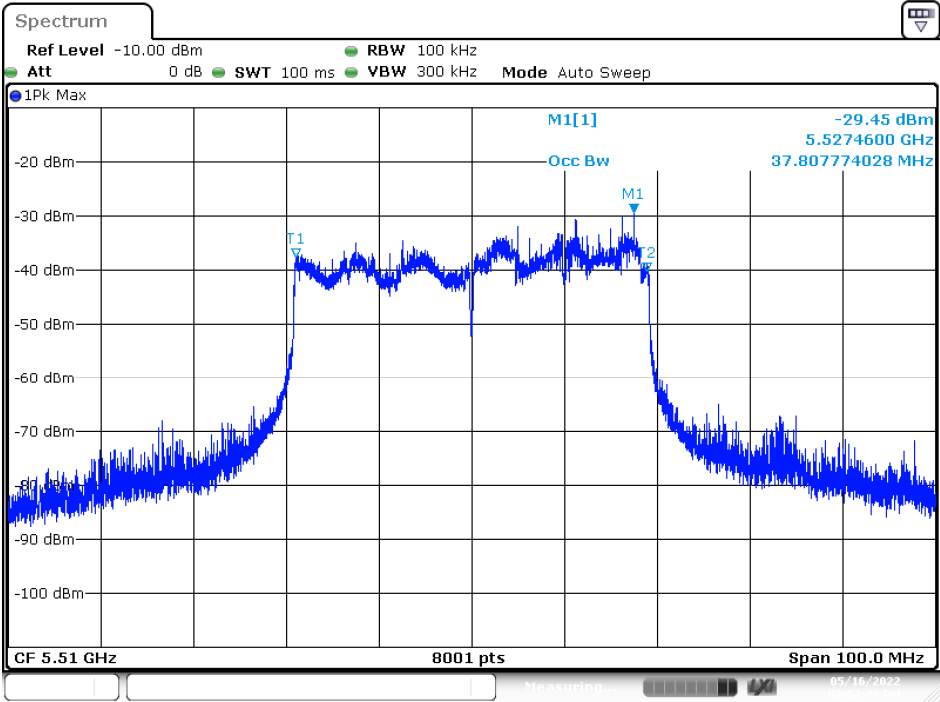

Date: 16.MAY.2022 20:52:50

Spectrum

Ref Level -10.00 dBm RBW 100 kHz
 Att 0 dB SWT 100 ms VBW 300 kHz Mode Auto Sweep

1Pk Max

M1[1] -29.31 dBm
 5.5274750 GHz
 76.765404324 MHz

Occ Bw

M1

CF 5.53 GHz 8001 pts Span 200.0 MHz

Date: 16.MAY.2022 20:46:21

2.4. Test Result of UNII Detection Bandwidth

Product : 11ax Cloud Managed AP
 Test Item : UNII Detection Bandwidth
 Radar Type : Type 0
 Test Date : 2022/05/23
 Test Mode : Mode 1: Transmit (802.11ax-20BW)

Test Channel: 5500MHz (ax-20BW)											
Radar Frequency (MHz)	DFS Detection Trials (1= Detection, 0= No Detection)										Detection Rate (%)
	1	2	3	4	5	6	7	8	9	10	
5490	1	1	1	0	1	1	0	1	1	0	70.00
5491 (FL)	1	1	1	1	1	1	1	1	0	1	90.00
5492	1	1	1	1	1	1	1	1	1	1	100.00
5493	1	1	1	1	1	1	1	1	1	1	100.00
5494	1	1	1	1	1	1	1	1	1	1	100.00
5495	1	1	1	1	1	1	1	1	1	1	100.00
5496	1	1	1	1	1	1	1	1	1	1	100.00
5497	1	1	1	1	1	1	1	1	1	1	100.00
5498	1	1	1	1	1	1	1	1	1	1	100.00
5499	1	1	1	1	1	1	1	1	1	1	100.00
5500	1	1	1	1	1	1	1	1	1	1	100.00
5501	1	1	1	1	1	1	1	1	1	1	100.00
5502	1	1	1	1	1	1	1	1	1	1	100.00
5503	1	1	1	1	1	1	1	1	1	1	100.00
5504	1	1	1	1	1	1	1	1	1	1	100.00
5505	1	1	1	1	1	1	1	1	1	1	100.00
5506	1	1	1	1	1	1	1	1	1	1	100.00
5507	1	1	1	1	1	1	1	1	1	1	100.00
5508	1	1	1	1	1	1	1	1	1	1	100.00
5509	1	1	1	1	1	1	1	1	1	1	100.00
5510 (FH)	1	1	1	1	1	1	1	1	1	1	100.00
Detection Bandwidth = FH - FL = 5510MHz - 5491MHz = 19MHz											
EUT 99% Bandwidth = 18.9164MHz											
UNII Detection Bandwidth Min. Limit = 18.9164MHz X 100% = 18.9164MHz											

Product : 11ax Cloud Managed AP
 Test Item : UNII Detection Bandwidth
 Radar Type : Type 0
 Test Date : 2022/05/23
 Test Mode : Mode 2: Transmit (802.11ax-40BW)

Test Channel: 5510MHz (ax-40BW)											
Radar Frequency (MHz)	DFS Detection Trials (1= Detection, 0= No Detection)										Detection Rate (%)
	1	2	3	4	5	6	7	8	9	10	
5490	1	1	0	1	1	1	1	0	1	1	80.00
5491 (FL)	1	1	1	1	1	1	1	0	1	1	90.00
5492	1	1	1	1	1	1	1	1	1	1	100.00
5493	1	1	1	1	1	1	1	1	1	1	100.00
5494	1	1	1	1	1	1	1	1	1	1	100.00
5495	1	1	1	1	1	1	1	1	1	1	100.00
5496	1	1	1	1	1	1	1	1	1	1	100.00
5497	1	1	1	1	1	1	1	1	1	1	100.00
5498	1	1	1	1	1	1	1	1	1	1	100.00
5499	1	1	1	1	1	1	1	1	1	1	100.00
5500	1	1	1	1	1	1	1	1	1	1	100.00
5501	1	1	1	1	1	1	1	1	1	1	100.00
5502	1	1	1	1	1	1	1	1	1	1	100.00
5503	1	1	1	1	1	1	1	1	1	1	100.00
5504	1	1	1	1	1	1	1	1	1	1	100.00
5505	1	1	1	1	1	1	1	1	1	1	100.00
5506	1	1	1	1	1	1	1	1	1	1	100.00
5507	1	1	1	1	1	1	1	1	1	1	100.00
5508	1	1	1	1	1	1	1	1	1	1	100.00
5509	1	1	1	1	1	1	1	1	1	1	100.00
5510	1	1	1	1	1	1	1	1	1	1	100.00
5511	1	1	1	1	1	1	1	1	1	1	100.00
5512	1	1	1	1	1	1	1	1	1	1	100.00
5513	1	1	1	1	1	1	1	1	1	1	100.00
5514	1	1	1	1	1	1	1	1	1	1	100.00
5515	1	1	1	1	1	1	1	1	1	1	100.00
5516	1	1	1	1	1	1	1	1	1	1	100.00

5517	1	1	1	1	1	1	1	1	1	1	100.00
5518	1	1	1	1	1	1	1	1	1	1	100.00
5519	1	1	1	1	1	1	1	1	1	1	100.00
5520	1	1	1	1	1	1	1	1	1	1	100.00
5521	1	1	1	1	1	1	1	1	1	1	100.00
5522	1	1	1	1	1	1	1	1	1	1	100.00
5523	1	1	1	1	1	1	1	1	1	1	100.00
5524	1	1	1	1	1	1	1	1	1	1	100.00
5525	1	1	1	1	1	1	1	1	1	1	100.00
5526	1	1	1	1	1	1	1	1	1	1	100.00
5527	1	1	1	1	1	1	1	1	1	1	100.00
5528	1	1	1	1	1	1	1	1	1	1	100.00
5529	1	1	1	1	1	1	1	1	1	1	100.00
5530 (FH)	1	1	1	1	0	1	1	0	1	1	80.00
Detection Bandwidth = FH - FL = 5529MHZ - 5491MHZ = 38MHZ											
EUT 99% Bandwidth = 37.8078 MHz											
UNII Detection Bandwidth Min. Limit = 37.8078MHz X 100% = 37.8078MHz											

Product : 11ax Cloud Managed AP
 Test Item : UNII Detection Bandwidth
 Radar Type : Type 0
 Test Date : 2022/05/23
 Test Mode : Mode 3: Transmit (802.11ax-80BW)

Test Channel: 5530MHz (ax-80BW)											
Radar Frequency (MHz)	DFS Detection Trials (1= Detection, 0= No Detection)										Detection Rate (%)
	1	2	3	4	5	6	7	8	9	10	
5490	1	1	0	1	1	0	0	1	0	1	60.00
5491	1	1	0	1	1	1	1	1	1	1	90.00
5492 (FL)	1	1	1	1	1	1	1	1	1	1	100.00
5493	1	1	1	1	1	1	1	1	1	1	100.00
5494	1	1	1	1	1	1	1	1	1	1	100.00
5495	1	1	1	1	1	1	1	1	1	1	100.00
5496	1	1	1	1	1	1	1	1	1	1	100.00
5497	1	1	1	1	1	1	1	1	1	1	100.00
5498	1	1	1	1	1	1	1	1	1	1	100.00
5499	1	1	1	1	1	1	1	1	1	1	100.00
5500	1	1	1	1	1	1	1	1	1	1	100.00
5501	1	1	1	1	1	1	1	1	1	1	100.00
5502	1	1	1	1	1	1	1	1	1	1	100.00
5503	1	1	1	1	1	1	1	1	1	1	100.00
5504	1	1	1	1	1	1	1	1	1	1	100.00
5505	1	1	1	1	1	1	1	1	1	1	100.00
5506	1	1	1	1	1	1	1	1	1	1	100.00
5507	1	1	1	1	1	1	1	1	1	1	100.00
5508	1	1	1	1	1	1	1	1	1	1	100.00
5509	1	1	1	1	1	1	1	1	1	1	100.00
5510	1	1	1	1	1	1	1	1	1	1	100.00
5511	1	1	1	1	1	1	1	1	1	1	100.00
5512	1	1	1	1	1	1	1	1	1	1	100.00
5513	1	1	1	1	1	1	1	1	1	1	100.00
5514	1	1	1	1	1	1	1	1	1	1	100.00
5515	1	1	1	1	1	1	1	1	1	1	100.00
5516	1	1	1	1	1	1	1	1	1	1	100.00

5517	1	1	1	1	1	1	1	1	1	1	100.00
5518	1	1	1	1	1	1	1	1	1	1	100.00
5519	1	1	1	1	1	1	1	1	1	1	100.00
5520	1	1	1	1	1	1	1	1	1	1	100.00
5521	1	1	1	1	1	1	1	1	1	1	100.00
5522	1	1	1	1	1	1	1	1	1	1	100.00
5523	1	1	1	1	1	1	1	1	1	1	100.00
5524	1	1	1	1	1	1	1	1	1	1	100.00
5525	1	1	1	1	1	1	1	1	1	1	100.00
5526	1	1	1	1	1	1	1	1	1	1	100.00
5527	1	1	1	1	1	1	1	1	1	1	100.00
5528	1	1	1	1	1	1	1	1	1	1	100.00
5529	1	1	1	1	1	1	1	1	1	1	100.00
5530	1	1	1	1	1	1	1	1	1	1	100.00
5531	1	1	1	1	1	1	1	1	1	1	100.00
5532	1	1	1	1	1	1	1	1	1	1	100.00
5533	1	1	1	1	1	1	1	1	1	1	100.00
5534	1	1	1	1	1	1	1	1	1	1	100.00
5535	1	1	1	1	1	1	1	1	1	1	100.00
5536	1	1	1	1	1	1	1	1	1	1	100.00
5537	1	1	1	1	1	1	1	1	1	1	100.00
5538	1	1	1	1	1	1	1	1	1	1	100.00
5539	1	1	1	1	1	1	1	1	1	1	100.00
5540	1	1	1	1	1	1	1	1	1	1	100.00
5541	1	1	1	1	1	1	1	1	1	1	100.00
5542	1	1	1	1	1	1	1	1	1	1	100.00
5543	1	1	1	1	1	1	1	1	1	1	100.00
5544	1	1	1	1	1	1	1	1	1	1	100.00
5545	1	1	1	1	1	1	1	1	1	1	100.00
5546	1	1	1	1	1	1	1	1	1	1	100.00
5547	1	1	1	1	1	1	1	1	1	1	100.00
5548	1	1	1	1	1	1	1	1	1	1	100.00
5549	1	1	1	1	1	1	1	1	1	1	100.00
5550	1	1	1	1	1	1	1	1	1	1	100.00
5551	1	1	1	1	1	1	1	1	1	1	100.00
5552	1	1	1	1	1	1	1	1	1	1	100.00
5553	1	1	1	1	1	1	1	1	1	1	100.00

5554	1	1	1	1	1	1	1	1	1	1	100.00
5555	1	1	1	1	1	1	1	1	1	1	100.00
5556	1	1	1	1	1	1	1	1	1	1	100.00
5557	1	1	1	1	1	1	1	1	1	1	100.00
5558	1	1	1	1	1	1	1	1	1	1	100.00
5559	1	1	1	1	1	1	1	1	1	1	100.00
5560	1	1	1	1	1	1	1	1	1	1	100.00
5561	1	1	1	1	1	1	1	1	1	1	100.00
5562	1	1	1	1	1	1	1	1	1	1	100.00
5563	1	1	1	1	1	1	1	1	1	1	100.00
5564	1	1	1	1	1	1	1	1	1	1	100.00
5565	1	1	1	1	1	1	1	1	1	1	100.00
5566	1	1	1	1	1	1	1	1	1	1	100.00
5567	1	1	1	1	1	1	1	1	1	1	100.00
5568	1	1	1	1	1	1	1	1	1	1	100.00
5569	1	1	1	1	1	1	1	1	1	1	100.00
5570 (FH)	1	1	1	0	1	1	0	1	1	1	80.00
Detection Bandwidth = FH - FL = 5569MHZ - 5491MHZ = 78MHZ											
EUT 99% Bandwidth = 76.7654MHz											
UNII Detection Bandwidth Min. Limit = 76.7654MHz X 100% = 76.7654MHz											

3. Initial Channel Availability Check Time

3.1. Test Procedure

The EUT was tested according to U-NII test procedure of KDB905462 D02 for compliance to FCC 47CFR 15.407 requirements.

The U-NII device is powered on and instructed to operate at 5530MHz. At the same time the UUT is powered on, the spectrum analyzer is set to zero span mode with a 3 MHz resolution bandwidth at 5530MHz with a 2.5minute sweep time. The analyzer's sweep will be started the same time power is applied to the U-NII device.

The EUT should not transmit any beacon or data transmissions until at least 1 minute after the completion of the power-on cycle.

The initial power up time of the EUT is indicated by marker1 in the plot, Initial beacons/data transmissions are indicated by marker 1R.

3.2. Test Requirement

The EUT shall perform a channel availability check to ensure that there is no radar operation on the channel, after power-up sequence, receiver at least 1 minute on the intended operation frequency.


3.3. Uncertainty

$\pm 1\text{ms}$.

3.4. Test Result of Initial Channel Availability Check Time

Product : 11ax Cloud Managed AP
Test Item : Initial Channel Availability Check Time
Radar Type : Type 0
Test Mode : Mode 3: Transmit (802.11ax-80BW)

The EUT does not transmit any beacon or data transmission until at least 1 minute after the completion of the power-on cycle (129.27sec). The initial power up time of the EUT is indicated by Marker 1 (189.27 sec) – CAC (60 sec). Initial beacons/data transmission is indicated by Marker 1 (189.27 sec)

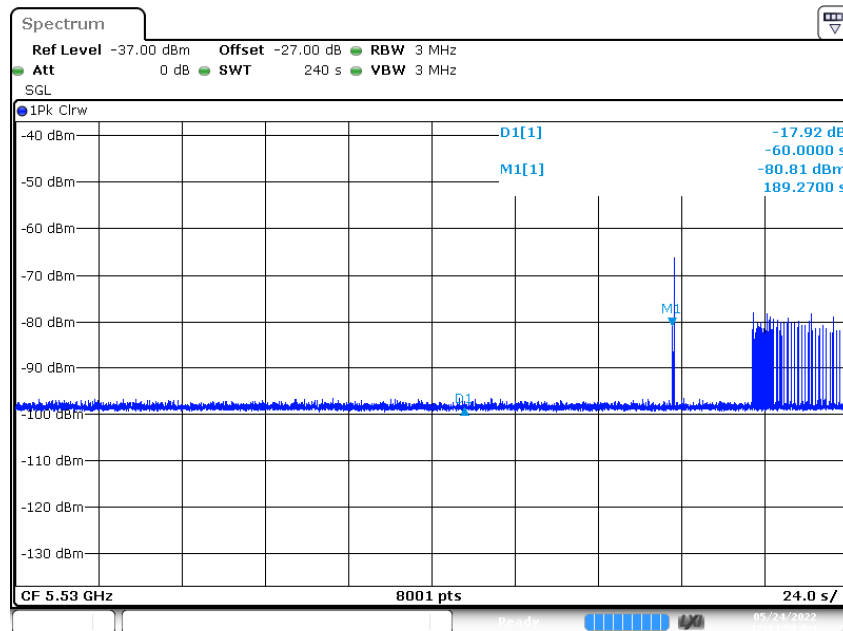

Date: 24.MAY.2022 00:14:50

4. Radar Burst at the Beginning of the Channel Availability Check Time

4.1. Test Procedure

The EUT was tested according to U-NII test procedure of KDB905462 D02 for compliance to FCC 47CFR 15.407 requirements.

The steps below define the procedure to verify successful radar detection on the selected Channel during a period equal to the Channel Availability Check Time and avoidance of operation on that Channel when a radar Burst with a level equal to the DFS Detection Threshold + 1 dB (-62dBm) occurs at the beginning of the Channel Availability Check Time.

The EUT is powered on at T0. T1 denotes the instant when the EUT has completed its power-up sequence. The Channel Availability Check Time commences at instant T1 and will end no sooner than T1 + 60 seconds.

A single Burst of short pulse of radar type 1 at -63dBm will commence within a 6 second window starting at T1.

Visual indication on the EUT of successful detection of the radar Burst will be recorded and reported. Observation of emissions at 5530MHz will continue for 2.5 minutes after the radar Burst, Verify that during the 2.5 minute measurement window no EUT transmissions occurred at 5530MHz.

4.2. Test Requirement


In beginning of the Channel Availability Check (CAC) Time, radar is detected on this channel, select another intended channel and perform a CAC that channel.

4.3. Uncertainty

$\pm 1\text{ms}$.

4.4. Test Result of Radar Burst at the Beginning of the Channel Availability Check Time

Product : 11ax Cloud Managed AP
 Test Item : Radar Burst at the Beginning of the Channel Availability Check Time
 Radar Type : Type 0
 Test Mode : Mode 3: Transmit (802.11ax-80BW)

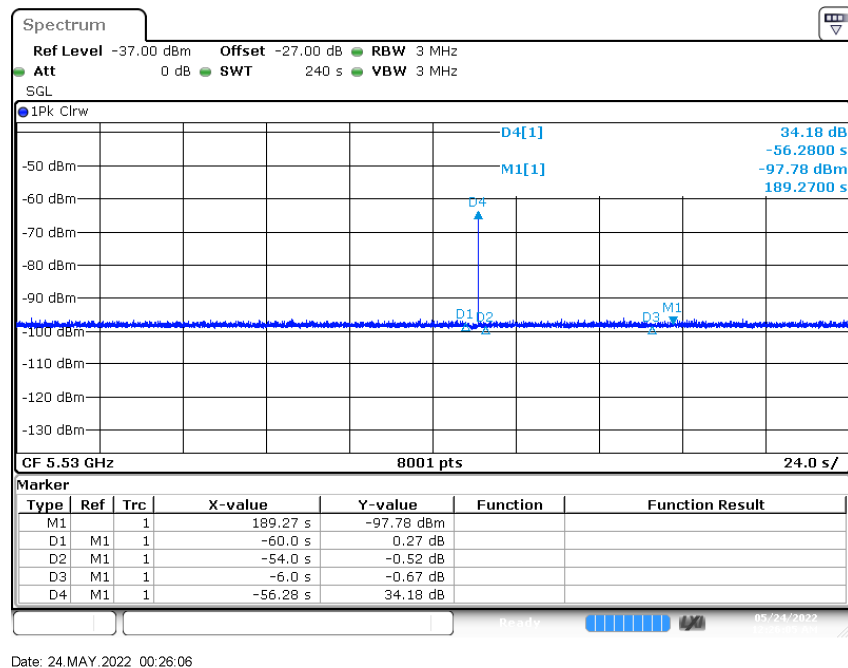

Date: 24.MAY.2022 00:26:06

5. Radar Burst at the End of the Channel Availability Check Time

5.1. Test Procedure

The EUT was tested according to U-NII test procedure of KDB905462 D02 for compliance to FCC 47CFR 15.407 requirements.

The steps below define the procedure to verify successful radar detection on the selected Channel during a period equal to the Channel Availability Check Time and avoidance of operation on that Channel when a radar Burst with a level equal to the DFS Detection Threshold + 1 dB (-62dBm) occurs at the end of the Channel Availability Check Time.

The UUT is powered on at T_0 . T_1 denotes the instant when the UUT has completed its power-up sequence. The Channel Availability Check Time commences at instant T_1 and will end no sooner than $T_1 + 60$ seconds. A single Burst of short pulse of radar type 1 at -61 dBm will commence within a 6 second window starting at $T_1 + 54$ seconds.

Visual indication on the UUT of successful detection of the radar Burst will be recorded and reported. Observation of emissions at 5530MHz will continue for 2.5 minutes after the radar Burst has been generated.

Verify that during the 2.5 minute measurement window no UUT transmissions occurred at 5530Hz.

5.2. Test Requirement


In the end of Channel Availability Check (CAC) Time, radar is detected on this channel, select another intended channel and perform a CAC that channel.

5.3. Uncertainty

$\pm 1\text{ms}$.

5.4. Test Result of Radar Burst at the End of the Channel Availability Check Time

Product : 11ax Cloud Managed AP
 Test Item : Radar Burst at the End of the Channel Availability Check Time
 Radar Type : Type 0
 Test Mode : Mode 3: Transmit (802.11ax-80BW)

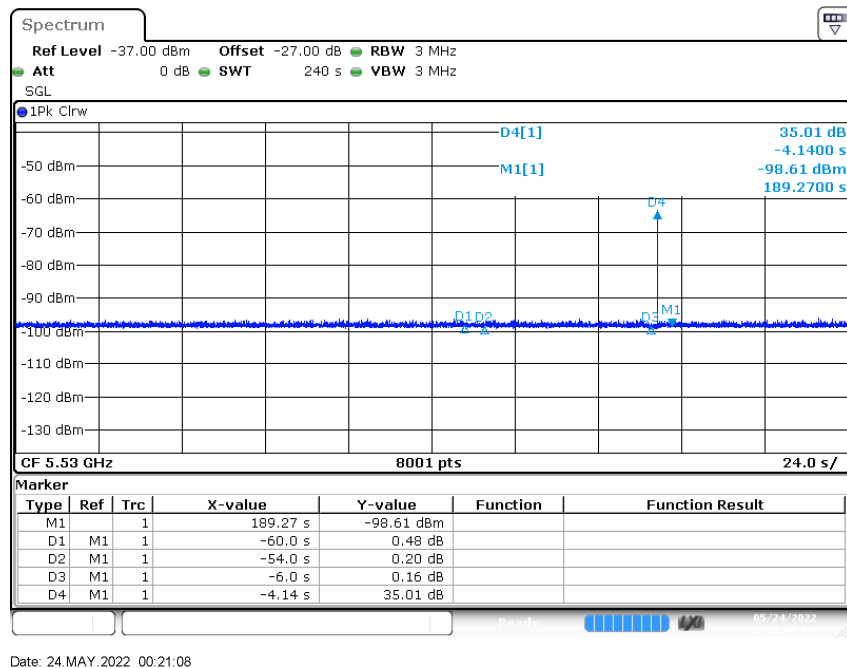

Date: 24.MAY.2022 00:21:08

6. In-Service Monitoring for Channel Move Time and Channel Closing Transmission Time and Non-Occupancy Period

6.1. Test Procedure

The EUT was tested according to U-NII test procedure of KDB905462 D02 for compliance to FCC 47CFR 15.407 requirements.

These tests define how the following DFS parameters are verified during In-Service Monitoring;

Channel Closing Transmission Time, Channel Move Time, and Non-Occupancy Period.. The steps below define the procedure to determine the above mentioned parameters when a radar Burst with a level equal to the DFS Detection Threshold + 1dB (-63dBm) is generated on the Operating Channel of the U-NII device.

A U-NII device operating as a Client Device will associate with the UUT (Master) at 5530MHz..

Stream the MPEG test file from the Master Device to the Client Device on the selected Channel for the entire period of the test.

At time T0 the Radar Waveform generator sends a Burst of pulses for each of the radar types at -61dBm.

Observe the transmissions of the UUT at the end of the radar Burst on the Operating Channel for duration greater than 10 seconds. Measure and record the transmissions from the UUT during the observation time (Channel Move Time). Compare the Channel Move Time and Channel Closing

Transmission Time results to the limits defined in the DFS Response requirement values table.

Measure the UUT for more than 30 minutes following the channel close/move time to verify that the UUT does not resume any transmissions on this Channel.

6.2. Test Requirement

Parameter	Value
Channel Move Time	10 Seconds
Channel Closing Transmission Time	200 milliseconds + approx. 60 milliseconds over remaining 10 seconds period
Non-Occupancy Period	Minimum 30 minutes


6.3. Uncertainty

± 1ms.

6.4. Test Result of Channel Move Time and Channel Closing Transmission Time and Non-Occupancy Period

Product : 11ax Cloud Managed AP
 Test Item : Channel Move Time and Channel Closing Transmission Time
 Radar Type : Type 0
 Test Mode : Mode 3: Transmit (802.11ax-80BW)

Channel Closing Transmission Time and Channel Move Time for Radar Test Type 0 at 5530 MHz

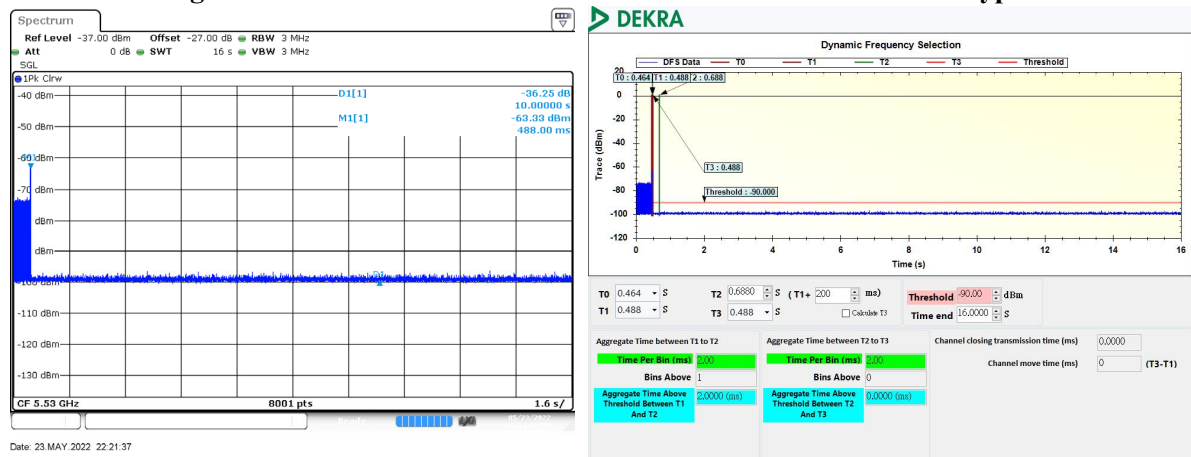


Note:

1. The results showed that after radar signal injected the channel transmission closing time less than 200 milliseconds and an aggregate of no more than 60 milliseconds.
2. The results showed that after radar signal injected the channel move time was less than 10 seconds.

Product : 11ax Cloud Managed AP
 Test Item : Non-Occupancy Period
 Radar Type : Type 0
 Test Mode : Mode 3: Transmit (802.11ax-80BW)

Non-Occupancy Period at 5530 MHz

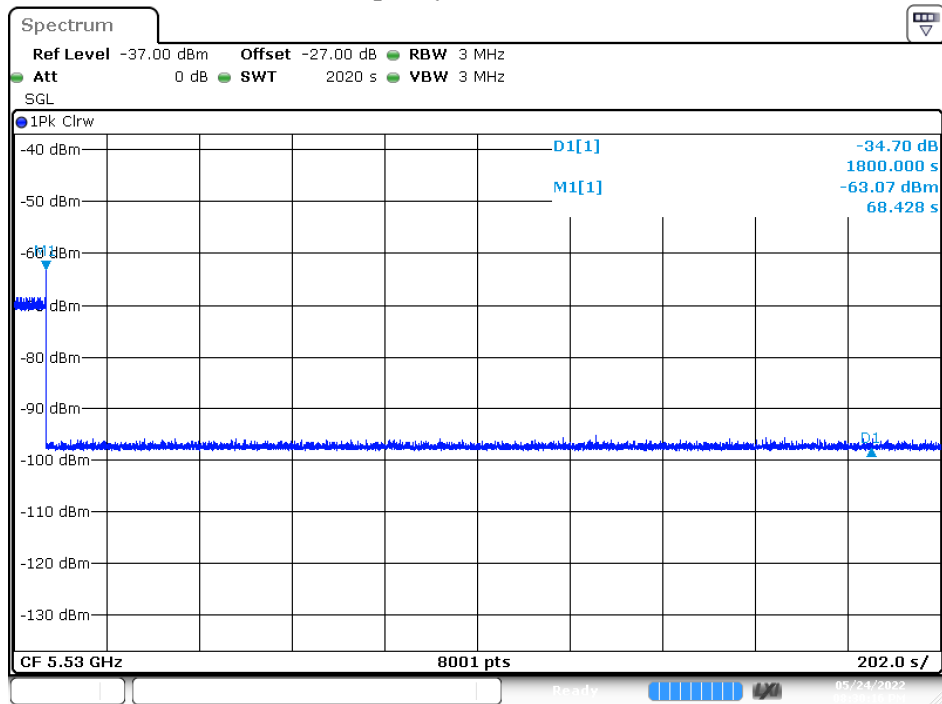

Date: 24.MAY.2022 20:30:16

Test Item	Test Result (Minutes)	Limit (Minutes)
Non-Occupancy Period	>30	>30

*No EUT transmissions were observed on the test channel during 30 minutes observation time.

7. Statistical Performance Check

7.1. Test Procedure

The EUT was tested according to U-NII test procedure of KDB905462 D02 for compliance to FCC 47CFR 15.407 requirements.

The steps below define the procedure to determine the minimum percentage of detection when a radar burst with a level equal to the DFS Detection Threshold + 1dB (-63dBm) is generated on the Operating Channel of the U-NII device.

A U-NII device operating as a Client Device will associate with the UUT (Master) at 5500MHz, 5510MHz and 5530MHz.

Stream the MPEG test file from the Master Device to the Client Device on the selected Channel for the entire period of the test.

The Radar Waveform generator sends the individual waveform for each of the radar types 1-6 at -62dbm. Statistical data will be gathered to determine the ability of the device to detect the radar test waveforms. The device can utilize a test mode to demonstrate when detection occurs to prevent the need to reset the device between trial runs.

7.2. Test Requirement

The minimum percentage of successful detections, and the minimum number of trials that must be used for determining DFS conformance. Step intervals of 0.1 microsecond for Pulse Width, 1 microsecond for PRI, 1 MHz for chirp width and 1 for the number of pulses will be utilized for the random determination of specific test waveforms.

Minimum percentage of successful detections

Radar Type	Minimum Percentage of Successful Detection	Minimum Number of Trials
1	60%	30
2	60%	30
3	60%	30
4	60%	30
Aggregate (Radar Types 1-4)	80%	120
5	80%	30
6	70%	30

The percentage of successful detection is calculated by:

$$\frac{\text{TotalWaveformDetections}}{\text{TotalWaveformTrials}} \times 100 = \text{Probability of Detection Radar Waveform}$$

In addition an aggregate minimum percentage of successful detection across all Short Pulse Radar Types 1-4 is required and is calculated as follows:

$$\frac{P_d 1 + P_d 2 + P_d 3 + P_d 4}{4}$$

7.3. Uncertainty

± 1ms.

7.4. Test Result of Statistical Performance Check

Product : 11ax Cloud Managed AP
 Test Item : Statistical Performance Check
 Radar Type : Type 1
 Test Date : 2022/05/23
 Test Mode : Mode 1: Transmit (802.11ax-20BW)

Trial #	Frequency (MHz)	Pulses/Burs	Pulse Width (us)	PRI (us)	1= Detection 0= No Detection
1	5500	56	1	953	1
2	5500	84	1	633	1
3	5500	73	1	730	1
4	5500	27	1	1972	1
5	5500	79	1	671	1
6	5500	23	1	2316	1
7	5500	80	1	665	1
8	5500	27	1	1979	0
9	5500	46	1	1166	1
10	5500	69	1	764	1
11	5500	44	1	1224	1
12	5500	19	1	2878	1
13	5500	33	1	1641	1
14	5500	19	1	2875	1
15	5500	35	1	1527	1
16	5500	20	1	2661	1
17	5500	21	1	2568	1
18	5500	20	1	2670	0
19	5500	22	1	2437	1
20	5500	29	1	1832	1
21	5500	19	1	2841	1
22	5500	38	1	1418	1
23	5500	73	1	723	1
24	5500	32	1	1682	1
25	5500	34	1	1553	1
26	5500	85	1	624	1
27	5500	20	1	2738	1
28	5500	32	1	1683	1
29	5500	63	1	844	1
30	5500	94	1	562	1
Detection Percentage(%)					93.33%

Product : 11ax Cloud Managed AP
 Test Item : Statistical Performance Check
 Radar Type : Type 1
 Test Date : 2022/05/23
 Test Mode : Mode 2: Transmit (802.11ax-40BW)

Trial #	Frequency (MHz)	Pulses/Burs	Pulse Width (us)	PRI (us)	1= Detection 0= No Detection
1	5510	25	1	2184	1
2	5510	59	1	901	1
3	5510	20	1	2678	1
4	5510	63	1	849	1
5	5510	56	1	944	1
6	5510	36	1	1504	1
7	5510	69	1	772	1
8	5510	49	1	1084	1
9	5510	18	1	2987	0
10	5510	44	1	1211	1
11	5510	85	1	621	1
12	5510	27	1	1980	1
13	5510	19	1	2806	0
14	5510	18	1	3018	1
15	5510	66	1	800	1
16	5510	57	1	937	1
17	5510	38	1	1392	1
18	5510	30	1	1785	1
19	5510	61	1	868	1
20	5510	23	1	2355	1
21	5510	19	1	2835	1
22	5510	84	1	634	1
23	5510	48	1	1108	1
24	5510	60	1	891	0
25	5510	32	1	1666	1
26	5510	23	1	2329	1
27	5510	20	1	2647	1
28	5510	61	1	874	1
29	5510	19	1	2918	1
30	5510	25	1	2146	1
Detection Percentage(%)					90.00%

Product : 11ax Cloud Managed AP
 Test Item : Statistical Performance Check
 Radar Type : Type 1
 Test Date : 2022/05/23
 Test Mode : Mode 3: Transmit (802.11ax-80BW)

Trial #	Frequency (MHz)	Pulses/Burs	Pulse Width (us)	PRI (us)	1= Detection 0= No Detection
1	5530	66	1	801	0
2	5530	21	1	2527	1
3	5530	24	1	2244	1
4	5530	20	1	2705	1
5	5530	33	1	1627	1
6	5530	18	1	2954	1
7	5530	33	1	1623	1
8	5530	18	1	3061	1
9	5530	18	1	2973	1
10	5530	72	1	741	1
11	5530	57	1	926	1
12	5530	41	1	1300	1
13	5530	67	1	788	1
14	5530	22	1	2426	1
15	5530	19	1	2912	1
16	5530	101	1	525	1
17	5530	18	1	3038	1
18	5530	34	1	1569	1
19	5530	31	1	1716	1
20	5530	38	1	1410	1
21	5530	28	1	1898	1
22	5530	41	1	1314	1
23	5530	19	1	2794	1
24	5530	35	1	1511	1
25	5530	33	1	1638	1
26	5530	30	1	1815	1
27	5530	23	1	2321	0
28	5530	35	1	1515	1
29	5530	37	1	1431	1
30	5530	21	1	2515	1
Detection Percentage(%)					93.33%

Product : 11ax Cloud Managed AP
 Test Item : Statistical Performance Check
 Radar Type : Type 2
 Test Date : 2022/05/23
 Test Mode : Mode 1: Transmit (802.11ax-20BW)

Trial #	Frequency (MHz)	Pulses/Burs	Pulse Width (us)	PRI (us)	1= Detection 0= No Detection
1	5500	28	2.30	215	1
2	5500	27	3.10	194	1
3	5500	24	2.70	158	1
4	5500	24	4.70	166	1
5	5500	27	4.50	168	1
6	5500	25	4.50	202	1
7	5500	26	1.00	183	0
8	5500	24	3.30	152	1
9	5500	27	3.10	196	1
10	5500	24	2.90	200	1
11	5500	24	3.80	185	1
12	5500	23	4.50	175	1
13	5500	26	4.70	229	0
14	5500	23	3.80	180	1
15	5500	23	4.10	220	1
16	5500	27	3.30	177	1
17	5500	26	4.20	167	1
18	5500	28	1.40	220	0
19	5500	24	1.60	174	1
20	5500	27	4.90	185	1
21	5500	24	2.90	215	1
22	5500	29	2.50	197	0
23	5500	27	4.00	181	1
24	5500	25	2.00	229	1
25	5500	29	2.10	150	1
26	5500	27	4.00	173	1
27	5500	24	3.30	193	1
28	5500	27	1.60	201	0
29	5500	25	1.40	190	1
30	5500	27	3.80	214	1
Detection Percentage(%)					83.33 %

Product : 11ax Cloud Managed AP
 Test Item : Statistical Performance Check
 Radar Type : Type 2
 Test Date : 2022/05/23
 Test Mode : Mode 2: Transmit (802.11ax-40BW)

Trial #	Frequency (MHz)	Pulses/Burs	Pulse Width (us)	PRI (us)	1= Detection 0= No Detection
1	5510	26	2.6	159	1
2	5510	28	4.2	186	1
3	5510	25	2.4	222	1
4	5510	24	1.4	211	0
5	5510	24	4.5	153	1
6	5510	28	4.1	214	1
7	5510	29	3.8	159	0
8	5510	26	1.8	205	1
9	5510	29	1.2	221	1
10	5510	26	2.8	198	1
11	5510	28	3.2	208	1
12	5510	26	2.8	166	1
13	5510	23	4.5	192	1
14	5510	25	3.5	211	1
15	5510	27	1.8	169	1
16	5510	27	4.7	172	0
17	5510	28	1.4	195	1
18	5510	26	2.4	229	1
19	5510	26	4.4	150	1
20	5510	23	4.8	187	1
21	5510	28	3.6	181	1
22	5510	26	3	219	1
23	5510	29	1.9	150	0
24	5510	26	3.4	154	1
25	5510	24	4.7	201	1
26	5510	24	4.8	168	1
27	5510	26	3.1	158	1
28	5510	28	1.2	164	1
29	5510	24	1.8	199	1
30	5510	24	3.4	192	1
Detection Percentage(%)					86.67%

Product : 11ax Cloud Managed AP
 Test Item : Statistical Performance Check
 Radar Type : Type 2
 Test Date : 2022/05/23
 Test Mode : Mode 3: Transmit (802.11ax-80BW)

Trial #	Frequency (MHz)	Pulses/Burs	Pulse Width (us)	PRI (us)	1= Detection 0= No Detection
1	5530	26	1.5	172	1
2	5530	28	4.5	170	1
3	5530	24	4.6	181	1
4	5530	24	3.3	219	0
5	5530	28	2.4	185	1
6	5530	27	2.7	210	1
7	5530	27	4.4	223	0
8	5530	28	4.3	169	1
9	5530	26	3.5	150	1
10	5530	29	4	198	1
11	5530	24	3.4	179	1
12	5530	28	3.4	161	1
13	5530	24	2.1	176	0
14	5530	25	2.7	179	1
15	5530	25	2	162	1
16	5530	27	3.6	226	1
17	5530	27	1.2	215	1
18	5530	25	4.3	186	0
19	5530	26	2.6	190	1
20	5530	28	4.1	175	1
21	5530	25	2.5	192	1
22	5530	29	3.1	155	1
23	5530	23	3	180	1
24	5530	27	4.2	217	0
25	5530	29	3.2	167	1
26	5530	24	2.9	167	1
27	5530	24	1.1	216	1
28	5530	23	3.3	227	1
29	5530	29	4.3	169	1
30	5530	23	1.6	218	1
Detection Percentage(%)					83.33 %

Product : 11ax Cloud Managed AP
 Test Item : Statistical Performance Check
 Radar Type : Type 3
 Test Date : 2022/05/23
 Test Mode : Mode 1: Transmit (802.11ax-20BW)

Trial #	Frequency (MHz)	Pulses/Burs	Pulse Width (us)	PRI (us)	1= Detection 0= No Detection
1	5500	17	6.60	316	1
2	5500	18	9.30	473	1
3	5500	17	7.40	323	1
4	5500	17	7.30	340	1
5	5500	16	9.40	249	0
6	5500	18	6.90	390	1
7	5500	17	8.50	324	1
8	5500	18	7.80	490	1
9	5500	18	7.70	218	1
10	5500	18	9.30	249	0
11	5500	17	7.40	450	1
12	5500	18	9.80	229	1
13	5500	17	7.60	231	0
14	5500	17	7.30	370	1
15	5500	17	6.60	433	1
16	5500	16	8.10	315	1
17	5500	17	7.70	267	1
18	5500	18	8.30	446	0
19	5500	17	9.70	416	1
20	5500	17	8.60	256	1
21	5500	17	9.70	332	0
22	5500	16	7.40	313	1
23	5500	17	9.30	490	0
24	5500	17	8.40	319	1
25	5500	18	7.80	297	0
26	5500	18	6.90	417	1
27	5500	17	8.10	460	0
28	5500	17	7.10	478	1
29	5500	17	9.30	281	1
30	5500	17	7.00	376	1
Detection Percentage(%)					73.33%

Product : 11ax Cloud Managed AP
 Test Item : Statistical Performance Check
 Radar Type : Type 3
 Test Date : 2022/05/23
 Test Mode : Mode 2: Transmit (802.11ax-40BW)

Trial #	Frequency (MHz)	Pulses/Burs	Pulse Width (us)	PRI (us)	1= Detection 0= No Detection
1	5510	18	8.9	434	1
2	5510	16	8.6	377	1
3	5510	16	6.9	299	1
4	5510	18	6.8	307	1
5	5510	17	9.6	294	0
6	5510	17	6.4	478	1
7	5510	16	6.6	435	1
8	5510	17	8.9	213	1
9	5510	17	8.7	337	1
10	5510	17	6.4	471	1
11	5510	16	9.8	459	1
12	5510	16	9.6	252	0
13	5510	17	6.3	431	1
14	5510	16	7.8	437	1
15	5510	17	7.8	207	1
16	5510	17	7.5	239	1
17	5510	17	9.5	472	0
18	5510	17	7	335	1
19	5510	17	8.6	462	1
20	5510	18	6.8	456	1
21	5510	17	7.8	376	0
22	5510	16	9.4	493	1
23	5510	16	9.4	438	1
24	5510	17	6.9	238	0
25	5510	18	9.3	492	1
26	5510	17	8.3	412	1
27	5510	18	6	479	0
28	5510	17	7.6	406	1
29	5510	17	9.8	391	1
30	5510	17	9.2	490	1
Detection Percentage(%)					80.00%

Product : 11ax Cloud Managed AP
 Test Item : Statistical Performance Check
 Radar Type : Type 3
 Test Date : 2022/05/23
 Test Mode : Mode 3: Transmit (802.11ax-80BW)

Trial #	Frequency (MHz)	Pulses/Burs	Pulse Width (us)	PRI (us)	1= Detection 0= No Detection
1	5530	17	6.8	252	0
2	5530	17	8.3	224	1
3	5530	16	6.6	382	1
4	5530	18	8.8	311	1
5	5530	16	9.2	362	0
6	5530	17	9.7	218	1
7	5530	16	8.6	383	1
8	5530	17	9.5	238	1
9	5530	17	7.3	263	1
10	5530	18	8.5	256	0
11	5530	17	9.8	218	1
12	5530	16	7.6	350	1
13	5530	16	7.3	215	1
14	5530	17	6.2	223	1
15	5530	17	8.6	389	1
16	5530	16	9.2	439	0
17	5530	18	9.4	206	1
18	5530	17	8	495	1
19	5530	17	6.6	451	1
20	5530	17	6.5	231	0
21	5530	17	9.7	489	1
22	5530	17	9.1	400	0
23	5530	18	7.1	398	1
24	5530	17	8.7	448	1
25	5530	18	8.8	250	1
26	5530	17	6.9	218	1
27	5530	17	9.4	400	0
28	5530	18	7.3	451	1
29	5530	16	8.9	460	1
30	5530	18	9.6	449	1
Detection Percentage(%)					76.67%

Product : 11ax Cloud Managed AP
 Test Item : Statistical Performance Check
 Radar Type : Type 4
 Test Date : 2022/05/23
 Test Mode : Mode 1: Transmit (802.11ax-20BW)

Trial #	Frequency (MHz)	Pulses/Burs	Pulse Width (us)	PRI (us)	1= Detection 0= No Detection
1	5500	15	16.20	236	0
2	5500	15	18.70	327	1
3	5500	15	18.20	296	1
4	5500	14	18.80	236	1
5	5500	13	12.90	455	1
6	5500	16	12.50	241	1
7	5500	16	15.90	327	1
8	5500	15	17.20	293	1
9	5500	13	15.90	361	1
10	5500	16	11.10	459	1
11	5500	13	14.50	363	0
12	5500	15	13.50	472	1
13	5500	13	15.60	238	0
14	5500	12	11.30	394	0
15	5500	15	14.40	426	1
16	5500	12	11.60	465	1
17	5500	12	13.40	426	0
18	5500	12	19.60	285	1
19	5500	13	18.20	236	1
20	5500	15	15.00	473	1
21	5500	13	13.00	227	0
22	5500	13	14.40	425	1
23	5500	14	19.00	392	1
24	5500	15	15.40	382	1
25	5500	16	15.60	391	1
26	5500	14	13.90	371	1
27	5500	15	15.50	486	1
28	5500	16	19.70	235	0
29	5500	15	13.90	251	1
30	5500	14	11.00	247	1
Detection Percentage(%)					76.67%

Product : 11ax Cloud Managed AP
 Test Item : Statistical Performance Check
 Radar Type : Type 4
 Test Date : 2022/05/23
 Test Mode : Mode 2: Transmit (802.11ax-40BW)

Trial #	Frequency (MHz)	Pulses/Burs	Pulse Width (us)	PRI (us)	1= Detection 0= No Detection
1	5510	13	18.4	253	0
2	5510	14	12.3	358	0
3	5510	13	12.7	437	1
4	5510	13	12.4	320	1
5	5510	13	15.6	464	1
6	5510	15	19.7	313	1
7	5510	13	13.6	383	1
8	5510	13	13.4	370	0
9	5510	14	19.7	288	1
10	5510	15	11.7	458	1
11	5510	15	18.1	222	1
12	5510	13	19.9	204	0
13	5510	15	16.4	352	1
14	5510	15	15	419	1
15	5510	12	12.4	301	0
16	5510	14	12.1	204	1
17	5510	13	14.4	276	1
18	5510	12	13.6	499	1
19	5510	13	15.7	221	0
20	5510	14	14.5	423	1
21	5510	14	18	204	1
22	5510	14	11	266	1
23	5510	15	15.3	425	1
24	5510	13	15.1	327	0
25	5510	13	11.8	214	1
26	5510	16	18.3	307	1
27	5510	16	18.8	424	1
28	5510	14	19.2	427	1
29	5510	13	13.2	265	0
30	5510	14	16.9	351	1
Detection Percentage (%)					73.33%

Product : 11ax Cloud Managed AP
 Test Item : Statistical Performance Check
 Radar Type : Type 4
 Test Date : 2022/05/23
 Test Mode : Mode 3: Transmit (802.11ax-80BW)

Trial #	Frequency (MHz)	Pulses/Burs	Pulse Width (us)	PRI (us)	1= Detection 0= No Detection
1	5530	14	18.3	327	1
2	5530	13	19.6	414	1
3	5530	14	14.5	443	1
4	5530	15	13.3	242	0
5	5530	12	16.8	453	1
6	5530	15	11.6	232	1
7	5530	13	12.4	256	0
8	5530	15	18.2	326	1
9	5530	12	16.4	330	1
10	5530	16	14.8	435	1
11	5530	15	14.7	437	0
12	5530	14	13.8	327	1
13	5530	15	14.1	206	1
14	5530	14	12.2	263	1
15	5530	14	13.2	432	0
16	5530	15	15.3	361	1
17	5530	15	14.5	465	0
18	5530	13	14	407	1
19	5530	14	14.5	374	1
20	5530	13	17.9	298	0
21	5530	13	19.3	235	1
22	5530	13	12.8	395	1
23	5530	14	14.7	225	1
24	5530	14	16.9	408	0
25	5530	13	16.2	404	1
26	5530	15	14.5	350	1
27	5530	13	13.3	206	0
28	5530	16	12	449	1
29	5530	13	16.2	247	0
30	5530	15	12.7	467	1
Detection Percentage (%)					70.00%

Product : 11ax Cloud Managed AP
 Test Item : Statistical Performance Check
 Radar Type : Type 5
 Test Date : 2022/05/23
 Test Mode : Mode 1: Transmit (802.11ax-20BW)

Center Freq: 5500MHz			Low Edge: 5491MHz		High Edge: 5510MHz	
Trial #	Chirp	Offset	VSG Frequency (MHz)	*Filename	1= Detection 0= No Detection	
1	13		5500	Statistical_Check_RandParm_For_Radar_Type_5_1_trail	1	
2	17		5500	Statistical_Check_RandParm_For_Radar_Type_5_2_trail	1	
3	9		5500	Statistical_Check_RandParm_For_Radar_Type_5_3_trail	1	
4	17		5500	Statistical_Check_RandParm_For_Radar_Type_5_4_trail	1	
5	12		5500	Statistical_Check_RandParm_For_Radar_Type_5_5_trail	1	
6	9		5500	Statistical_Check_RandParm_For_Radar_Type_5_6_trail	1	
7	9		5500	Statistical_Check_RandParm_For_Radar_Type_5_7_trail	1	
8	12		5500	Statistical_Check_RandParm_For_Radar_Type_5_8_trail	1	
9	17		5500	Statistical_Check_RandParm_For_Radar_Type_5_9_trail	1	
10	10		5500	Statistical_Check_RandParm_For_Radar_Type_5_10_trail	1	
11	9		5494.6	Statistical_Check_RandParm_For_Radar_Type_5_11_trail	1	
12	18	7.2	5498.2	Statistical_Check_RandParm_For_Radar_Type_5_12_trail	0	
13	13	5.2	5496.2	Statistical_Check_RandParm_For_Radar_Type_5_13_trail	0	
14	9	3.6	5494.6	Statistical_Check_RandParm_For_Radar_Type_5_14_trail	1	
15	14	5.6	5496.6	Statistical_Check_RandParm_For_Radar_Type_5_15_trail	0	
16	11	4.4	5495.4	Statistical_Check_RandParm_For_Radar_Type_5_16_trail	0	
17	15	6	5497	Statistical_Check_RandParm_For_Radar_Type_5_17_trail	0	
18	7	2.8	5493.8	Statistical_Check_RandParm_For_Radar_Type_5_18_trail	1	
19	10	4	5495	Statistical_Check_RandParm_For_Radar_Type_5_19_trail	1	
20	5	2	5493	Statistical_Check_RandParm_For_Radar_Type_5_20_trail	1	
21	7	2.8	5507.2	Statistical_Check_RandParm_For_Radar_Type_5_21_trail	1	
22	10	4	5506	Statistical_Check_RandParm_For_Radar_Type_5_22_trail	1	
23	12	4.8	5505.2	Statistical_Check_RandParm_For_Radar_Type_5_23_trail	1	
24	19	7.6	5502.4	Statistical_Check_RandParm_For_Radar_Type_5_24_trail	1	
25	12	4.8	5505.2	Statistical_Check_RandParm_For_Radar_Type_5_25_trail	1	
26	11	4.4	5505.6	Statistical_Check_RandParm_For_Radar_Type_5_26_trail	1	
27	16	6.4	5503.6	Statistical_Check_RandParm_For_Radar_Type_5_27_trail	1	
28	12	4.8	5505.2	Statistical_Check_RandParm_For_Radar_Type_5_28_trail	1	
29	18	7.2	5502.8	Statistical_Check_RandParm_For_Radar_Type_5_29_trail	1	
30	9	3.6	5506.4	Statistical_Check_RandParm_For_Radar_Type_5_30_trail	1	
Detection Percentage (%)					83.33	
Limit					≥ 80	

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 1

Bursts in Trial: 13

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	79.9	13			886.045
2	3	59.4	13	1727	1102	375.083
3	3	51.7	13	1915	1164	423.846
4	2	52	13	1545		597.389
5	3	81.4	13	1982	1679	708.202
6	1	71.6	13			850.785
7	2	99.7	13	1167		858.238
8	2	86.8	13	1282		839.162
9	2	53.2	13	1257		259.975
10	2	63.9	13	1023		515.488
11	2	73.9	13	1379		643.521
12	2	86.7	13	1140		25.454
13	3	87.1	13	1503	1090	428.777

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 2

Bursts in Trial: 14

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	68.3	17			711.473
2	2	88.6	17	1145		151.127
3	2	91.3	17	1370		563.174
4	1	95.1	17			30.161
5	2	93.3	17	1875		200.999
6	1	83.9	17			242.836
7	3	71.1	17	1321	1731	170.223
8	2	65.2	17	1351		186.3
9	2	93.7	17	1031		536.927
10	1	60.3	17			732.474
11	2	52	17	1730		645.861
12	2	63.3	17	1819		285.179
13	1	84.6	17			330.286
14	2	86.5	17	1607		654.643

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 3

Bursts in Trial: 16

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	86.4	9	1115	1803	61.289
2	2	55.1	9	1538		348.33
3	2	73.3	9	1258		514.1
4	2	69.2	9	1583		690.8
5	1	99.1	9			715.05
6	1	93.3	9			20.47
7	2	90.8	9	1990		230.05
8	2	77	9	1751		555.39
9	2	79.6	9	1179		150.2
10	2	94.2	9	1933		207.06
11	1	68.1	9			485.14
12	1	56.6	9			72.47
13	3	55.3	9	1595	1858	566.27
14	2	77.4	9	1333		211.7
15	3	73.8	9	1009	1407	89.7
16	2	59.5	9	1720		733.2

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 4

Bursts in Trial: 13

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	77.2	17	1240		132.884
2	2	99.2	17	1985		48.576
3	2	80.2	17	1138		352.296
4	2	97.8	17	1682		855.949
5	3	95.8	17	1627	1847	46.482
6	1	73.1	17			515.285
7	1	54.7	17			564.198
8	3	81.5	17	1575	1762	789.912
9	2	67.4	17	1314		142.765
10	3	54.1	17	1482	1219	595.078
11	2	81.1	17	1305		322.841
12	2	81.5	17	1941		770.854
13	3	56.9	17	1793	1486	532.577

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 5

Bursts in Trial: 13

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	82.2	12	1089		368.712
2	2	61.5	12	1021		826.303
3	2	89.9	12	1484		314.516
4	2	64.2	12	1008		883.299
5	2	73.6	12	1295		307.612
6	1	97.8	12			700.885
7	3	74.3	12	1400	1795	876.908
8	3	62	12	1213	1999	563.962
9	2	88	12	1151		108.185
10	1	89	12			626.588
11	2	69.2	12	1857		774.531
12	2	69	12	1897		379.054
13	2	64.4	12	1758		901.177

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 6

Bursts in Trial: 18

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	66.6	9	1979	1764	559.003
2	3	62.8	9	1364	1515	185.512
3	2	98.9	9	1871		238.707
4	3	64.6	9	1895	1595	621.99
5	2	90	9	1990		310.893
6	3	51.3	9	1834	1979	465.897
7	1	53.5	9			17.75
8	2	82.9	9	1457		321.683
9	2	53.8	9	1492		525.397
10	1	61.4	9			45.48
11	3	96.3	9	1997	1431	418.903
12	3	82.4	9	1521	1785	564.107
13	3	81.8	9	1908	1618	483.17
14	1	64.8	9			280.523
15	2	75	9	1661		58.957
16	2	64.4	9	1646		489.9
17	2	56.7	9	1254		540.533
18	1	79.4	9			150.767

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 7

Bursts in Trial: 15

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	97.2	9	1147	1191	205.084
2	2	87.8	9	1030		341.95
3	2	93.3	9	1747		113.26
4	2	76.2	9	1415		456.9
5	2	72.9	9	1373		753.25
6	2	82.7	9	1116		506.7
7	3	76.4	9	1343	1995	443.95
8	3	52.4	9	1475	1372	743.37
9	3	65.1	9	1765	1140	516.69
10	2	50.9	9	1873		377.6
11	2	70.8	9	1122		747.59
12	3	64.3	9	1376	1820	336.63
13	2	99	9	1058		164.62
14	1	57.8	9			672.4
15	2	77.7	9	1828		549.3

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 8

Bursts in Trial: 16

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	52.7	12	1966	1269	255.957
2	2	70.9	12	1155		322.86
3	2	55.6	12	1410		378.37
4	2	69.8	12	1095		250.85
5	2	50.4	12	1846		395.43
6	2	52.8	12	1751		153.02
7	2	68	12	1939		169.82
8	1	63.8	12			333.89
9	2	73.3	12	1545		99.79
10	3	52.3	12	1445	1308	579.1
11	2	58.8	12	1883		540.92
12	2	59.9	12	1076		536.1
13	1	81.7	12			213
14	3	99.5	12	1455	1109	656.5
15	2	76.2	12	1404		404.7
16	2	54.9	12	1730		686

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 9

Bursts in Trial: 16

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	64.2	17	1829		233.938
2	2	83.5	17	1502		176.386
3	2	97	17	1892		737.7
4	2	54.8	17	1643		45.64
5	3	85	17	1638	1638	186.31
6	1	78.1	17			113.84
7	2	88.5	17	1582		398.27
8	3	87	17	1662	1201	125.07
9	2	63.8	17	1637		251.66
10	2	95.8	17	1072		380.57
11	1	69.3	17			598.64
12	2	89	17	1462		465.67
13	3	51.6	17	1995	1998	294.75
14	2	73.2	17	1622		595.4
15	1	87.5	17			462.9
16	1	60.1	17			634.4

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 10

Bursts in Trial: 11

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	56.1	10			526.765
2	3	57.6	10	1203	1630	527.431
3	2	54.9	10	1134		244.242
4	3	86.4	10	1373	1321	990.443
5	2	96.1	10	1444		296.574
6	2	97	10	1860		612.115
7	3	95.8	10	1057	1518	932.025
8	3	87.8	10	1992	1103	481.116
9	1	69.6	10			233.217
10	1	80.2	10			410.218
11	3	50.9	10	1365	1413	440.509

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 11

Bursts in Trial: 13

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	53.8	9			760.31
2	2	84.1	9	1398		285.883
3	1	79.6	9			725.776
4	2	85	9	1348		860.289
5	1	87.7	9			912.982
6	3	71.9	9	1741	1529	808.825
7	2	59.7	9	1508		414.618
8	2	84.3	9	1470		427.742
9	2	70.1	9	1342		316.265
10	2	61.4	9	1548		264.238
11	1	58.4	9			499.281
12	3	78.7	9	1543	1416	714.754
13	2	64.2	9	1292		518.877

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 12

Bursts in Trial: 11

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	88.2	18	1618		617.005
2	1	88.2	18			208.571
3	1	83.1	18			683.832
4	1	66.8	18			617.503
5	2	87	18	1231		404.714
6	1	59.4	18			790.175
7	2	77.5	18	1824		788.855
8	2	92.1	18	1094		299.676
9	2	89.4	18	1623		246.397
10	2	87.1	18	1231		661.818
11	2	83	18	1091		955.509

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 13

Bursts in Trial: 19

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	72.7	13	1798		504.42
2	2	50.7	13	1337		40.459
3	1	96.9	13			173.662
4	2	74.7	13	1444		468.393
5	2	55	13	1080		419.994
6	1	89.2	13			445.655
7	2	96.9	13	1561		498.366
8	2	58.5	13	1780		100.317
9	2	73.9	13	1230		312.988
10	1	90.2	13			608.089
11	3	80	13	1952	1468	381.541
12	1	60.2	13			558.872
13	1	78.6	13			202.303
14	2	89.3	13	1299		500.974
15	3	52.9	13	1927	1556	536.795
16	2	65.9	13	1066		13.196
17	2	85.5	13	1858		9.937
18	2	61.7	13	1878		476.658
19	2	63.2	13	1852		510.679

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 14

Bursts in Trial: 13

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	51.1	9	1598	1289	761.963
2	1	96	9			224.203
3	3	68.8	9	1277	1859	809.856
4	2	98.1	9	1972		462.479
5	1	65.4	9			558.322
6	2	99.8	9	1134		780.185
7	2	83.7	9	1405		31.838
8	2	82.5	9	1012		162.792
9	2	61.8	9	1767		883.755
10	3	84.6	9	1399	1824	657.518
11	2	87	9	1230		426.031
12	3	58	9	1040	1117	824.754
13	1	69.2	9			267.477

TYPE 5 PARAMETER SHEET Rohde & Schwarz Pulse Sequencer

Rohde & Schwarz
Pulse Sequencer

Trial Number : 15

Bursts in Trial: 10

[illegible]

--

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 16

Bursts in Trial: 12

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	65.5	11	1651	1348	825.584
2	3	98.3	11	1846	1021	341.06
3	1	60.4	11			972.64
4	2	95.9	11	1650		129.02
5	1	59.4	11			814.63
6	2	88.3	11	1722		98.23
7	2	60.7	11	1278		916.42
8	3	93.3	11	1712	1061	327.23
9	2	91.8	11	1946		17.88
10	3	77.3	11	1482	1760	887.04
11	2	53.4	11	1846		33.3
12	3	58.7	11	1474	1039	977.9

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 17

Bursts in Trial: 17

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	58.4	15			229.958
2	3	83.1	15	1870	1717	552.618
3	3	76.8	15	1716	1088	571.605
4	3	51	15	1987	1979	114.873
5	2	80.2	15	1165		421.601
6	2	92.1	15	1256		35.788
7	2	58.9	15	1534		566.286
8	3	92	15	1452	1926	67.494
9	2	76.4	15	1169		21.701
10	2	61.3	15	1040		35.039
11	1	61.7	15			560.556
12	1	69.9	15			251.164
13	3	70.4	15	1429	1106	579.212
14	3	52.7	15	1437	1137	582.969
15	2	90.1	15	1427		668.147
16	3	57	15	1993	1801	31.065
17	2	79.4	15	1974		110.182

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 18

Bursts in Trial: 19

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	52.8	7	1069		3.634
2	1	56.5	7			374.011
3	2	61.1	7	1481		407.782
4	1	59.6	7			304.843
5	2	91.2	7	1566		560.334
6	3	92.3	7	1076	1647	53.395
7	2	86.8	7	1021		613.376
8	1	65	7			485.127
9	3	63.1	7	1535	1953	69.718
10	2	63.5	7	1796		481.029
11	3	91.8	7	1868	1411	249.611
12	1	88.8	7			488.962
13	1	91.2	7			544.513
14	2	86.5	7	1962		617.354
15	1	60.9	7			352.055
16	3	97.7	7	1477	1645	175.506
17	2	90.3	7	1095		133.837
18	1	51.1	7			252.058
19	1	77.7	7			113.679

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 19

Bursts in Trial: 14

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	73.5	10			193.883
2	1	68	10			27.806
3	2	67.8	10	1023		728.024
4	1	65.3	10			679.961
5	2	81.4	10	1244		490.459
6	3	64.1	10	1202	1129	222.326
7	2	90.8	10	1448		304.723
8	2	77.8	10	1656		732.84
9	1	59.8	10			23.487
10	3	68.4	10	1032	1670	503.014
11	2	96.8	10	1230		336.341
12	2	59.8	10	1082		354.449
13	1	60.1	10			306.886
14	2	90.2	10	1016		593.643

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 20

Bursts in Trial: 16

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	88.6	5	1763		585.065
2	2	54.1	5	1368		604.27
3	1	69.6	5			311.92
4	1	73.7	5			584.62
5	2	86.2	5	1159		127
6	1	96.4	5			487.51
7	2	75.2	5	1008		523.57
8	2	64.6	5	1162		740.86
9	2	78.6	5	1059		500.52
10	2	79.2	5	1402		111.21
11	3	98.5	5	1229	1738	115.16
12	1	82.4	5			633.91
13	1	82.4	5			141.79
14	1	71.4	5			184.15
15	1	89.4	5			29.3
16	2	69.6	5	1316		44.6

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 21

Bursts in Trial: 10

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	72.7	7	1051		470.011
2	2	70.5	7	1711		483.92
3	2	80.8	7	1648		854.96
4	2	86.5	7	1344		136
5	2	67	7	1022		896.94
6	2	90.5	7	1301		439.88
7	1	64	7			402.22
8	1	92.4	7			340.35
9	2	51.3	7	1723		442.9
10	1	89.1	7			1038.7

TYPE 5 PARAMETER SHEET Rohde & Schwarz Pulse Sequencer

Rohde & Schwarz
Pulse Sequencer

Trial Number : 22

Bursts in Trial: 9

[illegible]

--

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 23

Bursts in Trial: 9

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	60.8	12			1243.25
2	3	92.1	12	1459	1665	276.707
3	3	76.4	12	1380	1093	2.463
4	1	75.8	12			1045.27
5	1	61.9	12			1152.037
6	2	81.5	12	1172		307.403
7	2	82.6	12	1888		1091.38
8	2	90.5	12	1839		576.337
9	1	99.1	12			1211.833

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 24

Bursts in Trial: 12

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	80.5	19	1855		518.406
2	3	57.5	19	1877	1290	211.17
3	3	67.2	19	1566	1309	410.76
4	1	67.8	19			672.4
5	2	87.6	19	1282		190.07
6	1	60.6	19			942.55
7	1	59	19			272.4
8	2	91	19	1515		927.52
9	2	91.9	19	1537		449.99
10	2	55.8	19	1323		531.53
11	2	92.2	19	1819		902.6
12	2	58.8	19	1849		435

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 25

Bursts in Trial: 16

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	74.1	12	1355		489.332
2	3	63.7	12	1042	1718	138.335
3	3	57	12	1221	1849	711.44
4	2	82.7	12	1533		306.29
5	2	52.6	12	1215		397.43
6	2	79.5	12	1069		369.42
7	3	85.8	12	1298	1249	246.58
8	2	60.3	12	1892		504.7
9	3	86.6	12	1429	1160	48.98
10	1	63	12			375.9
11	1	80	12			187.55
12	1	94.2	12			235.94
13	2	58.1	12	1639		574.6
14	2	74.9	12	1260		510
15	2	73.2	12	1785		224.4
16	2	58	12	1100		226.2

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 26

Bursts in Trial: 10

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	87.3	11	1992		774.965
2	3	61.9	11	1859	1469	545.38
3	2	52.5	11	1726		848.84
4	1	83.8	11			604.66
5	1	82.2	11			71.12
6	1	76	11			658.07
7	3	70.3	11	1907	1580	356.15
8	2	56.2	11	1419		993.55
9	3	71.1	11	1830	1209	165.23
10	1	56	11			822.7

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 27

Bursts in Trial: 16

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	56	16	1805		110.704
2	1	79.8	16			149.191
3	3	65.4	16	1467	1270	728.7
4	2	74.5	16	1513		437.21
5	3	65.9	16	1094	1144	440.73
6	2	93.1	16	1972		638.78
7	2	61.8	16	1768		625.42
8	3	70.3	16	1301	1646	14.52
9	1	52.8	16			525.29
10	3	79.4	16	1576	1372	423.1
11	2	70.2	16	1684		554.62
12	2	60.7	16	1963		555.12
13	2	60.6	16	1527		624.77
14	1	88	16			120.16
15	2	81.8	16	1414		89
16	1	50.5	16			316.7

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 28

Bursts in Trial: 17

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	77.4	12	1915	1309	549.251
2	3	85.7	12	1793	1898	372.858
3	3	93.3	12	1032	1917	119.585
4	1	65.5	12			187.983
5	2	56.2	12	1084		438.271
6	1	54.6	12			204.158
7	2	55.2	12	1251		384.646
8	1	80.7	12			669.354
9	2	61.7	12	1095		149.261
10	1	78.6	12			106.179
11	2	93	12	1460		29.276
12	2	71.6	12	1974		67.954
13	1	68.6	12			241.422
14	2	93.3	12	1444		29.359
15	2	66.6	12	1003		125.447
16	2	66.3	12	1598		67.665
17	2	61.4	12	1116		186.382

TYPE 5 PARAMETER SHEET Rohde & Schwarz Pulse Sequencer

Rohde & Schwarz
Pulse Sequencer

Trial Number : 29

Bursts in Trial: 10

[illegible]

--

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 30

Bursts in Trial: 15

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	69.5	9	1671	1698	109.439
2	3	54.4	9	1488	1287	162.439
3	2	91.5	9	1926		495.96
4	3	50.6	9	1505	1313	562.92
5	2	69.9	9	1277		439.57
6	1	52.5	9			716.5
7	2	65	9	1944		173.82
8	2	86.6	9	1704		636.26
9	1	70.5	9			399.14
10	1	54.2	9			360.46
11	1	99.1	9			402.51
12	1	73.5	9			625.5
13	3	93.8	9	1188	1537	773.3
14	3	86.4	9	1985	1197	68.3
15	1	80.7	9			758.6

Product : 11ax Cloud Managed AP
 Test Item : Statistical Performance Check
 Radar Type : Type 5
 Test Date : 2022/05/23
 Test Mode : Mode 2: Transmit (802.11ax-40BW)

Center Freq: 5510MHz			Low Edge: 5491MHz		High Edge: 5530MHz	
Trial #	Chirp	Offset	VSG Frequency (MHz)	*Filename	1= Detection 0= No Detection	
1	9		5510	Statistical Check RandParm For Radar Type 5 1 trail	1	
2	6		5510	Statistical Check RandParm For Radar Type 5 2 trail	1	
3	10		5510	Statistical Check RandParm For Radar Type 5 3 trail	1	
4	19		5510	Statistical Check RandParm For Radar Type 5 4 trail	1	
5	6		5510	Statistical Check RandParm For Radar Type 5 5 trail	1	
6	9		5510	Statistical Check RandParm For Radar Type 5 6 trail	1	
7	5		5510	Statistical Check RandParm For Radar Type 5 7 trail	1	
8	16		5510	Statistical Check RandParm For Radar Type 5 8 trail	1	
9	12		5510	Statistical Check RandParm For Radar Type 5 9 trail	1	
10	19		5510	Statistical Check RandParm For Radar Type 5 10 trail	1	
11	11	4.4	5495.4	Statistical Check RandParm For Radar Type 5 11 trail	0	
12	6	2.4	5493.4	Statistical Check RandParm For Radar Type 5 12 trail	1	
13	17	6.8	5497.8	Statistical Check RandParm For Radar Type 5 13 trail	0	
14	6	2.4	5493.4	Statistical Check RandParm For Radar Type 5 14 trail	0	
15	9	3.6	5494.6	Statistical Check RandParm For Radar Type 5 15 trail	1	
16	7	2.8	5493.8	Statistical Check RandParm For Radar Type 5 16 trail	0	
17	9	3.6	5494.6	Statistical Check RandParm For Radar Type 5 17 trail	1	
18	19	7.6	5498.6	Statistical Check RandParm For Radar Type 5 18 trail	0	
19	10	4	5495	Statistical Check RandParm For Radar Type 5 19 trail	1	
20	15	6	5497	Statistical Check RandParm For Radar Type 5 20 trail	0	
21	14	5.6	5523.4	Statistical Check RandParm For Radar Type 5 21 trail	1	
22	12	4.8	5524.2	Statistical Check RandParm For Radar Type 5 22 trail	1	
23	11	4.4	5524.6	Statistical Check RandParm For Radar Type 5 23 trail	1	
24	17	6.8	5522.2	Statistical Check RandParm For Radar Type 5 24 trail	1	
25	15	6	5523	Statistical Check RandParm For Radar Type 5 25 trail	1	
26	13	5.2	5523.8	Statistical Check RandParm For Radar Type 5 26 trail	1	
27	18	7.2	5521.8	Statistical Check RandParm For Radar Type 5 27 trail	1	
28	17	6.8	5522.2	Statistical Check RandParm For Radar Type 5 28 trail	1	
29	10	4	5525	Statistical Check RandParm For Radar Type 5 29 trail	1	
30	18	7.2	5521.8	Statistical Check RandParm For Radar Type 5 30 trail	1	
Detection Percentage (%)					80	
Limit					≥ 80	

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 1

Bursts in Trial: 10

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	97.7	9	1306	1707	786.937
2	2	61.5	9	1750		263.89
3	3	58.9	9	1348	1199	145.11
4	3	51.3	9	1773	1006	124.31
5	2	89.6	9	1542		372.8
6	2	51.9	9	1825		968.57
7	2	97	9	1657		3.75
8	2	59.2	9	1716		718.48
9	2	57.3	9	1364		992.4
10	3	73.4	9	1879	1817	616.5

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 2

Bursts in Trial: 17

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	77.3	6	1935	1566	96.339
2	2	59.3	6	1388		247.355
3	3	80.2	6	1319	1168	75.465
4	1	78.1	6			319.013
5	2	84.3	6	1584		440.121
6	2	69.7	6	1625		295.928
7	1	91.5	6			253.786
8	1	94.9	6			263.844
9	1	65.9	6			151.641
10	3	57.6	6	1782	1415	46.099
11	2	95.1	6	1081		424.596
12	2	77.1	6	1425		617.694
13	1	52.1	6			226.132
14	2	91.1	6	1266		95.229
15	2	90.1	6	1808		3.457
16	2	67.2	6	1703		649.965
17	1	91	6			131.382

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 3

Bursts in Trial: 12

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	78.4	10	1304		740.421
2	2	79.5	10	1610		626.47
3	3	65.1	10	1592	1426	132.71
4	1	70.4	10			203.62
5	1	75	10			74.54
6	2	98.9	10	1735		943.34
7	2	76.2	10	1104		591.12
8	2	75.9	10	1630		472.81
9	3	90.4	10	1545	1428	83.84
10	2	51.1	10	1561		2.06
11	2	94.2	10	1331		745.5
12	2	99	10	1167		802

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 4

Bursts in Trial: 11

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	95.4	19	1271	1232	1046.64
2	1	77.4	19			984.171
3	3	51.8	19	1725	1810	5.582
4	1	70.4	19			722.993
5	2	99.6	19	1987		1079.744
6	2	54	19	1752		712.935
7	3	58.9	19	1429	1528	194.365
8	1	96.8	19			991.396
9	2	64.2	19	1961		813.867
10	1	94.2	19			193.118
11	2	75.8	19	1964		323.109

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 5

Bursts in Trial: 15

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	98.3	6	1749	1886	211.35
2	3	52.3	6	1229	1520	617.48
3	2	66.4	6	1836		157.45
4	2	87.7	6	1493		489.83
5	1	66.1	6			146.67
6	2	58.2	6	1622		522.05
7	3	79.5	6	1264	1054	720.66
8	3	98.5	6	1982	1752	528.89
9	2	88.7	6	1684		18.01
10	2	52.9	6	1496		278.47
11	2	73.4	6	1834		421.3
12	3	94.6	6	1079	1323	590.58
13	1	60.4	6			426.8
14	1	99.2	6			116.3
15	1	54.2	6			400.1

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 6

Bursts in Trial: 16

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	72.4	9	1967		306.302
2	1	69.5	9			48.264
3	2	87.6	9	1268		75.92
4	2	67.4	9	1436		623.99
5	3	96.8	9	1194	1247	401.41
6	2	85.8	9	1720		661.91
7	1	82.5	9			116.33
8	1	86	9			521.25
9	2	85.4	9	1496		648.35
10	2	85.8	9	1202		40.23
11	3	98.6	9	1544	1910	736.19
12	2	53.6	9	1420		492
13	2	55	9	1686		600.12
14	1	68.9	9			234.19
15	1	72.6	9			277.3
16	1	67.3	9			469.2

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 7

Bursts in Trial: 15

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	54.1	5			270.6
2	1	86.9	5			527.8
3	3	73.1	5	1280	1600	611.12
4	1	76.7	5			788.5
5	3	58.9	5	1789	1308	663.64
6	3	75.9	5	1258	1377	647.42
7	1	64.7	5			159.33
8	3	61.5	5	1290	1608	485.73
9	1	66.2	5			424.6
10	1	59.9	5			335.75
11	2	74.4	5	1730		52.65
12	2	89.5	5	1136		270.86
13	2	73.3	5	1726		334.9
14	3	62.9	5	1518	1483	52.9
15	2	90	5	1044		431.6

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 8

Bursts in Trial: 11

Burst	Number of Pulses	Pulse Width (μsec)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (μsec)	Pulse 2-to-3 PRI (μsec)	Start Location Within Interval (msec)
1	2	77.7	16	1017		1075.09
2	3	85.3	16	1994	1378	337.941
3	3	55.2	16	1417	1685	50.612
4	1	74.4	16			278.873
5	2	71	16	1678		977.874
6	2	89.4	16	1550		256.245
7	3	53	16	1982	1953	179.535
8	1	88.3	16			218.686
9	3	72.2	16	1535	1880	862.807
10	3	81	16	1869	1926	178.278
11	2	85.1	16	1201		776.609

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 9

Bursts in Trial: 19

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	69.6	12	1748		264.151
2	1	92.6	12			270.416
3	1	51.3	12			574.652
4	2	68.6	12	1102		22.793
5	3	85.5	12	1782	1936	365.644
6	2	74.4	12	1695		344.585
7	1	95.8	12			546.806
8	2	73.9	12	1485		133.757
9	3	89.6	12	1196	1523	150.168
10	1	55.6	12			65.549
11	2	84.9	12	1181		461.541
12	3	84.8	12	1888	1281	159.252
13	2	77.9	12	1307		619.263
14	2	67.4	12	1649		111.414
15	2	57.5	12	1285		209.565
16	2	91.4	12	1229		278.256
17	3	53.1	12	1090	1927	556.837
18	1	68	12			12.458
19	2	97	12	1630		251.979

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 10

Bursts in Trial: 11

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	74.2	19	1399	1398	774.038
2	2	85.2	19	1341		541.961
3	3	93.5	19	1392	1076	364.642
4	1	50.4	19			257.453
5	1	91.2	19			867.864
6	2	56.1	19	1381		134.355
7	2	64.2	19	1574		788.325
8	2	91	19	1370		907.596
9	2	73.9	19	1111		492.837
10	2	97.9	19	1364		203.318
11	2	95.3	19	1344		762.309

TYPE 5 PARAMETER SHEET Rohde & Schwarz Pulse Sequencer

Rohde & Schwarz
Pulse Sequencer

Trial Number : 11

Bursts in Trial: 9

[illegible]

--

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 12

Bursts in Trial: 18

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	78.6	6	1123	1879	54.595
2	1	94.6	6			545.483
3	1	60.2	6			541.537
4	1	62.5	6			342.13
5	1	57.2	6			467.793
6	2	67.9	6	1431		474.647
7	3	93.6	6	1984	1906	511.6
8	2	68.7	6	1942		262.843
9	2	63	6	1758		50.777
10	2	57.7	6	1701		120.73
11	2	90.6	6	1949		360.153
12	1	55.9	6			613.007
13	3	71	6	1602	1663	117.42
14	2	50.3	6	1141		543.163
15	2	71.3	6	1323		414.767
16	1	57.1	6			286.5
17	2	64.5	6	1498		202.533
18	1	97.6	6			367.767

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 13

Bursts in Trial: 19

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	71.6	17	1139		60.923
2	2	83.1	17	1202		341.609
3	2	76.4	17	1614		122.122
4	3	65.9	17	1102	1873	154.473
5	3	95.3	17	1430	1555	565.854
6	3	57.8	17	1633	1159	118.445
7	3	52	17	1804	1864	68.766
8	3	62.6	17	1881	1316	316.407
9	3	66.2	17	1759	1335	169.228
10	2	98.6	17	1411		241.429
11	2	81.2	17	1867		291.771
12	2	50.9	17	1344		425.812
13	1	60.7	17			45.953
14	2	70.6	17	1049		262.314
15	3	53.5	17	1925	1222	313.775
16	1	50.1	17			329.726
17	1	97	17			328.637
18	1	94.6	17			61.658
19	2	88.3	17	1389		323.479

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 14

Bursts in Trial: 16

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	55.3	6	1371	1081	120.165
2	2	82.6	6	1356		648.11
3	1	72.5	6			317.86
4	3	90.1	6	1270	1353	416.71
5	2	84.5	6	1455		408.18
6	3	56.2	6	1589	1836	287.44
7	1	69.4	6			464.36
8	3	64	6	1794	1166	325.81
9	2	88.3	6	1857		460.52
10	2	79.3	6	1811		161.35
11	3	96.8	6	1797	1101	18.68
12	2	57.5	6	1749		678.1
13	2	91.9	6	1679		380.01
14	1	54.1	6			274.4
15	1	77	6			612.9
16	1	94.3	6			376.3

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 15

Bursts in Trial: 17

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	68.3	9			216.992
2	1	54.9	9			404.898
3	3	55.8	9	1755	1581	162.345
4	2	69.6	9	1931		390.983
5	2	60.4	9	1006		454.241
6	3	71.5	9	1178	1167	125.238
7	2	93.1	9	1015		280.946
8	1	84.2	9			129.484
9	1	92.5	9			320.511
10	2	79.8	9	1624		640.289
11	2	62.3	9	1541		246.736
12	3	85.3	9	1272	1849	648.474
13	2	68.9	9	1853		604.482
14	2	94.4	9	1924		573.749
15	2	58.4	9	1388		71.037
16	3	56.5	9	1469	1708	572.265
17	2	56.8	9	1966		253.982

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 16

Bursts in Trial: 18

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	99.5	7	1925	1234	575.105
2	2	75.5	7	1461		82.303
3	2	68.1	7	1772		322.407
4	3	96.1	7	1535	1159	460.68
5	2	51.7	7	1063		28.543
6	1	64	7			596.387
7	1	57.2	7			196.79
8	2	68.9	7	1264		67.673
9	1	59	7			365.937
10	2	78.7	7	1296		410.37
11	1	56.1	7			304.333
12	2	80.2	7	1266		594.697
13	2	76	7	1983		215.72
14	2	93.8	7	1991		259.013
15	2	95.7	7	1144		165.057
16	2	51.7	7	1679		325.3
17	2	75.9	7	1501		106.033
18	2	96.7	7	1519		442.467

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 17

Bursts in Trial: 17

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	56.2	9	1742		265.46
2	1	59.7	9			329.518
3	1	84.5	9			216.575
4	3	62.1	9	1537	1337	146.183
5	1	68.5	9			99.021
6	2	57.2	9	1566		177.888
7	1	87.8	9			243.726
8	2	71.3	9	1056		5.704
9	2	95.8	9	1597		567.871
10	2	98.3	9	1266		311.139
11	2	85	9	1412		201.696
12	2	84	9	1152		358.354
13	2	95.6	9	1401		687.622
14	2	64.5	9	1471		298.999
15	2	82.4	9	1002		680.547
16	2	52	9	1901		279.765
17	2	98.9	9	1946		430.682

TYPE 5 PARAMETER SHEET Rohde & Schwarz Pulse Sequencer

Rohde & Schwarz
Pulse Sequencer

Trial Number : 18

Bursts in Trial: 9

[illegible]

--

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 19

Bursts in Trial: 15

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	73.2	10	1133	1785	792.9
2	2	93.3	10	1509		759.31
3	3	63.2	10	1929	1873	222.43
4	1	78.2	10			492.33
5	1	64.2	10			120.53
6	3	85.3	10	1232	1008	18.13
7	1	55	10			598.26
8	2	95	10	1874		130.71
9	3	63	10	1608	1734	778.35
10	1	51.8	10			486.59
11	1	76	10			487.19
12	2	78.4	10	1446		164.97
13	3	77.8	10	1994	1702	210.3
14	2	83.9	10	1545		24
15	2	52.3	10	1369		485.2

TYPE 5 PARAMETER SHEET Rohde & Schwarz Pulse Sequencer

Rohde & Schwarz
Pulse Sequencer

Trial Number : 20

Bursts in Trial: 9

[illegible]

--

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 21

Bursts in Trial: 17

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	91.9	14			255.981
2	3	70.3	14	1959	1377	151.209
3	2	66.9	14	1694		70.595
4	2	83.9	14	1866		299.163
5	3	56.9	14	1862	1151	364.291
6	2	71.6	14	1033		553.898
7	2	68.4	14	1663		430.236
8	3	60.6	14	1741	1569	652.414
9	2	90.8	14	1787		207.631
10	3	60.6	14	1148	1369	389.079
11	2	81.2	14	1233		370.106
12	3	64.7	14	1299	1971	323.674
13	2	55.8	14	1859		195.302
14	1	91.3	14			482.759
15	3	61.1	14	1125	1988	348.047
16	3	84.6	14	1384	1667	132.665
17	3	61.3	14	1358	1816	333.082

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 22

Bursts in Trial: 9

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	74.1	12	1469	1204	635.519
2	1	68.9	12			843.897
3	3	59.5	12	1593	1475	578.973
4	3	67.9	12	1126	1501	627.47
5	1	92	12			33.507
6	3	51.7	12	1719	1935	282.763
7	1	83.7	12			842.96
8	3	82.1	12	1802	1508	878.067
9	2	83.9	12	1700		200.333

TYPE 5 PARAMETER SHEET Rohde & Schwarz Pulse Sequencer

TYPE 5 PARAMETER SHEET Rohde & Schwarz Pulse Sequencer

Trial Number : 23

Bursts in Trial: 8

[illegible]

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 24

Bursts in Trial: 11

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	89.4	17	1851		845.005
2	2	91.9	17	1866		167.371
3	2	67	17	1564		837.922
4	3	98.7	17	1130	1858	667.993
5	2	94.4	17	1764		1022.354
6	3	92	17	1077	1139	990.565
7	3	56.2	17	1506	1600	247.015
8	1	72.9	17			833.546
9	1	91.6	17			260.377
10	2	90.9	17	1411		514.518
11	2	96.2	17	1837		481.409

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 25

Bursts in Trial: 18

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	55.8	15	1322	1403	351.185
2	2	60.5	15	1804		6.657
3	2	66.9	15	1697		233.327
4	2	77.1	15	1545		196.09
5	2	93.2	15	1092		254.993
6	2	53.5	15	1964		53.467
7	2	77.5	15	1466		386.67
8	3	96.5	15	1660	1594	129.203
9	3	64.1	15	1622	1714	147.117
10	2	64.6	15	1362		91.85
11	2	76.5	15	1974		132.313
12	2	65.2	15	1036		227.447
13	3	89.1	15	1430	1998	353.14
14	2	85.1	15	1726		390.093
15	2	75.7	15	1964		425.347
16	2	79.1	15	1243		547.1
17	1	99.3	15			243.133
18	2	67	15	1310		575.867

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 26

Bursts in Trial: 19

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	75.8	13	1545		106.505
2	2	51.7	13	1823		580.221
3	1	75.1	13			286.342
4	1	54.8	13			423.093
5	3	88.6	13	1597	1528	263.984
6	3	64.5	13	1974	1677	618.165
7	3	98.3	13	1277	1962	1.906
8	2	66.5	13	1781		585.487
9	2	68.5	13	1680		355.198
10	1	63.3	13			272.729
11	2	84	13	1854		451.011
12	1	91.4	13			115.512
13	2	68.8	13	1181		111.323
14	2	64.9	13	1347		103.764
15	2	84.7	13	1709		447.695
16	2	85.6	13	1873		567.816
17	3	78.7	13	1472	1074	284.737
18	2	86.7	13	1320		554.958
19	1	98.1	13			468.579

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 27

Bursts in Trial: 11

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	92.2	18			111.394
2	1	59.7	18			71.721
3	2	50	18	1188		226.212
4	2	55.4	18	1591		783.873
5	2	73.1	18	1082		972.324
6	2	91	18	1357		70.315
7	2	74	18	1911		417.945
8	3	89.1	18	1628	1051	480.296
9	2	76.1	18	1401		686.677
10	3	53.4	18	1155	1253	856.918
11	3	58.1	18	1966	1301	765.609

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 28

Bursts in Trial: 16

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	83.8	17	1514	1674	86.616
2	2	77.8	17	1832		192.467
3	2	87	17	1707		639.74
4	2	96.3	17	1755		107.04
5	2	87.8	17	1348		81.86
6	3	92.8	17	1391	1412	236.77
7	1	75.4	17			260.31
8	3	67.2	17	1184	1377	312.52
9	1	97.4	17			435.16
10	2	99.4	17	1489		610.46
11	2	58.1	17	1514		241.34
12	1	95.9	17			60.57
13	2	87.8	17	1232		626.13
14	2	96.7	17	1400		170.33
15	2	53.6	17	1469		204
16	1	72.4	17			27.9

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 29

Bursts in Trial: 16

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	96.8	10	1888		82.594
2	3	66.3	10	1349	1540	720.59
3	2	81	10	1127		230.68
4	1	78.8	10			421.08
5	2	60.2	10	1036		235.14
6	3	96.4	10	1274	1878	647.21
7	3	60.5	10	1567	1208	734.6
8	2	52.6	10	1840		190.11
9	3	89.9	10	1912	1008	637.93
10	1	50.2	10			677.85
11	1	81.2	10			452.72
12	3	82.7	10	1519	1015	81.25
13	1	94.8	10			0.54
14	2	64.1	10	1038		714.9
15	2	61.2	10	1391		249.6
16	3	75.5	10	1112	1130	614.8

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 30

Bursts in Trial: 14

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	96.3	18			652.661
2	2	80.7	18	1411		533.507
3	1	76.3	18			481.214
4	2	65	18	1392		255.471
5	2	98.3	18	1589		436.339
6	1	87.4	18			235.396
7	2	70.1	18	1574		7.403
8	2	73.1	18	1165		286.66
9	2	68.8	18	1811		462.457
10	1	95.6	18			470.784
11	2	87.2	18	1812		67.421
12	2	95.8	18	1700		611.929
13	2	99.4	18	1745		421.286
14	1	79.7	18			513.643

Product : 11ax Cloud Managed AP
 Test Item : Statistical Performance Check
 Radar Type : Type 5
 Test Date : 2022/05/23
 Test Mode : Mode 3: Transmit (802.11ax-80BW)

Center Freq: 5530MHz			Low Edge: 5492MHz		High Edge: 5567MHz	
Trial #	Chirp	Offset	VSG Frequency (MHz)	*Filename	1= Detection 0= No Detection	
1	16		5530	Statistical_Check_RandParm_For_Radar_Type_5_1_trial	1	
2	9		5530	Statistical_Check_RandParm_For_Radar_Type_5_2_trial	1	
3	11		5530	Statistical_Check_RandParm_For_Radar_Type_5_3_trial	1	
4	16		5530	Statistical_Check_RandParm_For_Radar_Type_5_4_trial	1	
5	8		5530	Statistical_Check_RandParm_For_Radar_Type_5_5_trial	1	
6	10		5530	Statistical_Check_RandParm_For_Radar_Type_5_6_trial	1	
7	19		5530	Statistical_Check_RandParm_For_Radar_Type_5_7_trial	1	
8	11		5530	Statistical_Check_RandParm_For_Radar_Type_5_8_trial	1	
9	15		5530	Statistical_Check_RandParm_For_Radar_Type_5_9_trial	1	
10	17		5530	Statistical_Check_RandParm_For_Radar_Type_5_10_trial	1	
11	12	4.8	5495.8	Statistical_Check_RandParm_For_Radar_Type_5_11_trial	0	
12	14	5.6	5496.6	Statistical_Check_RandParm_For_Radar_Type_5_12_trial	1	
13	11	4.4	5495.4	Statistical_Check_RandParm_For_Radar_Type_5_13_trial	0	
14	14	5.6	5496.6	Statistical_Check_RandParm_For_Radar_Type_5_14_trial	1	
15	9	3.6	5494.6	Statistical_Check_RandParm_For_Radar_Type_5_15_trial	0	
16	14	5.6	5496.6	Statistical_Check_RandParm_For_Radar_Type_5_16_trial	0	
17	18	7.2	5498.2	Statistical_Check_RandParm_For_Radar_Type_5_17_trial	0	
18	12	4.8	5495.8	Statistical_Check_RandParm_For_Radar_Type_5_18_trial	1	
19	9	3.6	5494.6	Statistical_Check_RandParm_For_Radar_Type_5_19_trial	1	
20	15	6	5497	Statistical_Check_RandParm_For_Radar_Type_5_20_trial	1	
21	8	3.2	5565.8	Statistical_Check_RandParm_For_Radar_Type_5_21_trial	1	
22	16	6.4	5562.6	Statistical_Check_RandParm_For_Radar_Type_5_22_trial	1	
23	17	6.8	5562.2	Statistical_Check_RandParm_For_Radar_Type_5_23_trial	1	
24	17	6.8	5562.2	Statistical_Check_RandParm_For_Radar_Type_5_24_trial	1	
25	19	7.6	5561.4	Statistical_Check_RandParm_For_Radar_Type_5_25_trial	1	
26	15	6	5563	Statistical_Check_RandParm_For_Radar_Type_5_26_trial	1	
27	17	6.8	5562.2	Statistical_Check_RandParm_For_Radar_Type_5_27_trial	1	
28	19	7.6	5561.4	Statistical_Check_RandParm_For_Radar_Type_5_28_trial	1	
29	18	7.2	5561.8	Statistical_Check_RandParm_For_Radar_Type_5_29_trial	1	
30	7	2.8	5566.2	Statistical_Check_RandParm_For_Radar_Type_5_30_trial	1	
Detection Percentage (%)					83.33	
Limit					≥ 80	

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 1

Bursts in Trial: 9

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	53.1	16	1694	1637	308.581
2	3	74.6	16	1226	1966	502.067
3	1	69.4	16			1199.263
4	2	64.6	16	1716		939.85
5	2	69.1	16	1577		480.827
6	2	75.4	16	1701		868.583
7	3	66.6	16	1412	1227	323.88
8	2	56	16	1601		1163.667
9	2	77.1	16	1228		589.233

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 2

Bursts in Trial: 12

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	63.3	9	1047		13.614
2	1	95.1	9			798.17
3	1	50.4	9			808.71
4	1	87.2	9			465.42
5	2	56.6	9	1915		569.25
6	2	81.8	9	1276		9.83
7	2	77.6	9	1345		61.7
8	1	58.8	9			543.29
9	2	97.2	9	1960		989.55
10	3	83.4	9	1704	1272	327.18
11	2	50.6	9	1139		602.2
12	2	85.3	9	1360		620.8

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 3

Bursts in Trial: 16

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	97	11	1745	1811	114.913
2	1	72.7	11			599.39
3	2	54.5	11	1117		684.71
4	1	88	11			302.66
5	3	77.3	11	1010	1537	534.32
6	2	95.3	11	1886		335.68
7	2	65.7	11	1582		230.78
8	3	71.8	11	1785	1596	40.25
9	2	89.1	11	1667		719.59
10	2	95.5	11	1358		383.22
11	1	87.6	11			712.59
12	3	82.4	11	1028	1796	618.62
13	3	56.6	11	1452	1040	503.67
14	2	77.6	11	1704		692.8
15	2	88.5	11	1181		511.5
16	2	63	11	1165		546.7

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 4

Bursts in Trial: 19

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	82.5	16	1945		612.869
2	1	97.7	16			303.75
3	1	62.4	16			523.722
4	3	66.1	16	1240	1861	298.273
5	2	61.6	16	1578		420.094
6	2	86.2	16	1626		154.675
7	2	51.4	16	1946		310.546
8	2	77.1	16	1150		382.027
9	2	53.7	16	1514		271.278
10	3	75.6	16	1196	1562	574.039
11	1	62.4	16			505.701
12	1	88.9	16			86.292
13	3	93.3	16	1750	1455	316.003
14	1	91.9	16			124.454
15	2	95.3	16	1119		610.855
16	2	53.5	16	1204		603.616
17	1	77.5	16			347.637
18	2	91.4	16	1559		115.658
19	2	58.1	16	1713		173.379

TYPE 5 PARAMETER SHEET Rohde & Schwarz Pulse Sequencer

TYPE 5 PARAMETER SHEET Rohde & Schwarz Pulse Sequencer

Trial Number : 5

Bursts in Trial: 9

[illegible]

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 6

Bursts in Trial: 13

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	77.5	10	1175	1473	207.837
2	2	73.2	10	1498		36.439
3	3	82	10	1587	1004	406.356
4	2	60	10	1246		297.069
5	1	71.3	10			690.012
6	2	95.1	10	1556		762.385
7	1	85.3	10			200.718
8	2	92.7	10	1094		28.442
9	2	56.3	10	1155		205.235
10	2	51.8	10	1190		834.518
11	3	94.4	10	1234	1252	36.051
12	1	67.5	10			223.654
13	3	79	10	1785	1967	864.477

TYPE 5 PARAMETER SHEET Rohde & Schwarz Pulse Sequencer

TYPE 5 PARAMETER SHEET Rohde & Schwarz Pulse Sequencer

Trial Number : 7

Bursts in Trial: 9

[illegible]

--

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 8

Bursts in Trial: 15

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 Spacing (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	62.5	11	1093		268.041
2	2	69	11	1088		515.02
3	2	54.6	11	1535		217.36
4	2	77.8	11	1909		303.96
5	2	65.1	11	1864		25.07
6	2	95.1	11	1120		360.64
7	2	98.6	11	1554		375.53
8	3	63	11	1587	1221	759.79
9	1	90.1	11			546.63
10	2	99	11	1708		236.37
11	3	99.2	11	1708	1106	568.97
12	1	88.5	11			448.26
13	1	54.2	11			562.4
14	2	61.2	11	1905		594.7
15	1	54.1	11			562.2

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 9

Bursts in Trial: 11

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	93.7	15	1258		980.073
2	2	85	15	1261		8.301
3	3	78.1	15	1971	1689	52.722
4	1	79.7	15			696.553
5	2	83.5	15	1539		777.814
6	2	98.4	15	1581		781.635
7	2	65	15	1874		419.115
8	2	59.5	15	1620		363.306
9	2	98.9	15	1799		696.197
10	2	88.7	15	1855		227.218
11	2	62.8	15	1306		300.409

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 10

Bursts in Trial: 15

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	93	17	1069	1556	623.799
2	2	87.5	17	1381		525.76
3	2	94.5	17	1104		193.06
4	1	79.5	17			716.14
5	3	97.5	17	1351	1870	302.7
6	2	87.7	17	1441		25.77
7	2	70.1	17	1764		109.15
8	3	88.8	17	1644	1213	243.45
9	3	58.4	17	1695	1173	721.05
10	3	51.8	17	1422	1417	79.47
11	2	56.4	17	1434		316.17
12	3	90.9	17	1782	1136	434.11
13	2	95.1	17	1267		515
14	1	97.6	17			111.7
15	2	62.1	17	1739		259.2

TYPE 5 PARAMETER SHEET Rohde & Schwarz Pulse Sequencer

Rohde & Schwarz
Pulse Sequencer

Trial Number : 11

Bursts in Trial: 8

[illegible]

--

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 12

Bursts in Trial: 13

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	54.3	14	1836	1210	395.102
2	1	98.2	14			810.623
3	2	73.5	14	1948		588.326
4	3	71.1	14	1571	1009	586.979
5	1	88.9	14			771.152
6	2	98.2	14	1362		121.765
7	1	55.8	14			35.218
8	2	91	14	1788		362.612
9	3	88.8	14	1726	1370	187.105
10	1	57.1	14			252.878
11	1	93.5	14			795.831
12	3	75.9	14	1926	1638	400.154
13	3	80.7	14	1240	1520	297.177

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 13

Bursts in Trial: 12

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	97.5	11	1917		79.36
2	3	64.2	11	1196	1508	606.98
3	2	78.4	11	1181		553.76
4	2	90.2	11	1597		64.92
5	1	54.4	11			788.38
6	1	93.7	11			405.04
7	2	84.3	11	1972		390.74
8	1	59	11			103.54
9	1	88.9	11			52.24
10	2	69.4	11	1949		891.26
11	3	93.3	11	1156	1995	328.1
12	3	76	11	1916	1231	744.6

TYPE 5 PARAMETER SHEET Rohde & Schwarz Pulse Sequencer

Rohde & Schwarz
Pulse Sequencer

Trial Number : 14

Bursts in Trial: 10

[illegible]

--

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 15

Bursts in Trial: 18

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	92.3	9	1154		129.422
2	3	53.3	9	1998	1097	384.113
3	1	69.8	9			44.017
4	2	58.5	9	1002		190.2
5	2	97.2	9	1021		314.793
6	2	78.4	9	1641		515.337
7	2	96.8	9	1814		182.89
8	3	71.4	9	1262	1849	430.143
9	1	63	9			461.057
10	2	82.4	9	1758		524.75
11	2	50.8	9	1553		563.673
12	1	61.4	9			218.317
13	1	61.7	9			85.59
14	2	51.4	9	1222		431.813
15	2	91.3	9	1242		529.477
16	3	65	9	1116	1745	54.8
17	1	96.9	9			475.733
18	3	63	9	1934	1139	391.167

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 16

Bursts in Trial: 20

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	76.9	14	1847		180.75
2	3	99.3	14	1839	1397	455.26
3	2	76.8	14	1125		371.76
4	2	97.1	14	1272		83.76
5	3	71.8	14	1928	1311	324.76
6	1	89	14			496.11
7	2	50	14	1199		497.49
8	2	53.8	14	1081		513.99
9	3	83.9	14	1572	1670	81.37
10	3	84.7	14	1947	1735	136.97
11	3	56.7	14	1919	1039	380.29
12	2	86.4	14	1554		222.08
13	1	58	14			464.02
14	2	65.3	14	1735		425.21
15	3	62.7	14	1719	1382	181.42
16	2	70	14	1428		193.62
17	2	62.8	14	1347		438.4
18	2	60.2	14	1088		367.5
19	1	81.2	14			36.6
20	3	86	14	1517	1440	589.9

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 17

Bursts in Trial: 14

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	80.6	18	1501		694.577
2	3	98.6	18	1091	1515	71.423
3	3	83.2	18	1819	1604	32.684
4	2	62.3	18	1879		580.201
5	3	97	18	1159	1477	839.109
6	3	51.8	18	1180	1662	601.626
7	2	75.1	18	1565		456.243
8	2	58.5	18	1783		757.51
9	1	77.9	18			356.937
10	2	86.8	18	1798		311.394
11	2	56.4	18	1831		301.601
12	3	79.2	18	1435	1427	619.029
13	2	63.8	18	1968		697.486
14	2	74.4	18	1383		849.043

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 18

Bursts in Trial: 13

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	91.5	12			829.722
2	3	88.2	12	1507	1842	644.543
3	3	99.4	12	1845	1183	497.046
4	1	93.4	12			825.709
5	3	92.4	12	1622	1274	879.742
6	2	87.8	12	1983		156.245
7	1	96.1	12			663.328
8	2	91.3	12	1198		781.452
9	2	90.2	12	1535		424.215
10	2	57.9	12	1117		109.628
11	3	72	12	1528	1153	838.331
12	2	67.6	12	1654		700.454
13	2	82.7	12	1206		901.277

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 19

Bursts in Trial: 19

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	85.9	9			102.525
2	2	84.3	9	1802		206.227
3	1	73.3	9			80.132
4	2	78.6	9	1496		386.183
5	2	50.4	9	1900		531.074
6	2	82.1	9	1332		66.455
7	2	58.9	9	1004		574.516
8	2	52.2	9	1133		513.547
9	1	50.4	9			553.198
10	2	80.6	9	1794		397.409
11	2	85.7	9	1812		331.221
12	2	70.9	9	1872		31.832
13	2	86.9	9	1202		545.553
14	2	72.4	9	1267		352.534
15	3	55.7	9	1202	1465	359.615
16	2	72.6	9	1920		543.016
17	2	84.3	9	1351		119.037
18	3	88.8	9	1629	1008	64.458
19	3	96.9	9	1025	1664	579.979

TYPE 5 PARAMETER SHEET Rohde & Schwarz Pulse Sequencer

Rohde & Schwarz
Pulse Sequencer

Trial Number : 20

Bursts in Trial: 9

[illegible]

--

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 21

Bursts in Trial: 17

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	54.2	8	1689	1347	679.375
2	2	61.8	8	1820		335.728
3	1	50.2	8			519.495
4	1	84.4	8			171.573
5	3	55.2	8	1014	1448	20.021
6	1	92.3	8			225.798
7	1	95.7	8			315.256
8	2	96.6	8	1737		269.034
9	1	64	8			50.431
10	3	70.8	8	1067	1889	583.019
11	2	73.2	8	1197		397.376
12	2	90.2	8	1518		55.764
13	3	98.7	8	1681	1090	514.622
14	2	89	8	1007		416.739
15	1	62.6	8			49.077
16	1	71.7	8			628.265
17	1	96.7	8			513.882

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 22

Bursts in Trial: 20

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	93.7	16	1148		251.635
2	3	54.8	16	1537	1812	469.76
3	2	83.4	16	1589		326.42
4	1	80.9	16			33.05
5	3	77.4	16	1595	1484	67.74
6	3	88.3	16	1017	1981	154.89
7	2	83.5	16	1044		462.94
8	2	87.5	16	1260		444.93
9	3	83.9	16	1295	1811	289.76
10	3	66.6	16	1102	1573	213.44
11	3	55.7	16	1061	1860	165.35
12	2	61.4	16	1136		19.16
13	3	77	16	1190	1410	202.96
14	1	83.3	16			573.92
15	3	63.6	16	1201	1848	27.87
16	2	94.2	16	1868		163.67
17	3	55	16	1184	1764	549.1
18	1	66.1	16			46.2
19	2	75.7	16	1557		106.7
20	2	54.1	16	1658		547.7

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 23

Bursts in Trial: 19

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	81.4	17	1599	1101	167.76
2	1	78.5	17			262.944
3	1	55.7	17			618.542
4	2	70	17	1659		131.383
5	1	95.5	17			463.504
6	3	60.5	17	1121	1579	2.225
7	3	94.3	17	1526	1187	108.056
8	3	83.6	17	1658	1039	152.597
9	3	91.5	17	1966	1628	345.878
10	2	75.5	17	1306		478.449
11	2	75.7	17	1756		359.211
12	1	92.8	17			86.832
13	2	77.4	17	1303		69.953
14	3	59	17	1163	1229	587.244
15	2	91	17	1333		380.055
16	1	97.9	17			133.046
17	2	87.2	17	1834		50.937
18	2	82.3	17	1529		142.558
19	1	68.8	17			340.879

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 24

Bursts in Trial: 15

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	55.7	17			109.322
2	1	99.2	17			195.348
3	2	98.8	17	1421		745.07
4	2	56.7	17	1796		293.24
5	2	55	17	1211		329.88
6	1	55.3	17			122.5
7	2	69.7	17	1382		528.54
8	3	74.5	17	1227	1618	476
9	2	61.3	17	1947		34.18
10	1	80.1	17			421.76
11	3	97.9	17	1003	1169	386.56
12	1	75.8	17			468.39
13	2	60.6	17	1960		195.12
14	2	79.8	17	1155		72.8
15	2	74	17	1374		596.9

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 25

Bursts in Trial: 15

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	2	68	19	1454		373.703
2	2	67.3	19	1441		368.56
3	3	90.9	19	1400	1618	300.62
4	1	98.4	19			533.29
5	2	68.1	19	1779		312.44
6	2	59.8	19	1454		704.1
7	3	92.2	19	1633	1554	530.54
8	2	54.6	19	1915		293.06
9	1	92.5	19			430.38
10	1	61.4	19			381.79
11	2	62.6	19	1729		733.48
12	2	81.2	19	1681		745.77
13	3	57.8	19	1440	1810	659.4
14	2	85.2	19	1110		148
15	3	96.9	19	1083	1846	486.2

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 26

Bursts in Trial: 11

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	86	15	1507	1568	3.586
2	2	57.4	15	1427		772.261
3	3	86.5	15	1820	1665	677.442
4	3	72.5	15	1020	1227	266.733
5	2	62.8	15	1140		1022.044
6	2	80.2	15	1691		433.915
7	2	77.3	15	1066		426.595
8	3	73.2	15	1635	1163	178.996
9	2	87.8	15	1015		1057.447
10	2	69.7	15	1934		610.718
11	2	85.1	15	1831		922.609

TYPE 5 PARAMETER SHEET Rohde & Schwarz Pulse Sequencer

TYPE 5 PARAMETER SHEET Rohde & Schwarz Pulse Sequencer

Trial Number : 27

Bursts in Trial: 8

[illegible]

--

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 28

Bursts in Trial: 16

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	1	94.5	19			362.107
2	1	95.1	19			83.261
3	3	56.8	19	1261	1383	268.23
4	1	89.5	19			94.49
5	2	91.6	19	1343		604.82
6	2	79.1	19	1530		243.24
7	3	64.8	19	1235	1614	347.71
8	2	83.4	19	1722		102.15
9	2	75.1	19	1559		609.73
10	2	81.6	19	1976		394.57
11	2	50.7	19	1673		135.74
12	1	86.8	19			109.54
13	1	74.6	19			197.89
14	3	61.3	19	1975	1648	497.7
15	3	55.3	19	1780	1248	646.2
16	2	71.2	19	1471		320

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 29

Bursts in Trial: 12

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	68.1	18	1113	1686	822.226
2	3	86.8	18	1197	1369	75.13
3	1	84.5	18			504.98
4	3	96.8	18	1799	1632	373.51
5	2	60.7	18	1592		937.51
6	3	69.3	18	1683	1490	458.96
7	1	95.5	18			713.74
8	1	93.3	18			787.86
9	1	57	18			8.15
10	3	56.9	18	1754	1947	356.93
11	1	90.6	18			767.1
12	1	99.9	18			508.3

TYPE 5 PARAMETER SHEET

Rohde & Schwarz
Pulse Sequencer

Trial Number : 30

Bursts in Trial: 14

Burst	Number of Pulses	Pulse Width (µsec)	Chirp Width (MHz)	Pulse 1-to-2 PRI (µsec)	Pulse 2-to-3 PRI (µsec)	Start Location Within Interval (msec)
1	3	94.1	7	1119	1835	412.355
2	3	96.4	7	1989	1193	717.287
3	2	58.7	7	1538		161.954
4	2	92.2	7	1858		234.561
5	1	66.6	7			422.519
6	2	67.5	7	1848		141.396
7	2	56.8	7	1321		150.603
8	1	90.7	7			81.81
9	3	97.1	7	1251	1853	826.947
10	3	62.6	7	1054	1061	121.074
11	3	52.7	7	1318	1533	537.851
12	1	75.7	7			112.999
13	2	85	7	1339		586.886
14	2	59.2	7	1320		687.243

Product : 11ax Cloud Managed AP
 Test Item : Statistical Performance Check
 Radar Type : Type 6
 Test Date : 2022/05/23
 Test Mode : Mode 1: Transmit (802.11ax-20BW)

Trial #	Frequency (MHz)	*Filename	1= Detection 0= No Detection
1	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_1_trail	1
2	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_2_trail	1
3	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_3_trail	1
4	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_4_trail	1
5	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_5_trail	1
6	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_6_trail	1
7	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_7_trail	1
8	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_8_trail	1
9	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_9_trail	1
10	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_10_trail	1
11	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_11_trail	0
12	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_12_trail	1
13	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_13_trail	1
14	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_14_trail	1
15	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_15_trail	1
16	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_16_trail	1
17	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_17_trail	1
18	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_18_trail	1
19	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_19_trail	1
20	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_20_trail	1
21	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_21_trail	1
22	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_22_trail	0
23	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_23_trail	1
24	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_24_trail	1
25	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_25_trail	1
26	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_26_trail	1
27	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_27_trail	1
28	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_28_trail	1
29	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_29_trail	1
30	5500	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_30_trail	1
Detection Percentage (%)			93.33
Limit			>70

TYPE 6 PARAMETER SHEET

Trial Number : 1

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.677	20	
2	5.5	5.398	20	
3	5.5	5.357	20	
4	5.5	5.584	20	
5	5.5	5.39	20	
6	5.5	5.683	20	
7	5.5	5.309	20	
8	5.5	5.396	20	
9	5.5	5.274	20	
10	5.5	5.561	20	
11	5.5	5.6	20	
12	5.5	5.475	20	
13	5.5	5.414	20	
14	5.5	5.5	20	*
15	5.5	5.355	20	
16	5.5	5.367	20	
17	5.5	5.539	20	
18	5.5	5.451	20	
19	5.5	5.484	20	
20	5.5	5.292	20	
21	5.5	5.509	20	*
22	5.5	5.428	20	
23	5.5	5.369	20	
24	5.5	5.311	20	
25	5.5	5.606	20	
26	5.5	5.421	20	
27	5.5	5.388	20	
28	5.5	5.597	20	
29	5.5	5.712	20	
30	5.5	5.411	20	
31	5.5	5.591	20	
32	5.5	5.554	20	
33	5.5	5.467	20	
34	5.5	5.41	20	
35	5.5	5.626	20	
36	5.5	5.644	20	
37	5.5	5.349	20	
38	5.5	5.669	20	
39	5.5	5.489	20	
40	5.5	5.402	20	
41	5.5	5.488	20	
42	5.5	5.701	20	
43	5.5	5.393	20	
44	5.5	5.469	20	
45	5.5	5.359	20	
46	5.5	5.31	20	
47	5.5	5.647	20	
48	5.5	5.35	20	
49	5.5	5.284	20	

50	5.5	5.651	20	
51	5.5	5.283	20	
52	5.5	5.492	20	*
53	5.5	5.672	20	
54	5.5	5.704	20	
55	5.5	5.252	20	
56	5.5	5.62	20	
57	5.5	5.53	20	
58	5.5	5.58	20	
59	5.5	5.468	20	
60	5.5	5.263	20	
61	5.5	5.569	20	
62	5.5	5.652	20	
63	5.5	5.335	20	
64	5.5	5.665	20	
65	5.5	5.681	20	
66	5.5	5.688	20	
67	5.5	5.363	20	
68	5.5	5.63	20	
69	5.5	5.542	20	
70	5.5	5.293	20	
71	5.5	5.679	20	
72	5.5	5.601	20	
73	5.5	5.662	20	
74	5.5	5.456	20	
75	5.5	5.474	20	
76	5.5	5.522	20	
77	5.5	5.308	20	
78	5.5	5.408	20	
79	5.5	5.642	20	
80	5.5	5.552	20	
81	5.5	5.724	20	
82	5.5	5.565	20	
83	5.5	5.385	20	
84	5.5	5.386	20	
85	5.5	5.702	20	
86	5.5	5.575	20	
87	5.5	5.368	20	
88	5.5	5.339	20	
89	5.5	5.627	20	
90	5.5	5.583	20	
91	5.5	5.511	20	
92	5.5	5.256	20	
93	5.5	5.447	20	
94	5.5	5.608	20	
95	5.5	5.52	20	
96	5.5	5.431	20	
97	5.5	5.419	20	
98	5.5	5.379	20	
99	5.5	5.289	20	
100	5.5	5.661	20	

--

TYPE 6 PARAMETER SHEET				
Trial Number : 2				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.7	20	
2	5.5	5.399	20	
3	5.5	5.404	20	
4	5.5	5.552	20	
5	5.5	5.278	20	
6	5.5	5.653	20	
7	5.5	5.498	20	*
8	5.5	5.621	20	
9	5.5	5.532	20	
10	5.5	5.302	20	
11	5.5	5.701	20	
12	5.5	5.261	20	
13	5.5	5.708	20	
14	5.5	5.598	20	
15	5.5	5.429	20	
16	5.5	5.283	20	
17	5.5	5.398	20	
18	5.5	5.329	20	
19	5.5	5.281	20	
20	5.5	5.274	20	
21	5.5	5.501	20	*
22	5.5	5.542	20	
23	5.5	5.509	20	*

TYPE 6 PARAMETER SHEET				
Trial Number : 3				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.551	20	
2	5.5	5.265	20	
3	5.5	5.352	20	
4	5.5	5.595	20	
5	5.5	5.494	20	*
6	5.5	5.664	20	
7	5.5	5.286	20	
8	5.5	5.552	20	
9	5.5	5.311	20	
10	5.5	5.697	20	
11	5.5	5.329	20	
12	5.5	5.507	20	*
13	5.5	5.526	20	
14	5.5	5.598	20	
15	5.5	5.626	20	
16	5.5	5.327	20	
17	5.5	5.633	20	
18	5.5	5.624	20	
19	5.5	5.414	20	
20	5.5	5.252	20	
21	5.5	5.393	20	
22	5.5	5.39	20	
23	5.5	5.621	20	

TYPE 6 PARAMETER SHEET				
Trial Number : 4				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.409	20	
2	5.5	5.694	20	
3	5.5	5.412	20	
4	5.5	5.559	20	
5	5.5	5.307	20	
6	5.5	5.364	20	
7	5.5	5.387	20	
8	5.5	5.317	20	
9	5.5	5.44	20	
10	5.5	5.329	20	
11	5.5	5.453	20	
12	5.5	5.608	20	
13	5.5	5.402	20	
14	5.5	5.296	20	
15	5.5	5.667	20	
16	5.5	5.294	20	
17	5.5	5.631	20	
18	5.5	5.522	20	
19	5.5	5.386	20	
20	5.5	5.545	20	
21	5.5	5.406	20	
22	5.5	5.511	20	
23	5.5	5.291	20	

TYPE 6 PARAMETER SHEET				
Trial Number : 5				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.466	20	
2	5.5	5.45	20	
3	5.5	5.629	20	
4	5.5	5.524	20	
5	5.5	5.255	20	
6	5.5	5.448	20	
7	5.5	5.47	20	
8	5.5	5.434	20	
9	5.5	5.618	20	
10	5.5	5.6	20	
11	5.5	5.324	20	
12	5.5	5.706	20	
13	5.5	5.533	20	
14	5.5	5.386	20	
15	5.5	5.558	20	
16	5.5	5.499	20	*
17	5.5	5.51	20	*
18	5.5	5.591	20	
19	5.5	5.263	20	
20	5.5	5.517	20	
21	5.5	5.32	20	
22	5.5	5.31	20	
23	5.5	5.383	20	

TYPE 6 PARAMETER SHEET				
Trial Number : 6				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.517	20	
2	5.5	5.604	20	
3	5.5	5.39	20	
4	5.5	5.599	20	
5	5.5	5.699	20	
6	5.5	5.67	20	
7	5.5	5.505	20	*
8	5.5	5.264	20	
9	5.5	5.357	20	
10	5.5	5.616	20	
11	5.5	5.413	20	
12	5.5	5.703	20	
13	5.5	5.439	20	
14	5.5	5.475	20	
15	5.5	5.605	20	
16	5.5	5.494	20	*
17	5.5	5.515	20	
18	5.5	5.352	20	
19	5.5	5.267	20	
20	5.5	5.506	20	*
21	5.5	5.624	20	
22	5.5	5.63	20	
23	5.5	5.283	20	

TYPE 6 PARAMETER SHEET				
Trial Number : 7				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.667	20	
2	5.5	5.692	20	
3	5.5	5.456	20	
4	5.5	5.477	20	
5	5.5	5.332	20	
6	5.5	5.41	20	
7	5.5	5.58	20	
8	5.5	5.645	20	
9	5.5	5.338	20	
10	5.5	5.471	20	
11	5.5	5.32	20	
12	5.5	5.681	20	
13	5.5	5.348	20	
14	5.5	5.599	20	
15	5.5	5.659	20	
16	5.5	5.257	20	
17	5.5	5.399	20	
18	5.5	5.584	20	
19	5.5	5.345	20	
20	5.5	5.385	20	
21	5.5	5.563	20	
22	5.5	5.55	20	
23	5.5	5.54	20	

TYPE 6 PARAMETER SHEET				
Trial Number : 8				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.404	20	
2	5.5	5.539	20	
3	5.5	5.718	20	
4	5.5	5.48	20	
5	5.5	5.672	20	
6	5.5	5.558	20	
7	5.5	5.695	20	
8	5.5	5.443	20	
9	5.5	5.538	20	
10	5.5	5.622	20	
11	5.5	5.456	20	
12	5.5	5.701	20	
13	5.5	5.521	20	
14	5.5	5.503	20	*
15	5.5	5.37	20	
16	5.5	5.502	20	*
17	5.5	5.414	20	
18	5.5	5.272	20	
19	5.5	5.537	20	
20	5.5	5.299	20	
21	5.5	5.662	20	
22	5.5	5.437	20	
23	5.5	5.511	20	

TYPE 6 PARAMETER SHEET				
Trial Number : 9				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.7	20	
2	5.5	5.319	20	
3	5.5	5.538	20	
4	5.5	5.595	20	
5	5.5	5.476	20	
6	5.5	5.327	20	
7	5.5	5.496	20	*
8	5.5	5.276	20	
9	5.5	5.666	20	
10	5.5	5.585	20	
11	5.5	5.389	20	
12	5.5	5.308	20	
13	5.5	5.282	20	
14	5.5	5.288	20	
15	5.5	5.519	20	
16	5.5	5.589	20	
17	5.5	5.37	20	
18	5.5	5.34	20	
19	5.5	5.548	20	
20	5.5	5.3	20	
21	5.5	5.492	20	*
22	5.5	5.721	20	
23	5.5	5.291	20	

TYPE 6 PARAMETER SHEET				
Trial Number : 10				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.318	20	
2	5.5	5.481	20	
3	5.5	5.619	20	
4	5.5	5.445	20	
5	5.5	5.654	20	
6	5.5	5.659	20	
7	5.5	5.637	20	
8	5.5	5.628	20	
9	5.5	5.68	20	
10	5.5	5.525	20	
11	5.5	5.577	20	
12	5.5	5.704	20	
13	5.5	5.571	20	
14	5.5	5.668	20	
15	5.5	5.576	20	
16	5.5	5.33	20	
17	5.5	5.524	20	
18	5.5	5.488	20	
19	5.5	5.404	20	
20	5.5	5.699	20	
21	5.5	5.47	20	
22	5.5	5.544	20	
23	5.5	5.532	20	

TYPE 6 PARAMETER SHEET				
Trial Number : 11				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.443	20	
2	5.5	5.455	20	
3	5.5	5.28	20	
4	5.5	5.483	20	
5	5.5	5.642	20	
6	5.5	5.323	20	
7	5.5	5.556	20	
8	5.5	5.471	20	
9	5.5	5.359	20	
10	5.5	5.66	20	
11	5.5	5.598	20	
12	5.5	5.606	20	
13	5.5	5.445	20	
14	5.5	5.634	20	
15	5.5	5.682	20	
16	5.5	5.504	20	*
17	5.5	5.517	20	
18	5.5	5.542	20	
19	5.5	5.686	20	
20	5.5	5.276	20	
21	5.5	5.716	20	
22	5.5	5.462	20	
23	5.5	5.569	20	

TYPE 6 PARAMETER SHEET				
Trial Number : 12				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.48	20	
2	5.5	5.261	20	
3	5.5	5.625	20	
4	5.5	5.288	20	
5	5.5	5.384	20	
6	5.5	5.57	20	
7	5.5	5.51	20	*
8	5.5	5.31	20	
9	5.5	5.474	20	
10	5.5	5.657	20	
11	5.5	5.648	20	
12	5.5	5.585	20	
13	5.5	5.395	20	
14	5.5	5.54	20	
15	5.5	5.647	20	
16	5.5	5.382	20	
17	5.5	5.328	20	
18	5.5	5.25	20	
19	5.5	5.252	20	
20	5.5	5.343	20	
21	5.5	5.6	20	
22	5.5	5.354	20	
23	5.5	5.555	20	

TYPE 6 PARAMETER SHEET				
Trial Number : 13				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.689	20	
2	5.5	5.57	20	
3	5.5	5.713	20	
4	5.5	5.595	20	
5	5.5	5.478	20	
6	5.5	5.311	20	
7	5.5	5.564	20	
8	5.5	5.575	20	
9	5.5	5.65	20	
10	5.5	5.562	20	
11	5.5	5.413	20	
12	5.5	5.578	20	
13	5.5	5.657	20	
14	5.5	5.582	20	
15	5.5	5.569	20	
16	5.5	5.588	20	
17	5.5	5.295	20	
18	5.5	5.565	20	
19	5.5	5.456	20	
20	5.5	5.401	20	
21	5.5	5.304	20	
22	5.5	5.269	20	
23	5.5	5.512	20	

TYPE 6 PARAMETER SHEET				
Trial Number : 14				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.611	20	
2	5.5	5.514	20	
3	5.5	5.723	20	
4	5.5	5.252	20	
5	5.5	5.4	20	
6	5.5	5.465	20	
7	5.5	5.458	20	
8	5.5	5.305	20	
9	5.5	5.576	20	
10	5.5	5.482	20	
11	5.5	5.404	20	
12	5.5	5.69	20	
13	5.5	5.658	20	
14	5.5	5.434	20	
15	5.5	5.28	20	
16	5.5	5.481	20	
17	5.5	5.255	20	
18	5.5	5.62	20	
19	5.5	5.36	20	
20	5.5	5.351	20	
21	5.5	5.684	20	
22	5.5	5.52	20	
23	5.5	5.417	20	

TYPE 6 PARAMETER SHEET				
Trial Number : 15				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.435	20	
2	5.5	5.649	20	
3	5.5	5.497	20	*
4	5.5	5.515	20	
5	5.5	5.262	20	
6	5.5	5.53	20	
7	5.5	5.308	20	
8	5.5	5.685	20	
9	5.5	5.644	20	
10	5.5	5.32	20	
11	5.5	5.395	20	
12	5.5	5.402	20	
13	5.5	5.643	20	
14	5.5	5.327	20	
15	5.5	5.657	20	
16	5.5	5.587	20	
17	5.5	5.543	20	
18	5.5	5.478	20	
19	5.5	5.5	20	*
20	5.5	5.456	20	
21	5.5	5.608	20	
22	5.5	5.505	20	*
23	5.5	5.365	20	

TYPE 6 PARAMETER SHEET				
Trial Number : 16				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.359	20	
2	5.5	5.659	20	
3	5.5	5.305	20	
4	5.5	5.258	20	
5	5.5	5.345	20	
6	5.5	5.328	20	
7	5.5	5.374	20	
8	5.5	5.559	20	
9	5.5	5.522	20	
10	5.5	5.429	20	
11	5.5	5.282	20	
12	5.5	5.669	20	
13	5.5	5.436	20	
14	5.5	5.383	20	
15	5.5	5.585	20	
16	5.5	5.4	20	
17	5.5	5.698	20	
18	5.5	5.392	20	
19	5.5	5.538	20	
20	5.5	5.274	20	
21	5.5	5.567	20	
22	5.5	5.506	20	*
23	5.5	5.543	20	

TYPE 6 PARAMETER SHEET				
Trial Number : 17				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.276	20	
2	5.5	5.633	20	
3	5.5	5.413	20	
4	5.5	5.589	20	
5	5.5	5.718	20	
6	5.5	5.328	20	
7	5.5	5.448	20	
8	5.5	5.372	20	
9	5.5	5.444	20	
10	5.5	5.415	20	
11	5.5	5.7	20	
12	5.5	5.277	20	
13	5.5	5.283	20	
14	5.5	5.526	20	
15	5.5	5.527	20	
16	5.5	5.317	20	
17	5.5	5.613	20	
18	5.5	5.481	20	
19	5.5	5.567	20	
20	5.5	5.324	20	
21	5.5	5.417	20	
22	5.5	5.384	20	
23	5.5	5.271	20	

TYPE 6 PARAMETER SHEET				
Trial Number : 18				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.624	20	
2	5.5	5.494	20	*
3	5.5	5.272	20	
4	5.5	5.67	20	
5	5.5	5.521	20	
6	5.5	5.71	20	
7	5.5	5.337	20	
8	5.5	5.411	20	
9	5.5	5.665	20	
10	5.5	5.631	20	
11	5.5	5.441	20	
12	5.5	5.573	20	
13	5.5	5.627	20	
14	5.5	5.608	20	
15	5.5	5.375	20	
16	5.5	5.52	20	
17	5.5	5.721	20	
18	5.5	5.477	20	
19	5.5	5.69	20	
20	5.5	5.527	20	
21	5.5	5.27	20	
22	5.5	5.56	20	
23	5.5	5.697	20	

TYPE 6 PARAMETER SHEET				
Trial Number : 19				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.305	20	
2	5.5	5.525	20	
3	5.5	5.258	20	
4	5.5	5.474	20	
5	5.5	5.392	20	
6	5.5	5.251	20	
7	5.5	5.364	20	
8	5.5	5.288	20	
9	5.5	5.381	20	
10	5.5	5.601	20	
11	5.5	5.635	20	
12	5.5	5.616	20	
13	5.5	5.506	20	*
14	5.5	5.403	20	
15	5.5	5.4	20	
16	5.5	5.511	20	
17	5.5	5.455	20	
18	5.5	5.268	20	
19	5.5	5.698	20	
20	5.5	5.415	20	
21	5.5	5.519	20	
22	5.5	5.509	20	*
23	5.5	5.315	20	

TYPE 6 PARAMETER SHEET				
Trial Number : 20				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.708	20	
2	5.5	5.723	20	
3	5.5	5.608	20	
4	5.5	5.328	20	
5	5.5	5.438	20	
6	5.5	5.312	20	
7	5.5	5.555	20	
8	5.5	5.407	20	
9	5.5	5.693	20	
10	5.5	5.521	20	
11	5.5	5.351	20	
12	5.5	5.583	20	
13	5.5	5.643	20	
14	5.5	5.69	20	
15	5.5	5.436	20	
16	5.5	5.613	20	
17	5.5	5.483	20	
18	5.5	5.512	20	
19	5.5	5.593	20	
20	5.5	5.652	20	
21	5.5	5.294	20	
22	5.5	5.423	20	
23	5.5	5.288	20	

TYPE 6 PARAMETER SHEET				
Trial Number : 21				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.603	20	
2	5.5	5.348	20	
3	5.5	5.333	20	
4	5.5	5.302	20	
5	5.5	5.613	20	
6	5.5	5.635	20	
7	5.5	5.574	20	
8	5.5	5.65	20	
9	5.5	5.684	20	
10	5.5	5.695	20	
11	5.5	5.25	20	
12	5.5	5.425	20	
13	5.5	5.408	20	
14	5.5	5.662	20	
15	5.5	5.621	20	
16	5.5	5.702	20	
17	5.5	5.328	20	
18	5.5	5.372	20	
19	5.5	5.434	20	
20	5.5	5.294	20	
21	5.5	5.47	20	
22	5.5	5.253	20	
23	5.5	5.491	20	*

TYPE 6 PARAMETER SHEET				
Trial Number : 22				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.26	20	
2	5.5	5.429	20	
3	5.5	5.583	20	
4	5.5	5.464	20	
5	5.5	5.257	20	
6	5.5	5.699	20	
7	5.5	5.641	20	
8	5.5	5.361	20	
9	5.5	5.525	20	
10	5.5	5.597	20	
11	5.5	5.405	20	
12	5.5	5.656	20	
13	5.5	5.277	20	
14	5.5	5.549	20	
15	5.5	5.426	20	
16	5.5	5.301	20	
17	5.5	5.717	20	
18	5.5	5.61	20	
19	5.5	5.603	20	
20	5.5	5.672	20	
21	5.5	5.358	20	
22	5.5	5.529	20	
23	5.5	5.637	20	

TYPE 6 PARAMETER SHEET				
Trial Number : 23				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.642	20	
2	5.5	5.44	20	
3	5.5	5.567	20	
4	5.5	5.626	20	
5	5.5	5.636	20	
6	5.5	5.382	20	
7	5.5	5.53	20	
8	5.5	5.369	20	
9	5.5	5.3	20	
10	5.5	5.311	20	
11	5.5	5.535	20	
12	5.5	5.444	20	
13	5.5	5.592	20	
14	5.5	5.378	20	
15	5.5	5.675	20	
16	5.5	5.539	20	
17	5.5	5.581	20	
18	5.5	5.582	20	
19	5.5	5.395	20	
20	5.5	5.596	20	
21	5.5	5.628	20	
22	5.5	5.263	20	
23	5.5	5.361	20	

TYPE 6 PARAMETER SHEET				
Trial Number : 24				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.426	20	
2	5.5	5.563	20	
3	5.5	5.675	20	
4	5.5	5.605	20	
5	5.5	5.548	20	
6	5.5	5.354	20	
7	5.5	5.564	20	
8	5.5	5.594	20	
9	5.5	5.401	20	
10	5.5	5.332	20	
11	5.5	5.637	20	
12	5.5	5.409	20	
13	5.5	5.386	20	
14	5.5	5.427	20	
15	5.5	5.453	20	
16	5.5	5.643	20	
17	5.5	5.634	20	
18	5.5	5.464	20	
19	5.5	5.504	20	*
20	5.5	5.378	20	
21	5.5	5.48	20	
22	5.5	5.269	20	
23	5.5	5.445	20	

TYPE 6 PARAMETER SHEET				
Trial Number : 25				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.341	20	
2	5.5	5.54	20	
3	5.5	5.267	20	
4	5.5	5.356	20	
5	5.5	5.481	20	
6	5.5	5.334	20	
7	5.5	5.654	20	
8	5.5	5.468	20	
9	5.5	5.548	20	
10	5.5	5.645	20	
11	5.5	5.397	20	
12	5.5	5.475	20	
13	5.5	5.391	20	
14	5.5	5.289	20	
15	5.5	5.692	20	
16	5.5	5.442	20	
17	5.5	5.554	20	
18	5.5	5.716	20	
19	5.5	5.399	20	
20	5.5	5.593	20	
21	5.5	5.433	20	
22	5.5	5.457	20	
23	5.5	5.274	20	

TYPE 6 PARAMETER SHEET				
Trial Number : 26				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.607	20	
2	5.5	5.383	20	
3	5.5	5.293	20	
4	5.5	5.645	20	
5	5.5	5.576	20	
6	5.5	5.28	20	
7	5.5	5.684	20	
8	5.5	5.689	20	
9	5.5	5.406	20	
10	5.5	5.363	20	
11	5.5	5.279	20	
12	5.5	5.486	20	
13	5.5	5.567	20	
14	5.5	5.459	20	
15	5.5	5.519	20	
16	5.5	5.525	20	
17	5.5	5.422	20	
18	5.5	5.361	20	
19	5.5	5.286	20	
20	5.5	5.255	20	
21	5.5	5.267	20	
22	5.5	5.356	20	
23	5.5	5.708	20	

TYPE 6 PARAMETER SHEET				
Trial Number : 27				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.322	20	
2	5.5	5.268	20	
3	5.5	5.44	20	
4	5.5	5.286	20	
5	5.5	5.497	20	*
6	5.5	5.303	20	
7	5.5	5.547	20	
8	5.5	5.655	20	
9	5.5	5.296	20	
10	5.5	5.487	20	
11	5.5	5.39	20	
12	5.5	5.662	20	
13	5.5	5.371	20	
14	5.5	5.638	20	
15	5.5	5.636	20	
16	5.5	5.647	20	
17	5.5	5.47	20	
18	5.5	5.688	20	
19	5.5	5.453	20	
20	5.5	5.439	20	
21	5.5	5.375	20	
22	5.5	5.465	20	
23	5.5	5.717	20	

TYPE 6 PARAMETER SHEET				
Trial Number : 28				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.339	20	
2	5.5	5.612	20	
3	5.5	5.666	20	
4	5.5	5.326	20	
5	5.5	5.464	20	
6	5.5	5.296	20	
7	5.5	5.445	20	
8	5.5	5.264	20	
9	5.5	5.601	20	
10	5.5	5.476	20	
11	5.5	5.571	20	
12	5.5	5.42	20	
13	5.5	5.594	20	
14	5.5	5.379	20	
15	5.5	5.565	20	
16	5.5	5.628	20	
17	5.5	5.532	20	
18	5.5	5.667	20	
19	5.5	5.303	20	
20	5.5	5.364	20	
21	5.5	5.679	20	
22	5.5	5.672	20	
23	5.5	5.452	20	

TYPE 6 PARAMETER SHEET				
Trial Number : 29				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.576	20	
2	5.5	5.446	20	
3	5.5	5.586	20	
4	5.5	5.254	20	
5	5.5	5.349	20	
6	5.5	5.447	20	
7	5.5	5.724	20	
8	5.5	5.673	20	
9	5.5	5.389	20	
10	5.5	5.382	20	
11	5.5	5.37	20	
12	5.5	5.285	20	
13	5.5	5.301	20	
14	5.5	5.697	20	
15	5.5	5.409	20	
16	5.5	5.431	20	
17	5.5	5.332	20	
18	5.5	5.706	20	
19	5.5	5.5	20	*
20	5.5	5.423	20	
21	5.5	5.478	20	
22	5.5	5.7	20	
23	5.5	5.463	20	

TYPE 6 PARAMETER SHEET				
Trial Number : 30				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.5	5.717	20	
2	5.5	5.609	20	
3	5.5	5.448	20	
4	5.5	5.36	20	
5	5.5	5.499	20	*
6	5.5	5.378	20	
7	5.5	5.535	20	
8	5.5	5.697	20	
9	5.5	5.455	20	
10	5.5	5.363	20	
11	5.5	5.49	20	*
12	5.5	5.563	20	
13	5.5	5.327	20	
14	5.5	5.416	20	
15	5.5	5.551	20	
16	5.5	5.274	20	
17	5.5	5.295	20	
18	5.5	5.421	20	
19	5.5	5.413	20	
20	5.5	5.407	20	
21	5.5	5.659	20	
22	5.5	5.459	20	
23	5.5	5.365	20	

Product : 11ax Cloud Managed AP
 Test Item : Statistical Performance Check
 Radar Type : Type 6
 Test Date : 2022/05/23
 Test Mode : Mode 2: Transmit (802.11ax-40BW)

Trial #	Frequency (MHz)	*Filename	1= Detection 0= No Detection
1	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_1_trail	1
2	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_2_trail	1
3	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_3_trail	1
4	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_4_trail	1
5	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_5_trail	1
6	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_6_trail	1
7	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_7_trail	0
8	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_8_trail	1
9	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_9_trail	1
10	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_10_trail	1
11	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_11_trail	1
12	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_12_trail	1
13	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_13_trail	1
14	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_14_trail	0
15	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_15_trail	1
16	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_16_trail	1
17	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_17_trail	1
18	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_18_trail	1
19	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_19_trail	1
20	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_20_trail	1
21	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_21_trail	1
22	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_22_trail	0
23	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_23_trail	1
24	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_24_trail	1
25	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_25_trail	1
26	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_26_trail	1
27	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_27_trail	1
28	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_28_trail	1
29	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_29_trail	1
30	5510	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_30_trail	1
Detection Percentage (%)			90
Limit			>70

TYPE 6 PARAMETER SHEET

Trial Number : 1

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.583	40	
2	5.51	5.349	40	
3	5.51	5.71	40	
4	5.51	5.465	40	
5	5.51	5.455	40	
6	5.51	5.381	40	
7	5.51	5.284	40	
8	5.51	5.515	40	*
9	5.51	5.532	40	
10	5.51	5.319	40	
11	5.51	5.317	40	
12	5.51	5.638	40	
13	5.51	5.701	40	
14	5.51	5.279	40	
15	5.51	5.693	40	
16	5.51	5.503	40	*
17	5.51	5.267	40	
18	5.51	5.301	40	
19	5.51	5.592	40	
20	5.51	5.645	40	
21	5.51	5.419	40	
22	5.51	5.297	40	
23	5.51	5.454	40	
24	5.51	5.318	40	
25	5.51	5.326	40	
26	5.51	5.373	40	
27	5.51	5.652	40	
28	5.51	5.553	40	
29	5.51	5.307	40	
30	5.51	5.329	40	
31	5.51	5.723	40	
32	5.51	5.48	40	
33	5.51	5.513	40	*
34	5.51	5.36	40	
35	5.51	5.487	40	
36	5.51	5.584	40	
37	5.51	5.277	40	
38	5.51	5.619	40	
39	5.51	5.616	40	
40	5.51	5.482	40	
41	5.51	5.418	40	
42	5.51	5.387	40	
43	5.51	5.452	40	
44	5.51	5.251	40	
45	5.51	5.658	40	
46	5.51	5.31	40	
47	5.51	5.268	40	
48	5.51	5.331	40	
49	5.51	5.569	40	

50	5.51	5.411	40	
51	5.51	5.648	40	
52	5.51	5.274	40	
53	5.51	5.327	40	
54	5.51	5.334	40	
55	5.51	5.444	40	
56	5.51	5.668	40	
57	5.51	5.252	40	
58	5.51	5.611	40	
59	5.51	5.717	40	
60	5.51	5.448	40	
61	5.51	5.514	40	*
62	5.51	5.293	40	
63	5.51	5.57	40	
64	5.51	5.644	40	
65	5.51	5.5	40	*
66	5.51	5.671	40	
67	5.51	5.308	40	
68	5.51	5.663	40	
69	5.51	5.521	40	*
70	5.51	5.486	40	
71	5.51	5.696	40	
72	5.51	5.539	40	
73	5.51	5.325	40	
74	5.51	5.289	40	
75	5.51	5.446	40	
76	5.51	5.528	40	*
77	5.51	5.608	40	
78	5.51	5.587	40	
79	5.51	5.302	40	
80	5.51	5.582	40	
81	5.51	5.548	40	
82	5.51	5.609	40	
83	5.51	5.649	40	
84	5.51	5.375	40	
85	5.51	5.379	40	
86	5.51	5.404	40	
87	5.51	5.547	40	
88	5.51	5.354	40	
89	5.51	5.433	40	
90	5.51	5.261	40	
91	5.51	5.662	40	
92	5.51	5.718	40	
93	5.51	5.35	40	
94	5.51	5.423	40	
95	5.51	5.683	40	
96	5.51	5.542	40	
97	5.51	5.623	40	
98	5.51	5.477	40	
99	5.51	5.571	40	
100	5.51	5.634	40	

--

TYPE 6 PARAMETER SHEET				
Trial Number : 2				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.468	40	
2	5.51	5.298	40	
3	5.51	5.648	40	
4	5.51	5.65	40	
5	5.51	5.373	40	
6	5.51	5.431	40	
7	5.51	5.419	40	
8	5.51	5.516	40	*
9	5.51	5.405	40	
10	5.51	5.501	40	*
11	5.51	5.345	40	
12	5.51	5.614	40	
13	5.51	5.585	40	
14	5.51	5.384	40	
15	5.51	5.574	40	
16	5.51	5.704	40	
17	5.51	5.41	40	
18	5.51	5.523	40	*
19	5.51	5.504	40	*
20	5.51	5.423	40	
21	5.51	5.626	40	
22	5.51	5.317	40	
23	5.51	5.436	40	

TYPE 6 PARAMETER SHEET				
Trial Number : 3				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.35	40	
2	5.51	5.615	40	
3	5.51	5.436	40	
4	5.51	5.321	40	
5	5.51	5.263	40	
6	5.51	5.509	40	*
7	5.51	5.33	40	
8	5.51	5.447	40	
9	5.51	5.284	40	
10	5.51	5.46	40	
11	5.51	5.576	40	
12	5.51	5.399	40	
13	5.51	5.285	40	
14	5.51	5.539	40	
15	5.51	5.432	40	
16	5.51	5.513	40	*
17	5.51	5.326	40	
18	5.51	5.332	40	
19	5.51	5.338	40	
20	5.51	5.616	40	
21	5.51	5.598	40	
22	5.51	5.453	40	
23	5.51	5.664	40	

TYPE 6 PARAMETER SHEET				
Trial Number : 4				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.695	40	
2	5.51	5.506	40	*
3	5.51	5.637	40	
4	5.51	5.412	40	
5	5.51	5.519	40	*
6	5.51	5.716	40	
7	5.51	5.649	40	
8	5.51	5.31	40	
9	5.51	5.303	40	
10	5.51	5.493	40	*
11	5.51	5.703	40	
12	5.51	5.342	40	
13	5.51	5.309	40	
14	5.51	5.396	40	
15	5.51	5.684	40	
16	5.51	5.685	40	
17	5.51	5.38	40	
18	5.51	5.533	40	
19	5.51	5.641	40	
20	5.51	5.514	40	*
21	5.51	5.486	40	
22	5.51	5.393	40	
23	5.51	5.415	40	

TYPE 6 PARAMETER SHEET				
Trial Number : 5				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.282	40	
2	5.51	5.658	40	
3	5.51	5.638	40	
4	5.51	5.269	40	
5	5.51	5.397	40	
6	5.51	5.577	40	
7	5.51	5.332	40	
8	5.51	5.387	40	
9	5.51	5.505	40	*
10	5.51	5.5	40	*
11	5.51	5.701	40	
12	5.51	5.307	40	
13	5.51	5.421	40	
14	5.51	5.664	40	
15	5.51	5.692	40	
16	5.51	5.459	40	
17	5.51	5.528	40	*
18	5.51	5.645	40	
19	5.51	5.265	40	
20	5.51	5.576	40	
21	5.51	5.55	40	
22	5.51	5.284	40	
23	5.51	5.405	40	

TYPE 6 PARAMETER SHEET				
Trial Number : 6				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.332	40	
2	5.51	5.446	40	
3	5.51	5.431	40	
4	5.51	5.505	40	*
5	5.51	5.61	40	
6	5.51	5.552	40	
7	5.51	5.522	40	*
8	5.51	5.368	40	
9	5.51	5.264	40	
10	5.51	5.292	40	
11	5.51	5.665	40	
12	5.51	5.464	40	
13	5.51	5.329	40	
14	5.51	5.567	40	
15	5.51	5.628	40	
16	5.51	5.515	40	*
17	5.51	5.623	40	
18	5.51	5.586	40	
19	5.51	5.539	40	
20	5.51	5.511	40	*
21	5.51	5.326	40	
22	5.51	5.46	40	
23	5.51	5.599	40	

TYPE 6 PARAMETER SHEET				
Trial Number : 7				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.674	40	
2	5.51	5.531	40	
3	5.51	5.313	40	
4	5.51	5.368	40	
5	5.51	5.389	40	
6	5.51	5.537	40	
7	5.51	5.51	40	*
8	5.51	5.279	40	
9	5.51	5.386	40	
10	5.51	5.458	40	
11	5.51	5.67	40	
12	5.51	5.403	40	
13	5.51	5.529	40	*
14	5.51	5.377	40	
15	5.51	5.623	40	
16	5.51	5.522	40	*
17	5.51	5.428	40	
18	5.51	5.365	40	
19	5.51	5.685	40	
20	5.51	5.624	40	
21	5.51	5.564	40	
22	5.51	5.723	40	
23	5.51	5.253	40	

TYPE 6 PARAMETER SHEET				
Trial Number : 8				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.404	40	
2	5.51	5.362	40	
3	5.51	5.315	40	
4	5.51	5.654	40	
5	5.51	5.686	40	
6	5.51	5.598	40	
7	5.51	5.502	40	*
8	5.51	5.43	40	
9	5.51	5.534	40	
10	5.51	5.338	40	
11	5.51	5.322	40	
12	5.51	5.475	40	
13	5.51	5.294	40	
14	5.51	5.498	40	*
15	5.51	5.395	40	
16	5.51	5.374	40	
17	5.51	5.609	40	
18	5.51	5.545	40	
19	5.51	5.553	40	
20	5.51	5.558	40	
21	5.51	5.519	40	*
22	5.51	5.272	40	
23	5.51	5.273	40	

TYPE 6 PARAMETER SHEET				
Trial Number : 9				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.714	40	
2	5.51	5.519	40	*
3	5.51	5.302	40	
4	5.51	5.62	40	
5	5.51	5.525	40	*
6	5.51	5.475	40	
7	5.51	5.355	40	
8	5.51	5.402	40	
9	5.51	5.578	40	
10	5.51	5.595	40	
11	5.51	5.441	40	
12	5.51	5.629	40	
13	5.51	5.333	40	
14	5.51	5.481	40	
15	5.51	5.592	40	
16	5.51	5.619	40	
17	5.51	5.652	40	
18	5.51	5.527	40	*
19	5.51	5.382	40	
20	5.51	5.611	40	
21	5.51	5.439	40	
22	5.51	5.608	40	
23	5.51	5.563	40	

TYPE 6 PARAMETER SHEET				
Trial Number : 10				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.48	40	
2	5.51	5.567	40	
3	5.51	5.616	40	
4	5.51	5.583	40	
5	5.51	5.49	40	*
6	5.51	5.591	40	
7	5.51	5.285	40	
8	5.51	5.327	40	
9	5.51	5.537	40	
10	5.51	5.647	40	
11	5.51	5.541	40	
12	5.51	5.692	40	
13	5.51	5.63	40	
14	5.51	5.42	40	
15	5.51	5.346	40	
16	5.51	5.473	40	
17	5.51	5.273	40	
18	5.51	5.404	40	
19	5.51	5.531	40	
20	5.51	5.302	40	
21	5.51	5.708	40	
22	5.51	5.436	40	
23	5.51	5.334	40	

TYPE 6 PARAMETER SHEET				
Trial Number : 11				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.429	40	
2	5.51	5.658	40	
3	5.51	5.407	40	
4	5.51	5.623	40	
5	5.51	5.327	40	
6	5.51	5.382	40	
7	5.51	5.353	40	
8	5.51	5.37	40	
9	5.51	5.628	40	
10	5.51	5.685	40	
11	5.51	5.502	40	*
12	5.51	5.603	40	
13	5.51	5.599	40	
14	5.51	5.656	40	
15	5.51	5.544	40	
16	5.51	5.458	40	
17	5.51	5.521	40	*
18	5.51	5.409	40	
19	5.51	5.681	40	
20	5.51	5.674	40	
21	5.51	5.621	40	
22	5.51	5.265	40	
23	5.51	5.375	40	

TYPE 6 PARAMETER SHEET				
Trial Number : 12				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.306	40	
2	5.51	5.664	40	
3	5.51	5.388	40	
4	5.51	5.415	40	
5	5.51	5.341	40	
6	5.51	5.627	40	
7	5.51	5.589	40	
8	5.51	5.723	40	
9	5.51	5.339	40	
10	5.51	5.308	40	
11	5.51	5.28	40	
12	5.51	5.31	40	
13	5.51	5.326	40	
14	5.51	5.393	40	
15	5.51	5.617	40	
16	5.51	5.72	40	
17	5.51	5.483	40	
18	5.51	5.523	40	*
19	5.51	5.406	40	
20	5.51	5.64	40	
21	5.51	5.33	40	
22	5.51	5.588	40	
23	5.51	5.383	40	

TYPE 6 PARAMETER SHEET				
Trial Number : 13				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.4	40	
2	5.51	5.653	40	
3	5.51	5.345	40	
4	5.51	5.501	40	*
5	5.51	5.451	40	
6	5.51	5.666	40	
7	5.51	5.724	40	
8	5.51	5.682	40	
9	5.51	5.701	40	
10	5.51	5.718	40	
11	5.51	5.282	40	
12	5.51	5.59	40	
13	5.51	5.363	40	
14	5.51	5.399	40	
15	5.51	5.453	40	
16	5.51	5.308	40	
17	5.51	5.445	40	
18	5.51	5.364	40	
19	5.51	5.543	40	
20	5.51	5.383	40	
21	5.51	5.615	40	
22	5.51	5.595	40	
23	5.51	5.344	40	

TYPE 6 PARAMETER SHEET				
Trial Number : 14				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.646	40	
2	5.51	5.291	40	
3	5.51	5.694	40	
4	5.51	5.459	40	
5	5.51	5.303	40	
6	5.51	5.7	40	
7	5.51	5.585	40	
8	5.51	5.679	40	
9	5.51	5.696	40	
10	5.51	5.532	40	
11	5.51	5.404	40	
12	5.51	5.489	40	
13	5.51	5.546	40	
14	5.51	5.529	40	*
15	5.51	5.371	40	
16	5.51	5.408	40	
17	5.51	5.426	40	
18	5.51	5.422	40	
19	5.51	5.366	40	
20	5.51	5.556	40	
21	5.51	5.416	40	
22	5.51	5.625	40	
23	5.51	5.464	40	

TYPE 6 PARAMETER SHEET				
Trial Number : 15				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.522	40	*
2	5.51	5.607	40	
3	5.51	5.551	40	
4	5.51	5.626	40	
5	5.51	5.285	40	
6	5.51	5.281	40	
7	5.51	5.35	40	
8	5.51	5.42	40	
9	5.51	5.342	40	
10	5.51	5.39	40	
11	5.51	5.435	40	
12	5.51	5.287	40	
13	5.51	5.57	40	
14	5.51	5.423	40	
15	5.51	5.654	40	
16	5.51	5.425	40	
17	5.51	5.376	40	
18	5.51	5.712	40	
19	5.51	5.429	40	
20	5.51	5.304	40	
21	5.51	5.676	40	
22	5.51	5.387	40	
23	5.51	5.299	40	

TYPE 6 PARAMETER SHEET				
Trial Number : 16				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.432	40	
2	5.51	5.323	40	
3	5.51	5.403	40	
4	5.51	5.565	40	
5	5.51	5.35	40	
6	5.51	5.513	40	*
7	5.51	5.556	40	
8	5.51	5.398	40	
9	5.51	5.568	40	
10	5.51	5.358	40	
11	5.51	5.518	40	*
12	5.51	5.674	40	
13	5.51	5.716	40	
14	5.51	5.569	40	
15	5.51	5.5	40	*
16	5.51	5.544	40	
17	5.51	5.508	40	*
18	5.51	5.406	40	
19	5.51	5.707	40	
20	5.51	5.593	40	
21	5.51	5.273	40	
22	5.51	5.277	40	
23	5.51	5.517	40	*

TYPE 6 PARAMETER SHEET				
Trial Number : 17				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.708	40	
2	5.51	5.387	40	
3	5.51	5.309	40	
4	5.51	5.332	40	
5	5.51	5.704	40	
6	5.51	5.336	40	
7	5.51	5.251	40	
8	5.51	5.253	40	
9	5.51	5.52	40	*
10	5.51	5.676	40	
11	5.51	5.666	40	
12	5.51	5.72	40	
13	5.51	5.289	40	
14	5.51	5.477	40	
15	5.51	5.286	40	
16	5.51	5.271	40	
17	5.51	5.426	40	
18	5.51	5.401	40	
19	5.51	5.592	40	
20	5.51	5.59	40	
21	5.51	5.463	40	
22	5.51	5.408	40	
23	5.51	5.722	40	

TYPE 6 PARAMETER SHEET				
Trial Number : 18				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.308	40	
2	5.51	5.554	40	
3	5.51	5.288	40	
4	5.51	5.563	40	
5	5.51	5.256	40	
6	5.51	5.701	40	
7	5.51	5.626	40	
8	5.51	5.615	40	
9	5.51	5.286	40	
10	5.51	5.369	40	
11	5.51	5.518	40	*
12	5.51	5.386	40	
13	5.51	5.294	40	
14	5.51	5.534	40	
15	5.51	5.619	40	
16	5.51	5.635	40	
17	5.51	5.265	40	
18	5.51	5.631	40	
19	5.51	5.594	40	
20	5.51	5.606	40	
21	5.51	5.692	40	
22	5.51	5.25	40	
23	5.51	5.313	40	

TYPE 6 PARAMETER SHEET				
Trial Number : 19				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.311	40	
2	5.51	5.268	40	
3	5.51	5.292	40	
4	5.51	5.573	40	
5	5.51	5.483	40	
6	5.51	5.598	40	
7	5.51	5.322	40	
8	5.51	5.559	40	
9	5.51	5.655	40	
10	5.51	5.437	40	
11	5.51	5.514	40	*
12	5.51	5.378	40	
13	5.51	5.462	40	
14	5.51	5.541	40	
15	5.51	5.54	40	
16	5.51	5.675	40	
17	5.51	5.271	40	
18	5.51	5.555	40	
19	5.51	5.678	40	
20	5.51	5.441	40	
21	5.51	5.691	40	
22	5.51	5.62	40	
23	5.51	5.629	40	

TYPE 6 PARAMETER SHEET				
Trial Number : 20				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.301	40	
2	5.51	5.253	40	
3	5.51	5.637	40	
4	5.51	5.519	40	*
5	5.51	5.361	40	
6	5.51	5.296	40	
7	5.51	5.556	40	
8	5.51	5.389	40	
9	5.51	5.656	40	
10	5.51	5.501	40	*
11	5.51	5.337	40	
12	5.51	5.699	40	
13	5.51	5.29	40	
14	5.51	5.406	40	
15	5.51	5.285	40	
16	5.51	5.715	40	
17	5.51	5.661	40	
18	5.51	5.723	40	
19	5.51	5.618	40	
20	5.51	5.363	40	
21	5.51	5.271	40	
22	5.51	5.522	40	*
23	5.51	5.509	40	*

TYPE 6 PARAMETER SHEET				
Trial Number : 21				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.451	40	
2	5.51	5.373	40	
3	5.51	5.482	40	
4	5.51	5.676	40	
5	5.51	5.396	40	
6	5.51	5.582	40	
7	5.51	5.264	40	
8	5.51	5.424	40	
9	5.51	5.414	40	
10	5.51	5.295	40	
11	5.51	5.313	40	
12	5.51	5.349	40	
13	5.51	5.492	40	*
14	5.51	5.591	40	
15	5.51	5.616	40	
16	5.51	5.447	40	
17	5.51	5.385	40	
18	5.51	5.72	40	
19	5.51	5.507	40	*
20	5.51	5.402	40	
21	5.51	5.643	40	
22	5.51	5.392	40	
23	5.51	5.506	40	*

TYPE 6 PARAMETER SHEET				
Trial Number : 22				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.378	40	
2	5.51	5.366	40	
3	5.51	5.325	40	
4	5.51	5.437	40	
5	5.51	5.55	40	
6	5.51	5.34	40	
7	5.51	5.616	40	
8	5.51	5.66	40	
9	5.51	5.549	40	
10	5.51	5.51	40	*
11	5.51	5.618	40	
12	5.51	5.284	40	
13	5.51	5.468	40	
14	5.51	5.509	40	*
15	5.51	5.634	40	
16	5.51	5.651	40	
17	5.51	5.6	40	
18	5.51	5.345	40	
19	5.51	5.632	40	
20	5.51	5.507	40	*
21	5.51	5.252	40	
22	5.51	5.687	40	
23	5.51	5.599	40	

TYPE 6 PARAMETER SHEET				
Trial Number : 23				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.648	40	
2	5.51	5.593	40	
3	5.51	5.325	40	
4	5.51	5.394	40	
5	5.51	5.715	40	
6	5.51	5.517	40	*
7	5.51	5.674	40	
8	5.51	5.461	40	
9	5.51	5.553	40	
10	5.51	5.499	40	*
11	5.51	5.717	40	
12	5.51	5.275	40	
13	5.51	5.327	40	
14	5.51	5.44	40	
15	5.51	5.516	40	*
16	5.51	5.61	40	
17	5.51	5.271	40	
18	5.51	5.665	40	
19	5.51	5.472	40	
20	5.51	5.466	40	
21	5.51	5.723	40	
22	5.51	5.379	40	
23	5.51	5.433	40	

TYPE 6 PARAMETER SHEET				
Trial Number : 24				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.712	40	
2	5.51	5.409	40	
3	5.51	5.489	40	
4	5.51	5.71	40	
5	5.51	5.579	40	
6	5.51	5.656	40	
7	5.51	5.312	40	
8	5.51	5.496	40	*
9	5.51	5.485	40	
10	5.51	5.397	40	
11	5.51	5.525	40	*
12	5.51	5.608	40	
13	5.51	5.294	40	
14	5.51	5.443	40	
15	5.51	5.617	40	
16	5.51	5.288	40	
17	5.51	5.484	40	
18	5.51	5.522	40	*
19	5.51	5.333	40	
20	5.51	5.398	40	
21	5.51	5.668	40	
22	5.51	5.549	40	
23	5.51	5.355	40	

TYPE 6 PARAMETER SHEET				
Trial Number : 25				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.58	40	
2	5.51	5.712	40	
3	5.51	5.536	40	
4	5.51	5.293	40	
5	5.51	5.252	40	
6	5.51	5.659	40	
7	5.51	5.316	40	
8	5.51	5.573	40	
9	5.51	5.378	40	
10	5.51	5.362	40	
11	5.51	5.525	40	*
12	5.51	5.595	40	
13	5.51	5.392	40	
14	5.51	5.633	40	
15	5.51	5.718	40	
16	5.51	5.492	40	*
17	5.51	5.416	40	
18	5.51	5.702	40	
19	5.51	5.326	40	
20	5.51	5.384	40	
21	5.51	5.346	40	
22	5.51	5.63	40	
23	5.51	5.413	40	

TYPE 6 PARAMETER SHEET				
Trial Number : 26				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.7	40	
2	5.51	5.267	40	
3	5.51	5.475	40	
4	5.51	5.41	40	
5	5.51	5.509	40	*
6	5.51	5.527	40	*
7	5.51	5.57	40	
8	5.51	5.635	40	
9	5.51	5.45	40	
10	5.51	5.644	40	
11	5.51	5.575	40	
12	5.51	5.698	40	
13	5.51	5.666	40	
14	5.51	5.69	40	
15	5.51	5.588	40	
16	5.51	5.387	40	
17	5.51	5.545	40	
18	5.51	5.411	40	
19	5.51	5.724	40	
20	5.51	5.472	40	
21	5.51	5.47	40	
22	5.51	5.504	40	*
23	5.51	5.536	40	

TYPE 6 PARAMETER SHEET				
Trial Number : 27				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.411	40	
2	5.51	5.33	40	
3	5.51	5.575	40	
4	5.51	5.266	40	
5	5.51	5.284	40	
6	5.51	5.394	40	
7	5.51	5.621	40	
8	5.51	5.371	40	
9	5.51	5.614	40	
10	5.51	5.515	40	*
11	5.51	5.453	40	
12	5.51	5.571	40	
13	5.51	5.449	40	
14	5.51	5.674	40	
15	5.51	5.379	40	
16	5.51	5.661	40	
17	5.51	5.541	40	
18	5.51	5.393	40	
19	5.51	5.41	40	
20	5.51	5.372	40	
21	5.51	5.454	40	
22	5.51	5.624	40	
23	5.51	5.409	40	

TYPE 6 PARAMETER SHEET				
Trial Number : 28				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.715	40	
2	5.51	5.595	40	
3	5.51	5.62	40	
4	5.51	5.684	40	
5	5.51	5.306	40	
6	5.51	5.494	40	*
7	5.51	5.523	40	*
8	5.51	5.453	40	
9	5.51	5.58	40	
10	5.51	5.416	40	
11	5.51	5.681	40	
12	5.51	5.325	40	
13	5.51	5.295	40	
14	5.51	5.695	40	
15	5.51	5.329	40	
16	5.51	5.387	40	
17	5.51	5.549	40	
18	5.51	5.579	40	
19	5.51	5.514	40	*
20	5.51	5.501	40	*
21	5.51	5.352	40	
22	5.51	5.574	40	
23	5.51	5.524	40	*

TYPE 6 PARAMETER SHEET				
Trial Number : 29				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.678	40	
2	5.51	5.405	40	
3	5.51	5.635	40	
4	5.51	5.288	40	
5	5.51	5.259	40	
6	5.51	5.622	40	
7	5.51	5.562	40	
8	5.51	5.676	40	
9	5.51	5.661	40	
10	5.51	5.252	40	
11	5.51	5.706	40	
12	5.51	5.625	40	
13	5.51	5.594	40	
14	5.51	5.637	40	
15	5.51	5.571	40	
16	5.51	5.358	40	
17	5.51	5.531	40	
18	5.51	5.519	40	*
19	5.51	5.482	40	
20	5.51	5.591	40	
21	5.51	5.424	40	
22	5.51	5.552	40	
23	5.51	5.724	40	

TYPE 6 PARAMETER SHEET				
Trial Number : 30				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.51	5.444	40	
2	5.51	5.523	40	*
3	5.51	5.473	40	
4	5.51	5.65	40	
5	5.51	5.64	40	
6	5.51	5.72	40	
7	5.51	5.665	40	
8	5.51	5.256	40	
9	5.51	5.475	40	
10	5.51	5.303	40	
11	5.51	5.398	40	
12	5.51	5.497	40	*
13	5.51	5.587	40	
14	5.51	5.437	40	
15	5.51	5.411	40	
16	5.51	5.324	40	
17	5.51	5.602	40	
18	5.51	5.514	40	*
19	5.51	5.666	40	
20	5.51	5.507	40	*
21	5.51	5.695	40	
22	5.51	5.703	40	
23	5.51	5.577	40	

Product : 11ax Cloud Managed AP
 Test Item : Statistical Performance Check
 Radar Type : Type 6
 Test Date : 2022/05/23
 Test Mode : Mode 3: Transmit (802.11ax-80BW)

Trial #	Frequency (MHz)	*Filename	1= Detection 0= No Detection
1	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_1_trail	1
2	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_2_trail	1
3	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_3_trail	1
4	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_4_trail	0
5	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_5_trail	1
6	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_6_trail	1
7	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_7_trail	1
8	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_8_trail	1
9	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_9_trail	1
10	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_10_trail	0
11	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_11_trail	1
12	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_12_trail	1
13	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_13_trail	1
14	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_14_trail	1
15	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_15_trail	1
16	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_16_trail	0
17	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_17_trail	1
18	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_18_trail	1
19	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_19_trail	1
20	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_20_trail	1
21	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_21_trail	1
22	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_22_trail	1
23	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_23_trail	1
24	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_24_trail	1
25	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_25_trail	1
26	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_26_trail	1
27	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_27_trail	1
28	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_28_trail	1
29	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_29_trail	1
30	5530	Statistical_Check_Hopping Frequency List_For_Radar_Type_6_30_trail	1
Detection Percentage (%)			90
Limit			>70

TYPE 6 PARAMETER SHEET

Trial Number : 1

Bursts in Trial: 100

Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.705	80	
2	5.53	5.36	80	
3	5.53	5.671	80	
4	5.53	5.518	80	*
5	5.53	5.467	80	
6	5.53	5.539	80	*
7	5.53	5.474	80	
8	5.53	5.545	80	*
9	5.53	5.622	80	
10	5.53	5.67	80	
11	5.53	5.618	80	
12	5.53	5.55	80	*
13	5.53	5.359	80	
14	5.53	5.639	80	
15	5.53	5.645	80	
16	5.53	5.426	80	
17	5.53	5.466	80	
18	5.53	5.397	80	
19	5.53	5.635	80	
20	5.53	5.487	80	
21	5.53	5.561	80	*
22	5.53	5.492	80	*
23	5.53	5.25	80	
24	5.53	5.611	80	
25	5.53	5.329	80	
26	5.53	5.605	80	
27	5.53	5.574	80	
28	5.53	5.633	80	
29	5.53	5.488	80	
30	5.53	5.259	80	
31	5.53	5.641	80	
32	5.53	5.717	80	
33	5.53	5.629	80	
34	5.53	5.367	80	
35	5.53	5.69	80	
36	5.53	5.458	80	
37	5.53	5.686	80	
38	5.53	5.7	80	
39	5.53	5.607	80	
40	5.53	5.602	80	
41	5.53	5.387	80	
42	5.53	5.264	80	
43	5.53	5.395	80	
44	5.53	5.724	80	
45	5.53	5.274	80	
46	5.53	5.547	80	*
47	5.53	5.371	80	
48	5.53	5.289	80	
49	5.53	5.646	80	

50	5.53	5.288	80	
51	5.53	5.365	80	
52	5.53	5.515	80	*
53	5.53	5.612	80	
54	5.53	5.669	80	
55	5.53	5.386	80	
56	5.53	5.432	80	
57	5.53	5.674	80	
58	5.53	5.323	80	
59	5.53	5.653	80	
60	5.53	5.276	80	
61	5.53	5.309	80	
62	5.53	5.681	80	
63	5.53	5.275	80	
64	5.53	5.42	80	
65	5.53	5.291	80	
66	5.53	5.427	80	
67	5.53	5.296	80	
68	5.53	5.499	80	*
69	5.53	5.37	80	
70	5.53	5.29	80	
71	5.53	5.352	80	
72	5.53	5.692	80	
73	5.53	5.263	80	
74	5.53	5.313	80	
75	5.53	5.526	80	*
76	5.53	5.58	80	
77	5.53	5.447	80	
78	5.53	5.566	80	*
79	5.53	5.557	80	*
80	5.53	5.252	80	
81	5.53	5.626	80	
82	5.53	5.455	80	
83	5.53	5.402	80	
84	5.53	5.398	80	
85	5.53	5.586	80	
86	5.53	5.483	80	
87	5.53	5.537	80	*
88	5.53	5.316	80	
89	5.53	5.463	80	
90	5.53	5.35	80	
91	5.53	5.719	80	
92	5.53	5.417	80	
93	5.53	5.68	80	
94	5.53	5.477	80	
95	5.53	5.552	80	*
96	5.53	5.578	80	
97	5.53	5.673	80	
98	5.53	5.409	80	
99	5.53	5.364	80	
100	5.53	5.361	80	

--

TYPE 6 PARAMETER SHEET				
Trial Number : 2				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.719	80	
2	5.53	5.572	80	
3	5.53	5.316	80	
4	5.53	5.527	80	*
5	5.53	5.353	80	
6	5.53	5.405	80	
7	5.53	5.38	80	
8	5.53	5.722	80	
9	5.53	5.669	80	
10	5.53	5.614	80	
11	5.53	5.658	80	
12	5.53	5.429	80	
13	5.53	5.438	80	
14	5.53	5.588	80	
15	5.53	5.293	80	
16	5.53	5.467	80	
17	5.53	5.257	80	
18	5.53	5.482	80	
19	5.53	5.532	80	*
20	5.53	5.375	80	
21	5.53	5.516	80	*
22	5.53	5.277	80	
23	5.53	5.623	80	

TYPE 6 PARAMETER SHEET				
Trial Number : 3				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.346	80	
2	5.53	5.328	80	
3	5.53	5.518	80	*
4	5.53	5.679	80	
5	5.53	5.311	80	
6	5.53	5.263	80	
7	5.53	5.506	80	*
8	5.53	5.492	80	*
9	5.53	5.715	80	
10	5.53	5.415	80	
11	5.53	5.712	80	
12	5.53	5.582	80	
13	5.53	5.541	80	*
14	5.53	5.255	80	
15	5.53	5.624	80	
16	5.53	5.652	80	
17	5.53	5.483	80	
18	5.53	5.603	80	
19	5.53	5.719	80	
20	5.53	5.41	80	
21	5.53	5.559	80	*
22	5.53	5.511	80	*
23	5.53	5.26	80	

TYPE 6 PARAMETER SHEET				
Trial Number : 4				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.438	80	
2	5.53	5.291	80	
3	5.53	5.442	80	
4	5.53	5.623	80	
5	5.53	5.46	80	
6	5.53	5.33	80	
7	5.53	5.311	80	
8	5.53	5.705	80	
9	5.53	5.503	80	*
10	5.53	5.555	80	*
11	5.53	5.406	80	
12	5.53	5.416	80	
13	5.53	5.639	80	
14	5.53	5.722	80	
15	5.53	5.564	80	*
16	5.53	5.524	80	*
17	5.53	5.553	80	*
18	5.53	5.339	80	
19	5.53	5.695	80	
20	5.53	5.532	80	*
21	5.53	5.542	80	*
22	5.53	5.408	80	
23	5.53	5.295	80	

TYPE 6 PARAMETER SHEET				
Trial Number : 5				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.351	80	
2	5.53	5.484	80	
3	5.53	5.466	80	
4	5.53	5.596	80	
5	5.53	5.496	80	*
6	5.53	5.462	80	
7	5.53	5.374	80	
8	5.53	5.689	80	
9	5.53	5.338	80	
10	5.53	5.314	80	
11	5.53	5.492	80	*
12	5.53	5.423	80	
13	5.53	5.395	80	
14	5.53	5.578	80	
15	5.53	5.612	80	
16	5.53	5.636	80	
17	5.53	5.569	80	*
18	5.53	5.284	80	
19	5.53	5.653	80	
20	5.53	5.482	80	
21	5.53	5.301	80	
22	5.53	5.676	80	
23	5.53	5.267	80	

TYPE 6 PARAMETER SHEET				
Trial Number : 6				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.6	80	
2	5.53	5.689	80	
3	5.53	5.462	80	
4	5.53	5.327	80	
5	5.53	5.588	80	
6	5.53	5.552	80	*
7	5.53	5.705	80	
8	5.53	5.678	80	
9	5.53	5.54	80	*
10	5.53	5.435	80	
11	5.53	5.674	80	
12	5.53	5.641	80	
13	5.53	5.343	80	
14	5.53	5.527	80	*
15	5.53	5.412	80	
16	5.53	5.576	80	
17	5.53	5.57	80	*
18	5.53	5.283	80	
19	5.53	5.629	80	
20	5.53	5.687	80	
21	5.53	5.358	80	
22	5.53	5.324	80	
23	5.53	5.253	80	

TYPE 6 PARAMETER SHEET				
Trial Number : 7				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.561	80	*
2	5.53	5.42	80	
3	5.53	5.491	80	*
4	5.53	5.299	80	
5	5.53	5.697	80	
6	5.53	5.502	80	*
7	5.53	5.609	80	
8	5.53	5.321	80	
9	5.53	5.716	80	
10	5.53	5.312	80	
11	5.53	5.349	80	
12	5.53	5.382	80	
13	5.53	5.317	80	
14	5.53	5.593	80	
15	5.53	5.363	80	
16	5.53	5.534	80	*
17	5.53	5.463	80	
18	5.53	5.258	80	
19	5.53	5.65	80	
20	5.53	5.535	80	*
21	5.53	5.637	80	
22	5.53	5.553	80	*
23	5.53	5.315	80	

TYPE 6 PARAMETER SHEET				
Trial Number : 8				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.419	80	
2	5.53	5.343	80	
3	5.53	5.683	80	
4	5.53	5.553	80	*
5	5.53	5.301	80	
6	5.53	5.338	80	
7	5.53	5.415	80	
8	5.53	5.508	80	*
9	5.53	5.49	80	*
10	5.53	5.382	80	
11	5.53	5.574	80	
12	5.53	5.582	80	
13	5.53	5.484	80	
14	5.53	5.568	80	*
15	5.53	5.619	80	
16	5.53	5.404	80	
17	5.53	5.271	80	
18	5.53	5.596	80	
19	5.53	5.444	80	
20	5.53	5.664	80	
21	5.53	5.695	80	
22	5.53	5.369	80	
23	5.53	5.713	80	

TYPE 6 PARAMETER SHEET				
Trial Number : 9				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.268	80	
2	5.53	5.629	80	
3	5.53	5.59	80	
4	5.53	5.513	80	*
5	5.53	5.329	80	
6	5.53	5.512	80	*
7	5.53	5.322	80	
8	5.53	5.656	80	
9	5.53	5.686	80	
10	5.53	5.48	80	
11	5.53	5.555	80	*
12	5.53	5.27	80	
13	5.53	5.42	80	
14	5.53	5.411	80	
15	5.53	5.415	80	
16	5.53	5.456	80	
17	5.53	5.687	80	
18	5.53	5.404	80	
19	5.53	5.691	80	
20	5.53	5.298	80	
21	5.53	5.486	80	
22	5.53	5.708	80	
23	5.53	5.293	80	

TYPE 6 PARAMETER SHEET				
Trial Number : 10				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.578	80	
2	5.53	5.574	80	
3	5.53	5.344	80	
4	5.53	5.588	80	
5	5.53	5.671	80	
6	5.53	5.604	80	
7	5.53	5.316	80	
8	5.53	5.252	80	
9	5.53	5.331	80	
10	5.53	5.471	80	
11	5.53	5.509	80	*
12	5.53	5.478	80	
13	5.53	5.663	80	
14	5.53	5.721	80	
15	5.53	5.346	80	
16	5.53	5.293	80	
17	5.53	5.64	80	
18	5.53	5.691	80	
19	5.53	5.363	80	
20	5.53	5.544	80	*
21	5.53	5.472	80	
22	5.53	5.515	80	*
23	5.53	5.582	80	

TYPE 6 PARAMETER SHEET				
Trial Number : 11				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.522	80	*
2	5.53	5.484	80	
3	5.53	5.454	80	
4	5.53	5.586	80	
5	5.53	5.449	80	
6	5.53	5.421	80	
7	5.53	5.556	80	*
8	5.53	5.502	80	*
9	5.53	5.332	80	
10	5.53	5.476	80	
11	5.53	5.654	80	
12	5.53	5.451	80	
13	5.53	5.273	80	
14	5.53	5.675	80	
15	5.53	5.579	80	
16	5.53	5.462	80	
17	5.53	5.442	80	
18	5.53	5.267	80	
19	5.53	5.645	80	
20	5.53	5.582	80	
21	5.53	5.283	80	
22	5.53	5.574	80	
23	5.53	5.687	80	

TYPE 6 PARAMETER SHEET				
Trial Number : 12				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.646	80	
2	5.53	5.507	80	*
3	5.53	5.689	80	
4	5.53	5.268	80	
5	5.53	5.656	80	
6	5.53	5.347	80	
7	5.53	5.336	80	
8	5.53	5.499	80	*
9	5.53	5.598	80	
10	5.53	5.487	80	
11	5.53	5.445	80	
12	5.53	5.616	80	
13	5.53	5.59	80	
14	5.53	5.388	80	
15	5.53	5.29	80	
16	5.53	5.342	80	
17	5.53	5.432	80	
18	5.53	5.271	80	
19	5.53	5.575	80	
20	5.53	5.299	80	
21	5.53	5.515	80	*
22	5.53	5.427	80	
23	5.53	5.585	80	

TYPE 6 PARAMETER SHEET				
Trial Number : 13				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.722	80	
2	5.53	5.644	80	
3	5.53	5.706	80	
4	5.53	5.463	80	
5	5.53	5.392	80	
6	5.53	5.694	80	
7	5.53	5.317	80	
8	5.53	5.587	80	
9	5.53	5.634	80	
10	5.53	5.69	80	
11	5.53	5.688	80	
12	5.53	5.348	80	
13	5.53	5.52	80	*
14	5.53	5.265	80	
15	5.53	5.343	80	
16	5.53	5.334	80	
17	5.53	5.624	80	
18	5.53	5.562	80	*
19	5.53	5.59	80	
20	5.53	5.378	80	
21	5.53	5.621	80	
22	5.53	5.292	80	
23	5.53	5.254	80	

TYPE 6 PARAMETER SHEET				
Trial Number : 14				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.674	80	
2	5.53	5.642	80	
3	5.53	5.347	80	
4	5.53	5.369	80	
5	5.53	5.39	80	
6	5.53	5.378	80	
7	5.53	5.349	80	
8	5.53	5.559	80	*
9	5.53	5.639	80	
10	5.53	5.572	80	
11	5.53	5.302	80	
12	5.53	5.344	80	
13	5.53	5.654	80	
14	5.53	5.403	80	
15	5.53	5.581	80	
16	5.53	5.691	80	
17	5.53	5.545	80	*
18	5.53	5.293	80	
19	5.53	5.529	80	*
20	5.53	5.554	80	*
21	5.53	5.542	80	*
22	5.53	5.677	80	
23	5.53	5.715	80	

TYPE 6 PARAMETER SHEET				
Trial Number : 15				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.535	80	*
2	5.53	5.417	80	
3	5.53	5.36	80	
4	5.53	5.649	80	
5	5.53	5.388	80	
6	5.53	5.281	80	
7	5.53	5.376	80	
8	5.53	5.265	80	
9	5.53	5.401	80	
10	5.53	5.406	80	
11	5.53	5.282	80	
12	5.53	5.391	80	
13	5.53	5.28	80	
14	5.53	5.464	80	
15	5.53	5.686	80	
16	5.53	5.506	80	*
17	5.53	5.679	80	
18	5.53	5.357	80	
19	5.53	5.599	80	
20	5.53	5.48	80	
21	5.53	5.7	80	
22	5.53	5.601	80	
23	5.53	5.379	80	

TYPE 6 PARAMETER SHEET				
Trial Number : 16				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.304	80	
2	5.53	5.277	80	
3	5.53	5.685	80	
4	5.53	5.645	80	
5	5.53	5.252	80	
6	5.53	5.684	80	
7	5.53	5.526	80	*
8	5.53	5.394	80	
9	5.53	5.395	80	
10	5.53	5.633	80	
11	5.53	5.327	80	
12	5.53	5.619	80	
13	5.53	5.562	80	*
14	5.53	5.478	80	
15	5.53	5.649	80	
16	5.53	5.27	80	
17	5.53	5.628	80	
18	5.53	5.276	80	
19	5.53	5.511	80	*
20	5.53	5.601	80	
21	5.53	5.587	80	
22	5.53	5.28	80	
23	5.53	5.604	80	

TYPE 6 PARAMETER SHEET				
Trial Number : 17				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.503	80	*
2	5.53	5.372	80	
3	5.53	5.3	80	
4	5.53	5.714	80	
5	5.53	5.723	80	
6	5.53	5.336	80	
7	5.53	5.289	80	
8	5.53	5.576	80	
9	5.53	5.43	80	
10	5.53	5.7	80	
11	5.53	5.451	80	
12	5.53	5.311	80	
13	5.53	5.679	80	
14	5.53	5.349	80	
15	5.53	5.382	80	
16	5.53	5.643	80	
17	5.53	5.518	80	*
18	5.53	5.416	80	
19	5.53	5.284	80	
20	5.53	5.666	80	
21	5.53	5.572	80	
22	5.53	5.333	80	
23	5.53	5.662	80	

TYPE 6 PARAMETER SHEET				
Trial Number : 18				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.444	80	
2	5.53	5.62	80	
3	5.53	5.603	80	
4	5.53	5.559	80	*
5	5.53	5.551	80	*
6	5.53	5.658	80	
7	5.53	5.6	80	
8	5.53	5.366	80	
9	5.53	5.661	80	
10	5.53	5.398	80	
11	5.53	5.493	80	*
12	5.53	5.545	80	*
13	5.53	5.393	80	
14	5.53	5.632	80	
15	5.53	5.265	80	
16	5.53	5.497	80	*
17	5.53	5.568	80	*
18	5.53	5.662	80	
19	5.53	5.304	80	
20	5.53	5.385	80	
21	5.53	5.48	80	
22	5.53	5.494	80	*
23	5.53	5.278	80	

TYPE 6 PARAMETER SHEET				
Trial Number : 19				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.285	80	
2	5.53	5.641	80	
3	5.53	5.593	80	
4	5.53	5.376	80	
5	5.53	5.696	80	
6	5.53	5.501	80	*
7	5.53	5.617	80	
8	5.53	5.462	80	
9	5.53	5.407	80	
10	5.53	5.555	80	*
11	5.53	5.587	80	
12	5.53	5.297	80	
13	5.53	5.264	80	
14	5.53	5.699	80	
15	5.53	5.375	80	
16	5.53	5.549	80	*
17	5.53	5.5	80	*
18	5.53	5.567	80	*
19	5.53	5.441	80	
20	5.53	5.528	80	*
21	5.53	5.536	80	*
22	5.53	5.682	80	
23	5.53	5.518	80	*

TYPE 6 PARAMETER SHEET				
Trial Number : 20				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.583	80	
2	5.53	5.586	80	
3	5.53	5.273	80	
4	5.53	5.554	80	*
5	5.53	5.419	80	
6	5.53	5.451	80	
7	5.53	5.702	80	
8	5.53	5.375	80	
9	5.53	5.447	80	
10	5.53	5.548	80	*
11	5.53	5.712	80	
12	5.53	5.622	80	
13	5.53	5.701	80	
14	5.53	5.673	80	
15	5.53	5.555	80	*
16	5.53	5.437	80	
17	5.53	5.54	80	*
18	5.53	5.545	80	*
19	5.53	5.453	80	
20	5.53	5.635	80	
21	5.53	5.464	80	
22	5.53	5.621	80	
23	5.53	5.552	80	*

TYPE 6 PARAMETER SHEET				
Trial Number : 21				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.676	80	
2	5.53	5.483	80	
3	5.53	5.417	80	
4	5.53	5.481	80	
5	5.53	5.514	80	*
6	5.53	5.522	80	*
7	5.53	5.309	80	
8	5.53	5.584	80	
9	5.53	5.551	80	*
10	5.53	5.47	80	
11	5.53	5.489	80	
12	5.53	5.434	80	
13	5.53	5.469	80	
14	5.53	5.399	80	
15	5.53	5.405	80	
16	5.53	5.696	80	
17	5.53	5.325	80	
18	5.53	5.313	80	
19	5.53	5.261	80	
20	5.53	5.445	80	
21	5.53	5.56	80	*
22	5.53	5.435	80	
23	5.53	5.344	80	

TYPE 6 PARAMETER SHEET				
Trial Number : 22				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.608	80	
2	5.53	5.568	80	*
3	5.53	5.666	80	
4	5.53	5.414	80	
5	5.53	5.678	80	
6	5.53	5.578	80	
7	5.53	5.378	80	
8	5.53	5.39	80	
9	5.53	5.482	80	
10	5.53	5.346	80	
11	5.53	5.552	80	*
12	5.53	5.417	80	
13	5.53	5.528	80	*
14	5.53	5.694	80	
15	5.53	5.262	80	
16	5.53	5.556	80	*
17	5.53	5.709	80	
18	5.53	5.717	80	
19	5.53	5.385	80	
20	5.53	5.264	80	
21	5.53	5.415	80	
22	5.53	5.485	80	
23	5.53	5.413	80	

TYPE 6 PARAMETER SHEET				
Trial Number : 23				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.513	80	*
2	5.53	5.456	80	
3	5.53	5.593	80	
4	5.53	5.271	80	
5	5.53	5.348	80	
6	5.53	5.442	80	
7	5.53	5.611	80	
8	5.53	5.603	80	
9	5.53	5.291	80	
10	5.53	5.36	80	
11	5.53	5.406	80	
12	5.53	5.323	80	
13	5.53	5.481	80	
14	5.53	5.596	80	
15	5.53	5.549	80	*
16	5.53	5.585	80	
17	5.53	5.426	80	
18	5.53	5.687	80	
19	5.53	5.358	80	
20	5.53	5.573	80	
21	5.53	5.394	80	
22	5.53	5.695	80	
23	5.53	5.63	80	

TYPE 6 PARAMETER SHEET				
Trial Number : 24				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.289	80	
2	5.53	5.275	80	
3	5.53	5.595	80	
4	5.53	5.276	80	
5	5.53	5.365	80	
6	5.53	5.395	80	
7	5.53	5.64	80	
8	5.53	5.519	80	*
9	5.53	5.646	80	
10	5.53	5.396	80	
11	5.53	5.505	80	*
12	5.53	5.367	80	
13	5.53	5.586	80	
14	5.53	5.408	80	
15	5.53	5.658	80	
16	5.53	5.35	80	
17	5.53	5.62	80	
18	5.53	5.52	80	*
19	5.53	5.372	80	
20	5.53	5.251	80	
21	5.53	5.255	80	
22	5.53	5.515	80	*
23	5.53	5.458	80	

TYPE 6 PARAMETER SHEET				
Trial Number : 25				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.543	80	*
2	5.53	5.65	80	
3	5.53	5.317	80	
4	5.53	5.707	80	
5	5.53	5.715	80	
6	5.53	5.578	80	
7	5.53	5.549	80	*
8	5.53	5.414	80	
9	5.53	5.418	80	
10	5.53	5.678	80	
11	5.53	5.539	80	*
12	5.53	5.488	80	
13	5.53	5.431	80	
14	5.53	5.416	80	
15	5.53	5.274	80	
16	5.53	5.363	80	
17	5.53	5.35	80	
18	5.53	5.312	80	
19	5.53	5.679	80	
20	5.53	5.588	80	
21	5.53	5.602	80	
22	5.53	5.568	80	*
23	5.53	5.644	80	

TYPE 6 PARAMETER SHEET				
Trial Number : 26				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.416	80	
2	5.53	5.537	80	*
3	5.53	5.318	80	
4	5.53	5.264	80	
5	5.53	5.591	80	
6	5.53	5.695	80	
7	5.53	5.569	80	*
8	5.53	5.552	80	*
9	5.53	5.607	80	
10	5.53	5.322	80	
11	5.53	5.412	80	
12	5.53	5.25	80	
13	5.53	5.499	80	*
14	5.53	5.371	80	
15	5.53	5.599	80	
16	5.53	5.708	80	
17	5.53	5.255	80	
18	5.53	5.419	80	
19	5.53	5.376	80	
20	5.53	5.424	80	
21	5.53	5.328	80	
22	5.53	5.468	80	
23	5.53	5.405	80	

TYPE 6 PARAMETER SHEET				
Trial Number : 27				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.687	80	
2	5.53	5.689	80	
3	5.53	5.602	80	
4	5.53	5.565	80	*
5	5.53	5.366	80	
6	5.53	5.605	80	
7	5.53	5.388	80	
8	5.53	5.723	80	
9	5.53	5.644	80	
10	5.53	5.326	80	
11	5.53	5.406	80	
12	5.53	5.285	80	
13	5.53	5.613	80	
14	5.53	5.313	80	
15	5.53	5.532	80	*
16	5.53	5.665	80	
17	5.53	5.322	80	
18	5.53	5.65	80	
19	5.53	5.56	80	*
20	5.53	5.719	80	
21	5.53	5.696	80	
22	5.53	5.542	80	*
23	5.53	5.445	80	

TYPE 6 PARAMETER SHEET				
Trial Number : 28				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.27	80	
2	5.53	5.259	80	
3	5.53	5.267	80	
4	5.53	5.51	80	*
5	5.53	5.421	80	
6	5.53	5.563	80	*
7	5.53	5.584	80	
8	5.53	5.314	80	
9	5.53	5.336	80	
10	5.53	5.288	80	
11	5.53	5.516	80	*
12	5.53	5.383	80	
13	5.53	5.305	80	
14	5.53	5.481	80	
15	5.53	5.493	80	*
16	5.53	5.549	80	*
17	5.53	5.539	80	*
18	5.53	5.643	80	
19	5.53	5.556	80	*
20	5.53	5.447	80	
21	5.53	5.596	80	
22	5.53	5.646	80	
23	5.53	5.56	80	*

TYPE 6 PARAMETER SHEET				
Trial Number : 29				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.367	80	
2	5.53	5.553	80	*
3	5.53	5.417	80	
4	5.53	5.277	80	
5	5.53	5.482	80	
6	5.53	5.61	80	
7	5.53	5.496	80	*
8	5.53	5.655	80	
9	5.53	5.357	80	
10	5.53	5.276	80	
11	5.53	5.671	80	
12	5.53	5.575	80	
13	5.53	5.654	80	
14	5.53	5.453	80	
15	5.53	5.541	80	*
16	5.53	5.283	80	
17	5.53	5.434	80	
18	5.53	5.426	80	
19	5.53	5.678	80	
20	5.53	5.471	80	
21	5.53	5.658	80	
22	5.53	5.36	80	
23	5.53	5.306	80	

TYPE 6 PARAMETER SHEET				
Trial Number : 30				
Bursts in Trial: 100				
Burst	Carrier (GHz)	Hop (GHz)	DUT BW (MHz)	Within RX
1	5.53	5.52	80	*
2	5.53	5.429	80	
3	5.53	5.648	80	
4	5.53	5.661	80	
5	5.53	5.345	80	
6	5.53	5.528	80	*
7	5.53	5.338	80	
8	5.53	5.383	80	
9	5.53	5.37	80	
10	5.53	5.441	80	
11	5.53	5.276	80	
12	5.53	5.294	80	
13	5.53	5.452	80	
14	5.53	5.65	80	
15	5.53	5.607	80	
16	5.53	5.438	80	
17	5.53	5.668	80	
18	5.53	5.433	80	
19	5.53	5.626	80	
20	5.53	5.251	80	
21	5.53	5.553	80	*
22	5.53	5.551	80	*
23	5.53	5.493	80	*

Mode1 –802.11ax20

Total Type 1~4 Radar Statistical Performance (5500MHz)

Radar Type	Detection Percentage (%)	Limit (%)	Result
1	93.33	>60%	Pass
2	83.33	>60%	Pass
3	73.33	>60%	Pass
4	76.67	>60%	Pass
Total Type 1~4	81.67	>80%	Pass
5	83.33	≥80%	Pass
6	93.33	≥70%	Pass

Mode2 –802.11ax40

Total Type 1~4 Radar Statistical Performance

Radar Type	Detection Percentage (%)	Limit (%)	Result
1	90.00	>60%	Pass
2	86.67	>60%	Pass
3	80.00	>60%	Pass
4	73.33	>60%	Pass
Total Type 1~4	82.50	>80%	Pass
5	80.00	≥80%	Pass
6	90.00	≥70%	Pass

Mode3 –802.11ax80

Total Type 1~4 Radar Statistical Performance

Radar Type	Detection Percentage (%)	Limit (%)	Result
1	93.33	>60%	Pass
2	83.33	>60%	Pass
3	76.67	>60%	Pass
4	70.00	>60%	Pass
Total Type 1~4	80.83	>80%	Pass
5	83.33	≥80%	Pass
6	90.00	≥70%	Pass