



FCC REPORT

| | | |
|--------------------------------|---|--|
| Applicant | : | XIAMEN COMFORT SCIENCE & TECHNOLOGY GROUP CO.,LTD. |
| Address of Applicant | : | (5/F)NO.168, QIANPU ROAD, SIMING DISTRICT, XIAMEN, Fujian CHINA |
| Manufacturer | : | XIAMEN HEALTHCARE ELECTRONIC CO.,LTD. |
| Address of Manufacturer | : | 65-66#, 62-63# BUILDING, SIMING ZONE, TONGAN INDUSTRIAL DISTRICT, XIAMEN CITY, FUJIAN PROVINCE, P.R.CHINA |
| Equipment under Test | : | Massage Chair |
| Model No. | : | ES-1322A, SNS-25 |
| FCC ID | : | YMX-ES1322A |
| Test Standard(s) | : | FCC CFR Title 47 Part 15 Subpart C FCC KDB 680106 D01 Wireless Transfer v04 |
| Report No. | : | A2505146-C01-R01 |
| Issue Date | : | 2025/07/15 |
| Issued By | : | Shenzhen Alpha Product Testing Co., Ltd. Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103, Shenzhen City, Guangdong Province, P.R. China. |

Table of Contents

| | | |
|------|--|----|
| 1. | Summary of Test Results | 5 |
| 2. | General Test Information..... | 6 |
| 2.1. | Description of EUT | 6 |
| 2.2. | Accessories of EUT | 6 |
| 2.3. | Block diagram of EUT configuration for test..... | 6 |
| 2.4. | Test mode description | 7 |
| 2.5. | Deviations of test standard..... | 7 |
| 2.6. | Test environment conditions | 7 |
| 2.7. | Test laboratory | 7 |
| 3. | RF Exposure evaluation for FCC | 8 |
| 3.1. | Test equipment..... | 8 |
| 3.2. | Block diagram of test setup..... | 8 |
| 3.3. | Limits | 8 |
| 3.4. | Assistant equipment used for test | 8 |
| 3.5. | Test procedure | 9 |
| 3.6. | Test result..... | 9 |
| 3.7. | Test data | 9 |
| 4. | Test Setup Photograph | 12 |

Test Report Declare

| | | |
|-------------------------|---|---|
| Applicant | : | XIAMEN COMFORT SCIENCE & TECHNOLOGY GROUP CO.,LTD. |
| Address of Applicant | : | (5/F)NO.168, QIANPU ROAD, SIMING DISTRICT, XIAMEN, Fujian CHINA |
| Manufacturer | : | XIAMEN HEALTHCARE ELECTRONIC CO.,LTD. |
| Address of Manufacturer | : | 65-66#, 62-63# BUILDING, SIMING ZONE, TONGAN INDUSTRIAL DISTRICT, XIAMEN CITY, FUJIAN PROVINCE, P.R.CHINA |
| Equipment under Test | : | Massage Chair |
| Model No. | : | ES-1322A, SNS-25 |
| Trademark | : | / |

Test Standard Used:


FCC CFR Title 47 Part 15 Subpart C
FCC KDB 680106 D01 Wireless Transfer v04

We Declare:

The equipment described above is tested by Shenzhen Alpha Product Testing Co., Ltd. and in the configuration tested the equipment complied with the standards specified above. The test results are contained in this test report and Shenzhen Alpha Product Testing Co., Ltd. is assumed of full responsibility for the accuracy and completeness of these tests.

| | | | |
|------------------|------------------|---------------|-------------------------|
| Report No.: | A2505146-C01-R01 | | |
| Date of Receipt: | 2025/05/15 | Date of Test: | 2025/07/15 - 2025/07/15 |

Prepared By:

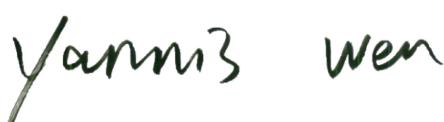

Yannis Wen/Engineer

Approved By:



Jack Xu/EMC Manager

Note: This report applies to above tested sample only. This report shall not be reproduced in parts without written approval of Shenzhen Alpha Product Testing Co., Ltd.

Revision History

| Rev. | Revisions | Issue Date | Revised By |
|------|---------------|------------|------------|
| V0 | Initial issue | 2025/07/15 | Yannis Wen |

1. Summary of Test Results

| No. | Test Parameter | Clause No. | Result |
|-----|--------------------------------|---------------------------|--------|
| 1 | RF Exposure evaluation for FCC | §1.1307(b)(1) & KDB680106 | Pass |

Note: 1.N/A is an abbreviation for Not Applicable, and means this item is not applicable for this device or no need to test according to standard.

2. Decision rules for the conclusion of this test report: decision by actual test data without considering measurement uncertainty.

2. General Test Information

2.1. Description of EUT

| | | |
|----------------------------|---|--|
| EUT Name | : | Massage Chair |
| Model Number | : | ES-1322A, SNS-25 |
| Difference of model number | : | There is no difference except the name of the model. All tests are made with the SNS-25 model. |
| Power Supply | : | AC 120V/60Hz |
| Hardware Version | : | 1.0 |
| Software Version | : | 1.0 |

| | | |
|-----------------------|---|---|
| Radio Specification | : | WPT |
| Operation Frequency | : | 110~205KHz |
| Modulation | : | MSK |
| Antenna Type | : | Coil Antenna |
| Max Antenna Gain(dBi) | : | Maximum Gain is 0dBi (This value is supplied by applicant). |


Note: The above EUT information is declared by manufacturer and for more detailed features description please refer to the manufacturer's specifications or User's Manual. The above Antenna information is declared by manufacturer and for more detailed features description please refer to the manufacturer's specifications, the laboratory shall not be held responsible.

“” means to be chosen or applicable; “” means don't to be chosen or not applicable; This note applies to entire report.

2.2. Accessories of EUT

| Accessories | Manufacturer | Model number | Description |
|-------------|--------------|--------------|-------------|
| / | / | / | / |

2.3. Block diagram of EUT configuration for test

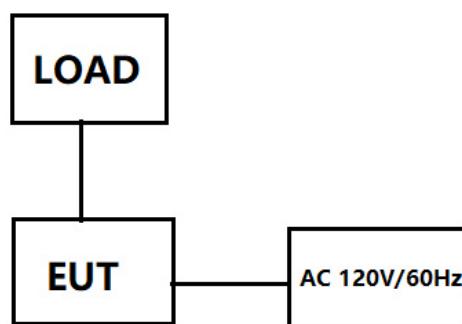

2.4. Test mode description

| Channel | Frequency(KHz) |
|---------|----------------|
| 1 | 128.3 |

2.5. Deviations of test standard

No deviation.

2.6. Test environment conditions

During the measurement the environmental conditions were within the listed ranges:

| Items | Required | Actual |
|--------------------|-----------|--------|
| Temperature range: | 15-35°C | 24°C |
| Humidity range: | 25-75% | 56% |
| Pressure range: | 86-106kPa | 98kPa |

Note: The specific temperature and humidity information of each test item refers to the temperature and humidity record in the corresponding test data.

2.7. Test laboratory

Shenzhen Alpha Product Testing Co., Ltd.

Add.: Building i, No.2, Lixin Road, Fuyong Street, Bao'an District, 518103, Shenzhen City, Guangdong Province, P.R. China.

Tel.: 4008-3008-95, Website: <http://www.a-lab.cn>, Email: service@a-lab.cn

CNAS Accreditation No. L7472; A2LA Accreditation Number: 4762.01

FCC Designation Number: CN1182, Test Firm Registration Number: 203110


Innovation, Science and Economic Development Canada Site Registration Number: 12135A

3. RF Exposure evaluation for FCC

3.1. Test equipment

| Equipment | Manufacturer | Model No. | Serial No. | Last Cal. | Cal Due To |
|---|--------------|------------------------------|------------|------------|------------|
| Exposure Level Tester | narda | ELT-400 | Aa-EE030 | 2024/08/13 | 2025/08/14 |
| Magnetic field probe 100cm ² | narda | ELT probe 100cm ² | Aa-EE031 | 2024/08/13 | 2025/08/14 |
| Isotropic Electric Field Probe | narda | EP-601 | Aa-EE067 | 2023/08/11 | 2025/08/10 |

3.2. Block diagram of test setup

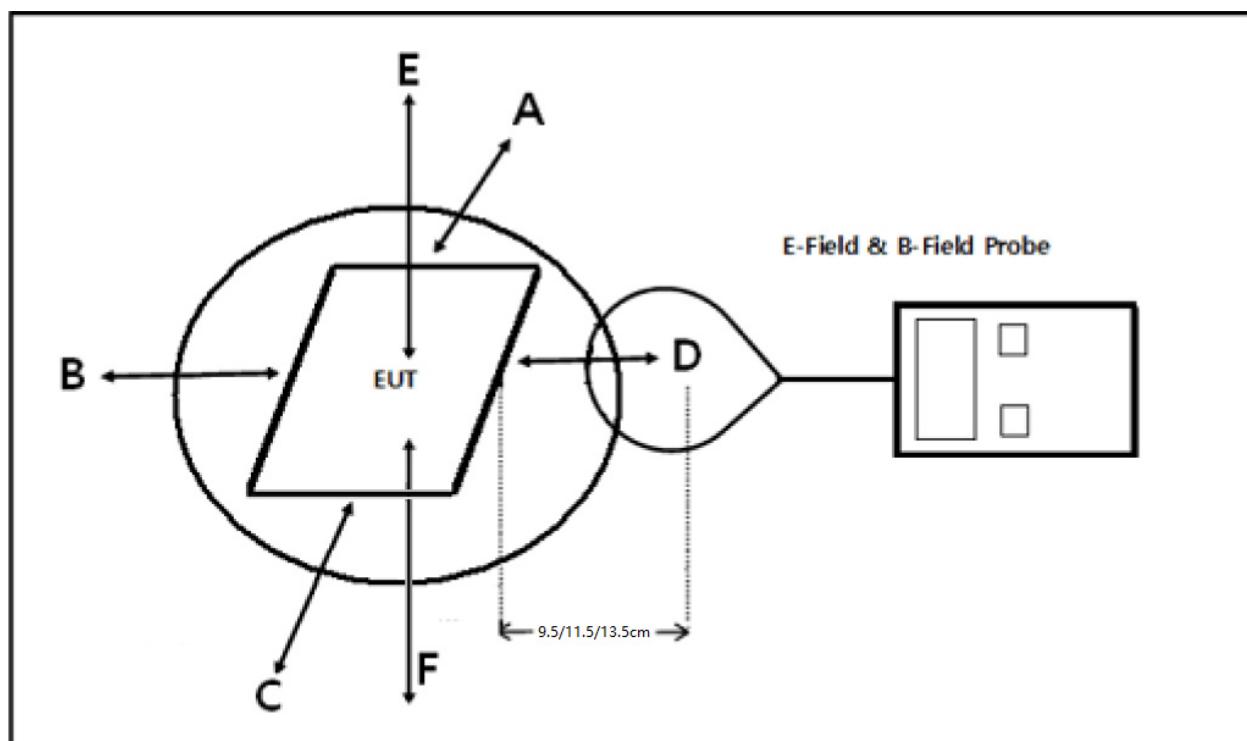

3.3. Limits

According to §1.1307(b)(1), systems operating under the provisions of this section shall be operated in a manner that ensures that the public is not exposed to radio frequency energy level in excess of the Commission's guidelines. According to §1.1310 and §2.1091 RF exposure is calculated. According KDB 680106 D01 Wireless Transfer v04.

3.4. Assistant equipment used for test

| Assistant equipment | Manufacturer | Model number | Description | other |
|---------------------|--------------|--------------|-------------|-------|
| / | / | / | / | / |

3.5. Test procedure

- a) The RF exposure test was performed in shielded chamber.
- b) The measurement probe was placed at test distance(8cm) which is between the edge of the charger and the geometric centre of probe.
- c) The measurement probe used to search of highest strength.
- d) The highest emission level was recorded and compared with limit as soon as measurement of each points(A, C, E, F) were completed.
- e) The EUT were measured according to the dictates of KDB 680106 D01 Wireless Transfer v04.

3.6. Test result

| | |
|------------------------------|-----------------------------------|
| Test Site: Shield Room CE 1# | Test Date: 2025/07/15--2025/07/15 |
| Condition: 24°C,56%RH,101kPa | Test Engineer: Yannis Wen |
| Memo: / | |

| | |
|----------------------------|-------------------------|
| EUT Name: Massage Chair | EUT Model: SNS-25 |
| Sample No.: A2505146-S0001 | Test Mode: TX: 128.3kHz |
| Power supply: AC 120V/60Hz | Memo: / |

/

3.7. Test data

For Full load mode:

E-Field Strength at 9.5cm for position D from the edges surrounding the EUT (V/m)

| Frequency Range (MHz) | Test Position A | Test Position B | Test Position C | Test Position D | Test Position E | Test Position F | Limit (50%) (V/m) | Limits Test (V/m) |
|-----------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-------------------|-------------------|
| 0.110-0.205 | / | / | / | 1.690 | / | / | 307 | 614 |

H-Field Strength at 9.5cm for position D from the edges surrounding the EUT (A/m)

| Frequency Range (MHz) | Test Position A | Test Position B | Test Position C | Test Position D | Test Position E | Test Position F | Limit (50%) (A/m) | Limits Test (A/m) |
|-----------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-------------------|-------------------|
| 0.110-0.205 | / | / | / | 0.802 | / | / | 0.815 | 1.63 |
| 0.110-0.205 | / | / | / | 1.003 | / | / | | uT |

E-Field Strength at 11.5cm for position D from the edges surrounding the EUT (V/m)

| Frequency Range (MHz) | Test Position A | Test Position B | Test Position C | Test Position D | Test Position E | Test Position F | Limit (50%) (V/m) | Limits Test (V/m) |
|-----------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-------------------|-------------------|
| 0.110-0.205 | / | / | / | 1.322 | / | / | 307 | 614 |

H-Field Strength at 11.5cm for position D from the edges surrounding the EUT (A/m)

| Frequency Range (MHz) | Test Position A | Test Position B | Test Position C | Test Position D | Test Position E | Test Position F | Limit (50%) (A/m) | Limits Test (A/m) |
|-----------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-------------------|-------------------|
| 0.110-0.205 | / | / | / | 0.792 | / | / | 0.815 | 1.63 |
| 0.110-0.205 | / | / | / | 0.990 | / | / | | uT |

E-Field Strength at 13.5cm for position D from the edges surrounding the EUT (V/m)

| Frequency Range (MHz) | Test Position A | Test Position B | Test Position C | Test Position D | Test Position E | Test Position F | Limit (50%) (V/m) | Limits Test (V/m) |
|-----------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-------------------|-------------------|
| 0.110-0.205 | / | / | / | 1.306 | / | / | 307 | 614 |

H-Field Strength at 13.5cm for position D from the edges surrounding the EUT (A/m)

| Frequency Range (MHz) | Test Position A | Test Position B | Test Position C | Test Position D | Test Position E | Test Position F | Limit (50%) (A/m) | Limits Test (A/m) |
|-----------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-------------------|-------------------|
| 0.110-0.205 | / | / | / | 0.762 | / | / | 0.815 | 1.63 |
| 0.110-0.205 | / | / | / | 0.953 | / | / | | uT |

For Null load mode:

E-Field Strength 9.5cm for position D from the edges surrounding the EUT (V/m)

| Frequency Range (MHz) | Test Position A | Test Position B | Test Position C | Test Position D | Test Position E | Test Position F | Limit (50%) (V/m) | Limits Test (V/m) |
|-----------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-------------------|-------------------|
| 0.110-0.205 | / | / | / | 1.295 | / | / | 307 | 614 |

H-Field Strength at 9.5cm for position D from the edges surrounding the EUT (A/m)

| Frequency Range (MHz) | Test Position A | Test Position B | Test Position C | Test Position D | Test Position E | Test Position F | Limit (50%) (A/m) | Limits Test (A/m) |
|-----------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-------------------|-------------------|
| 0.110-0.205 | / | / | / | 0.730 | / | / | 0.815 | 1.63 |
| 0.110-0.205 | / | / | / | 0.913 | / | / | uT | |

E-Field Strength 11.5cm for position D from the edges surrounding the EUT (V/m)

| Frequency Range (MHz) | Test Position A | Test Position B | Test Position C | Test Position D | Test Position E | Test Position F | Limit (50%) (V/m) | Limits Test (V/m) |
|-----------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-------------------|-------------------|
| 0.110-0.205 | / | / | / | 1.269 | / | / | 307 | 614 |

H-Field Strength at 11.5cm for position D from the edges surrounding the EUT (A/m)

| Frequency Range (MHz) | Test Position A | Test Position B | Test Position C | Test Position D | Test Position E | Test Position F | Limit (50%) (A/m) | Limits Test (A/m) |
|-----------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-------------------|-------------------|
| 0.110-0.205 | / | / | / | 0.724 | / | / | 0.815 | 1.63 |
| 0.110-0.205 | / | / | / | 0.905 | / | / | uT | |

E-Field Strength 13.5cm for position D from the edges surrounding the EUT (V/m)

| Frequency Range (MHz) | Test Position A | Test Position B | Test Position C | Test Position D | Test Position E | Test Position F | Limit (50%) (V/m) | Limits Test (V/m) |
|-----------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-------------------|-------------------|
| 0.110-0.205 | / | / | / | 1.247 | / | / | 307 | 614 |



H-Field Strength at 13.5cm for position D from the edges surrounding the EUT (A/m)

| Frequency Range (MHz) | Test Position A | Test Position B | Test Position C | Test Position D | Test Position E | Test Position F | Limit (50%) (A/m) | Limits Test (A/m) |
|-----------------------|-----------------|-----------------|-----------------|-----------------|-----------------|-----------------|-------------------|-------------------|
| 0.110-0.205 | / | / | / | 0.709 | / | / | 0.815 | 1.63 |
| 0.110-0.205 | / | / | / | 0.886 | / | / | uT | |


Remark:

1. uT to A/m: A/m = uT/1.25.

4. Test Setup Photograph

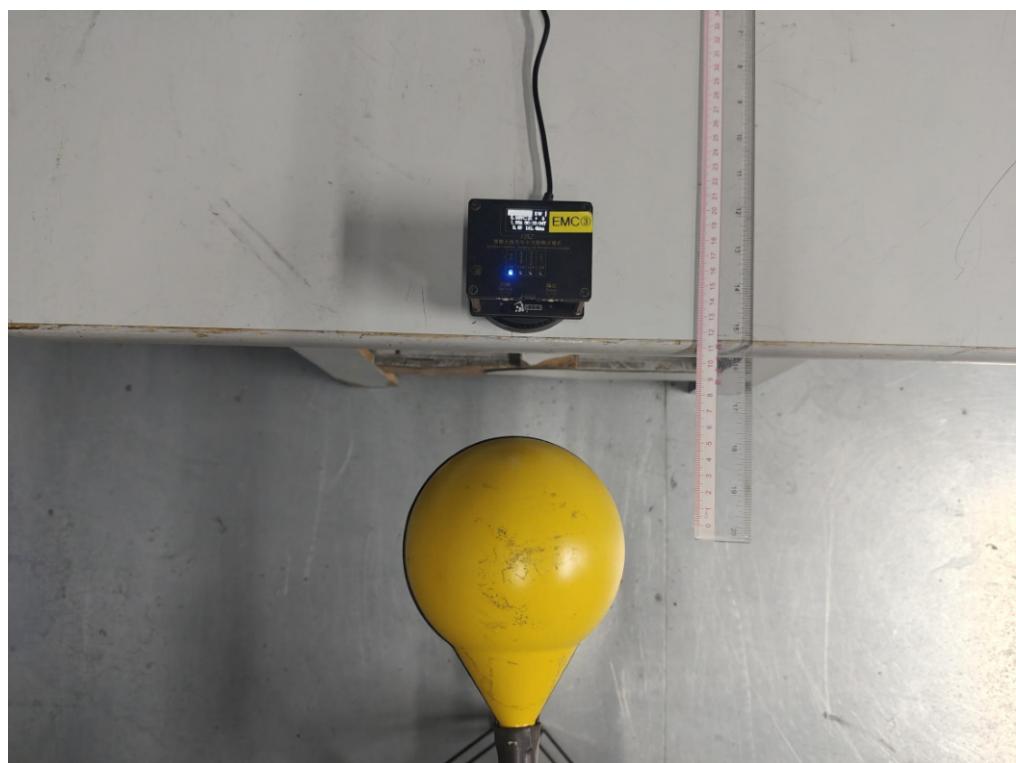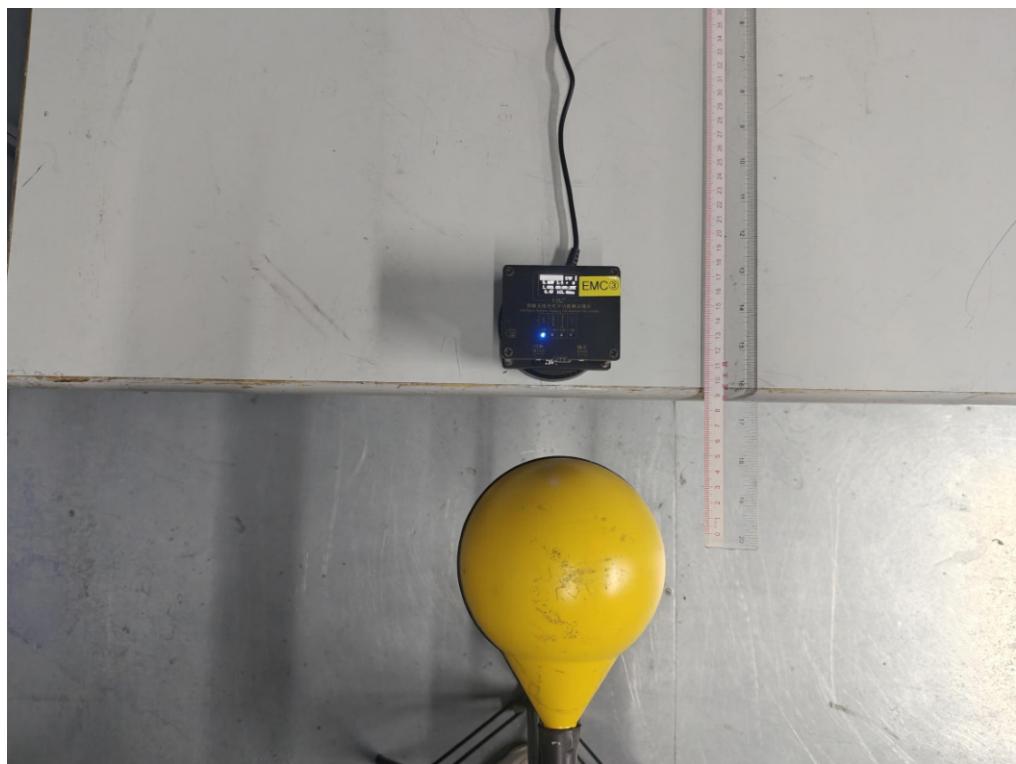



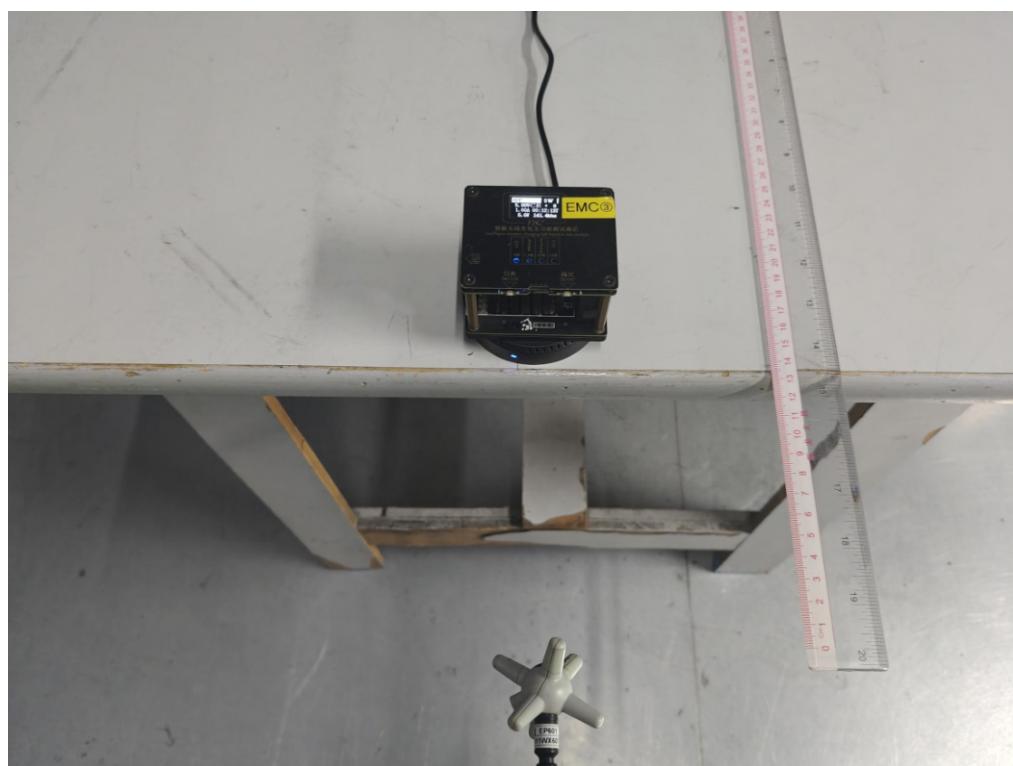

-----End Report-----